

CalAmp Wireless Networks Corp.
299 Johnson Avenue, Suite 110
Waseca, MN 56093-0833 USA
Phone: 507-833-8819
Fax: 507-833-6748

FCC Part 90 Certification Application

IC RSS-119 Certification Application

For The

**IntegraTR
VHF RADIO MODEM**

FCC ID: NP44018450

IC: 773B-4018450

TABLE OF CONTENTS

	Page #
Test 1: Transmitter Rated Output Power	3
Test 2: Transmitter Spurious and Harmonic Output	4
Test 3: Transient Frequency Behavior	10
Test 4: Frequency Stability with Variation in Supply Voltage	21
Test 5: Frequency Stability with Variation in Ambient Temperature	24
Test 6: Transmitter Occupied Bandwidth - Mask D	30
12.5 kHz Half Channel Mask D	34
6.25 kHz Full Channel Mask E	56
Test 7: Field Strength of Spurious Radiation	77
Calibration Information	84

NAME OF TEST: Transmitter Rated Power Output


RULE PART NUMBER: 2.1046 (a) (c)
IC: RSS-119 5.4

TEST RESULTS: See results below

TEST CONDITIONS: Standard Test Conditions

TEST EQUIPMENT: 50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 25-A-MFN-6 (6dB, 25W)
Power Supply, HP 6653A
Digital Multimeter, Instek GDM-8245
Power Meter, Model HP 437B

TEST SET-UP:

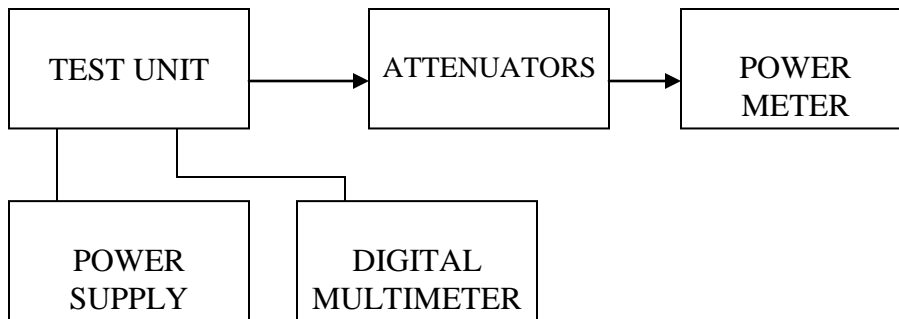

TEST RESULTS:

Frequency (MHz)	DC Voltage at Final (Vdc)	DC Current into Final (Adc)	DC Power into Final (W)	RF Power Output (W)
138.025	13.3	1.43	19.0	5.33
138.025	13.3	.78	10.4	1.04
143.0125	13.3	1.40	18.62	5.18
143.0125	13.3	.78	10.32	1.06
150.1	13.3	1.32	17.6	5.53
150.1	13.3	.73	9.71	1.06
161.010	13.3	1.23	16.36	5.21
161.010	13.3	.68	9.04	1.02
173.975	13.3	1.50	20.0	5.28
173.975	13.3	.79	10.5	1.03

NAME OF TEST: Transmitter Spurious and Harmonic Outputs

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)
IC: RSS-119 5.8.4, 5.8.3

MINIMUM STANDARDS: For 5 Watts: $50+10\text{Log}_{10}(5 \text{ Watts}) = -57.0 \text{ dBc}$
or -65dBc , whichever is the lesser attenuation.

For 1 Watt: $50+10\text{Log}_{10}(1 \text{ Watt}) = -50 \text{ dBc}$
or -70 dBc , whichever is the lesser attenuation.


TEST RESULTS: Meets minimum standards (see data on following pages)

TEST CONDITIONS: Standard Test Conditions, 25 C
RF Voltage measured at antenna terminals

TEST PROCEDURE: TIA/EIA – 603-C

TEST EQUIPMENT: 50-Ohm Attenuator, Bird Electronics Model 25-A-MFN-6 (6dB, 25W)
50-Ohm Attenuator, Min-Circuits Model Cat-6 (6dB)
Power Supply, HP 6653A
Spectrum Analyzer, HP-8563E
Reference Generator, Agilent E8257D
High Pass Filter, Mini Circuits BHP-300

TEST SET-UP:

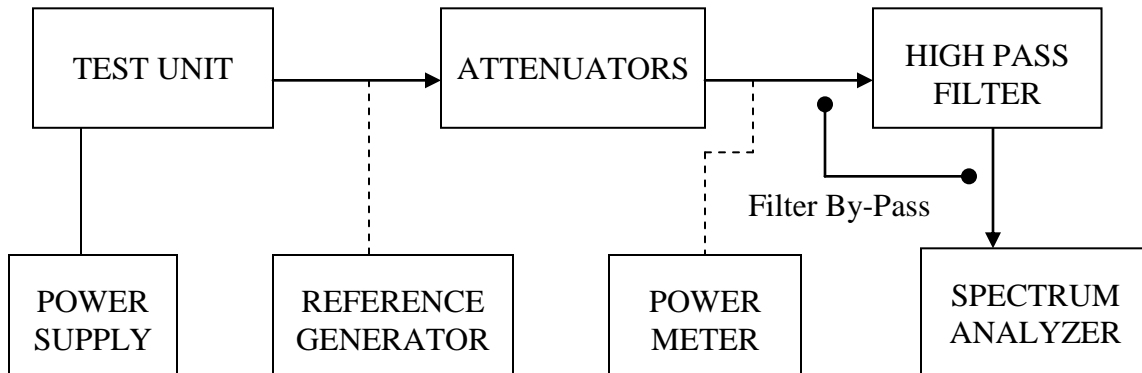

MEASUREMENT PROCEDURE:

1. The transmitter carrier output frequency are 138.025, 143.0125, 150.1, 161.01, 173.975. The reference oscillator frequency is 14.40 MHz. The power amplifier has voltage levels at 13.3 Volts for 5 watts.
2. The carrier reference was established on the spectrum analyzer with the filter by-pass in place. Then the spectrum was scanned from DC to 2 Fc. Finally, the high pass filter was inserted to null the carrier fundamental and extend the range of the spectrum analyzer for harmonic measurements above 2 Fc.
3. At each spurious frequency, generation substitution was used to establish the true spurious level.
4. The spectrum was scanned to the 10th harmonic of the highest internally generated frequency.

Tuned Frequency	143.0125 MHz	
Power	5 Watts 37 dBm	
Min. Specification	-57.0 dBc	
Worse Case	-89.28 dBc	
<u>Spurious Frequency (MHz)</u>	<u>Relation to Carrier</u>	<u>Relative to Carrier (dBc)</u>
286.0250	2 fo	-89.28
429.0375	3 fo	-104.28
572.0500	4 fo	-127.20
715.0625	5 fo	-124.60
858.0750	6 fo	-126.96
1001.0875	7 fo	-137.00
1144.1000	8 fo	-130.70
1287.1125	9 fo	-113.20
1430.1250	10 fo	-127.70

Tuned Frequency	143.0125 MHz	
Power	1 Watt 30.0 dBm	
Min. Specification	-50.0 dBc	
Worse Case	-85.40 dBc	
<u>Spurious Frequency (MHz)</u>	<u>Relation to Carrier</u>	<u>Relative to Carrier (dBc)</u>
286.0250	2 fo	-85.40
429.0375	3 fo	-111.10
572.0500	4 fo	-136.00
715.0625	5 fo	-123.00
858.0750	6 fo	-125.00
1001.0875	7 fo	-138.00
1144.1000	8 fo	-138.00
1287.1125	9 fo	-116.00
1430.1250	10 fo	-134.00

Tuned Frequency	150.1 MHz	Tuned Frequency	150.1 MHz		
Power	5 Watts	Power	1 Watt		
	37 dBm		30.0 dBm		
Min. Specification	-57.0 dBc	Min. Specification	-50.0 dBc		
Worse Case	-103.92 dBc	Worse Case	-99.38 dBc		
<u>Spurious</u>	<u>Relation to</u>	<u>Relative to</u>	<u>Spurious</u>	<u>Relation to</u>	<u>Relative to</u>
<u>Frequency (MHz)</u>	<u>Carrier</u>	<u>Carrier (dBc)</u>	<u>Frequency (MHz)</u>	<u>Carrier</u>	<u>Carrier (dBc)</u>
300.2	2 fo	-103.92	300.2	2 fo	-99.38
450.3	3 fo	-112.10	450.3	3 fo	-119.66
600.4	4 fo	-123.00	600.4	4 fo	-126.98
750.5	5 fo	-123.00	750.5	5 fo	-128.66
900.6	6 fo	-120.50	900.6	6 fo	-138.00
1050.7	7 fo	-128.30	1050.7	7 fo	-138.00
1200.8	8 fo	-122.30	1200.8	8 fo	-138.00
1350.9	9 fo	-104.50	1350.9	9 fo	-138.00
1501.0	10 fo	-121.00	1501.0	10 fo	-103.60

Tuned Frequency	161.010 MHz	Tuned Frequency	161.010 MHz		
Power	5 Watts	Power	1 Watt		
	37 dBm		30.0 dBm		
Min. Specification	-57.0 dBc	Min. Specification	-50.0 dBc		
Worse Case	-103.92 dBc	Worse Case	-99.38 dBc		
<u>Spurious</u>	<u>Relation to</u>	<u>Relative to</u>	<u>Spurious</u>	<u>Relation to</u>	<u>Relative to</u>
<u>Frequency (MHz)</u>	<u>Carrier</u>	<u>Carrier (dBc)</u>	<u>Frequency (MHz)</u>	<u>Carrier</u>	<u>Carrier (dBc)</u>
322.02	2 fo	-103.92	322.02	2 fo	-99.38
483.03	3 fo	-112.10	483.03	3 fo	-119.66
644.04	4 fo	-123.00	644.04	4 fo	-126.98
805.05	5 fo	-123.00	805.05	5 fo	-128.66
966.06	6 fo	-120.50	966.06	6 fo	-138.00
1127.07	7 fo	-128.30	1127.07	7 fo	-138.00
1288.08	8 fo	-122.30	1288.08	8 fo	-138.00
1449.09	9 fo	-104.50	1449.09	9 fo	-138.00
1610.10	10 fo	-121.00	1610.10	10 fo	-103.60

Tuned Frequency	173.975 MHz		
Power	5 Watts 37 dBm		
Min. Specification	-57.0 dBc		
Worse Case	-85.70 dBc		
	Spurious	Relation to	
	<u>Frequency (MHz)</u>	<u>Carrier</u>	
		<u>Relative to</u>	
		<u>Carrier (dBc)</u>	
	347.950	2 fo	-108.92
	521.925	3 fo	-115.00
	695.900	4 fo	-121.20
	869.875	5 fo	-85.70
	1043.850	6 fo	-116.00
	1217.825	7 fo	-127.00
	1391.800	8 fo	-106.50
	1565.775	9 fo	-103.00
	1739.750	10 fo	-91.80


Tuned Frequency	173.975 MHz		
Power	1 Watt 30.0 dBm		
Min. Specification	-50.0 dBc		
Worse Case	-94.4 dBc		
	Spurious	Relation to	
	<u>Frequency (MHz)</u>	<u>Carrier</u>	
		<u>Relative to</u>	
		<u>Carrier (dBc)</u>	
	347.950	2 fo	-101.54
	521.925	3 fo	-94.40
	695.900	4 fo	-122.70
	869.875	5 fo	-126.00
	1043.850	6 fo	-138.80
	1217.825	7 fo	-133.70
	1391.800	8 fo	-133.60
	1565.775	9 fo	-122.80
	1739.750	10 fo	-116.80

NAME OF TEST: Transient Frequency Behavior

RULE PART NUMBER: 90.214
RSS-119 5.9

MINIMUM STANDARD: ± 12.5 kHz channel (used worst case numbers from 138.025 to 173.975 MHz)

<u>TIME INTERVAL</u>	<u>MAXIMUM FREQUENCY DIFFERENCE (kHz)</u>	<u>TIME (ms)</u>
T1	± 12.5	10
T2	± 6.25	25
T3	± 12.5	10

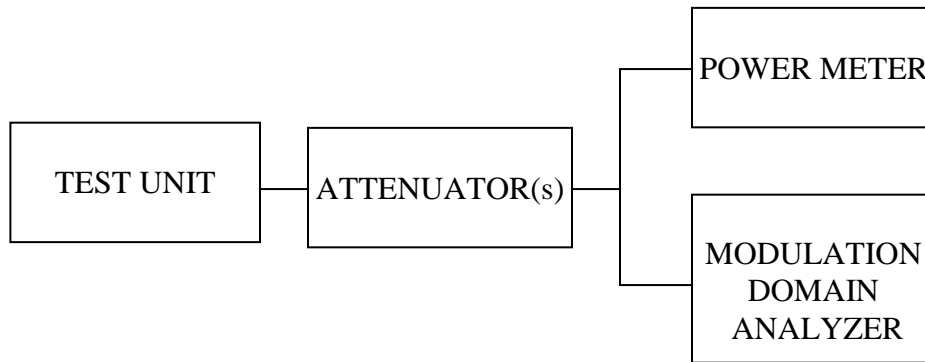

TEST RESULTS: Meets minimum standards, see data on following pages

TEST CONDITIONS: RF Power Level = 5.0 Watts and 1.0 Watt
Standard Test Conditions, 25 C

TEST PROCEDURE: TIA/EIA – 603-C


TEST EQUIPMENT: 50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 25-A-MFN-6 (6dB, 25W)
Power Supply, Agilent 6654A
Modulation Domain Analyzer, HP-53310A
Power Meter, Model HP 437B

Frequency : 138.02500 MHz
 Power: 1 W

Key-Down

(hp) Freq C pre-trigger

tlk

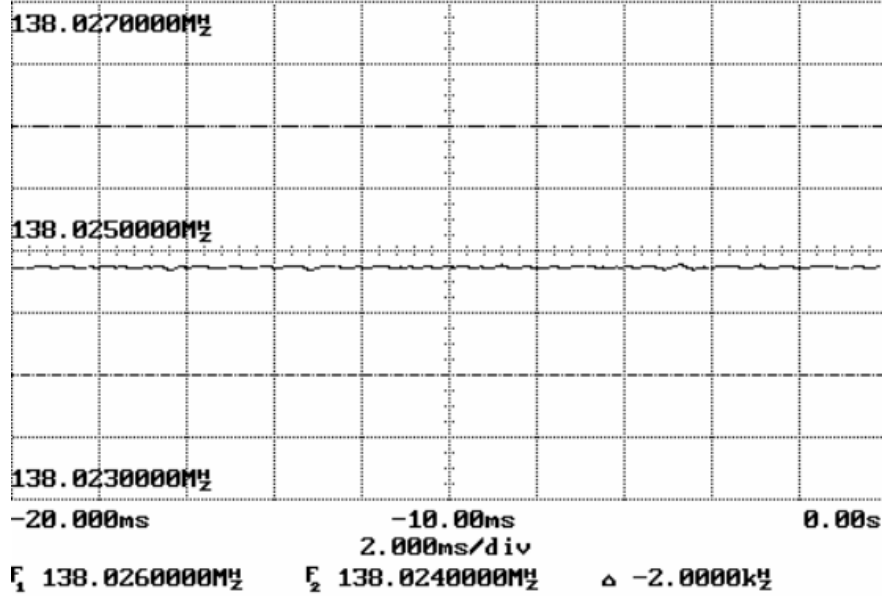

TRIGGER

Triggered
Auto

Ext Freq **RF**
Edge Value Env


Arm Only

f **↻**

Key-up

(hp) Freq C rem tlk
waiting for trigger

ref ext

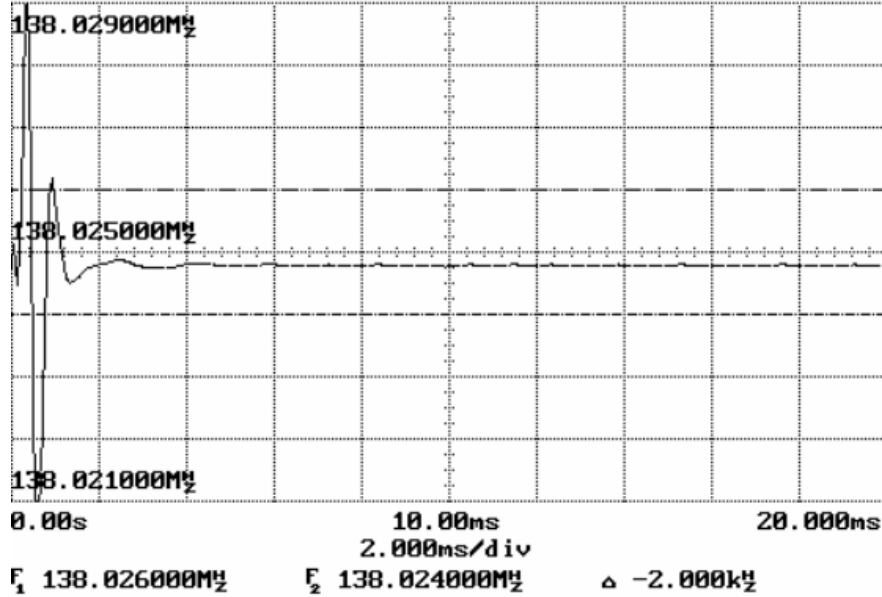

TIMEBASE

2.000ms/div

Reference ---
Left Ctr Right

Delay ---
0.00s

Panorama ---
Off On


ref ext

Frequency : 138.02500 MHz
 Power: 5 W

Key-Down

(hp) Freq C pre-trigger

tlk

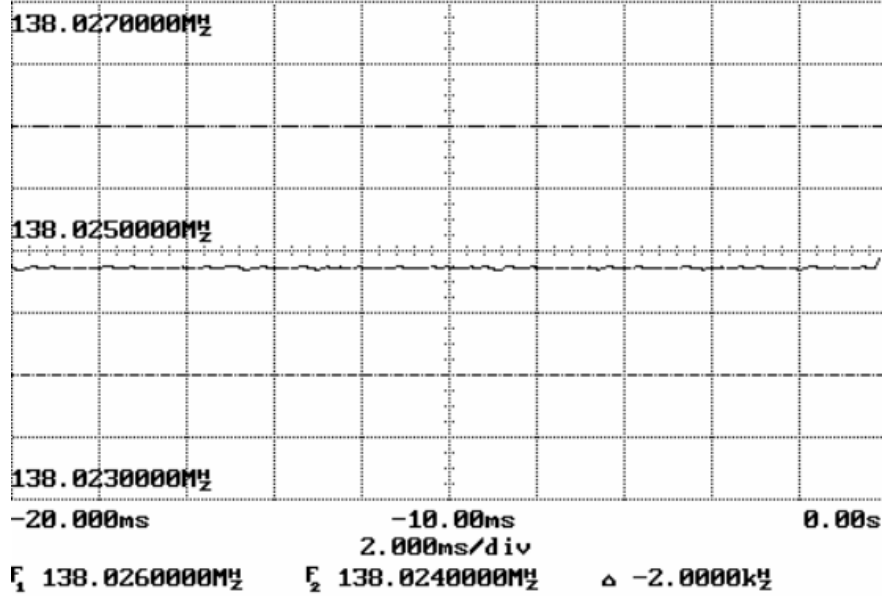

TRIGGER
 Triggered
 Auto


Ext Freq RF
 Edge Value Env

Arm Only

Key-up

(hp) Freq C rem tlk
 waiting for trigger

ref ext

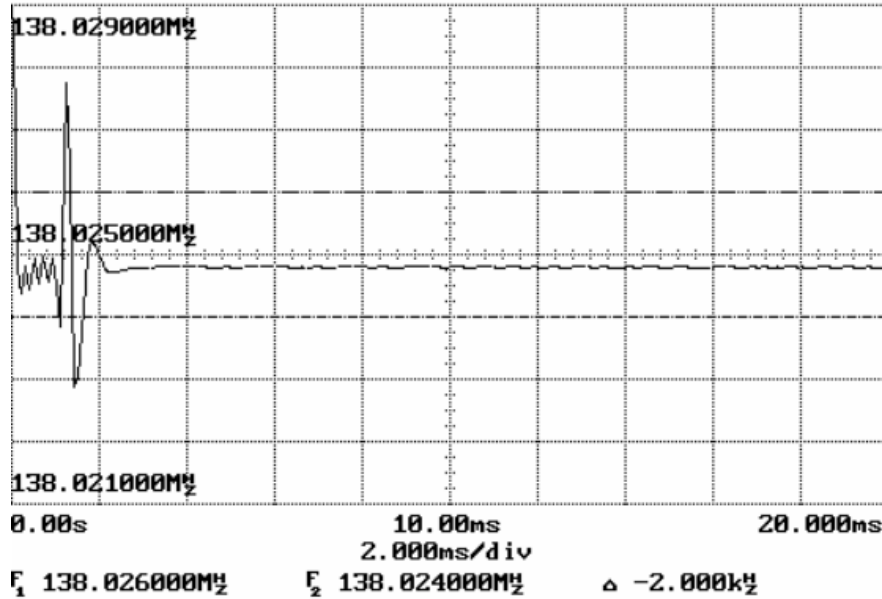

TIMEBASE
 2.000ms/div

Reference
 Left Ctr Right


Delay
 0.00s

Panorama
 Off On

ref ext

Frequency : 143.01250 MHz
 Power: 1 W

Key-Down

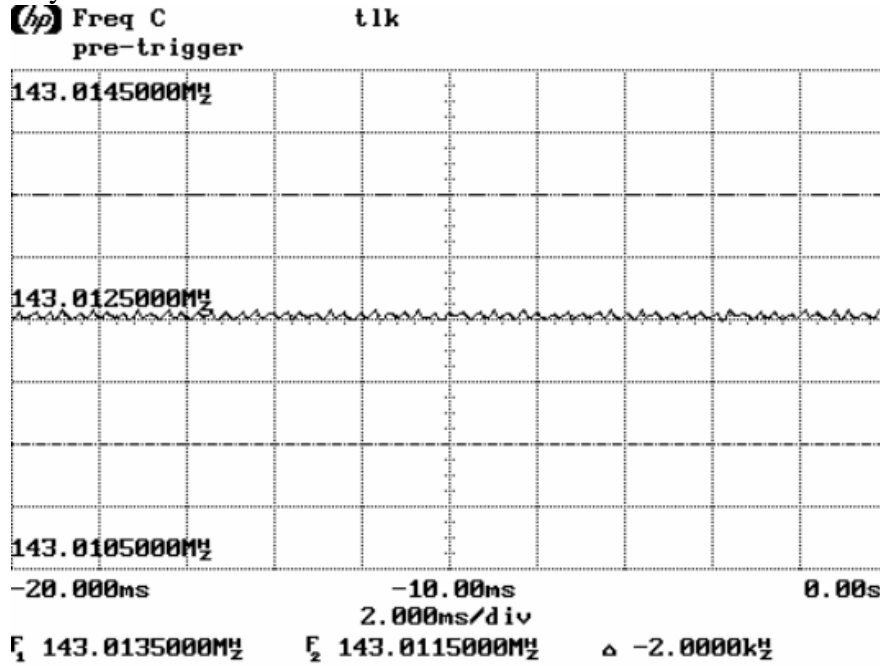

TIMEBASE


2.000ms/div

Reference
 Left Ctr Right

Delay
 0.00s

Panorama
 Off On

Key-up

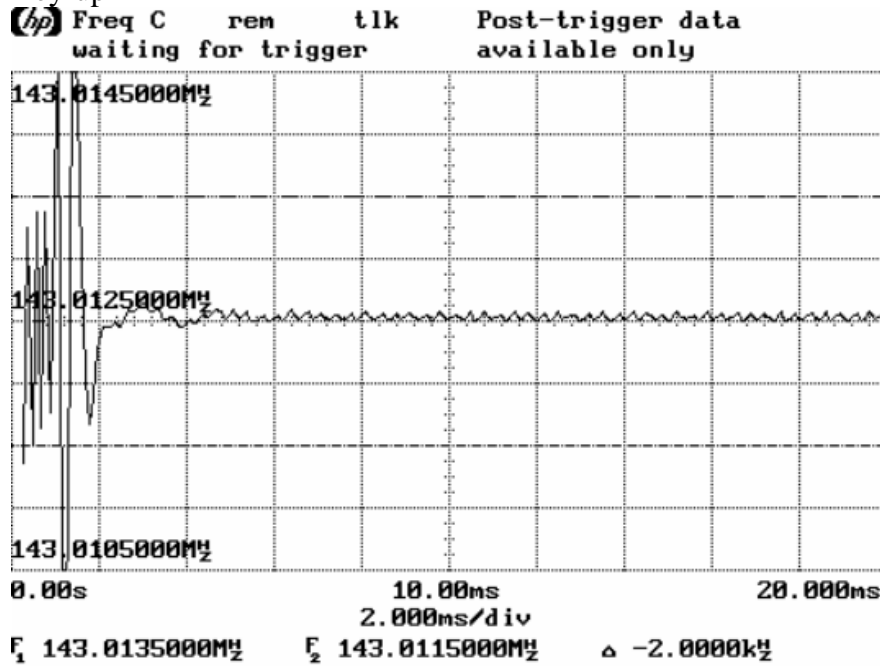

ref ext

TRIGGER

Triggered
 Auto

Ext Freq RF
 Edge Value Env

Time Ref Only


⏪ ⏩

ref ext

Frequency : 143.01250 MHz
 Power: 5 W

Key-Down


(hp) Freq C rem t1k
 pre-trigger

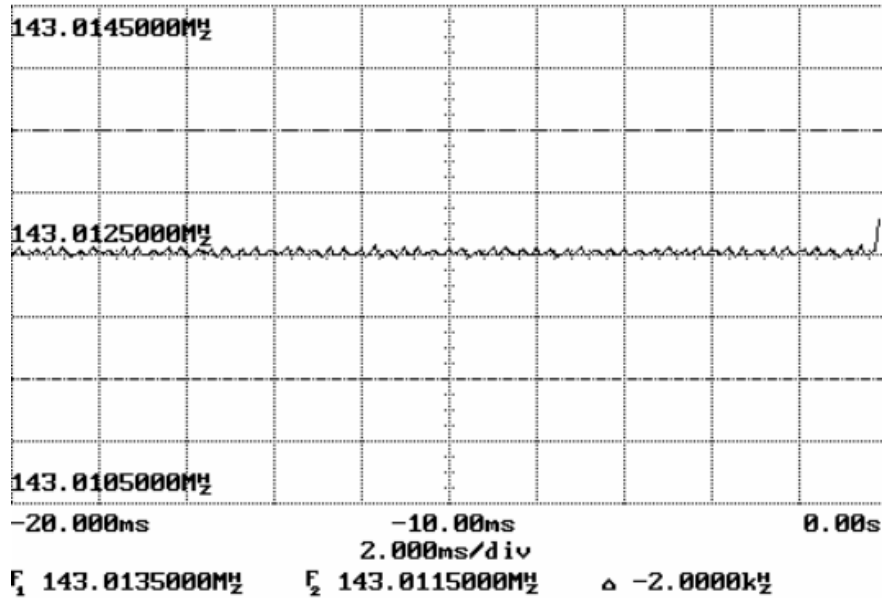

TIMEBASE
 2.000ms/div
 Reference
 Left Ctr Right
 Delay
 0.00s
 Panorama
 Off On

Key-up

(hp) Freq C t1k Post-trigger data
 waiting for trigger available only

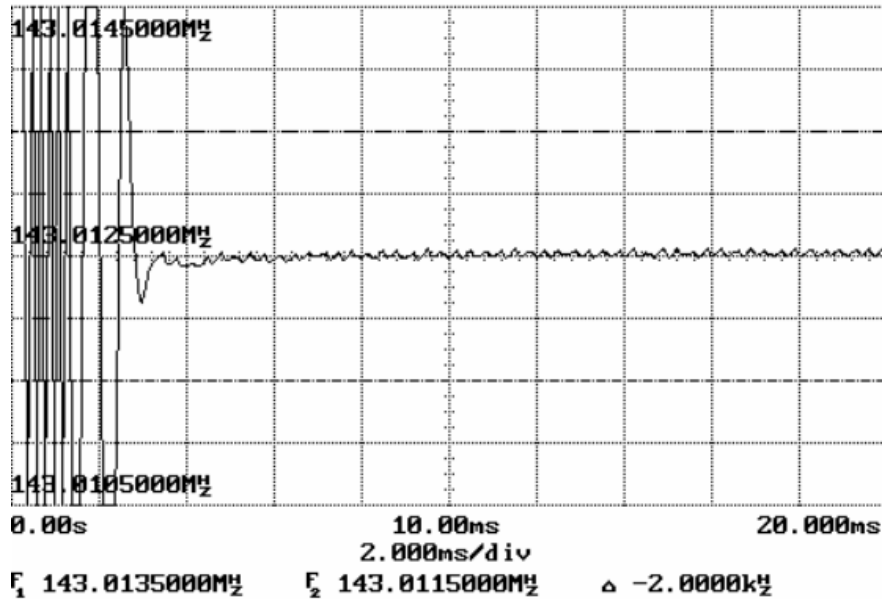


ref ext
 TRIGGER
 Triggered Auto
 Ext Freq RF
 Edge Value Env
 Time Ref Only
 [Icons]

ref ext

Frequency : 150.01000 MHz
 Power: 1 W

Key-Down

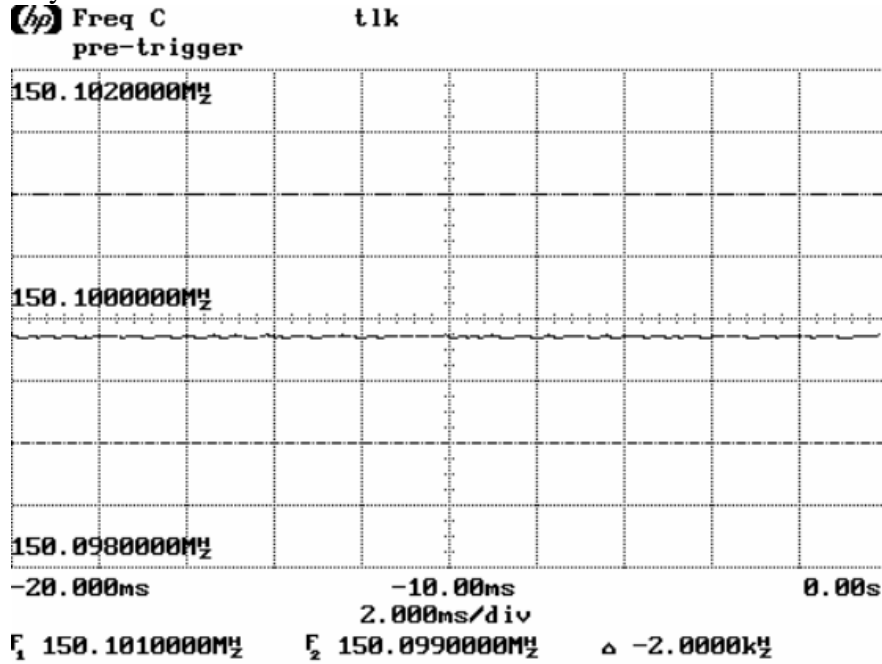


TRIGGER
 Triggered
 Auto

Ext Freq RF
 Edge Value Env

Arm Only

Key-up

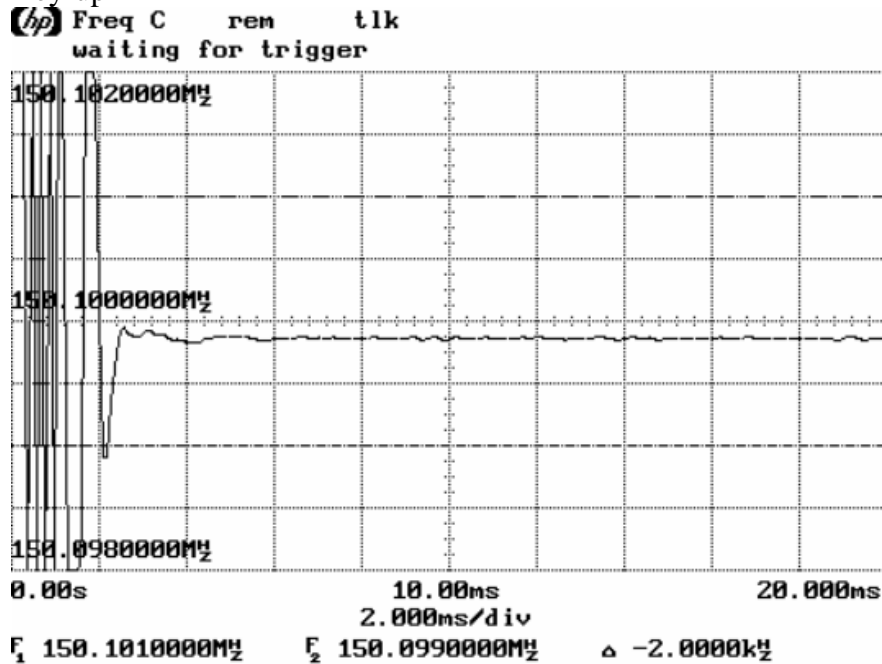

ref ext

TIMEBASE
 2.000ms/div

Reference
 Left Ctr Right

Delay
 0.00s


Panorama
 OFF On

ref ext

Frequency : 150.01000 MHz
 Power: 5 W

Key-Down

(hp) Freq C rem t1k
 pre-trigger

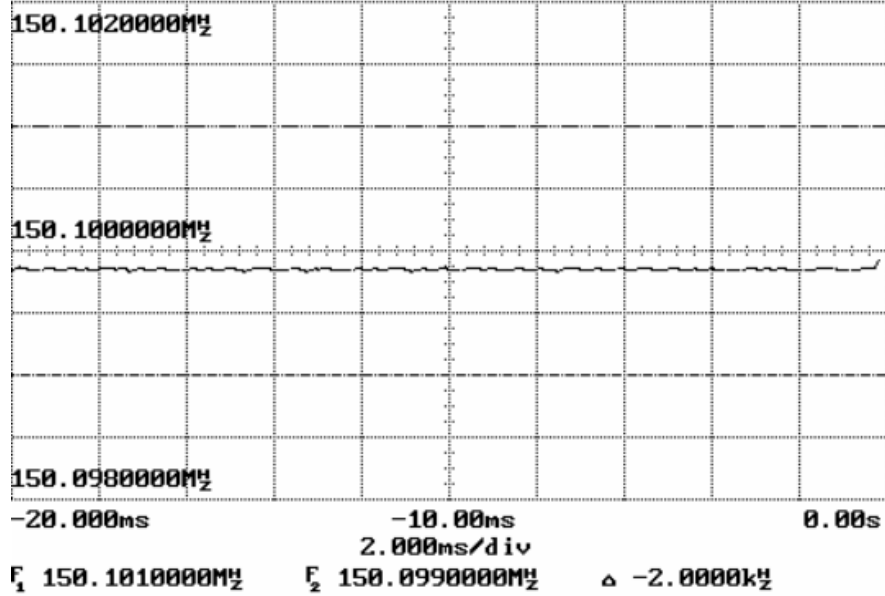


TRIGGER
 Triggered
 Auto

Ext Freq RF
 Edge Value Env

Arm Only

Key-up

(hp) Freq C t1k
 waiting for trigger

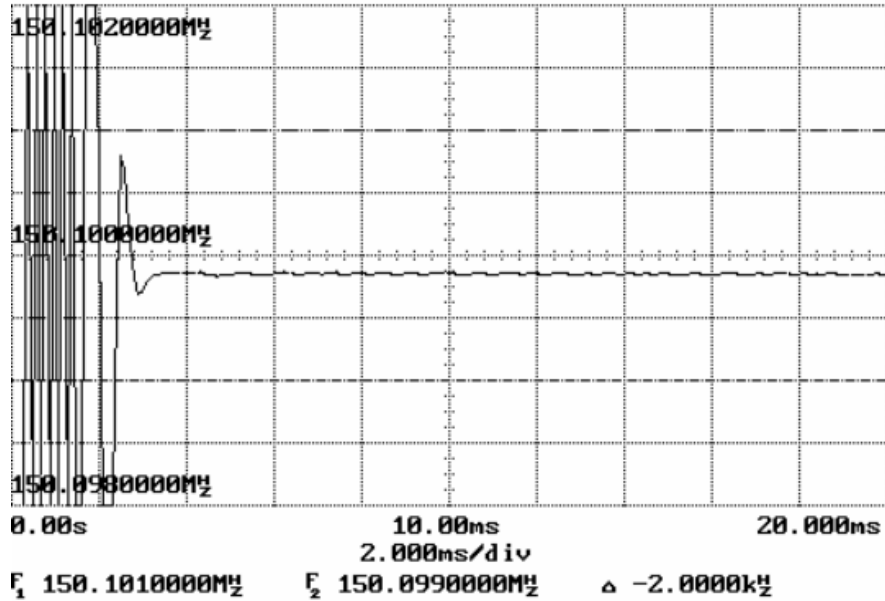

ref ext

TIMEBASE
 2.000ms/div

Reference Ctr Right

Delay 0.00s

Panorama Off On


ref ext

Frequency : 161.01000 MHz
 Power: 1 W

Key-Down

(hp) Freq C
 pre-trigger

tlk

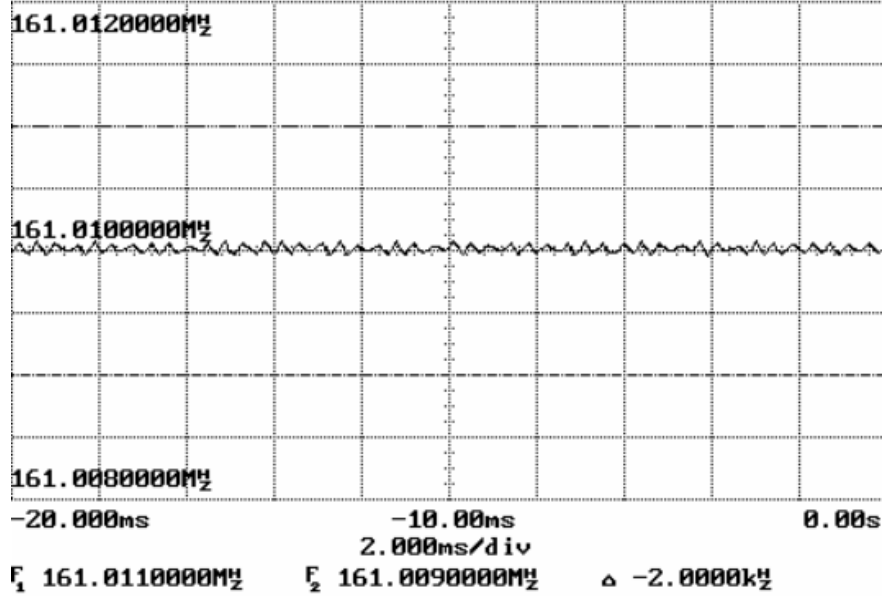

TRIGGER

Triggered
 Auto

Ext Freq **RF**
 Edge Value **Env**


Arm Only

f **↻**

Key-up

(hp) Freq C
 waiting for trigger

ref ext

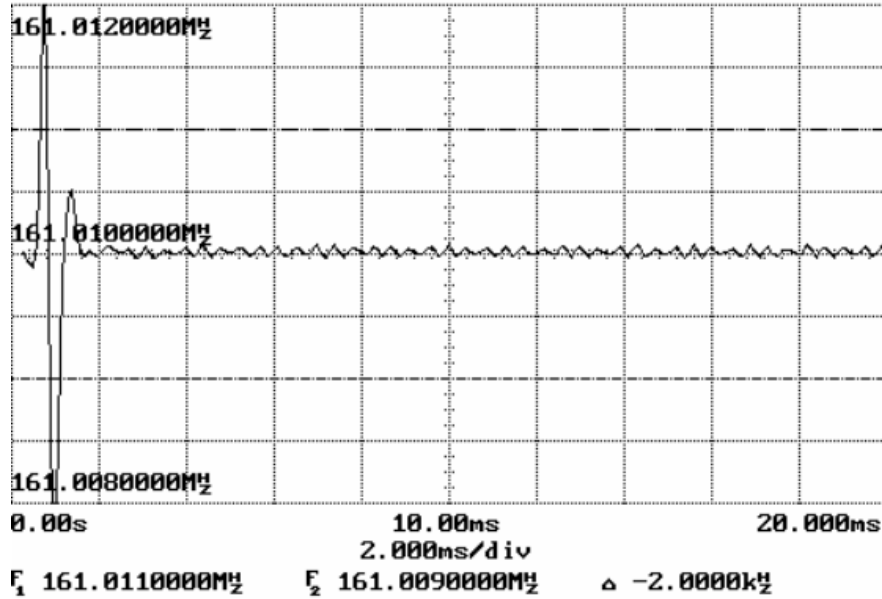

TIMEBASE

2.000ms/div

Reference **Left** Ctr Right

Delay **0.00s**


Panorama **Off** On

ref ext

Frequency : 161.01000 MHz
 Power: 5 W

Key-Down

(hp) Freq C rem t1k
 pre-trigger

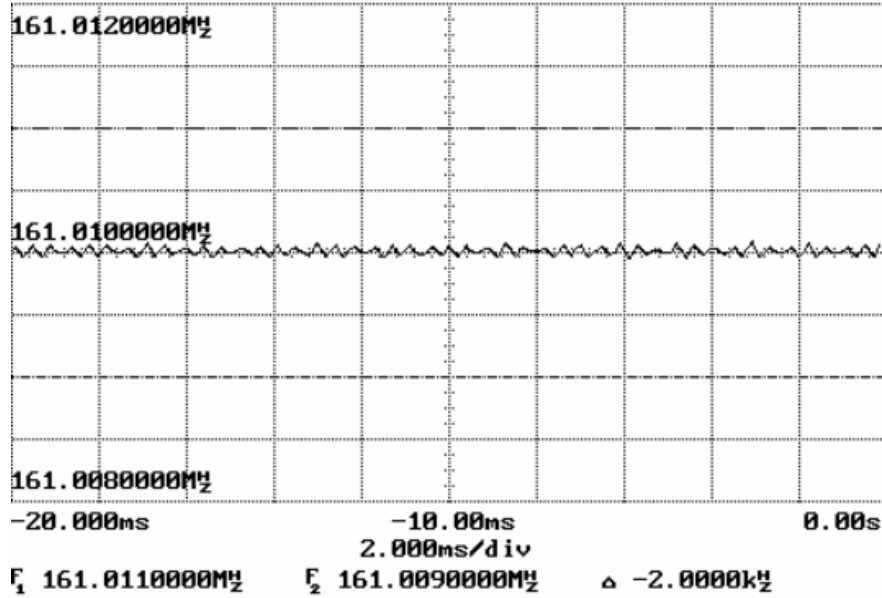


TRIGGER
 Triggered
 Auto

Ext Freq RF
 Edge Value Env

Arm Only

Key-up

(hp) Freq C rem t1k
 waiting for trigger

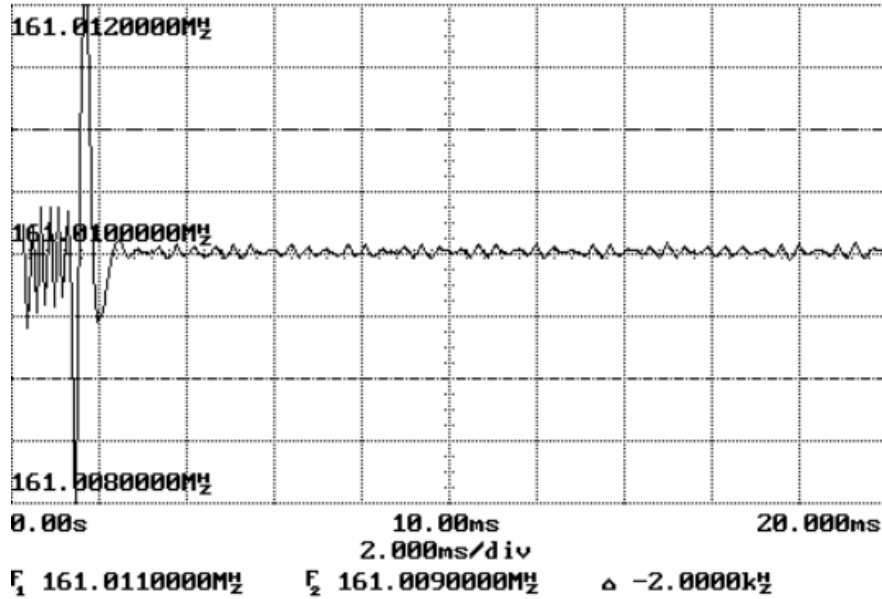

ref ext

TIMEBASE
 2.000ms/div

Reference
 Left Ctr Right

Delay
 0.00s


Panorama
 OFF On

ref ext

Frequency : 173.97500 MHz
 Power: 1 W

Key-Down

(hp) Freq C rem lsn
 pre-trigger

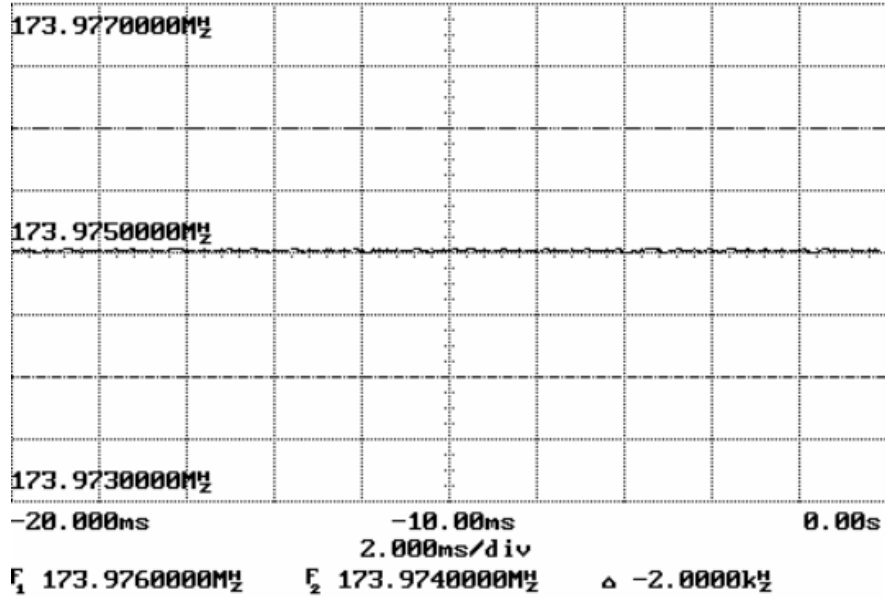

TRIGGER
 Triggered
 Auto


Ext Freq RF
 Edge Value Env

Arm Only

↵ ↻

Key-up

(hp) Freq C rem tlk Post-trigger data
 waiting for trigger available only

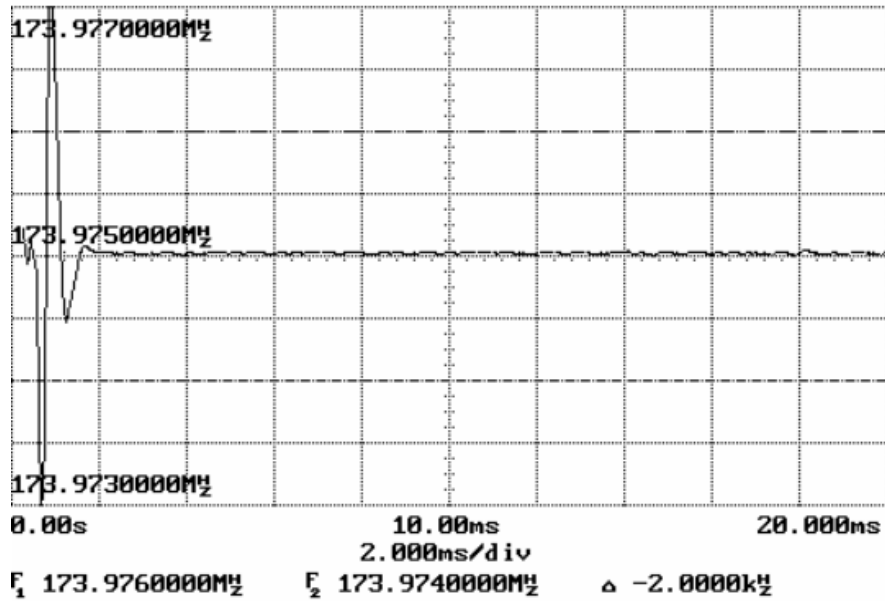

ref ext

TRIGGER
 Triggered
 Auto

Ext Freq RF
 Edge Value Env

Time Ref Only


⏪ ⏩

ref ext

Frequency : 173.97500 MHz
 Power: 5 W

Key-Down

(hp) Freq C rem t1k
 pre-trigger

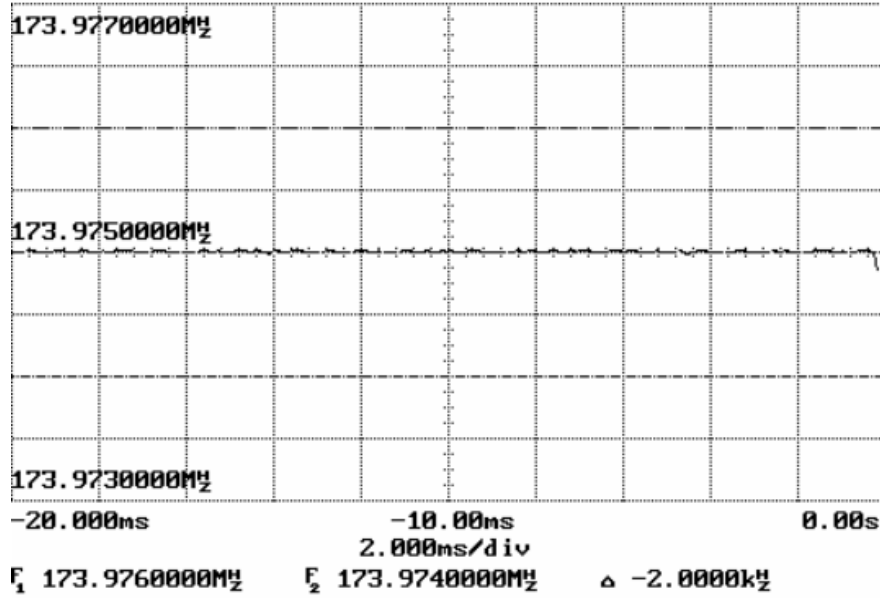

TRIGGER
 Triggered
 Auto


Ext Freq RF
 Edge Value Env

Arm Only

↵ ↶

Key-up

(hp) Freq C t1k Post-trigger data
 waiting for trigger available only

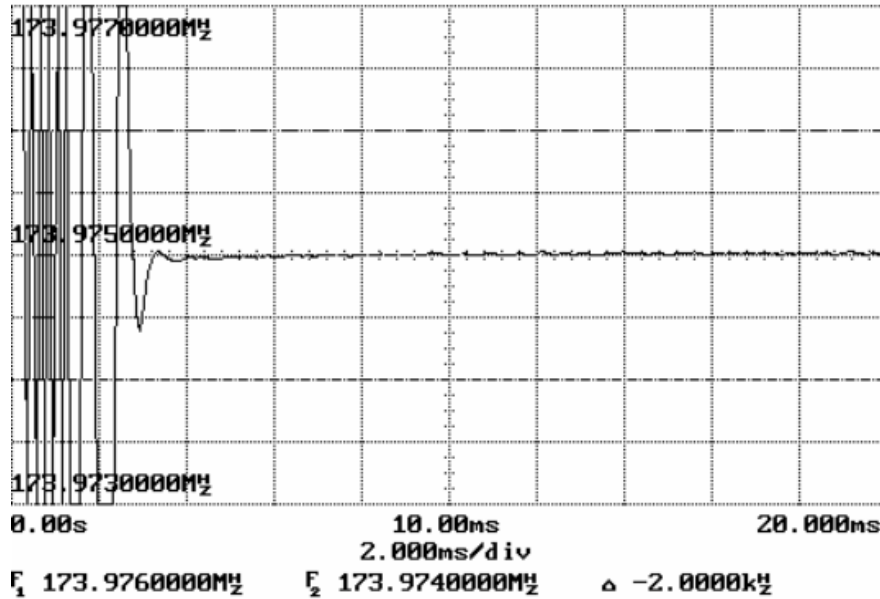

ref ext

TRIGGER
 Triggered
 Auto

Ext Freq RF
 Edge Value Env

Time Ref Only

⏪ ⏩

ref ext

NAME OF TEST: Frequency Stability with Variation in Supply Voltage

RULE PART NUMBER: 2.1055 (d)(1), 90.213 (a)
RSS-Gen 4.7, RSS-119 5.3


MINIMUM STANDARD: Shall not exceed ± 1.50 ppm.

TEST RESULTS: Meets minimum standard, see data on following page

TEST CONDITIONS: Standard Test Conditions, 25 C

TEST EQUIPMENT: Frequency Counter, HP 8901A Modulation Analyzer
DC Power Supply, HP 6653A
Digital Voltmeter, Instek GDM-8245
50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 25-A-MFN-6 (6dB, 25W)

TEST SET-UP:

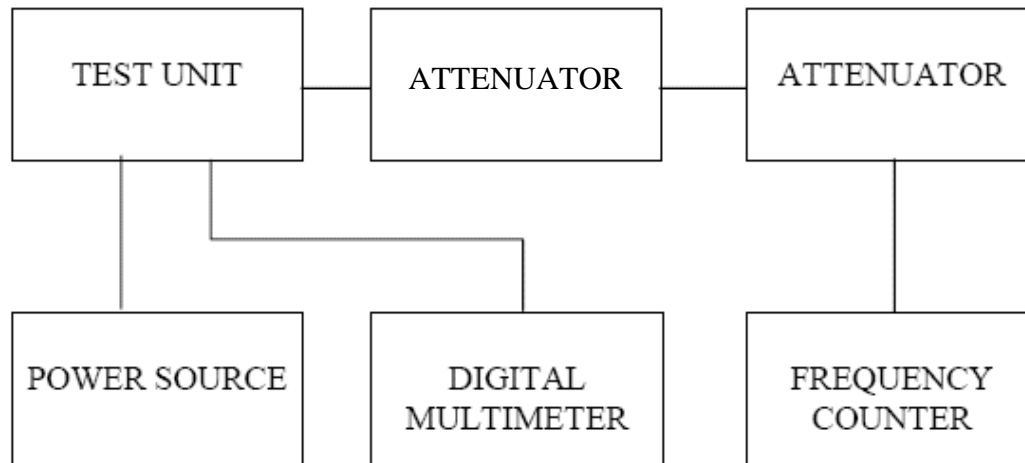

TEST SET-UP

Channel Frequency: 138.0250 MHz
 Tolerance Requirements: ± 1.5 ppm
 Highest Variation: -0.22 ppm
 Power Output: 5 Watts

Input Voltage (Vdc)	Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)
10	138.02499	-10	-0.07
13.3	138.02497	-30	-0.22
16	138.02499	-10	-0.07

Channel Frequency: 143.0125 MHz
 Tolerance Requirements: ± 1.5 ppm
 Highest Variation: -0.21 ppm
 Power Output: 5 Watts

Input Voltage (Vdc)	Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)
10	143.01247	-30	-0.21
13.3	143.01248	-20	-0.14
16	143.01249	-10	-0.07

Channel Frequency: 150.0100 MHz
 Tolerance Requirements: ± 1.5 ppm
 Highest Variation: -0.20 ppm
 Power Output: 5 Watts

Input Voltage (Vdc)	Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)
10	150.00997	-30	-0.20
13.3	150.00998	-20	-0.13
16	150.00998	-20	-0.13

Channel Frequency: 161.0100 MHz
 Tolerance Requirements: ± 1.5 ppm
 Highest Variation: 0.31 ppm
 Power Output: 5 Watts

Input Voltage (Vdc)	Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)
10	161.01003	30	0.19
13.3	161.01003	30	0.19
16	161.01005	50	0.31

Channel Frequency: 173.9750 MHz
Tolerance Requirements: ± 1.5 ppm
Highest Variation: 0.23 ppm
Power Output: 5 Watts

Input Voltage (Vdc)	Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)
10	173.97503	30	0.17
13.3	173.97503	30	0.17
16	173.97504	40	0.23

NAME OF TEST: Frequency Stability with Variation in Ambient Temperature

RULE PART NUMBER: 2.1055 (a) (b), 90.213 (a)
RSS-Gen 4.7, RSS-119 5.3


MINIMUM STANDARD: Shall not exceed ± 1.50 ppm from test frequency

TEST RESULTS: Meets minimum standard, see data on following page

TEST CONDITIONS: Standard Test Conditions

TEST EQUIPMENT: Frequency Counter, 8901A Modulation Analyzer
DC Power Supply, HP 6653A
Digital Voltmeter, Instek GDM-8245
50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 25-A-MFN-6 (6dB, 25W)
Climate Chamber, Test Equity Half Cube Model 105

TEST SET-UP:

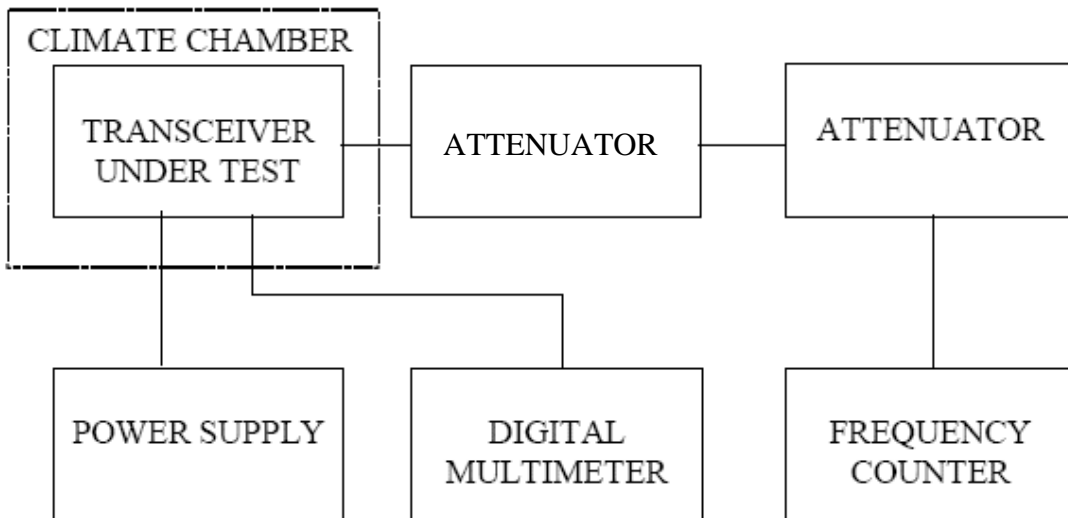

Channel Frequency: 138.02500 MHz
 Voltage & Power Level: 13.3 Volts @ 5 Watts
 Highest Variation: 0.48 ppm

Temperature (Deg C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	160	1.16
-20	120	0.87
-10	100	0.72
0	100	0.72
10	90	0.65
20	70	0.51
30	20	0.14
40	-40	-0.29
50	-60	-0.43
60	-50	-0.36

Channel Frequency: 138.02500 MHz
 Voltage & Power Level: 13.3 Volts @ 1.0 Watts
 Highest Variation: 0.44 ppm

Temperature (Deg C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	173	1.23
-20	110	0.80
-10	90	0.65
0	90	0.65
10	100	0.72
20	80	0.58
30	10	0.07
40	-30	-0.22
50	-60	-0.43
60	-40	-0.29

Channel Frequency: 143.01250 MHz
 Voltage & Power Level: 13.3 Volts @ 5 Watts
 Highest Variation: 0.48 ppm

Temperature (Deg C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	170	1.27
-20	130	0.80
-10	100	0.67
0	100	0.73
10	100	0.73
20	60	0.53
30	30	-0.20
40	-40	-0.27
50	-70	-0.47
60	-40	-0.27

Channel Frequency: 143.01250 MHz
 Voltage & Power Level: 13.3 Volts @ 1.0 Watts
 Highest Variation: 0.44 ppm

Temperature (Deg C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	170	1.19
-20	120	0.84
-10	90	0.63
0	110	0.77
10	100	0.70
20	60	0.42
30	10	0.07
40	-40	-0.28
50	-70	-0.49
60	-40	-0.28

Channel Frequency: 150.1000 MHz
 Voltage & Power Level: 13.3 Volts @ 5 Watts
 Highest Variation: 0.48 ppm

Temperature (Deg C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	190	1.27
-20	120	0.80
-10	100	0.67
0	110	0.73
10	110	0.73
20	80	0.53
30	30	0.20
40	-40	-0.27
50	-70	-0.47
60	-40	-0.27

Channel Frequency: 151.01000 MHz
 Voltage & Power Level: 13.3 Volts @ 1.0 Watts
 Highest Variation: 0.44 ppm

Temperature (Deg C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	170	1.13
-20	120	0.80
-10	100	0.67
0	110	0.73
10	100	0.67
20	70	0.47
30	10	0.07
40	-40	-0.27
50	-70	-0.47
60	-40	-0.27

Channel Frequency: 161.01000 MHz
 Voltage & Power Level: 13.3 Volts @ 5 Watts
 Highest Variation: 0.48 ppm

Temperature (Deg C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	110	0.68
-20	40	0.25
-10	20	0.12
0	50	0.31
10	70	0.43
20	60	0.37
30	40	0.25
40	0	0
50	0	0
60	40	0.25

Channel Frequency: 161.01000 MHz
 Voltage & Power Level: 13.3 Volts @ 1.0 Watts
 Highest Variation: 0.44 ppm

Temperature (Deg C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	110	.68
-20	40	.25
-10	10	0.06
0	50	0.31
10	70	0.43
20	60	0.37
30	30	0.19
40	-20	-0.12
50	0	0
60	50	0.31

Channel Frequency: 173.97500 MHz
 Voltage & Power Level: 13.3 Volts @ 5 Watts
 Highest Variation: 0.48 ppm

Temperature (Deg C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	110	0.63
-20	40	0.23
-10	20	0.11
0	60	0.34
10	70	0.40
20	60	0.34
30	20	0.11
40	-10	-0.06
50	0	0
60	50	0.29

Channel Frequency: 173.97500 MHz
 Voltage & Power Level: 13.3 Volts @ 1.0 Watts
 Highest Variation: 0.44 ppm

Temperature (Deg C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	120	0.69
-20	30	0.17
-10	10	0.06
0	60	0.34
10	70	0.40
20	50	0.29
30	30	0.17
40	0	0
50	0	0
60	60	0.34

NAME OF TEST: Transmitter Occupied Bandwidth

RULE PART NUMBER: 2.201, 2.202, 2.1033 (c)(14), 2.1049 (h), 2.1041;90.203(j)(3)
IC: RSS-Gen 4.6.1

Necessary Bandwidth Measurement

This radio modem uses digital modulation signals, passing through a linear 8th order low-pass filter (Raise-Cosine alpha 1 approximation), to an FM transceiver. The necessary bandwidth calculation for this type of modulation (DRCMSK) is not covered by paragraphs (1), (2) or (3) from 2.202(c). Therefore, the approach outlined in (2.202(c)(4)) is applicable in this case.

The measurement explanations are provided in “Annex” (following pages)

Necessary Bandwidth Measurement:

Peak deviation = ±2.26 kHz
Modulator signal bit rate 9600 bps,

Bn=8080 Hz
The corresponding emission designator prefix for necessary bandwidth = 8K08

Table 1 - Measurements results for the INTEGRATR unit , 1200 bps, 4800 bps, 9600 bps and frequency deviations set to obtain specified values .

unit's software settings	measured data (kHz)		Emission designator
	freq. dev	99% occupied BW	
1200	1.46	4.00	4K00
4800	0.75	3.20	3K20
4800	2.21	5.67	5K67
9600	2.26	8.08	8K08

Also, Spectrum Efficiency (90.203 (j)(3)) requirement: 4800 bits per second per 6.25 kHz of channel bandwidth.
4800bps=1*4800bps so it is efficient for 6.25 kHz channel
9600bps=2*4800bps so it is efficient for 12.5 kHz channel

ANNEX

Theory of Measurement

The way to define the **Occupied Bandwidth** is “the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission” (FCC 2.202), the mathematics are as follows:

$$0.005*TP=P_{(f1)}=\int_0^{f1} PSD_{(f)}df$$

$$0.995*TP=P_{(f2)}=\int_0^{f2} PSD_{(f)}df$$

$$OBW=f2-f1$$

where TP (total mean power) is

$$TP=\int_0^{+\infty} PSD_{(f)}df=(1/t)\int_{-\infty}^{+\infty} |z_{(t)}|^2 dt$$

and PSD (power spectral distribution) is

$$PSD_{(f)}=|Z_{(f)}|^2+|Z_{(-f)}|^2 \quad 0\leq f<4$$

and expresses the positive frequency representation of the transmitter output power for z(t) signal.

By applying these mathematics to the measurements, it is possible to measure the Occupied Bandwidth using the RF signal's trace provided by a digital spectrum analyzer and processed further by computational methods.

The Occupied Bandwidth measurement is in two parts relatively independent of each other. The first gives the RF spectrum profile, and the second calculates the frequency limits and they result in the Occupied bandwidth. While the first involves RF measurement instrumentation, the second is strictly a computational part related to measured trace.

Getting an equally-sampled RF power spectrum profile requires a Digital Spectrum Analyzer. In addition to the instrument's usual requirements, a special attention must be paid to the analyzer's span (bandwidth to be investigated).

This bandwidth must be large enough to contain all the power spectral components created by the transmitter. The frequency step, where the samples are picked, is directly dependent on the span's value.

$$\Delta f= \text{span/number of points displayed}$$

The frequency resolution will determine the measurement accuracy. So for greater accuracy, less bandwidth will give better values because of the constant number of points that can be displayed. Taking into account the purpose of transmitter, an acceptable balance can be set. For channel-limited transmitters all the power spectral components can be found in main channel and a number of adjacent channels, upper and lower, from the main channel. The relation between these two requirements, number of channels and accuracy, is depicted by:

$$a(\%) \cong (2*k*n/N)*100,$$

where a is desired accuracy, in percentage units, n is the number of channels in span, including main channel, N is displayed number of points and k= (authorized bandwidth) /channel bandwidth.

For usual spectrum analyzers N=500, k=0.8 (6) for 6.25kHz channel transmitters or k=0.9 (11.25/12.5) for 12.5kHz channel transmitters, so a $\cong n/2.5$ (%) can estimate the expected precision for measurement.

All other requirements for spectrum analyzer are the same as they are for mask compliance determination.

The second part has computational requirements related to the trace's values processing.

The following operations must be performed over the trace's (x,y) points:

1. convert y value in dBm (or the analyzer's display y units) units power sample
2. convert y value in W units power sample,
3. add to total power every power sample and get total power value (W units for total power)
4. set low level (0.5%*total power)
5. detect x1-sample which pass low level (convert f1 integrals to sample summing)
6. convert (x1-1)-sample value in frequency units (the x-sample is already in occupied bandwidth),
7. store first frequency correspondent to (x1-1)-sample
8. set up level (99.5%*total power)
9. detect x2-sample which pass up level (convert f2 integrals to sample summing)
10. convert (x2)-sample value in frequency units (the x-sample is now out of occupied bandwidth),
11. store second frequency correspondent to (x2)-sample
12. read the frequency difference , this is ***Occupied Bandwidth***, and display the result.


Standard calculation precision is all that is required. The main error factor being the y display resolution is covering calculation precision.

The absolute error for this measurement is $-0/+2*f$. It is not possible to decrease span bandwidth under 2 channels bandwidth because this will affect the significance of result by cutting off the power's spectral distribution edges.

Measurement Set-Up

For the above requirements, the occupied bandwidth of a transmitter was measured using an HP 8563E Spectrum Analyzer. A spectrum analyzer having adequate macrofunction to perform computational part. The number of power spectrum samples (N) is 500. Because in test results frequency deviation was also a parameter, measurement instruments were completed with an IFR COM-120 B for frequency deviation determination.

The measurement set-up is:

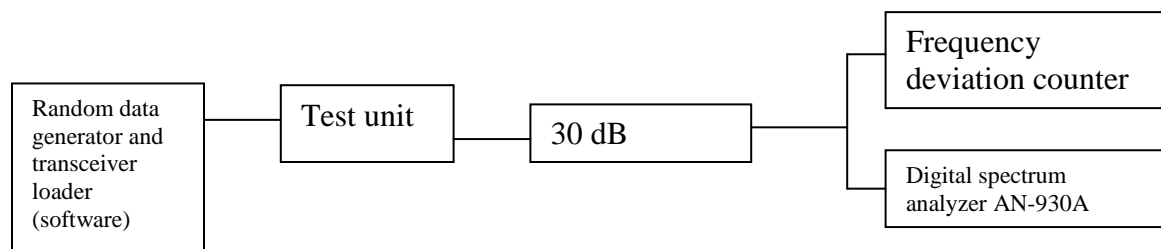

The HP 8563E Spectrum Analyzer's parameters are adjusted as follow:

-total span is adjusted at 30 kHz for 6.25 kHz channel and 50 kHz for 12.5 kHz channel.

-RBW is set to 100 Hz, this is better than 1% of total span bandwidth.

-video filter is set to 100 Hz;

-all other parameter of the instrument are automatically adjusted to obtain calibrated measurements (sweep time 3.05s 6.25 kHz, 5.08s for 12.5 kHz).

-central frequency and reference level are adjusted to the unmodulated carrier frequency and level.

The HP 8563E Spectrum Analyzer's Occupied Bandwidth macrofunction input parameters are:

-central frequency, same as above, the unmodulated carrier frequency.

-channel spacing, 6.25 kHz or 12.5 kHz according to the signal,

-percentage of Occupied Bandwidth 99%.

The macro operations are:

-the trace is read;

-follow all the computational steps required.

Each sample is converted from dBm to mW and add to total power (tpow) variable. Then are computed the limits of 0.5% and 99.5% by using variable remaining percent (RemPer), and in same time are stored sample number where these two percentage meet. Then are assigned to the markers the correspondent frequencies of numbers.

- Occupied Bandwidth is then displayed as Delta mode marker (difference between markers).

-return to operational mode.

NOTE 1: The computational part could be performed on every device featured with data acquisition.

NOTE 2: An approximation of the occupied bandwidth calculation can be performed by measuring at the points at which the spectrum, measured with a spectrum analyzer of 100 Hz resolution bandwidth, is 25dB down relative to the unmodulated carrier reference level.

NAME OF TEST: Transmitter Occupied Bandwidth for Emission Designators
5K67F1D, 8K08F1D

RULE PART NUMBER: 2.202, 90.209 (b)(5), 90.210(d), 2.1049 (c) (1)
IC: RSS-119 5.8.3

MINIMUM STANDARDS: Mask D
Sidebands and Spurious [Rule 90.210 (d), P = 5 Watts]
Authorized Bandwidth = 11.25 kHz [Rule 90.209(b) (5)]
From Fo to 5.625 kHz, down 0 dB. Greater than 5.625 kHz to 12.5 kHz, down 7.27($f_d - 2.88\text{kHz}$) dB. Greater than 12.5 kHz, at least 50+10log₁₀(P) or 70 dB, whichever is the lesser of the attenuation.

Attenuation = 0 dB at Fo to 5.625 kHz
Attenuation = 20 dB at 5.625 kHz and 70 dB at 12.5 kHz
Attenuation = 57 dB at > 12.5 kHz


TEST RESULTS: Meets minimum standards (see data on following page)

TEST CONDITIONS: Standard Test Conditions, 25 C
RF Power Level = 1 Watt and 5 Watts
Voltage = 13.3VDC

TEST PROCEDURE: TIA/EIA – 603-C

TEST EQUIPMENT: 50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 25-A-MFN-6 (6dB, 25W)
DC Power Supply, Hewlett Packard Model 6653A
Spectrum Analyzer, Hewlett Packard Model HP8563E
Modulation Analyzer, Hewlett Packard Model HP8901A

TEST SET-UP:

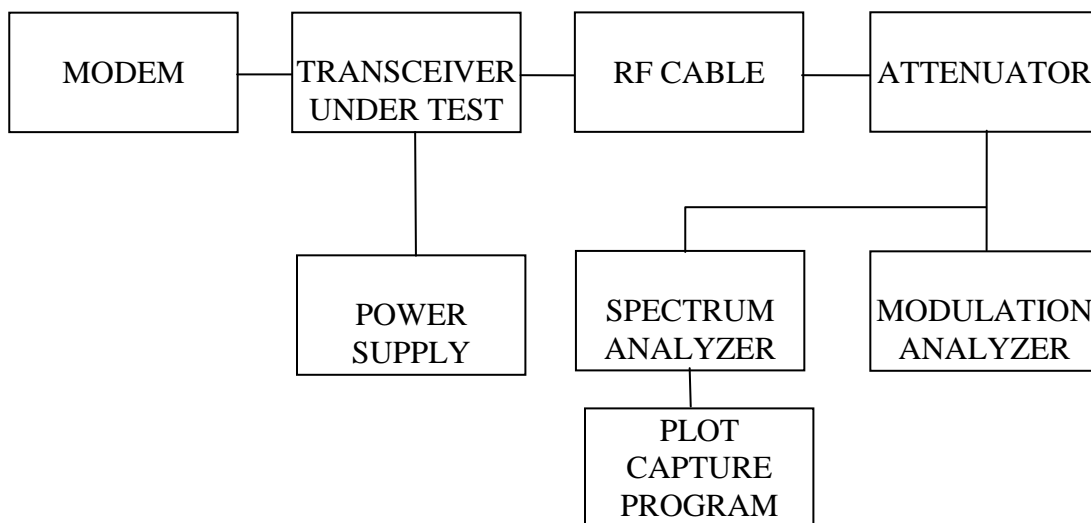

MODULATION SOURCE DESCRIPTION:

The digital modulation type used in the IntegraTR is DRCMSK (Differential Raised Cosine Minimum Shift Keying). A modem using such type of modulation is divided into three main functional units in a CPLD chip:

1. Scrambler:

The scrambler converts the data stream to a new data stream more suitable for FM transmission.

-It randomizes the data to avoid predictable patterns: 00000000, 11111111, 01010101, 00110011, etc.

-It keeps the power spectrum more compact by avoiding sequences like 01010101...

The scrambler is made with a serial shift register and 2 exclusive OR gates which implement the polynomial form X^7+X^5-1 . For the receiver side, a similar circuit performs the descrambling function to decode the received scrambled data.

2. Differential encoder:

After data is scrambled, we encode the data with a differential encoder. The differential encoder XOR's the current input bit with the previous bit. The differential encoder is used to make the modem insensitive to audio polarity inversion of the FM radio system.

3. Waveshape generator:

The waveshape generator converts the processed data bits (scrambled and differentially encoded for DRCMSK) to the DRCMSK audio signal. This audio signal is passed through a low-pass filter before modulating the RF transmitter.

TRANSMISSION PREAMBLE:

Each data transmission begins by sending a 15 millisecond preamble of sinewave (101010...). This is to synchronize the digital phase locked loop of the receiver modem.

TEST PATTERN GENERATOR:

A 30 s test pattern sequence is generated by the test software when the "test data" button is clicked. The highest resulting modulating frequency is (baud rate)/2 Hz. The following pseudo random test pattern was used to modulate the transmitter:

```
###ABCDEFGHIJKLMNQRSTUvwxyz0123456789\r\n,
```

In this pattern ### is replaced by the number of replays, \r is a carriage return and \n is a linefeed. The data is fed to the RS232 interface IC and processed as described above. The async-to-sync conversion, scrambler and differential encoder make the ABCDE... pattern appear random over the air.



NECESSARY BANDWIDTH (Bn) CALCULATION



See page 15 for Emission Designator determination.


The corresponding emission designator prefix for necessary bandwidth = **8K08**

TEST DATA: Refer to the following graphs:


MASK: D for 5W
SPECTRUM FOR EMISSION **5K67F1D**
OUTPUT POWER: 5 Watts
4800 bps
PEAK DEVIATION = 2210 Hz
SPAN = 50 kHz

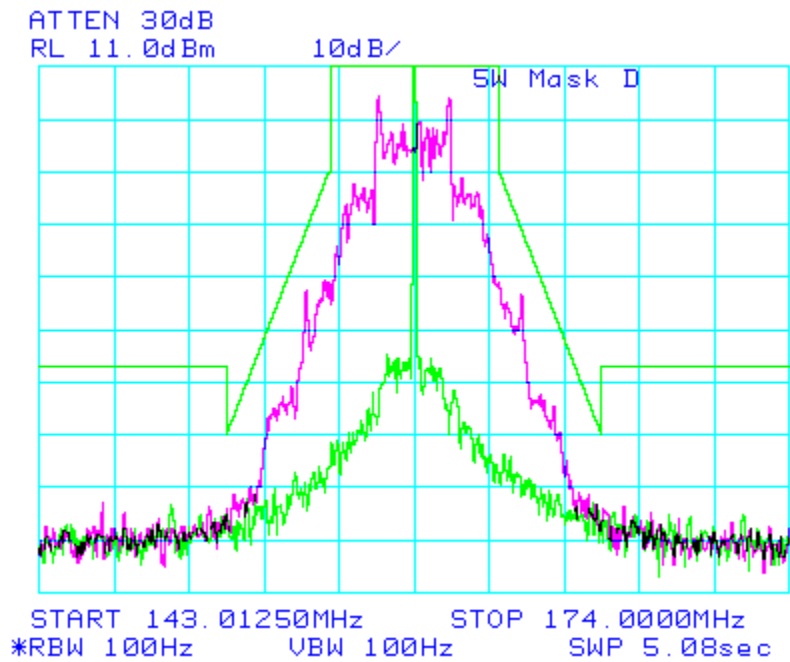
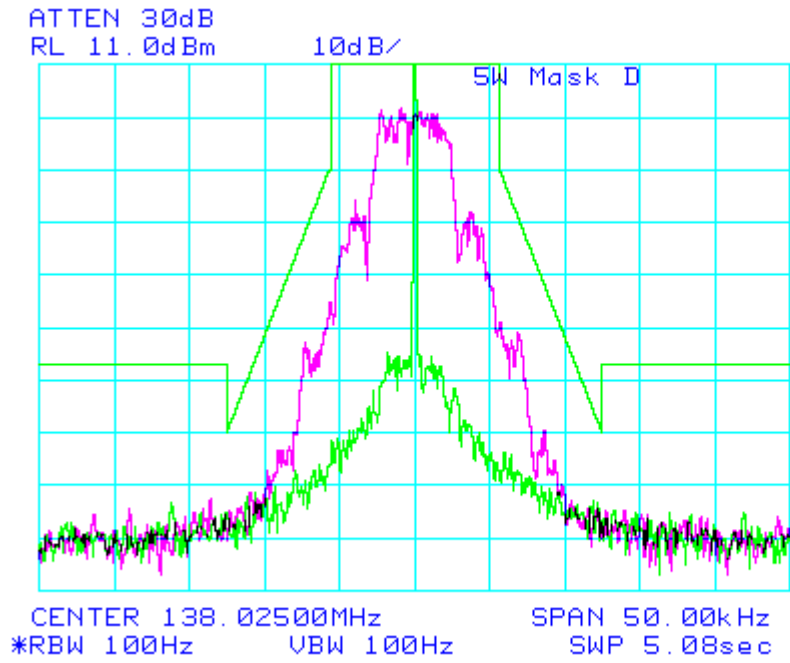


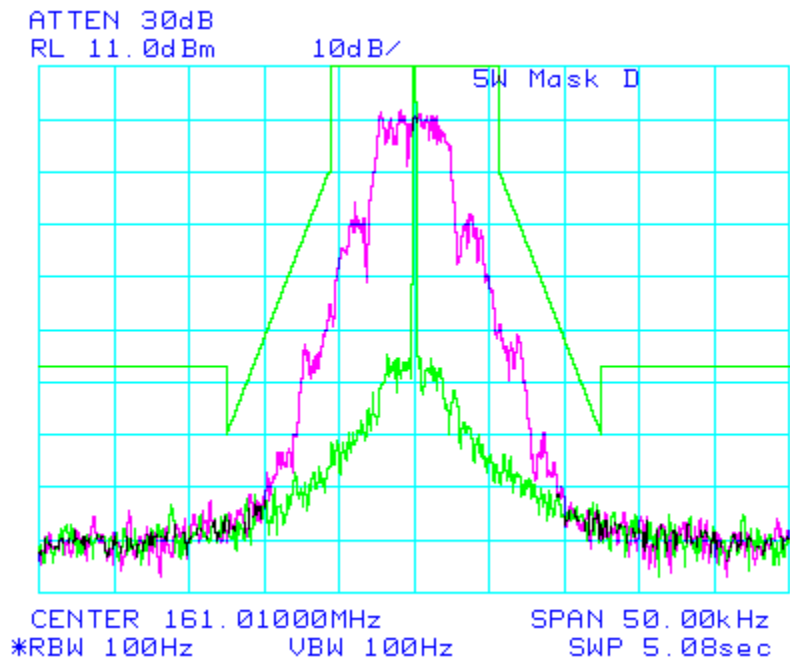
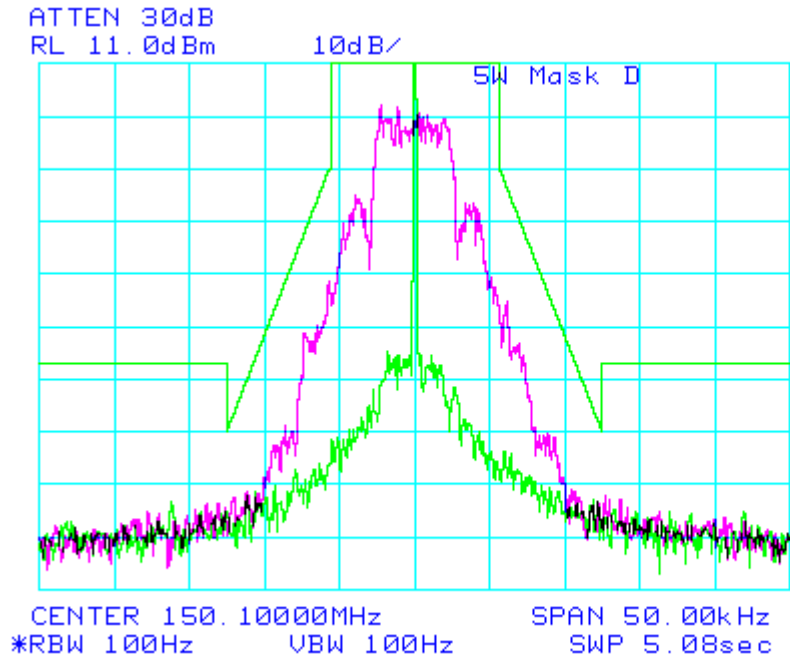


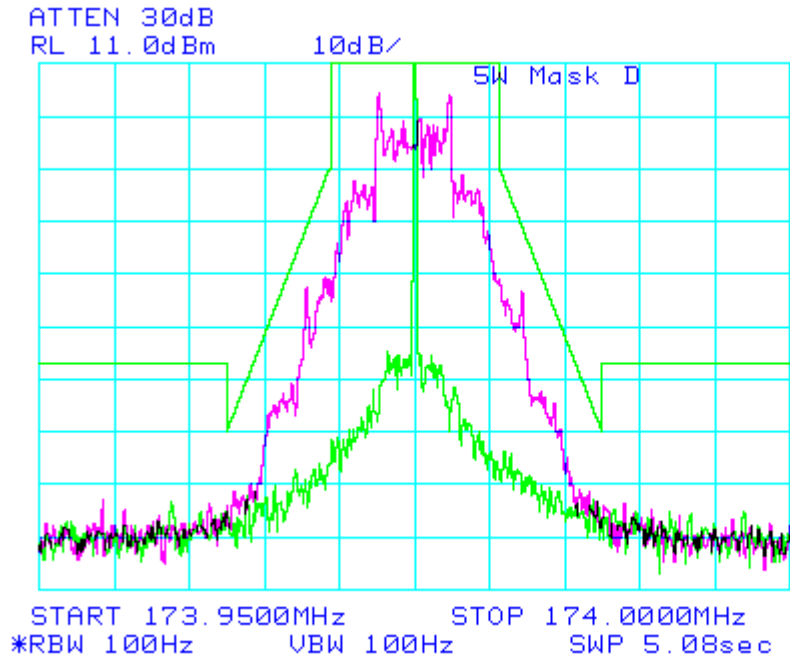



WIDE SPAN = 100 MHz
OUTPUT POWER: 5 Watts


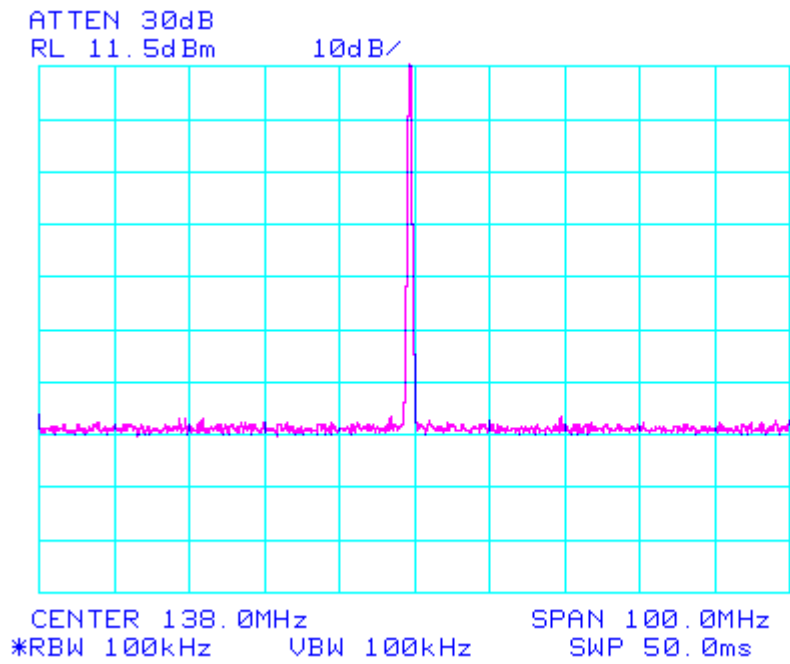


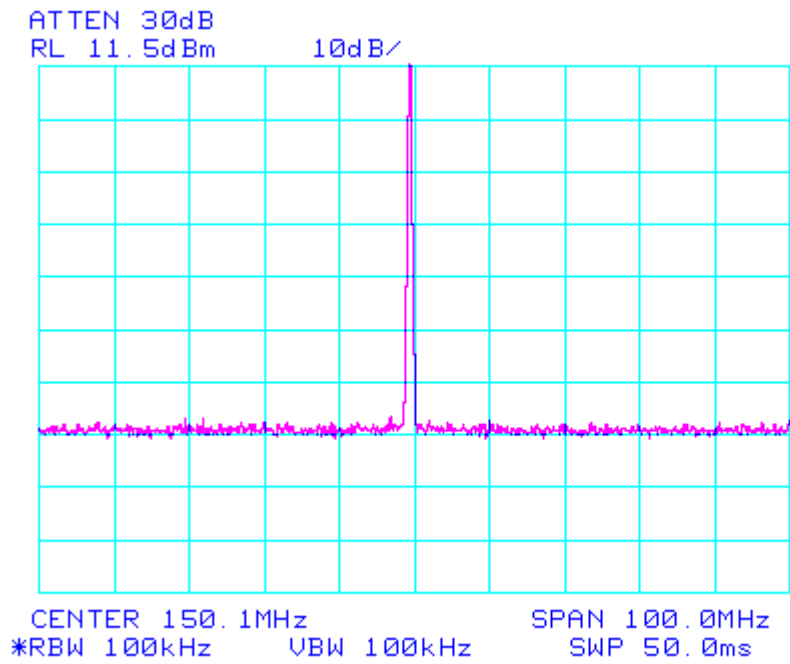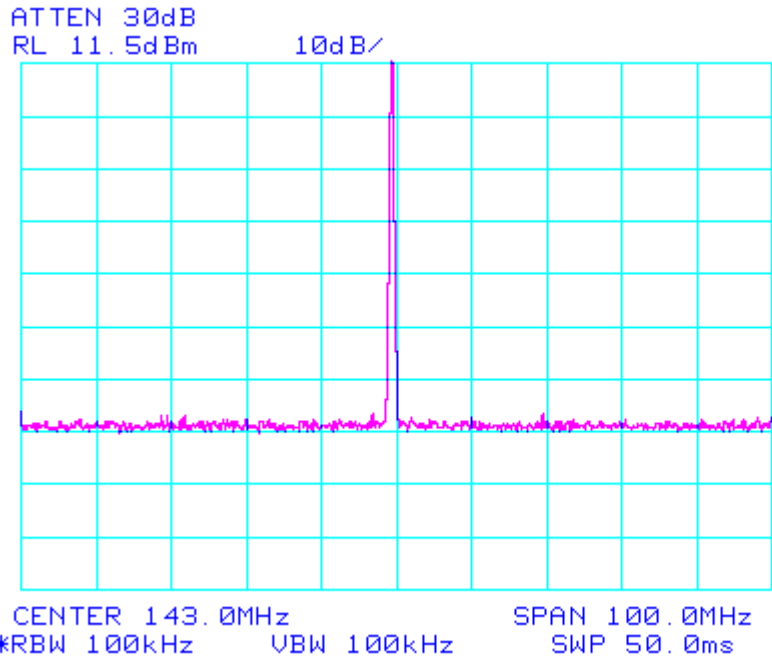


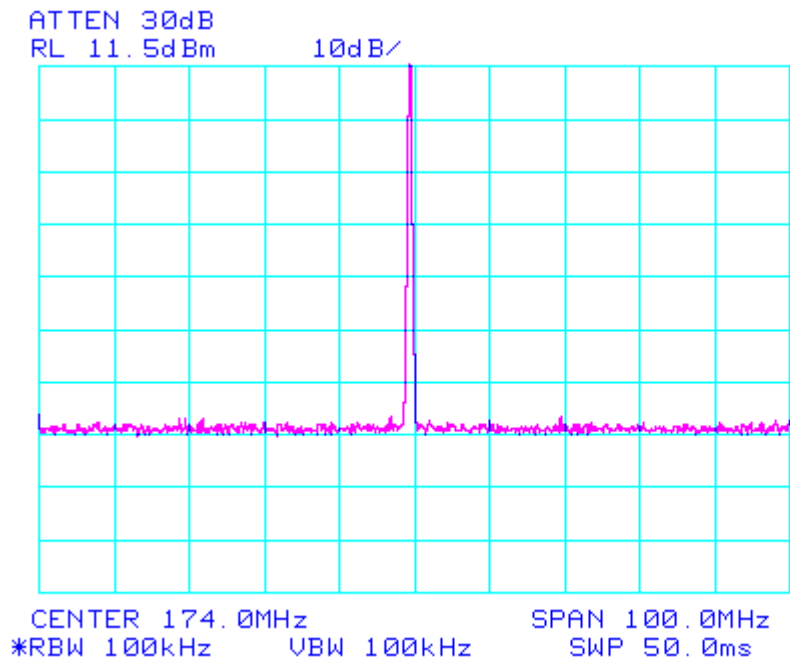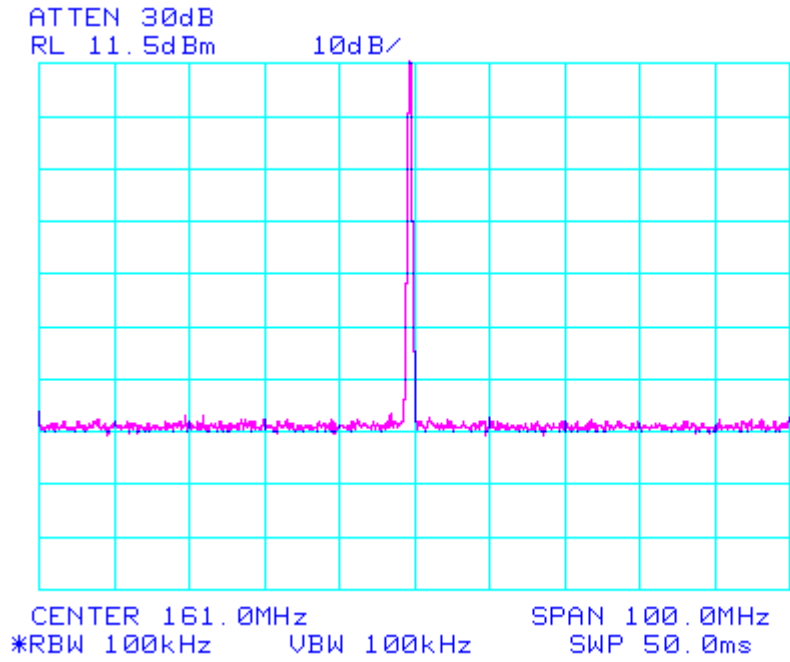


MASK: D for 1W
SPECTRUM FOR EMISSION **5K67F1D**
OUTPUT POWER: 1 Watt
4800 bps
PEAK DEVIATION = 2210 Hz
SPAN = 50 kHz

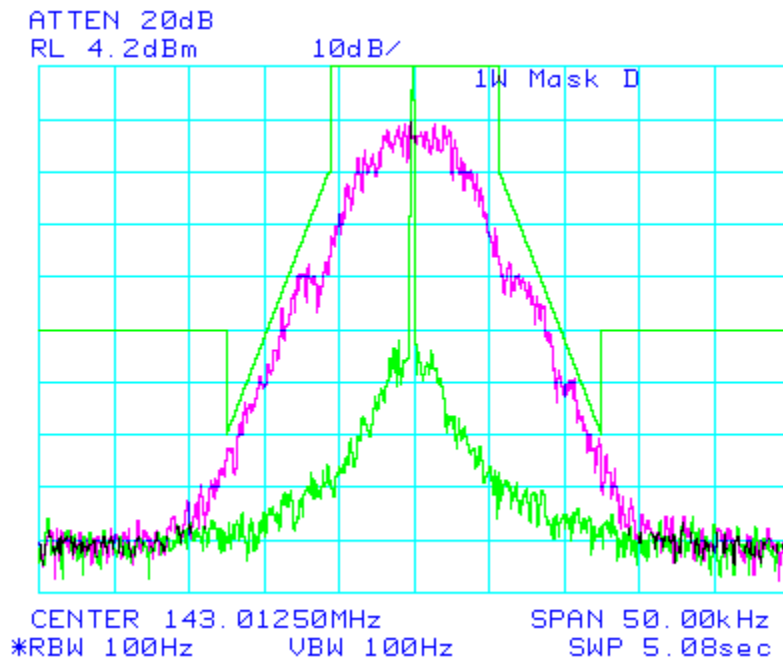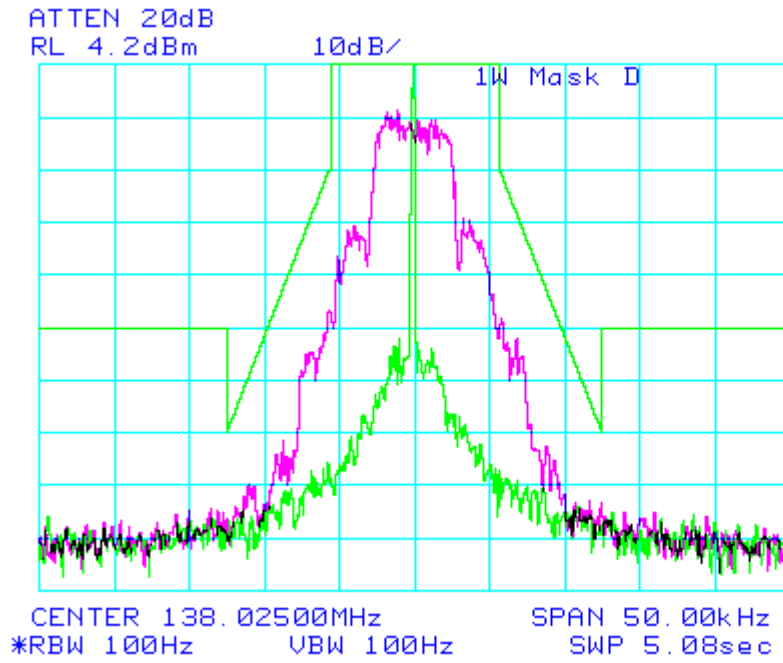

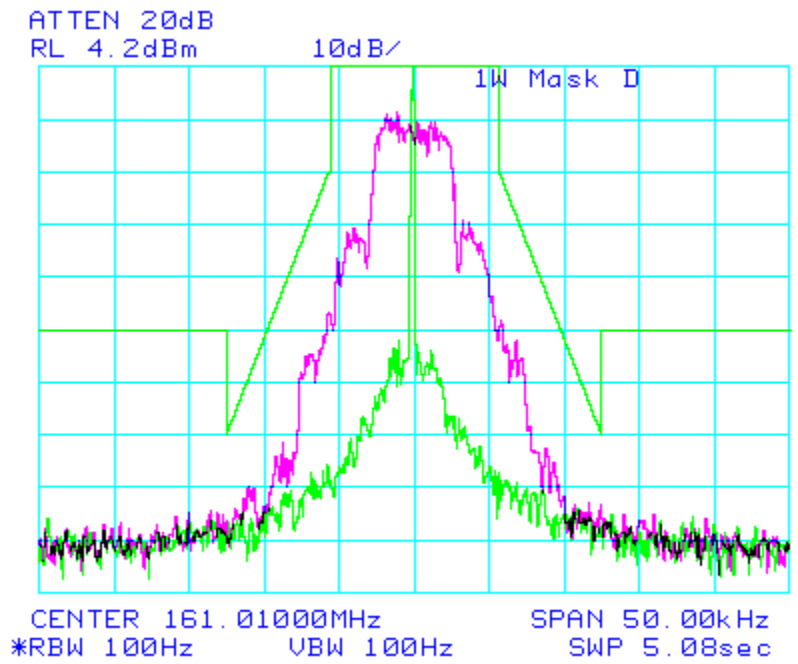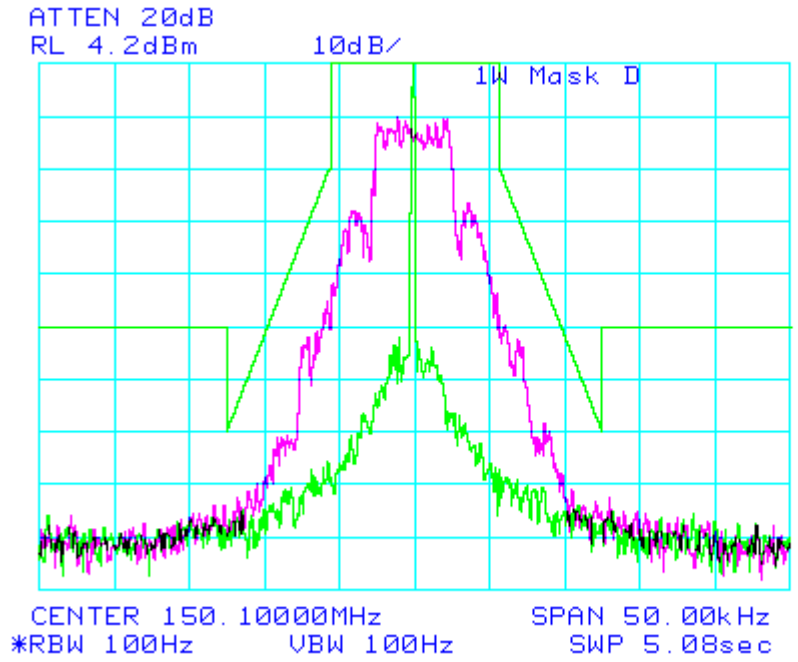

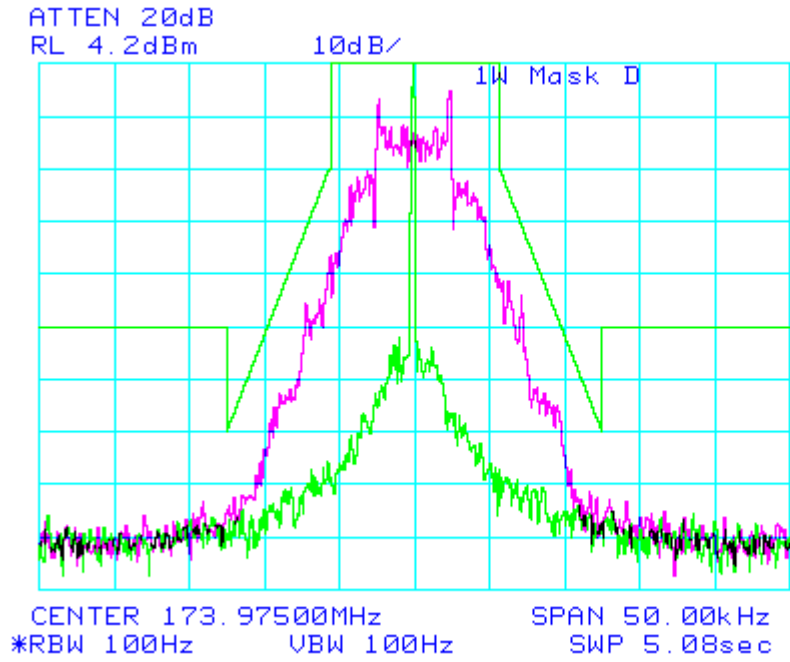


WIDE SPAN = 100 MHz
OUTPUT POWER: 1 Watt

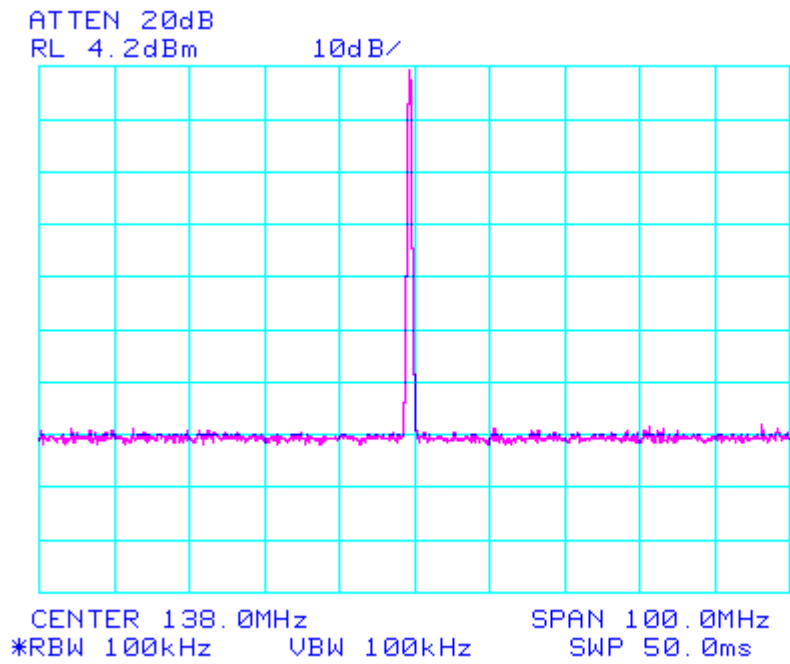

ATTEN 20dB
RL 4.2dBm


10dB/

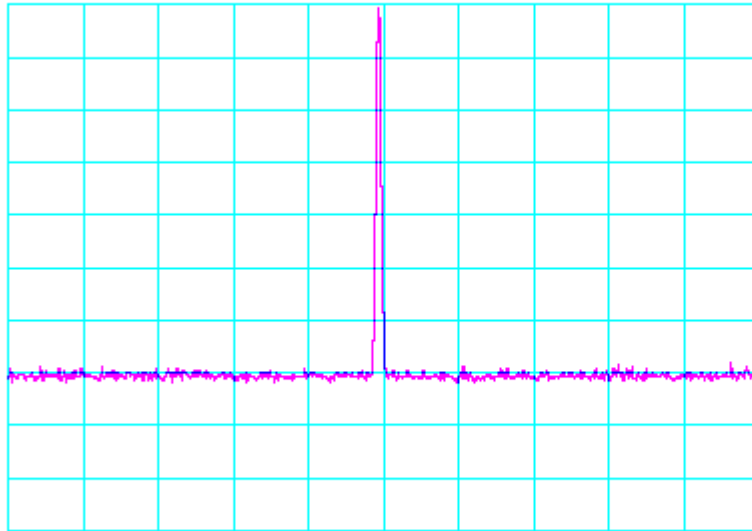



CENTER 143.0MHz SPAN 100.0MHz
*RBW 100kHz VBW 100kHz SWP 50.0ms

ATTEN 20dB
RL 4.2dBm



10dB/


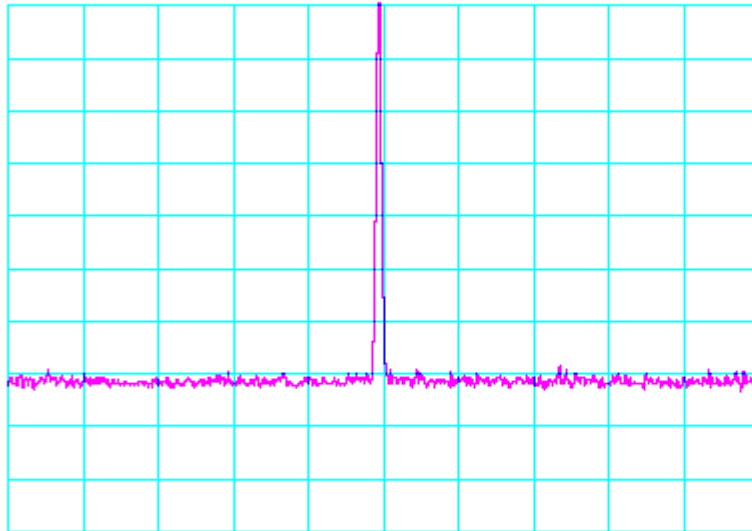



CENTER 150.1MHz SPAN 100.0MHz
*RBW 100kHz VBW 100kHz SWP 50.0ms

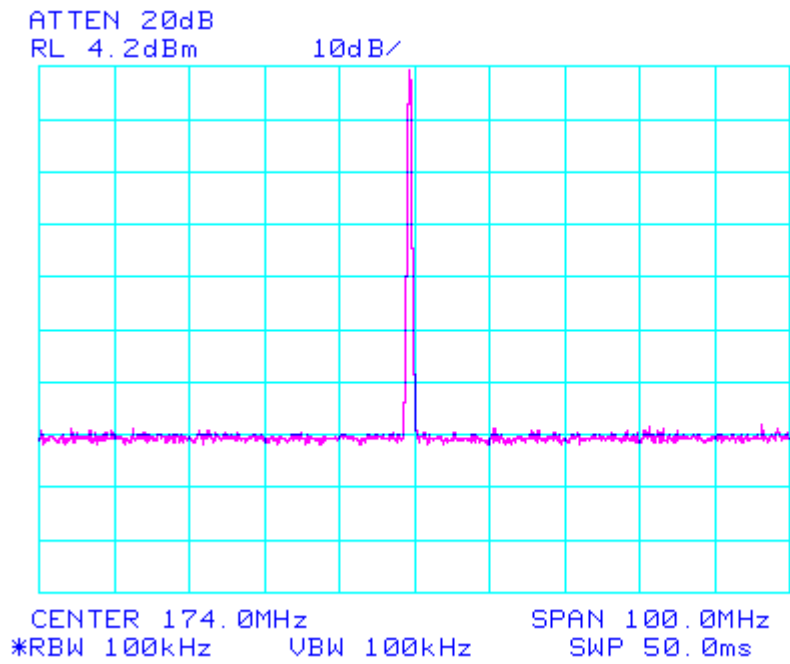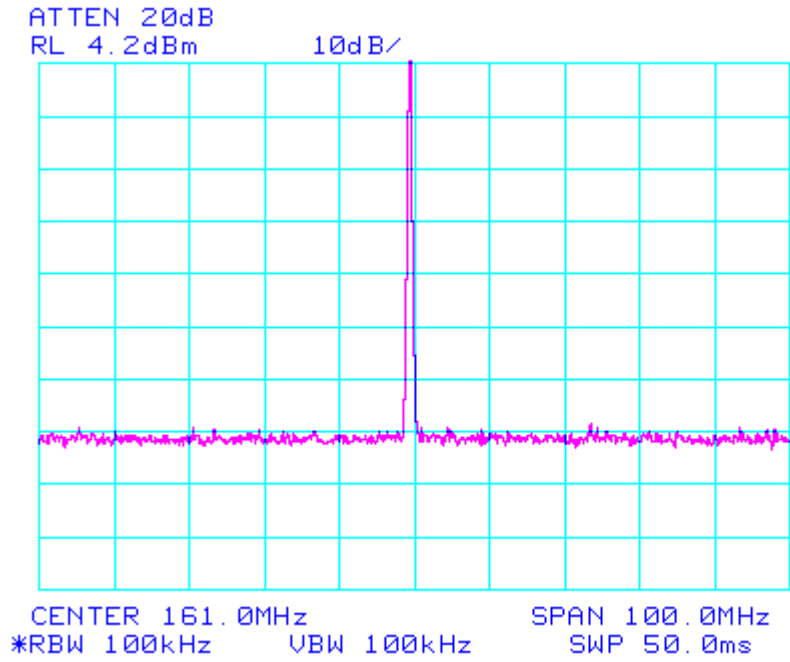


MASK: D for 5W
SPECTRUM FOR EMISSION **8K08F1D**
OUTPUT POWER: 5 Watts
9600 bps
PEAK DEVIATION = 2260 Hz
SPAN = 50 kHz

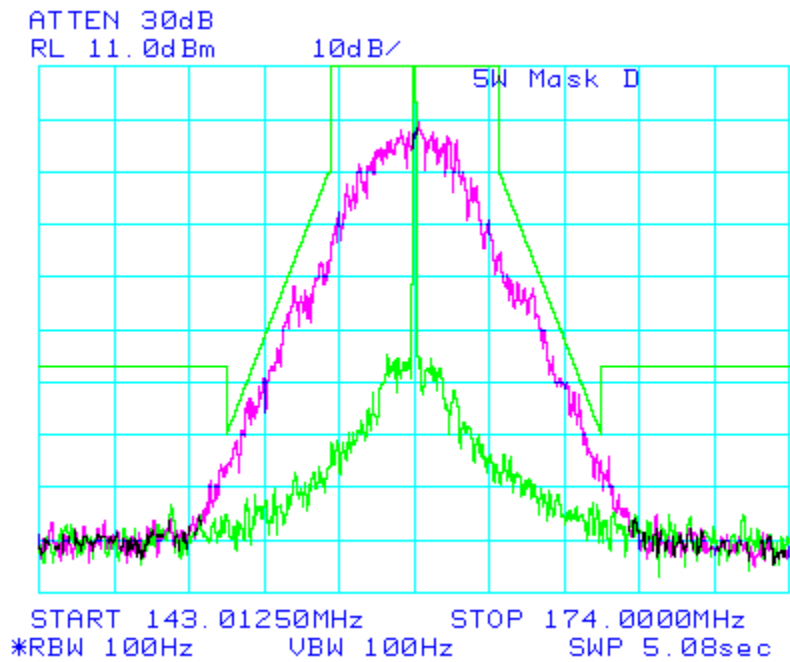
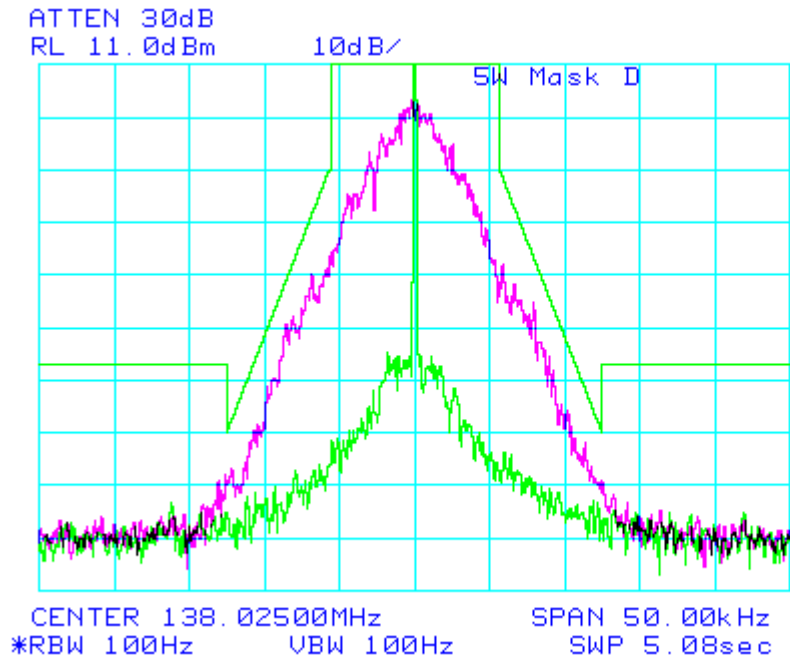


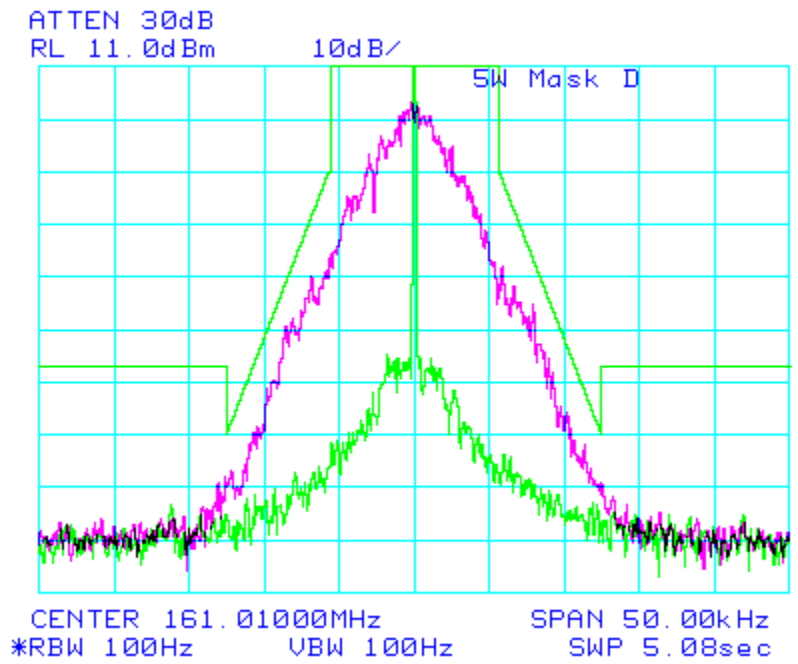
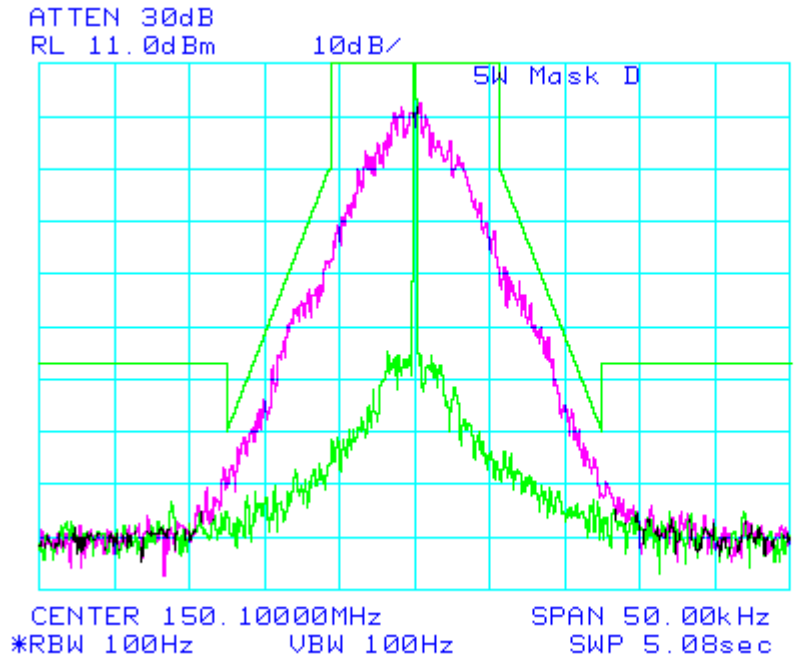


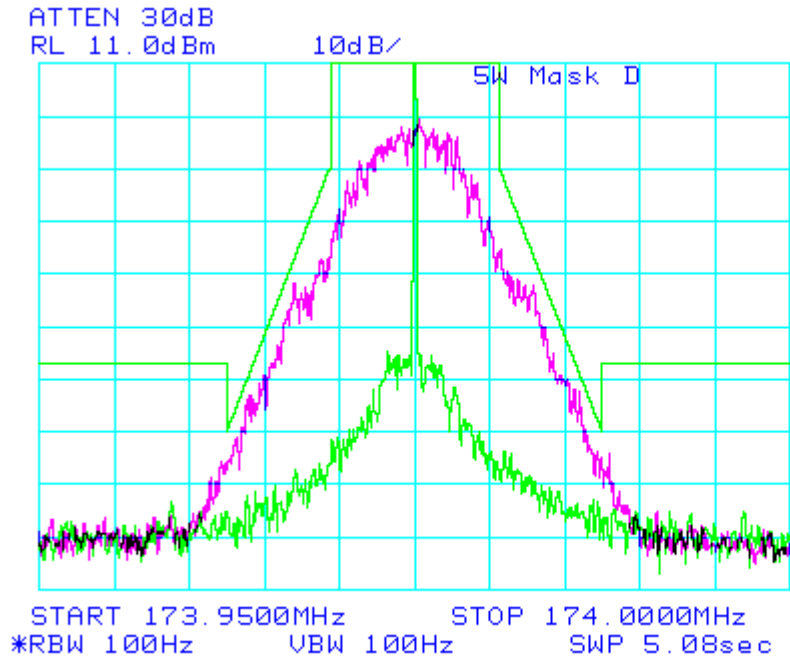



WIDE SPAN = 100 MHz
OUTPUT POWER: 5 Watts


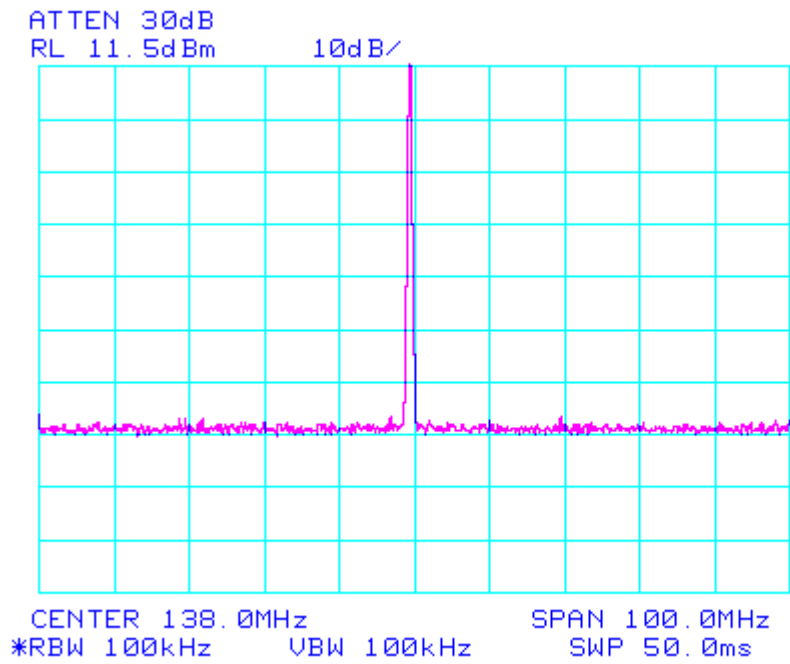


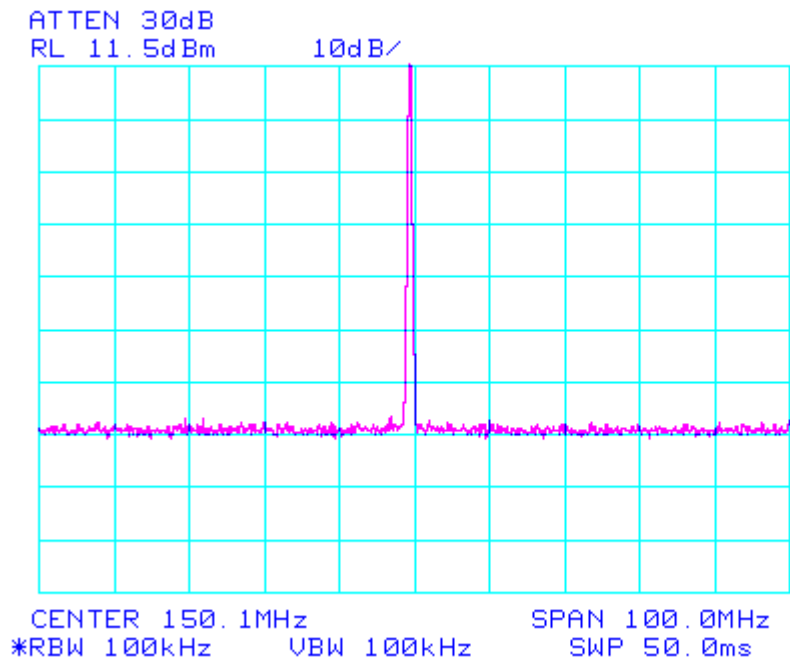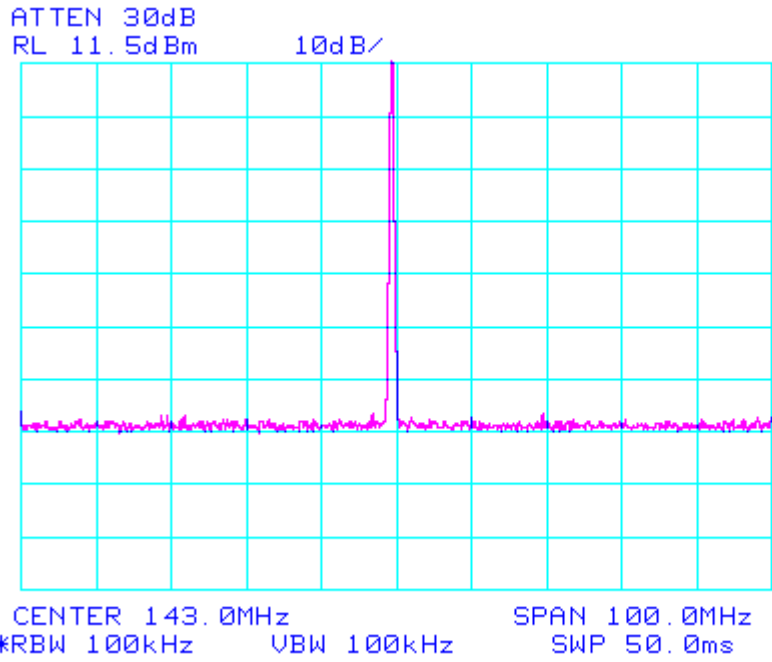


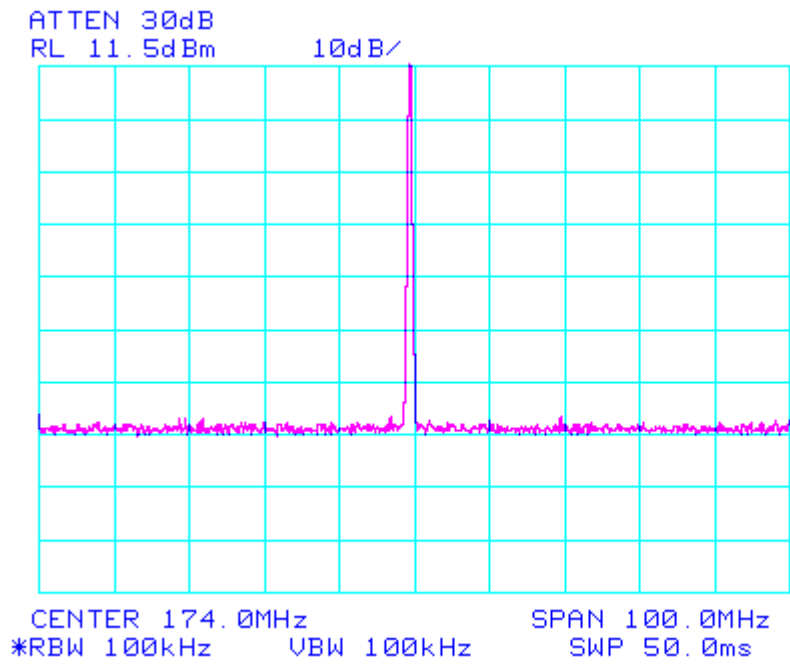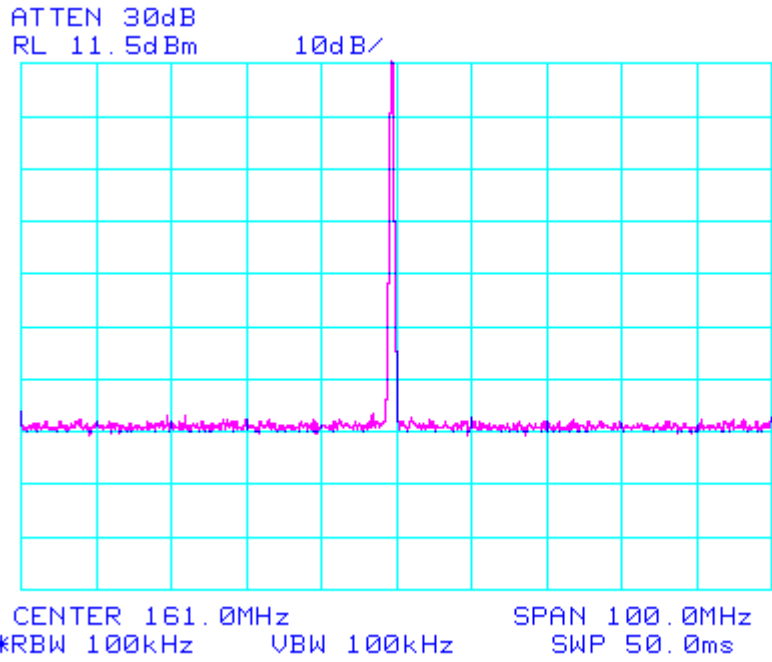


MASK: D for 1W
SPECTRUM FOR EMISSION **8K08F1D**
OUTPUT POWER: 1 Watt
9600 bps
PEAK DEVIATION = 2260 Hz
SPAN = 50 kHz

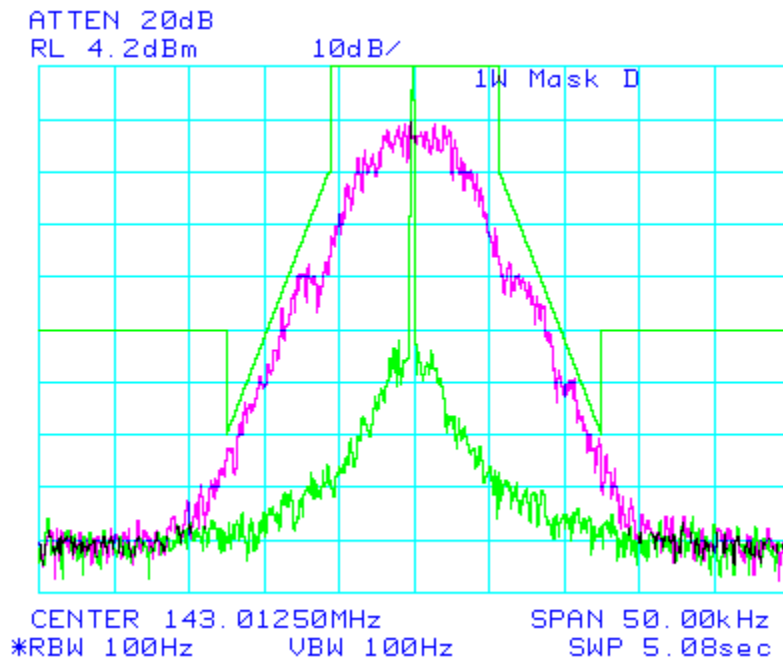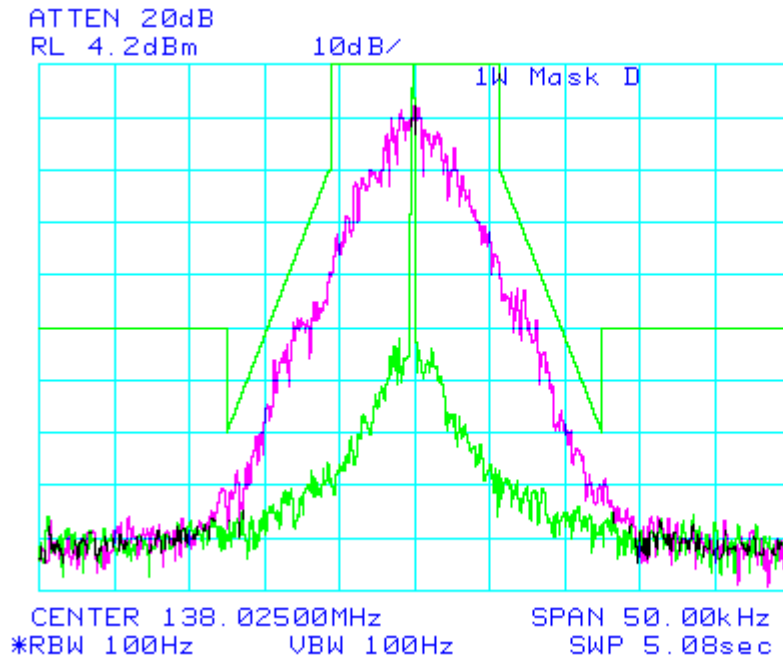

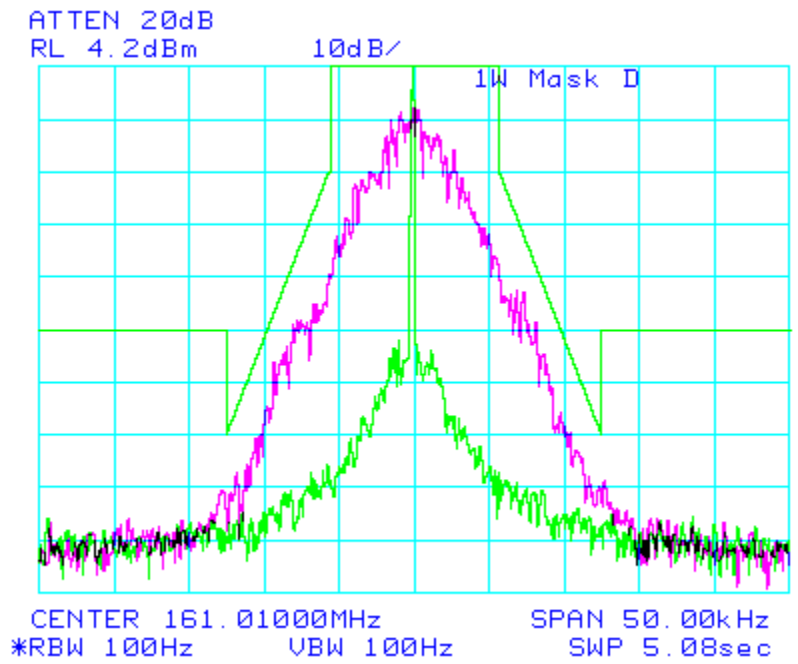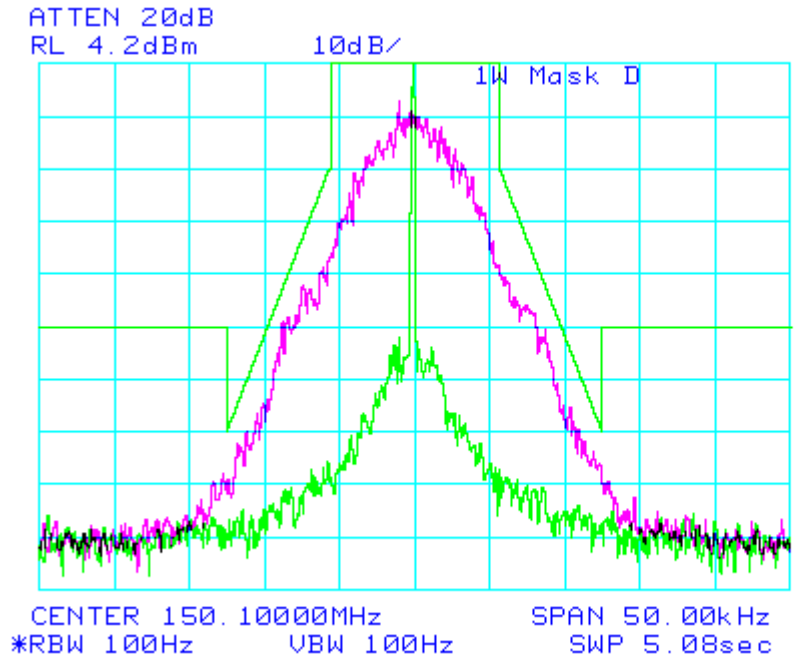

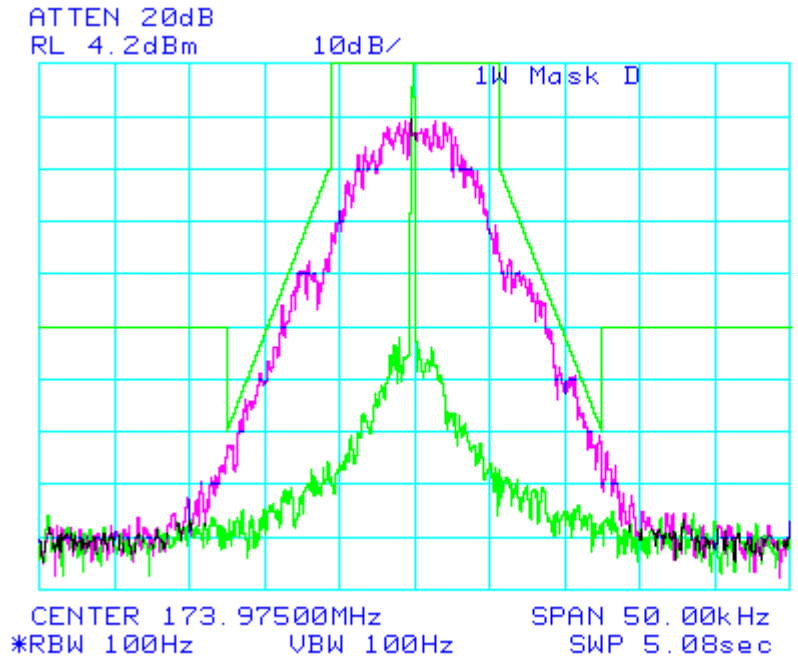


WIDE SPAN = 100 MHz
OUTPUT POWER: 1 Watt

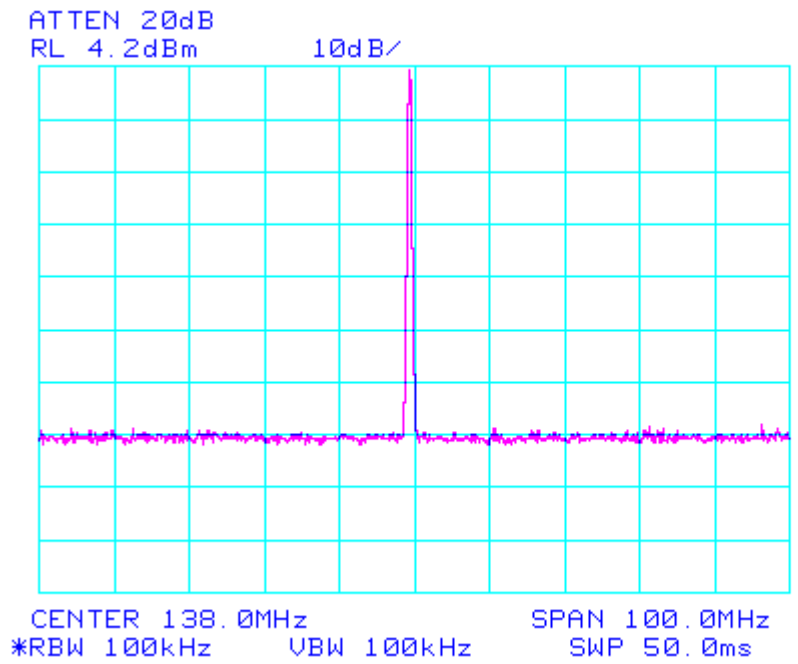

ATTEN 20dB
RL 4.2dBm


10dB/

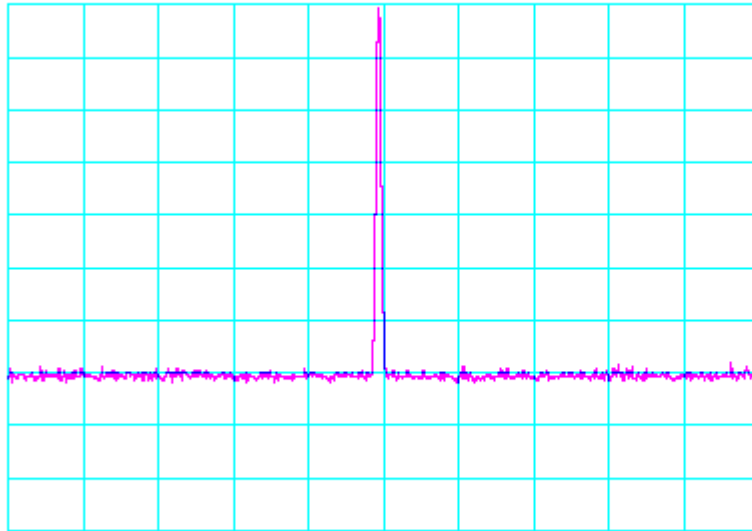



CENTER 143.0MHz SPAN 100.0MHz
*RBW 100kHz VBW 100kHz SWP 50.0ms

ATTEN 20dB
RL 4.2dBm

10dB/

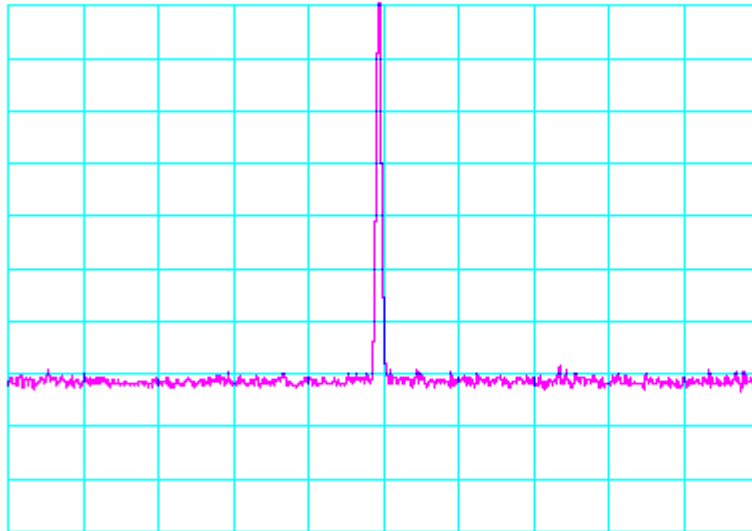

CENTER 150.1MHz SPAN 100.0MHz
*RBW 100kHz VBW 100kHz SWP 50.0ms

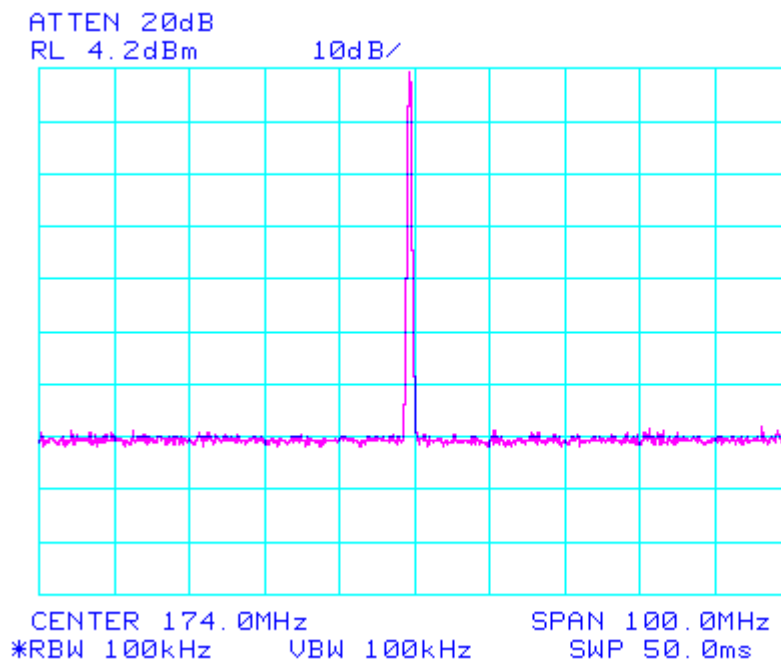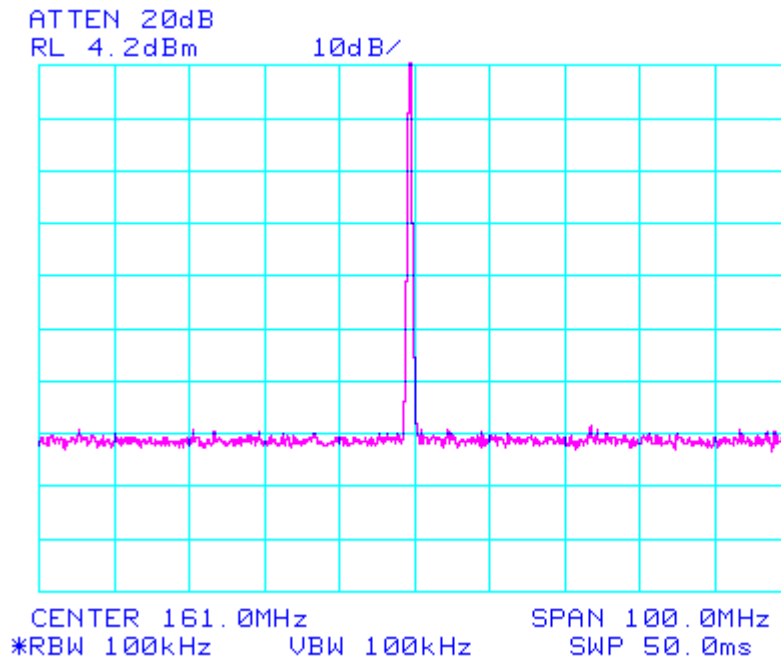

NAME OF TEST: Transmitter Occupied Bandwidth for Emission Designators
4K00F1D, 3K20F1D

RULE PART NUMBER: 2.201, 2.202, 2.1033 (c)(14), 2.1049(h), 2.1041, 90.209(b)(5), 90.210 (b)
IC: RSS-119 5.8.4

MINIMUM STANDARD: Mask E
Sidebands and Spurious [Rule 90.210 (d), P =5 Watts]
Authorized Bandwidth = 6 kHz [Rule 90.209(b) (5)]
From Fo to 3.0 kHz, down 0 dB. Greater than 3.0 kHz to 4.6 kHz, down 30 + 16.67($f_d-3\text{kHz}$) dB. Greater than 4.6 kHz, at least 55+10log₁₀(P) or 65 dB, whichever is the lesser of the attenuation.


Attenuation = 0 dB at Fo to 3.0 kHz
Attenuation = 30 dB at 3.0 kHz and 57 dB at 4.6 kHz
Attenuation = 62 dB (55 dB @ 1 Watt) at > 4.6 kHz

TEST RESULTS: Meets minimum standard (see data on the following pages)



TEST CONDITIONS: Standard Test Conditions, 25 C



TEST EQUIPMENT: 50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 25-A-MFN-6 (6dB, 25W)
DC Power Supply, Hewlett Packard Model 6653A
Spectrum Analyzer, Hewlett Packard Model HP8563E
Modulation Analyzer, Hewlett Packard Model HP8901A


TEST SET-UP:

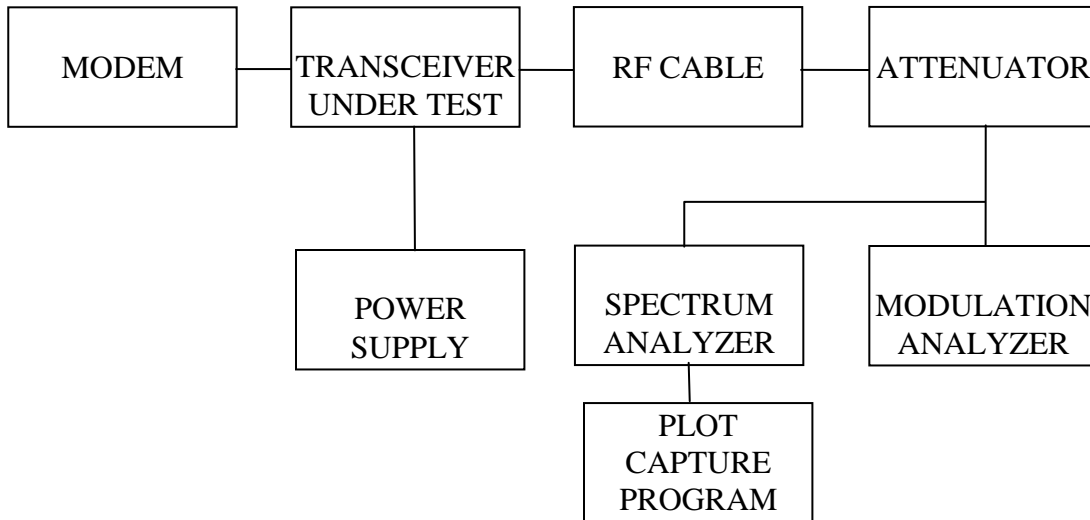


MASK: E for 5W
SPECTRUM FOR EMISSION **4K00F1D**
OUTPUT POWER: 5 Watts
4800 bps
PEAK DEVIATION = 1460 Hz
SPAN = 30 kHz

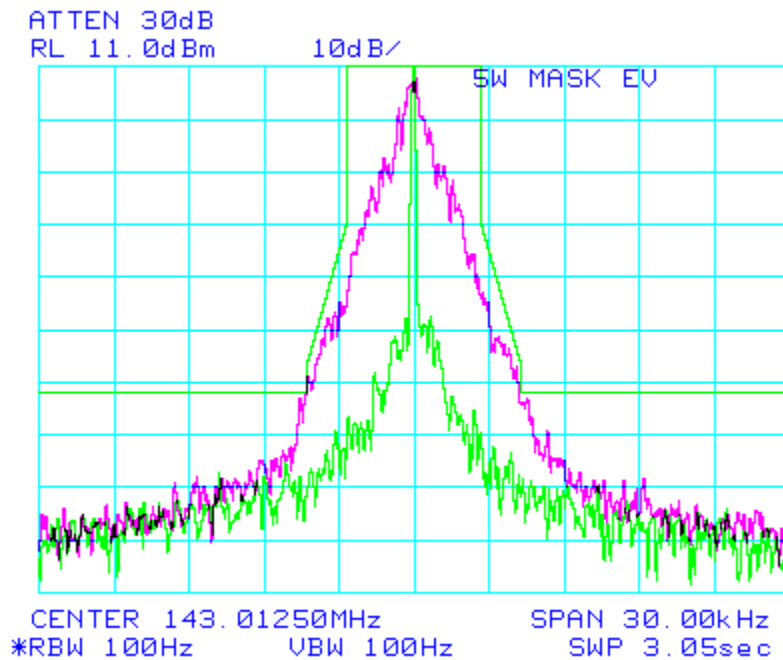
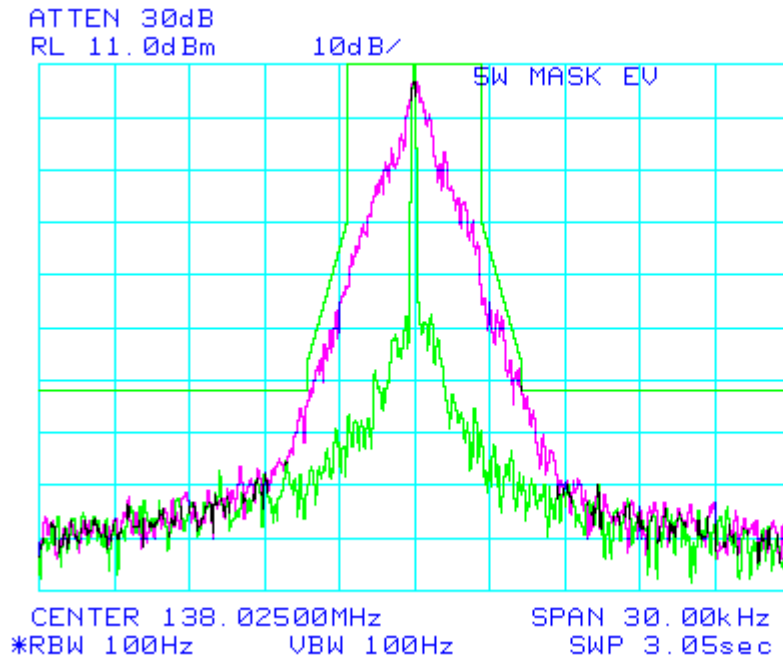


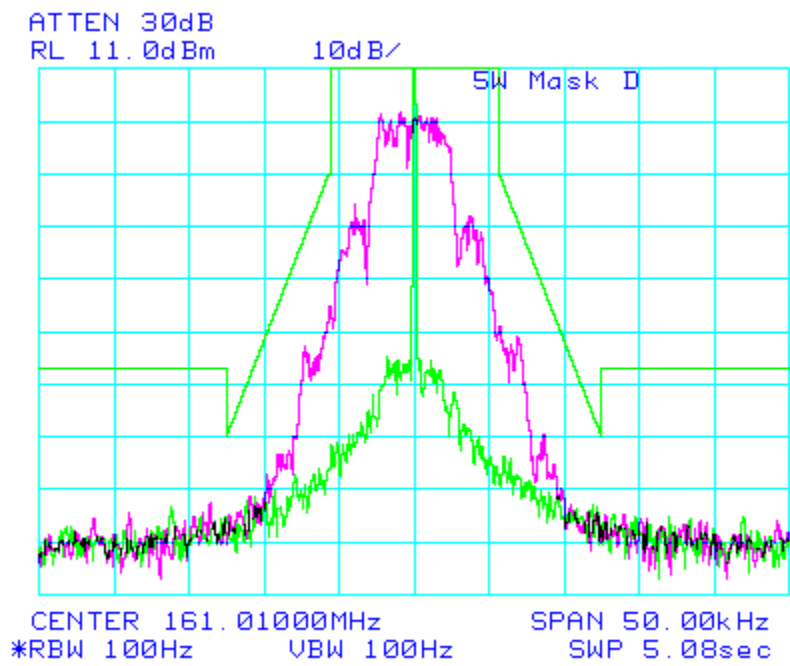
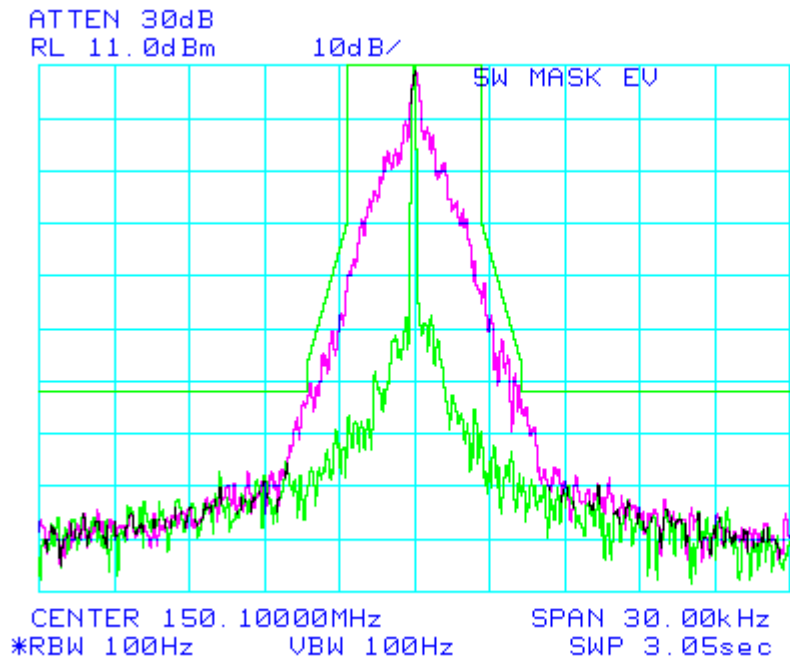


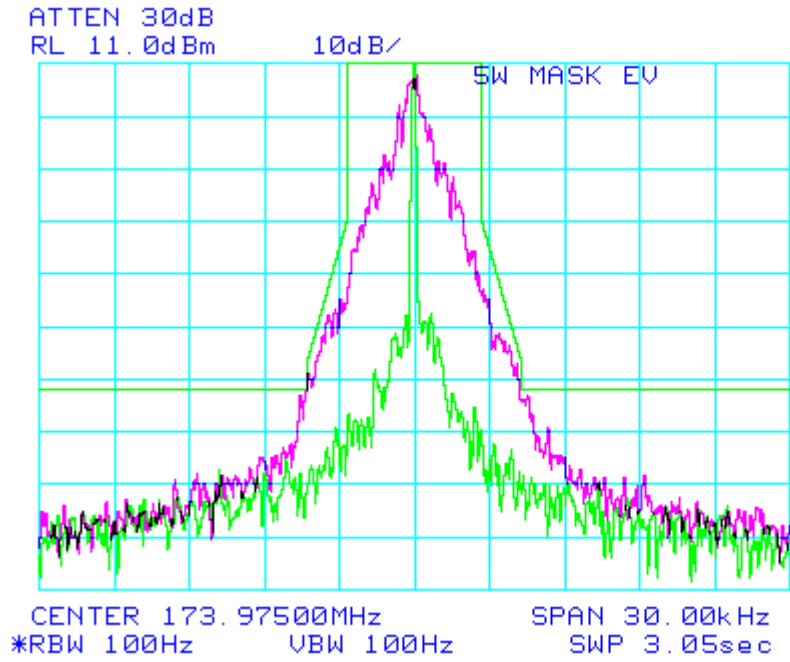



WIDE SPAN = 100 MHz
OUTPUT POWER: 5 Watts


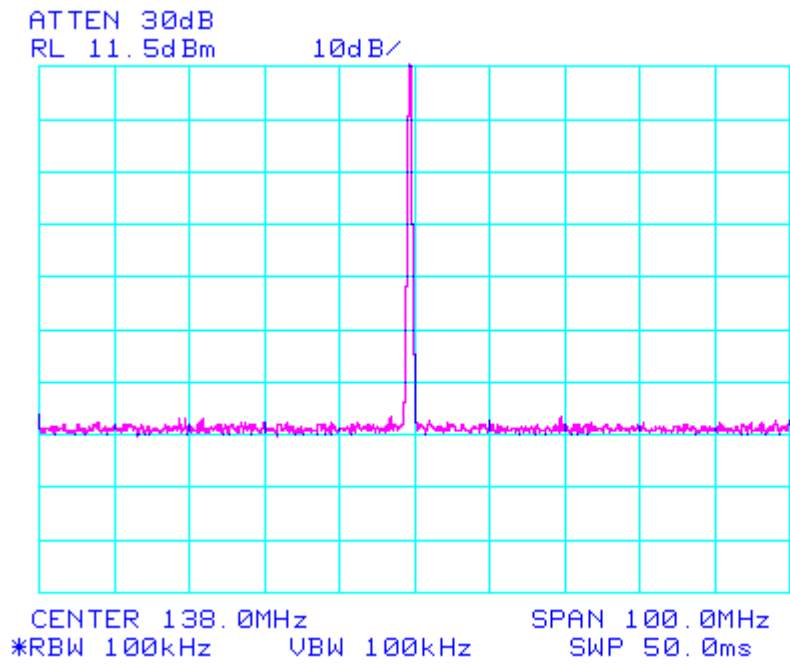


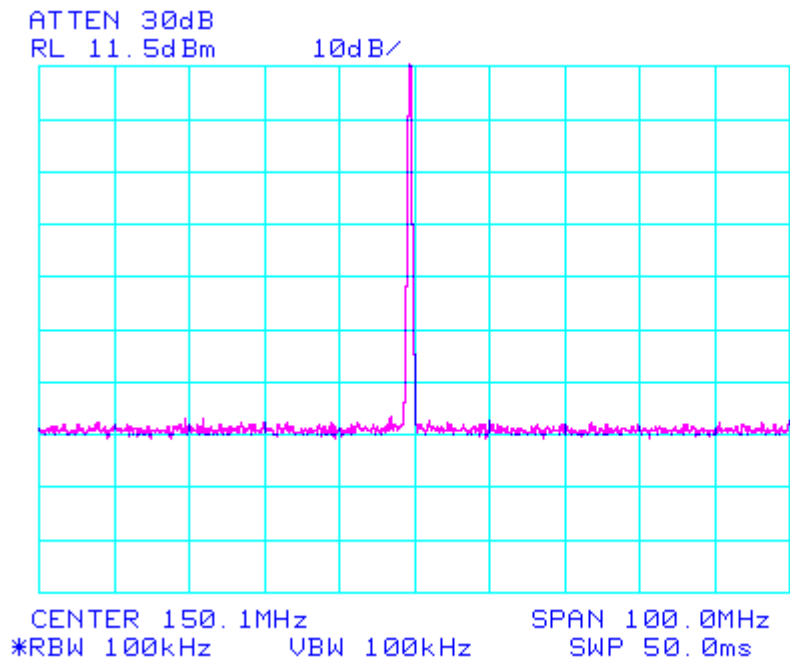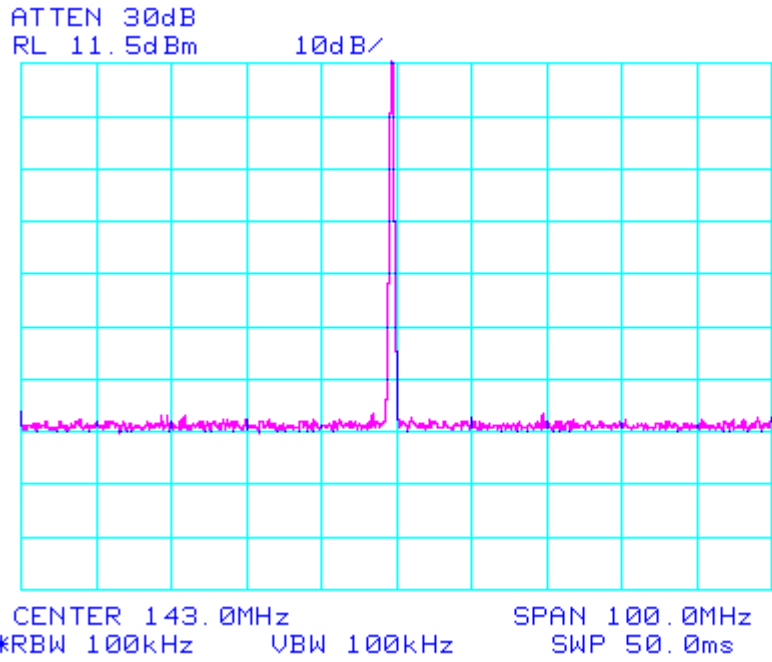


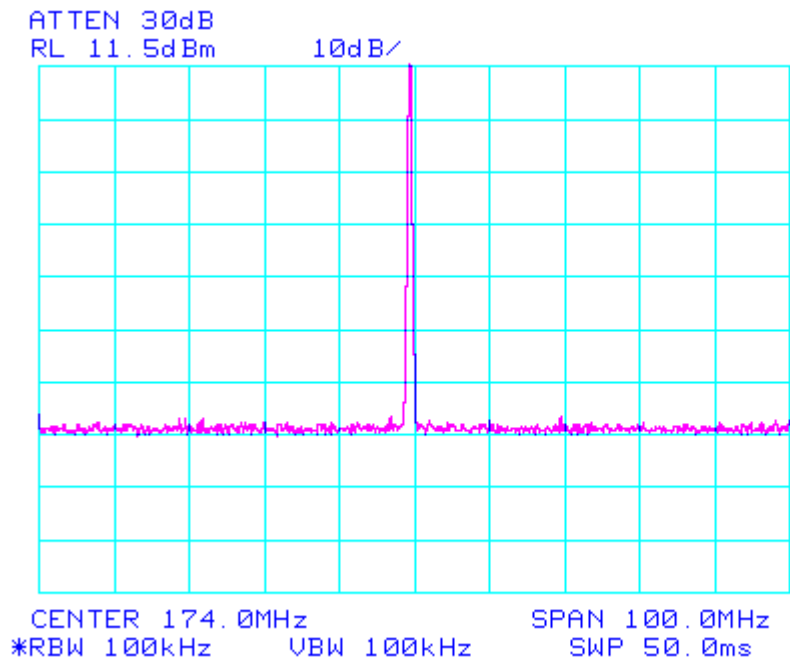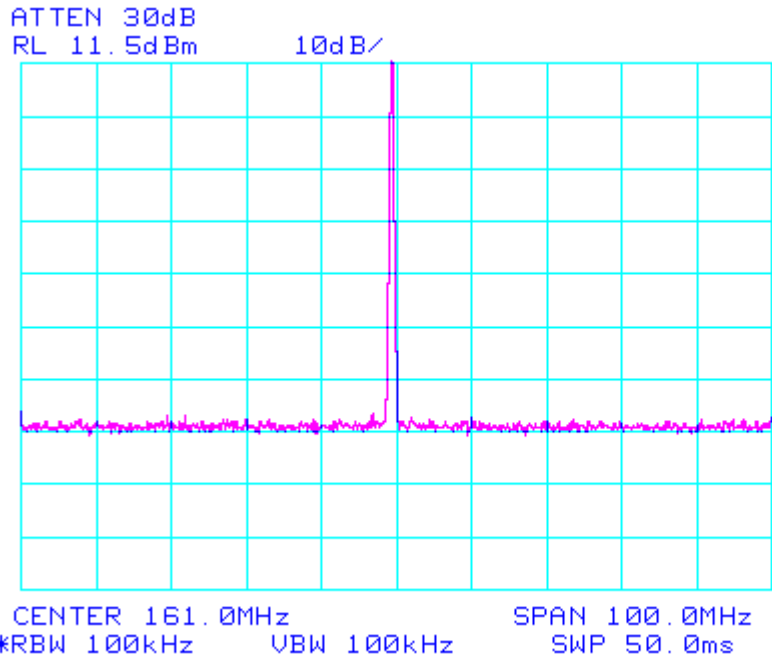


MASK: E for 1W
SPECTRUM FOR EMISSION **4K00F1D**
OUTPUT POWER: 1 Watt
4800 bps
PEAK DEVIATION = 1460 Hz
SPAN = 30 kHz

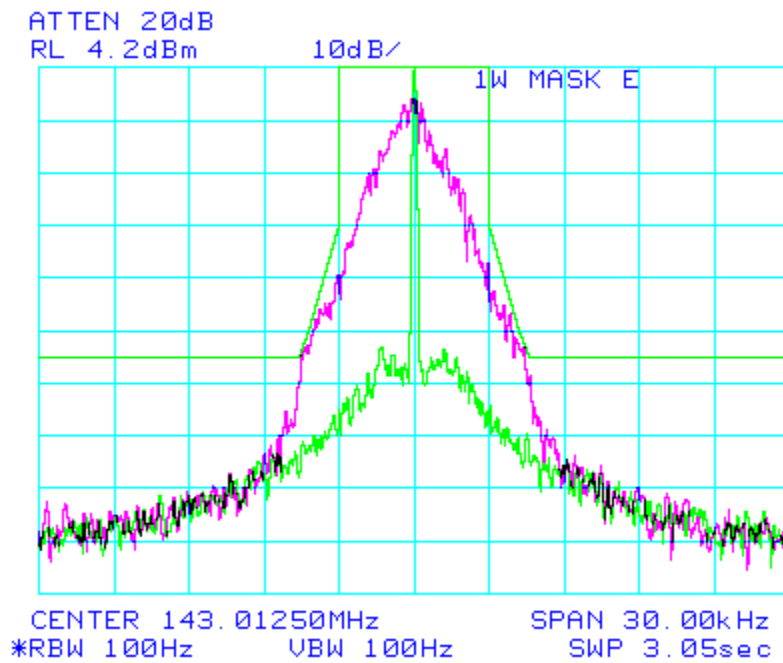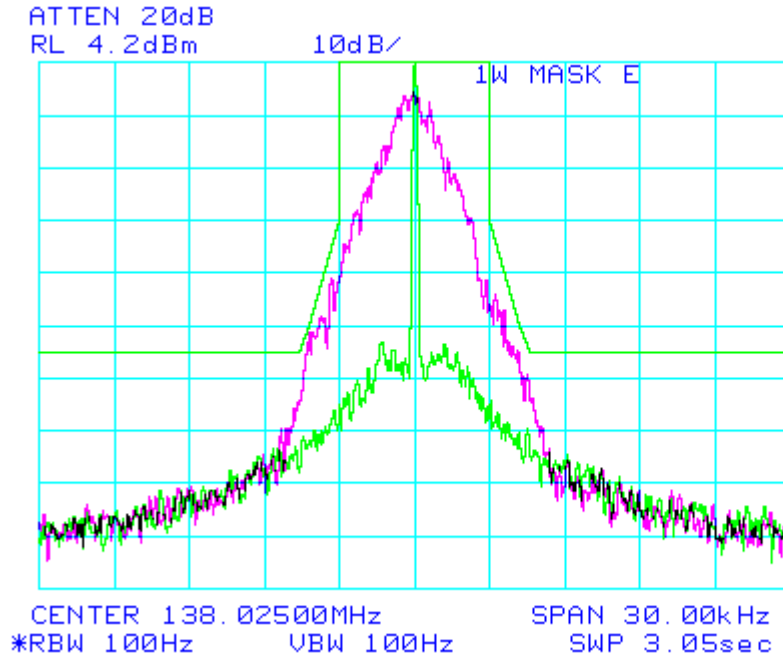

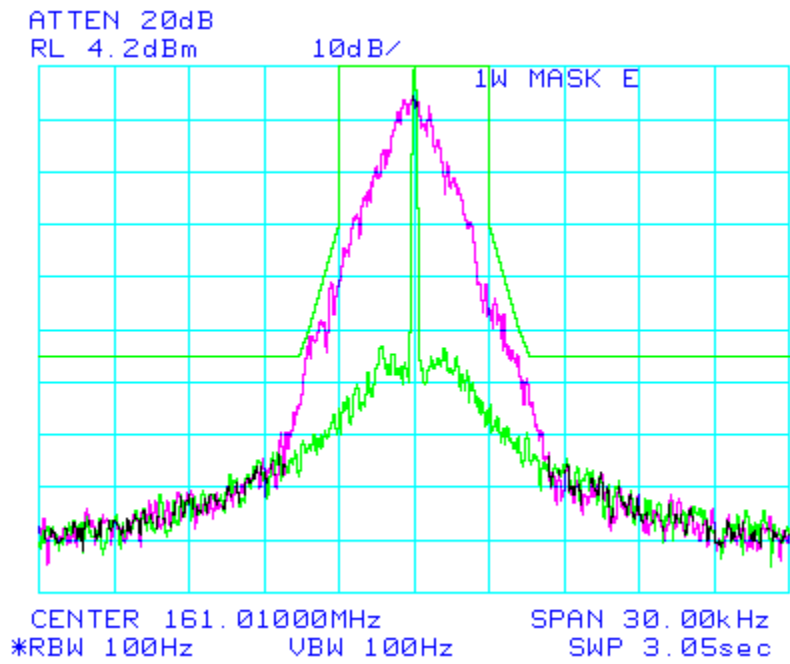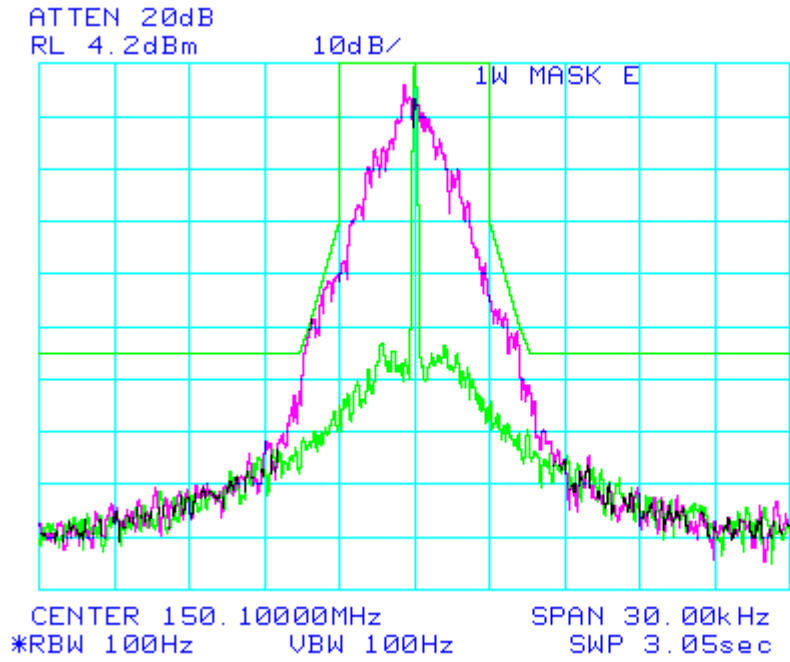

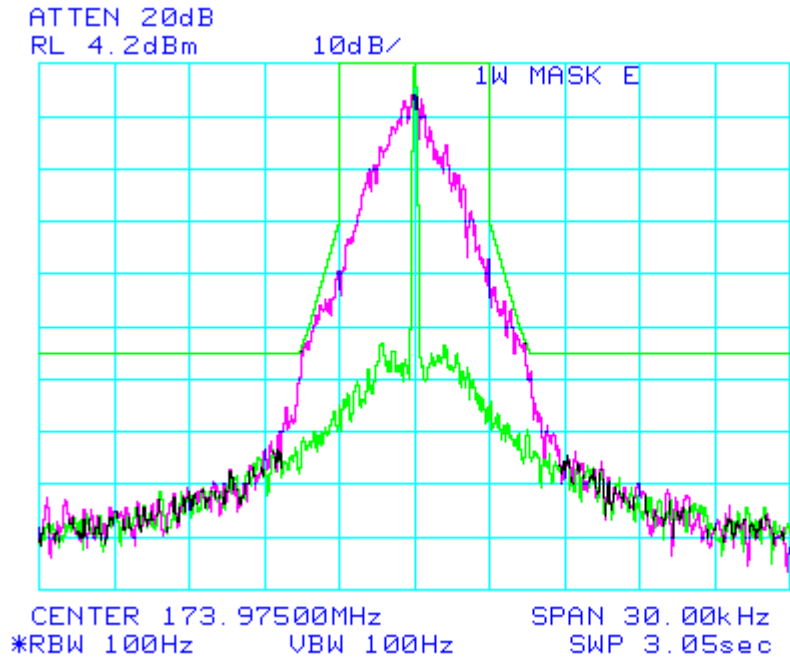


WIDE SPAN = 100 MHz
OUTPUT POWER: 1 Watt

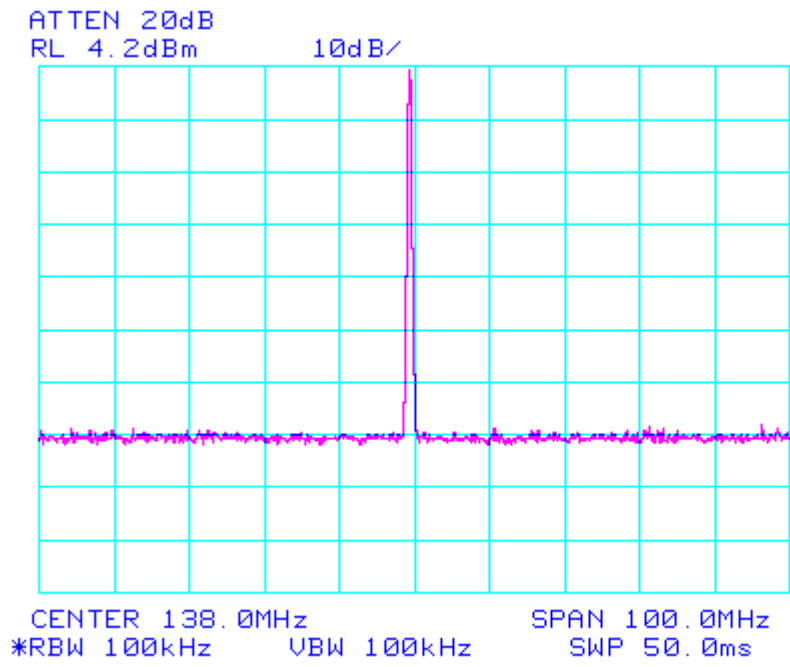

ATTEN 20dB
RL 4.2dBm


10dB/

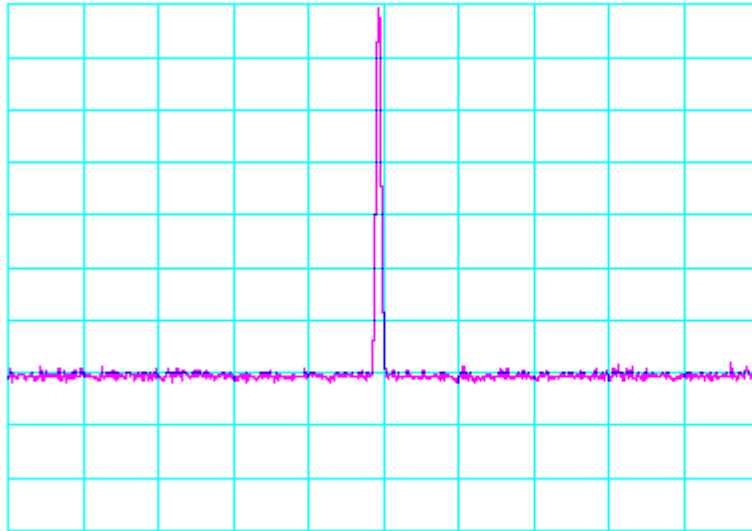



CENTER 143.0MHz SPAN 100.0MHz
*RBW 100kHz VBW 100kHz SWP 50.0ms

ATTEN 20dB
RL 4.2dBm



10dB/


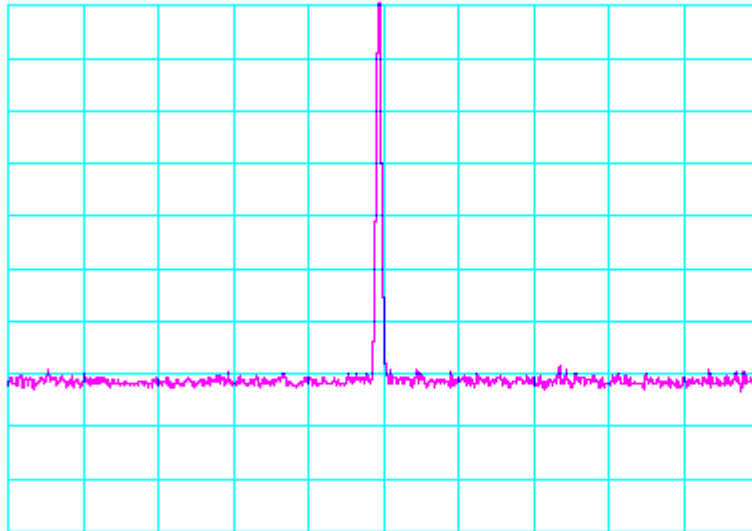



CENTER 150.1MHz SPAN 100.0MHz
*RBW 100kHz VBW 100kHz SWP 50.0ms

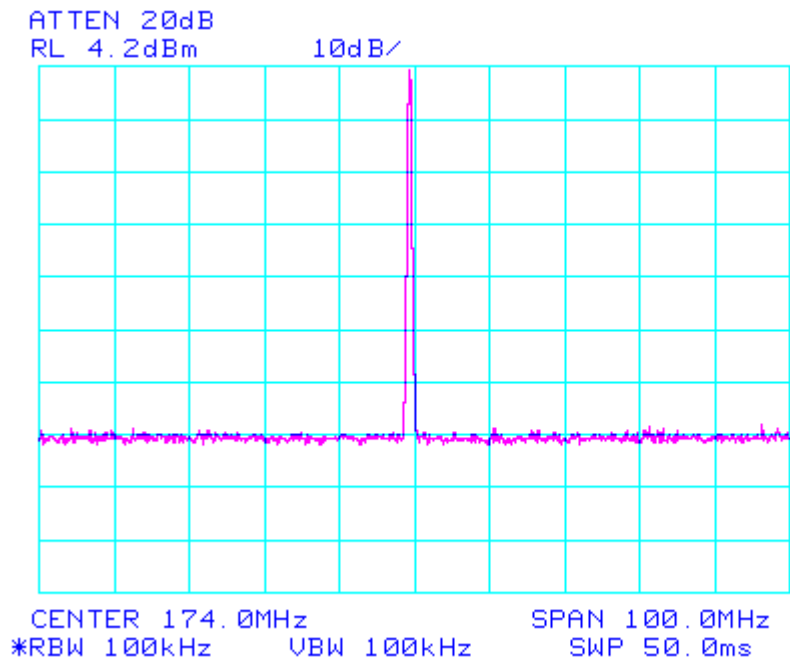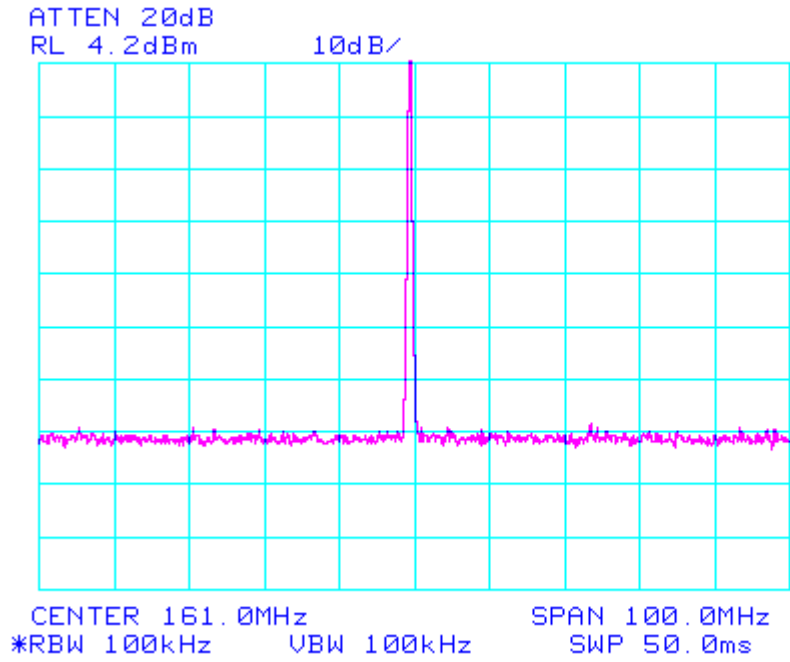


MASK: E for 5W
SPECTRUM FOR EMISSION **3K20F1D**
OUTPUT POWER: 5 Watts
1200 bps
PEAK DEVIATION = 750 Hz
SPAN = 30 kHz

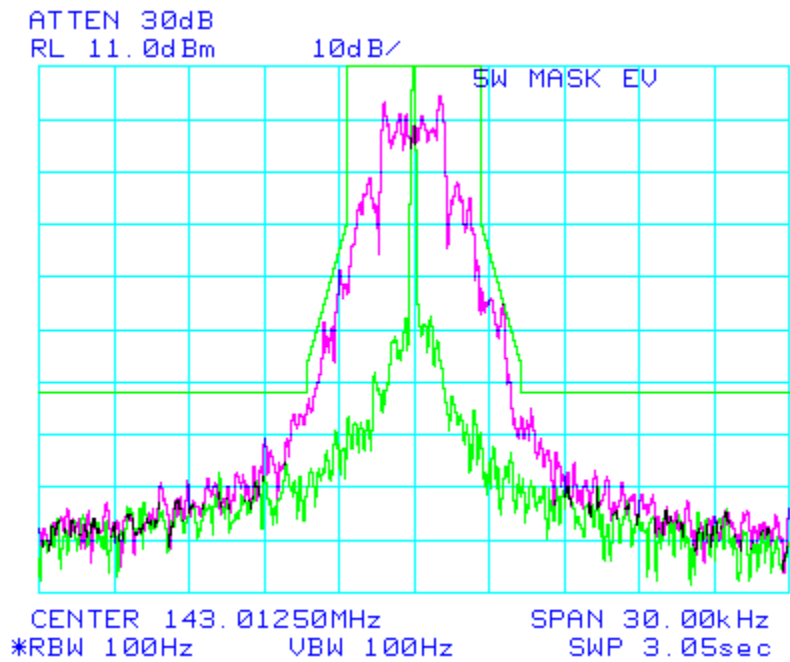
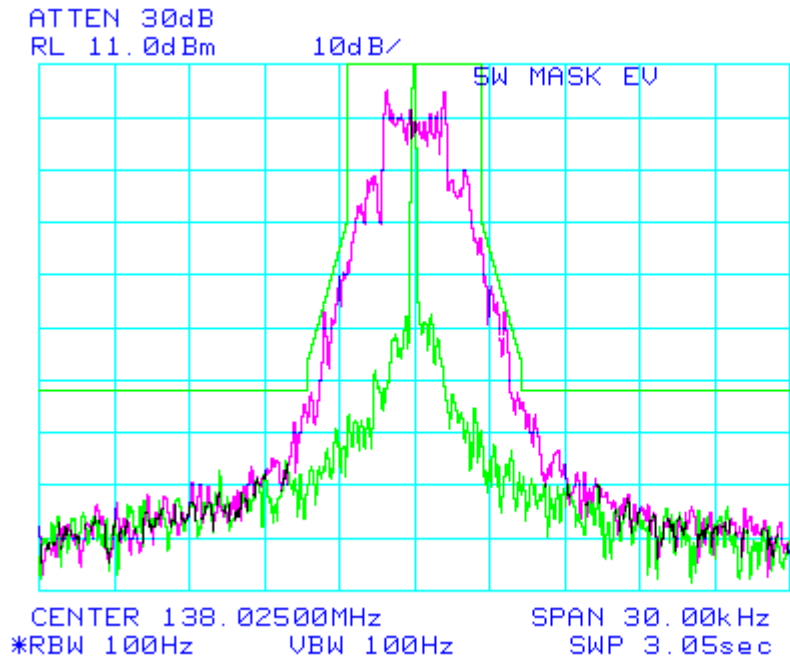


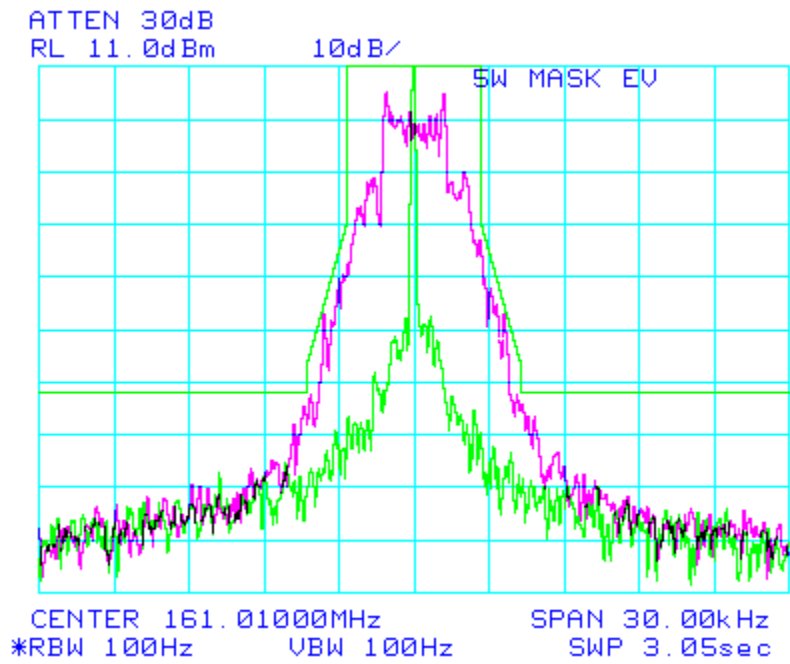
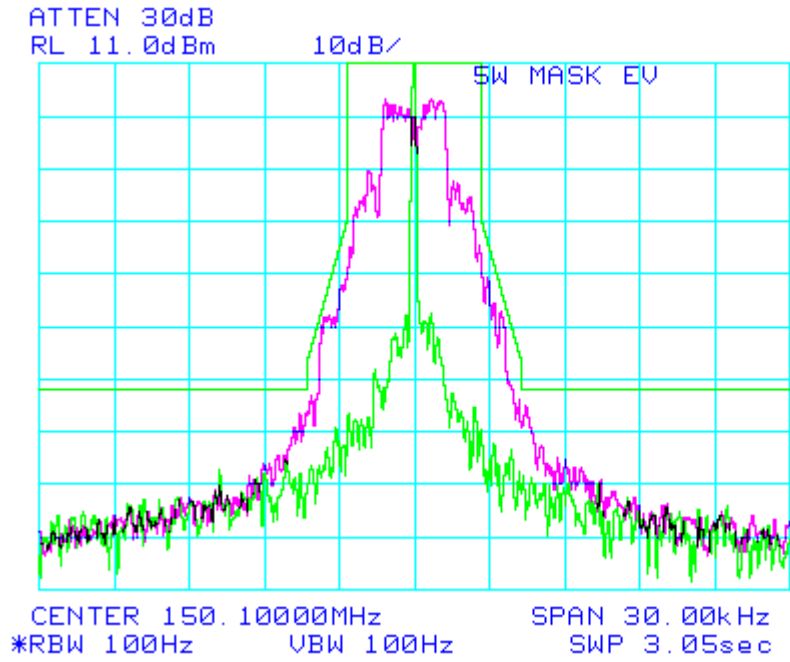


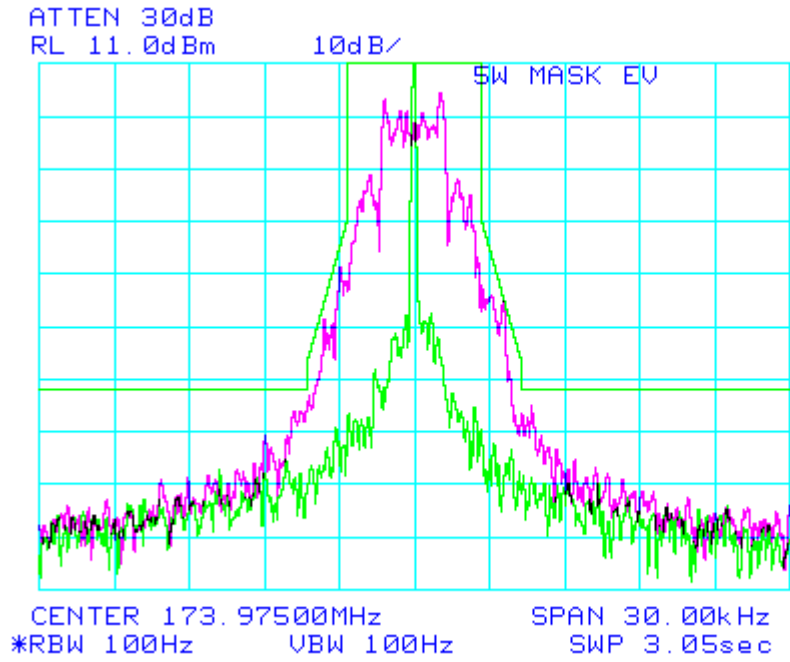



WIDE SPAN = 100 MHz
OUTPUT POWER: 5 Watts


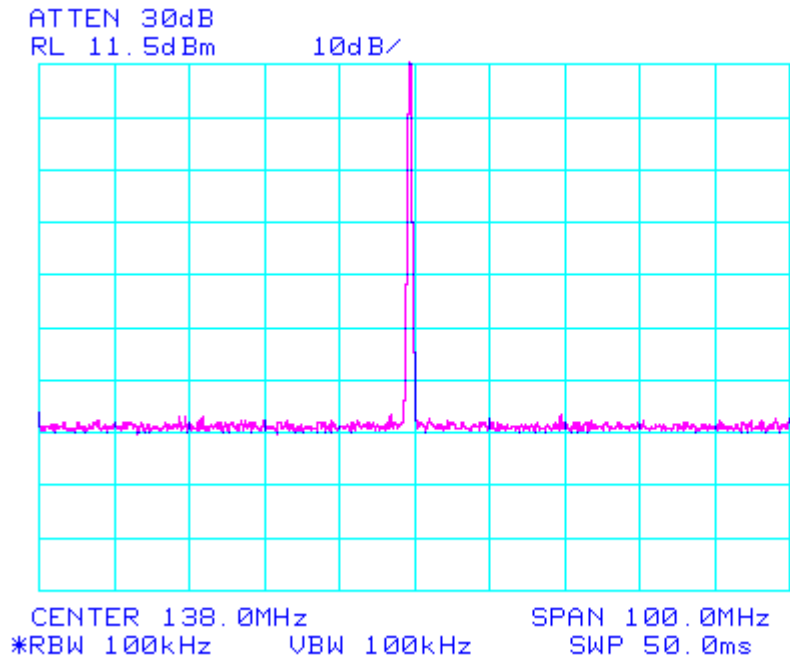


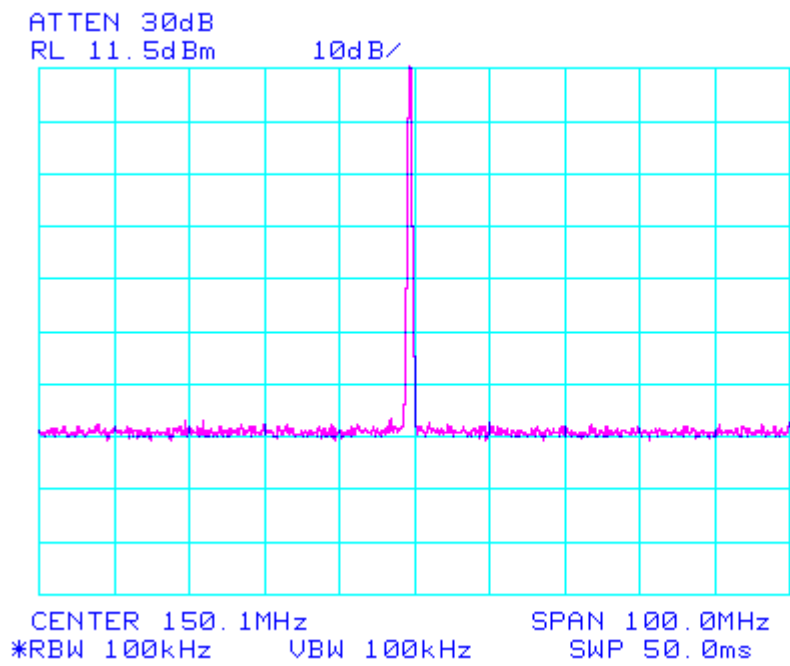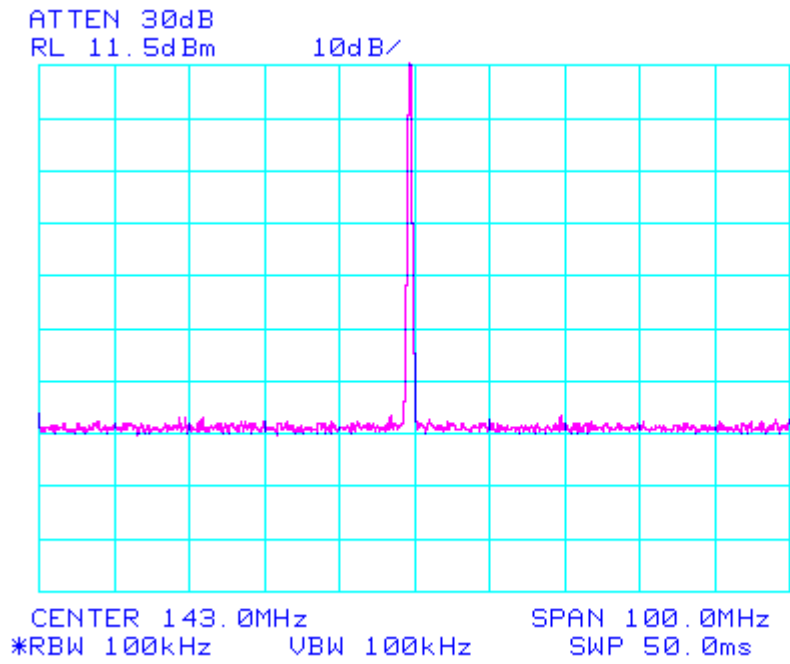


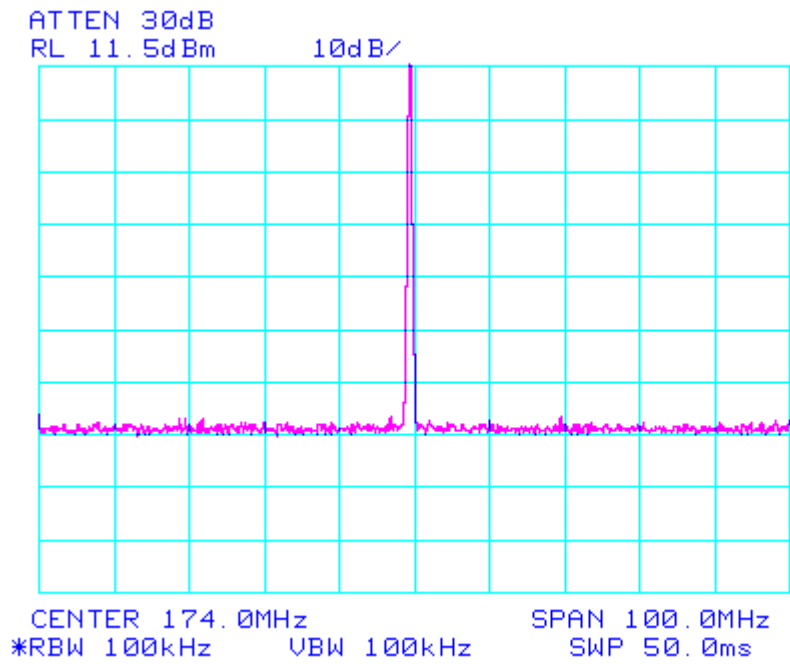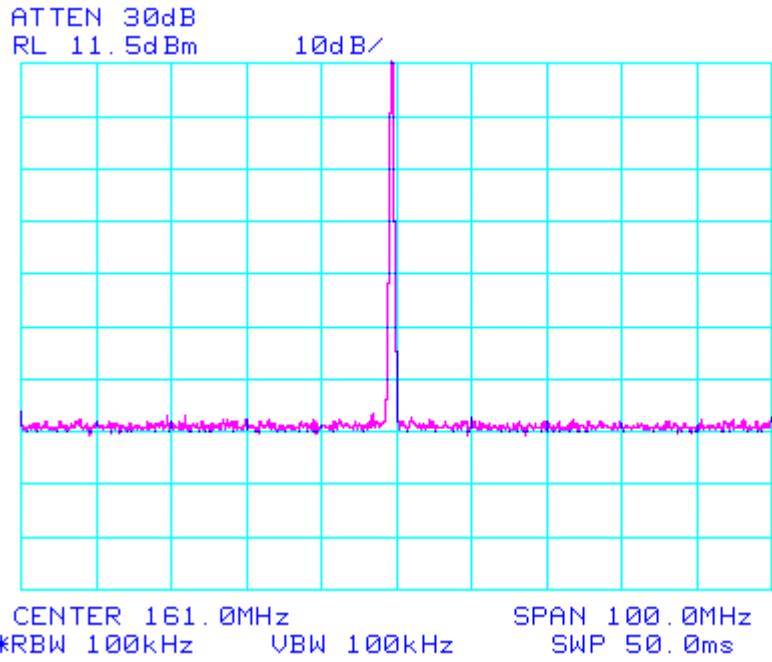


MASK: E for 1W
SPECTRUM FOR EMISSION **3K20F1D**
OUTPUT POWER: 1 Watt
1200 bps
PEAK DEVIATION = 750 Hz
SPAN = 30 kHz

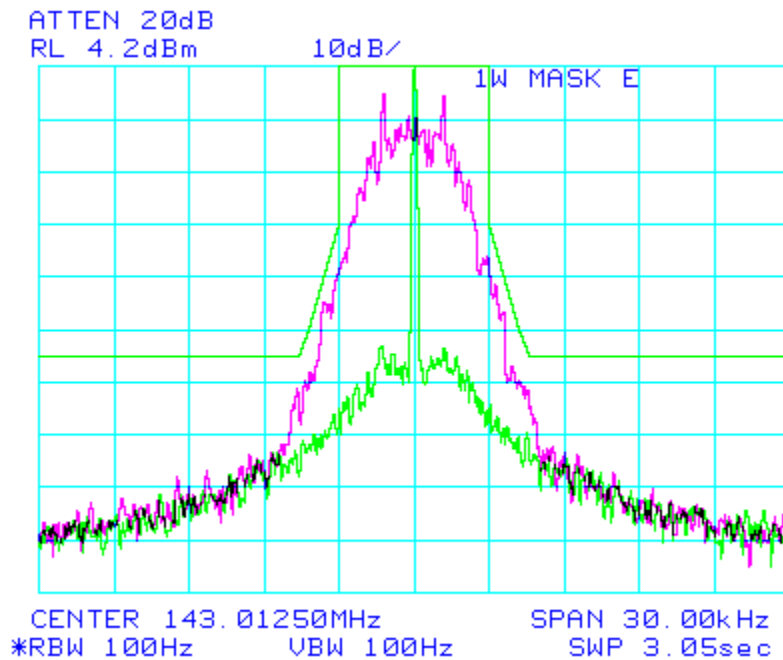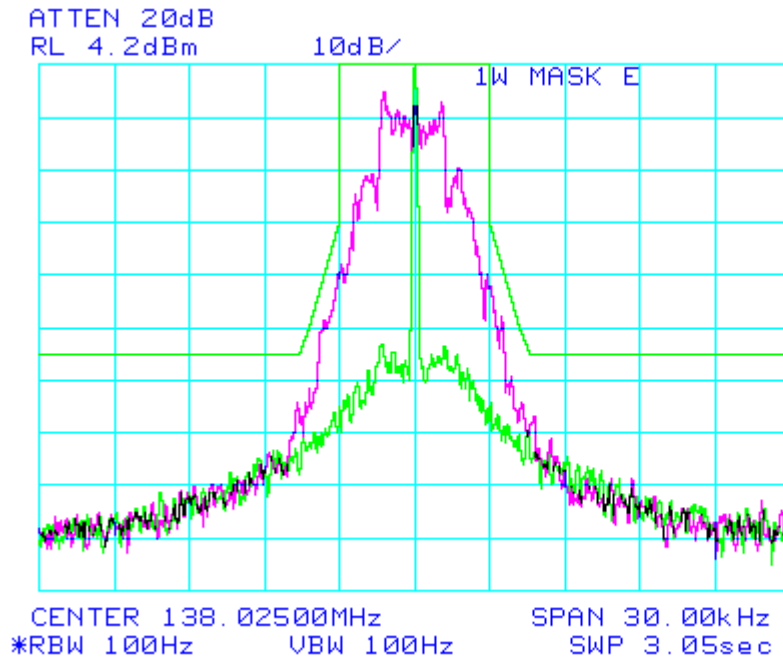

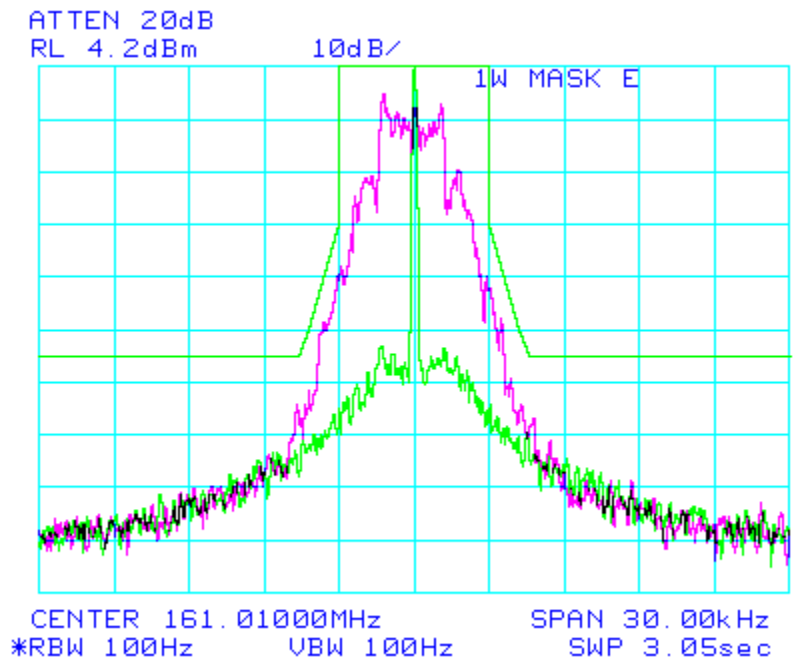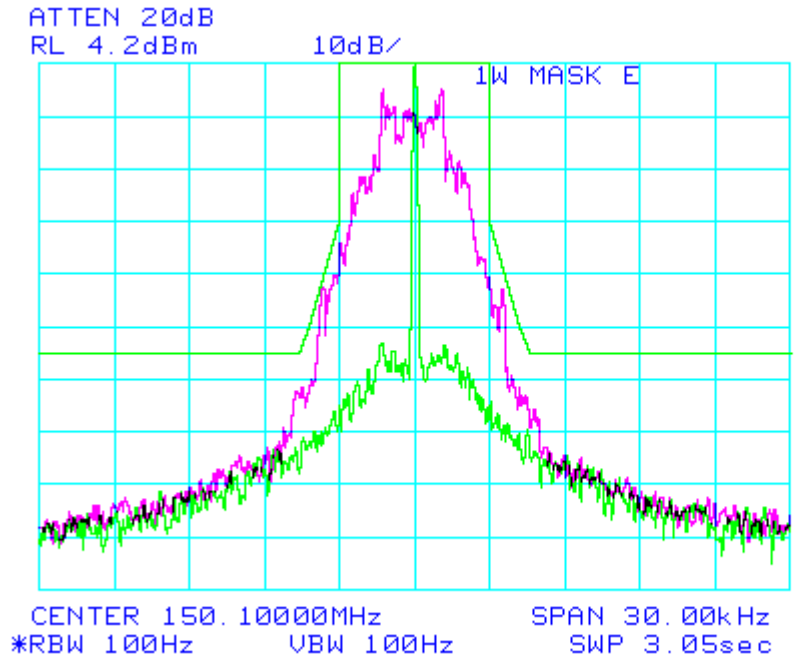

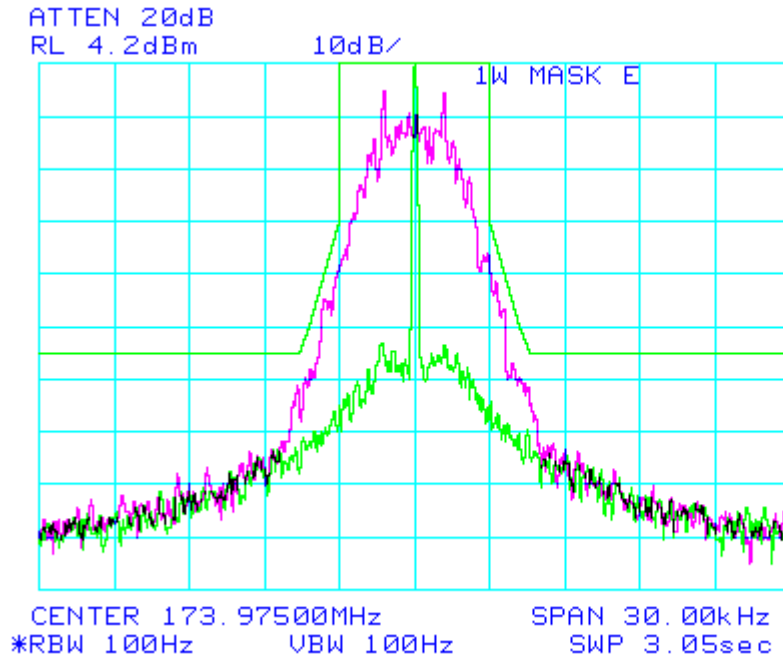


WIDE SPAN = 100 MHz
OUTPUT POWER: 1 Watt

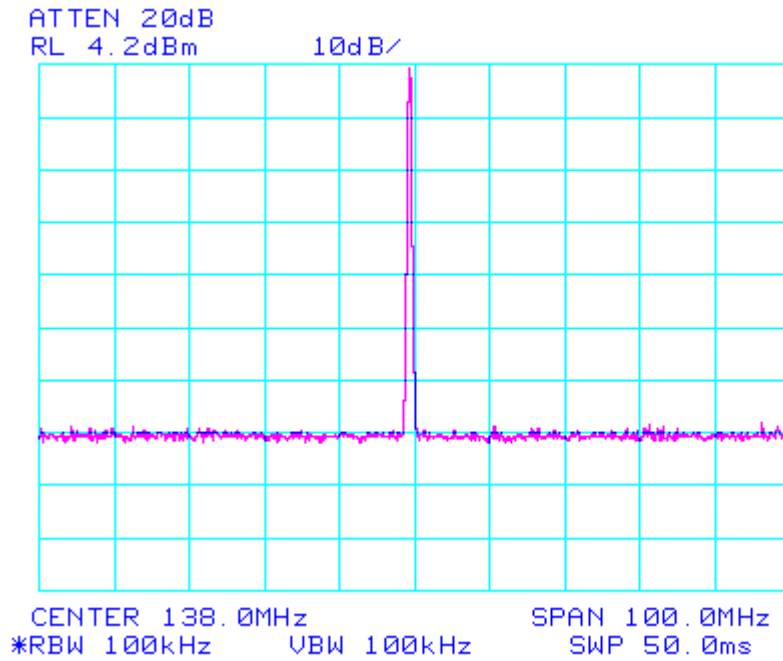

ATTEN 20dB
RL 4.2dBm


10dB/

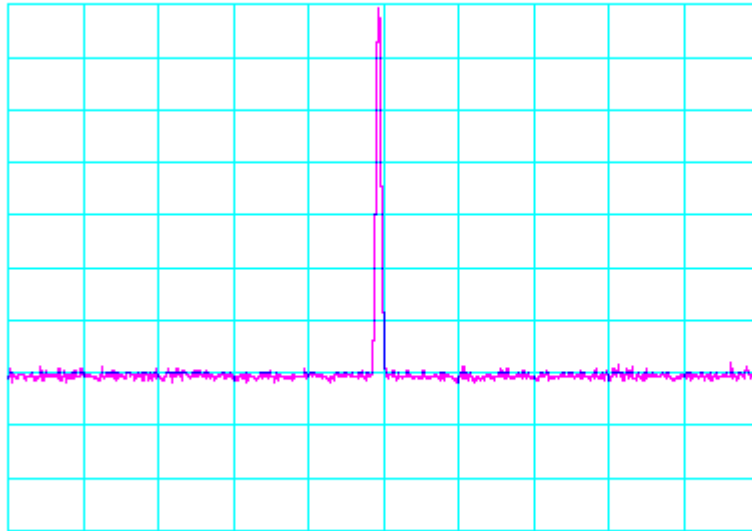



CENTER 143.0MHz SPAN 100.0MHz
*RBW 100kHz VBW 100kHz SWP 50.0ms

ATTEN 20dB
RL 4.2dBm

10dB/

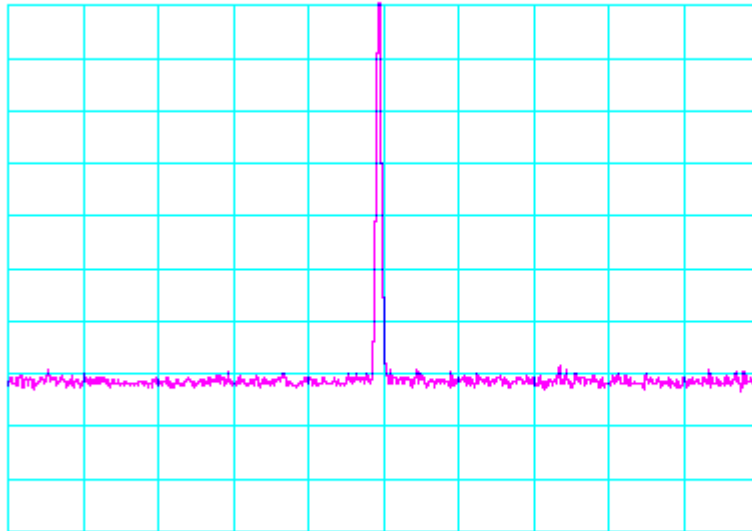

CENTER 150.1MHz SPAN 100.0MHz
*RBW 100kHz VBW 100kHz SWP 50.0ms

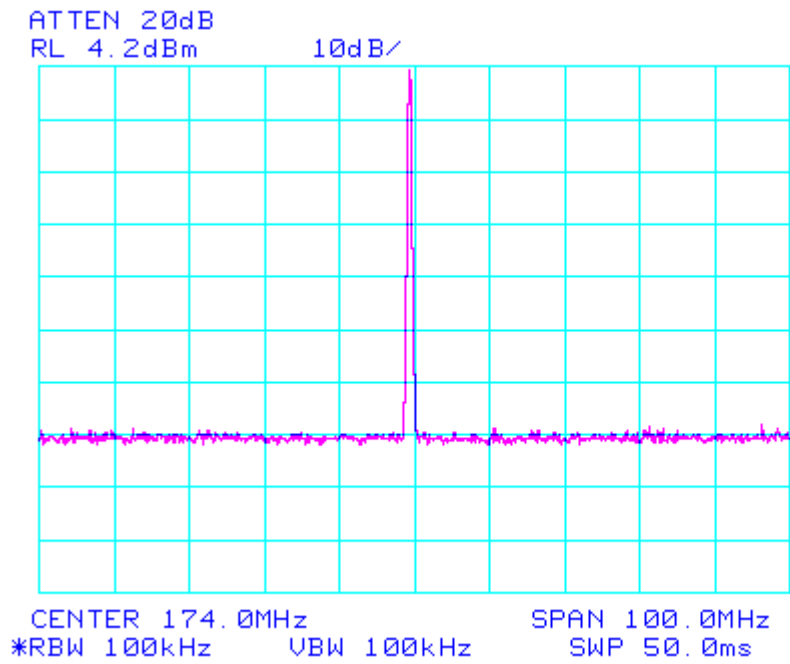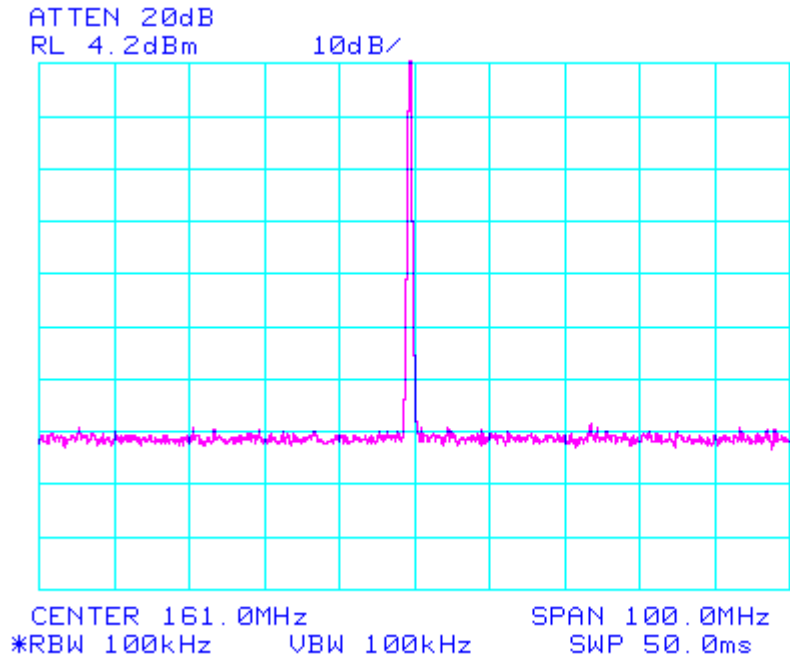

NAME OF TEST: Field Strength of Spurious Radiation

RULE PART NUMBER: 2.1053, 90.210 (e,3)(d,3)
IC: RSS-119 5.8.4, 5.8.3

MINIMUM STANDARDS: For 5 Watts: $50+10\text{Log}_{10}(5 \text{ Watts}) = -57.0 \text{ dBc}$
or -65dBc , whichever is the lesser attenuation.

For 1 Watt: $50+10\text{Log}_{10}(1 \text{ Watt}) = -50.0 \text{ dBc}$
or -70 dBc , whichever is the lesser attenuation.

TEST RESULTS: Meets minimum standards (see data on following page)


TEST CONDITIONS: Standard Test Conditions, 25 C
RF Power Level = 1 Watt and 5 Watts
Voltage = 13VDC

TEST PROCEDURE: TIA/EIA – 603-C

TEST EQUIPMENT: Waveguide Horn Antenna, EMCO Model 3115
Waveguide Horn Antenna, Electro-Metrics EM-6961
Bilog Antenna, Chase Model CBL6111B
Dipole Antenna, Electro-Metrics Model EM-6924
Power Supply, Model Instek GPS-3303
Spectrum Analyzer, Model HP-8563E
Reference Generator, Agilent Model E82570
Power Meter, Model HP 437B
50-Ohm Attenuator, Bird Electronics 50-A-FFN-20 (20dB, 50W)

MEASUREMENT PROCEDURE: Measurements were made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier.

TEST SET-UP:

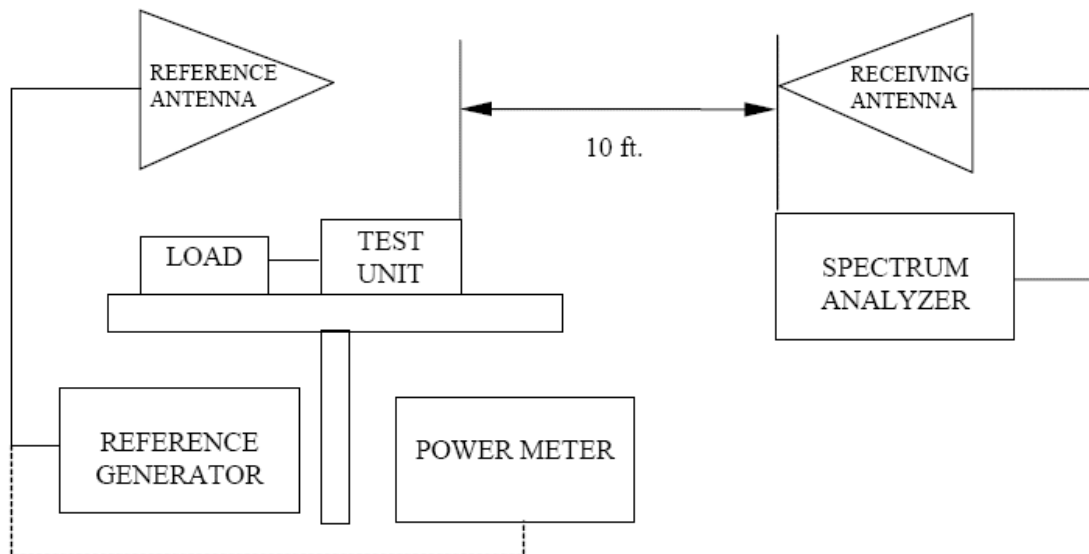

Integra
TR

Frequency: 138.025 MHz Spec = -57.0 dBc
 Highest
 Power: 5 Watts Spur = -85.0 dBc
 37.0 dBm

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation dBc
276.05	H	-91.2	-67.7	1.67	-0.47	-106.8
	V	-97.5	-73.5	1.67	-0.47	-112.6
414.075	H	-88.8	-51.8	2.17	-0.46	-91.4
	V	-81.8	-55.2	2.17	-0.46	-94.8
552.1	H	-84.2	-55.3	2.83	-0.49	-95.6
	V	-82.0	-44.7	2.83	-0.49	-85.0
690.125	H	-91.0	-53.0	3.17	-0.51	-93.7
	V	-94.3	-61.7	3.17	-0.51	-102.3
828.15	H	-106.3	-69.6	3.50	-0.47	-110.6
	V	-106.2	-67.9	3.50	-0.47	-108.8
966.175	H	-107.3	-69.1	3.67	-0.54	-110.3
	V	-107.7	-64.0	3.67	-0.54	-105.2
1104.2	H	-108.2	-73.7	4.00	2.15	-112.5
	V	-110.7	-72.0	4.00	2.15	-110.8
1242.225	H	-99.8	-62.1	4.17	2.15	-101.1
	V	-104.0	-67.8	4.17	2.15	-106.8
1380.25	H	-108.0	-70.0	4.83	2.15	-109.6
	V	-110.8	-72.4	4.83	2.15	-112.1

Frequency: 138.025 MHz

Spec = -50.0 dBc

Power: 1 Watts
30.0 dBm

Highest Spur = -83.2 dBc

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation (dBc)
276.05	H	-84.7	-61.2	1.67	-0.47	-93.3
	V	-89.7	-65.7	1.67	-0.47	-97.8
414.075	H	-93.5	-56.5	2.17	-0.46	-89.1
	V	-92.7	-66.0	2.17	-0.46	-98.6
552.1	H	-86.8	-58.0	2.83	-0.49	-91.3
	V	-87.2	-49.8	2.83	-0.49	-83.2
690.125	H	-98.0	-60.0	3.17	-0.51	-93.7
	V	-102.3	-69.6	3.17	-0.51	-103.3
828.15	H	-105.7	-69.0	3.50	-0.47	-103.0
	V	-108.0	-69.7	3.50	-0.47	-103.6
966.175	H	-108.3	-70.1	3.67	-0.54	-104.3
	V	-110.0	-66.3	3.67	-0.54	-100.5
1104.2	H	-110.2	-75.7	4.00	2.15	-107.5
	V	-110.7	-72.0	4.00	2.15	-103.9
1242.225	H	-105.0	-67.3	4.17	2.15	-99.3
	V	-107.3	-71.1	4.17	2.15	-103.1
1380.25	H	-109.7	-71.7	4.83	2.15	-104.4
	V	-109.7	-71.3	4.83	2.15	-104.0

Integra
TR

Frequency: 150.1 MHz Spec = -57.0 dBc
 Highest
 Power: 5 Watts Spur = -64.6 dBc
 37.0 dBm

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation dBc
300.2	H	-50.7	-25.7	1.50	-0.46	-64.6
	V	-59.7	-33.8	1.50	-0.46	-72.8
450.3	H	-76.5	-43.7	2.00	-0.53	-83.2
	V	-72.3	-43.3	2.00	-0.53	-82.8
600.4	H	-82.8	-53.3	2.50	-0.54	-93.4
	V	-88.7	-51.0	2.50	-0.54	-91.0
750.5	H	-91.5	-43.7	2.83	-0.50	-84.0
	V	-93.7	-60.7	2.83	-0.50	-101.0
900.6	H	-106.8	-72.8	3.33	-0.51	-113.6
	V	-108.3	-64.6	3.33	-0.51	-105.5
1050.7	H	-104.0	-67.5	3.83	2.55	-105.7
	V	-107.3	-71.8	3.83	2.55	-110.0
1200.8	H	-98.5	-63.3	4.17	4.73	-99.7
	V	-100.3	-64.3	4.17	4.73	-100.7
1350.9	H	-103.5	-64.3	4.83	4.73	-101.4
	V	-105.2	-68.5	4.83	4.73	-105.6
1501	H	-107.0	-70.8	4.83	4.03	-108.6
	V	-108.0	-70.5	4.83	4.03	-108.3

Frequency: 150.1 MHz Spec = -50.0 dBc
 Highest
 Power: 1 Watts Spur = -65.8 dBc
 30.0 dBm

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation (dBc)
300.2	H	-58.8	-33.8	1.50	-0.46	-65.8
	V	-65.7	-39.8	1.50	-0.46	-71.8
450.3	H	-78.0	-45.2	2.00	-0.53	-77.7
	V	-76.0	-47.0	2.00	-0.53	-79.5
600.4	H	-87.0	-57.5	2.50	-0.54	-90.5
	V	-94.2	-56.5	2.50	-0.54	-89.5
750.5	H	-100.7	-52.9	2.83	-0.50	-86.2
	V	-104.0	-71.0	2.83	-0.50	-104.3
900.6	H	-108.3	-74.3	3.33	-0.51	-108.1
	V	-108.3	-64.6	3.33	-0.51	-98.5
1050.7	H	-110.3	-73.8	3.83	2.55	-105.1
	V	-109.3	-73.8	3.83	2.55	-105.1
1200.8	H	-104.0	-68.8	4.17	4.73	-98.2
	V	-105.0	-69.0	4.17	4.73	-98.4
1350.9	H	-108.8	-69.6	4.83	4.73	-99.7
	V	-107.0	-70.3	4.83	4.73	-100.4
1501	H	-109.7	-73.5	4.83	4.03	-104.3
	V	-108.7	-71.2	4.83	4.03	-102.0

Integra
TR

Frequency: 173.975 MHz Spec = -57.0 dBc
 Highest
 Power: 5 Watts Spur = -65.3 dBc
 37.0 dBm

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation dBc
347.95	H	-60.2	-29.5	2.00	-0.52	-69.0
	V	-57.3	-25.8	2.00	-0.52	-65.3
521.925	H	-81.5	-53.3	2.33	-0.50	-93.1
	V	-72.7	-39.8	2.33	-0.50	-79.7
695.9	H	-95.8	-57.0	2.67	-0.50	-97.2
	V	-94.8	-62.3	2.67	-0.50	-102.5
869.875	H	-81.8	-47.5	3.00	-0.46	-87.9
	V	-75.5	-32.0	3.00	-0.46	-72.4
1043.85	H	-109.2	-72.7	3.50	2.55	-110.6
	V	-107.5	-72.3	3.50	2.55	-110.2
1217.825	H	-108.3	-71.9	3.83	4.73	-108.0
	V	-107.5	-71.5	3.83	4.73	-107.6
1391.8	H	-108.3	-70.4	4.17	4.73	-106.9
	V	-107.5	-68.5	4.17	4.73	-104.9
1565.775	H	-108.3	-69.8	4.33	4.03	-107.1
	V	-107.5	-70.3	4.33	4.03	-107.6
1739.75	H	-108.3	-69.4	5.00	3.09	-108.3
	V	-107.5	-60.5	5.00	3.09	-99.4

Frequency: 173.975 MHz

Spec = -50.0 dBc

Power: 1 Watts
30.0 dBmHighest
Spur = -57.5 dBc

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation dBc
347.95	H	-61.8	-31.2	2.00	-0.52	-63.7
	V	-56.5	-25.0	2.00	-0.52	-57.5
521.925	H	-81.7	-53.5	2.33	-0.50	-86.3
	V	-79.0	-46.2	2.33	-0.50	-79.0
695.9	H	-96.0	-57.2	2.67	-0.50	-90.3
	V	-99.5	-67.0	2.67	-0.50	-100.2
869.875	H	-80.3	-46.0	3.00	-0.46	-79.5
	V	-78.0	-34.5	3.00	-0.46	-68.0
1043.85	H	-108.3	-71.8	3.50	2.55	-102.7
	V	-107.5	-72.3	3.50	2.55	-103.3
1217.825	H	-108.3	-71.9	3.83	4.73	-101.0
	V	-107.5	-71.5	3.83	4.73	-100.6
1391.8	H	-108.3	-70.4	4.17	4.73	-99.9
	V	-107.5	-68.5	4.17	4.73	-97.9
1565.775	H	-108.3	-69.8	4.33	4.03	-100.1
	V	-107.5	-70.3	4.33	4.03	-100.6
1739.75	H	-108.3	-69.4	5.00	3.09	-101.3
	V	-107.5	-60.5	5.00	3.09	-92.4

Equipment Calibration Information

Equipment	Serial Number	Cal Date	Cal Due
HP 8563E Spectrum Analyzer	3221A00149	4/15/2010	4/15/2012
Agilent E8257D Signal Generator	MY44320507	4/20/2010	4/20/2012
HP 8901A Modulation Analyzer	2950A05551	4/12/2010	4/12/2012
HP 437B Power Meter	3125U13882	4/12/2010	4/12/2012

Instruments have been calibrated using standards with accuracies traceable to NIST standards.