



MT-404007

3.3-3.8 GHz 17dBi Base Station Antenna



Specifications

Specifications		MT – 404007		
ELECTRICAL				
FREQUENCY RANGE		3.3 – 3.8GHz		
GAIN		17 dBi ± 0.5dBi (min) @ 3.4-3.7GHz		
		16.5 dBi (min) @ 3.3-3.4GHz & 3.7-3.8GHz		
VSWR		1.5:1 (typ) 1.7 : 1 (max)		
AZIMUTH BEAMWIDTH @ 13dBi (3.3-3.7GHz)		60° ± 4°		
AZIMUTH BEAMWIDTH @ 12dBi (3.7-3.8GHz)		60° ± 4°		
POLARIZATION		Linear Vertical		
ELEVATION BEAMWIDTH		10° (typ)		
SIDELOBES LEVEL – AZ		ETSI EN 302 085 V1.1.2 CS3		
EL		ETSI EN 302 085 V1.1.2 CS3 @ 3.3-3.7GHz		
CROSS POLARIZATION		ETSI EN 302 085 V1.1.2 CS3		
		-20dB (max)		
F/B RATIO		-25 dB (max)		
INPUT IMPEDANCE		50 (ohm)		
INPUT POWER		6W (max)		
LIGHTNING PROTECTION		DC Grounded		
MECHANICAL				
DIMENSIONS (LxWxD)		500x200X30mm (max)		
WEIGHT		1.5 Kg (max)		
CONNECTOR		N-Type Female		
RADOME		Plastic		
BASE PLATE		Aluminum with chemical conversion coating		
OUTLINE DRAWING		See page 2		
MOUNTING KIT		MT-120019		
ENVIRONMENTAL				
TEST	STANDARD	DURATION	TEMPERATURE	NOTES
LOW TEMPERATURE	IEC 68-2-1	72 h	-45°C	-
HIGH TEMPERATURE	IEC 68-2-2	72 h	+70°C	-
TEMP. CYCLING	IEC 68-2-14	1 h	-45°C +70°C	3 Cycles
VIBRATION	IEC 60721-3-4	30 min/axis	-	Random4M3
SHOCK MECHANICAL	IEC 60721-3-4	-	-	4M3
HUMIDITY	ETSI EN300-2-4 T4.1E	144 h	-	95%
WATER TIGHTNESS	IEC 529	-	-	IP67
SOLAR RADIATION	ASTM G53	1000 h	-	-
FLAMMABILITY	UL 94	-	-	Class HB
SALT SPRAY	IEC 68-2-11 Ka	500 h	-	-
ICE AND SNOW	-	-	-	25mm Radial
WIND SPEED	SURVIVAL	-	-	220 Km/h
	OPERATION	-	-	160 Km/h


MT-404007

3.3-3.8 GHz 17dBi Base Station Antenna


Azimuth Radiation Pattern
Midband Freq. 3.6GHz



Elevation Radiation Pattern
Midband Freq. 3.6GHz

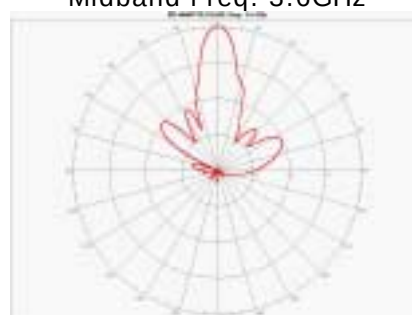

Dimensions [mm]

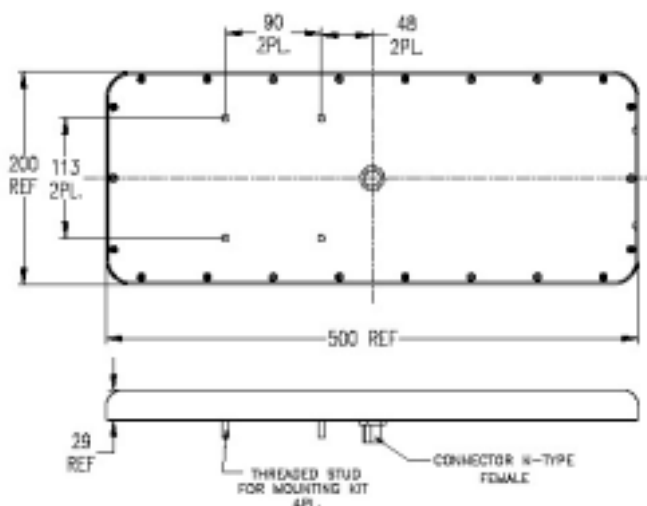

Existing Antenna Versions

MT-404007	With N – Type Female connector & DC grounding
-----------	---

MTI group is certified according to ISO 9001 and ISO 14001.

WAIVER!

While the information contained in this document has been carefully compiled to the best of our present knowledge, it is not intended as presentation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.

MTI Wireless Edge Ltd.

11 Hamelacha St.
Afek Industrial Park
Rosh Ha'ayin 48091,
Israel
Tel: +972-3-902-5050
Fax: +972-3-902-5051
www.mtiwe.com