



Radar Development and Testing on Government Contract

RE: Antenna Registration Q4: Directional Antenna Information, Exhibit

File Number: 0971-EX-CN-2018

Confirmation Number: EL392490

Date: December 4, 2018

Experiment Overview

Systems & Technology Research (STR) is leading efforts on the DARPA radar development project called "Radar Net." We are supporting a Phase 2 development effort.

This phase will involve performance testing of our radar system. A maximum of two aircraft will be outfitted with systems and simultaneously operating in the same region with identical radar equipment. Both systems will employ identically constructed phased array antennas. Refer to file number 0935-EX-CN-2018 for more information on the radar systems.

To support this effort, we require multi-node data communications between two aircraft and two ground-based nodes. The aircraft will contain the radar systems, and telemetry and position data will be shared between the systems and the ground nodes using MANET data radios made by Trellisware, Inc.

We are asking for a 10 MHz (minimum) bandwidth in the 2300 – 2400 MHz band, and an additional 10 MHz bandwidth in the 2400 – 2500 MHz band. This is to support testing in the expected higher background noise regime of the 2400-2500 MHz ISM, as well as the lower expected background noise between 2300 – 2400 MHz.

The preferred bandwidth to be assigned is 20 MHz, however a 10 MHz wide assignment is acceptable if necessary for deconfliction.

Any assigned band(s) can vary between the specific geographic regions being requested (i.e. they do not all have to be the same for MA, TX, MI, and FL), as the radios are tunable.

This effort will be expected to begin in January, 2019, and extend for up to 24 months or contract end. The primary area of operation will be in the Boston, MA region, with occasional operations in the other areas.

For all computations we consider the highest desired bandwidth and ERP of the systems.

Antenna Parameters:

We are asking to use several systems, each outfitted with antennas.

The two airborne systems will be outfitted with vertical polarized omni-directional azimuthal antennas. These are Haigh-Farr 6130-6 blade antennas, rated between 2.20 – 2.50 GHz. The antenna will be mounted to the bottom of the aircraft. The gains are approximately 0dBi in azimuth, and between -5 dBi and +5 dBi for elevations between the horizon and the ground, with a peak of +5 dBi at a 20° depression angle between the horizon and ground. The datasheet with the corresponding antenna patterns for this antenna is attached.

There will be a ground-based receiver/transmitter outfitted with a sectoral antenna. This is to enable high data rate data communications between the airborne platforms that are between 10 - 40 km away from this antenna. The antenna selected is a Laird SA24-120-16-WB. It has a 120° azimuth and 9° elevation 3 dB beamwidth. It will be mounted to a temporary tripod/mast, of up to 6m (18 ft) in height, the objective being to get above any treeline obstructions and maintain line of sight to the aircraft. The boresight elevation angle from the horizon will be manually raised between 6.5° - 11.5° to support an aircraft flight envelope between 2.0° and 15.3° during testing. Any use near proximity to airports will comply with FAA and local airport regulations for proximity (and therefore height) to their facility.

Additionally, a second ground-based antenna will be utilized. It will use a vertically polarized, 360° omnidirectional azimuth whip halfwave dipole antenna, Trellisware TW-1161, with a 1 dBi maximum gain, between 675– 2600 MHz. The vertical beamwidth is 70° - 90° depending on frequency. It will be mounted to a temporary tripod/mast, of up to 6m (18 ft) in height, the objective being to get above any treeline obstructions and maintain line of sight to the other ground node. The data for this antenna is attached in the Trellisware 1494 appendix, page 11.

Connected to each antenna is a MANET data radio made by Trellisware, model TW-950. These are tunable radios, with a maximum transmit power of 2W. The modulation waveform is a CPM waveform. The Trellisware 1494 for this system is attached.

Power Parameters:

The MANET radio's peak transmit power is 2 Watts.

For the airborne antenna, the maximum transmit gain is 5 dB, therefore the peak ERP is $2 * 3.16 = 6.3W$.

For the ground based node with sectoral antenna, the maximum transmit gain is 16 dB, or a factor of 39.8, therefore the peak ERP is $2 * 39.8 = 79.6 W$.


For the ground based node with halfwave dipole antenna, the maximum transmit gain is 1 dB, or a factor of 1.26, therefore the peak ERP is $2 * 1.26 = 2.5 W$.

Operations / Flight Routes:

Flights are currently planned for the Boston, MA area primarily near Lawrence, MA (KWLM) but at times extending south to operations near Cape Cod CGAS (KFMH) and north to Portsmouth Intl (KPSM). These locations will be where a majority of the flight operations will occur, not continuously, but rather as discrete test events during the execution of the contract.

Additionally, other flight operations near and surrounding North Texas Regional Airport (KGYI), Ann Arbor, MI and Ypsilanti (KYIP) and Hunstville, AL will be conducted.

A nominal flight altitude of 8500 ft MSL is planned, but could vary from 4500 ft to 9,000 ft MSL depending on weather conditions and VMC minimum requirements.

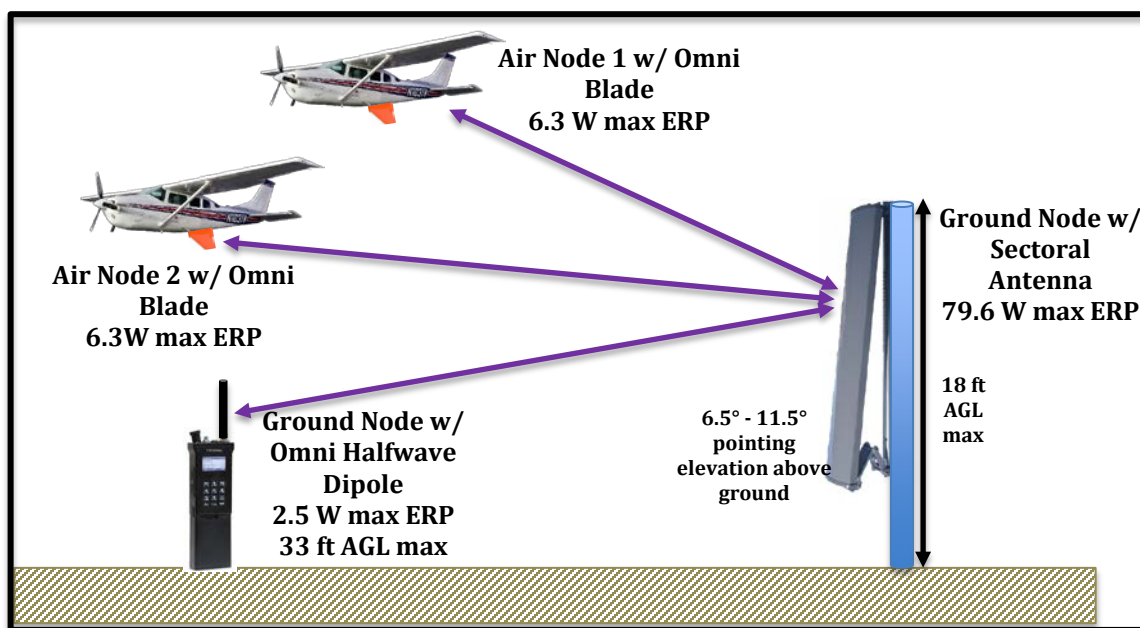



BLADE ANTENNAS

The Haigh-Farr family of rugged Blade antennas is available in frequencies ranging from UHF to upper C-band, and may be provided in either straight or rounded blade configurations.

These blade antennas exhibit quasi-uniform null-free hemispherical patterns.

These antennas have demonstrated proven reliability in over 30 years of high-performance airborne applications.

Blade antennas are also used extensively in ground-based vehicles such as race cars, trucks, tanks, and motorcycles, to name a few.



FEATURES:

- **Hemispherical Coverage** (see patterns on next pages)
- **Frequencies from UHF to C-Band**
- **Small, Compact Footprint**
- **Aerodynamic Design**
- **Common Footprint for All Models**
- **Built to Withstand Extreme Shock & Vibration Environments**

APPLICATIONS:

- **Data Links, Telemetry, Transponder**
- **Aircraft**
- **UAVs**
- **Helicopters**
- **Tactical Missiles**
- **Ships**
- **Ground-Based Vehicles**
- **Single or Array Implementations with Matching Power Dividers and Cables**

DESIGN CAPABILITY:

Haigh-Farr has more than 50 years history of designing and producing exceptionally rugged, high-performance antennas. If you don't find an antenna meeting your requirements in our standard list of products, Haigh-Farr has the experience and modeling capability to customize a solution. Adaptations of existing designs can be done with very short lead times. Contact Haigh-Farr for a review of your antenna requirements.

Rev 1 01/18 approved for release



BLADE ANTENNAS

Round Blade P/N	Straight Blade P/N	Frequency Range GHz	VSWR MAX/TYPICAL	5KW ¹ ALTITUDE	PEAK ² POWER	Height Inches [mm]	Weight (SMA) OZ [grams]
6107	6007	1.060 ± .030	2.0:1/1.50:1	116	160 W	2.30 [58.4]	1.0 [28.3]
6108	6008	0.9165 ± .025	2.0:1/1.50:1	116	160 W	2.30 [58.4]	1.0 [28.3]
6109	6009	1.35 – 1.54	2.0:1/1.50:1	116	160 W	1.75 [44.3]	0.9 [26]
6110	6010	1.43 – 1.54	1.5:1/1.25:1	116	160 W	1.68 [42.7]	0.8 [23]
6110-2	6010-2	1.425 – 1.525	1.5:1/1.25:1	116	160 W	1.68 [42.7]	0.8 [23]
6110-3	6010-3	1.45 – 1.65	2.0:1/1.50:1	116	160 W	1.68 [42.7]	0.8 [23]
6110-4	6010-4	1.50 – 1.80	2.0:1/1.50:1	116	160 W	1.68 [42.7]	0.8 [23]
6115	6015	1.60 – 1.70	1.5:1/1.25:1	116	160 W	1.54 [39.1]	0.8 [23]
6120	6020	1.71 – 1.85	1.5:1/1.25:1	114	240 W	1.45 [36.8]	0.8 [23]
6125	6025	2.00 – 2.10	1.5:1/1.25:1	110	350 W	1.19 [30.2]	0.7 [20]
6125-1	6025-1	2.00 – 2.30	2.0:1/1.50:1	110	350 W	1.19 [30.2]	0.7 [20]
6130	6030	2.20 – 2.30	1.5:1/1.25:1	110	350 W	1.19 [30.2]	0.7 [20]
6130-1	6030-1	2.30 – 2.40	1.5:1/1.25:1	110	350 W	1.19 [30.2]	0.7 [20]
6130-2	6030-2	2.40 – 2.50	1.5:1/1.25:1	110	350 W	1.19 [30.2]	0.7 [20]
6130-3	6030-3	2.20 – 2.40	1.5:1/1.25:1	110	350 W	1.19 [30.2]	0.7 [20]
6130-4	6030-4	2.30 – 2.50	1.5:1/1.25:1	110	350 W	1.19 [30.2]	0.7 [20]
6130-6	6030-6	2.20 – 2.50	1.75:1/1.50:1	110	350 W	1.19 [30.2]	0.7 [20]
6135-1	6035-1	3.10 – 3.30	1.5:1/1.25:1	106	350 W	1.19 [30.2]	0.7 [20]
6135-2	6035-2	3.45 – 3.55	1.5:1/1.25:1	106	350 W	1.19 [30.2]	0.7 [20]
6135-3	6035-3	3.65 – 3.85	1.5:1/1.25:1	106	350 W	1.19 [30.2]	0.7 [20]
6140	6040	4.50 – 5.00	1.5:1/1.25:1	104	1.5 kW	0.90 [22.9]	0.6 [17]
6140-1	6040-1	4.40 – 5.50	1.5:1/1.25:1	104	1.5 kW	0.90 [22.9]	0.6 [17]
6150	6050	5.40 – 5.90	1.5:1/1.25:1	102	2.2 kW	0.75 [19.1]	0.6 [17]
6150-1	6050-1	5.25 – 5.85	1.5:1/1.25:1	102	2.2 kW	0.75 [19.1]	0.6 [17]
6150-2	6050-2	6.40 – 6.60	1.5:1/1.25:1	102	2.2 kW	0.75 [19.1]	0.6 [17]
6150-3	6050-3	6.40 – 7.20	1.5:1/1.25:1	102	2.2 kW	0.75 [19.1]	0.6 [17]

- Thermal environments: -50°C to 150°C; 300°C Transient
- Polarization: Linear, predominately vertical
- Connector: SMA (50 Ω Standard; TNC (50 Ω Optional)
- Required Mounting Screws: 82° Flathead #4 Standard; 100° Flathead #4 or M3 optional
- UHF models are available in different configurations
- Mechanical outline drawings are available upon request

¹ The 5kW altitude (k ft) is the approximate altitude at which the antenna will experience external corona with 5kW peak power.


² Peak power indicates the maximum power that may be radiated without experiencing external corona at any altitude. Sufficient airflow is required at the higher power levels. These antennas handle average power in the 25-30W CW range but sufficient airflow is required at these higher power levels for the antennas to perform properly. A static ground test will not provide the adequate airflow required. Haigh-Farr offers both a 60XX and 61XX High Power version of all the above listed blades. These are manufactured with Ultem material and have been tested at 100W CW at 70°C for 60 minutes without any issues.

Note: Haigh-Farr Rounded Blades (61XX) are identical in performance to our Straight Blades (60XX). We recommend the use of Round Blades for applications where safety concerns exist.


Rev 1 01/18 approved for release



BLADE ANTENNAS

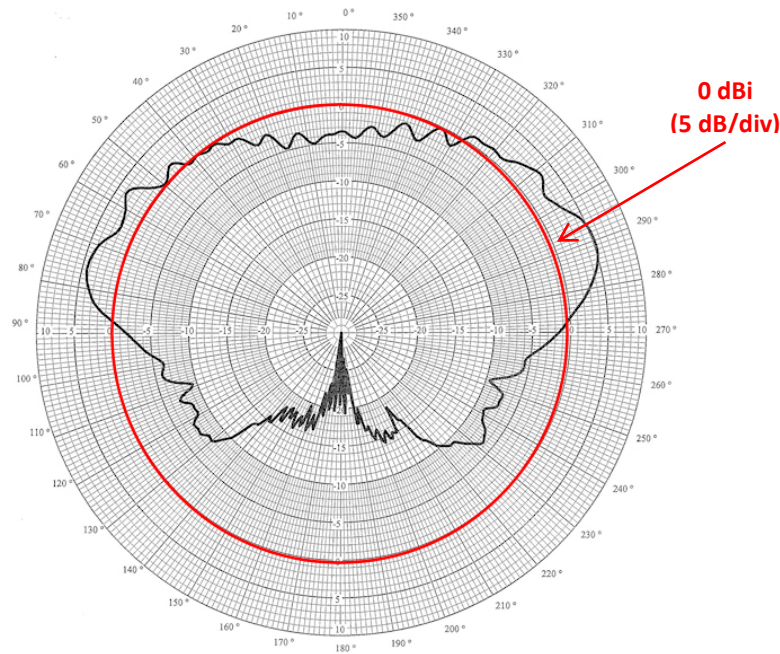

ELEVATION (PITCH)
2.25 GHz

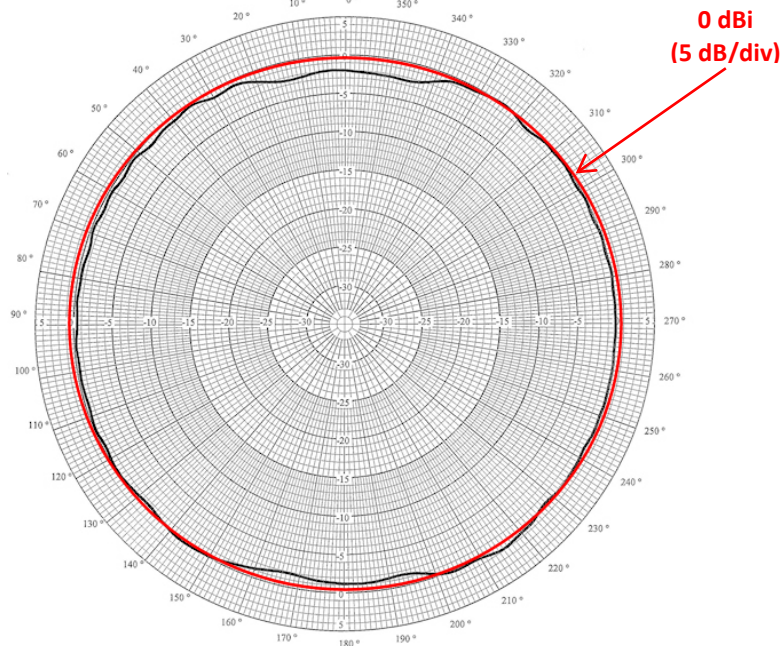

AZIMUTH (YAW)
2.25 GHz

Note: The patterns shown above were measured with model 6130 on a cylindrical ground plane but are typical of the other Blades used. Fins and other protrusions on the vehicle will perturb the radiation pattern. The extent of any perturbations cannot be fully determined until radiation patterns are either calculated or measured on a model of the vehicle. Haigh-Farr offers engineering services, which include the calculation of radiation patterns on a specific vehicle.

Rev 1 01/18 approved for release



2300-2700 MHZ VERTICALLY POLARIZED BASE STATION SECTOR ANTENNA

The 60deg, 90deg and 120deg vertically polarized base station sector antenna systems offered by Laird Technologies are constructed of UV stable fiber glass radomes. The 45deg sector has a UV Stable ASA plastic radome. The radome construction gives long service life under the most demanding conditions. The antennas are constructed using corrosion resistant metal elements and a unique air dielectric system which are more stable than PCB based antenna systems because they don't absorb moisture, which can degrade the performance of PCB based antenna systems. The sectors come with a stainless steel scissor bracket mounting system for ease of installation and alignment.

FEATURES

- Vertically polarized wide band performance
- 45, 60, 90, and 120 deg models with gains from 16dBi to 20dBi
- Type N female integrated connector
- Extremely rugged for long service life in extreme environments
- Weatherproof

MARKETS

- WiMAX applications
- Base station antennas
- 802.11b and 802.11g wireless systems
- Point to multi-point systems
- Broadband wireless access
- MMDS applications


PARAMETER	SA24-45-20-WB	SA24-60-17-WB	SA24-90-17-WB	SA24-120-16-WB
Frequency range	2300 - 2700 MHz	2300 - 2700 MHz	2300 - 2700 MHz	2300 - 2700 MHz
VSWR	1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm
Input power	50W	50W	50W	50W
Pole diameter (OD)	1" - 2" (25-50mm)	1" - 2" (25-50mm)	1" - 2" (25-50mm)	1" - 2" (25-50mm)
Temperature	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C
Gain	20 dBi	17 dBi	17 dBi	16 dBi
Horizontal beamwidth	45°	60°	90°	120°
Vertical beamwidth	7°	8°	7°	9°
Front-to-back	25 dB	25 dB	20 dB	21 dB
Mechanical downtilt	30°	30°	30°	30°
Weight	8.4 lbs (3.8 kg)	6.6 lbs (3 kg)	6.6 lbs (3 kg)	6.6 lbs (3 kg)
Dimensions (L x W x H)	34" x 7" x 3.5" (864 x 178 x 89mm)	33.5" x 6.5" x 2.5" (851 x 165 x 64mm)	33.5" x 6.5" x 2.5" (851 x 165 x 64mm)	33.5" x 6.5" x 2.5" (851 x 165 x 64mm)

WIND LOADING


MODEL	SQ. IN	100 MPH	125 MPH	100 MPH 1/2" RADIAL ICE
SA24 WB	247	61.8 lb	96.5 lb	62 lb

SYSTEM ORDERING

SA24-45-20-WB	45deg	20dBi	2300-2700MHz	VPOL sector antenna
SA24-60-17-WB	60deg	17dBi	2300-2700MHz	VPOL sector antenna
SA24-90-17-WB	90deg	17dBi	2300-2700MHz	VPOL sector antenna
SA24-120-16-WB	120deg	16dBi	2300-2700MHz	VPOL sector antenna



Typical azimuth and elevation pattern
SA24-90-17-WB



ANT-DS-SA24WB 0716

Any information furnished by Laird and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2016 Laird. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.