

FCC Radio Test Report

FCC ID: O57C640A13

Project No. : 2007T046
Equipment : Notebook Computer
Brand Name : Lenovo
Test Model : YOGA 6 13ARE05
Series Model : YOGA 6 13ARE05***** (*=0~9, A~Z, “_” OR BLANK)
Applicant : Lenovo (Shanghai) Electronics Technology Co., Ltd.
Address : Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai)
Pilot Free Trade Zone
Manufacturer : Lenovo PC HK Limited
Address : 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong
Kong, P.R.China
Date of Receipt : Jul. 16, 2020
Date of Test : Jul. 16, 2020 ~ Aug. 13, 2020
Issued Date : 2020/9/7
Report Version : R01
Test Sample : Engineering Sample No.: DG20200660175 for conducted,
DG20200660178 for radiated.
Standard(s) : FCC Part15, Subpart E(15.407)
ANSI C63.10-2013
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Welly Zhou



Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 TEST MODES	11
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4 SUPPORT UNITS	12
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	13
3.1 LIMIT	13
3.2 TEST PROCEDURE	13
3.3 DEVIATION FROM TEST STANDARD	13
3.4 TEST SETUP	14
3.5 EUT OPERATION CONDITIONS	14
3.6 TEST RESULTS	14
4 . RADIATED EMISSIONS TEST	15
4.1 LIMIT	15
4.2 TEST PROCEDURE	16
4.3 DEVIATION FROM TEST STANDARD	16
4.4 TEST SETUP	17
4.5 EUT OPERATION CONDITIONS	19
4.6 TEST RESULTS - 30 MHz TO 1000 MHz	19
4.7 TEST RESULTS - ABOVE 1000 MHz	19
5 . MEASUREMENT INSTRUMENTS LIST	20
6 . EUT TEST PHOTOS	21
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	24
APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1 GHZ	29
APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ	32

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	2020/8/28
R01	Revise Typo.	2020/9/7

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C	PASS	-----

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) This is to request a Class II permissive change for FCC ID: O57C640A13.

This FCC ID: O57C640A13 is change ID based on Lenovo (Shanghai) Electronics Technology Co., Ltd., the original application information follow as FCC ID: O57-AX200NGW, approved on 01/07/2020 (which is change ID based on Intel Corporation, the original application information follow as model: AX200NGW, FCC ID: PD9AX200NG, approved on 03/05/2019)

Thus, only conducted emissions and radiated spurious emissions were evaluated and recorded in this report. For the test results of all other test items please refer to module test report as below table:

RF Module model	Report Number	Module Function
AX200NGW	181210-03.TR04	WLAN 2.4G
AX200NGW	181210-03.TR01 181210-03.TR02 181210-03.TR03	RLAN 5G Band 1~4
AX200NGW	181210-03.TR05	Bluetooth EDR
AX200NGW	181210-03.TR04	Bluetooth LE

(3) Based on the RF module the antennas for this Notebook Computer were updated as below table:

Antenna Information			
Antenna 1 (WLAN combo)	Manufacturer	AWAN	
	Antenna Type	Main: PIFA Antenna	Aux: PIFA Antenna
	Part number	AUF6Y-100025 (DC33002GC00)	AUF6Y-100026 (DC33002GC10)
	Peak gain	Main Antenna :	Aux Antenna :
		WLAN(2.4G):1.14dBi	WLAN(2.4G):-1.53dBi
		WLAN(5G B1-3):-1.73dBi WLAN(5G B4):-2.83dBi	WLAN(5G B1-3):-2.43dBi WLAN(5G B4):-1.54dBi

Antenna Information			
Antenna 2 (WLAN combo)	Manufacturer	luxshare-ict co. ltd	
	Antenna Type	Main: PIFA Antenna	Aux: PIFA Antenna
	Part number	L59AT001-CS-H (DC33002HB00)	L59AT002-CS-H (DC33002HB10)
	Peak gain	Main Antenna :	Aux Antenna :
		WLAN(2.4G):0.6dBi	WLAN(2.4G):-1.6dBi
		WLAN(5G B1-3):-1.2dBi WLAN(5G B4):-1.7dBi	WLAN(5G B1-3):-0.6dBi WLAN(5G B4):-1.8dBi

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.60

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	V	3.79
		9kHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.88
		30MHz ~ 200MHz	H	4.14
		200MHz ~ 1,000MHz	V	4.62
		200MHz ~ 1,000MHz	H	4.80
		1GHz ~ 6GHz	-	4.58
		6GHz ~ 18GHz	-	5.18
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24°C	57%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-30 MHz to 1GHz	22°C	61%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-Above 1000 MHz	22°C	61%	AC 120V/60Hz	Kwok Guo

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Notebook Computer
Brand Name	Lenovo
Test Model	YOGA 6 13ARE05
Series Model	YOGA 6 13ARE05***** (*=0~9, A~Z, " " OR BLANK)
Model Difference(s)	Please refer to note 5.
Hardware Version	LA-K211P
Software Version	19041.329
RF Module Model	AX200NGW
EUT Power Rating	20Vdc 3.25A
Power Adapter Power Rating	Input:100-240V~1.3A 50-60Hz Output:20Vdc 3.25A / 15Vdc 3A / 9Vdc 2A / 5Vdc 2A
Power Adapter	Chicony / ADLX45YCC3D
Operation Frequency Bands	UNII-1: 5150 MHz~5250 MHz UNII-2A: 5250 MHz~5350 MHz UNII-2C: 5470 MHz~5725 MHz UNII-3: 5725 MHz~5850 MHz
Modulation Type	OFDM
Bit Rate of Transmitter	Up to 866.7 Mbps
Maximum Output Power _UNII-1 (Reference module report)	IEEE 802.11ax (HEW20): 22.77 dBm (0.1892 W)
Maximum Output Power _UNII-2A (Reference module report)	IEEE 802.11n (HT20): 22.64 dBm (0.1837 W)
Maximum Output Power _UNII-2C (Reference module report)	IEEE 802.11n (HT40):: 23.22 dBm (0.2099 W)
Maximum Output Power _UNII-3 (Reference module report)	IEEE 802.11ax (HEW20): 23.15 dBm (0.2065 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

802.11ac (VHT160) 802.11ax (HEW160)	
Channel	Frequency (MHz)
50	5250
114	5570


2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	TX Mode_ IEEE 802.11ax (HEW160)	114	-
Transmitter Radiated Emissions (above 1GHz)	TX Mode_ IEEE 802.11a	36/48, 52/64	Bandedge
	TX Mode_ IEEE 802.11n (HT20) TX Mode_ IEEE 802.11ax (HEW20)	100/140, 149/165	
	TX Mode_ IEEE 802.11n (HT40) TX Mode_ IEEE 802.11ax (HEW40)	38/46, 54/62 102/134, 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HEW80)	42, 58 106/122, 155	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HEW160)	50 114	
	TX Mode_ IEEE 802.11a	36/40/48 52/60/64	Harmonic
	TX Mode_ IEEE 802.11n (HT20) TX Mode_ IEEE 802.11ax (HEW20)	100/116/140 149/157/165	
	TX Mode_ IEEE 802.11n (HT40) TX Mode_ IEEE 802.11ax (HEW40)	38/46/ 54/62 102/110/134 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HEW80)	42, 58 106/122, 155	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HEW160)	50 114	

NOTE:

- (1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.
- (2) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (3) All X, Y and Z axes are evaluated, but only the worst case (Z axis) is recorded.
- (4) There were no emissions found below 30 MHz within 20 dB of the limit.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

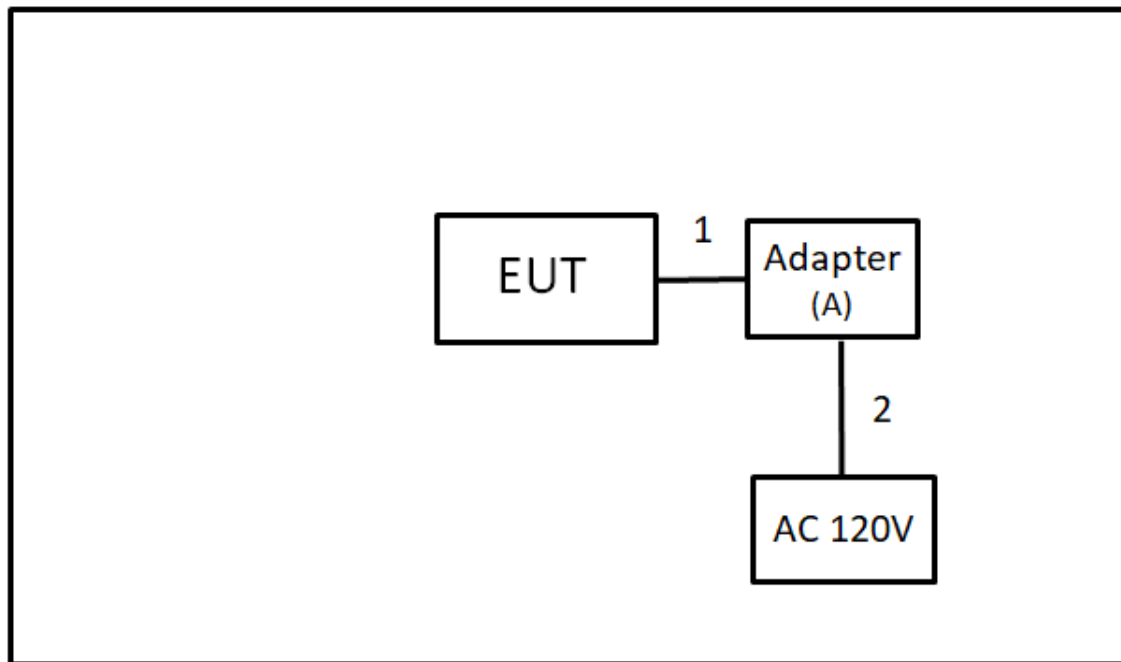

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Adapter	Lenove	ADLX45YAC3D	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Adapter Cable	NO	NO	1.8m
2	Power Cord	NO	NO	0.9m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

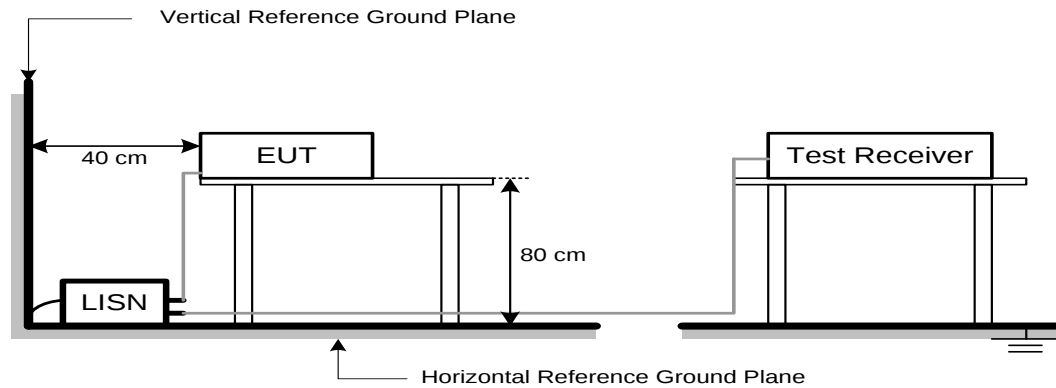

3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1.5m (dBμV/m)
5150-5250	-27	68.3	74.3 (Note 3)
5250-5350	-27	68.3	74.3 (Note 3)
5470-5725	-27	68.3	74.3 (Note 3)
5725-5850	-27 NOTE (2)	68.3	74.3 (Note 3)
	10 NOTE (2)	105.3	111.3(Note 3)
	15.6 NOTE (2)	110.9	116.9(Note 3)
	27 NOTE (2)	122.3	128.3(Note 3)

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$$20\log d_{\text{limit}}/d_{\text{measure}}=20\log 3/1.5=6 \text{ dB.}$$

4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD


No deviation

4.4 TEST SETUP


9 kHz to 30 MHz

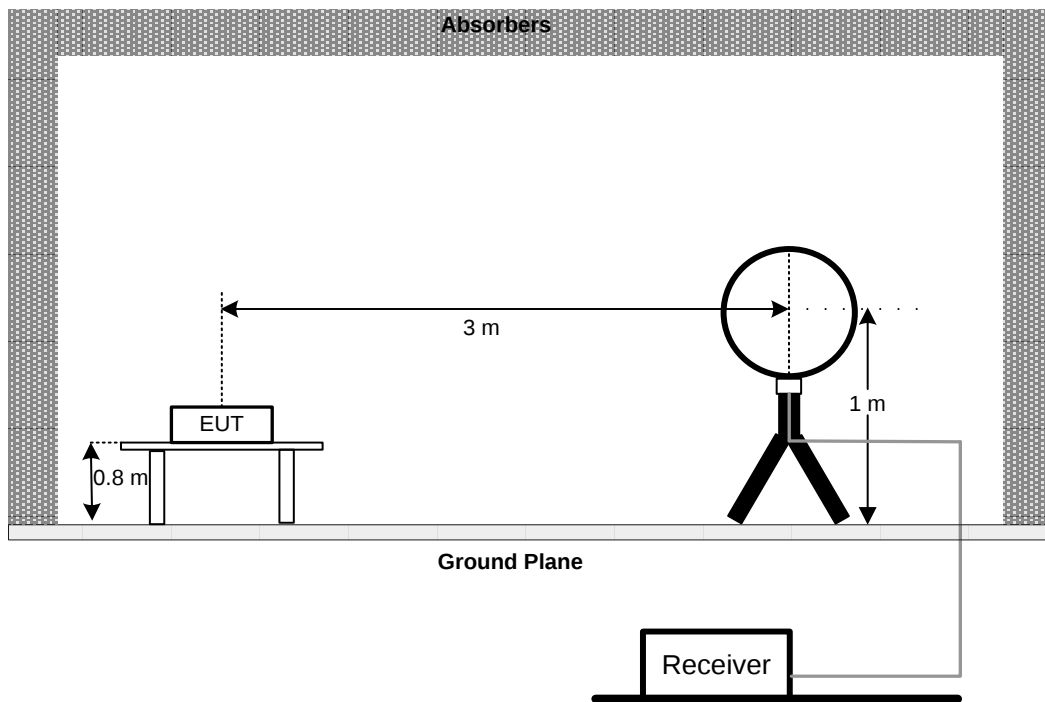


30 MHz to 1 GHz

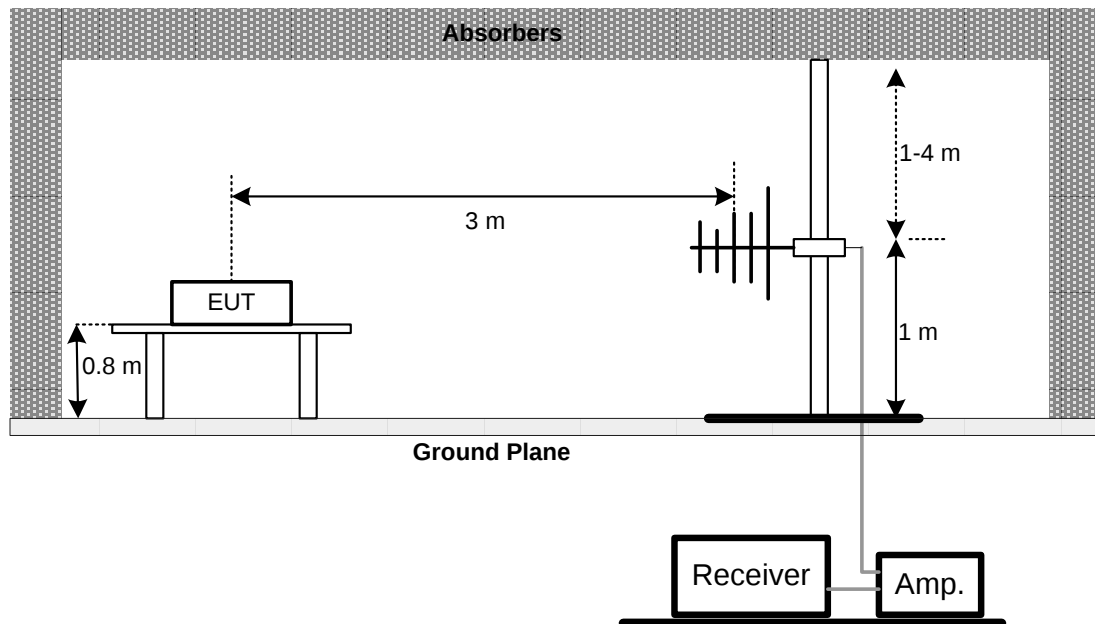


Above 1 GHz Band edge

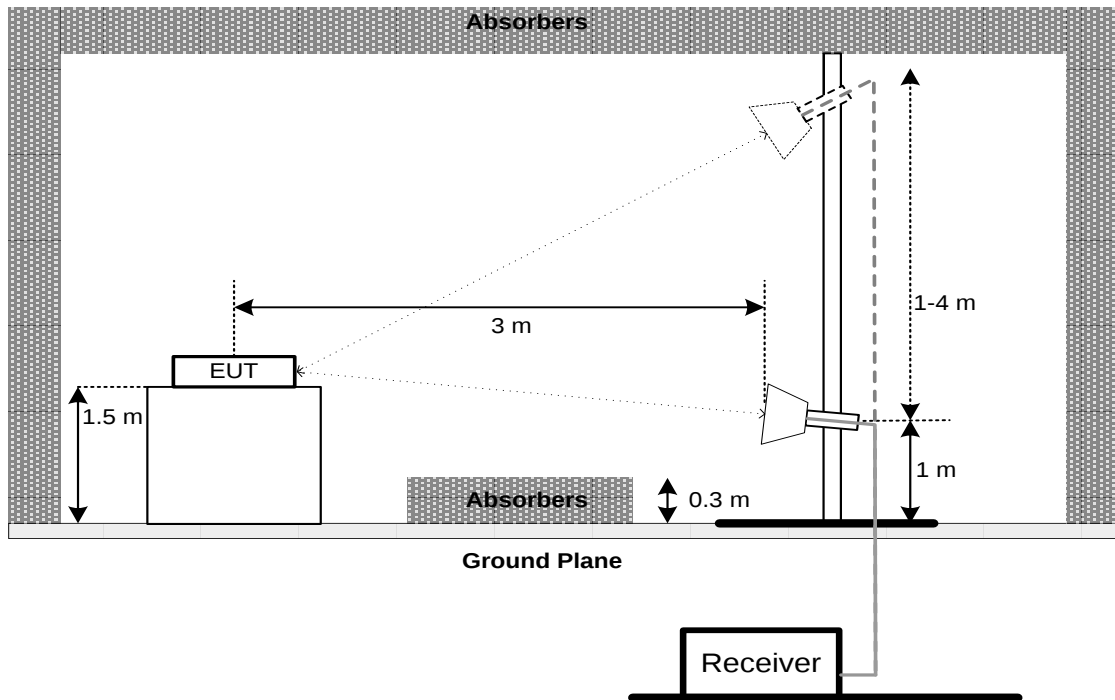

Harmonic (1 GHz to 18 GHz)

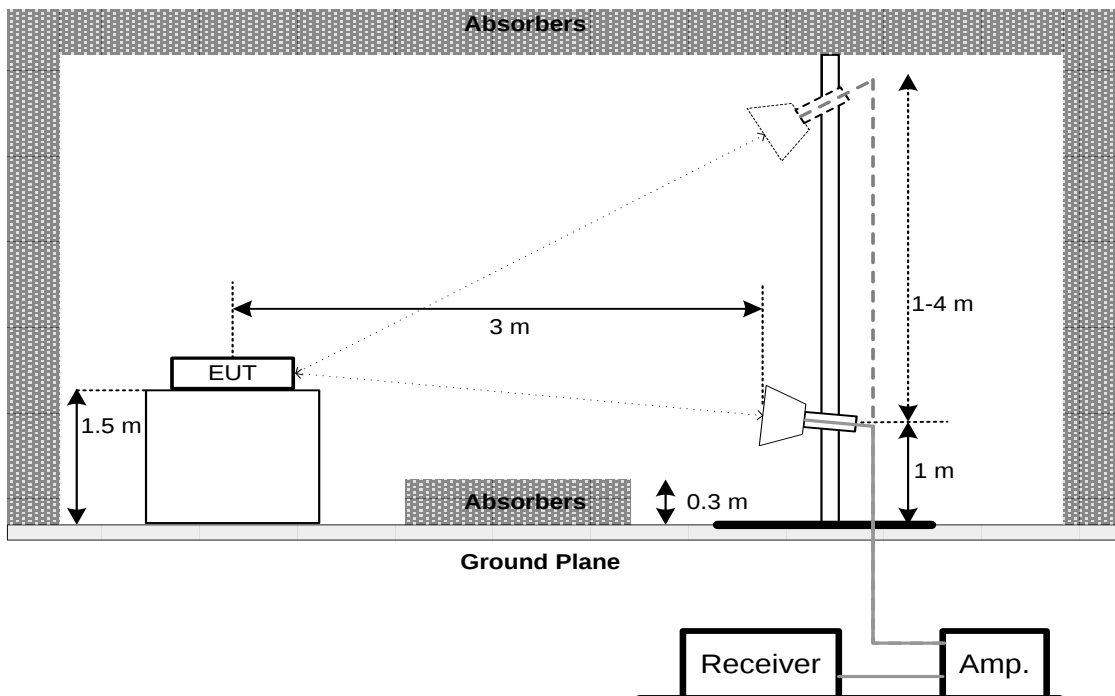

Harmonic (Above 18 GHz)

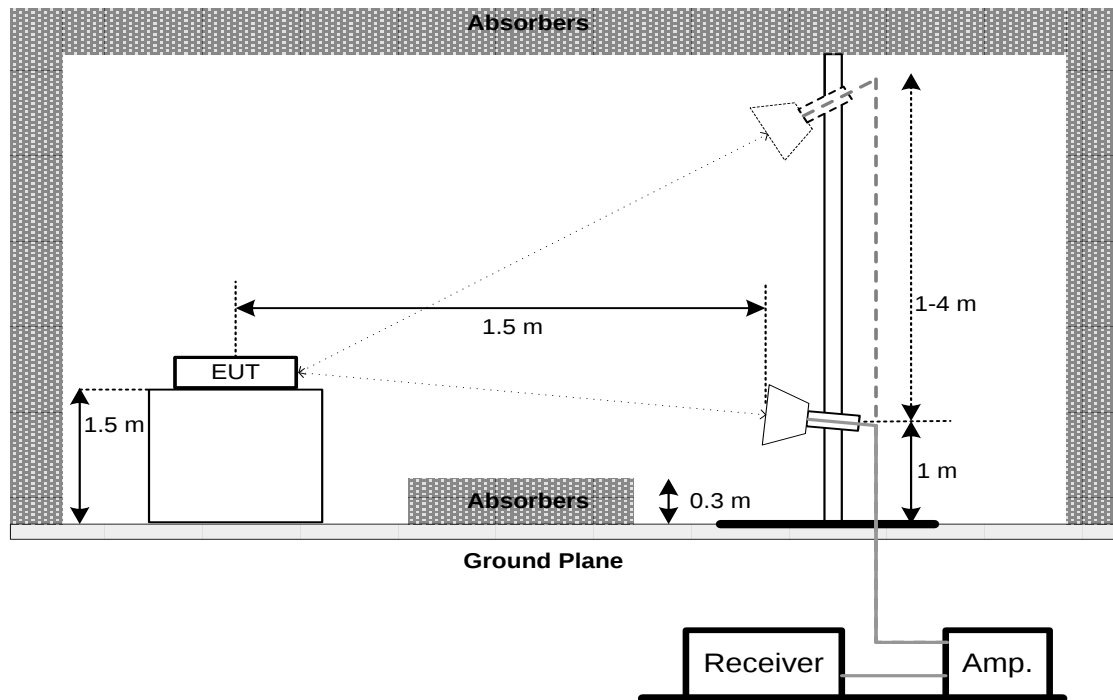

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX B.

4.7 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2021
2	LISN	EMCO	3816/2	52765	Mar. 01, 2021
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 28, 2021
4	50Ω Terminator	SHX	TF5-3	15041305	Mar. 01, 2021
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 10, 2021

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2021
2*	Amplifier	HP	8447D	2944A09673	Aug. 11, 2021
3	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 22, 2021
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 12, 2021
2	Amplifier	Agilent	8449B	3008A02333	Mar. 01, 2021
3	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 07, 2021
4	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Cable	N/A	EMC104-SM-SM-6000	N/A	May 09, 2021
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.


"*" calibration period of equipment list is three year.

Except * item, all calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode: Normal

Line

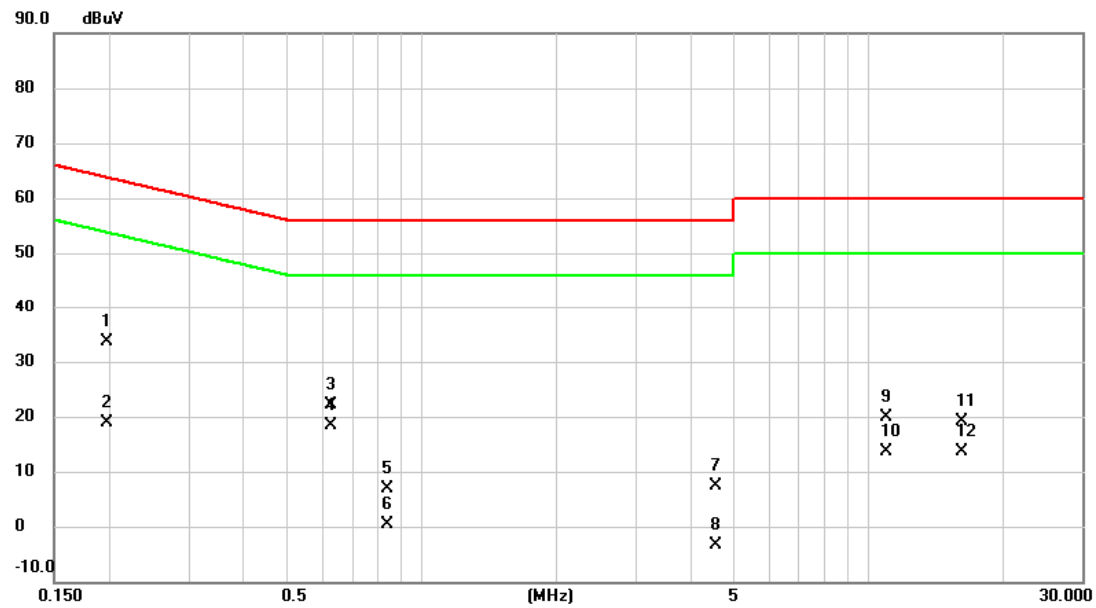


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: Normal

Neutral

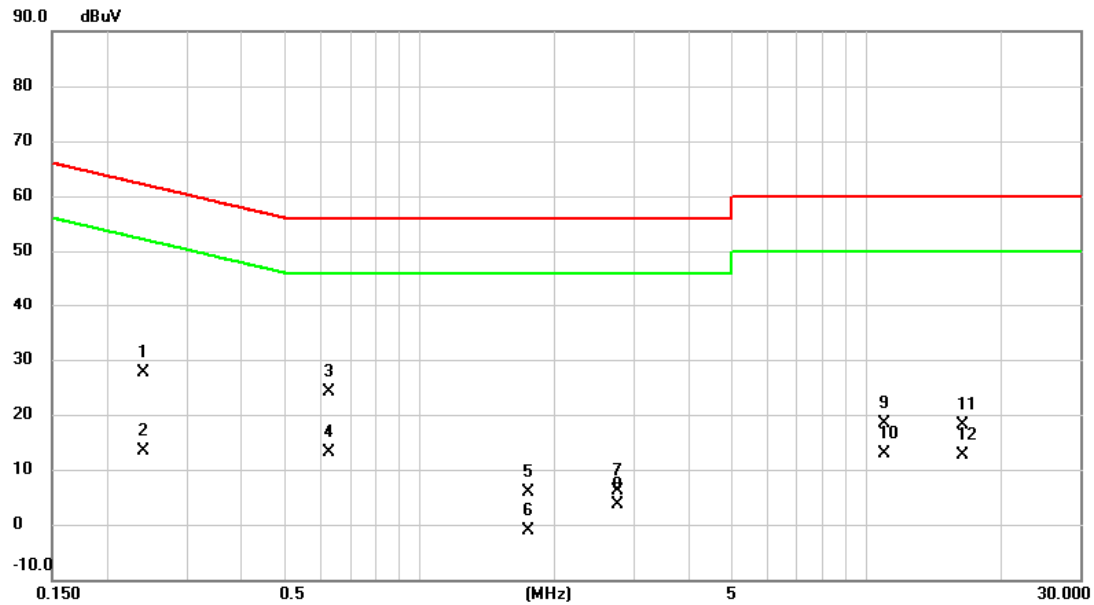


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2404	27.72	0.02	27.74	62.08	-34.34	QP	
2		0.2404	13.45	0.02	13.47	52.08	-38.61	AVG	
3	*	0.6270	24.11	0.03	24.14	56.00	-31.86	QP	
4		0.6270	13.19	0.03	13.22	46.00	-32.78	AVG	
5		1.7475	5.87	0.07	5.94	56.00	-50.06	QP	
6		1.7475	-1.15	0.07	-1.08	46.00	-47.08	AVG	
7		2.7735	6.12	0.09	6.21	56.00	-49.79	QP	
8		2.7735	3.45	0.09	3.54	46.00	-42.46	AVG	
9		10.9950	18.25	0.21	18.46	60.00	-41.54	QP	
10		10.9950	12.73	0.21	12.94	50.00	-37.06	AVG	
11		16.3770	17.90	0.22	18.12	60.00	-41.88	QP	
12		16.3770	12.32	0.22	12.54	50.00	-37.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: Idle

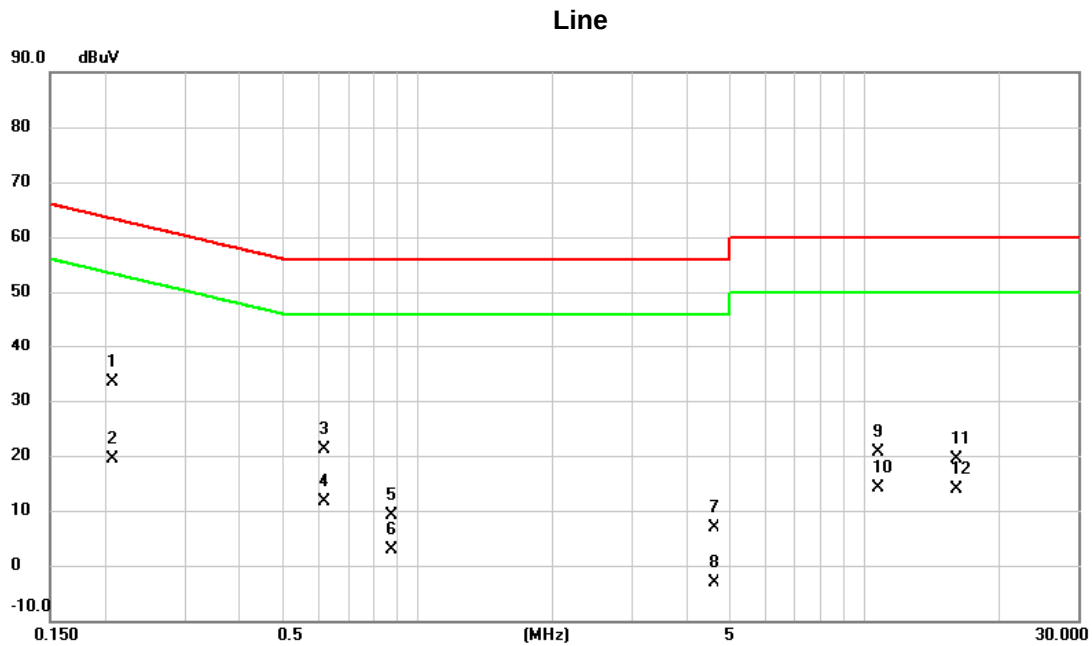


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.2063	33.29	0.01	33.30	63.35	-30.05	QP	
2		0.2063	19.31	0.01	19.32	53.35	-34.03	AVG	
3		0.6202	21.04	0.03	21.07	56.00	-34.93	QP	
4		0.6202	11.67	0.03	11.70	46.00	-34.30	AVG	
5		0.8745	9.20	0.04	9.24	56.00	-46.76	QP	
6		0.8745	2.82	0.04	2.86	46.00	-43.14	AVG	
7		4.5893	6.72	0.13	6.85	56.00	-49.15	QP	
8		4.5893	-3.36	0.13	-3.23	46.00	-49.23	AVG	
9		10.7273	20.39	0.21	20.60	60.00	-39.40	QP	
10		10.7273	13.99	0.21	14.20	50.00	-35.80	AVG	
11		16.0890	19.15	0.22	19.37	60.00	-40.63	QP	
12		16.0890	13.54	0.22	13.76	50.00	-36.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: Idle

Neutral

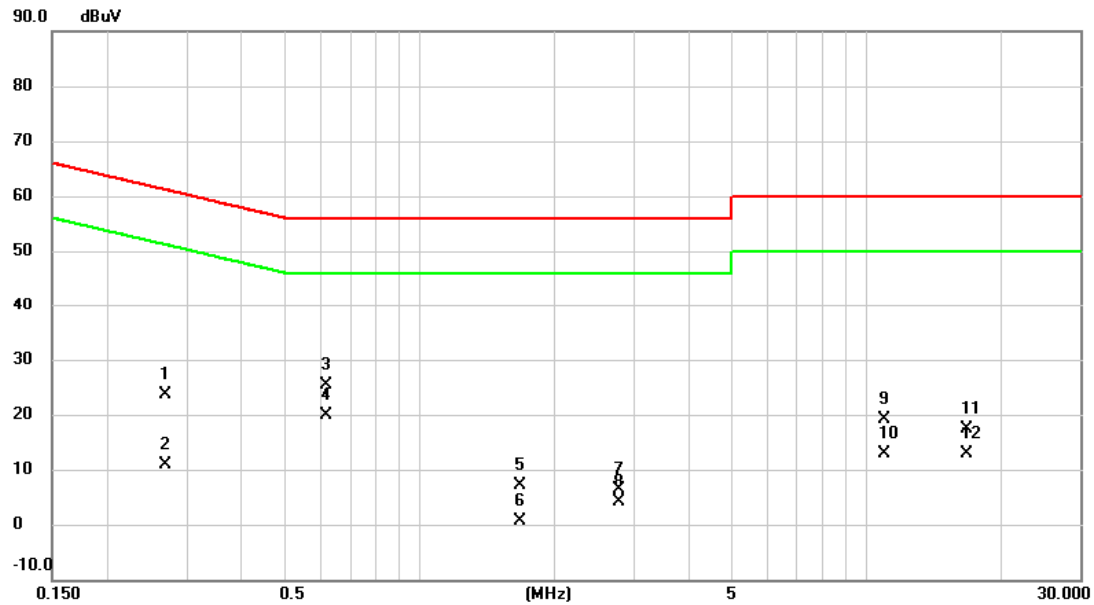

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2692	23.73	0.02	23.75	61.14	-37.39	QP	
2		0.2692	10.89	0.02	10.91	51.14	-40.23	AVG	
3		0.6180	25.24	0.03	25.27	56.00	-30.73	QP	
4	*	0.6180	19.89	0.03	19.92	46.00	-26.08	AVG	
5		1.6778	7.15	0.07	7.22	56.00	-48.78	QP	
6		1.6778	0.44	0.07	0.51	46.00	-45.49	AVG	
7		2.7758	6.21	0.09	6.30	56.00	-49.70	QP	
8		2.7758	4.10	0.09	4.19	46.00	-41.81	AVG	
9		10.9253	18.81	0.21	19.02	60.00	-40.98	QP	
10		10.9253	12.63	0.21	12.84	50.00	-37.16	AVG	
11		16.7843	17.19	0.22	17.41	60.00	-42.59	QP	
12		16.7843	12.73	0.22	12.95	50.00	-37.05	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1 GHZ

Test Mode: UNII-2C/ TX ax (HEW16) Mode 5570MHz

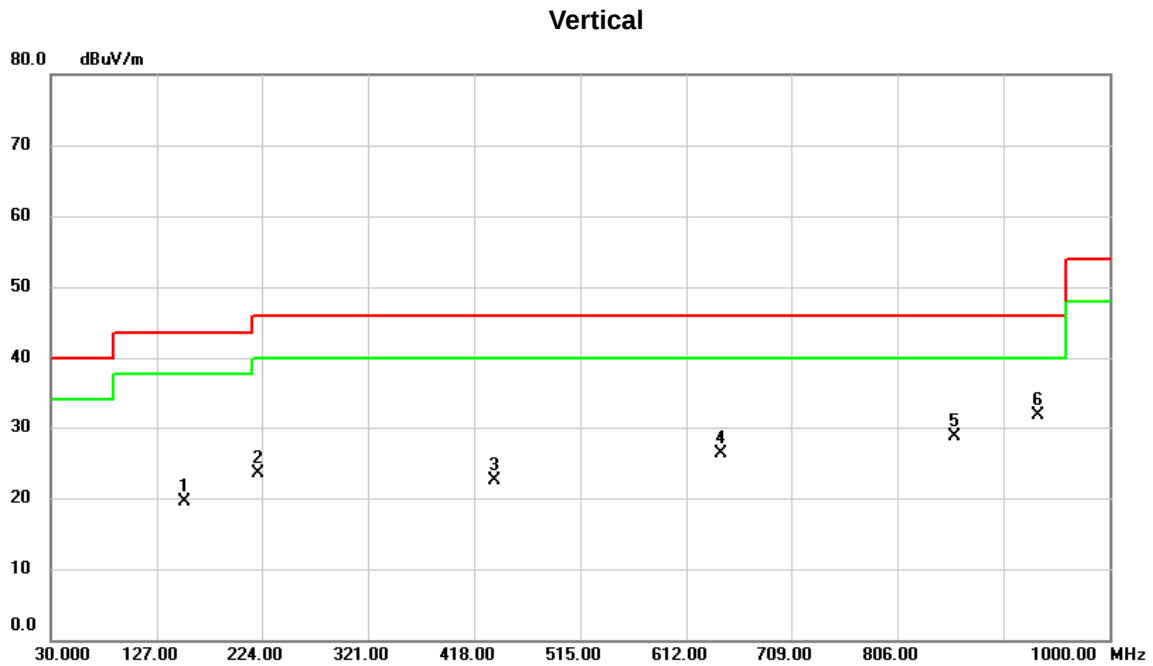


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		152.220	31.08	-11.67	19.41	43.50	-24.09	peak	
2		221.090	37.65	-14.20	23.45	46.00	-22.55	peak	
3		436.430	30.59	-8.00	22.59	46.00	-23.41	peak	
4		643.040	30.75	-4.43	26.32	46.00	-19.68	peak	
5		858.380	30.27	-1.65	28.62	46.00	-17.38	peak	
6	*	935.010	31.86	-0.25	31.61	46.00	-14.39	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: UNII-2C/ TX ax (HEW16) Mode 5570MHz

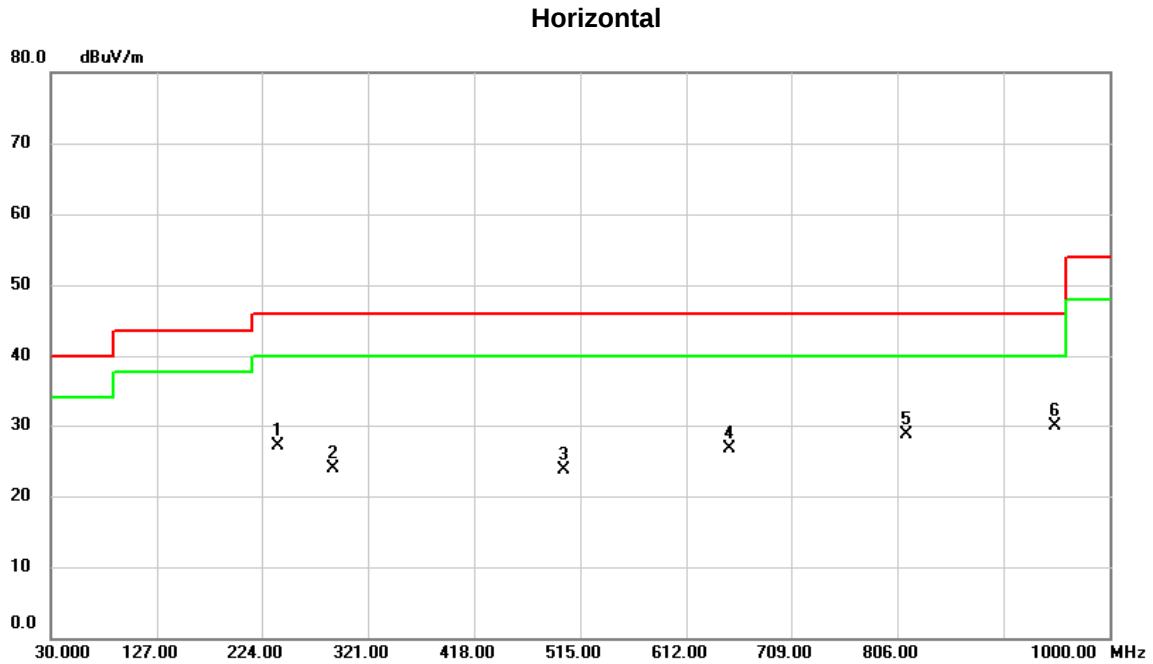


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode UNII-1/ TX a Mode 5180MHz

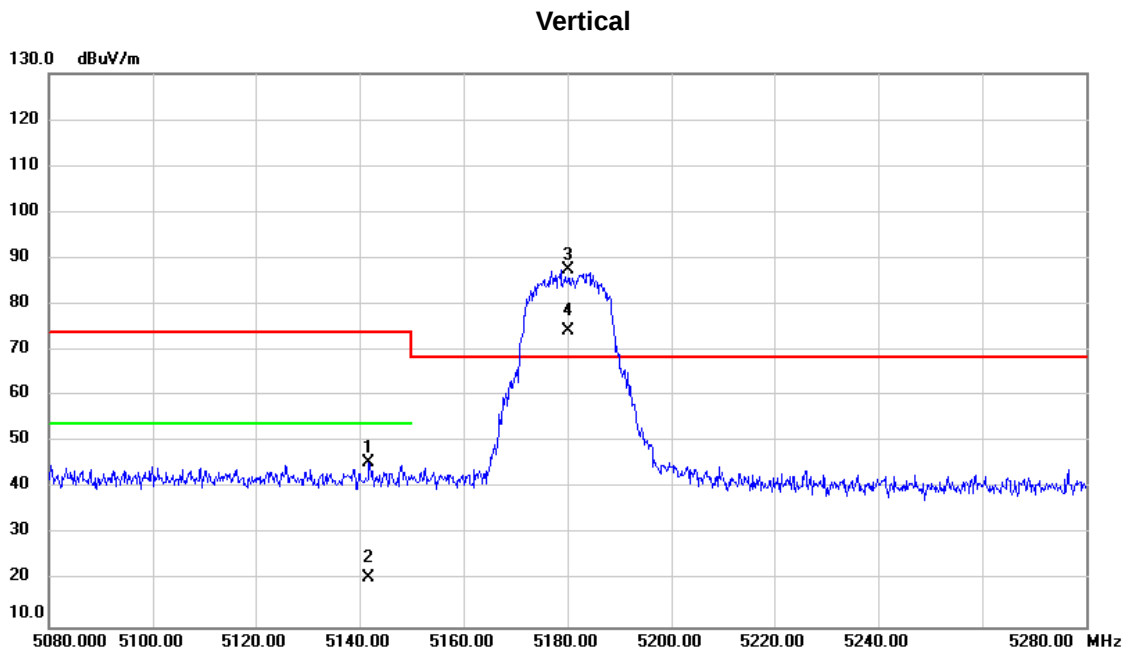


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5141.800	29.32	16.14	45.46	74.00	-28.54	peak	
2		5141.800	4.51	16.14	20.65	54.00	-33.35	AVG	
3	*	5180.000	71.40	16.22	87.62	68.30	19.32	peak	No Limit
4	X	5180.000	58.03	16.22	74.25	68.30	5.95	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/ TX a Mode 5240MHz

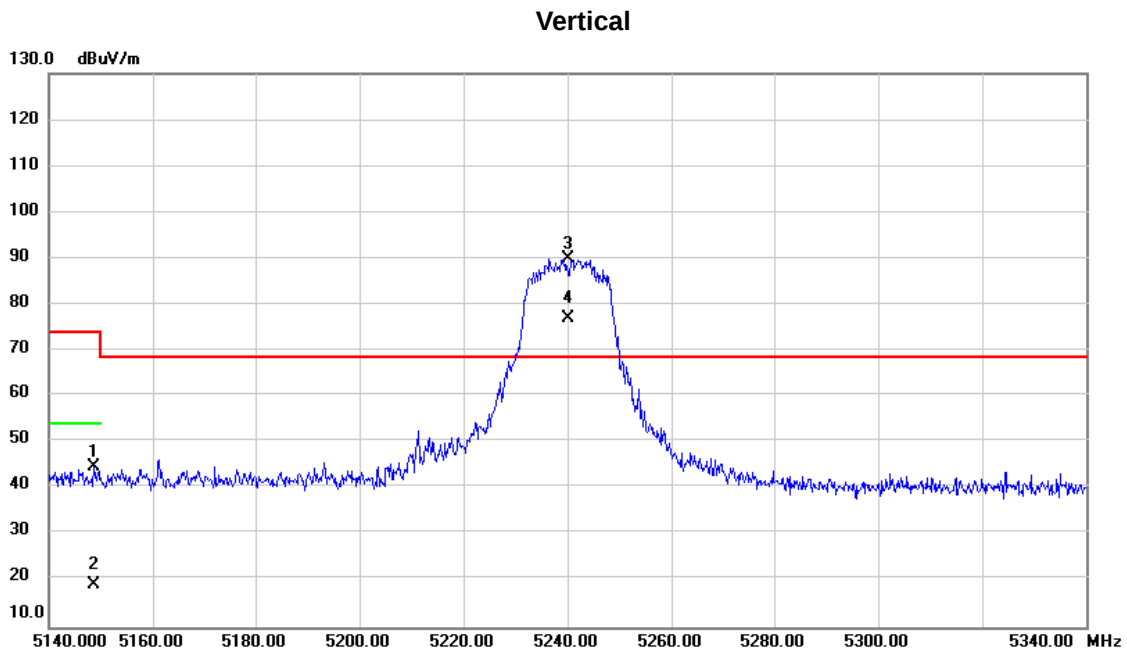


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.600	28.39	16.15	44.54	74.00	-29.46	peak	
2		5148.600	2.99	16.15	19.14	54.00	-34.86	AVG	
3	*	5240.000	73.72	16.37	90.09	68.30	21.79	peak	No Limit
4	X	5240.000	60.56	16.37	76.93	68.30	8.63	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/ TX a Mode 5260MHz

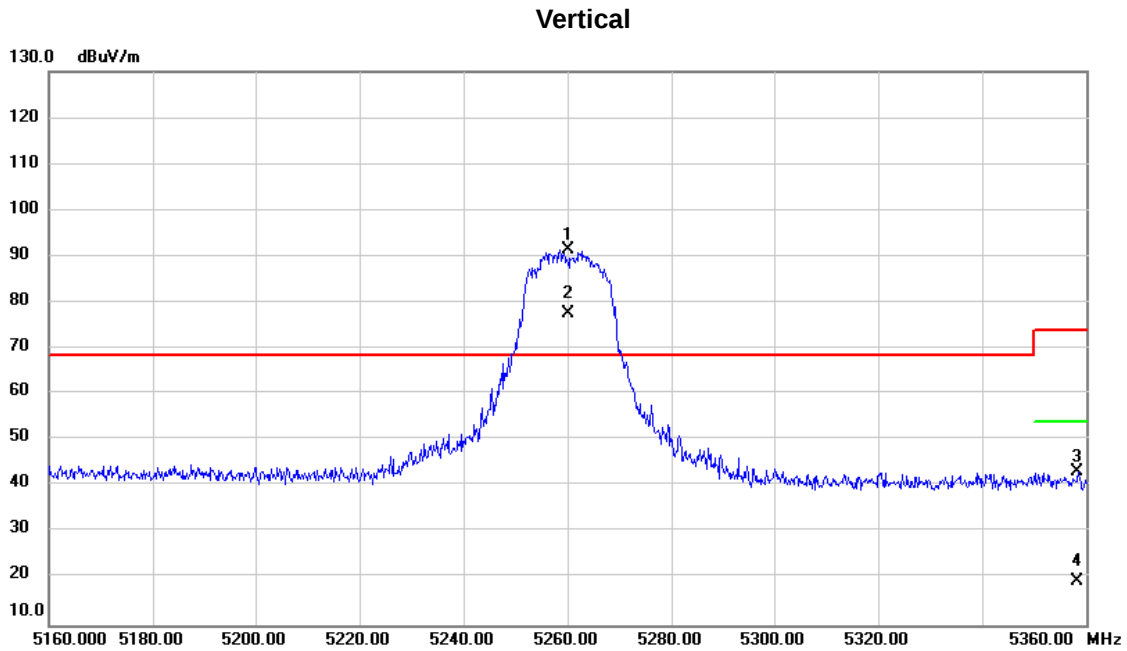


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5260.000	74.96	16.42	91.38	68.30	23.08	peak	No Limit
2	X	5260.000	61.19	16.42	77.61	68.30	9.31	AVG	No Limit
3		5358.400	26.54	16.65	43.19	74.00	-30.81	peak	
4		5358.400	2.79	16.65	19.44	54.00	-34.56	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/ TX a Mode 5320MHz

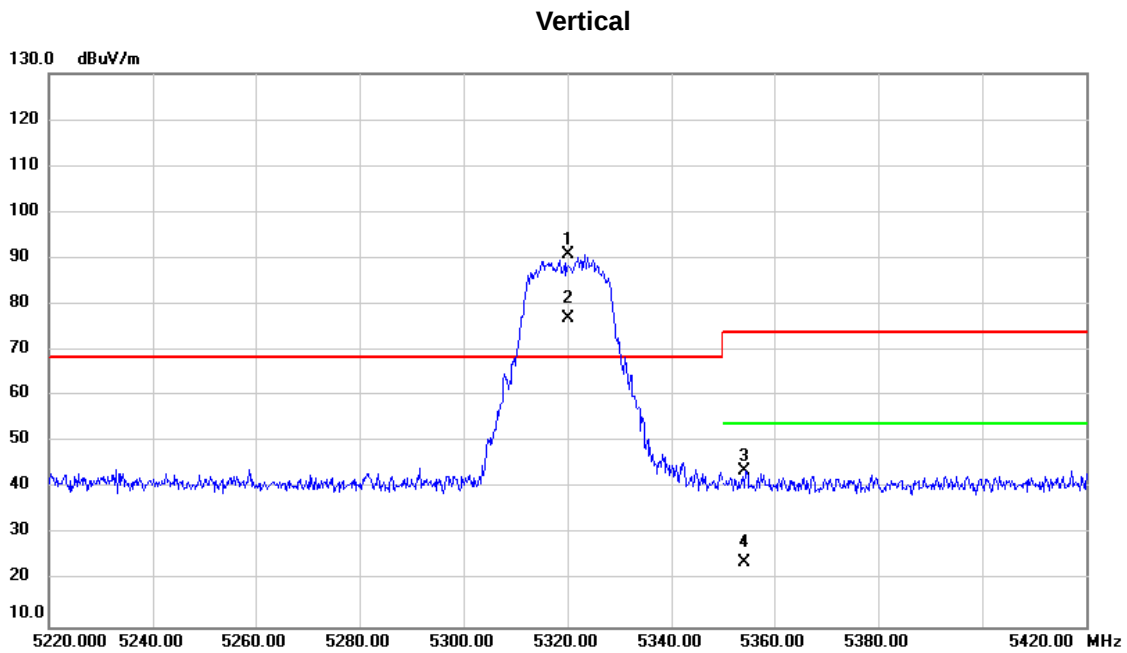


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX a Mode 5500MHz

Vertical

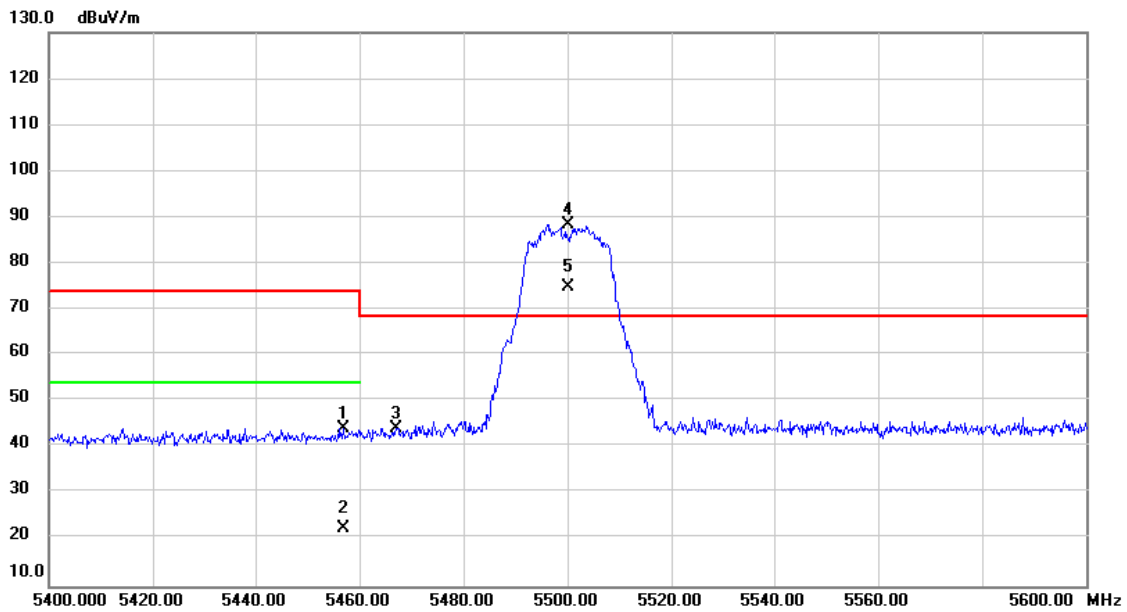

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5456.800	27.29	16.88	44.17	74.00	-29.83	peak	
2		5456.800	5.54	16.88	22.42	54.00	-31.58	AVG	
3		5467.000	27.28	16.91	44.19	68.30	-24.11	peak	
4	*	5500.000	71.42	16.98	88.40	68.30	20.10	peak	No Limit
5	X	5500.000	57.86	16.98	74.84	68.30	6.54	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX a Mode 5700MHz

Vertical

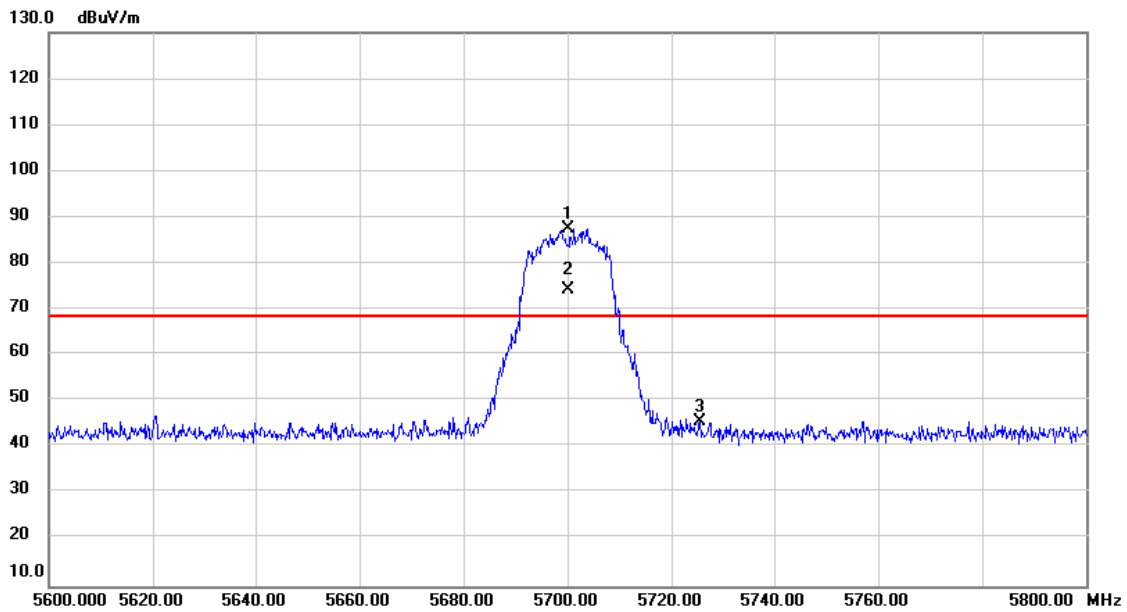


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5700.000	69.89	17.58	87.47	68.30	19.17	peak	No Limit
2	X	5700.000	56.62	17.58	74.20	68.30	5.90	AVG	No Limit
3		5725.400	27.99	17.65	45.64	68.30	-22.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/ TX a Mode 5745MHz

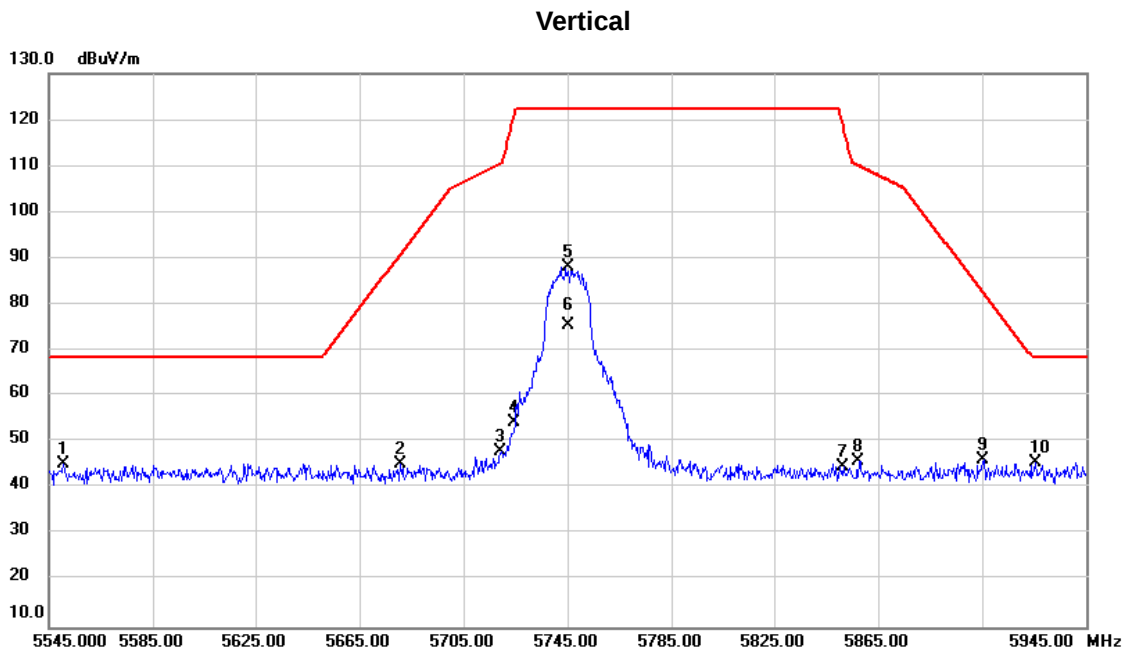


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5550.600	28.14	17.13	45.27	68.20	-22.93	peak	
2		5680.600	27.87	17.53	45.40	90.84	-45.44	peak	
3		5719.400	30.41	17.63	48.04	110.63	-62.59	peak	
4		5724.600	36.63	17.64	54.27	121.29	-67.02	peak	
5		5745.000	70.39	17.71	88.10	122.20	-34.10	peak	No Limit
6		5745.000	57.73	17.71	75.44	122.20	-46.76	AVG	No Limit
7		5851.400	26.70	18.03	44.73	119.01	-74.28	peak	
8		5857.400	27.78	18.05	45.83	110.13	-64.30	peak	
9		5905.400	27.95	18.18	46.13	82.70	-36.57	peak	
10	*	5925.400	27.24	18.25	45.49	68.20	-22.71	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/ TX a Mode 5825MHz

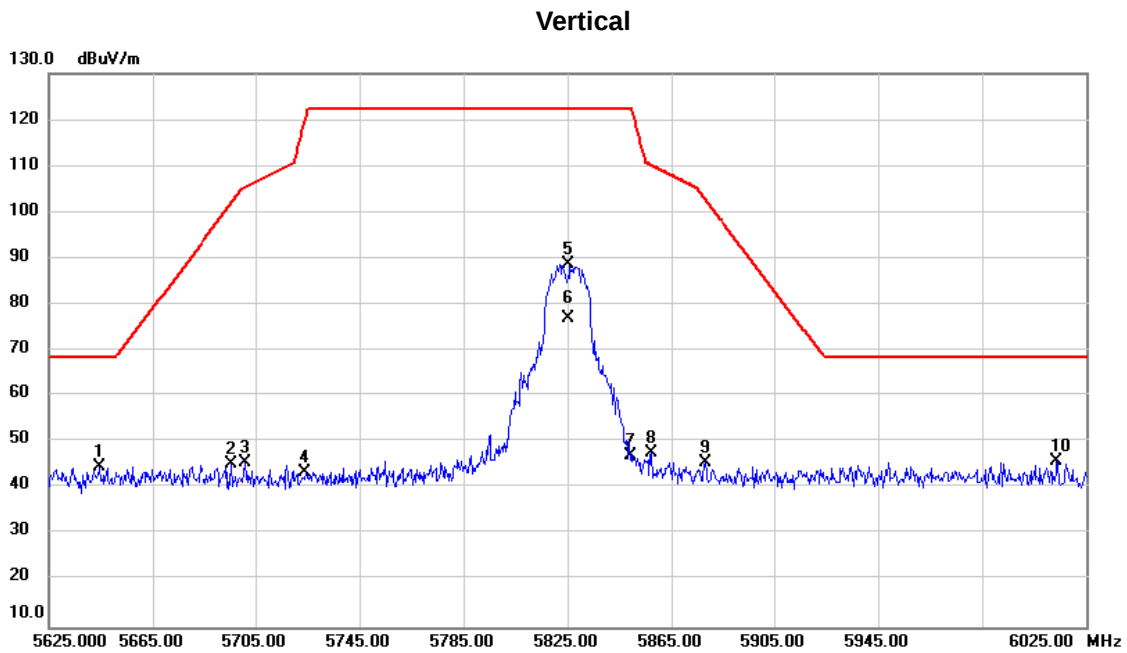


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5644.600	27.11	17.42	44.53	68.20	-23.67	peak	
2		5695.800	27.76	17.57	45.33	102.09	-56.76	peak	
3		5701.000	27.96	17.57	45.53	105.48	-59.95	peak	
4		5724.200	25.80	17.64	43.44	120.38	-76.94	peak	
5		5825.000	70.65	17.96	88.61	122.20	-33.59	peak	No Limit
6		5825.000	58.98	17.96	76.94	122.20	-45.26	AVG	No Limit
7		5849.400	28.91	18.03	46.94	122.20	-75.26	peak	
8		5857.000	29.56	18.05	47.61	110.24	-62.63	peak	
9		5877.800	27.52	18.11	45.63	103.13	-57.50	peak	
10	*	6013.400	27.34	18.50	45.84	68.20	-22.36	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1/TX n (HT20) Mode 5180MHz
-----------	---------------------------------

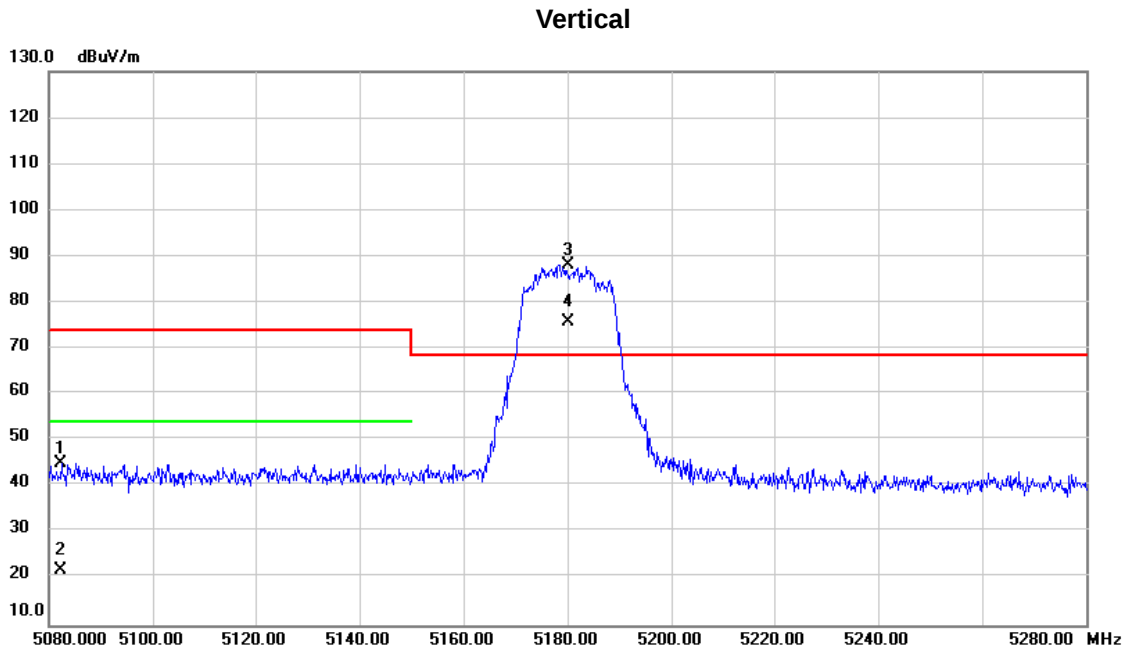


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5082.400	28.93	16.00	44.93	74.00	-29.07	peak	
2		5082.400	5.97	16.00	21.97	54.00	-32.03	AVG	
3	*	5180.000	71.86	16.22	88.08	68.30	19.78	peak	No Limit
4	X	5180.000	59.61	16.22	75.83	68.30	7.53	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT20) Mode 5240MHz

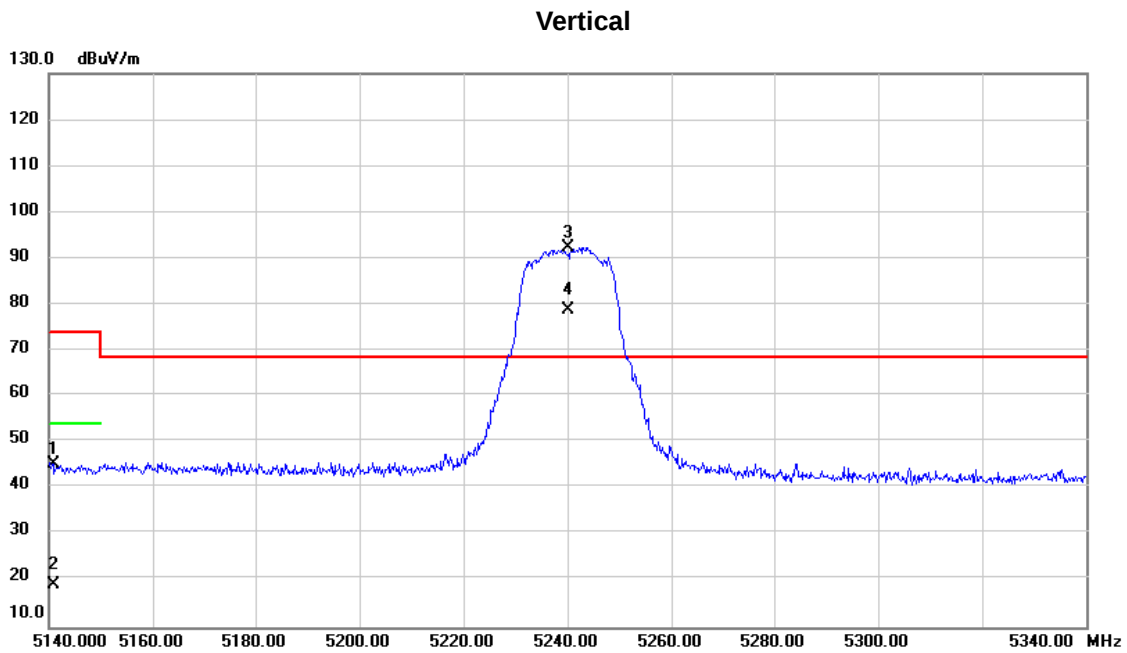


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5140.800	29.05	16.13	45.18	74.00	-28.82	peak	
2		5140.800	3.03	16.13	19.16	54.00	-34.84	AVG	
3	*	5240.000	76.07	16.37	92.44	68.30	24.14	peak	No Limit
4	X	5240.000	62.42	16.37	78.79	68.30	10.49	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT20) Mode 5260MHz

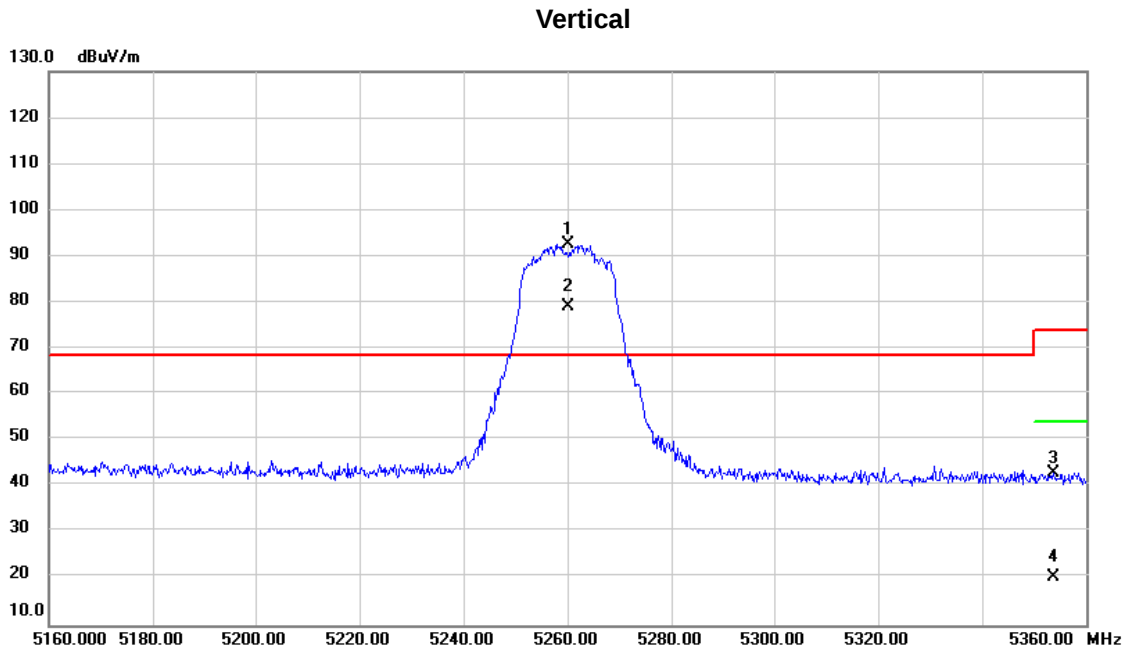


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5260.000	76.14	16.42	92.56	68.30	24.26	peak	No Limit
2	X	5260.000	62.73	16.42	79.15	68.30	10.85	AVG	No Limit
3		5353.600	26.23	16.64	42.87	74.00	-31.13	peak	
4		5353.600	3.57	16.64	20.21	54.00	-33.79	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT20) Mode 5320MHz

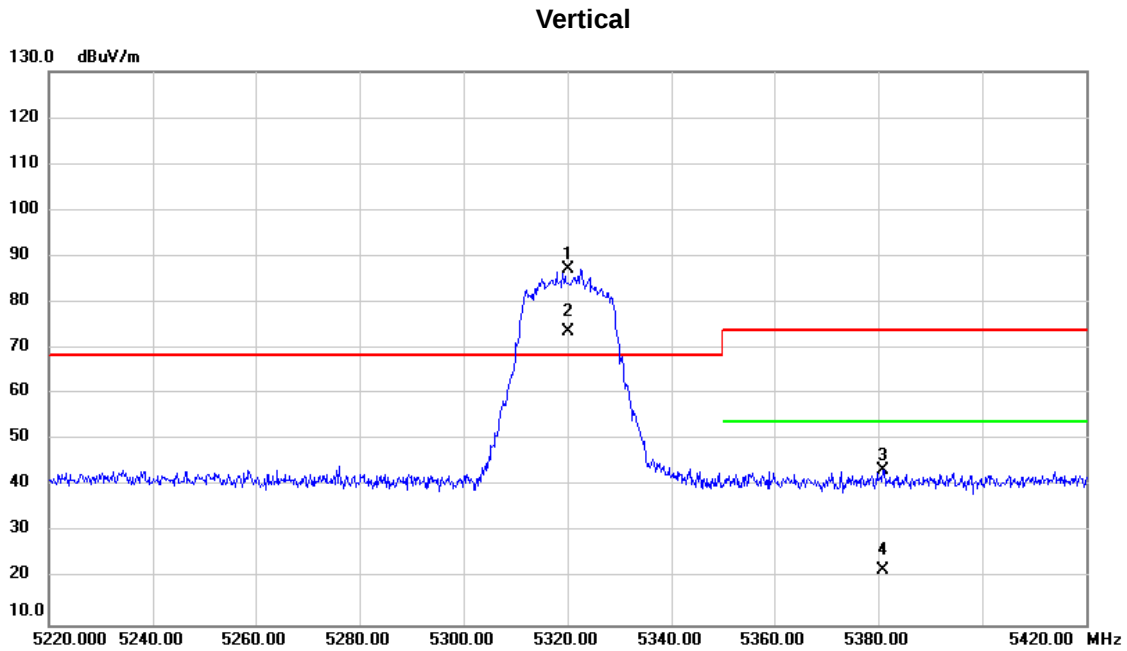


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5320.000	70.61	16.56	87.17	68.30	18.87	peak	No Limit
2	X	5320.000	57.23	16.56	73.79	68.30	5.49	AVG	No Limit
3		5381.000	26.68	16.71	43.39	74.00	-30.61	peak	
4		5381.000	5.21	16.71	21.92	54.00	-32.08	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX n (HT20) Mode 5500MHz

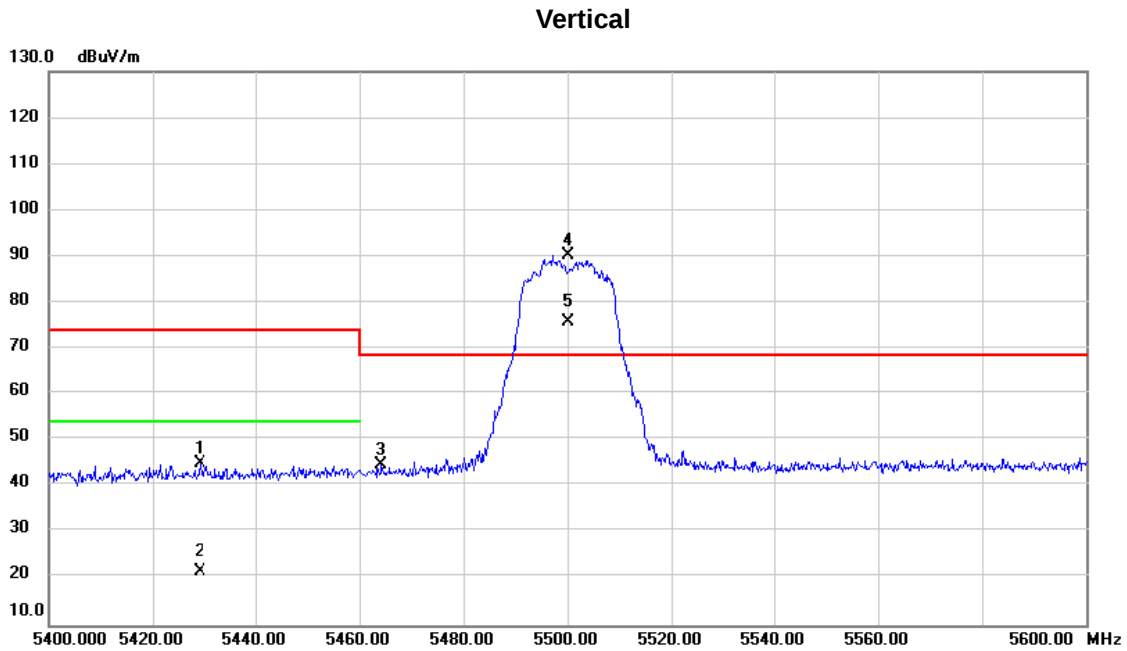


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5429.200	28.13	16.82	44.95	74.00	-29.05	peak	
2		5429.200	4.85	16.82	21.67	54.00	-32.33	AVG	
3		5464.200	27.66	16.91	44.57	68.30	-23.73	peak	
4	*	5500.000	73.16	16.98	90.14	68.30	21.84	peak	No Limit
5	X	5500.000	58.93	16.98	75.91	68.30	7.61	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/TX n (HT20) Mode 5700MHz
-----------	----------------------------------

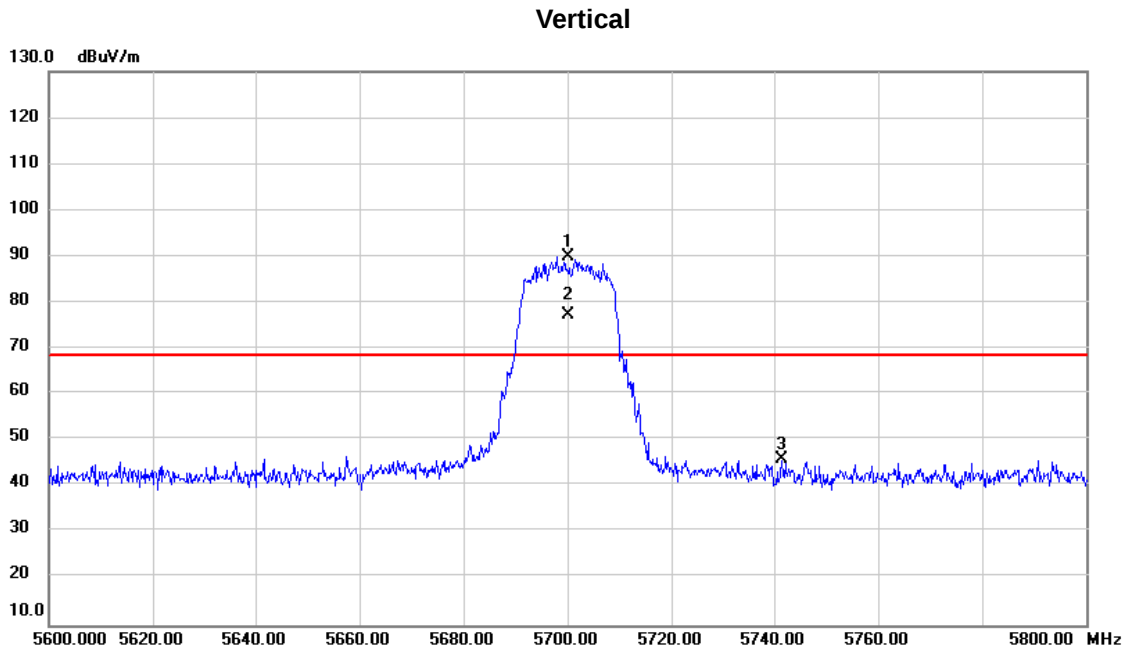


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5700.000	72.28	17.58	89.86	68.30	21.56	peak	No Limit
2	X	5700.000	59.71	17.58	77.29	68.30	8.99	AVG	No Limit
3		5741.400	28.00	17.70	45.70	68.30	-22.60	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX n (HT20) Mode 5745MHz

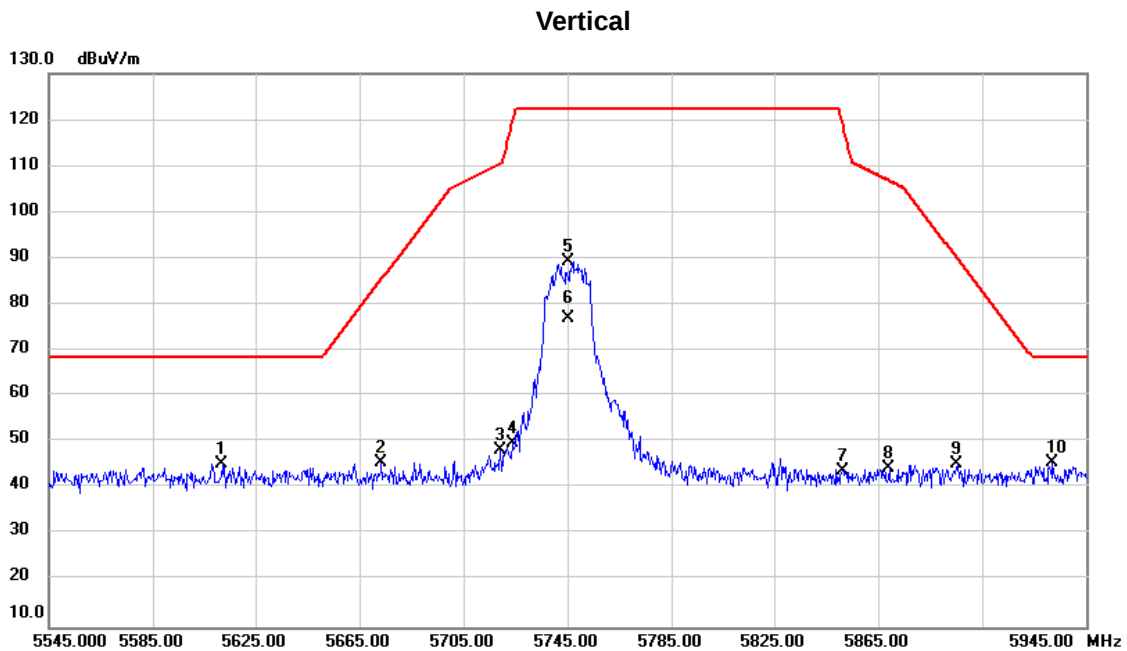


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5612.200	27.96	17.32	45.28	68.20	-22.92	peak	
2		5673.400	28.18	17.50	45.68	85.52	-39.84	peak	
3		5719.000	30.74	17.63	48.37	110.52	-62.15	peak	
4		5723.800	32.02	17.64	49.66	119.46	-69.80	peak	
5		5745.000	71.63	17.71	89.34	122.20	-32.86	peak	No Limit
6		5745.000	59.30	17.71	77.01	122.20	-45.19	AVG	No Limit
7		5851.400	25.71	18.03	43.74	119.01	-75.27	peak	
8		5869.000	26.33	18.08	44.41	106.88	-62.47	peak	
9		5895.400	26.99	18.17	45.16	90.10	-44.94	peak	
10	*	5931.800	27.38	18.26	45.64	68.20	-22.56	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX n (HT20)Mode 5825MHz

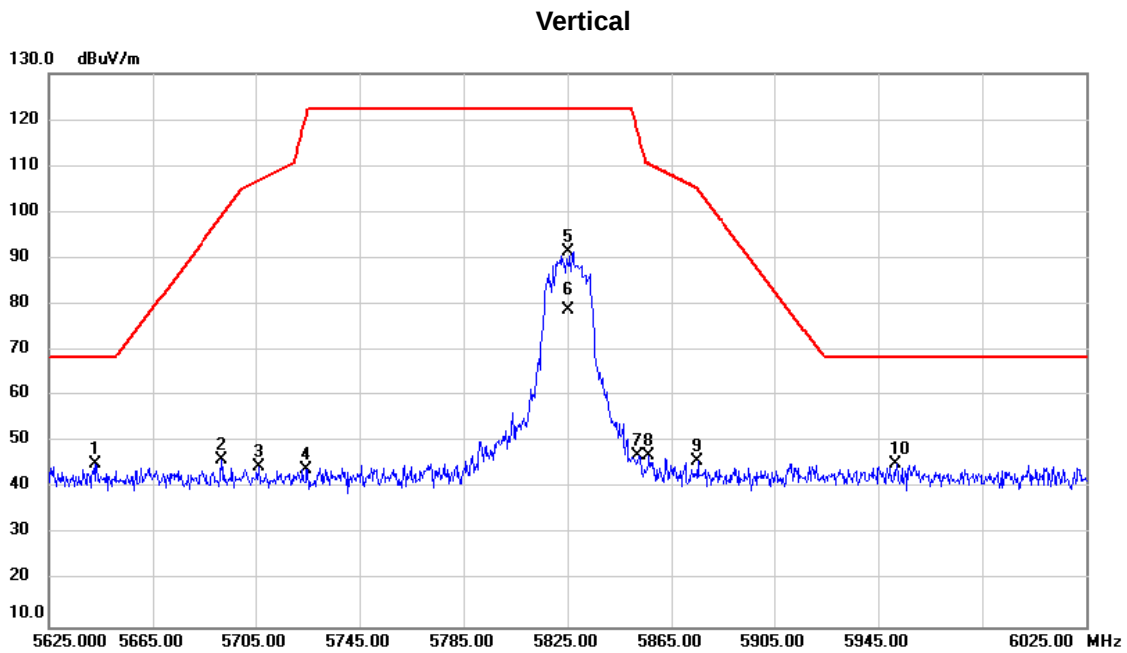


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5643.000	27.80	17.41	45.21	68.20	-22.99	peak	
2		5691.800	28.45	17.56	46.01	99.13	-53.12	peak	
3		5706.200	27.00	17.60	44.60	106.94	-62.34	peak	
4		5724.600	26.42	17.64	44.06	121.29	-77.23	peak	
5		5825.000	73.51	17.96	91.47	122.20	-30.73	peak	No Limit
6		5825.000	60.94	17.96	78.90	122.20	-43.30	AVG	No Limit
7		5852.200	28.92	18.04	46.96	117.18	-70.22	peak	
8		5856.200	28.98	18.05	47.03	110.46	-63.43	peak	
9		5875.000	27.72	18.11	45.83	105.20	-59.37	peak	
10	*	5951.800	27.07	18.32	45.39	68.20	-22.81	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT40) Mode 5190MHz

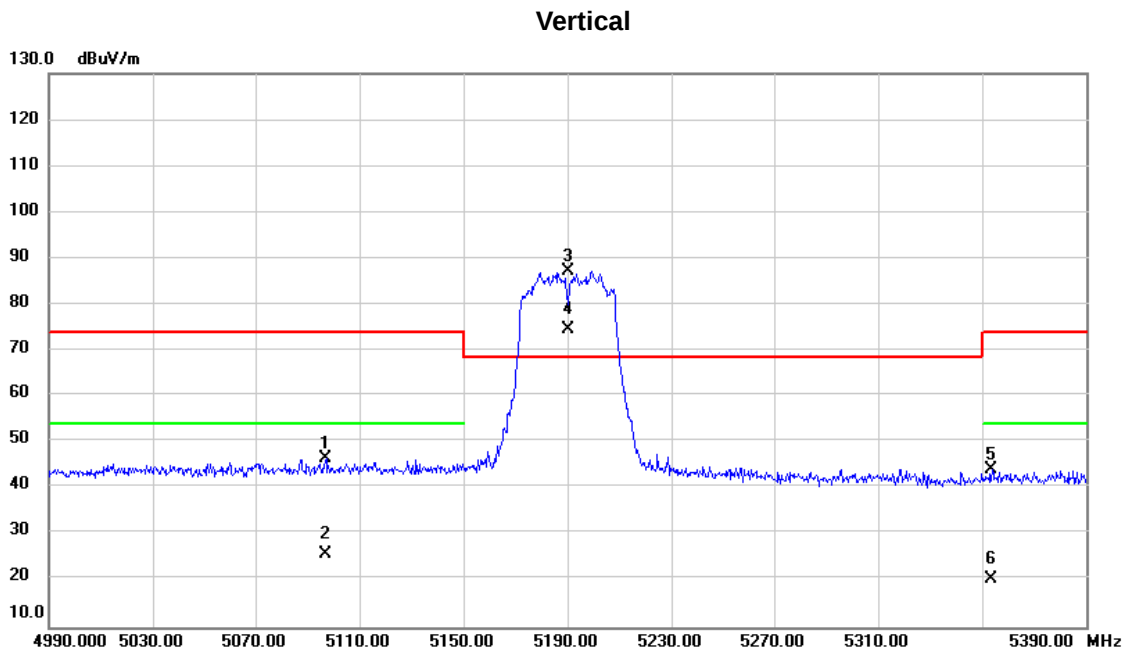


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5097.200	30.31	16.03	46.34	74.00	-27.66	peak	
2		5097.200	9.81	16.03	25.84	54.00	-28.16	AVG	
3	*	5190.000	70.90	16.25	87.15	68.30	18.85	peak	No Limit
4	X	5190.000	58.30	16.25	74.55	68.30	6.25	AVG	No Limit
5		5353.600	27.35	16.64	43.99	74.00	-30.01	peak	
6		5353.600	3.58	16.64	20.22	54.00	-33.78	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT40) Mode 5230MHz

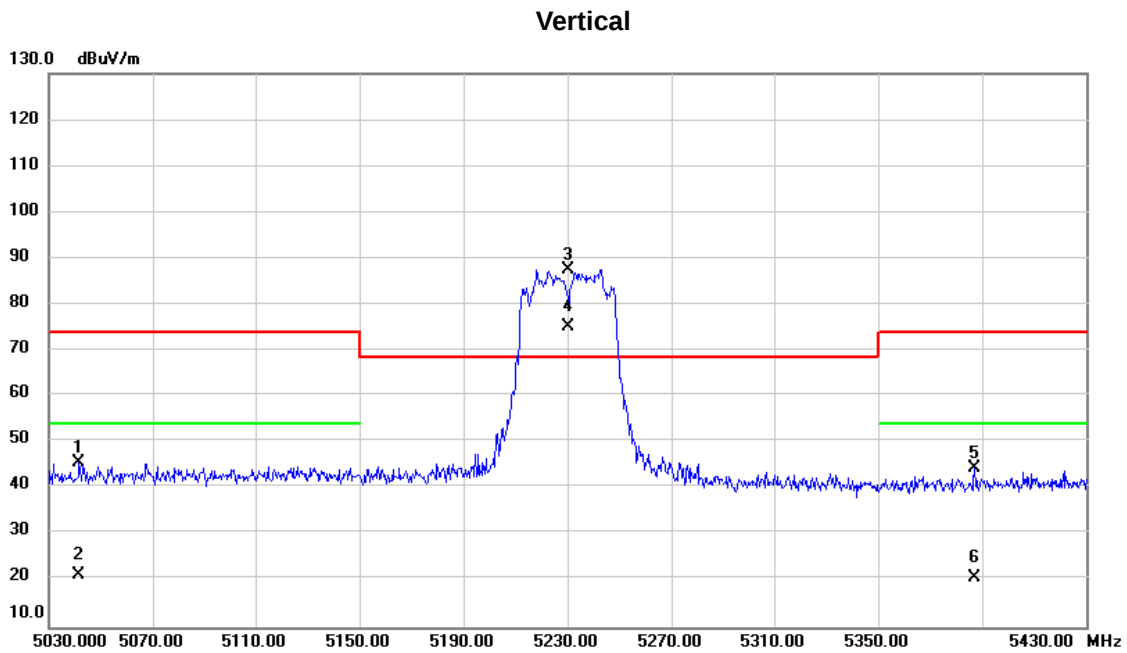


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5041.600	29.66	15.90	45.56	74.00	-28.44	peak	
2		5041.600	5.28	15.90	21.18	54.00	-32.82	AVG	
3	*	5230.000	71.35	16.34	87.69	68.30	19.39	peak	No Limit
4	X	5230.000	59.01	16.34	75.35	68.30	7.05	AVG	No Limit
5		5386.800	27.71	16.72	44.43	74.00	-29.57	peak	
6		5386.800	3.80	16.72	20.52	54.00	-33.48	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT40) Mode 5270MHz

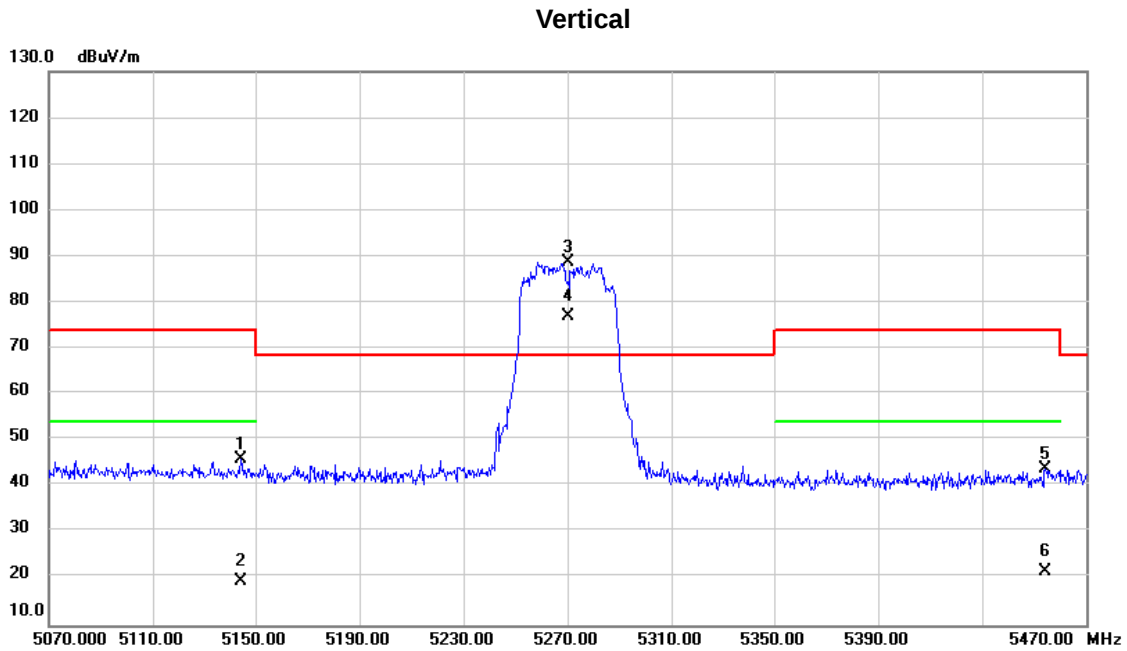


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5144.400	29.63	16.14	45.77	74.00	-28.23	peak	
2		5144.400	3.40	16.14	19.54	54.00	-34.46	AVG	
3	*	5270.000	72.41	16.45	88.86	68.30	20.56	peak	No Limit
4	X	5270.000	60.56	16.45	77.01	68.30	8.71	AVG	No Limit
5		5454.000	26.88	16.88	43.76	74.00	-30.24	peak	
6		5454.000	4.77	16.88	21.65	54.00	-32.35	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT40) Mode 5310MHz

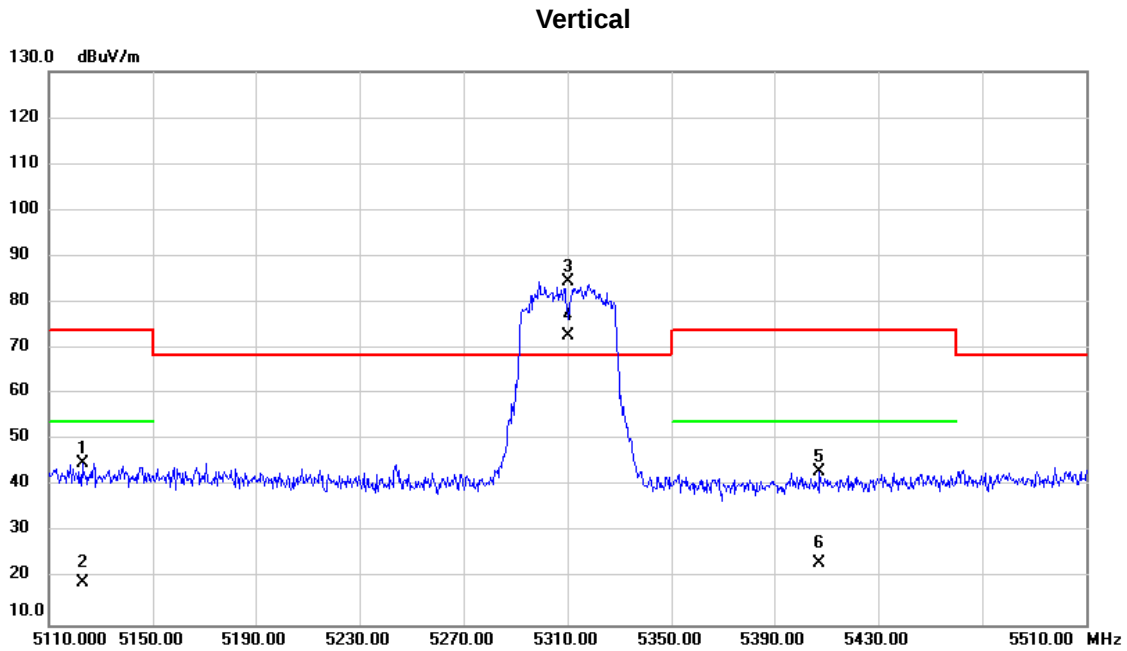


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5122.800	28.80	16.09	44.89	74.00	-29.11	peak	
2		5122.800	3.15	16.09	19.24	54.00	-34.76	AVG	
3	*	5310.000	68.12	16.53	84.65	68.30	16.35	peak	No Limit
4	X	5310.000	56.27	16.53	72.80	68.30	4.50	AVG	No Limit
5		5407.497	26.29	16.76	43.05	74.00	-30.95	peak	
6		5407.497	6.61	16.76	23.37	54.00	-30.63	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX n (HT40) Mode 5510MHz

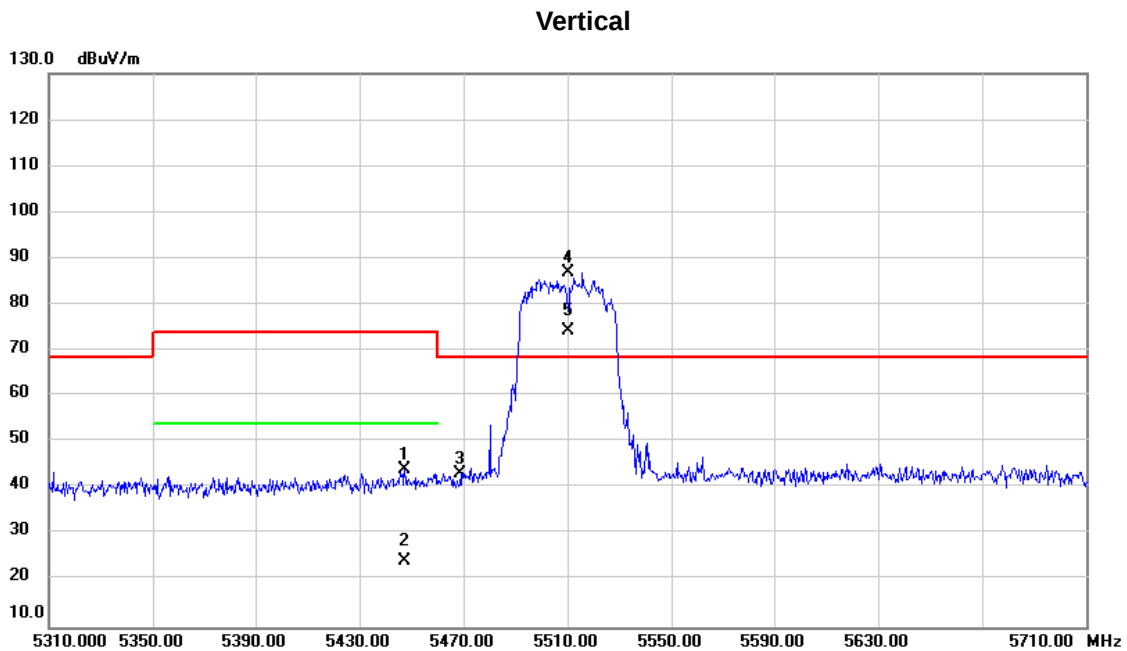


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5447.200	27.10	16.86	43.96	74.00	-30.04	peak	
2		5447.200	7.40	16.86	24.26	54.00	-29.74	AVG	
3		5468.800	26.31	16.91	43.22	68.30	-25.08	peak	
4	*	5510.000	69.87	17.01	86.88	68.30	18.58	peak	No Limit
5	X	5510.000	57.47	17.01	74.48	68.30	6.18	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX n (HT40) Mode 5670MHz

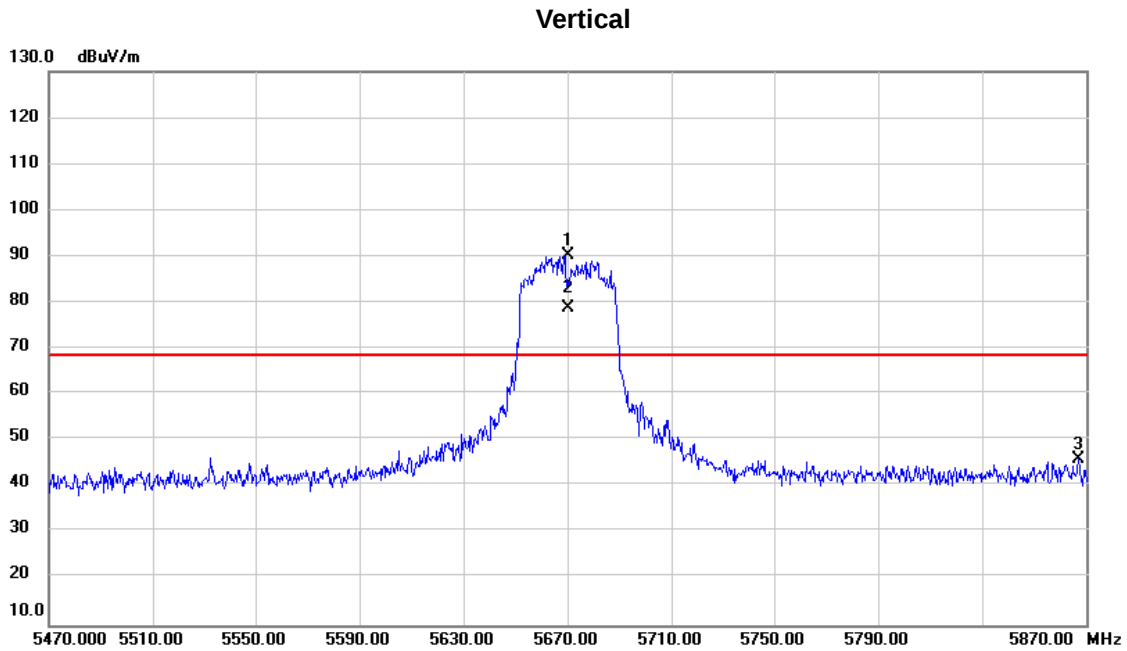


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5670.000	72.90	17.49	90.39	68.30	22.09	peak	No Limit
2	X	5670.000	61.24	17.49	78.73	68.30	10.43	AVG	No Limit
3		5866.800	27.81	18.07	45.88	68.30	-22.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX n (HT40) Mode 5755MHz

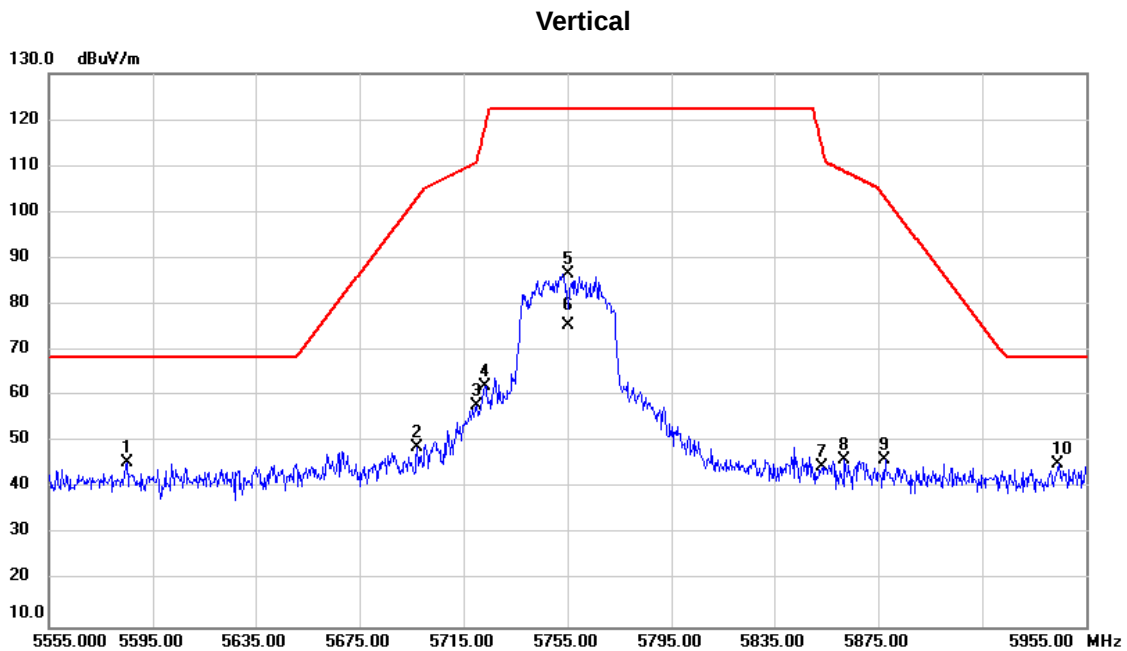


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5585.000	28.35	17.24	45.59	68.20	-22.61	peak	
2		5697.000	31.26	17.57	48.83	102.98	-54.15	peak	
3		5719.800	40.11	17.63	57.74	110.74	-53.00	peak	
4		5723.400	44.36	17.64	62.00	118.55	-56.55	peak	
5		5755.000	69.02	17.74	86.76	122.20	-35.44	peak	No Limit
6		5755.000	57.71	17.74	75.45	122.20	-46.75	AVG	No Limit
7		5853.400	26.48	18.04	44.52	114.45	-69.93	peak	
8		5861.800	28.20	18.06	46.26	108.90	-62.64	peak	
9		5877.400	28.17	18.11	46.28	103.42	-57.14	peak	
10		5944.200	26.91	18.30	45.21	68.20	-22.99	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX n (HT40) Mode 5795MHz

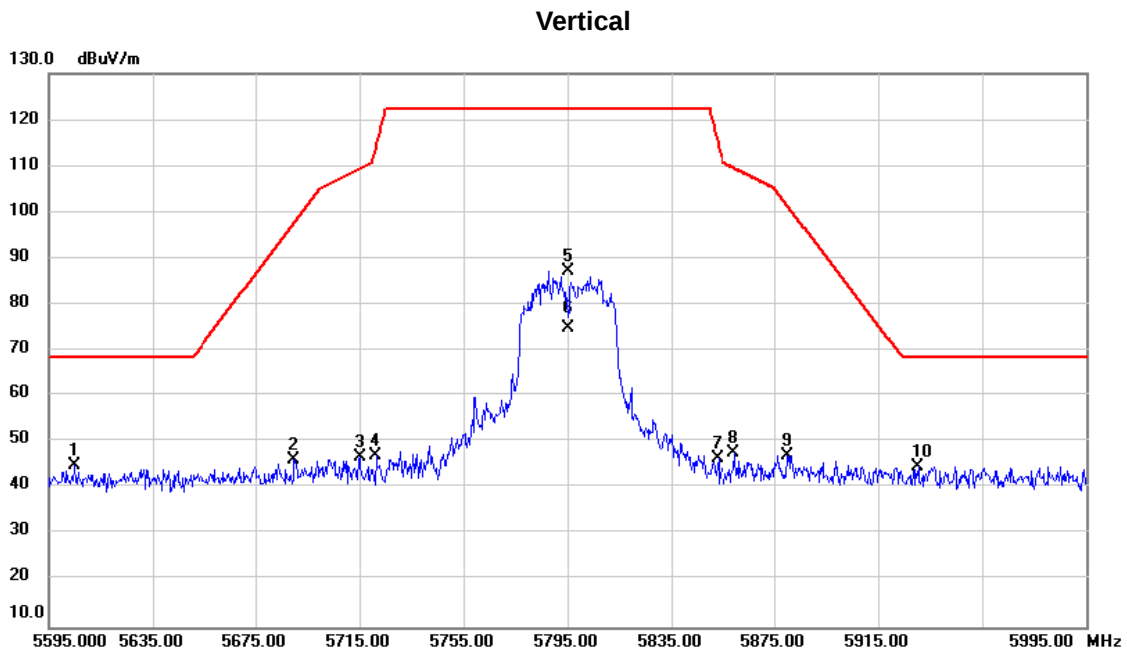


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5605.000	27.80	17.29	45.09	68.20	-23.11	peak	
2		5689.800	28.58	17.55	46.13	97.65	-51.52	peak	
3		5715.000	29.00	17.62	46.62	109.40	-62.78	peak	
4		5721.400	29.55	17.64	47.19	113.99	-66.80	peak	
5		5795.000	69.39	17.86	87.25	122.20	-34.95	peak	No Limit
6		5795.000	57.04	17.86	74.90	122.20	-47.30	AVG	No Limit
7		5853.000	28.34	18.04	46.38	115.36	-68.98	peak	
8		5859.400	29.52	18.05	47.57	109.57	-62.00	peak	
9		5880.200	29.01	18.12	47.13	101.35	-54.22	peak	
10		5930.200	26.49	18.26	44.75	68.20	-23.45	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ac (VHT80) Mode 5210MHz

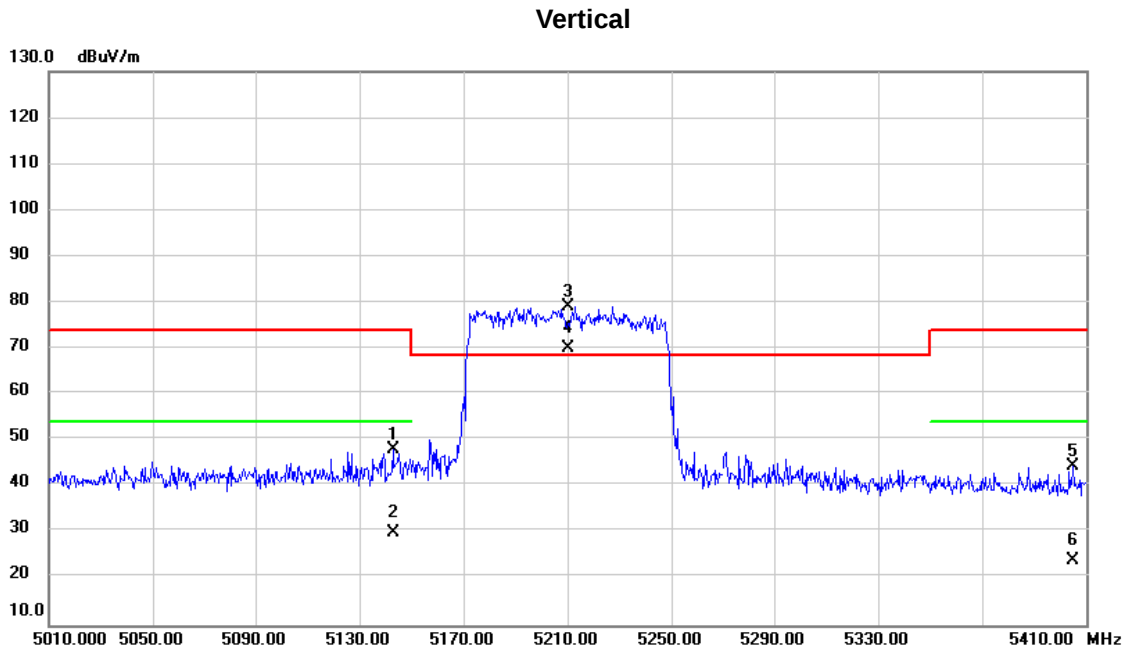


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5142.800	31.79	16.14	47.93	74.00	-26.07	peak	
2		5142.800	13.95	16.14	30.09	54.00	-23.91	AVG	
3	*	5210.000	62.96	16.30	79.26	68.30	10.96	peak	No Limit
4	X	5210.000	53.92	16.30	70.22	68.30	1.92	AVG	No Limit
5		5404.800	27.45	16.76	44.21	74.00	-29.79	peak	
6		5404.800	7.25	16.76	24.01	54.00	-29.99	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ac (VHT80) Mode 5290MHz

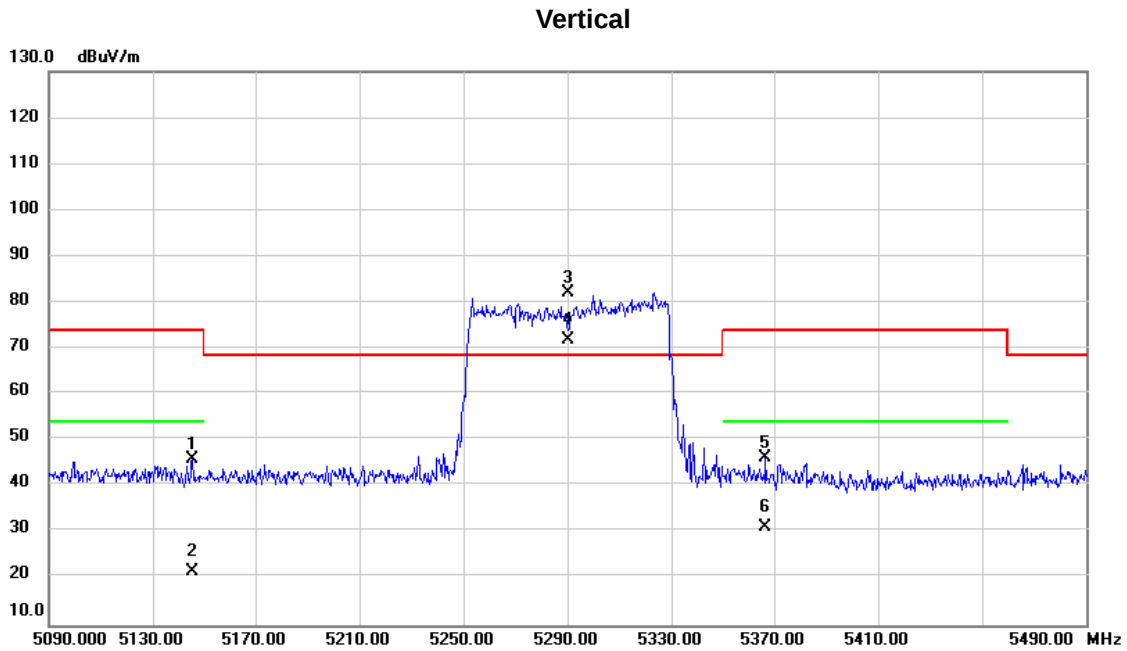


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5145.200	29.73	16.14	45.87	74.00	-28.13	peak	
2		5145.200	5.44	16.14	21.58	54.00	-32.42	AVG	
3	*	5290.000	65.59	16.49	82.08	68.30	13.78	peak	No Limit
4	X	5290.000	55.35	16.49	71.84	68.30	3.54	AVG	No Limit
5		5366.400	29.62	16.67	46.29	74.00	-27.71	peak	
6		5366.400	14.42	16.67	31.09	54.00	-22.91	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/TX ac (VHT80) Mode 5530MHz
-----------	------------------------------------

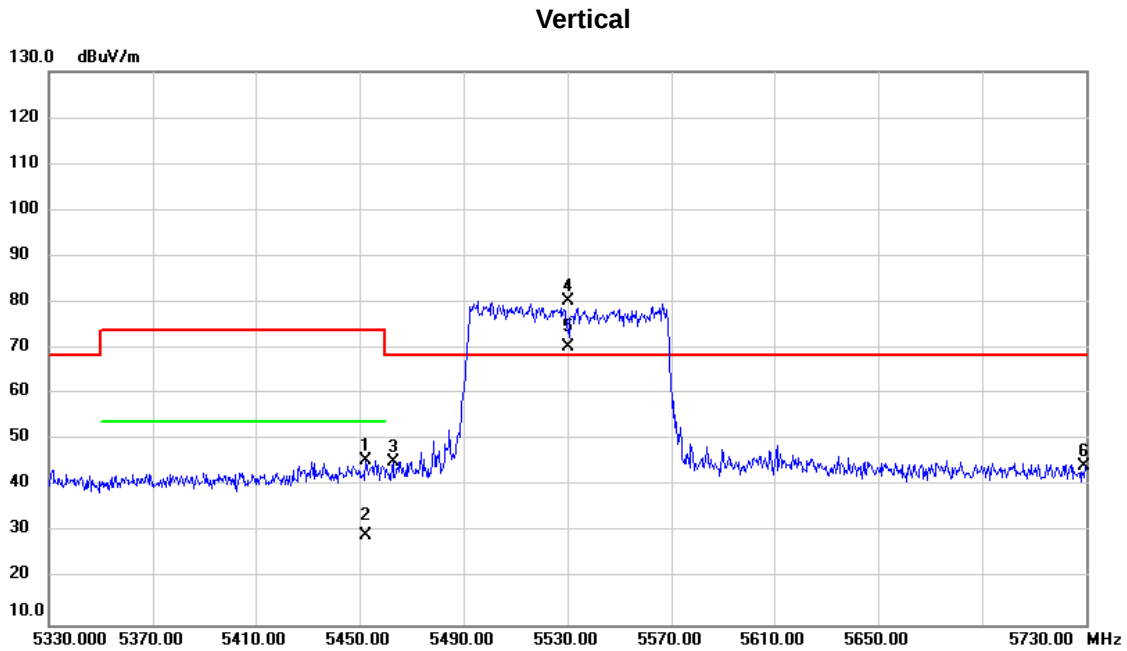

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5452.400	28.74	16.87	45.61	74.00	-28.39	peak	
2		5452.400	12.52	16.87	29.39	54.00	-24.61	AVG	
3		5462.800	28.46	16.90	45.36	68.30	-22.94	peak	
4	*	5530.000	63.32	17.07	80.39	68.30	12.09	peak	No Limit
5	X	5530.000	53.44	17.07	70.51	68.30	2.21	AVG	No Limit
6		5729.200	26.76	17.67	44.43	68.30	-23.87	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ac (VHT80) Mode 5610MHz

Vertical

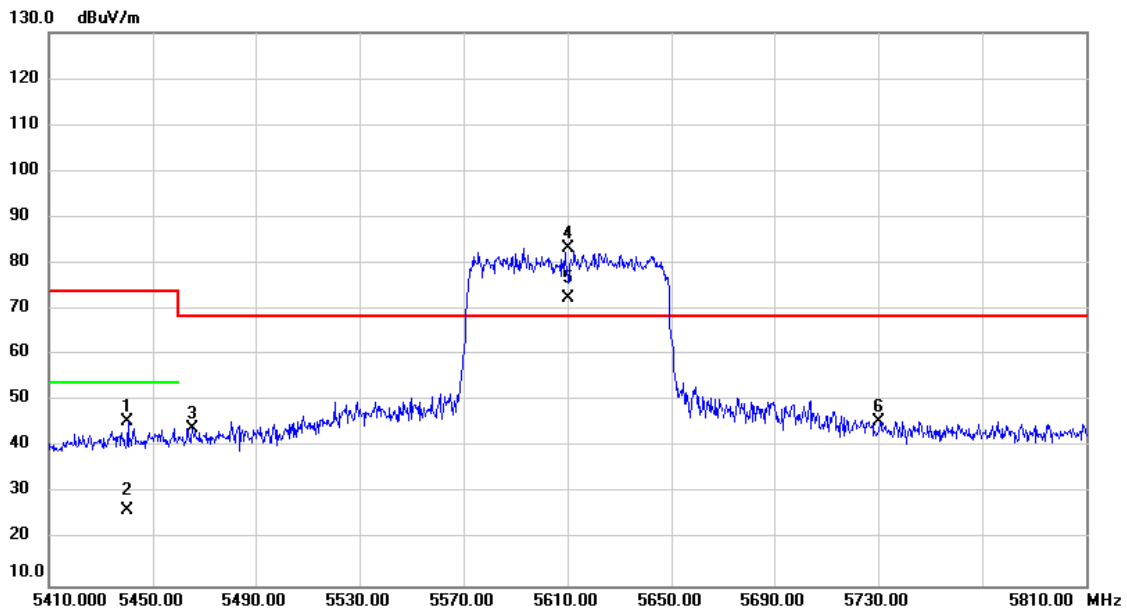


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5440.400	28.58	16.84	45.42	74.00	-28.58	peak	
2		5440.400	9.63	16.84	26.47	54.00	-27.53	AVG	
3		5465.200	27.14	16.91	44.05	68.30	-24.25	peak	
4	*	5610.000	66.01	17.32	83.33	68.30	15.03	peak	No Limit
5	X	5610.000	55.08	17.32	72.40	68.30	4.10	AVG	No Limit
6		5730.400	27.89	17.67	45.56	68.30	-22.74	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ac (VHT80) Mode 5775MHz

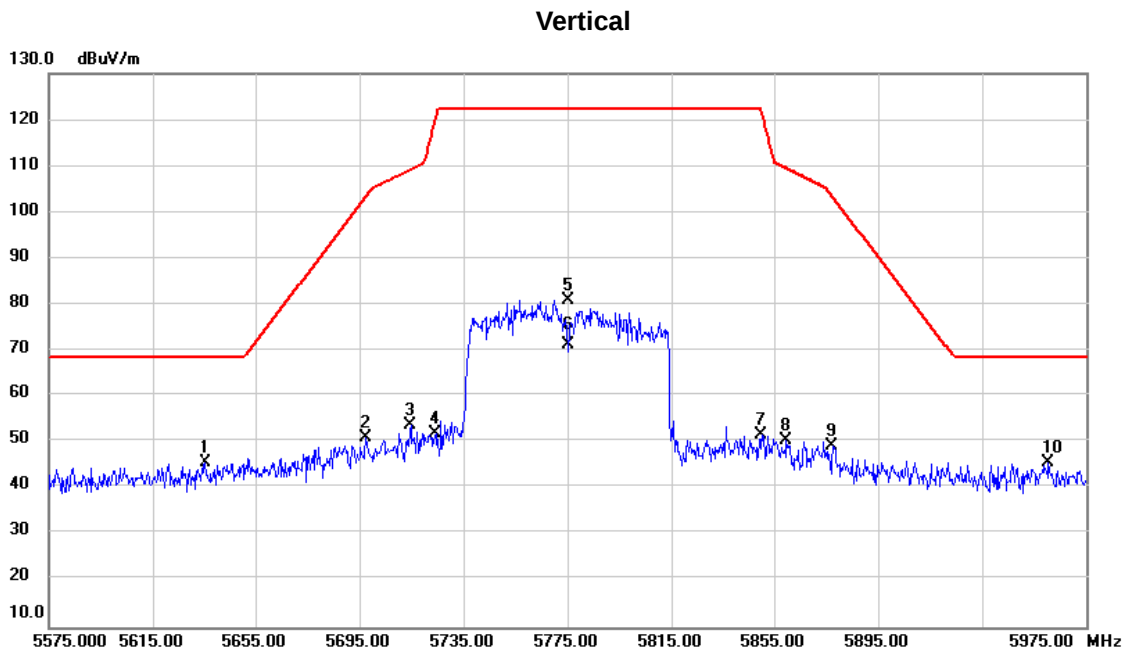


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ac (VHT160) Mode 5250MHz

Vertical

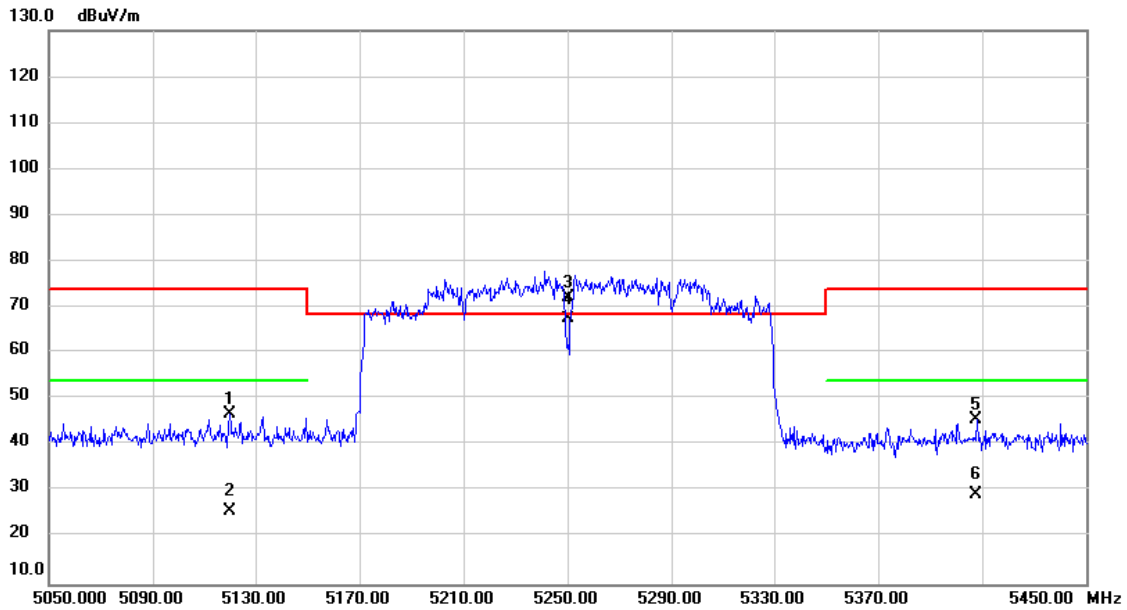


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ac (VHT160) Mode 5570MHz

Vertical

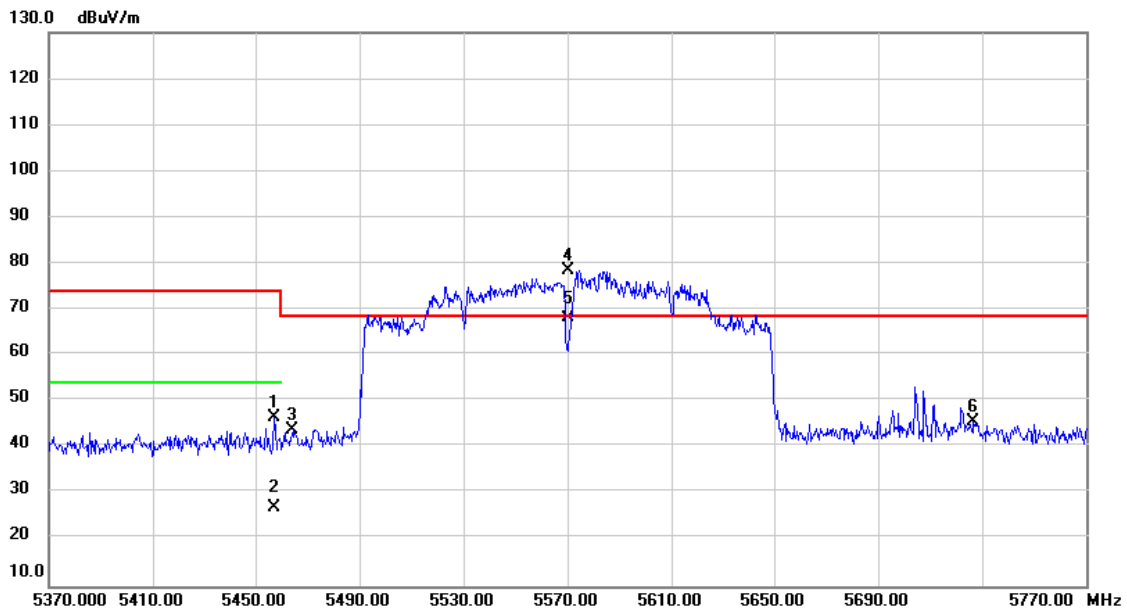


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5457.200	29.43	16.88	46.31	74.00	-27.69	peak	
2		5457.200	10.10	16.88	26.98	54.00	-27.02	AVG	
3		5464.400	26.70	16.91	43.61	68.30	-24.69	peak	
4	*	5570.000	61.26	17.19	78.45	68.30	10.15	peak	No Limit
5		5570.000	50.86	17.19	68.05	68.30	-0.25	AVG	No Limit
6		5726.400	27.97	17.66	45.63	68.30	-22.67	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW20) Mode 5180MHz

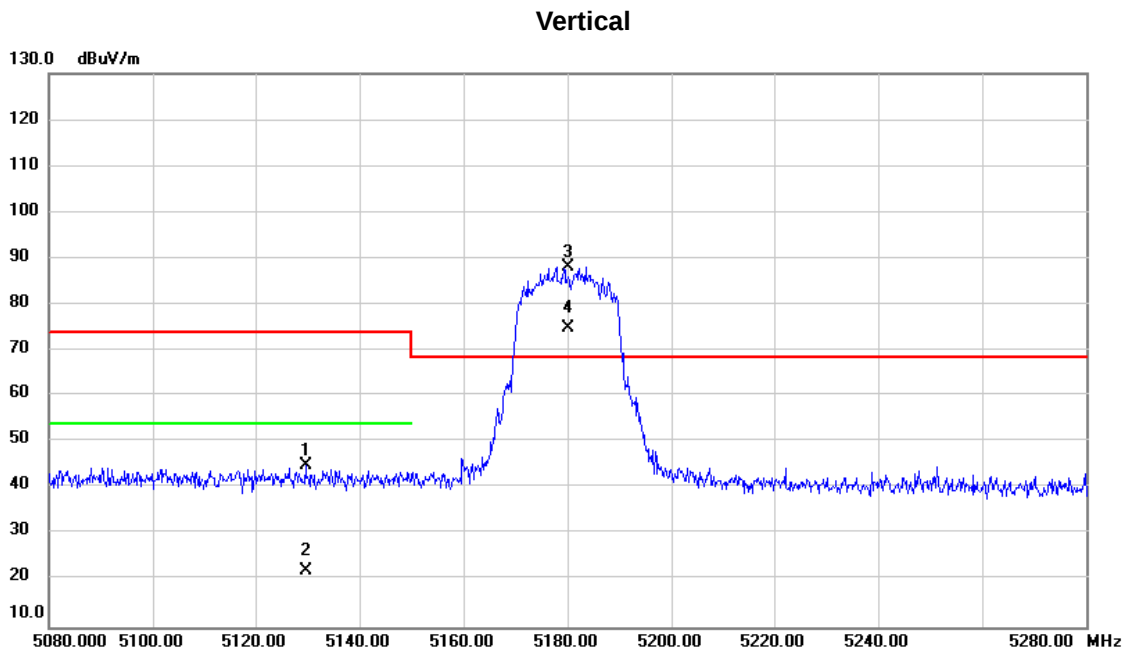


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5129.600	28.87	16.10	44.97	74.00	-29.03	peak	
2		5129.600	6.04	16.10	22.14	54.00	-31.86	AVG	
3	*	5180.000	72.00	16.22	88.22	68.30	19.92	peak	No Limit
4	X	5180.000	58.82	16.22	75.04	68.30	6.74	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW20) Mode 5240MHz

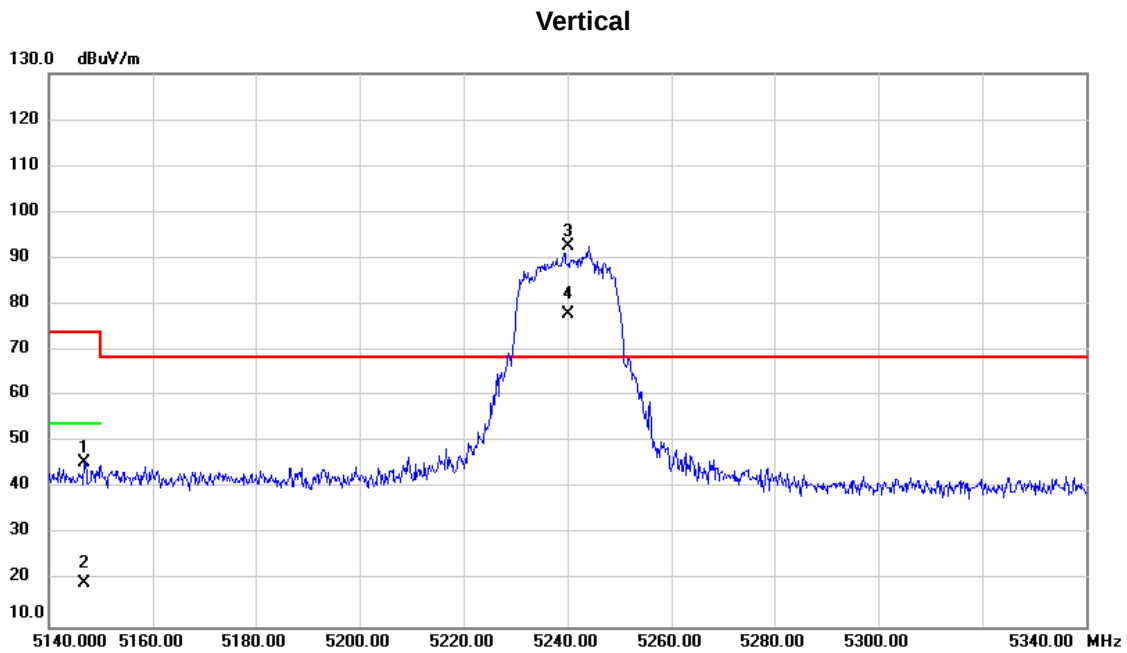


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5146.800	29.53	16.14	45.67	74.00	-28.33	peak	
2		5146.800	3.25	16.14	19.39	54.00	-34.61	AVG	
3	*	5240.000	76.35	16.37	92.72	68.30	24.42	peak	No Limit
4	X	5240.000	61.54	16.37	77.91	68.30	9.61	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW20) Mode 5260MHz

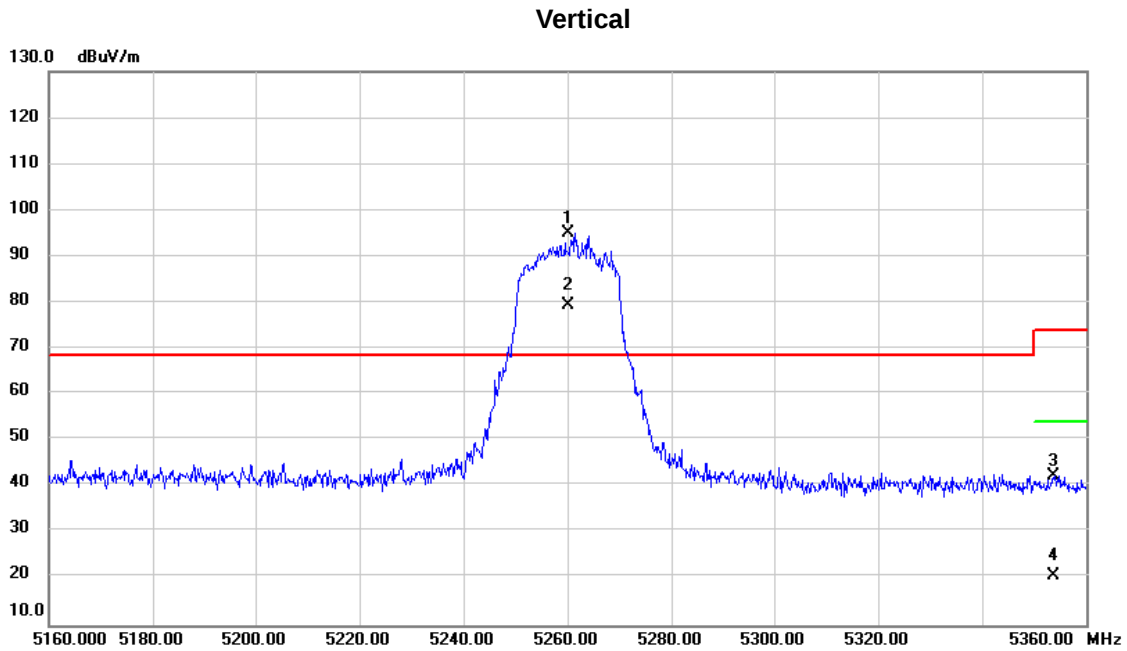


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5260.000	78.59	16.42	95.01	68.30	26.71	peak	No Limit
2	X	5260.000	62.96	16.42	79.38	68.30	11.08	AVG	No Limit
3		5353.800	25.75	16.64	42.39	74.00	-31.61	peak	
4		5353.800	3.97	16.64	20.61	54.00	-33.39	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW20) Mode 5320MHz

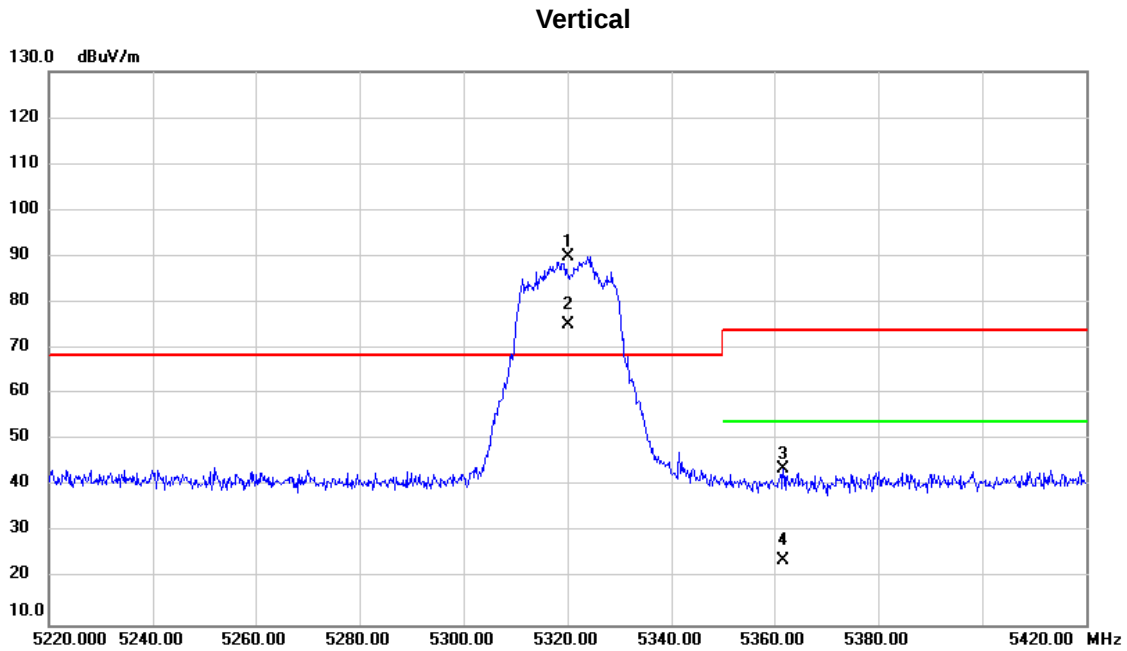


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5320.000	73.43	16.56	89.99	68.30	21.69	peak	No Limit
2	X	5320.000	58.72	16.56	75.28	68.30	6.98	AVG	No Limit
3		5361.600	26.96	16.65	43.61	74.00	-30.39	peak	
4		5361.600	7.34	16.65	23.99	54.00	-30.01	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW20) Mode 5500MHz

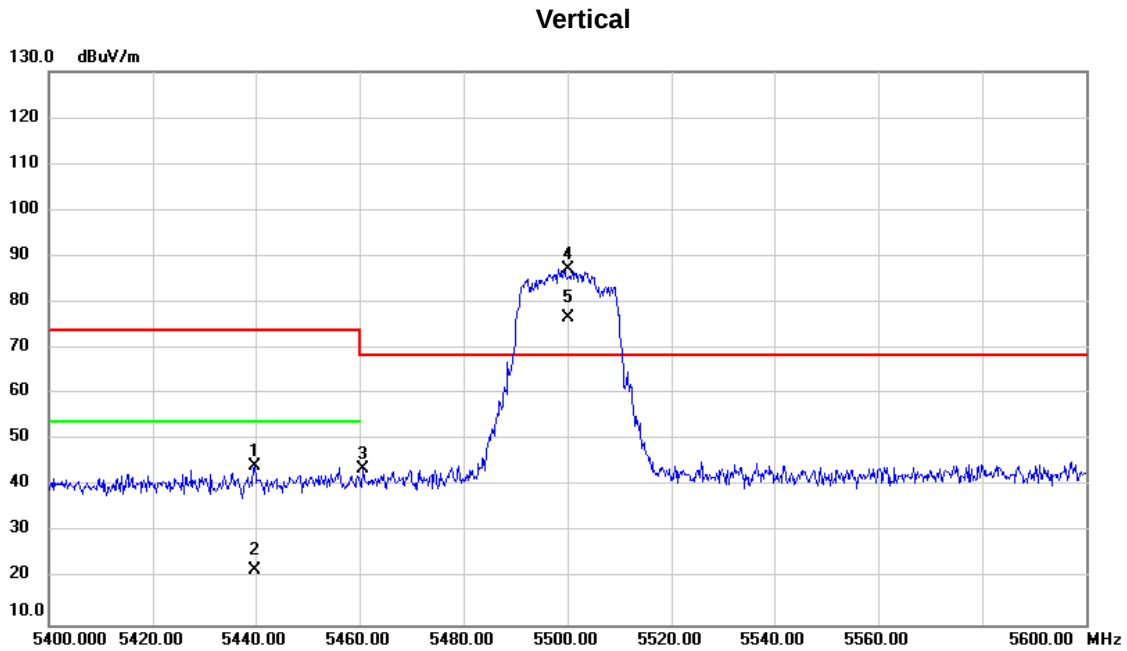


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5439.800	27.47	16.84	44.31	74.00	-29.69	peak	
2		5439.800	4.95	16.84	21.79	54.00	-32.21	AVG	
3		5460.600	26.75	16.90	43.65	68.30	-24.65	peak	
4	*	5500.000	70.16	16.98	87.14	68.30	18.84	peak	No Limit
5	X	5500.000	59.69	16.98	76.67	68.30	8.37	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW20) Mode 5700MHz

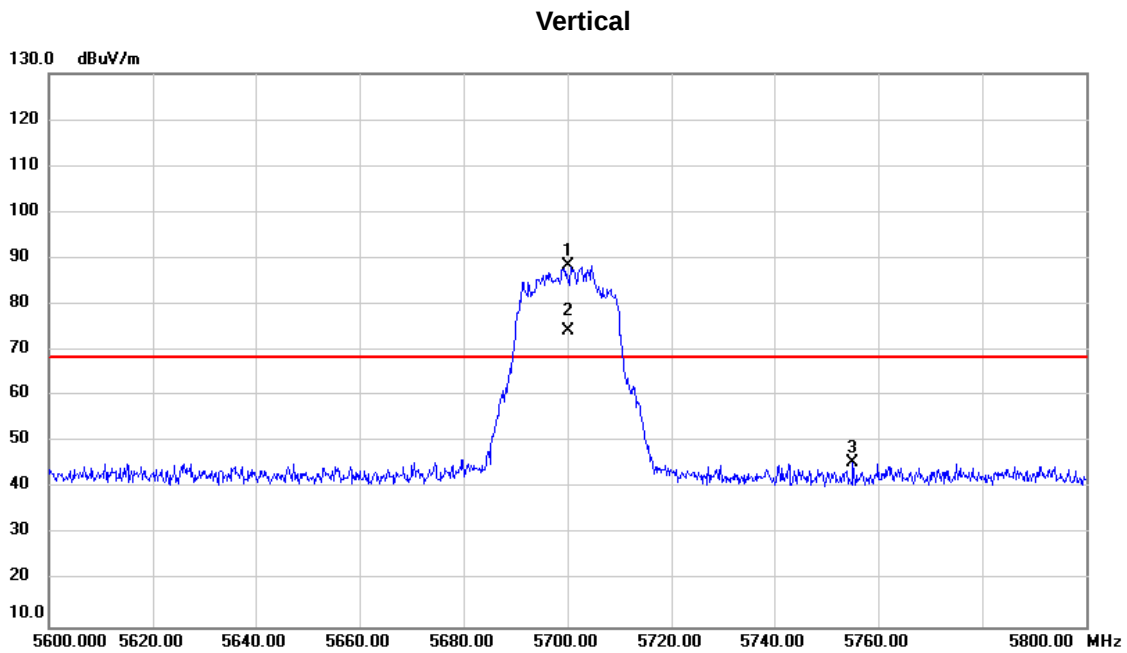


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5700.000	70.97	17.58	88.55	68.30	20.25	peak	No Limit
2	X	5700.000	56.86	17.58	74.44	68.30	6.14	AVG	No Limit
3		5755.000	27.67	17.74	45.41	68.30	-22.89	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ax (HEW20) Mode 5745MHz

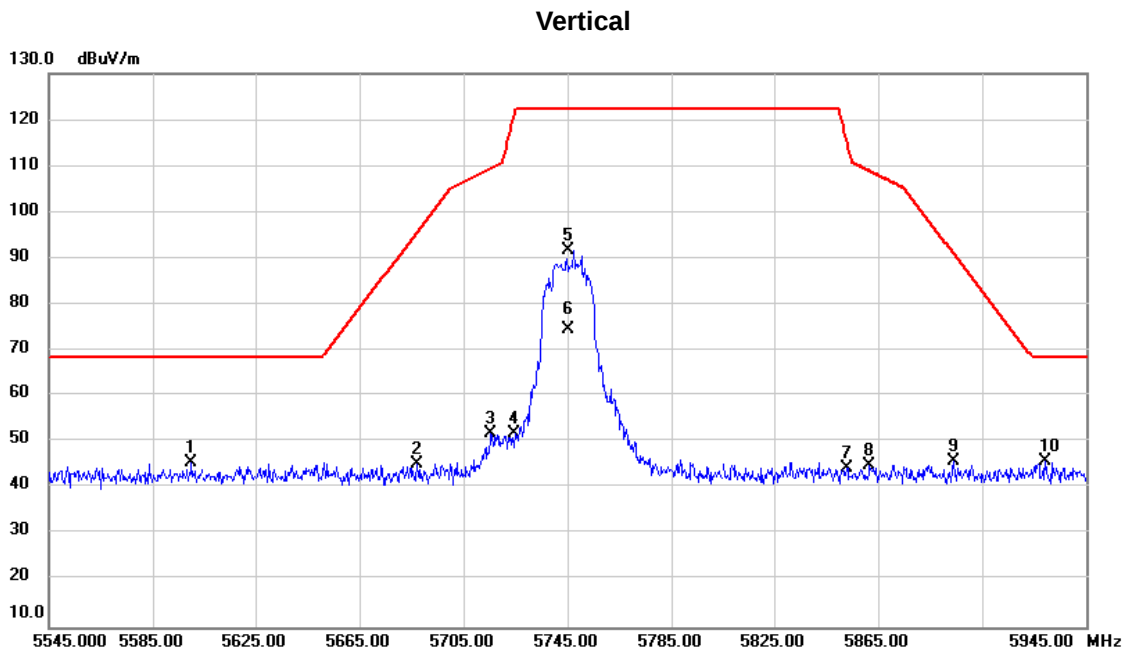


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5599.800	28.35	17.28	45.63	68.20	-22.57	peak	
2		5687.000	27.60	17.55	45.15	95.58	-50.43	peak	
3		5715.400	34.36	17.62	51.98	109.51	-57.53	peak	
4		5724.600	34.24	17.64	51.88	121.29	-69.41	peak	
5		5745.000	74.03	17.71	91.74	122.20	-30.46	peak	No Limit
6		5745.000	57.02	17.71	74.73	122.20	-47.47	AVG	No Limit
7		5853.000	26.32	18.04	44.36	115.36	-71.00	peak	
8		5861.400	26.96	18.06	45.02	109.01	-63.99	peak	
9		5893.800	27.77	18.16	45.93	91.29	-45.36	peak	
10	*	5929.000	27.67	18.26	45.93	68.20	-22.27	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ax (HEW20)Mode 5825MHz

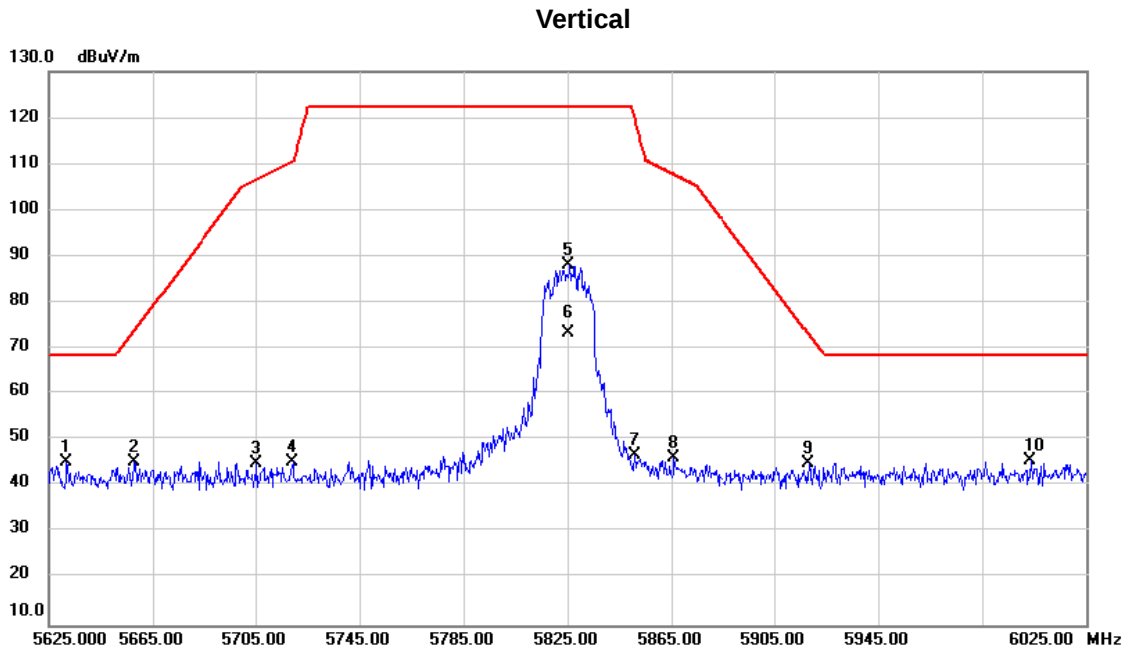


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5631.800	27.84	17.38	45.22	68.20	-22.98	peak	
2		5657.800	27.84	17.46	45.30	73.97	-28.67	peak	
3		5705.400	27.47	17.59	45.06	106.71	-61.65	peak	
4		5719.400	27.63	17.63	45.26	110.63	-65.37	peak	
5		5825.000	70.14	17.96	88.10	122.20	-34.10	peak	No Limit
6		5825.000	55.59	17.96	73.55	122.20	-48.65	AVG	No Limit
7		5850.600	28.86	18.03	46.89	120.83	-73.94	peak	
8		5865.800	28.05	18.07	46.12	107.78	-61.66	peak	
9		5918.200	26.67	18.23	44.90	73.23	-28.33	peak	
10	*	6003.400	27.00	18.47	45.47	68.20	-22.73	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW40) Mode 5190MHz

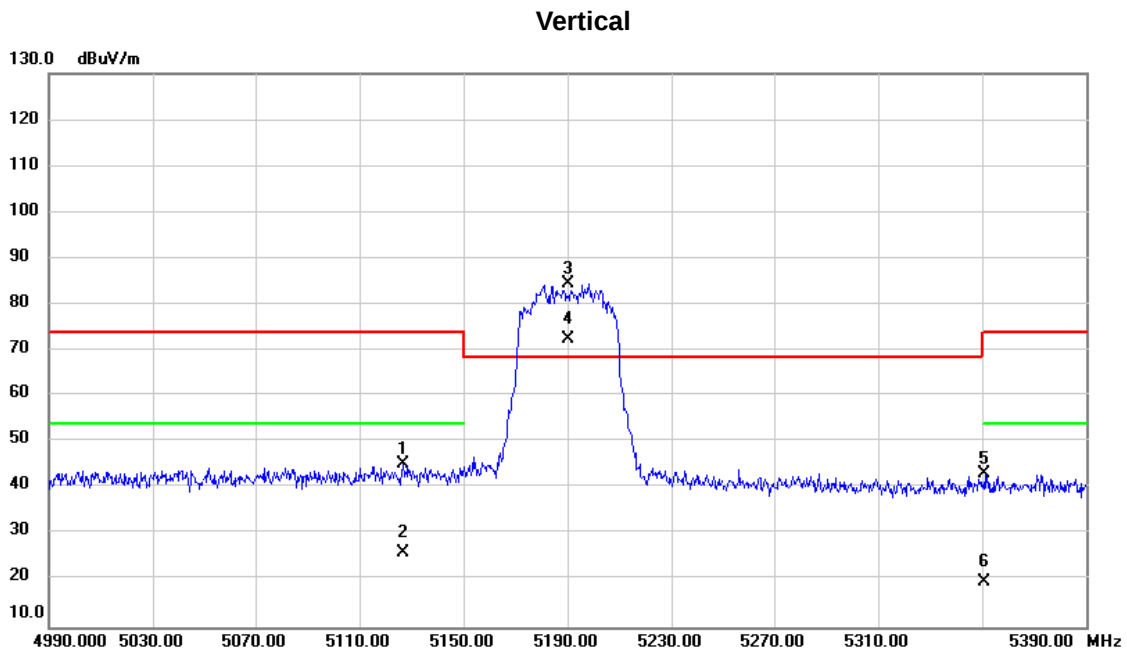


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5126.800	29.02	16.10	45.12	74.00	-28.88	peak	
2		5126.800	10.04	16.10	26.14	54.00	-27.86	AVG	
3	*	5190.000	68.31	16.25	84.56	68.30	16.26	peak	No Limit
4	X	5190.000	56.34	16.25	72.59	68.30	4.29	AVG	No Limit
5		5350.800	26.62	16.63	43.25	74.00	-30.75	peak	
6		5350.800	3.02	16.63	19.65	54.00	-34.35	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW40) Mode 5230MHz

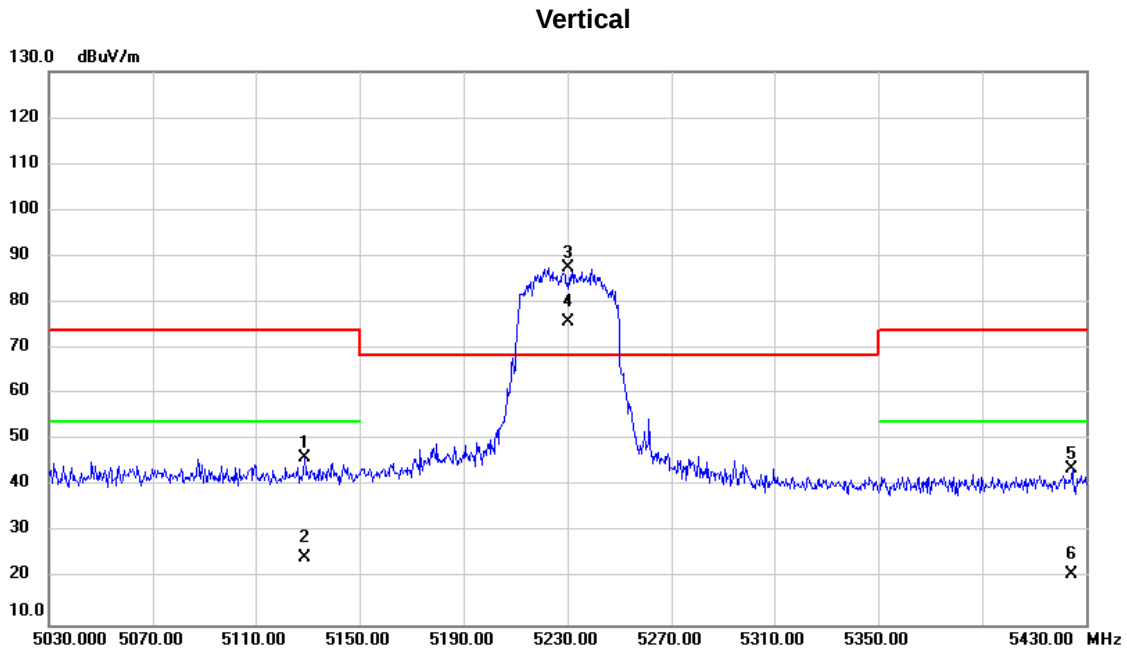


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5128.800	30.03	16.10	46.13	74.00	-27.87	peak	
2		5128.800	8.55	16.10	24.65	54.00	-29.35	AVG	
3	*	5230.000	71.20	16.34	87.54	68.30	19.24	peak	No Limit
4	X	5230.000	59.59	16.34	75.93	68.30	7.63	AVG	No Limit
5		5424.400	26.96	16.80	43.76	74.00	-30.24	peak	
6		5424.400	4.00	16.80	20.80	54.00	-33.20	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW40) Mode 5270MHz

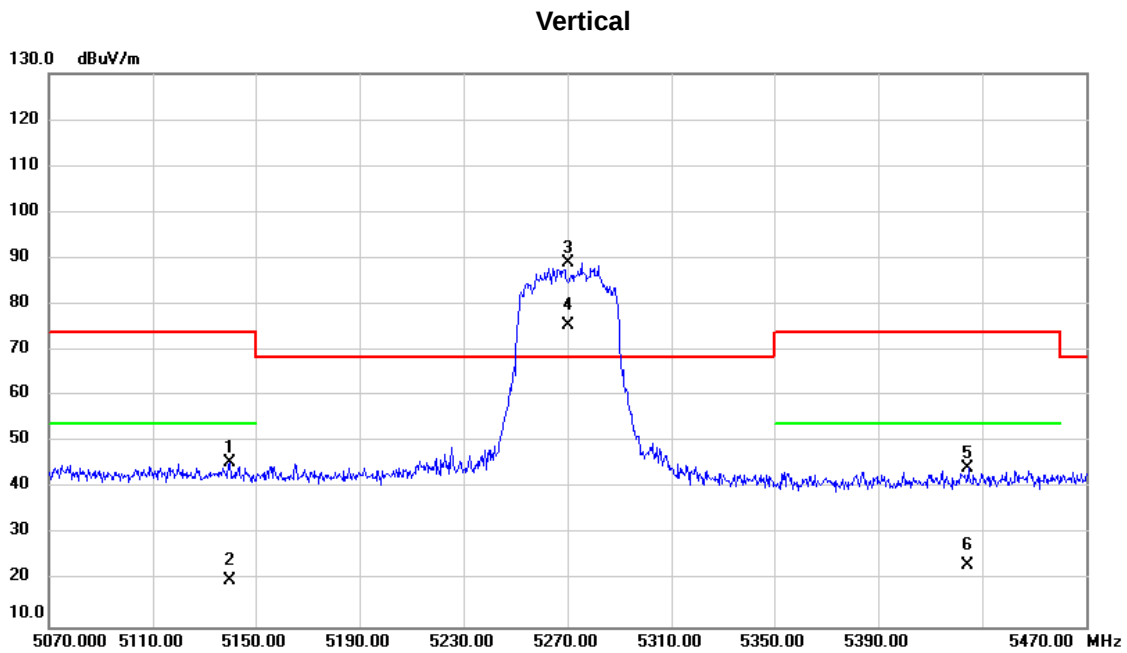


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5140.000	29.30	16.13	45.43	74.00	-28.57	peak	
2		5140.000	3.88	16.13	20.01	54.00	-33.99	AVG	
3	*	5270.000	72.46	16.45	88.91	68.30	20.61	peak	No Limit
4	X	5270.000	59.07	16.45	75.52	68.30	7.22	AVG	No Limit
5		5424.400	27.56	16.80	44.36	74.00	-29.64	peak	
6		5424.400	6.47	16.80	23.27	54.00	-30.73	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW40) Mode 5310MHz

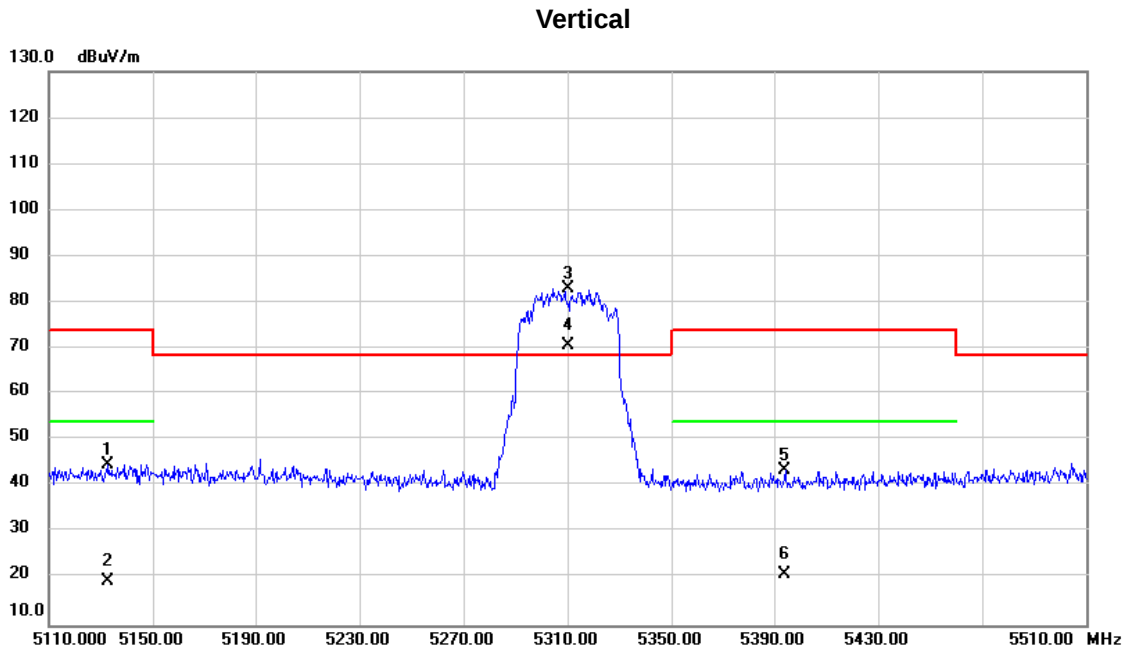


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5132.800	28.56	16.11	44.67	74.00	-29.33	peak	
2		5132.800	3.29	16.11	19.40	54.00	-34.60	AVG	
3	*	5310.000	66.47	16.53	83.00	68.30	14.70	peak	No Limit
4	X	5310.000	54.34	16.53	70.87	68.30	2.57	AVG	No Limit
5		5394.000	26.59	16.73	43.32	74.00	-30.68	peak	
6		5394.000	4.29	16.73	21.02	54.00	-32.98	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW40) Mode 5510MHz

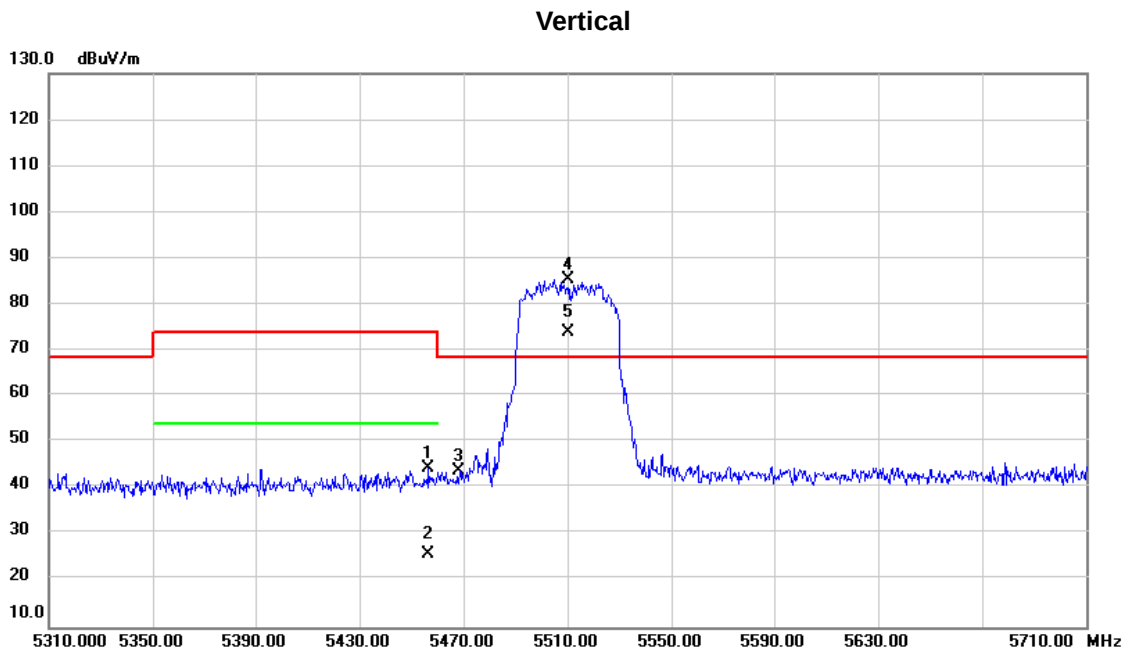


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5456.400	27.54	16.88	44.42	74.00	-29.58	peak	
2		5456.400	8.83	16.88	25.71	54.00	-28.29	AVG	
3		5468.400	26.73	16.91	43.64	68.30	-24.66	peak	
4	*	5510.000	68.54	17.01	85.55	68.30	17.25	peak	No Limit
5	X	5510.000	56.96	17.01	73.97	68.30	5.67	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW40) Mode 5670MHz

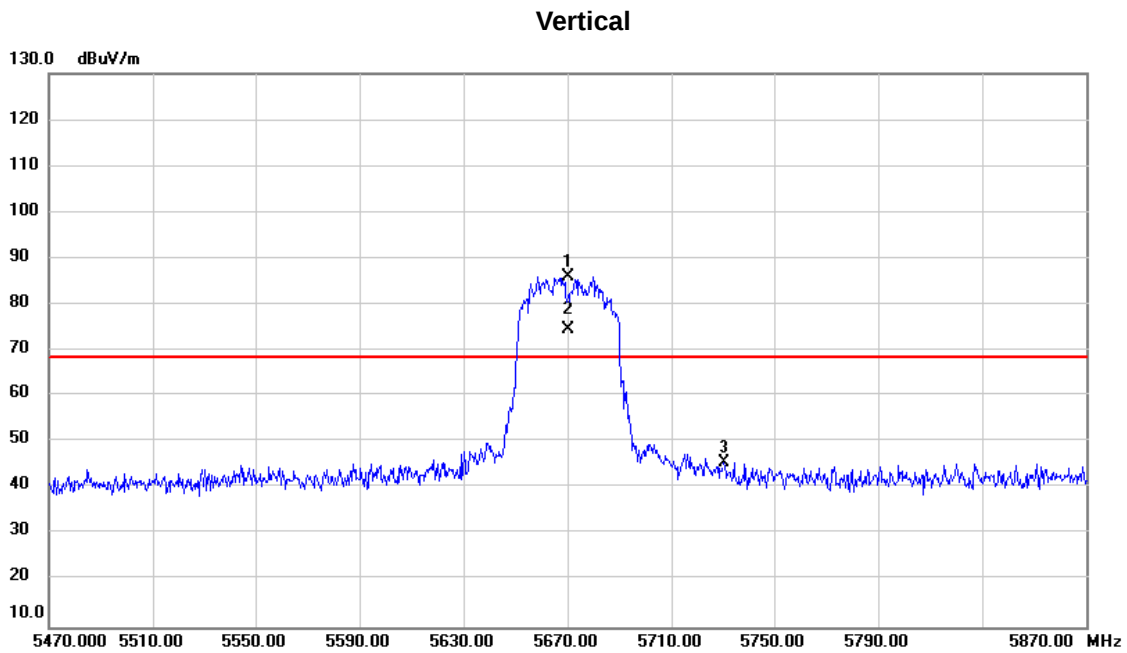


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5670.000	68.65	17.49	86.14	68.30	17.84	peak	No Limit
2	X	5670.000	57.13	17.49	74.62	68.30	6.32	AVG	No Limit
3		5730.400	27.80	17.67	45.47	68.30	-22.83	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ax (HEW40) Mode 5755MHz

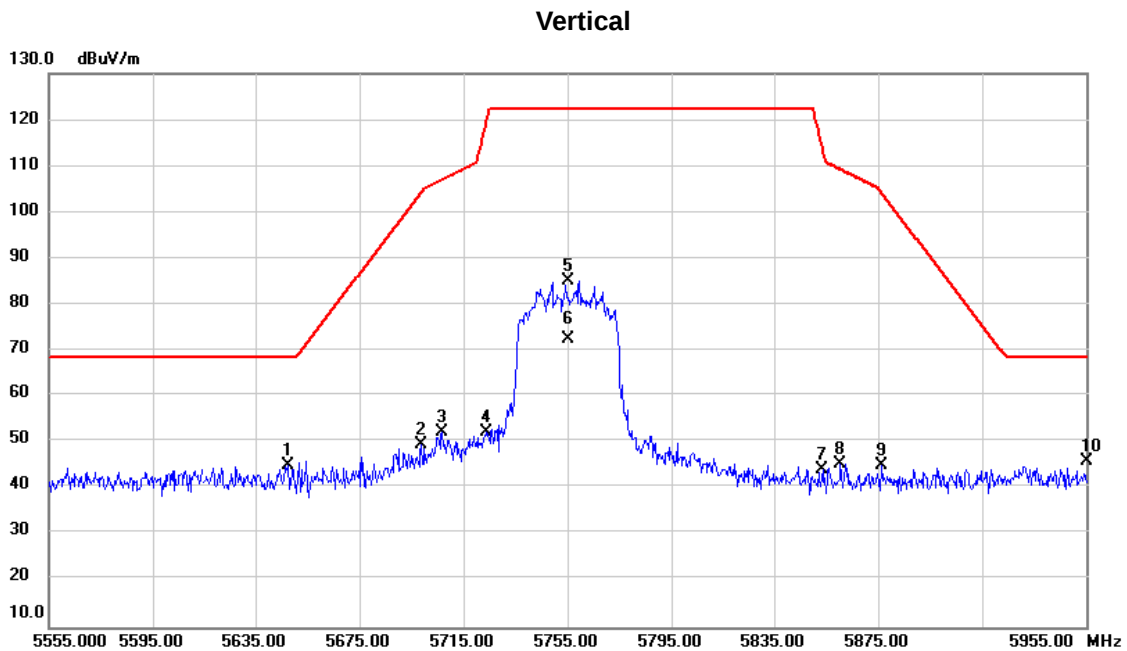


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5647.400	27.61	17.42	45.03	68.20	-23.17	peak	
2		5698.600	31.82	17.58	49.40	104.16	-54.76	peak	
3		5706.600	34.59	17.60	52.19	107.05	-54.86	peak	
4		5723.800	34.43	17.64	52.07	119.46	-67.39	peak	
5		5755.000	67.47	17.74	85.21	122.20	-36.99	peak	No Limit
6		5755.000	54.66	17.74	72.40	122.20	-49.80	AVG	No Limit
7		5853.400	26.05	18.04	44.09	114.45	-70.36	peak	
8		5860.200	27.23	18.06	45.29	109.34	-64.05	peak	
9		5876.200	26.83	18.11	44.94	104.31	-59.37	peak	
10	*	5955.000	27.41	18.33	45.74	68.20	-22.46	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ax (HEW40) Mode 5795MHz

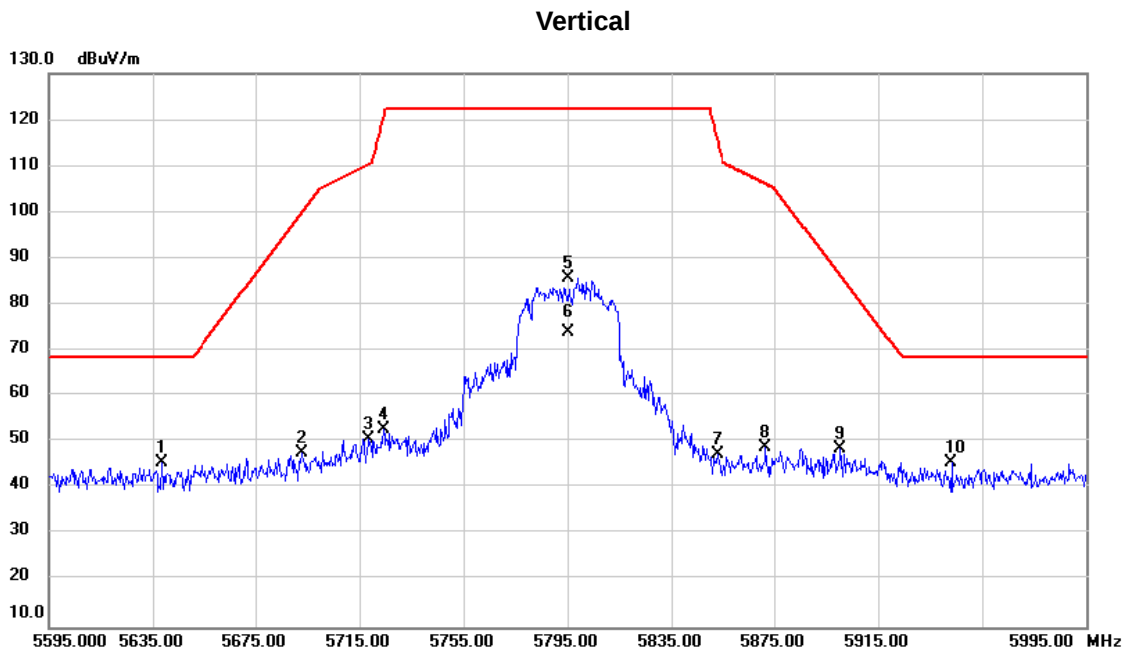


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5638.600	28.17	17.40	45.57	68.20	-22.63	peak	
2		5693.000	30.21	17.56	47.77	100.02	-52.25	peak	
3		5718.600	32.97	17.63	50.60	110.41	-59.81	peak	
4		5724.200	34.99	17.64	52.63	120.38	-67.75	peak	
5		5795.000	67.97	17.86	85.83	122.20	-36.37	peak	No Limit
6		5795.000	56.12	17.86	73.98	122.20	-48.22	AVG	No Limit
7		5852.600	29.20	18.04	47.24	116.27	-69.03	peak	
8		5871.400	30.83	18.10	48.93	106.21	-57.28	peak	
9		5900.200	30.52	18.17	48.69	86.55	-37.86	peak	
10	*	5943.000	27.34	18.30	45.64	68.20	-22.56	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW80) Mode 5210MHz

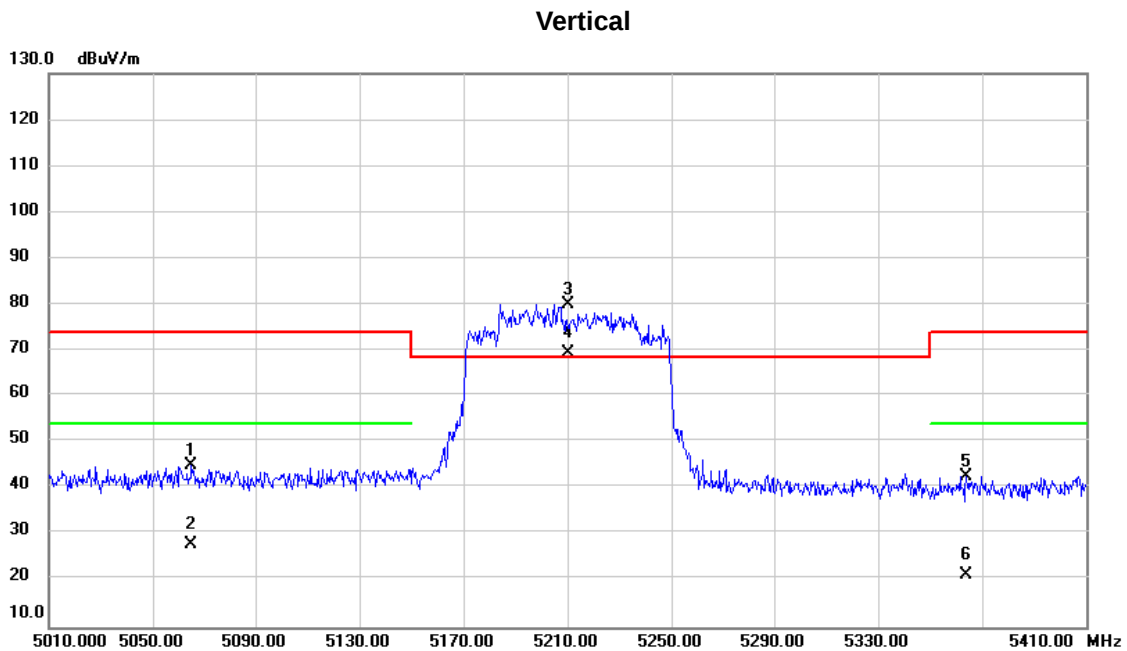


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5064.800	29.04	15.96	45.00	74.00	-29.00	peak	
2		5064.800	11.82	15.96	27.78	54.00	-26.22	AVG	
3	*	5210.000	63.81	16.30	80.11	68.30	11.81	peak	No Limit
4	X	5210.000	53.17	16.30	69.47	68.30	1.17	AVG	No Limit
5		5363.600	26.00	16.66	42.66	74.00	-31.34	peak	
6		5363.600	4.49	16.66	21.15	54.00	-32.85	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW80) Mode 5290MHz

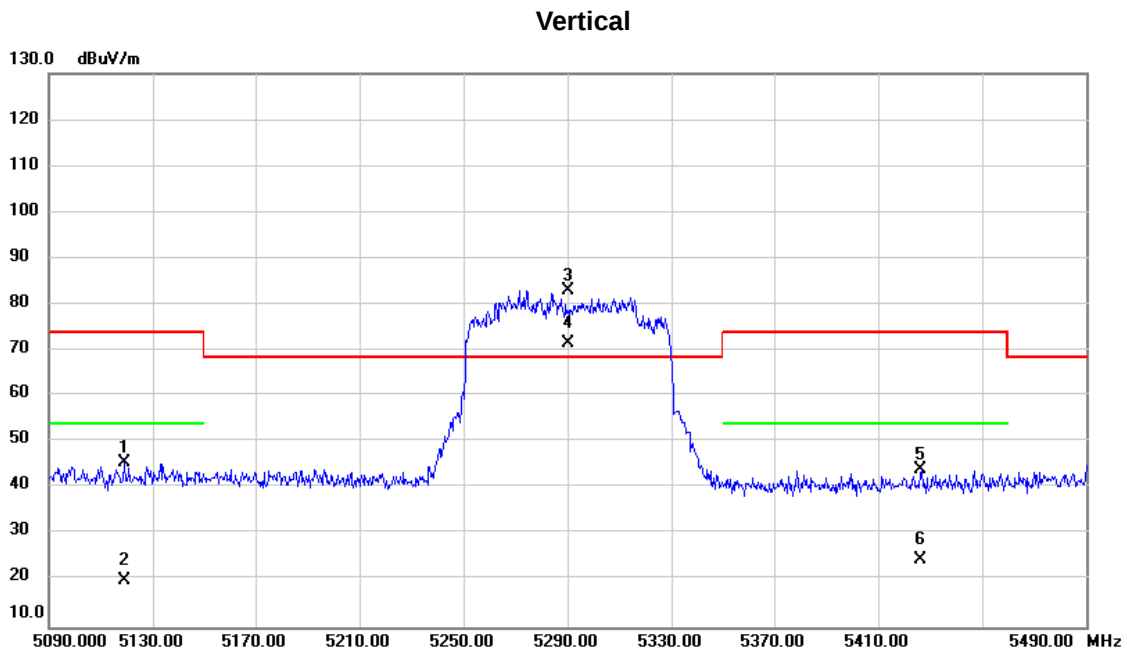


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5118.800	29.35	16.07	45.42	74.00	-28.58	peak	
2		5118.800	4.08	16.07	20.15	54.00	-33.85	AVG	
3	*	5290.000	66.62	16.49	83.11	68.30	14.81	peak	No Limit
4	X	5290.000	55.21	16.49	71.70	68.30	3.40	AVG	No Limit
5		5426.400	27.21	16.81	44.02	74.00	-29.98	peak	
6		5426.400	7.60	16.81	24.41	54.00	-29.59	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW80) Mode 5530MHz

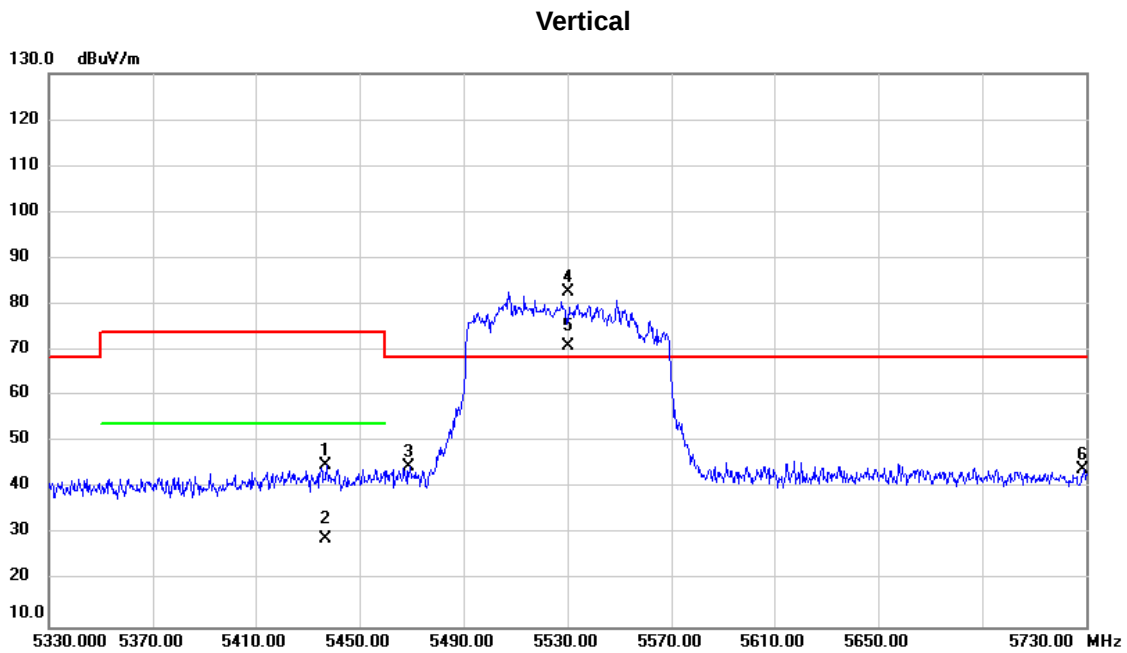

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5437.200	28.02	16.84	44.86	74.00	-29.14	peak	
2		5437.200	12.15	16.84	28.99	54.00	-25.01	AVG	
3		5469.200	27.80	16.91	44.71	68.30	-23.59	peak	
4	*	5530.000	65.70	17.07	82.77	68.30	14.47	peak	No Limit
5	X	5530.000	54.12	17.07	71.19	68.30	2.89	AVG	No Limit
6		5728.800	26.42	17.66	44.08	68.30	-24.22	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW80) Mode 5610MHz

Vertical

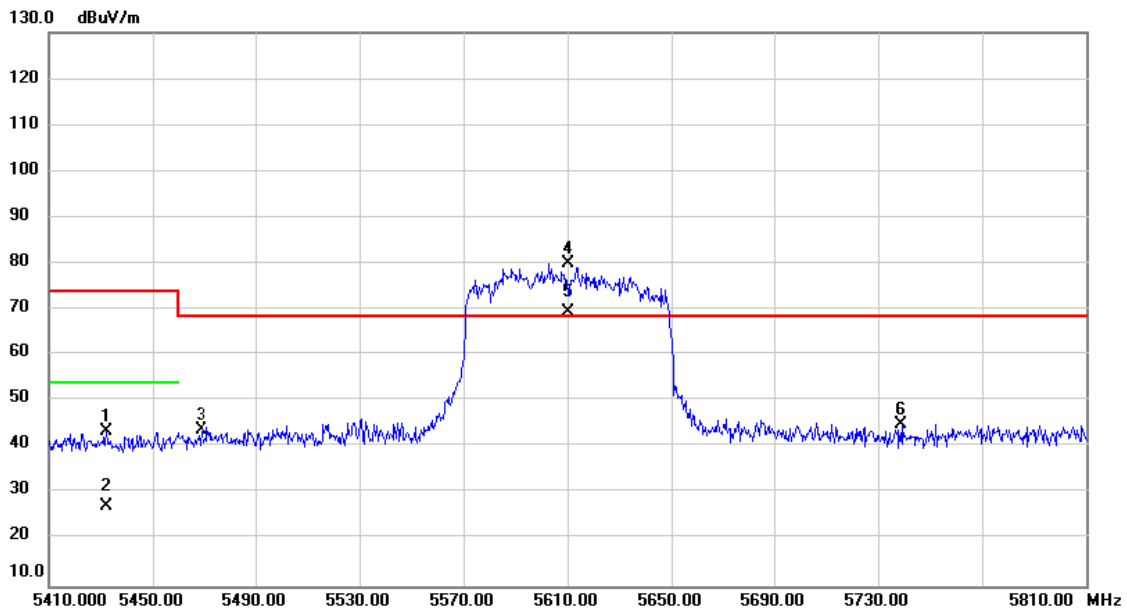


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5432.000	26.68	16.83	43.51	74.00	-30.49	peak	
2		5432.000	10.35	16.83	27.18	54.00	-26.82	AVG	
3		5469.200	26.79	16.91	43.70	68.30	-24.60	peak	
4	*	5610.000	62.69	17.32	80.01	68.30	11.71	peak	No Limit
5	X	5610.000	52.10	17.32	69.42	68.30	1.12	AVG	No Limit
6		5738.800	27.23	17.69	44.92	68.30	-23.38	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ax (HEW80) Mode 5775MHz

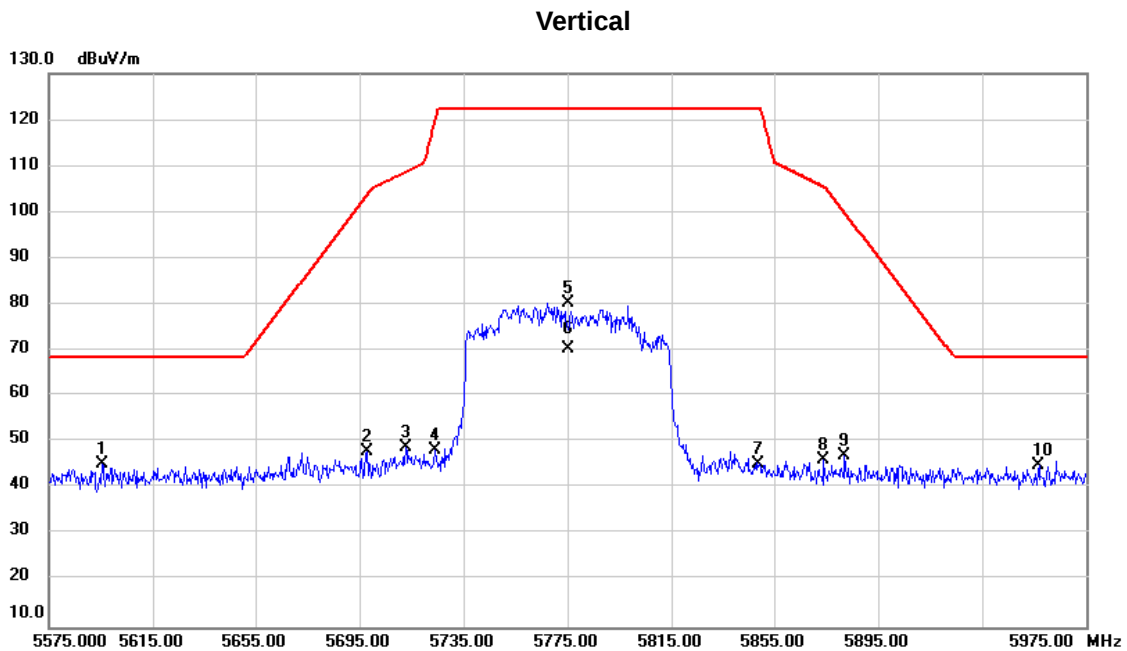

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5595.400	27.96	17.27	45.23	68.20	-22.97	peak	
2		5697.800	30.24	17.57	47.81	103.57	-55.76	peak	
3		5712.600	31.18	17.61	48.79	108.73	-59.94	peak	
4		5723.800	30.50	17.64	48.14	119.46	-71.32	peak	
5		5775.000	62.54	17.80	80.34	122.20	-41.86	peak	No Limit
6		5775.000	52.75	17.80	70.55	122.20	-51.65	AVG	No Limit
7		5849.000	27.33	18.03	45.36	122.20	-76.84	peak	
8		5873.800	28.12	18.10	46.22	105.54	-59.32	peak	
9		5881.800	28.86	18.12	46.98	100.17	-53.19	peak	
10		5956.600	26.54	18.34	44.88	68.20	-23.32	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW160) Mode 5250MHz

Vertical

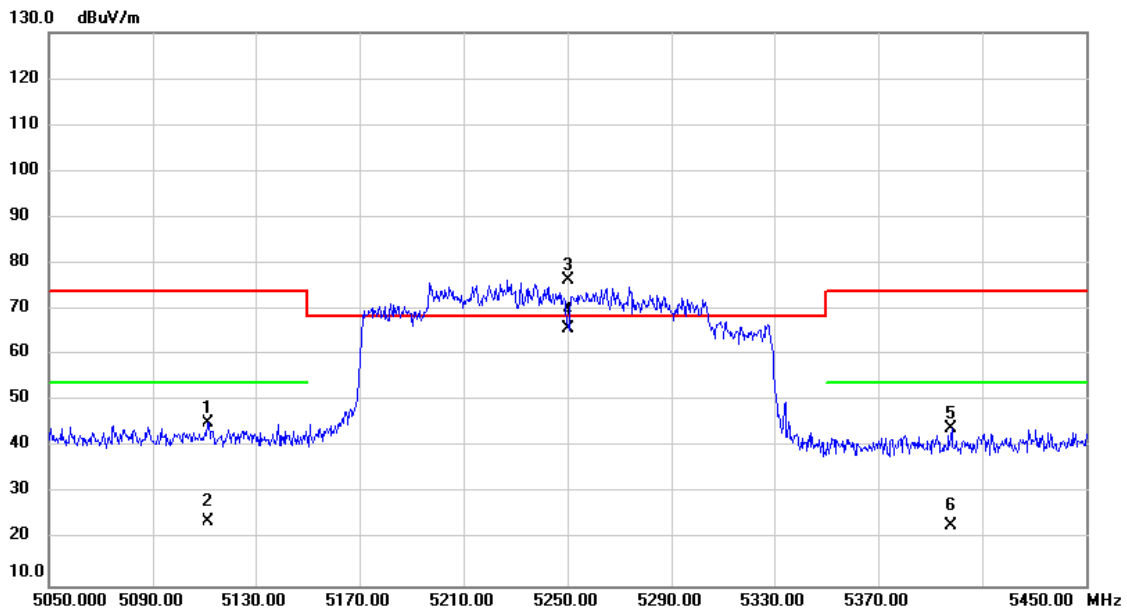


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5111.600	29.20	16.06	45.26	74.00	-28.74	peak	
2		5111.600	7.90	16.06	23.96	54.00	-30.04	AVG	
3	*	5250.000	59.98	16.40	76.38	68.30	8.08	peak	No Limit
4		5250.000	49.32	16.40	65.72	68.30	-2.58	AVG	No Limit
5		5398.000	27.18	16.75	43.93	74.00	-30.07	peak	
6		5398.000	6.22	16.75	22.97	54.00	-31.03	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW160) Mode 5570MHz

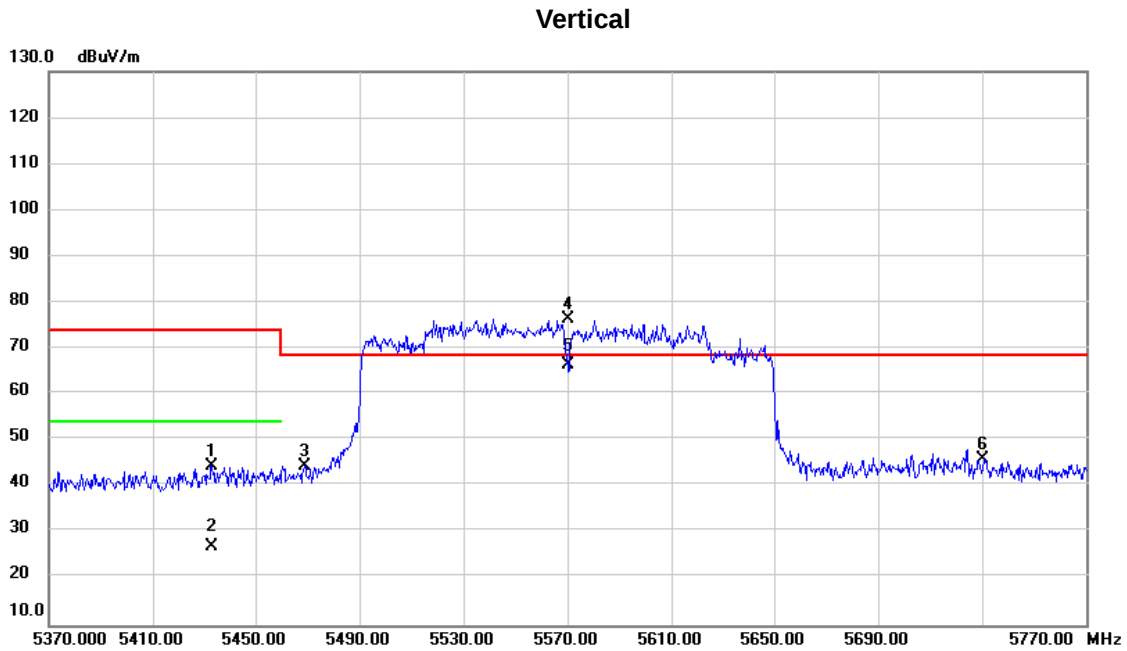

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5433.200	27.49	16.83	44.32	74.00	-29.68	peak	
2		5433.200	10.24	16.83	27.07	54.00	-26.93	AVG	
3		5468.800	27.52	16.91	44.43	68.30	-23.87	peak	
4	*	5570.000	59.15	17.19	76.34	68.30	8.04	peak	No Limit
5		5570.000	49.14	17.19	66.33	68.30	-1.97	AVG	No Limit
6		5730.400	28.09	17.67	45.76	68.30	-22.54	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/ TX a Mode 5180MHz

Vertical

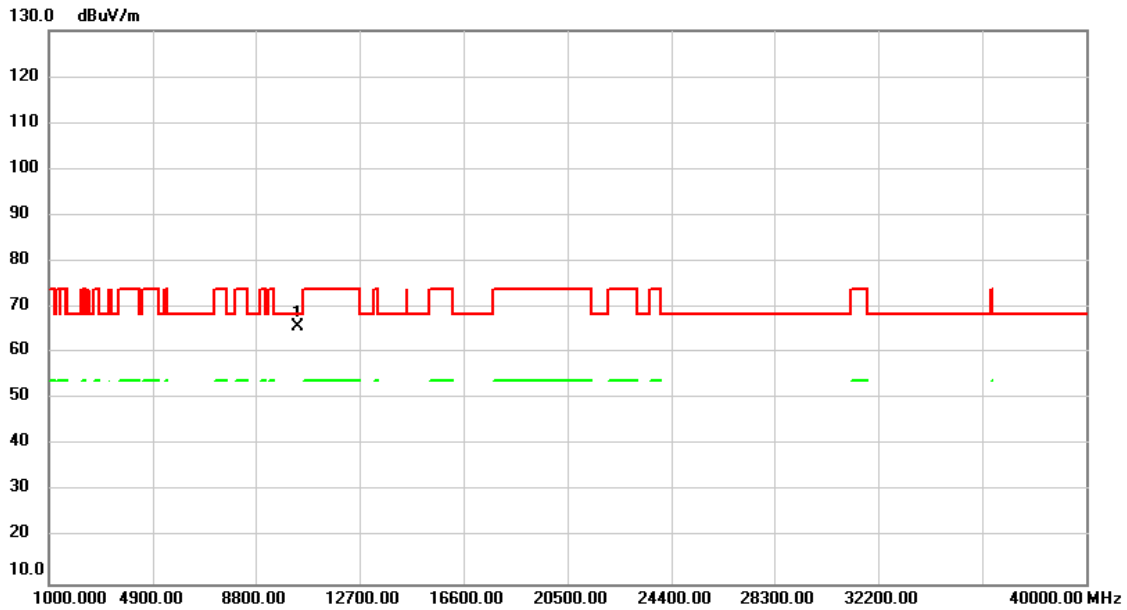


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.000	52.12	13.51	65.63	68.30	-2.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/ TX a Mode 5180MHz

Horizontal

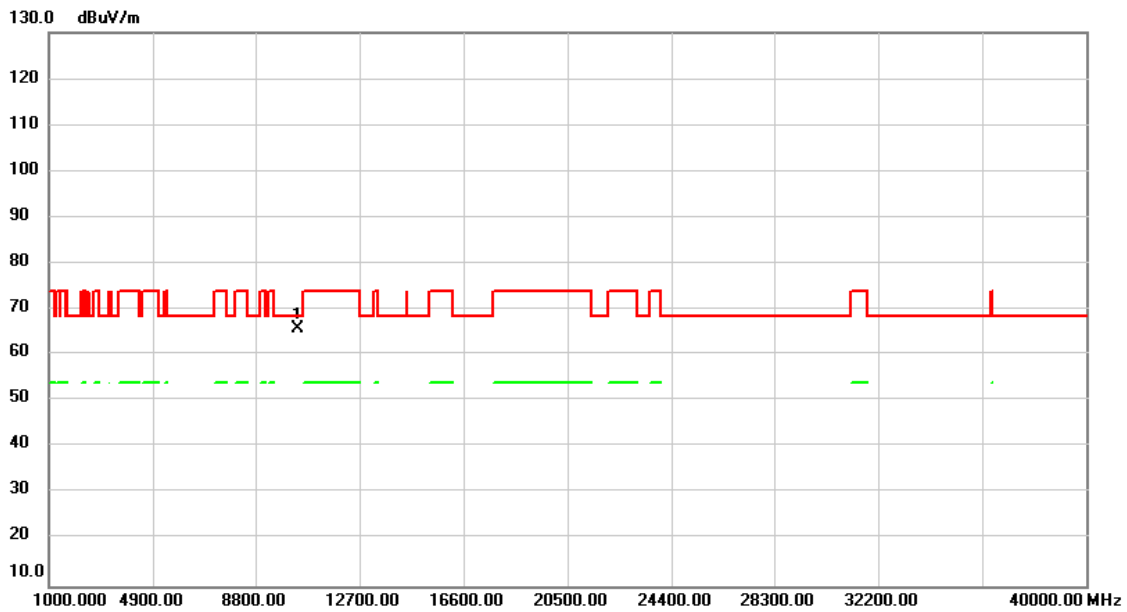


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.000	52.05	13.51	65.56	68.30	-2.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/ TX a Mode 5200MHz

Vertical

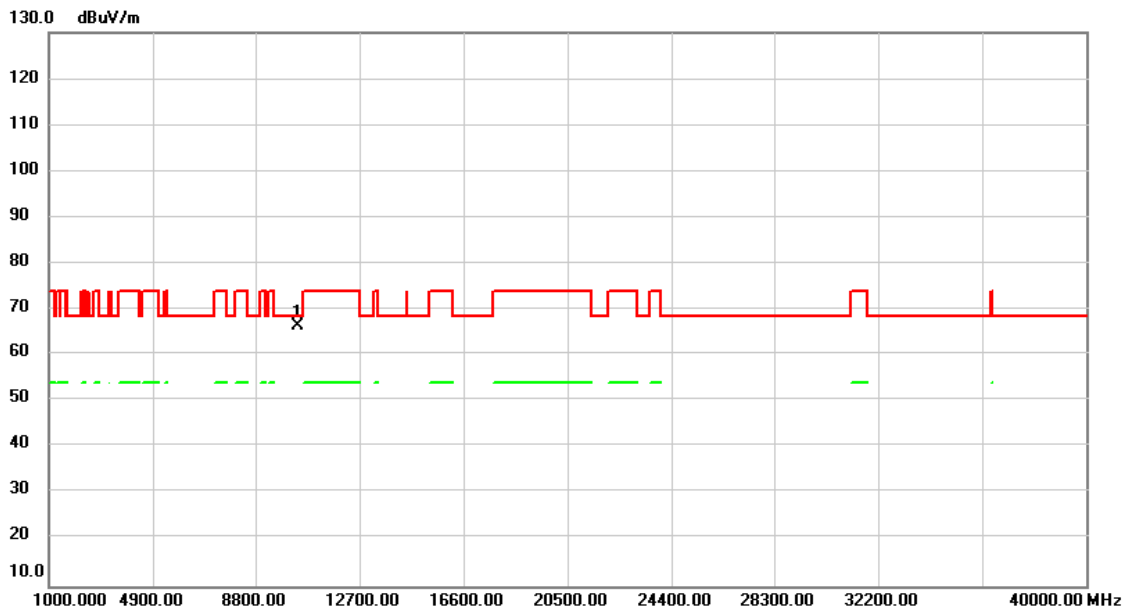


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.000	52.71	13.55	66.26	68.30	-2.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/ TX a Mode 5200MHz

Horizontal

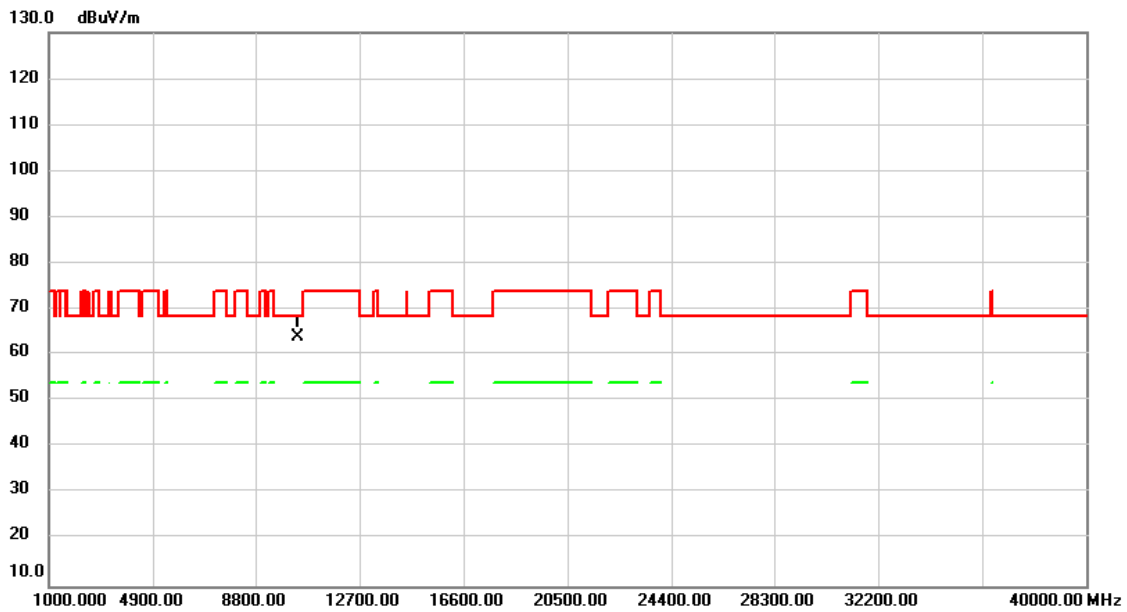


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.000	50.34	13.55	63.89	68.30	-4.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/ TX a Mode 5240MHz

Vertical

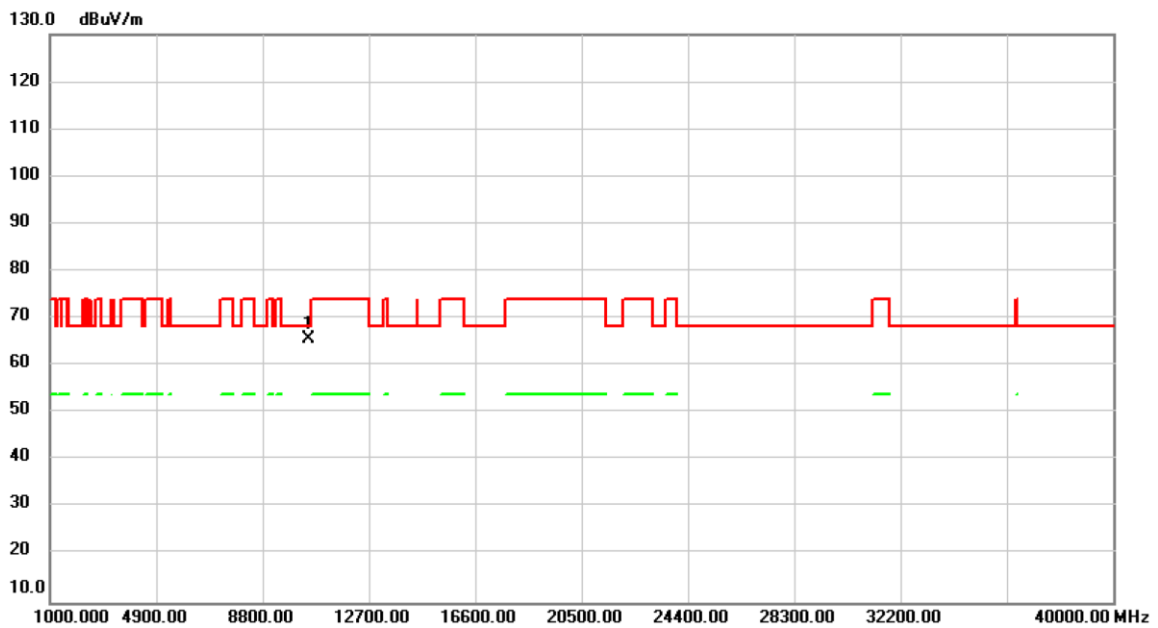


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10480.000	52.12	13.63	65.75	68.30	-2.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/ TX a Mode 5240MHz

Horizontal

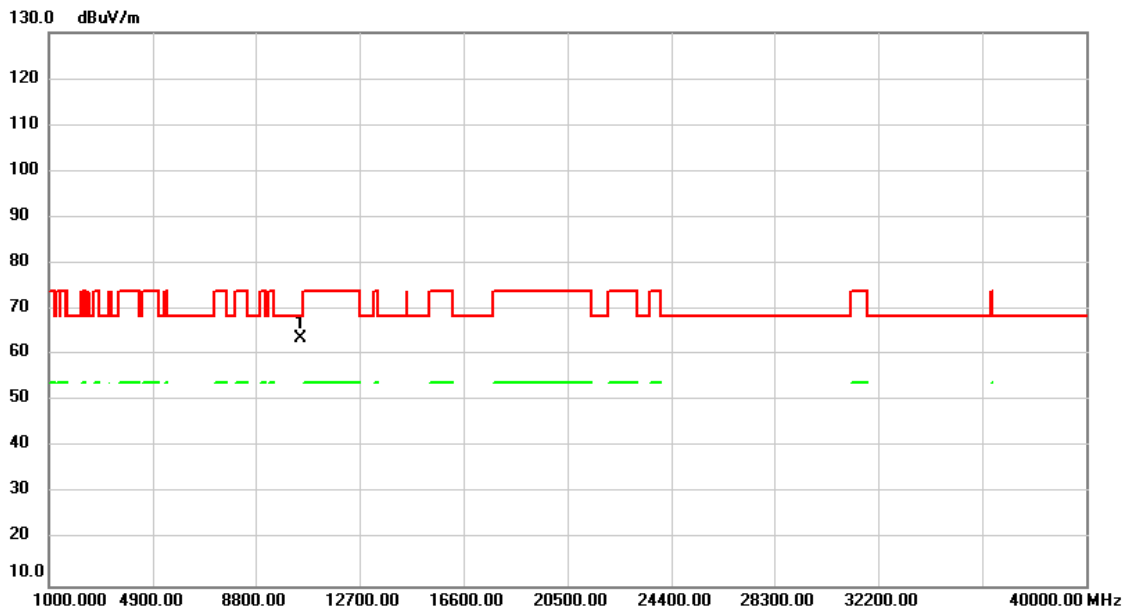


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.000	49.87	13.63	63.50	68.30	-4.80	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/ TX a Mode 5260MHz

Vertical

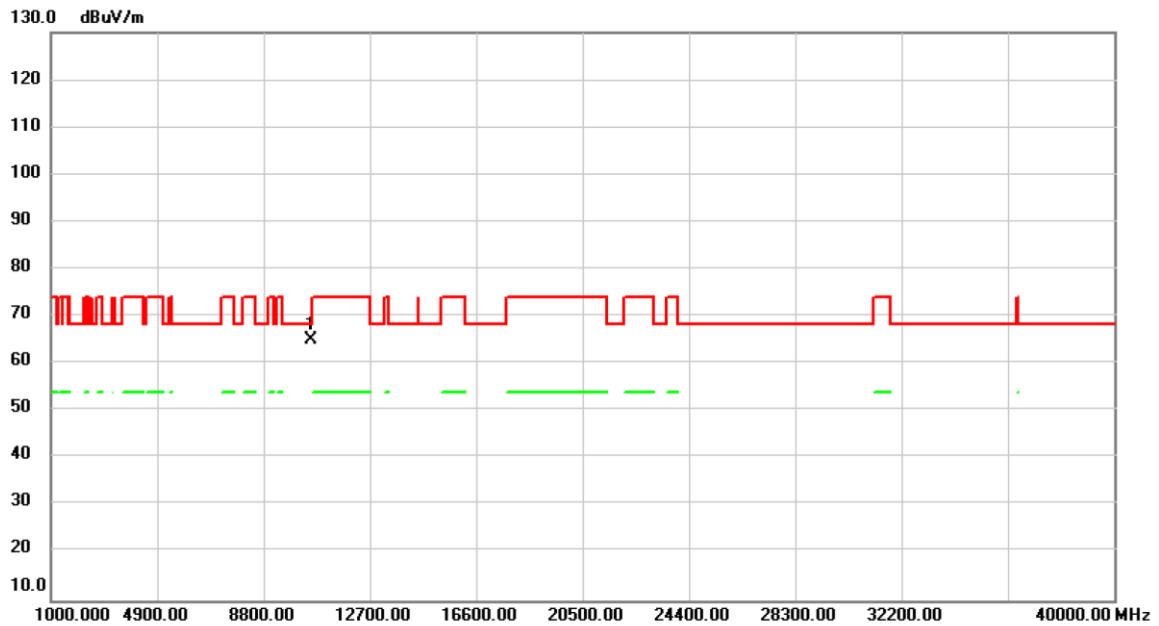


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10520.000	51.37	13.66	65.03	68.30	-3.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/ TX a Mode 5260MHz

Horizontal

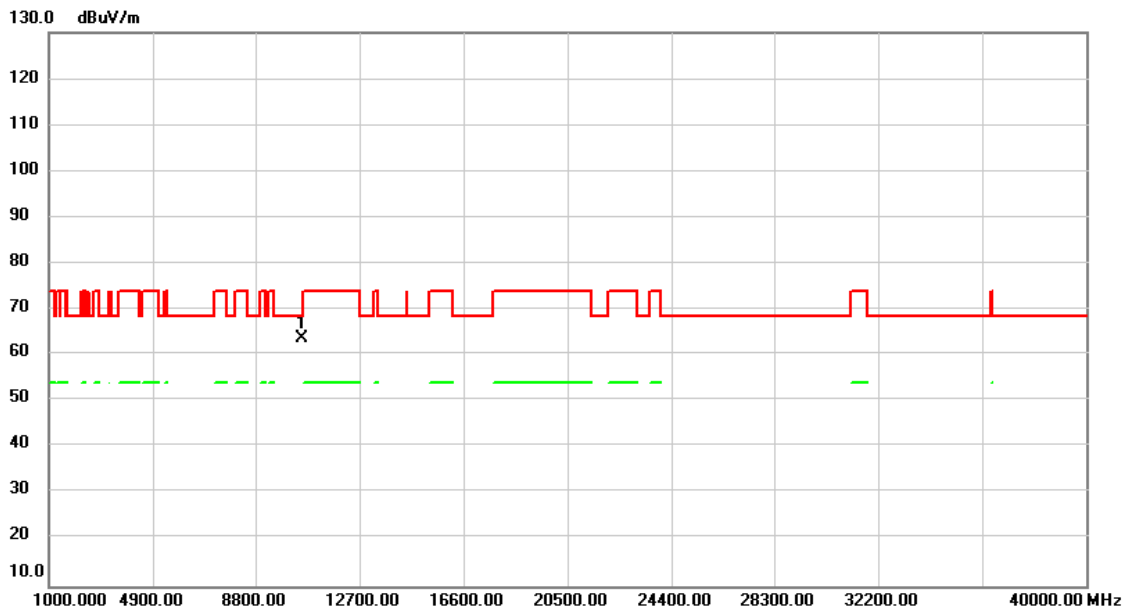


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.000	49.97	13.66	63.63	68.30	-4.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/ TX a Mode 5300MHz

Vertical

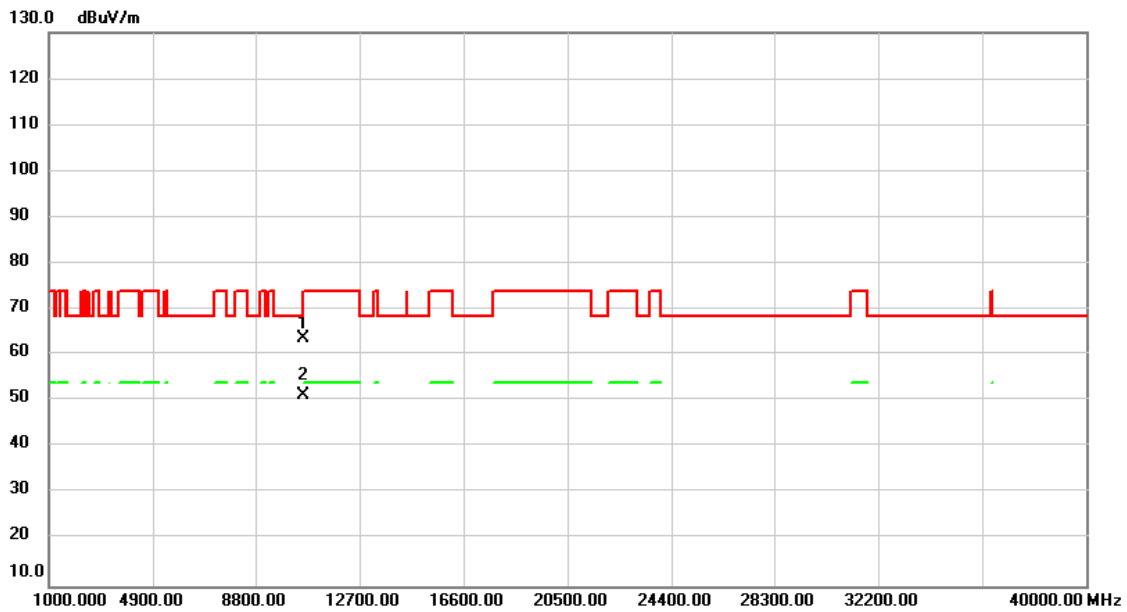


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	49.96	13.70	63.66	68.30	-4.64	peak	
2	*	10600.000	37.45	13.70	51.15	54.00	-2.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/ TX a Mode 5300MHz

Horizontal

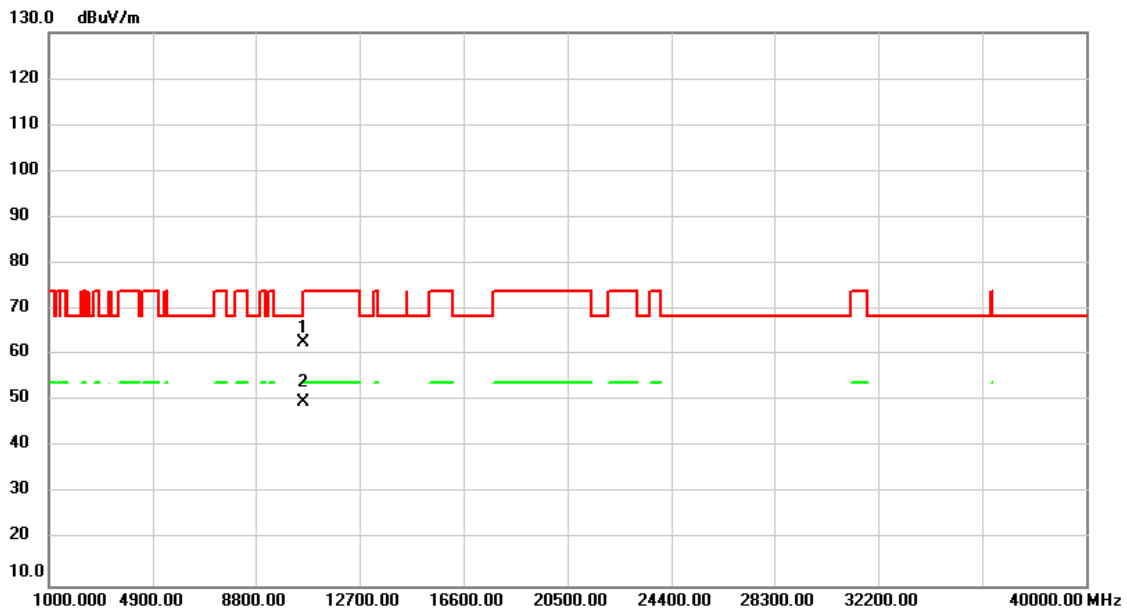

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	49.00	13.70	62.70	68.30	-5.60	peak	
2	*	10600.000	36.16	13.70	49.86	54.00	-4.14	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A/ TX a Mode 5320MHz
-----------	----------------------------

Vertical

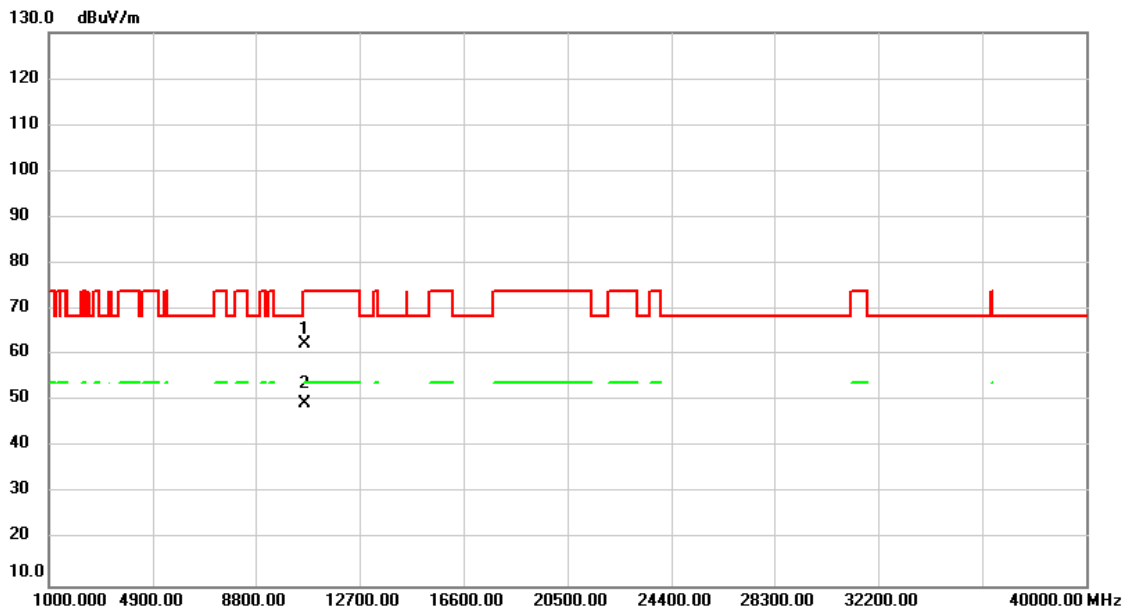

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.000	48.74	13.73	62.47	74.00	-11.53	peak	
2	*	10640.000	35.70	13.73	49.43	54.00	-4.57	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/ TX a Mode 5320MHz

Horizontal

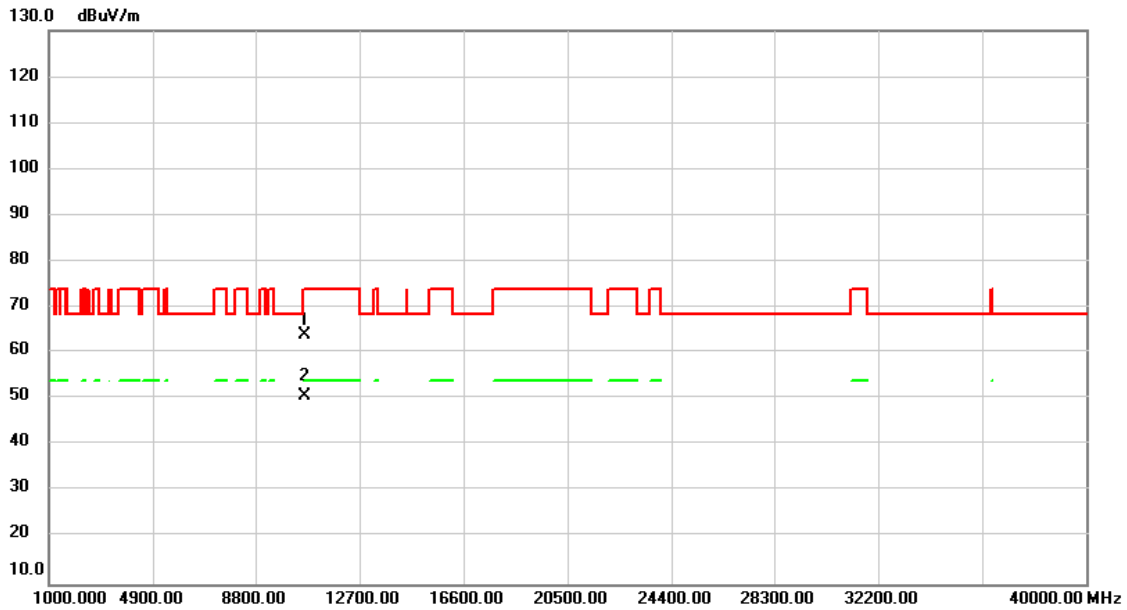


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.000	50.15	13.73	63.88	74.00	-10.12	peak	
2	*	10640.000	36.98	13.73	50.71	54.00	-3.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/ TX a Mode 5500MHz
-----------	----------------------------

Vertical

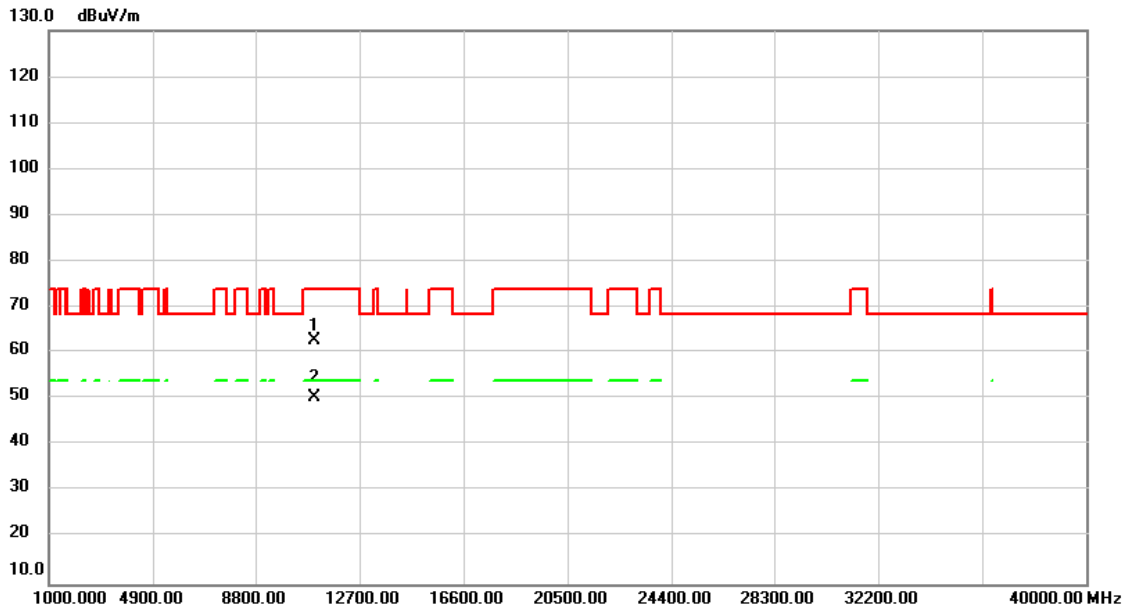


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	48.65	13.92	62.57	74.00	-11.43	peak	
2	*	11000.000	36.35	13.92	50.27	54.00	-3.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX a Mode 5500MHz

Horizontal

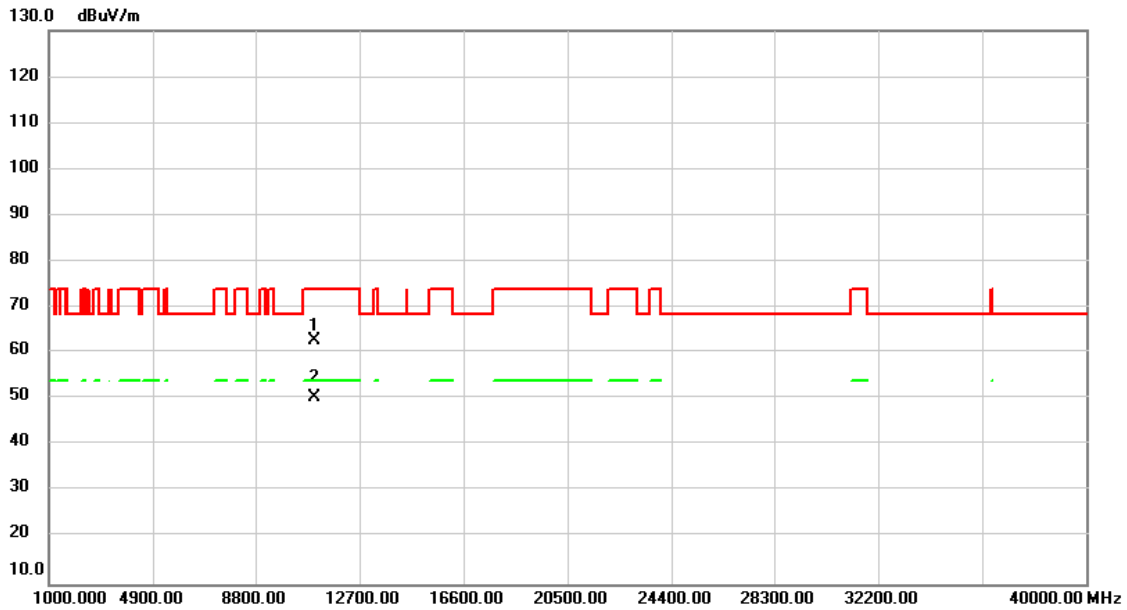

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	48.69	13.92	62.61	74.00	-11.39	peak	
2	*	11000.000	36.40	13.92	50.32	54.00	-3.68	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX a Mode 5580MHz

Vertical

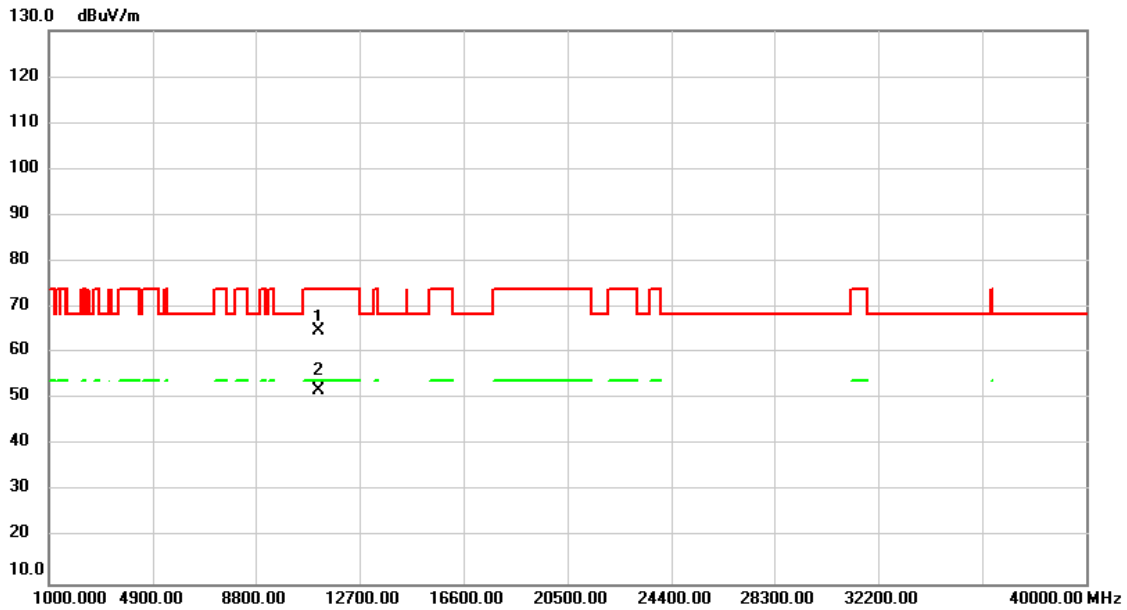


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.000	50.71	14.13	64.84	74.00	-9.16	peak	
2	*	11160.000	37.86	14.13	51.99	54.00	-2.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX a Mode 5580MHz

Horizontal

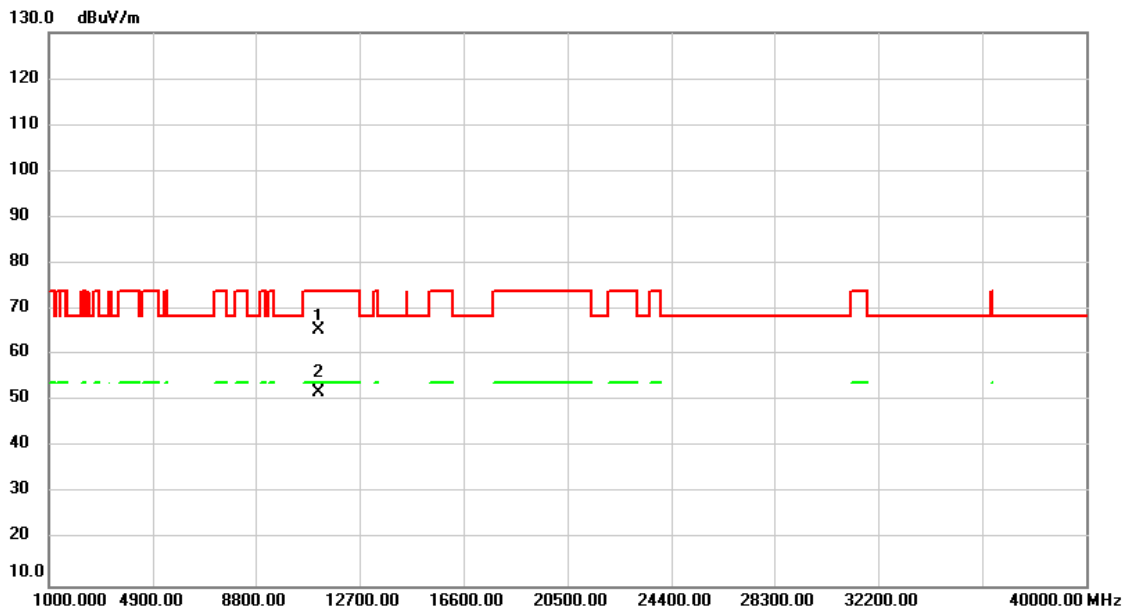

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.000	51.29	14.13	65.42	74.00	-8.58	peak	
2	*	11160.000	37.60	14.13	51.73	54.00	-2.27	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/ TX a Mode 5700MHz
-----------	----------------------------

Vertical

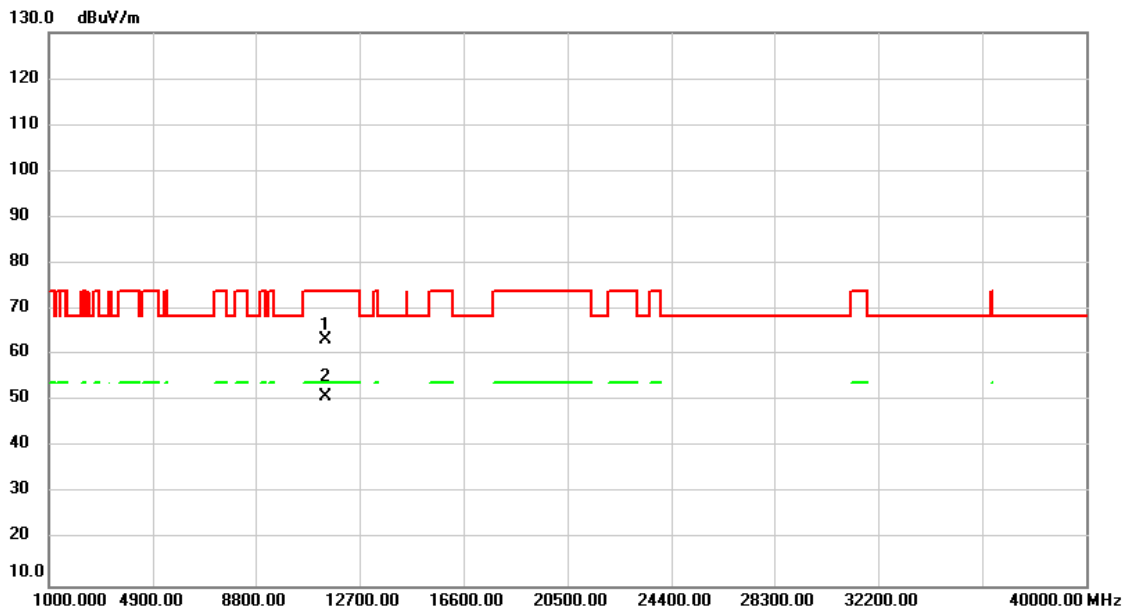


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.000	48.96	14.44	63.40	74.00	-10.60	peak	
2	*	11400.000	36.49	14.44	50.93	54.00	-3.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/ TX a Mode 5700MHz
-----------	----------------------------

Horizontal

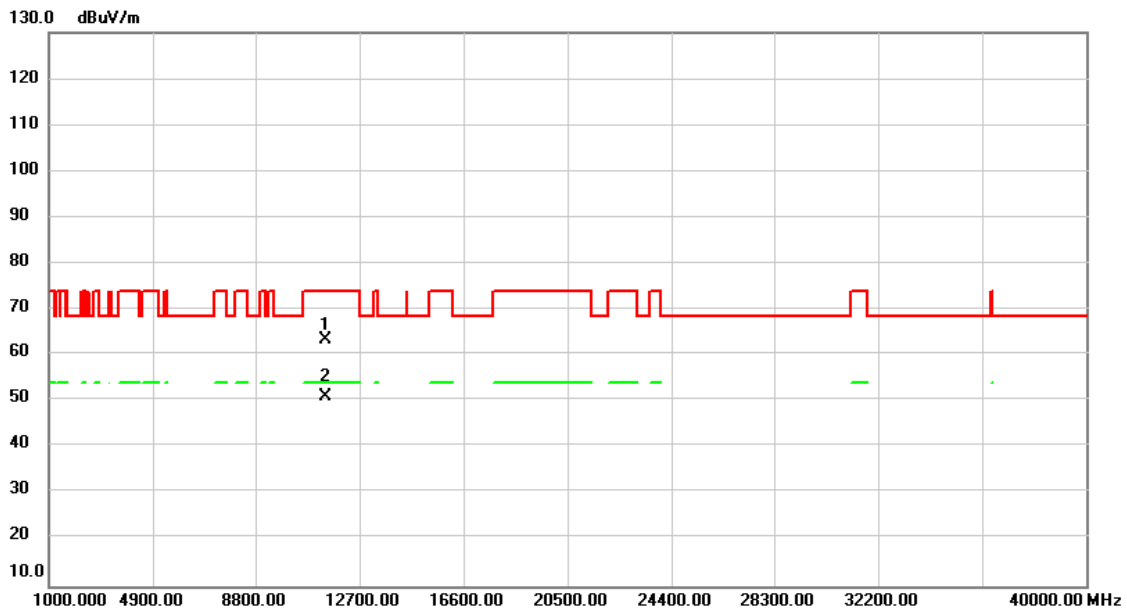


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.000	48.81	14.44	63.25	74.00	-10.75	peak	
2	*	11400.000	36.65	14.44	51.09	54.00	-2.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/ TX a Mode 5745MHz

Vertical

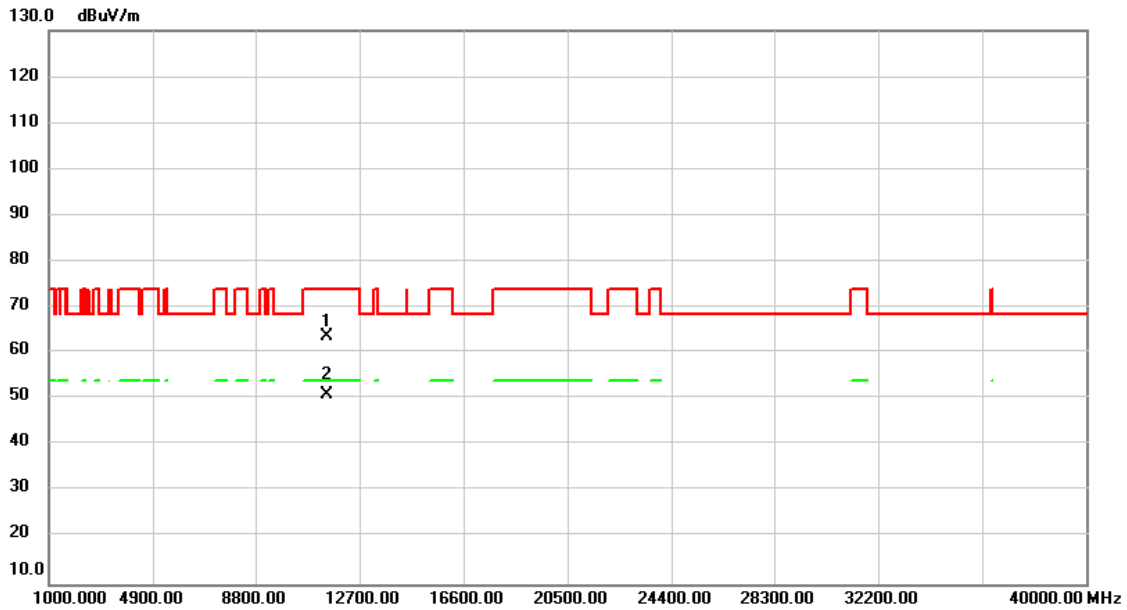


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.000	48.99	14.54	63.53	74.00	-10.47	peak	
2	*	11490.000	36.46	14.54	51.00	54.00	-3.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/ TX a Mode 5745MHz
-----------	---------------------------

Horizontal

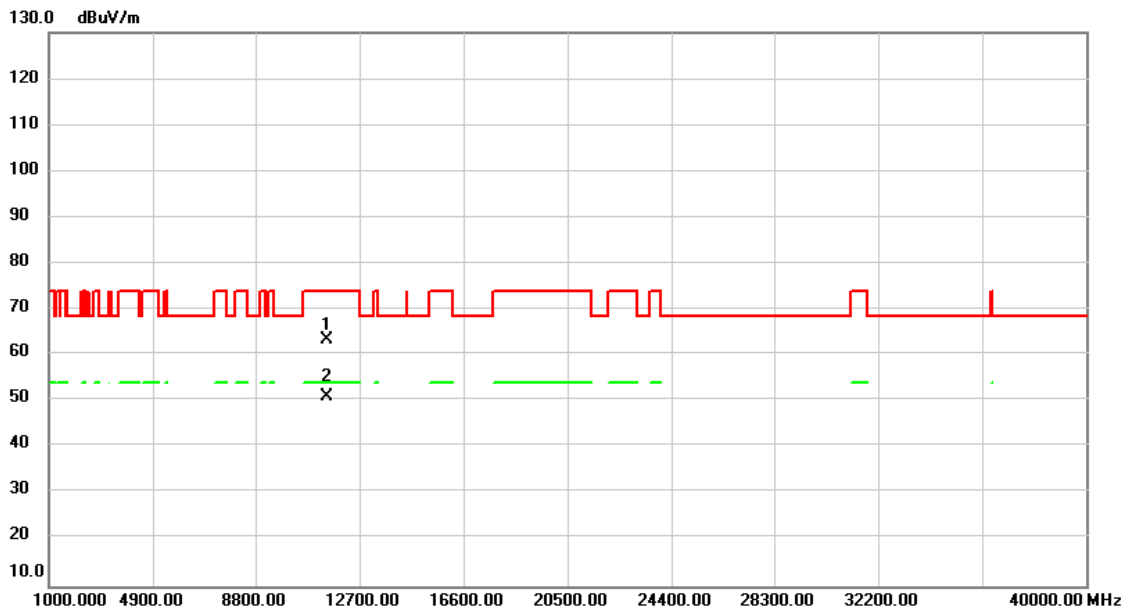


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.000	48.85	14.54	63.39	74.00	-10.61	peak	
2	*	11490.000	36.36	14.54	50.90	54.00	-3.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/ TX a Mode 5785MHz
-----------	---------------------------

Vertical

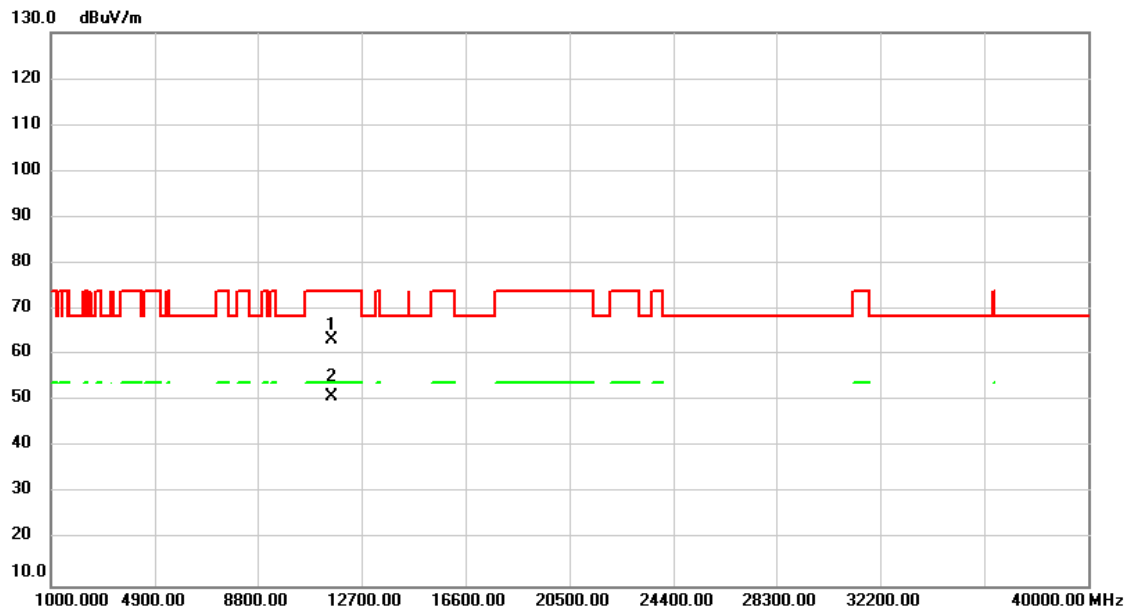


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.000	48.83	14.57	63.40	74.00	-10.60	peak	
2	*	11570.000	36.51	14.57	51.08	54.00	-2.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/ TX a Mode 5785MHz
-----------	---------------------------

Horizontal

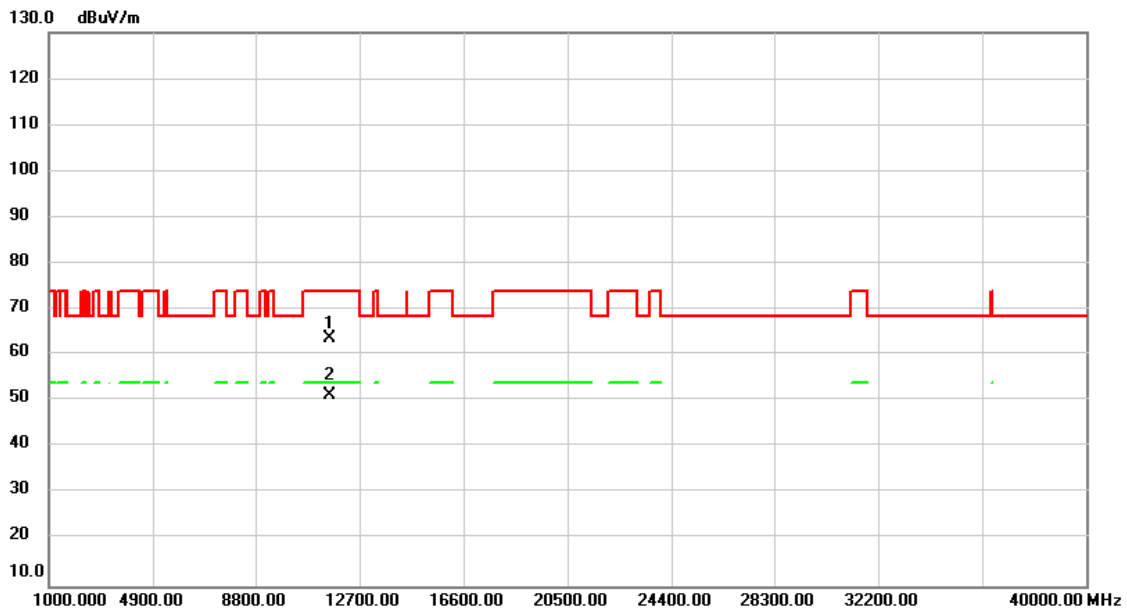

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.000	48.97	14.57	63.54	74.00	-10.46	peak	
2	*	11570.000	36.55	14.57	51.12	54.00	-2.88	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/ TX a Mode 5825MHz
-----------	---------------------------

Vertical

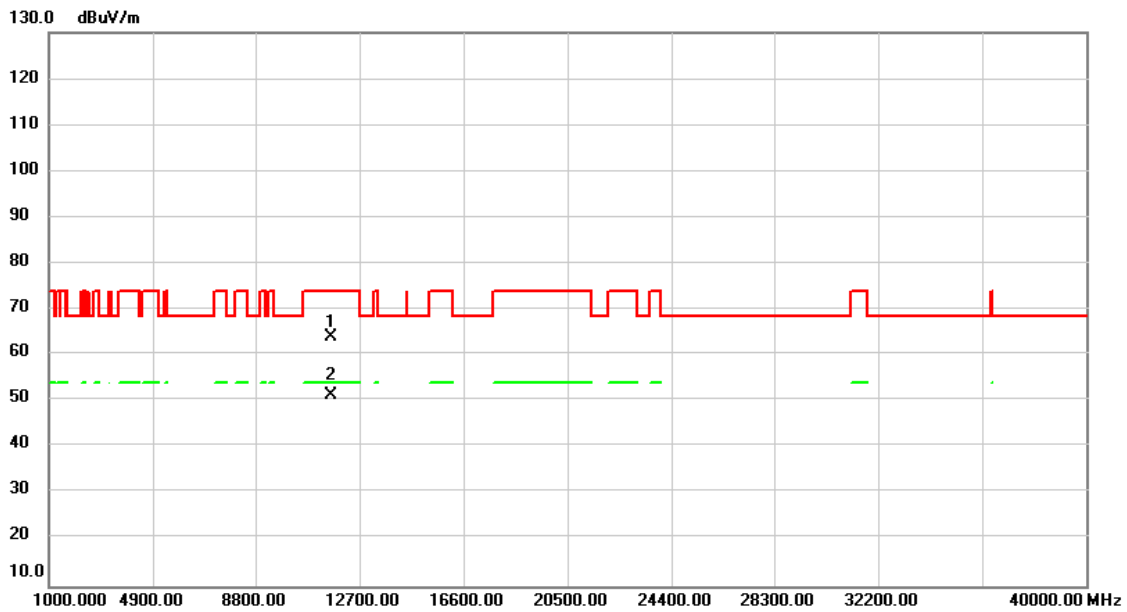

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.000	49.37	14.57	63.94	74.00	-10.06	peak	
2	*	11650.000	36.69	14.57	51.26	54.00	-2.74	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/ TX a Mode 5825MHz

Horizontal

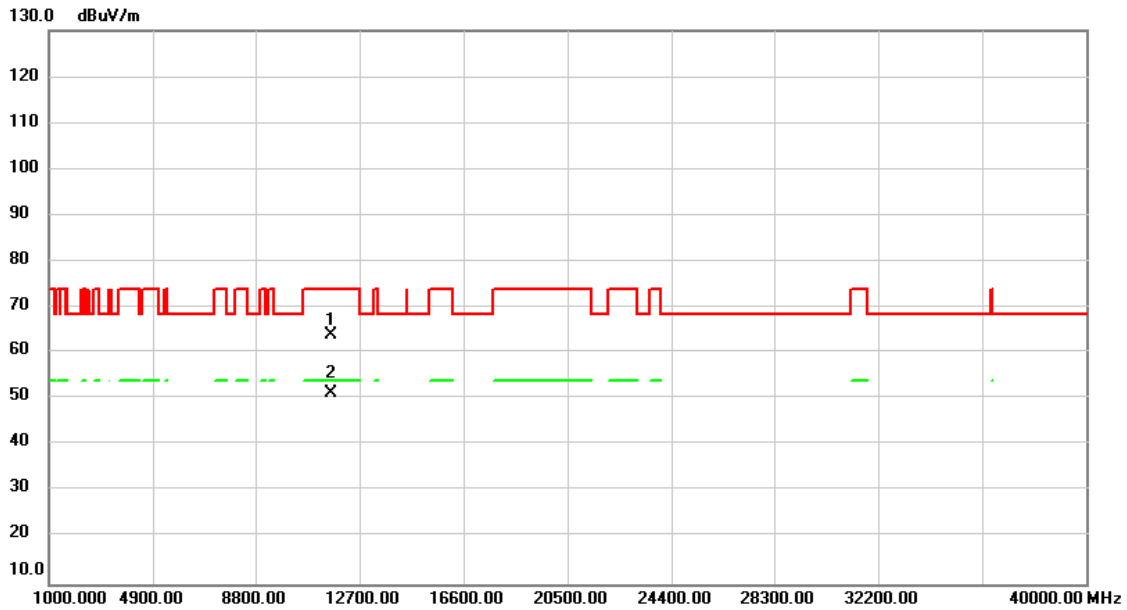

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.000	49.33	14.57	63.90	74.00	-10.10	peak	
2	*	11650.000	36.75	14.57	51.32	54.00	-2.68	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT20) Mode 5180MHz

Vertical

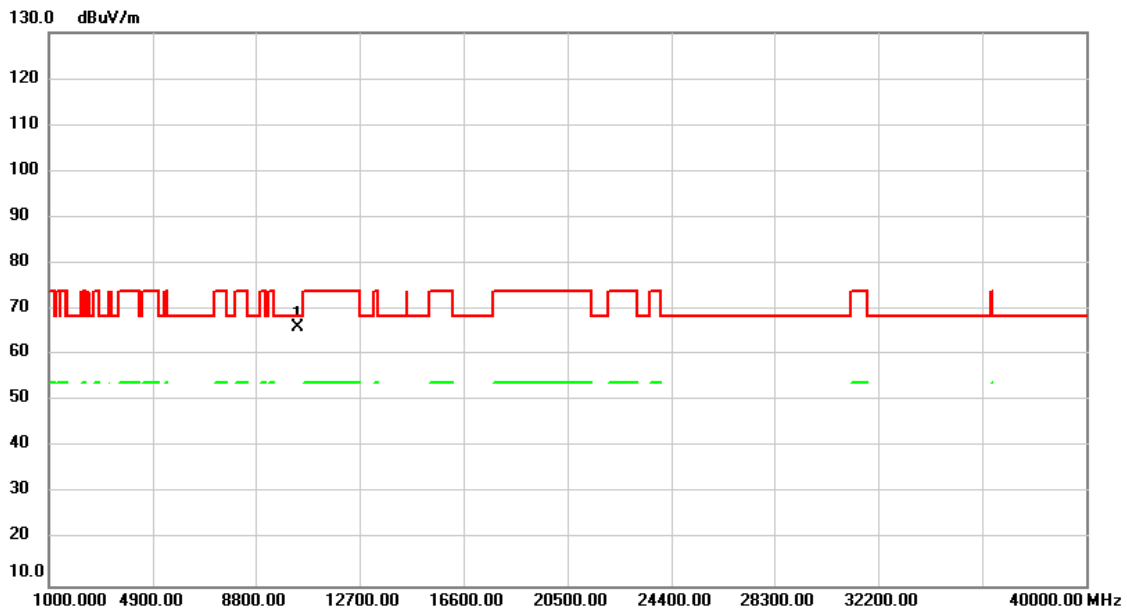


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.000	52.36	13.51	65.87	68.30	-2.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT20) Mode 5180MHz

Horizontal

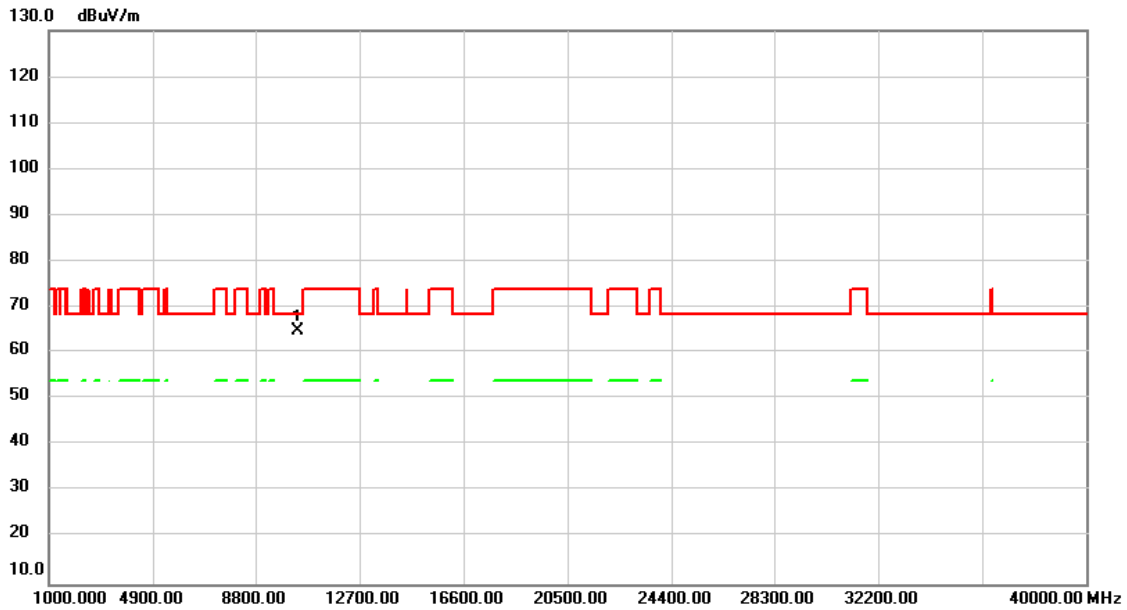


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.000	51.27	13.51	64.78	68.30	-3.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT20) Mode 5200MHz

Vertical

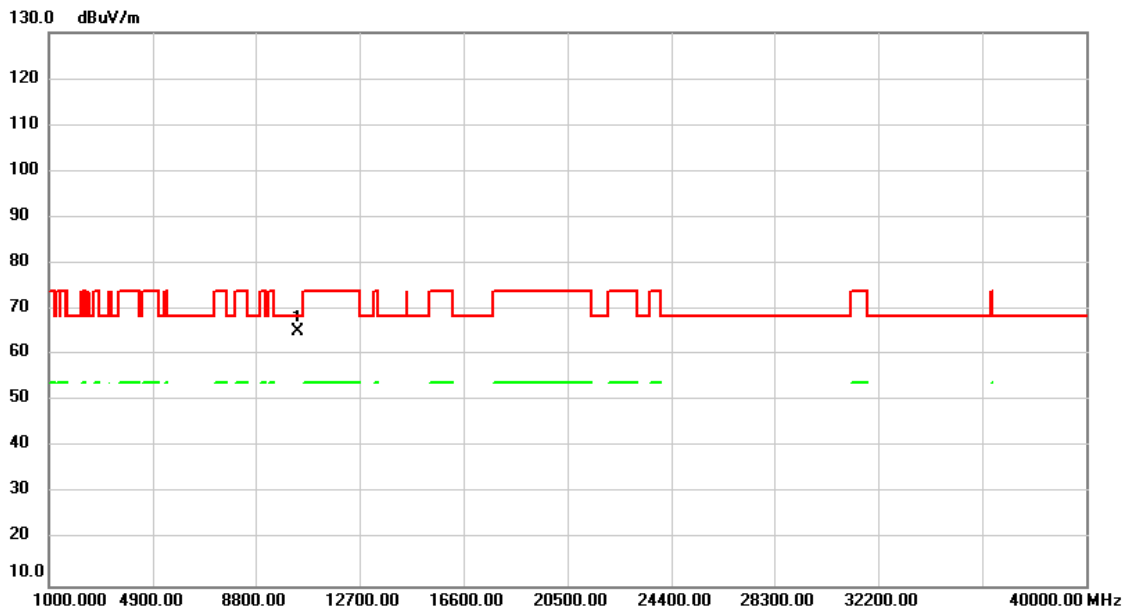


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.000	51.45	13.55	65.00	68.30	-3.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT20) Mode 5200MHz

Horizontal

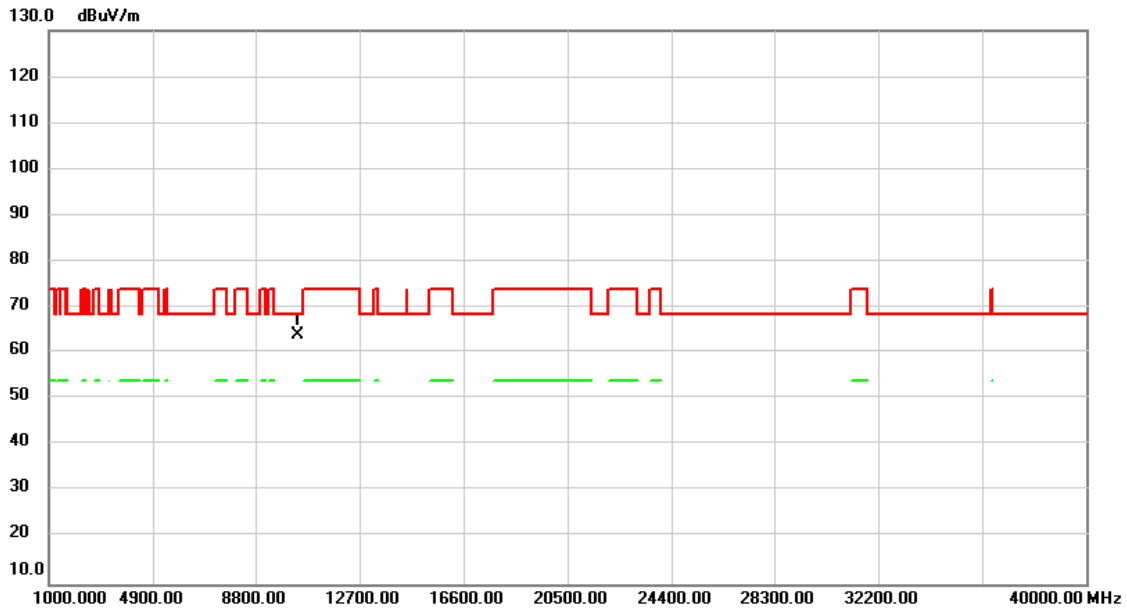


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.000	50.30	13.55	63.85	68.30	-4.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT20) Mode 5240MHz

Vertical

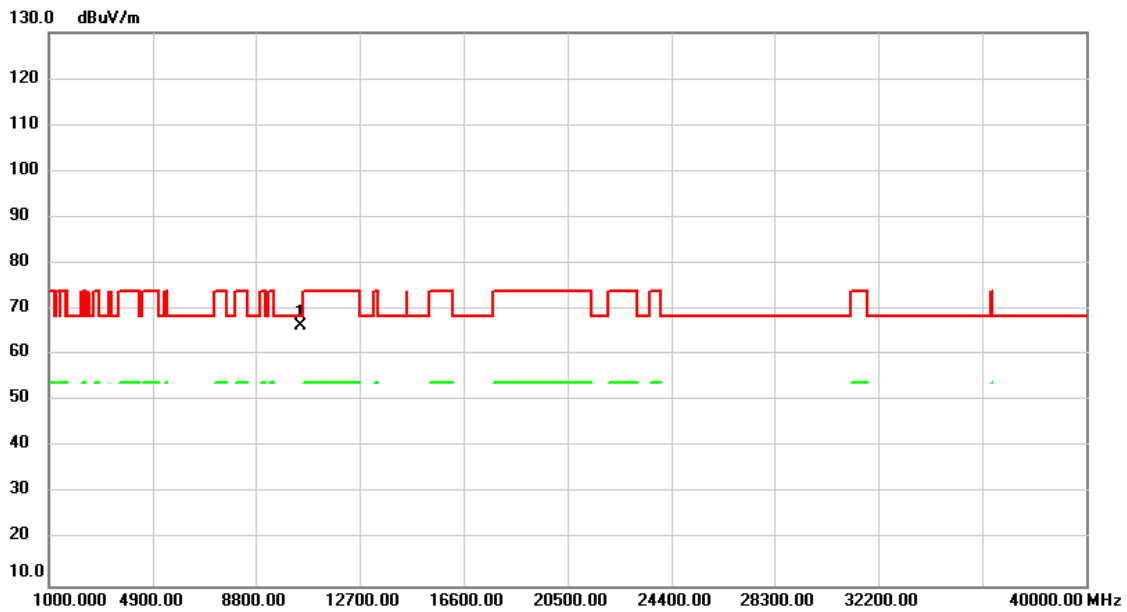


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.000	52.53	13.63	66.16	68.30	-2.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT20) Mode 5240MHz

Horizontal

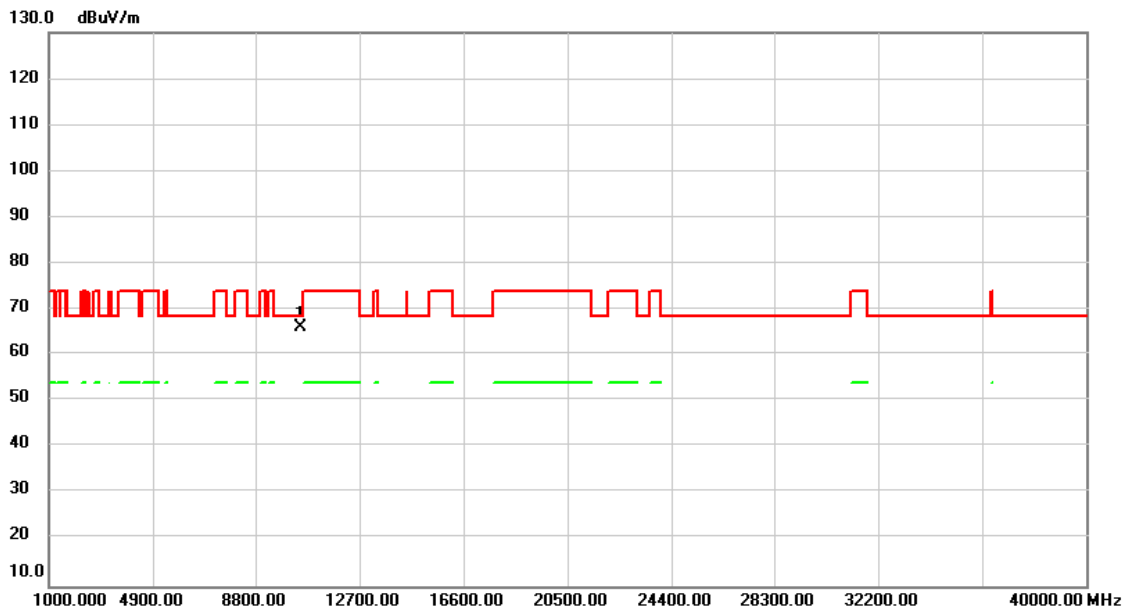


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.000	52.47	13.63	66.10	68.30	-2.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT20) Mode 5260MHz

Vertical

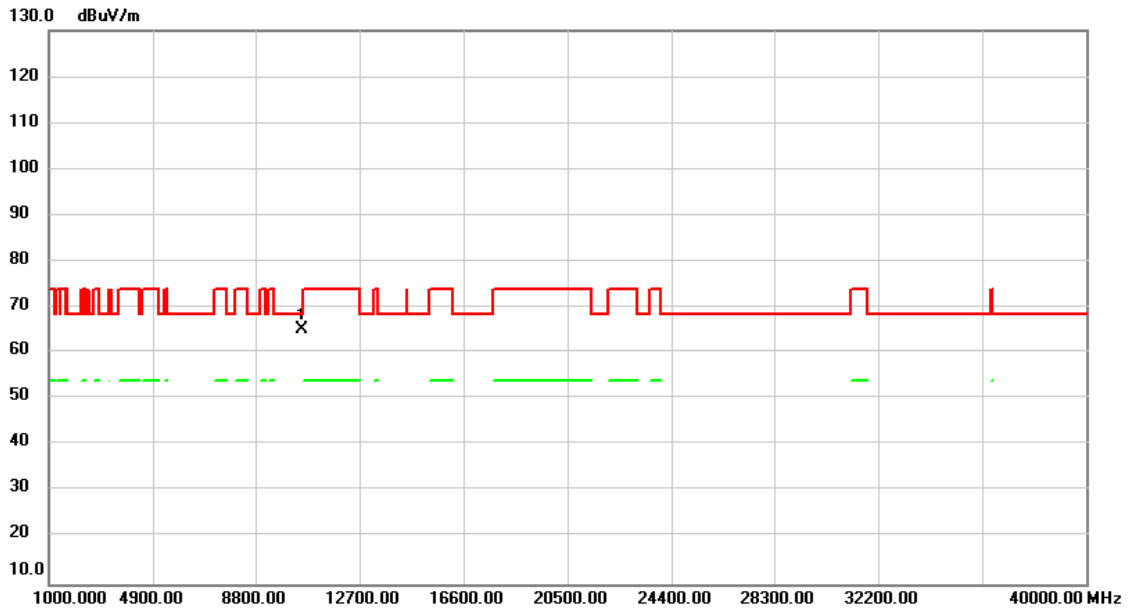


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.000	51.45	13.66	65.11	68.30	-3.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT20) Mode 5260MHz

Horizontal

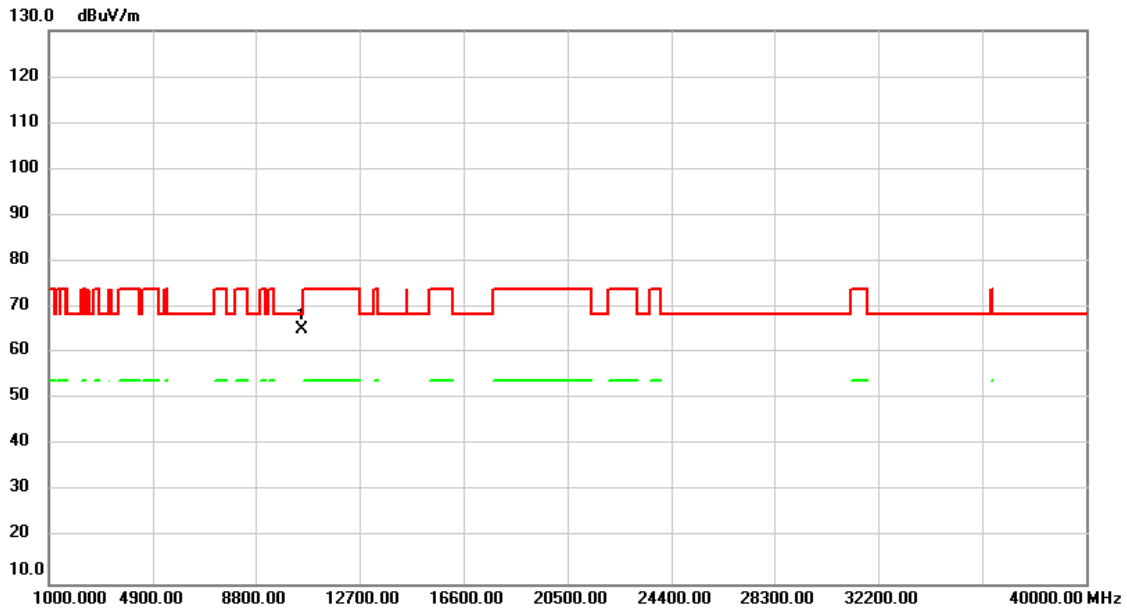


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.000	51.39	13.66	65.05	68.30	-3.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT20) Mode 5300MHz

Vertical

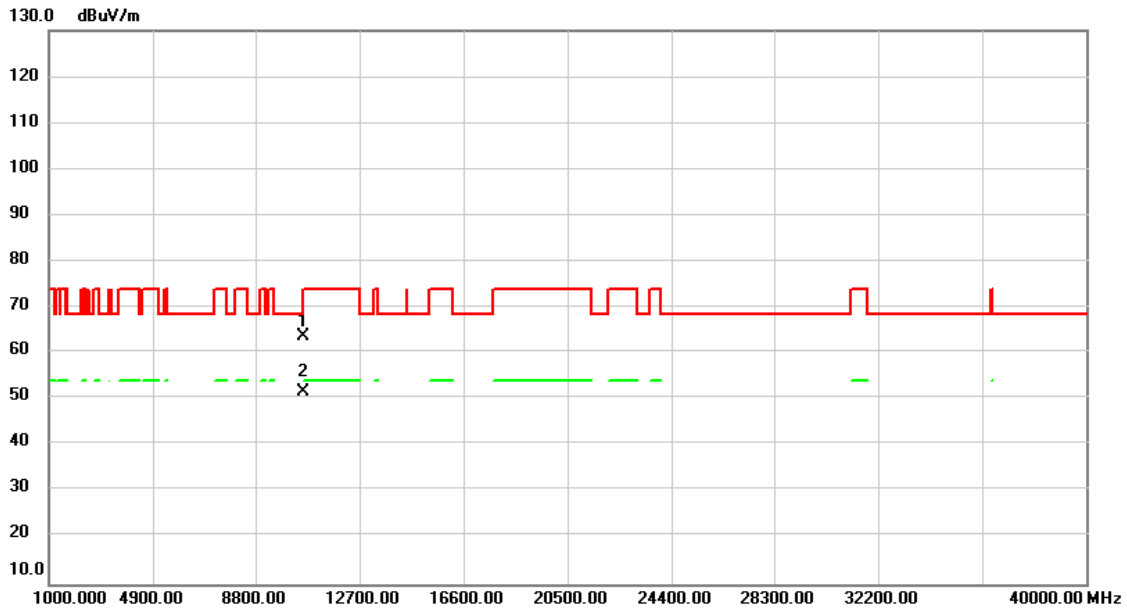


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	49.89	13.70	63.59	68.30	-4.71	peak	
2	*	10600.000	37.90	13.70	51.60	54.00	-2.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT20) Mode 5300MHz

Horizontal

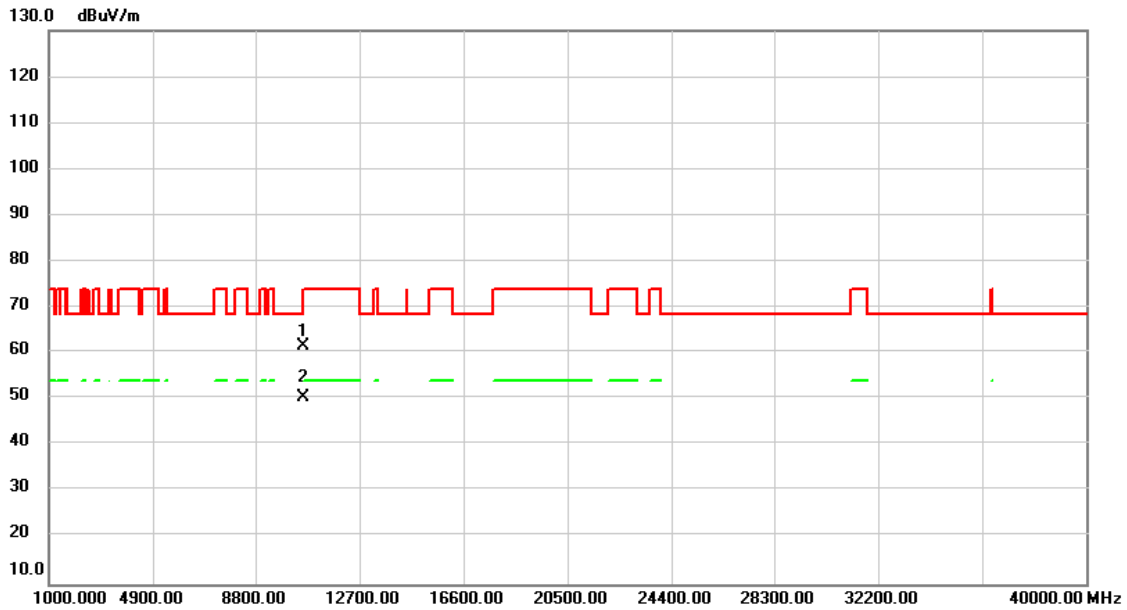


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	47.66	13.70	61.36	68.30	-6.94	peak	
2	*	10600.000	36.74	13.70	50.44	54.00	-3.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT20) Mode 5320MHz

Vertical

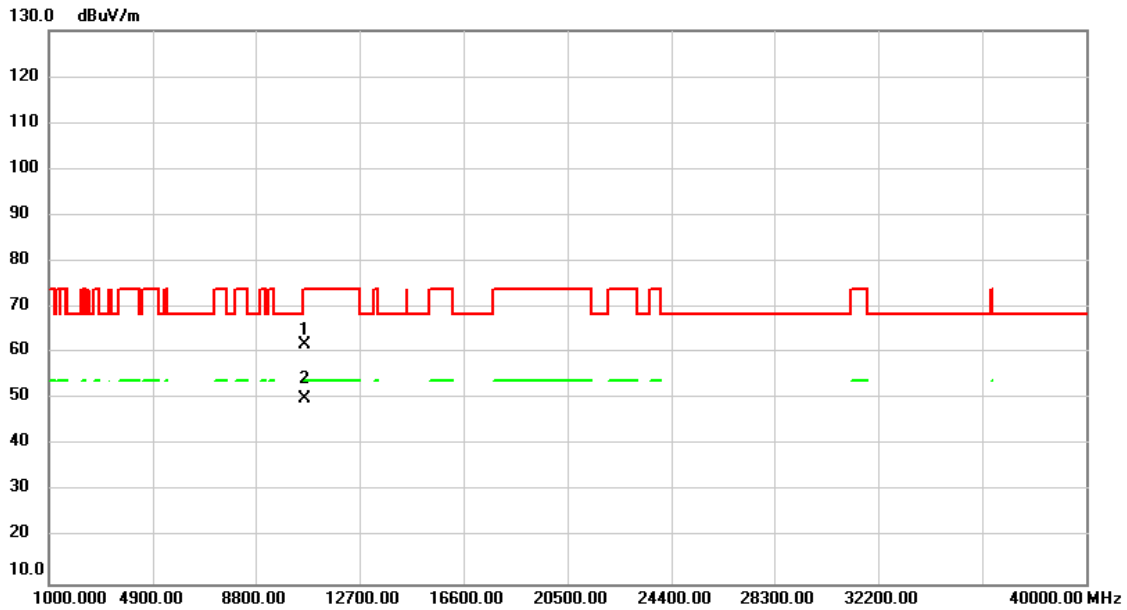


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.000	47.98	13.73	61.71	74.00	-12.29	peak	
2	*	10640.000	36.27	13.73	50.00	54.00	-4.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT20) Mode 5320MHz

Horizontal

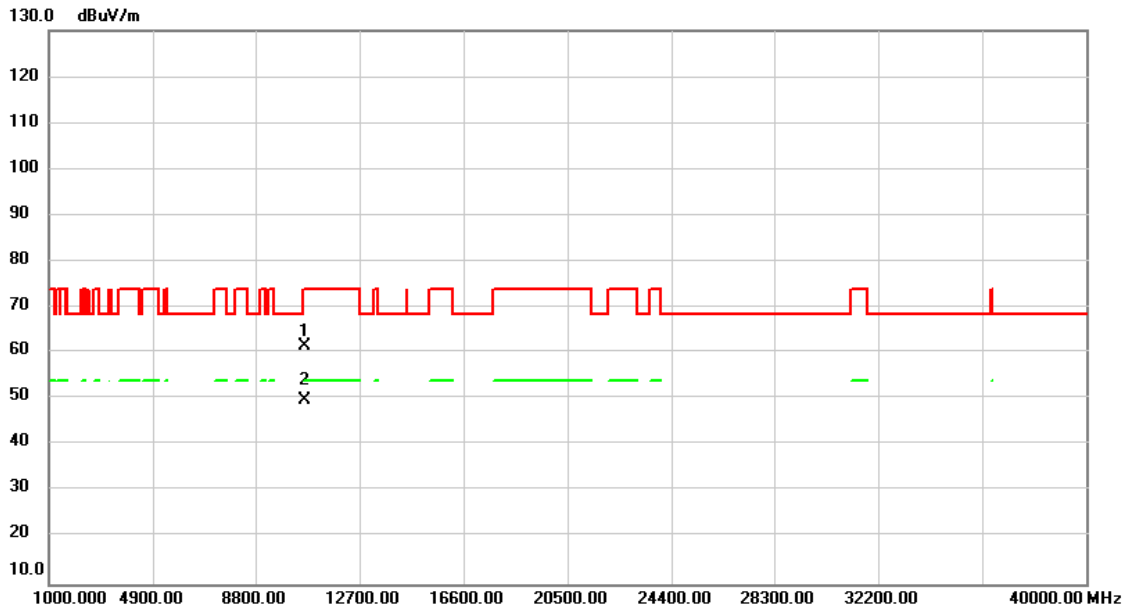

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.000	47.75	13.73	61.48	74.00	-12.52	peak	
2	*	10640.000	36.07	13.73	49.80	54.00	-4.20	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX n (HT20) Mode 5500MHz

Vertical

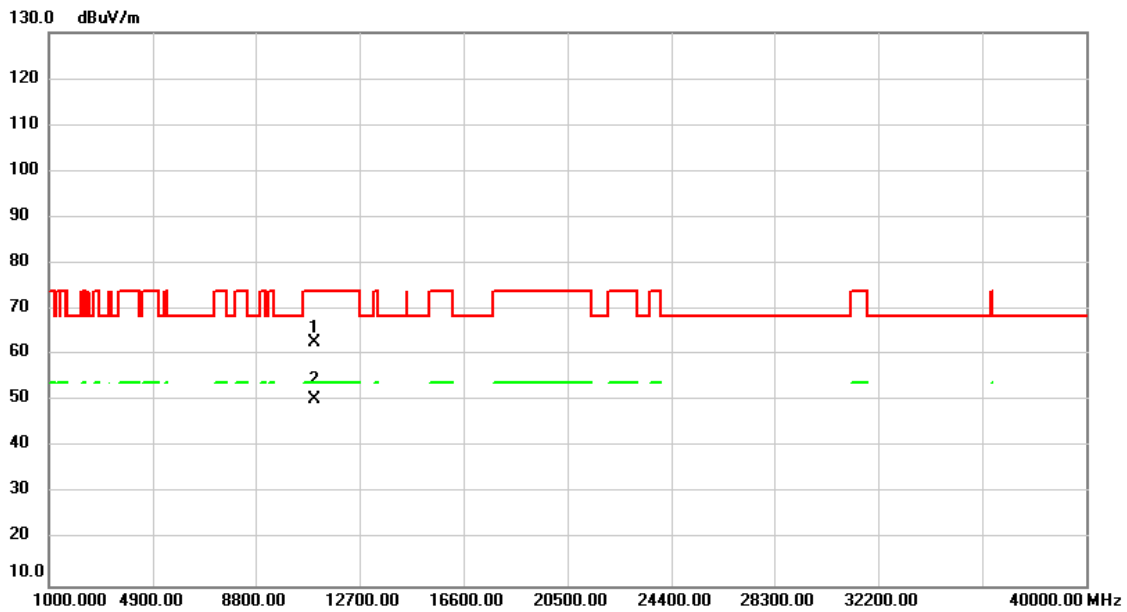


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	48.79	13.92	62.71	74.00	-11.29	peak	
2	*	11000.000	36.54	13.92	50.46	54.00	-3.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX n (HT20) Mode 5500MHz

Horizontal

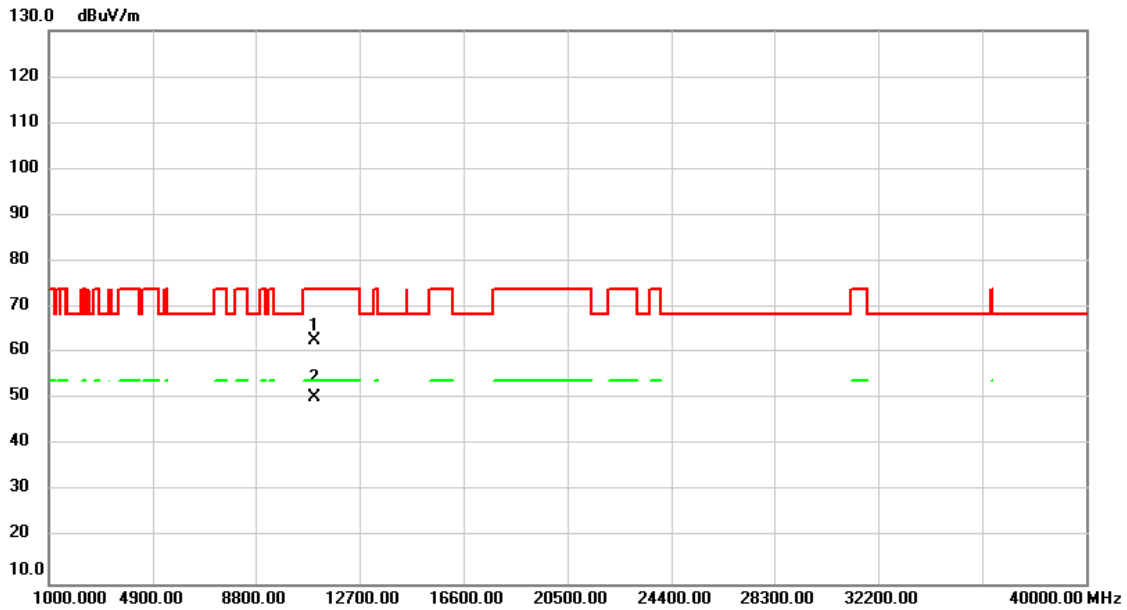

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	48.59	13.92	62.51	74.00	-11.49	peak	
2	*	11000.000	36.51	13.92	50.43	54.00	-3.57	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX n (HT20) Mode 5580MHz

Vertical

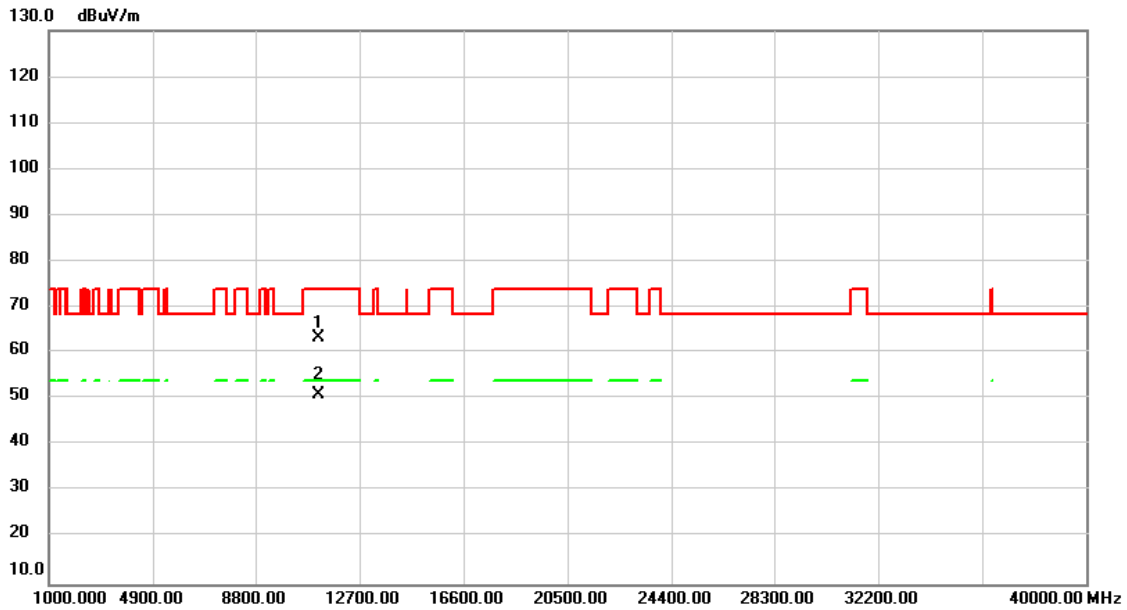


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.000	49.00	14.13	63.13	74.00	-10.87	peak	
2	*	11160.000	36.83	14.13	50.96	54.00	-3.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX n (HT20) Mode 5580MHz

Horizontal

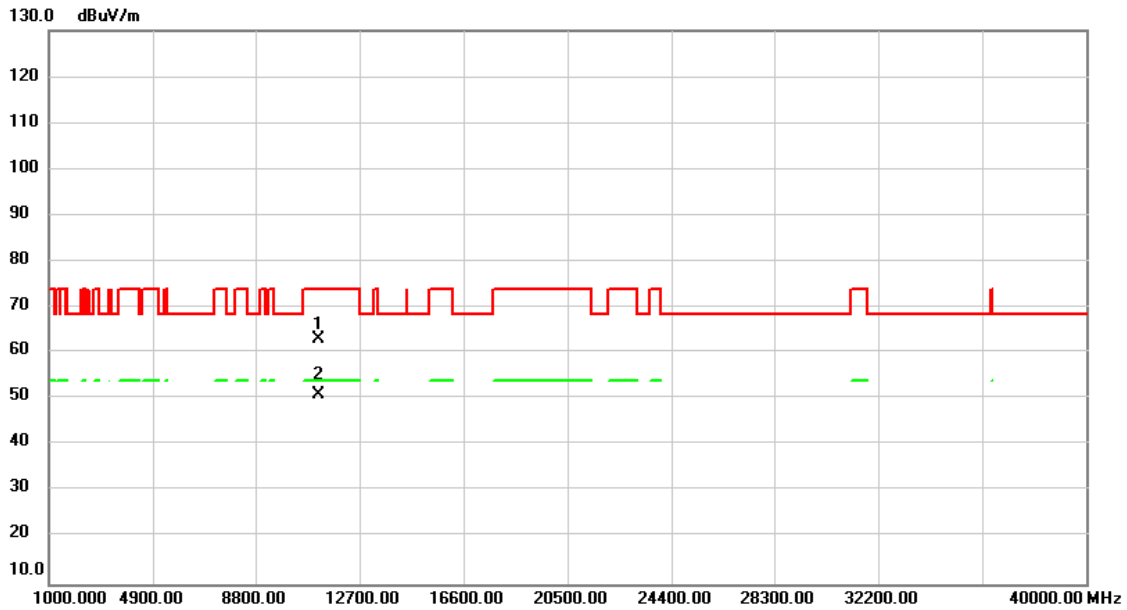


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.000	48.97	14.13	63.10	74.00	-10.90	peak	
2	*	11160.000	36.87	14.13	51.00	54.00	-3.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX n (HT20) Mode 5700MHz

Vertical

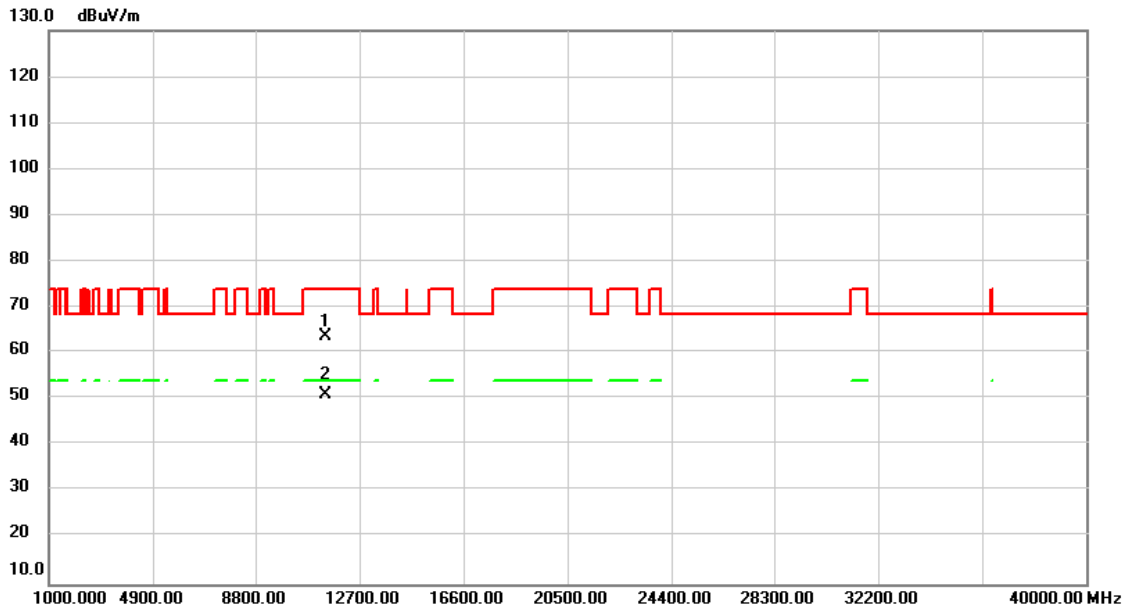


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.000	49.12	14.44	63.56	74.00	-10.44	peak	
2	*	11400.000	36.48	14.44	50.92	54.00	-3.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/ TX n (HT20) Mode 5700MHz
-----------	-----------------------------------

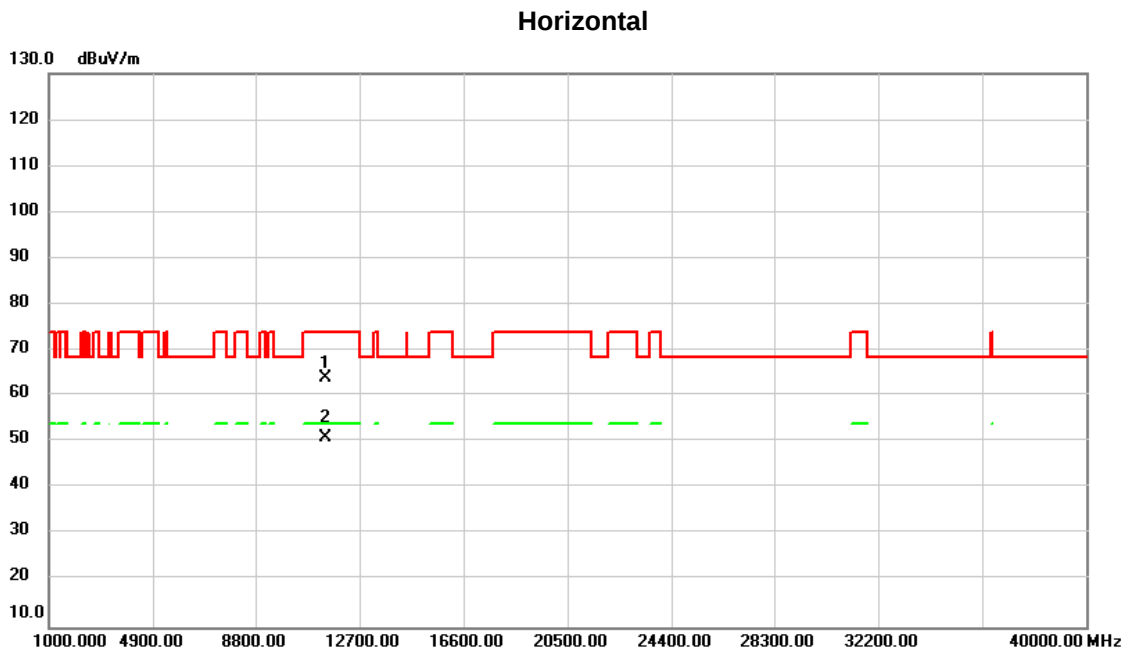


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.000	49.26	14.44	63.70	74.00	-10.30	peak	
2	*	11400.000	36.66	14.44	51.10	54.00	-2.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/ TX n (HT20) Mode 5745MHz
-----------	----------------------------------

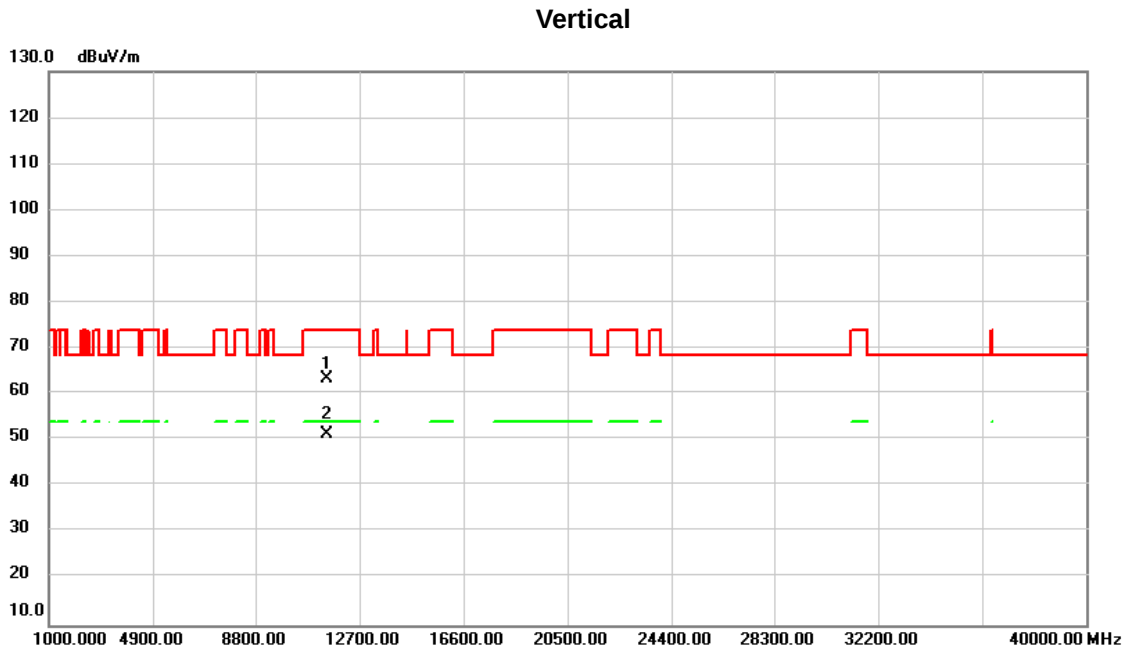


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.000	48.86	14.54	63.40	74.00	-10.60	peak	
2	*	11490.000	36.70	14.54	51.24	54.00	-2.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/ TX n (HT20) Mode 5745MHz
-----------	----------------------------------

Horizontal

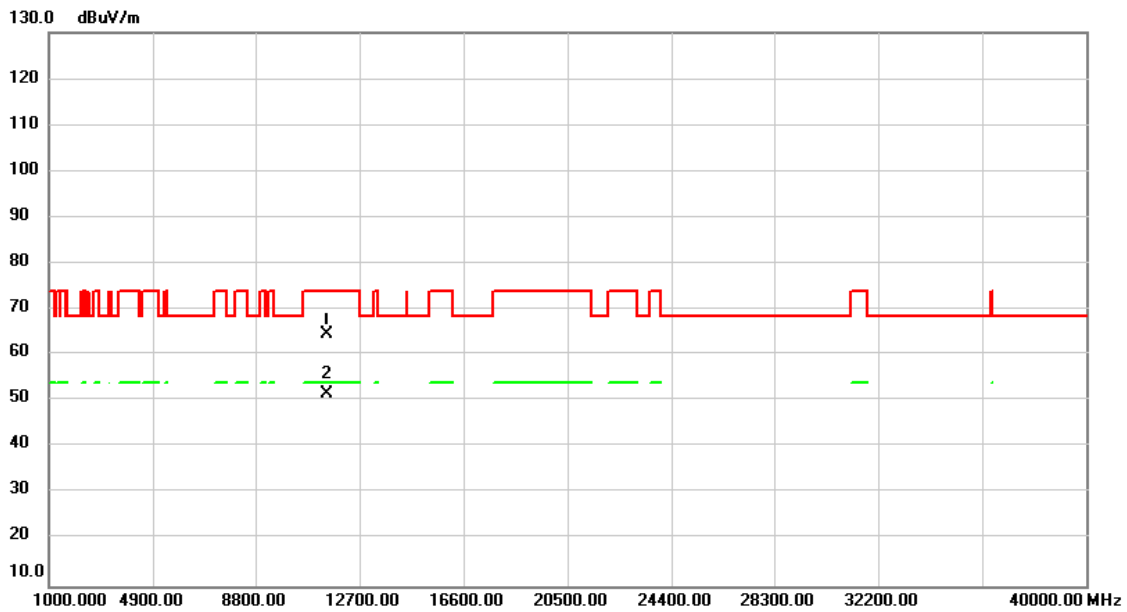


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.000	49.95	14.54	64.49	74.00	-9.51	peak	
2	*	11490.000	36.91	14.54	51.45	54.00	-2.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/ TX n (HT20) Mode 5785MHz
-----------	----------------------------------

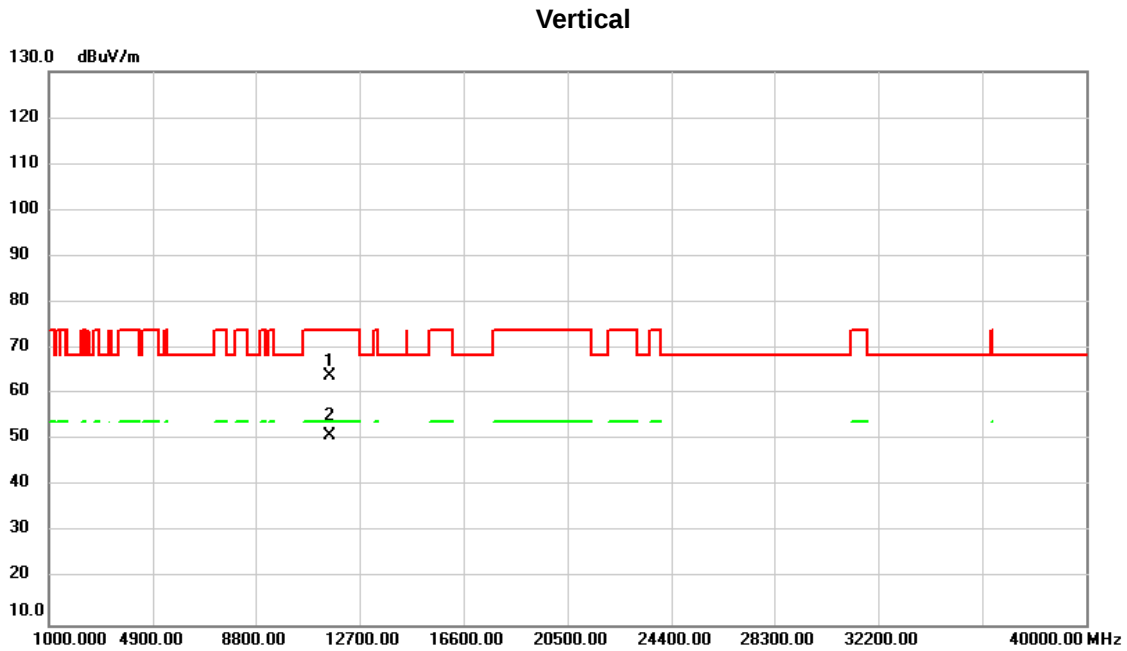


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.000	49.37	14.57	63.94	74.00	-10.06	peak	
2	*	11570.000	36.51	14.57	51.08	54.00	-2.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/ TX n (HT20) Mode 5785MHz
-----------	----------------------------------

Horizontal

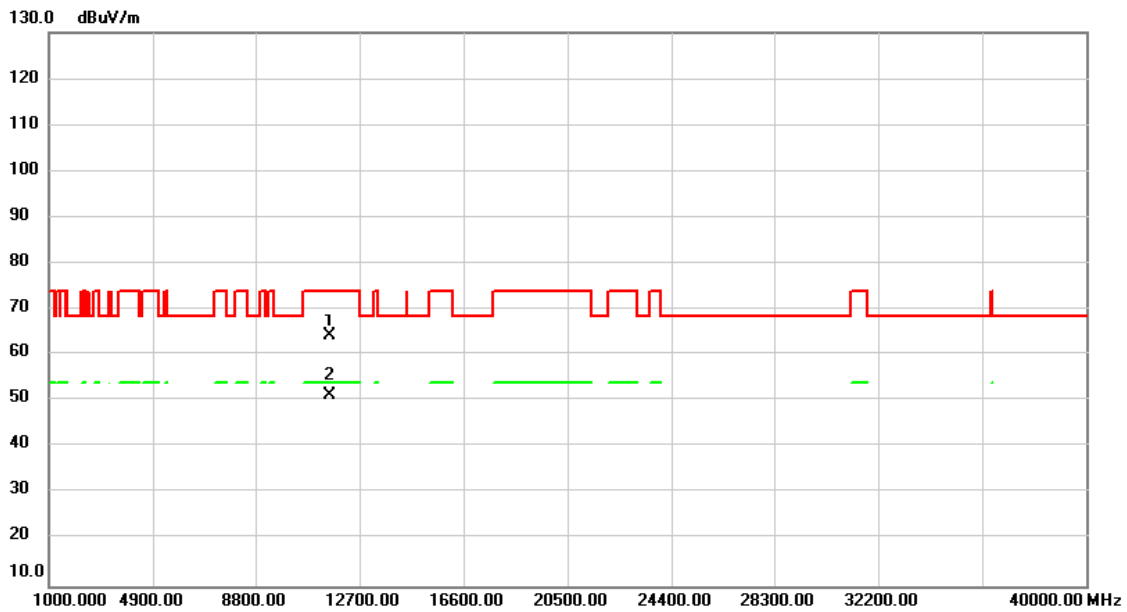


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.000	49.53	14.57	64.10	74.00	-9.90	peak	
2	*	11570.000	36.66	14.57	51.23	54.00	-2.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/ TX n (HT20)Mode 5825MHz

Vertical

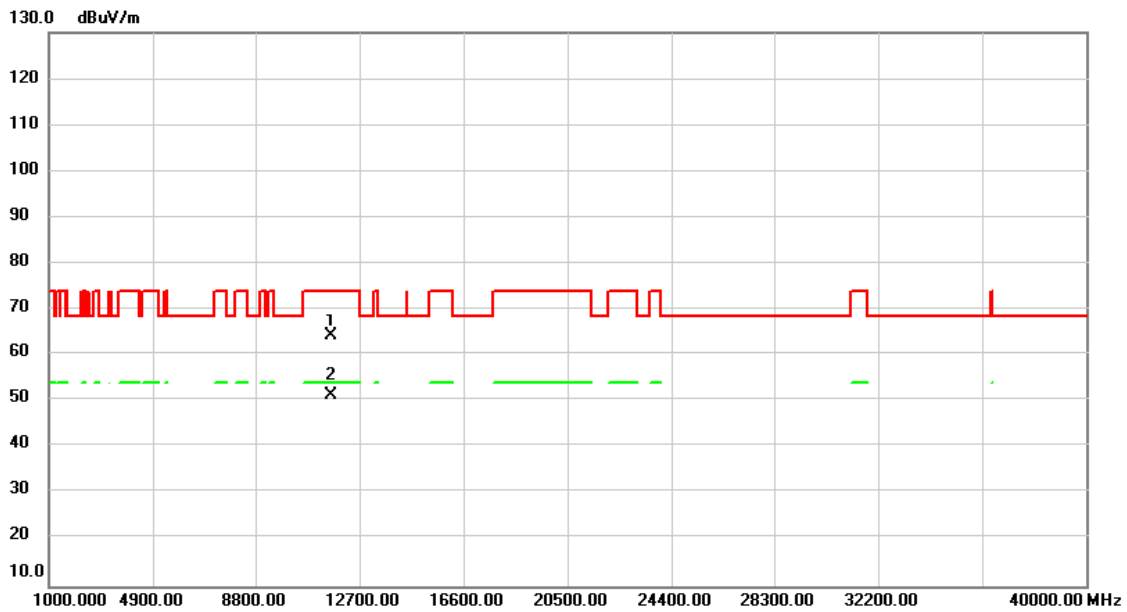

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.000	49.71	14.57	64.28	74.00	-9.72	peak	
2	*	11650.000	36.72	14.57	51.29	54.00	-2.71	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/ TX n (HT20)Mode 5825MHz

Horizontal

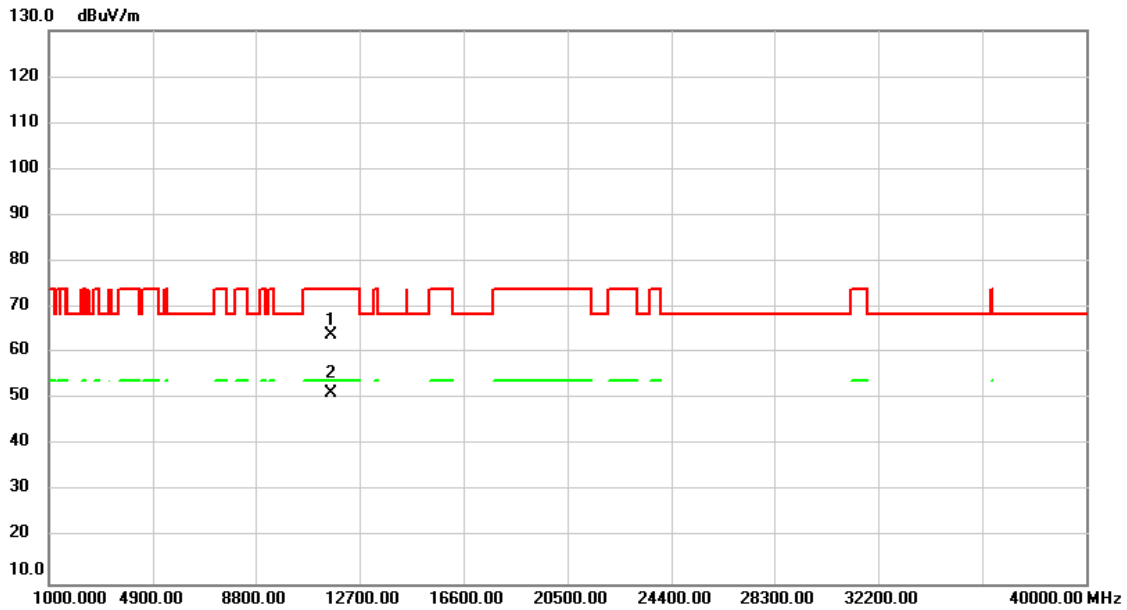


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.000	49.35	14.57	63.92	74.00	-10.08	peak	
2	*	11650.000	36.66	14.57	51.23	54.00	-2.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT40) Mode 5190MHz

Vertical

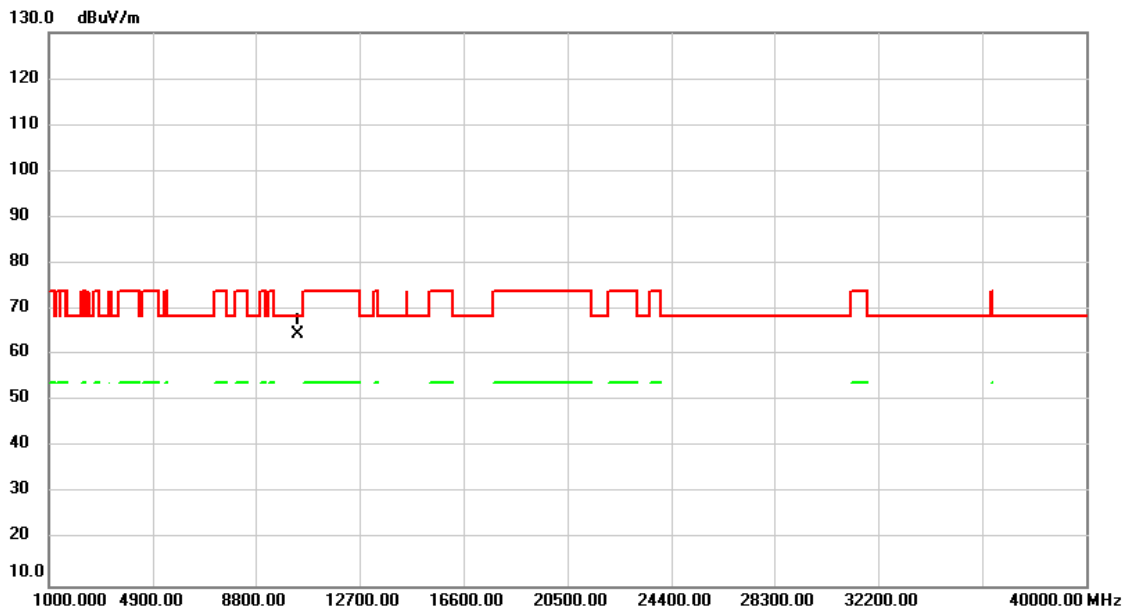


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.000	50.83	13.54	64.37	68.30	-3.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT40) Mode 5190MHz

Horizontal

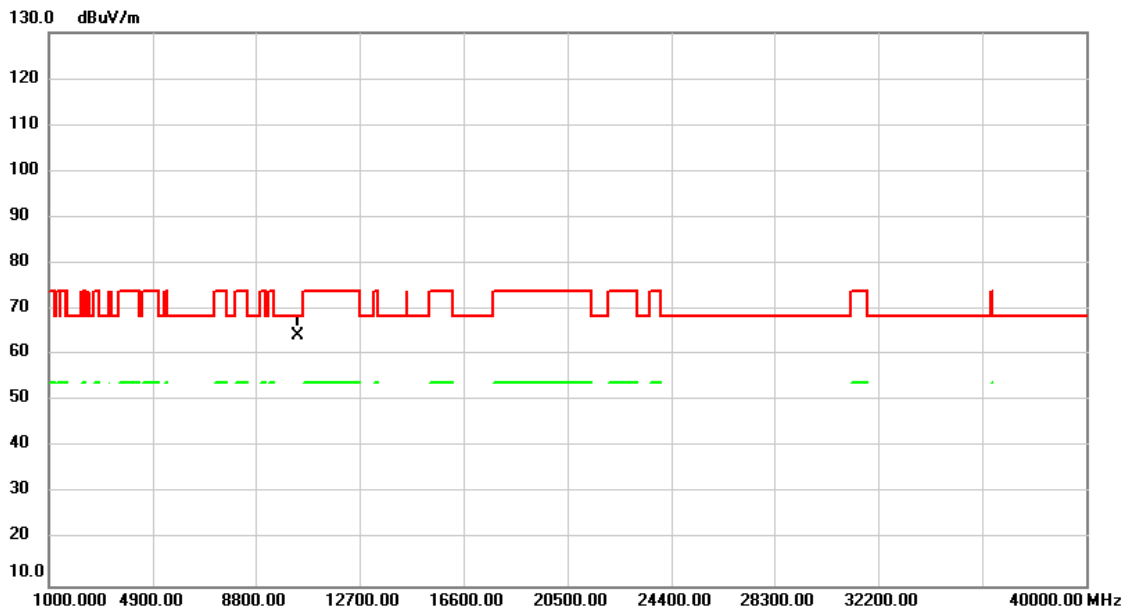


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.000	50.47	13.54	64.01	68.30	-4.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT40) Mode 5230MHz

Vertical

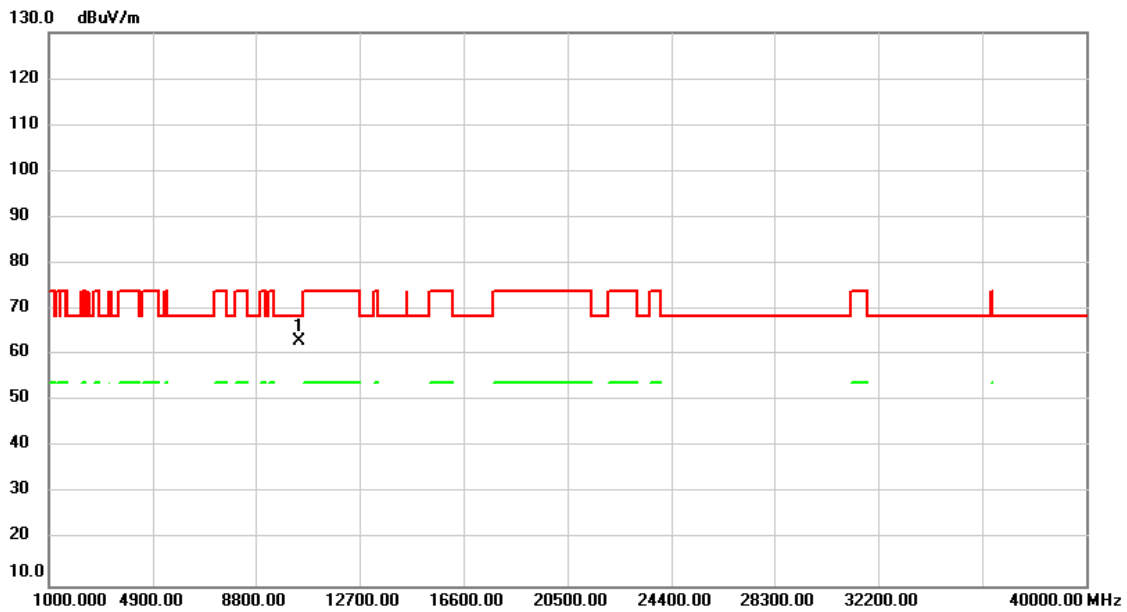


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.000	49.39	13.61	63.00	68.30	-5.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX n (HT40) Mode 5230MHz

Horizontal

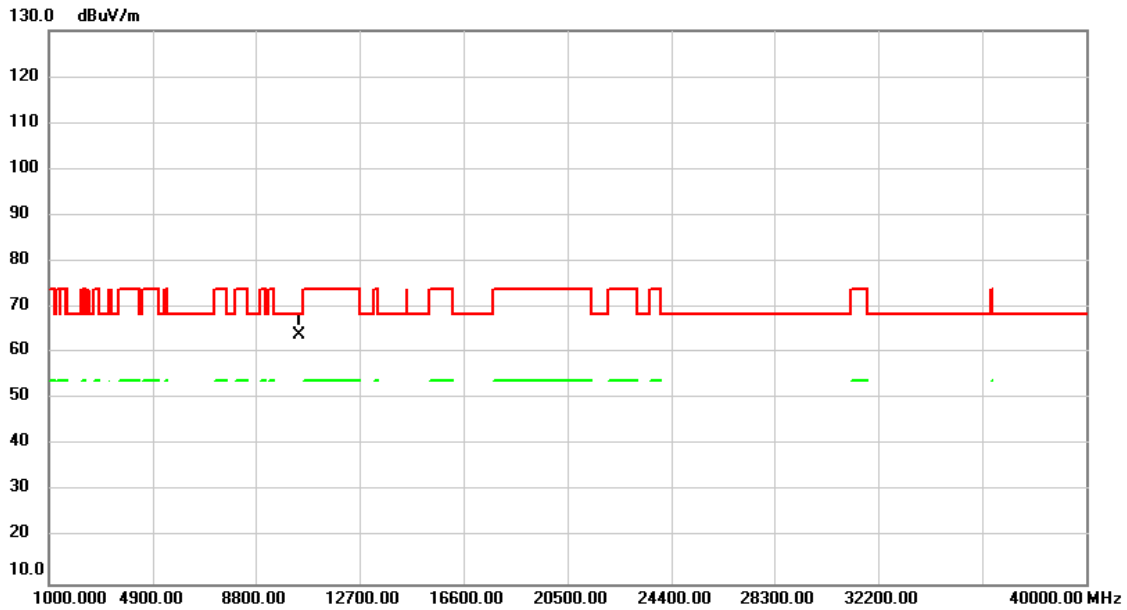


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.000	50.39	13.61	64.00	68.30	-4.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT40) Mode 5270MHz

Vertical

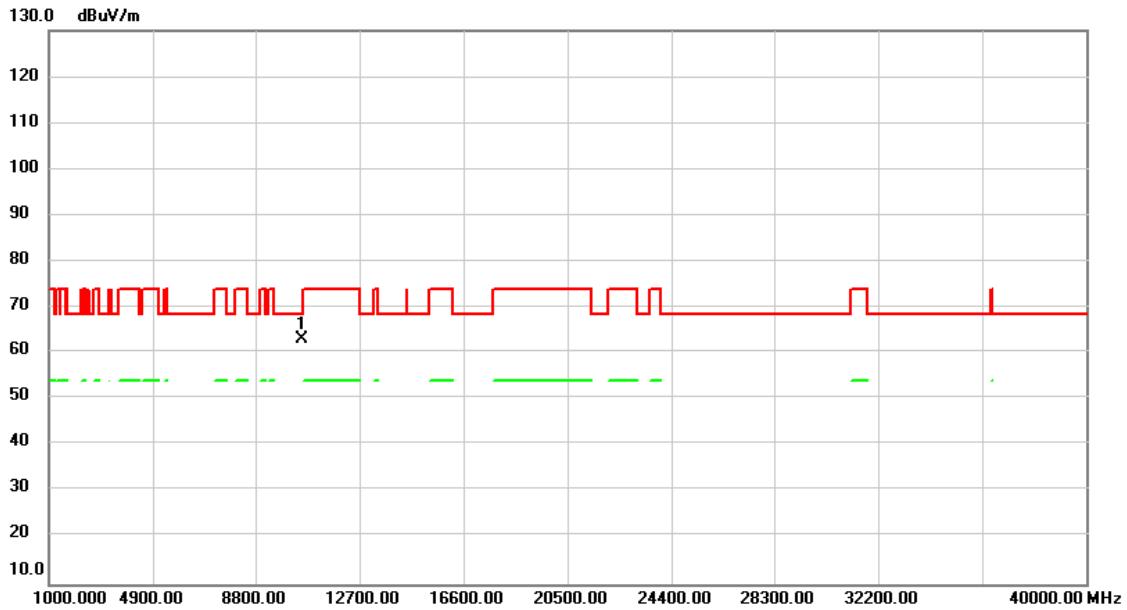


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.000	49.15	13.67	62.82	68.30	-5.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT40) Mode 5270MHz

Horizontal

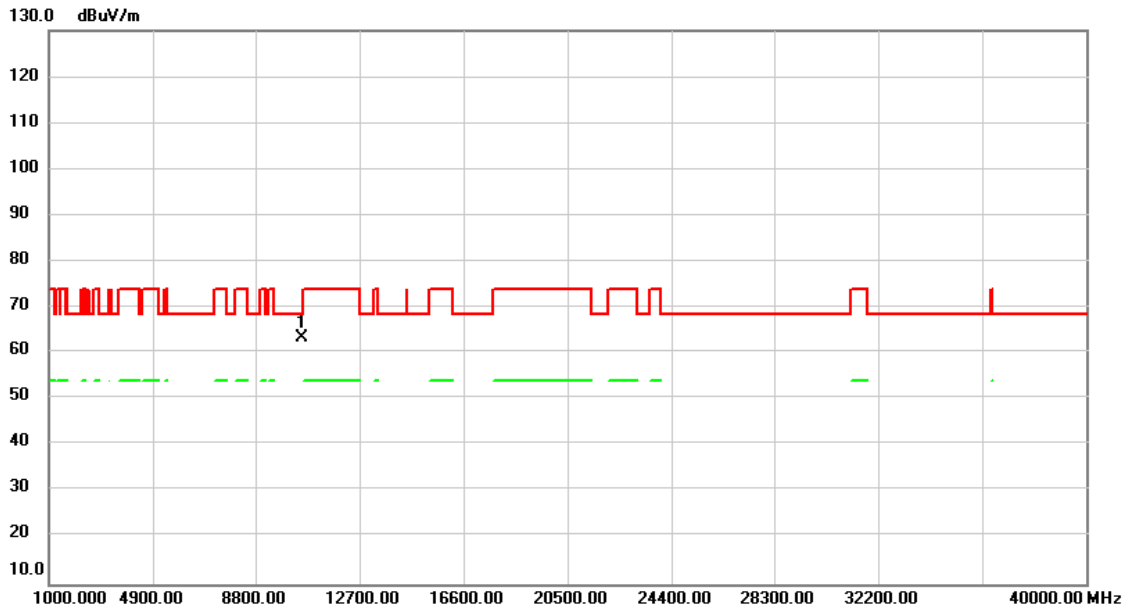


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.000	49.60	13.67	63.27	68.30	-5.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT40) Mode 5310MHz

Vertical

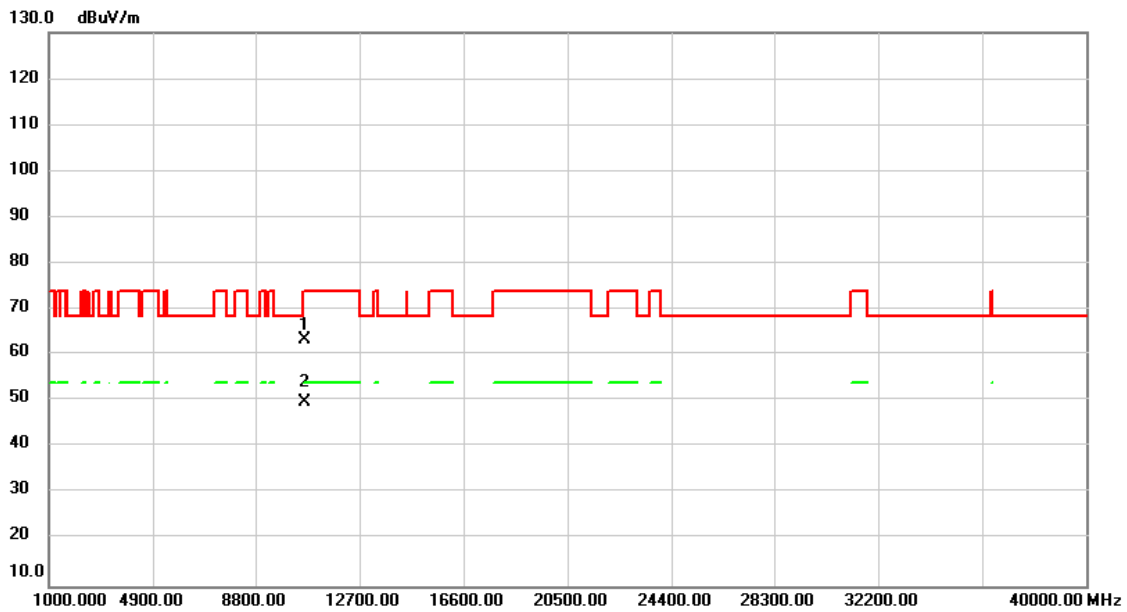


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.000	49.41	13.71	63.12	74.00	-10.88	peak	
2	*	10620.000	36.13	13.71	49.84	54.00	-4.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX n (HT40) Mode 5310MHz

Horizontal

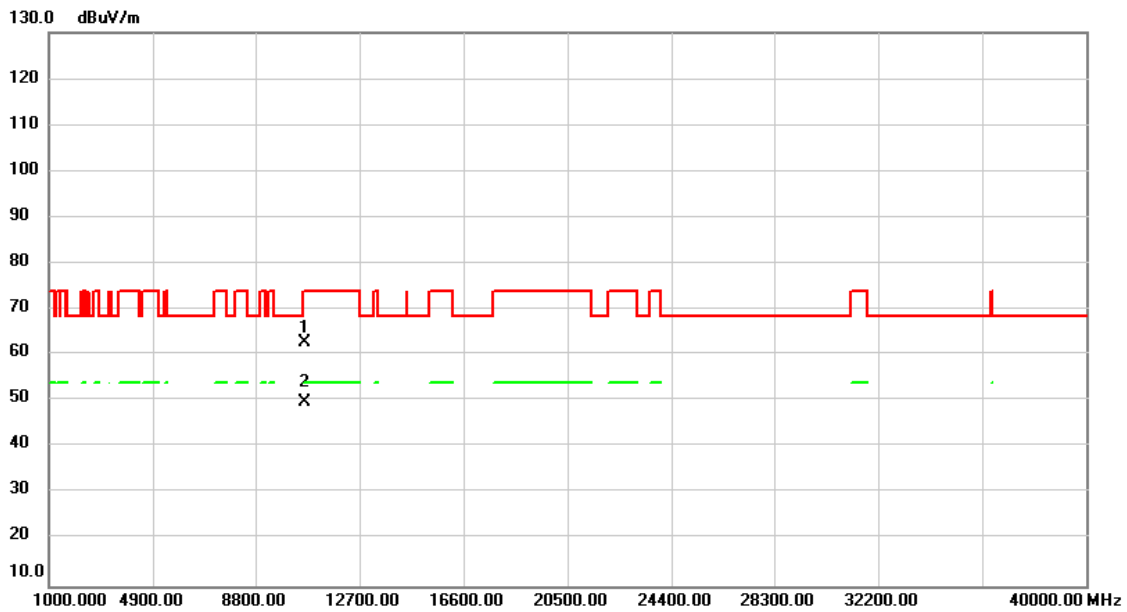

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.000	48.97	13.71	62.68	74.00	-11.32	peak	
2	*	10620.000	36.12	13.71	49.83	54.00	-4.17	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX n (HT40) Mode 5510MHz

Vertical

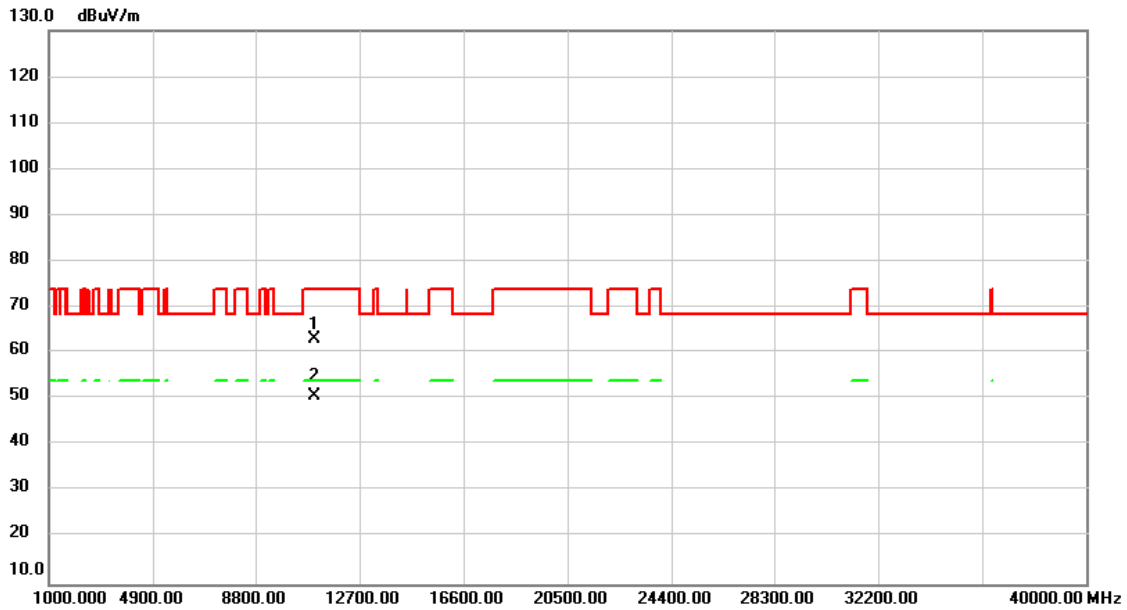


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.000	49.11	13.94	63.05	74.00	-10.95	peak	
2	*	11020.000	36.74	13.94	50.68	54.00	-3.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/TX n (HT40) Mode 5510MHz
-----------	----------------------------------

Horizontal

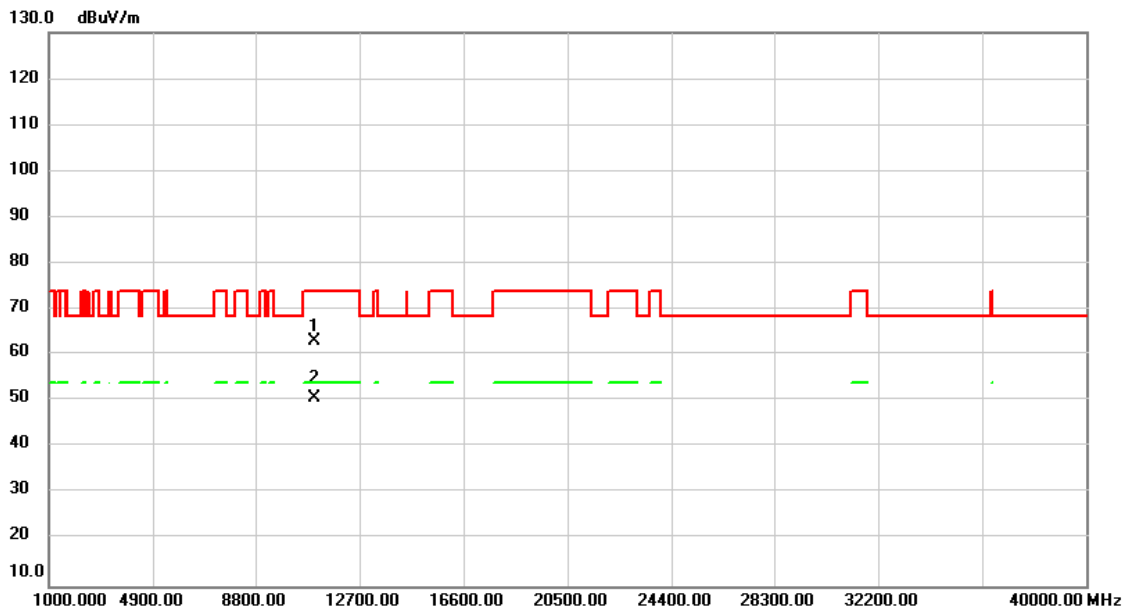


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.000	49.03	13.94	62.97	74.00	-11.03	peak	
2	*	11020.000	36.77	13.94	50.71	54.00	-3.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/TX n (HT40) Mode 5550MHz
-----------	----------------------------------

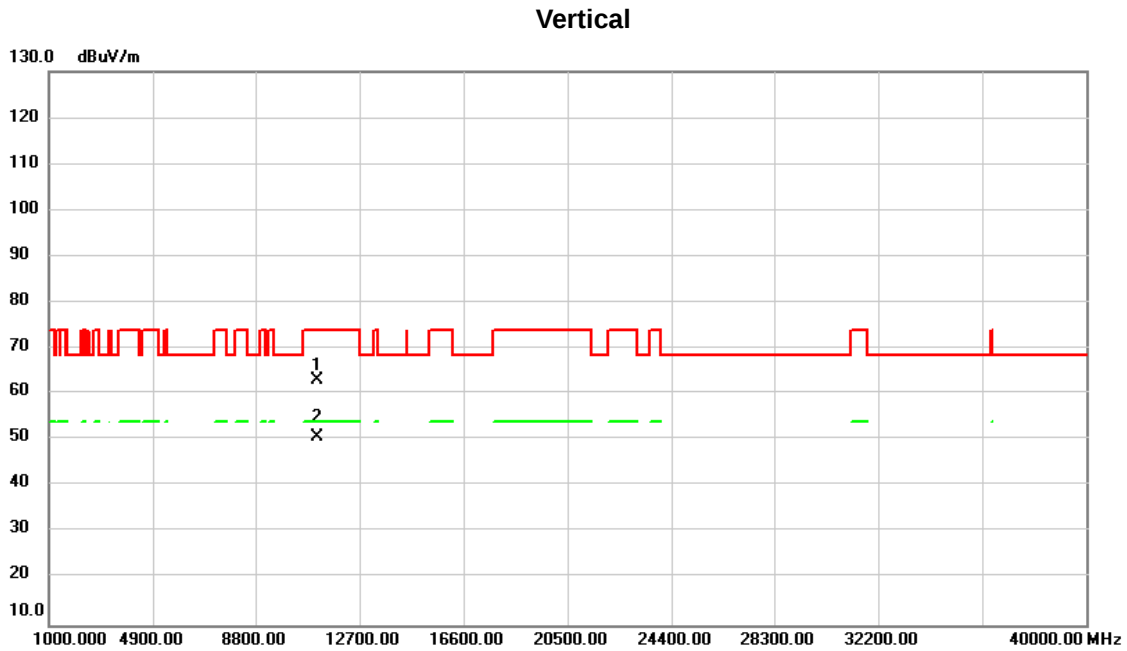


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.000	48.98	14.04	63.02	74.00	-10.98	peak	
2	*	11100.000	36.54	14.04	50.58	54.00	-3.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/TX n (HT40) Mode 5550MHz
-----------	----------------------------------

Horizontal

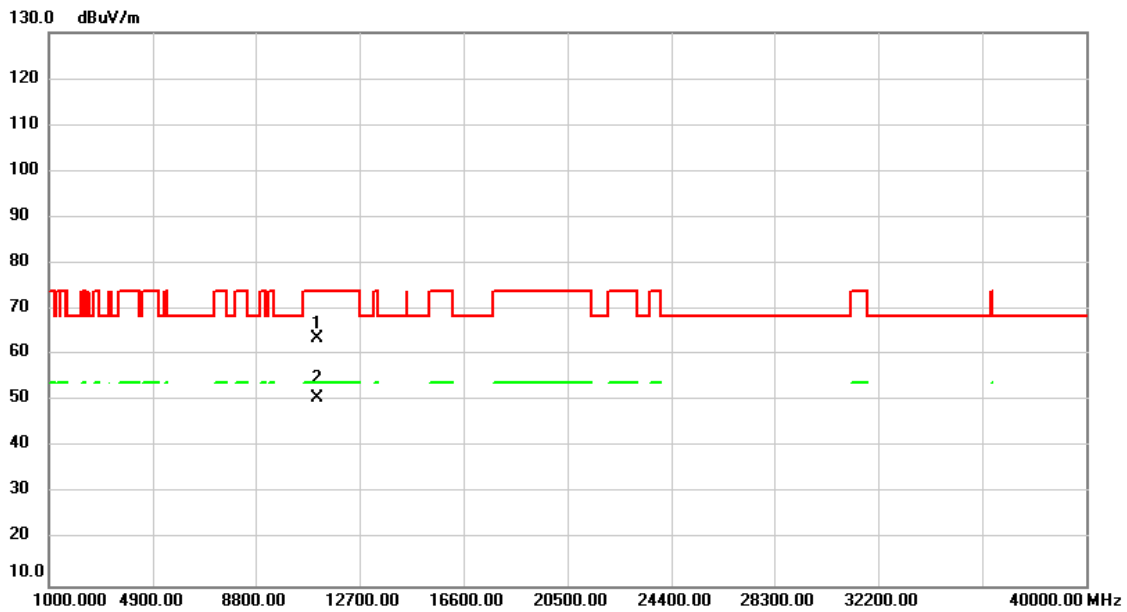


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.000	49.59	14.04	63.63	74.00	-10.37	peak	
2	*	11100.000	36.53	14.04	50.57	54.00	-3.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/TX n (HT40) Mode 5670MHz
-----------	----------------------------------

Vertical

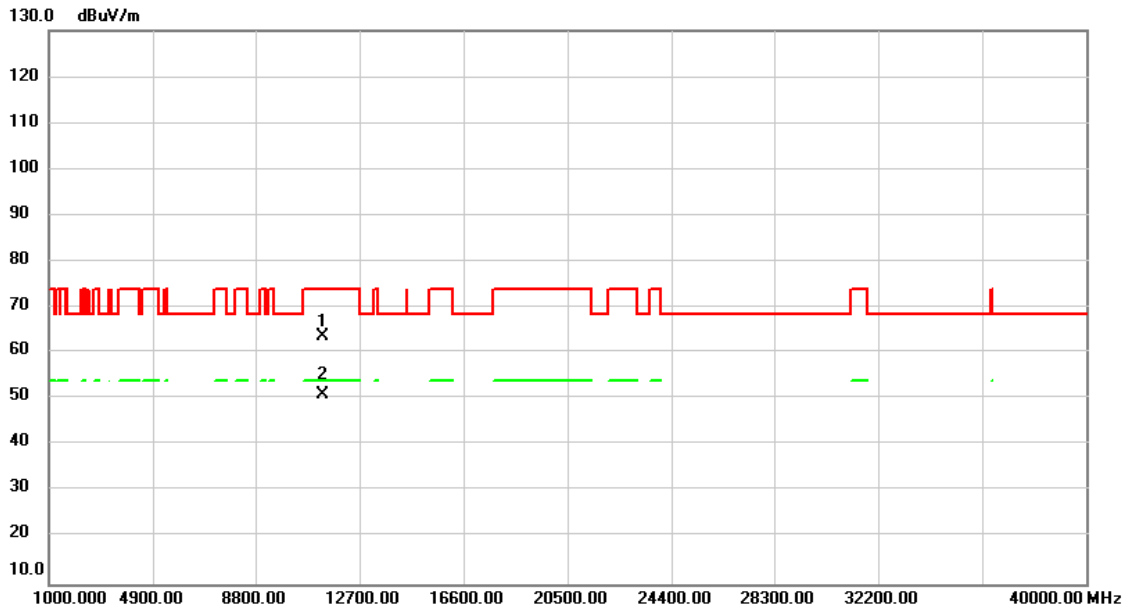


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.000	49.15	14.35	63.50	74.00	-10.50	peak	
2	*	11340.000	36.68	14.35	51.03	54.00	-2.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/TX n (HT40) Mode 5670MHz
-----------	----------------------------------

Horizontal

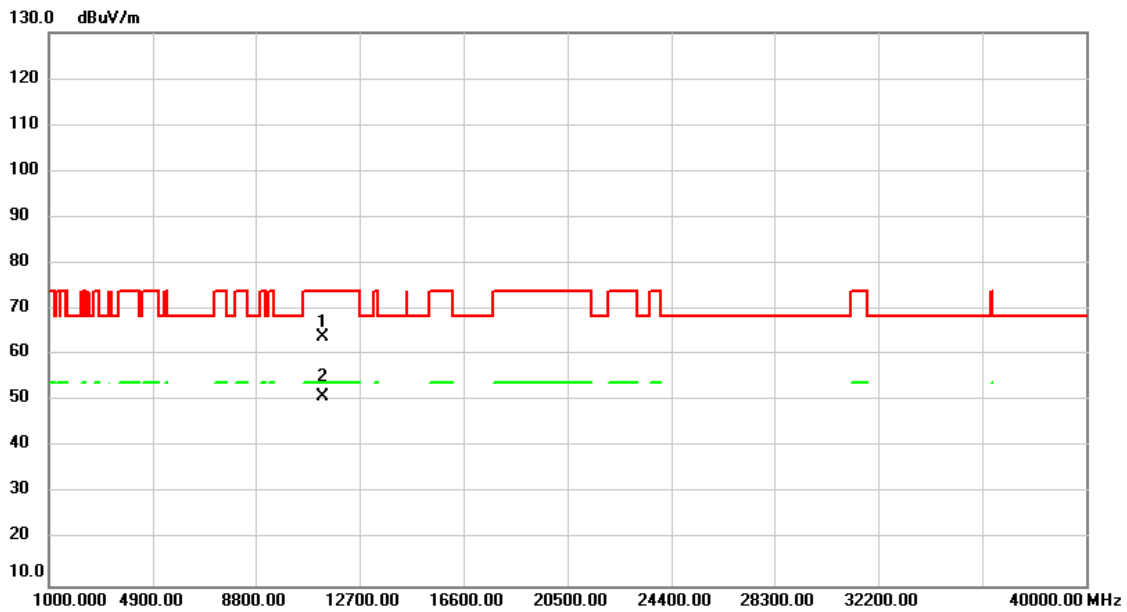


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.000	49.56	14.35	63.91	74.00	-10.09	peak	
2	*	11340.000	36.55	14.35	50.90	54.00	-3.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/TX n (HT40) Mode 5755MHz
-----------	---------------------------------

Vertical

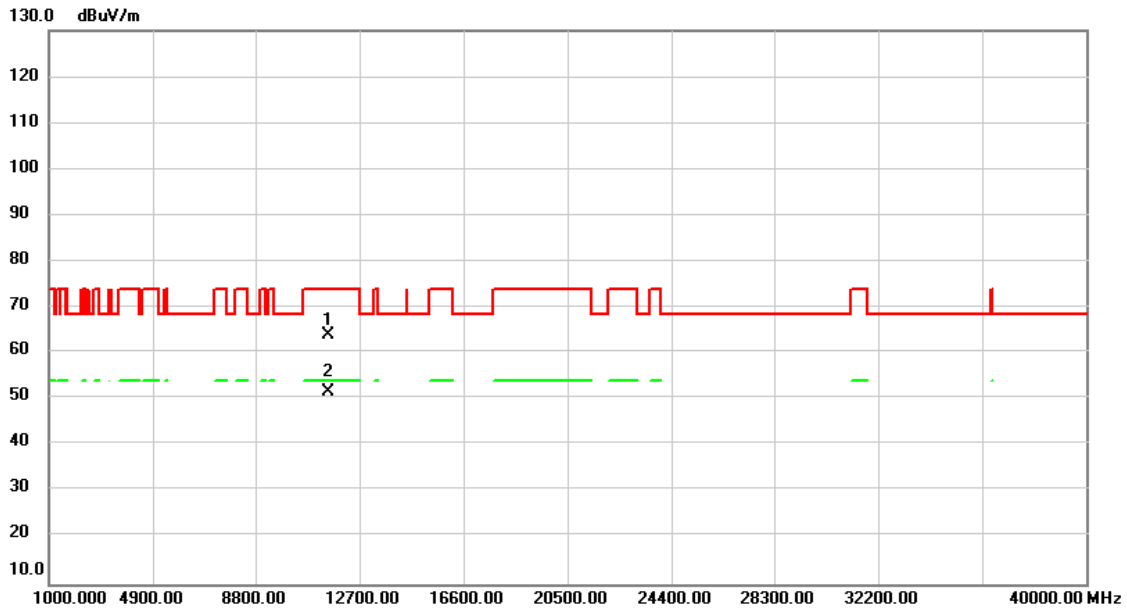


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.000	49.24	14.57	63.81	74.00	-10.19	peak	
2	*	11510.000	36.96	14.57	51.53	54.00	-2.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX n (HT40) Mode 5755MHz

Horizontal

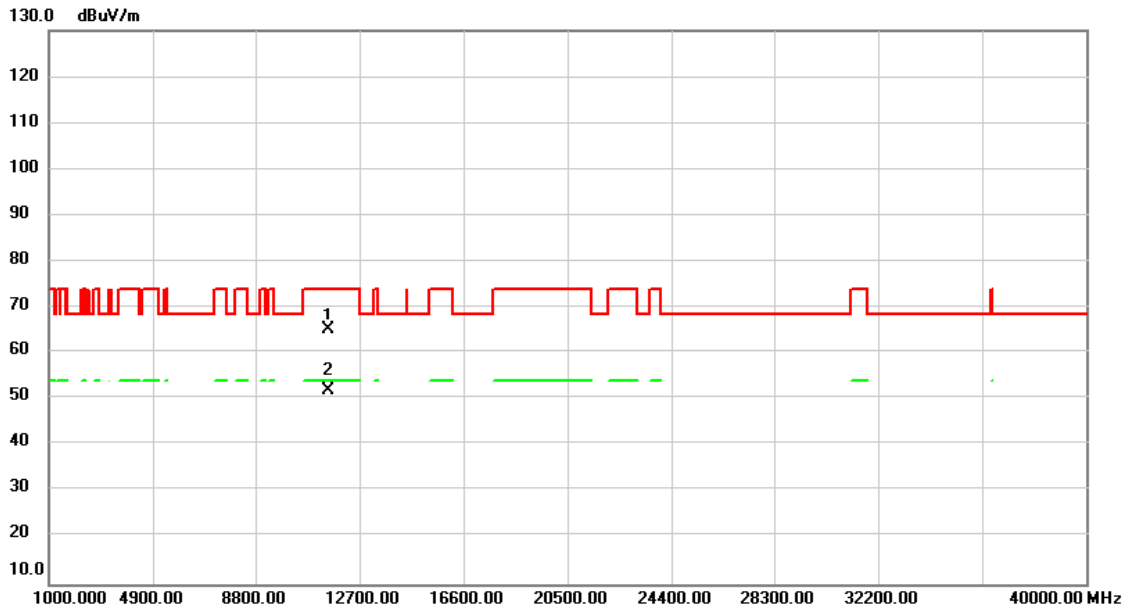

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.000	50.59	14.57	65.16	74.00	-8.84	peak	
2	*	11510.000	37.33	14.57	51.90	54.00	-2.10	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX n (HT40) Mode 5795MHz

Vertical

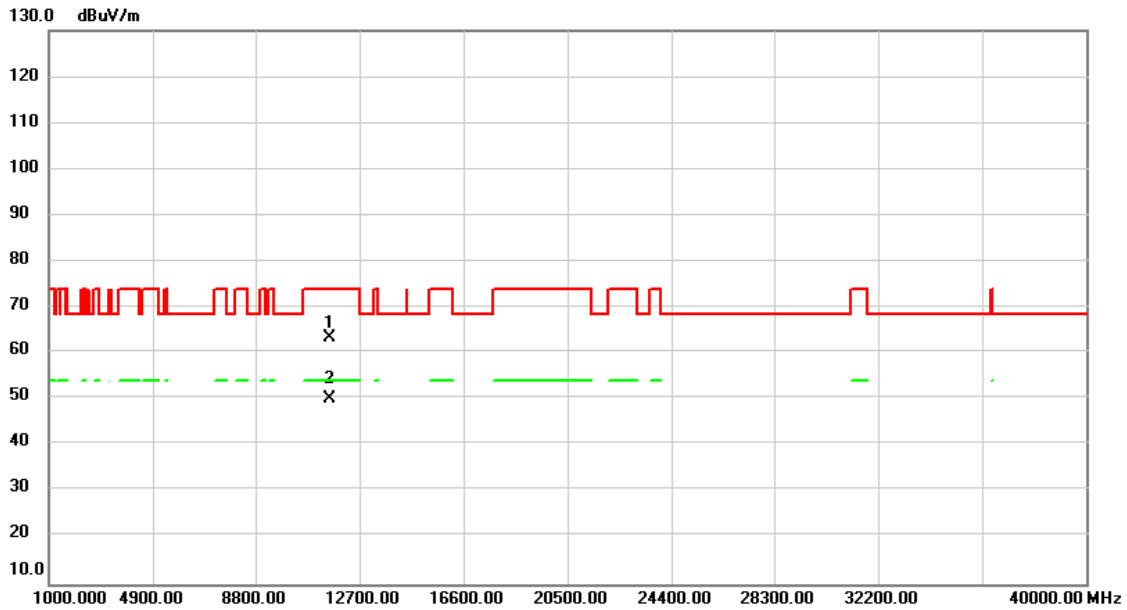


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.000	48.56	14.57	63.13	74.00	-10.87	peak	
2	*	11590.000	35.45	14.57	50.02	54.00	-3.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/TX n (HT40) Mode 5795MHz
-----------	---------------------------------

Horizontal

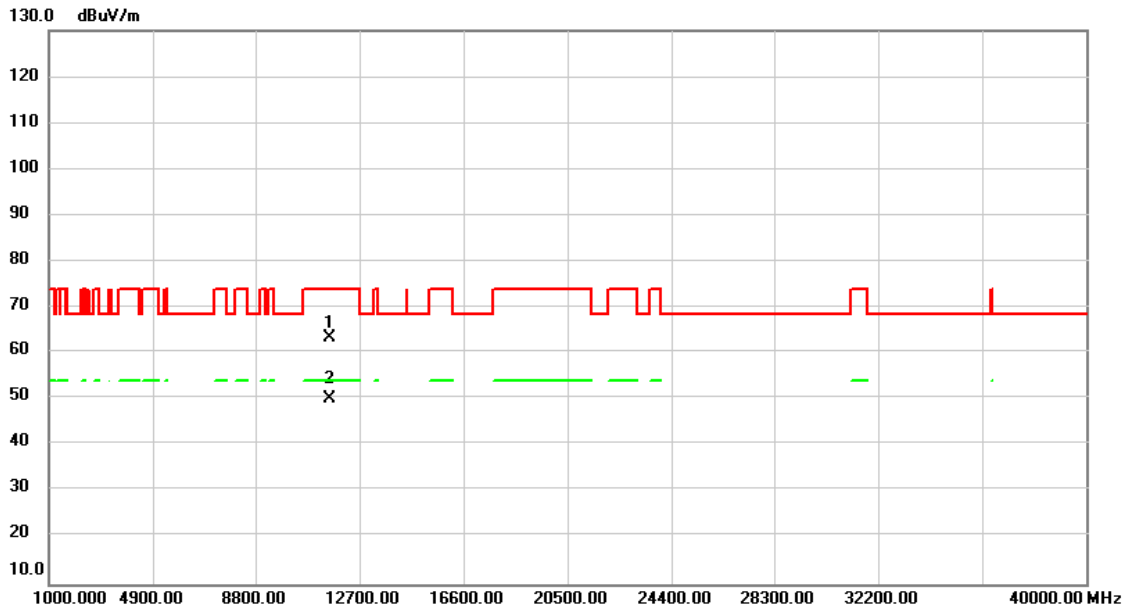


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.000	48.59	14.57	63.16	74.00	-10.84	peak	
2	*	11590.000	35.40	14.57	49.97	54.00	-4.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ac (VHT80) Mode 5210MHz

Vertical

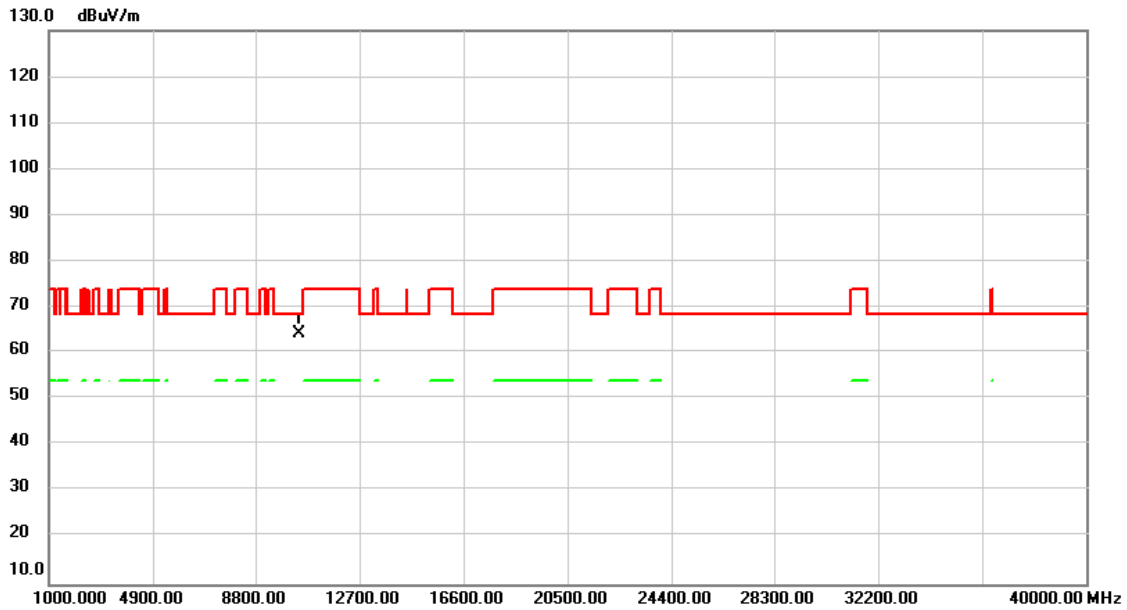


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.000	50.44	13.57	64.01	68.30	-4.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ac (VHT80) Mode 5210MHz

Horizontal

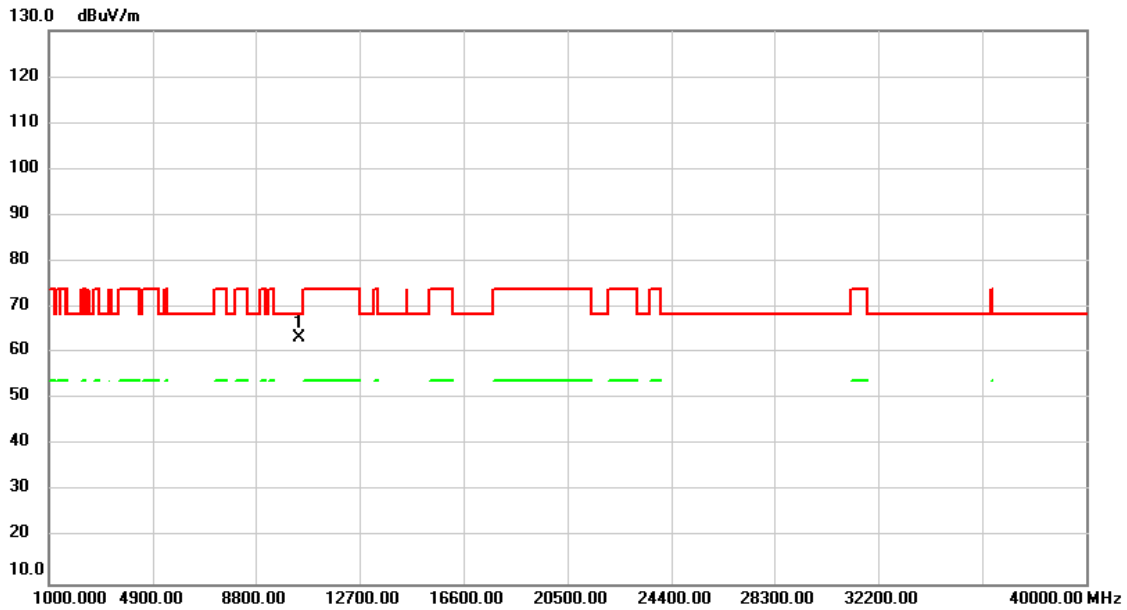


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.000	49.78	13.57	63.35	68.30	-4.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ac (VHT80) Mode 5290MHz

Vertical

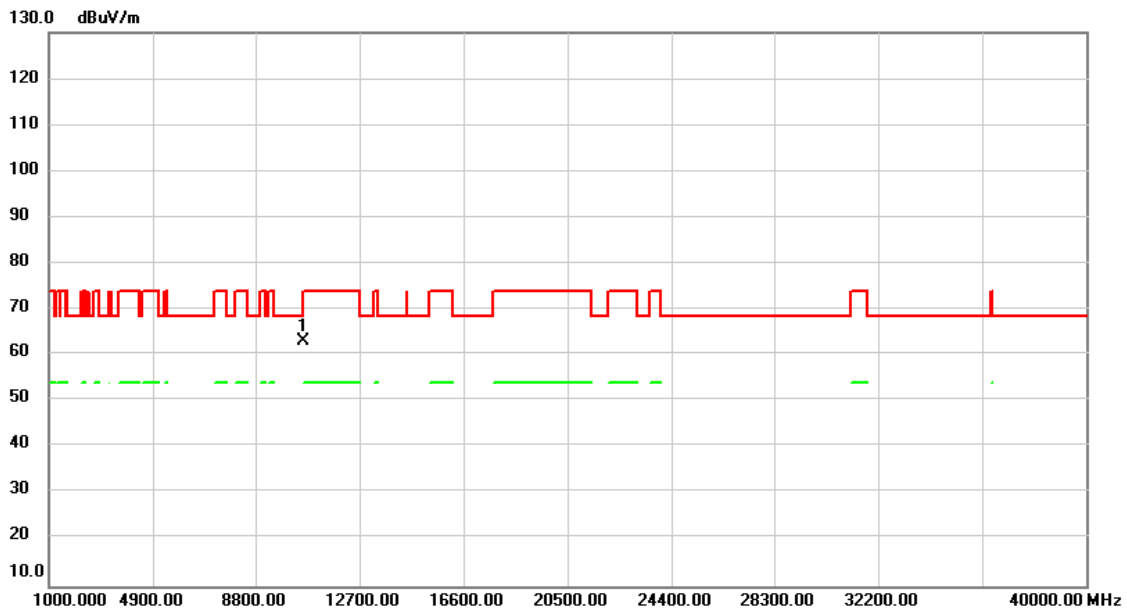


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.000	49.15	13.69	62.84	68.30	-5.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ac (VHT80) Mode 5290MHz

Horizontal

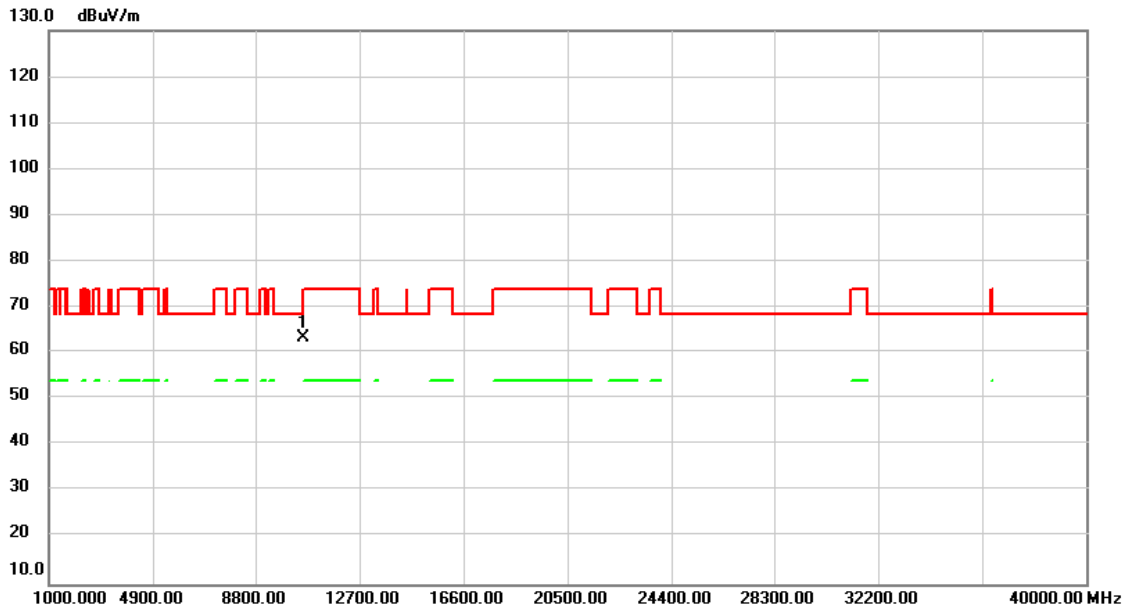


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.000	49.53	13.69	63.22	68.30	-5.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ac (VHT80) Mode 530MHz

Vertical

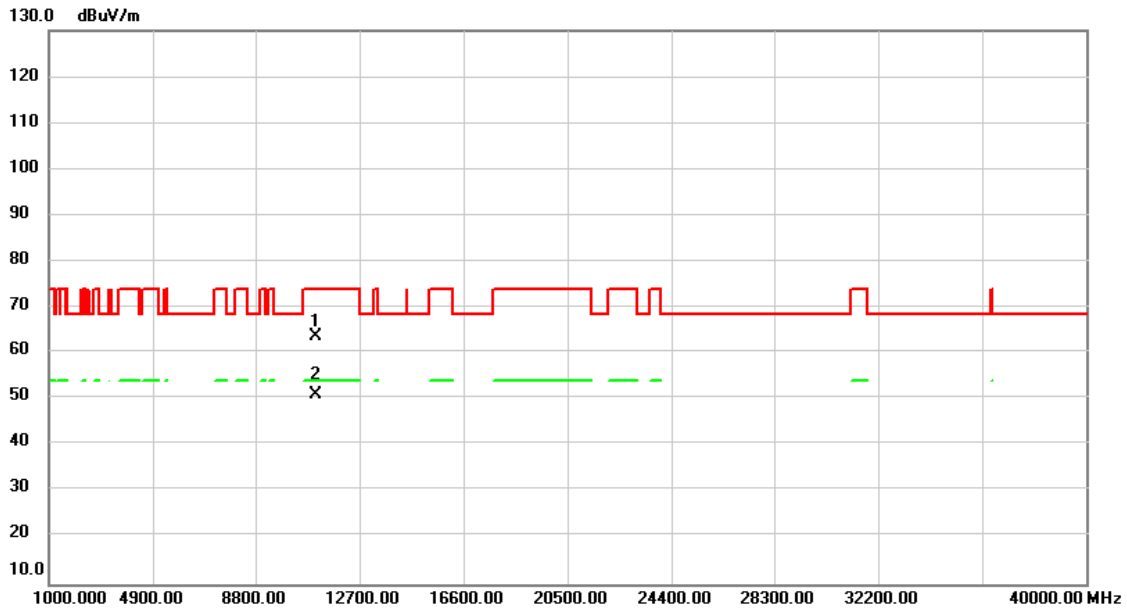


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.000	49.48	14.00	63.48	74.00	-10.52	peak	
2	*	11060.000	36.88	14.00	50.88	54.00	-3.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ac (VHT80) Mode 530MHz

Horizontal

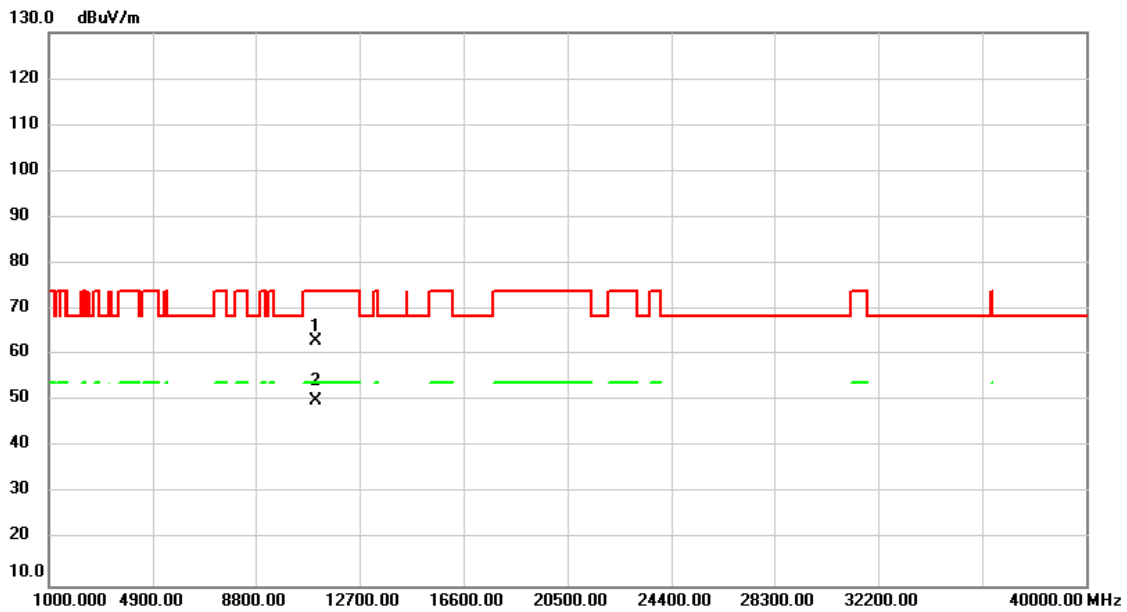


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.000	48.88	14.00	62.88	74.00	-11.12	peak	
2	*	11060.000	35.94	14.00	49.94	54.00	-4.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ac (VHT80) Mode 5610MHz

Vertical

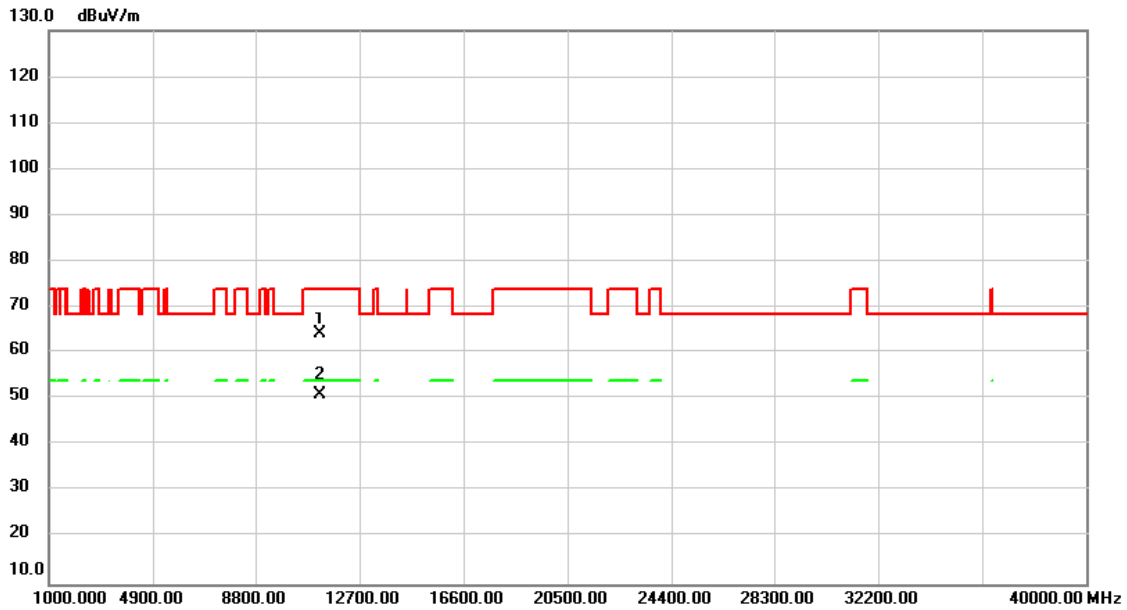

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.000	49.84	14.20	64.04	74.00	-9.96	peak	
2	*	11220.000	36.86	14.20	51.06	54.00	-2.94	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ac (VHT80) Mode 5610MHz

Horizontal

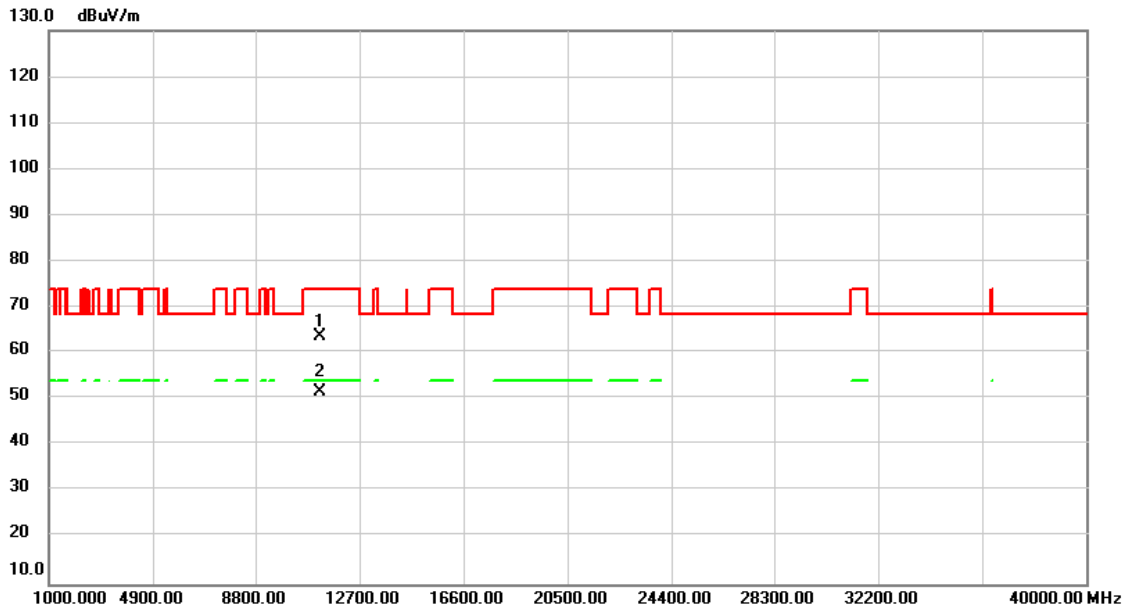


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.000	49.36	14.20	63.56	74.00	-10.44	peak	
2	*	11220.000	37.29	14.20	51.49	54.00	-2.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ac (VHT80) Mode 5775MHz

Vertical

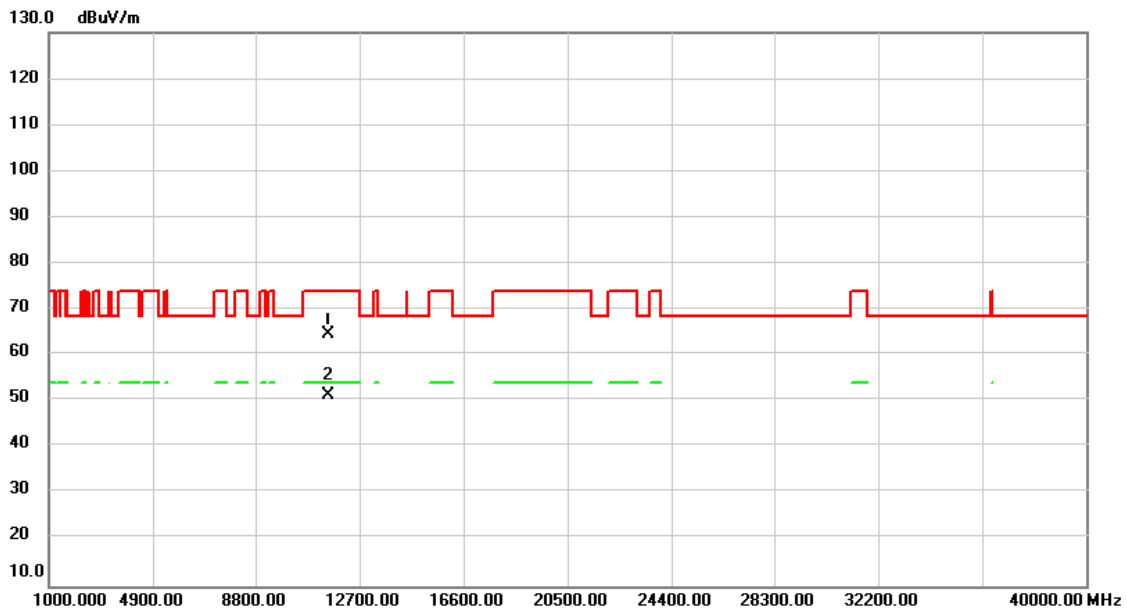


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.000	50.00	14.57	64.57	74.00	-9.43	peak	
2	*	11550.000	36.82	14.57	51.39	54.00	-2.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ac (VHT80) Mode 5775MHz

Horizontal

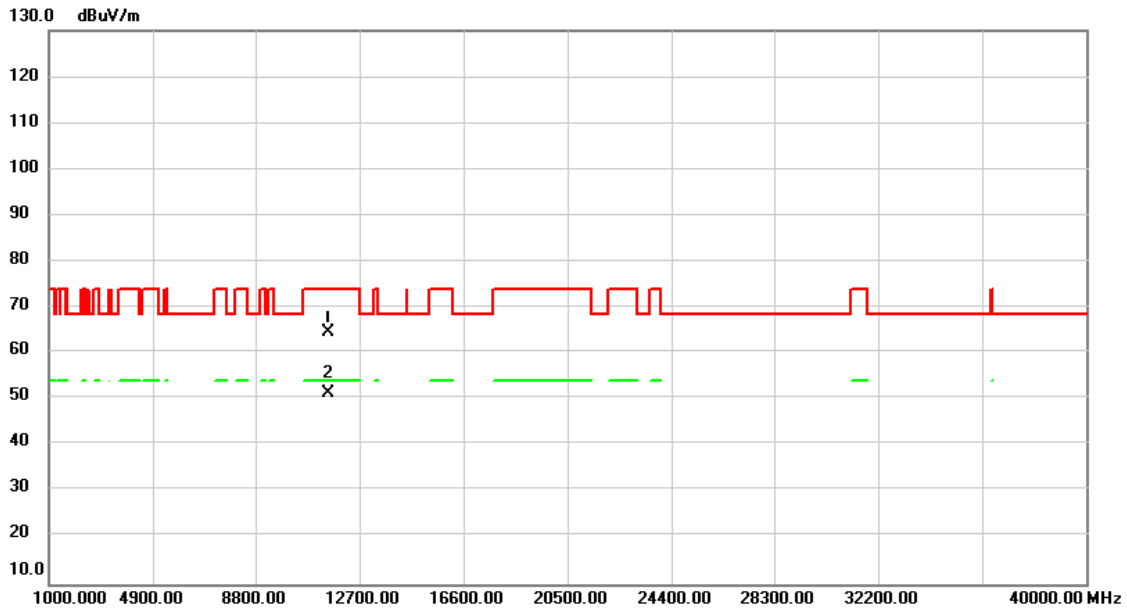


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.000	49.87	14.57	64.44	74.00	-9.56	peak	
2	*	11550.000	36.81	14.57	51.38	54.00	-2.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ac (VHT160) Mode 5250MHz

Vertical

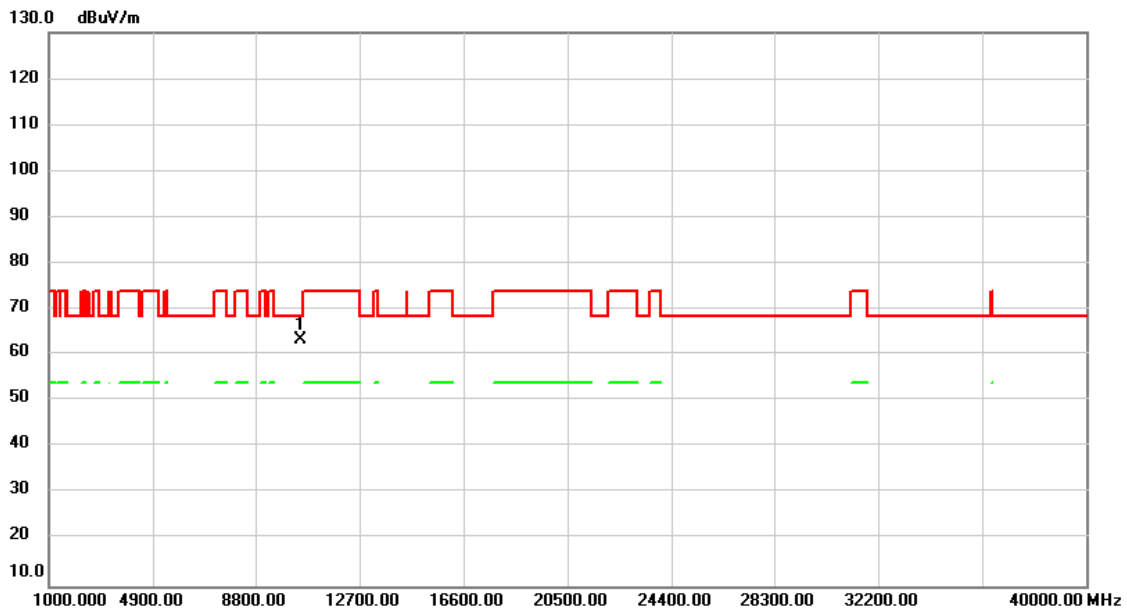


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.000	49.55	13.64	63.19	68.30	-5.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ac (VHT160) Mode 5250MHz

Horizontal

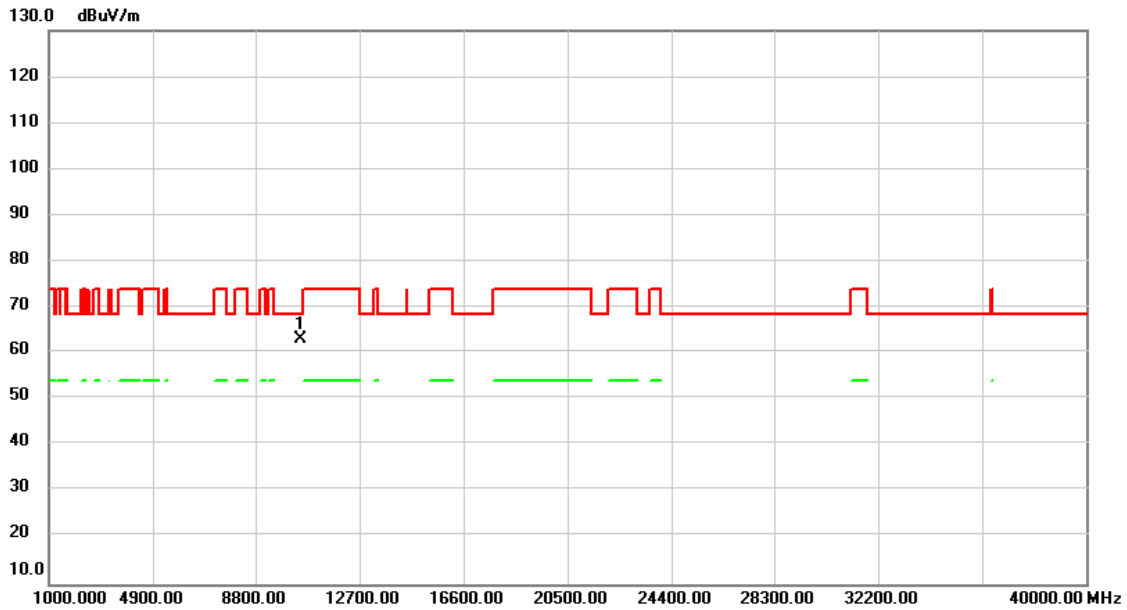


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.000	49.22	13.64	62.86	68.30	-5.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ac (VHT160) Mode 5570MHz

Vertical

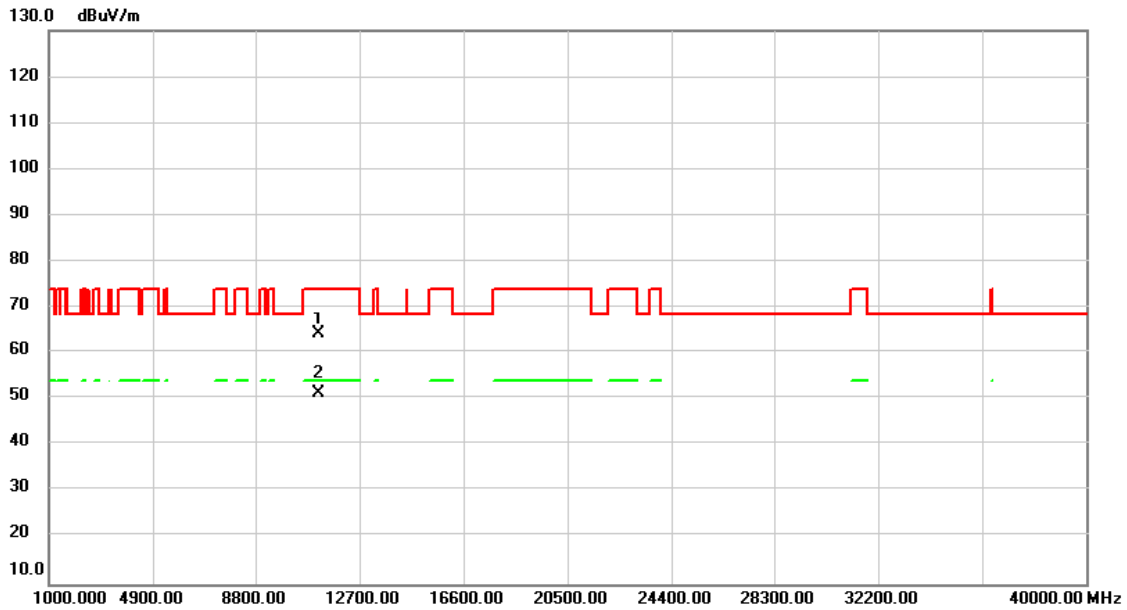


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.000	49.99	14.10	64.09	74.00	-9.91	peak	
2	*	11140.000	37.15	14.10	51.25	54.00	-2.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/TX ac (VHT160) Mode 5570MHz
-----------	-------------------------------------

Horizontal

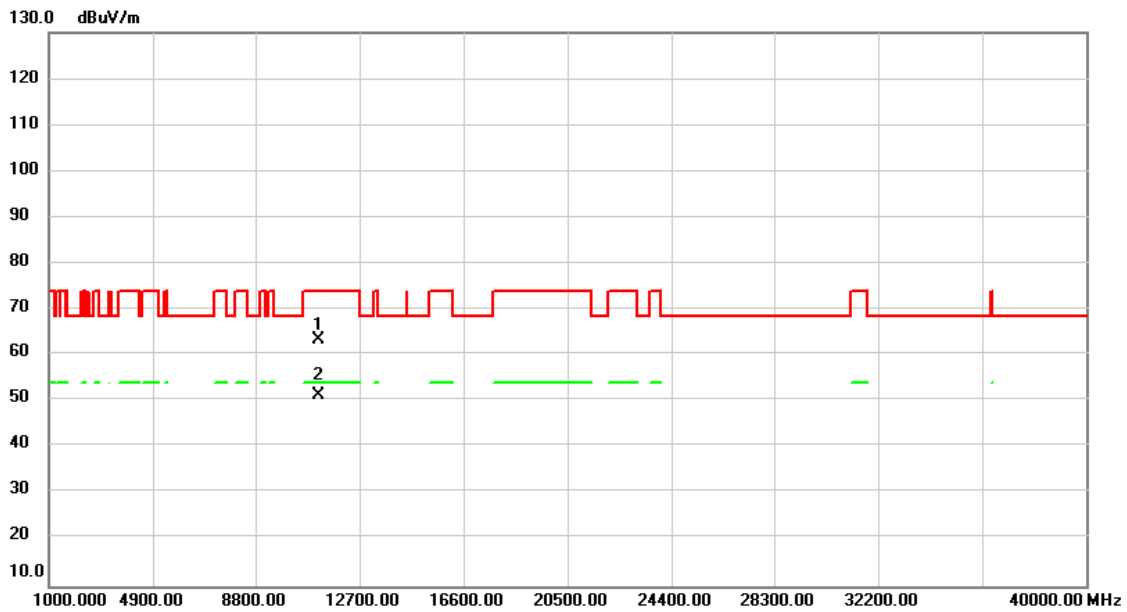


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11140.000	49.24	14.10	63.34	74.00	-10.66	peak	
2	*	11140.000	37.04	14.10	51.14	54.00	-2.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW20) Mode 5180MHz

Vertical

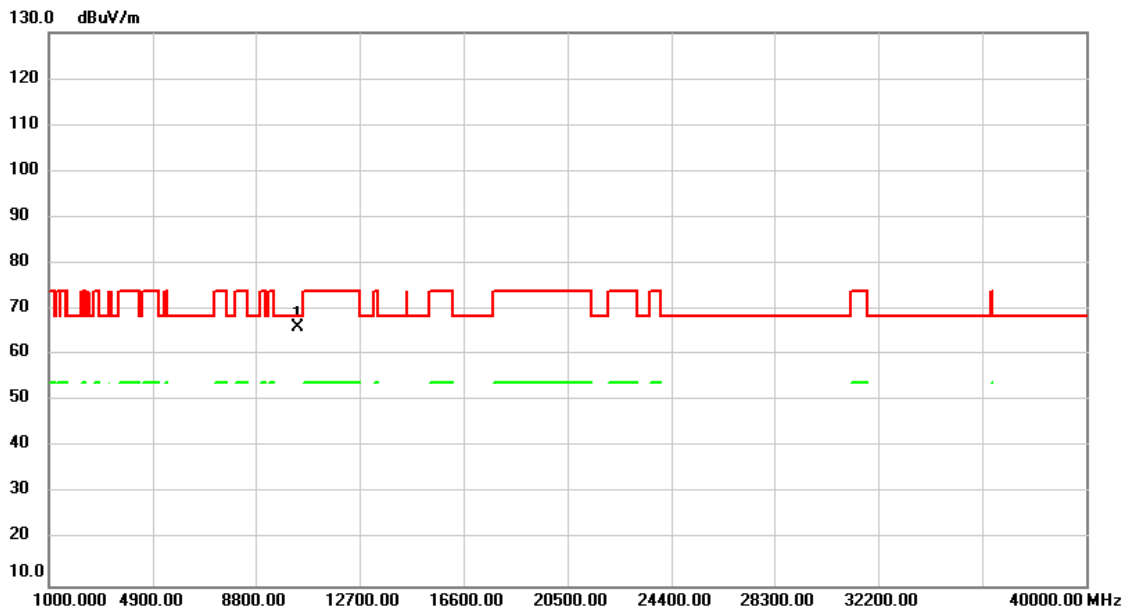


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.000	52.38	13.51	65.89	68.30	-2.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW20) Mode 5180MHz

Horizontal

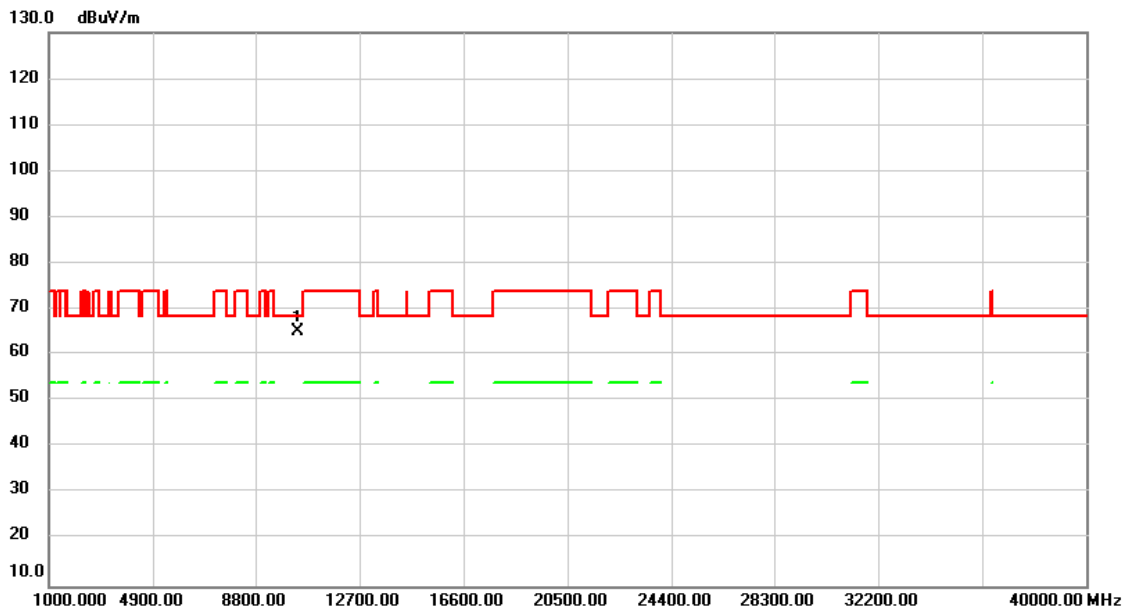


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.000	51.56	13.51	65.07	68.30	-3.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW20) Mode 5200MHz

Vertical

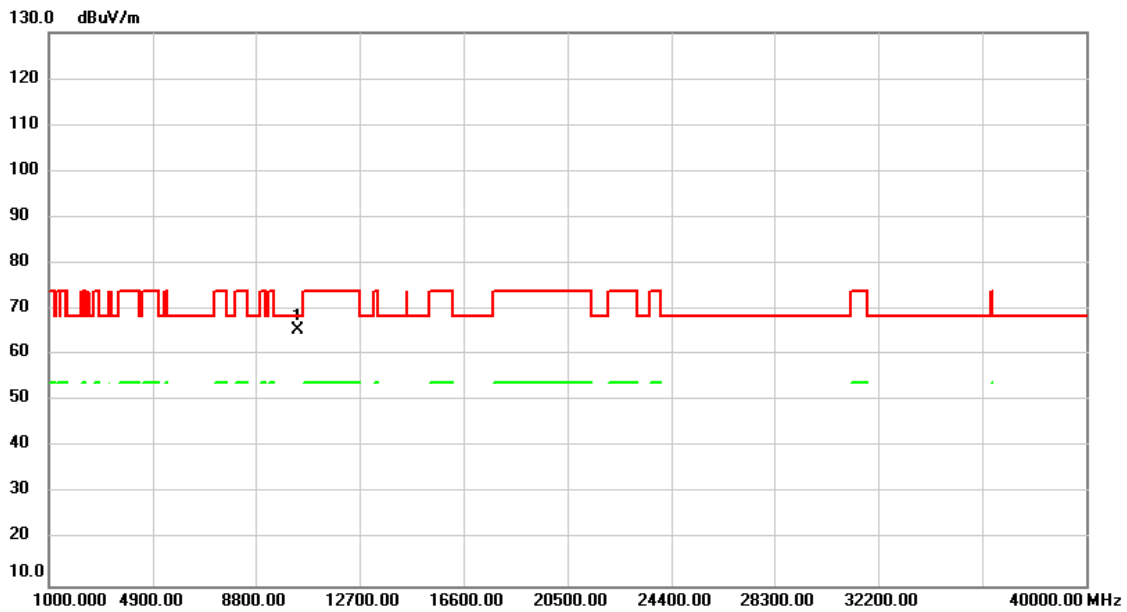


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.000	51.94	13.55	65.49	68.30	-2.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW20) Mode 5200MHz

Horizontal

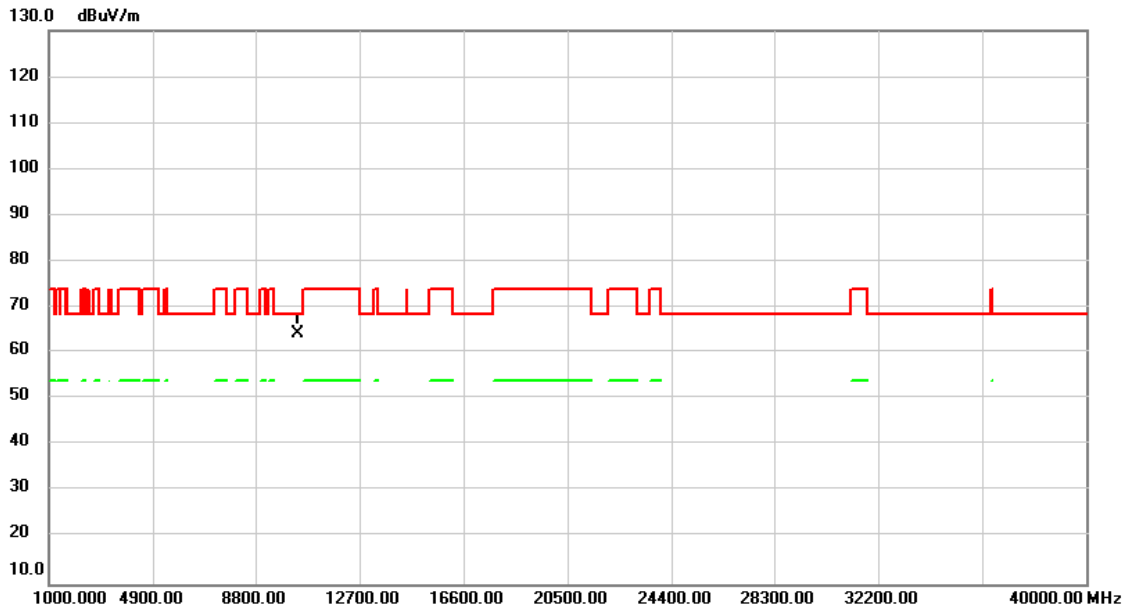


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.000	50.60	13.55	64.15	68.30	-4.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW20) Mode 5240MHz

Vertical

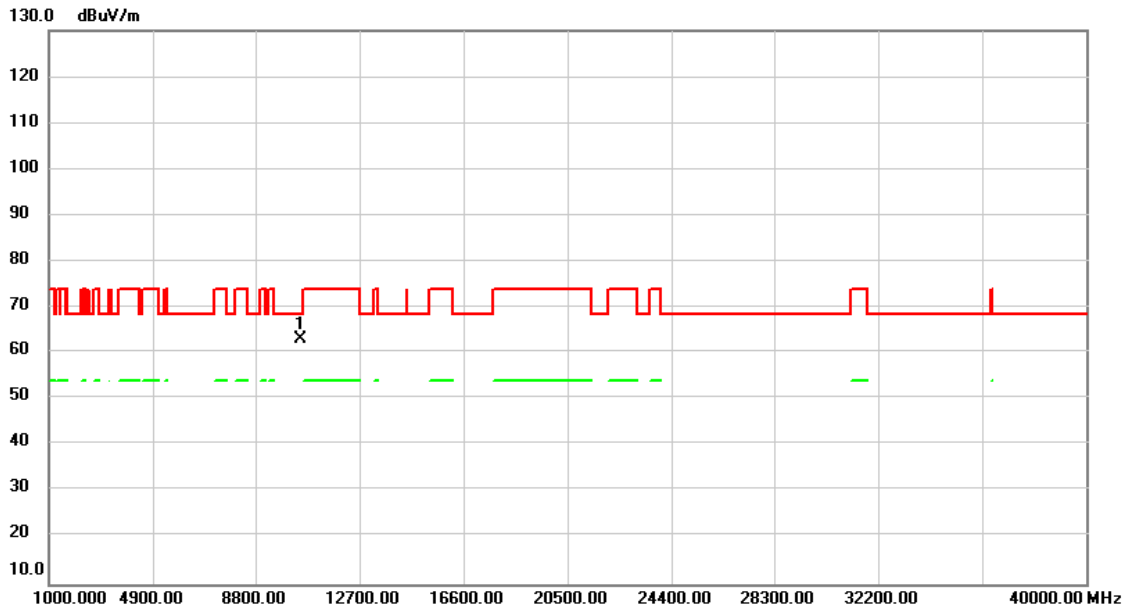


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.000	49.47	13.63	63.10	68.30	-5.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW20) Mode 5240MHz

Horizontal

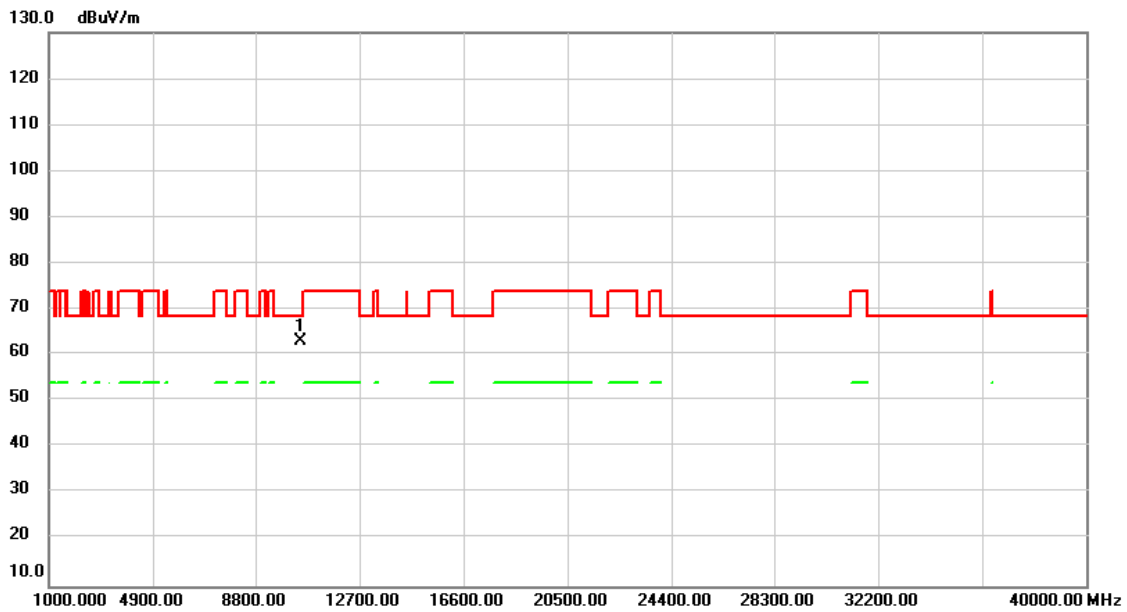


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.000	49.42	13.63	63.05	68.30	-5.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW20) Mode 5260MHz

Vertical

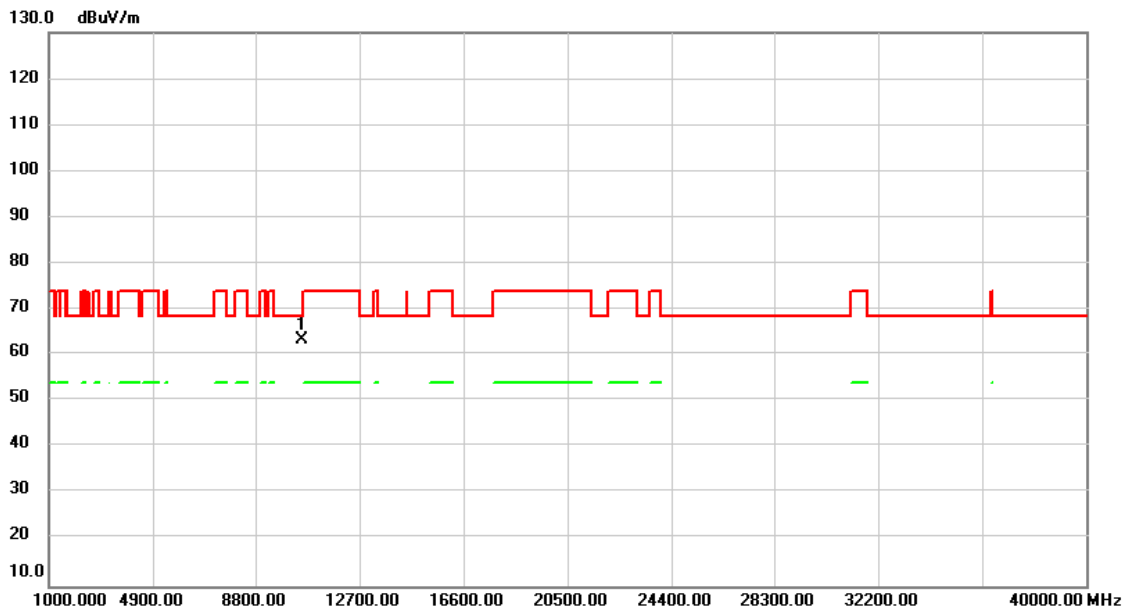


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.000	49.66	13.66	63.32	68.30	-4.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW20) Mode 5260MHz

Horizontal

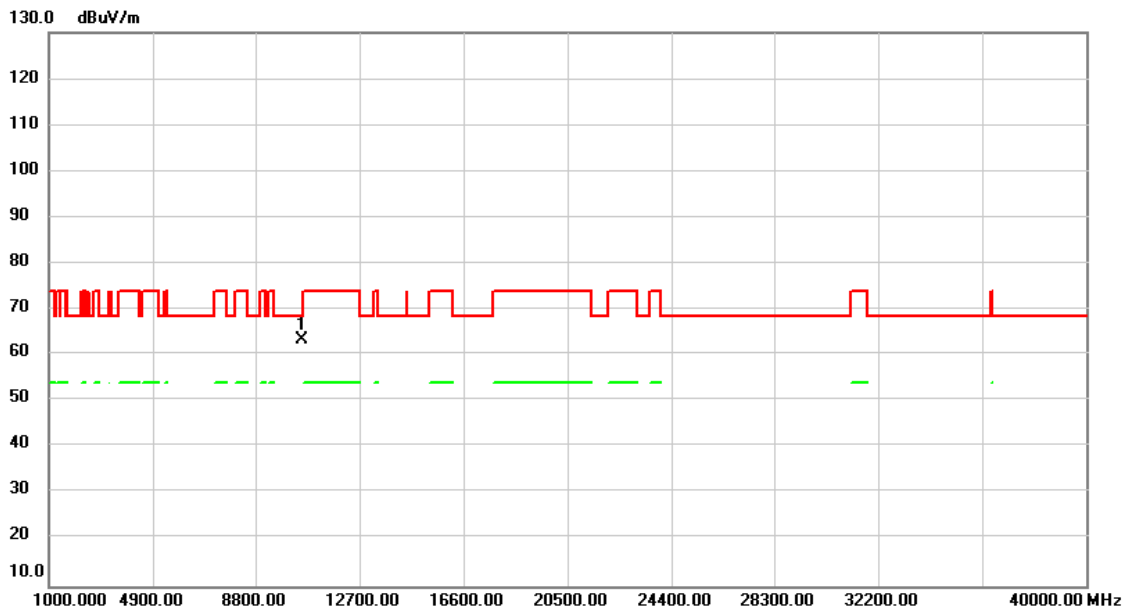


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.000	49.57	13.66	63.23	68.30	-5.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW20) Mode 5300MHz

Vertical

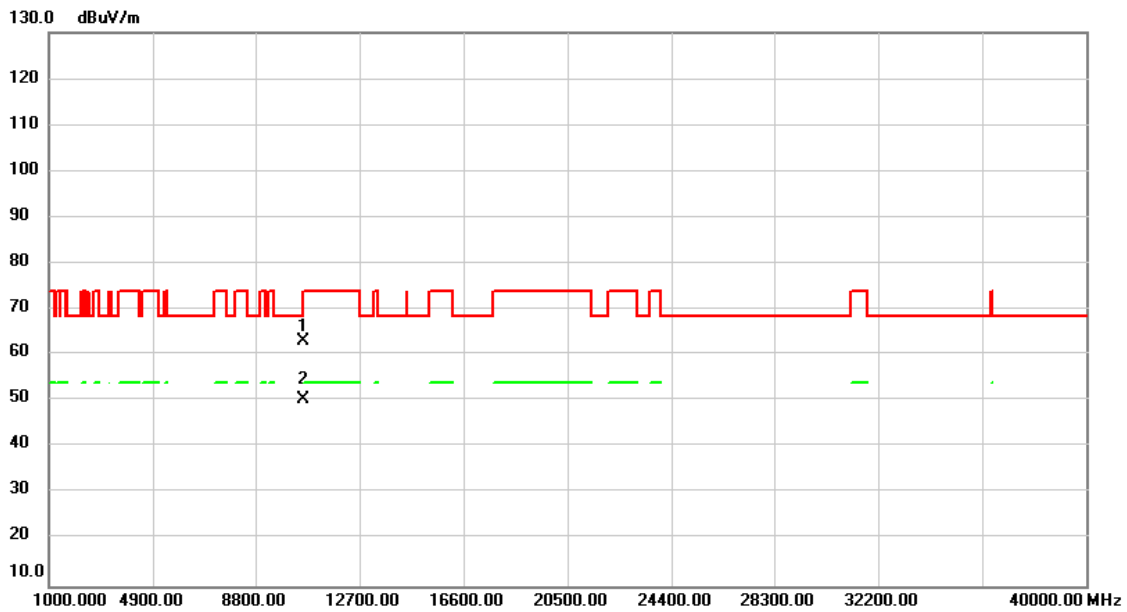


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	49.37	13.70	63.07	68.30	-5.23	peak	
2	*	10600.000	36.80	13.70	50.50	54.00	-3.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW20) Mode 5300MHz

Horizontal

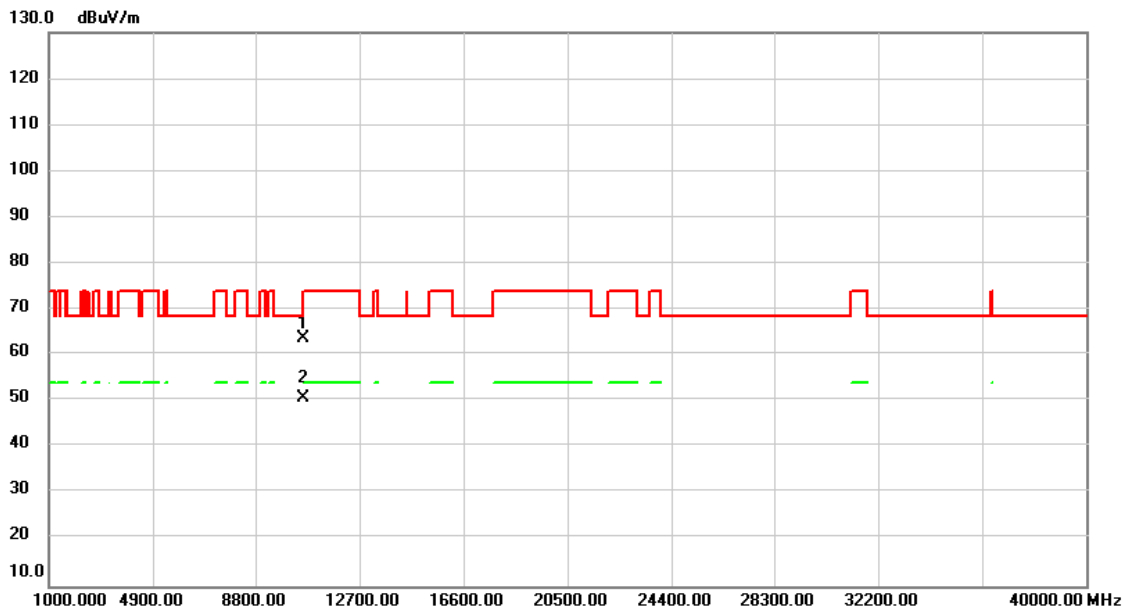


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.000	49.84	13.70	63.54	68.30	-4.76	peak	
2	*	10600.000	36.92	13.70	50.62	54.00	-3.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A/TX ax (HEW20) Mode 5320MHz
-----------	------------------------------------

Vertical

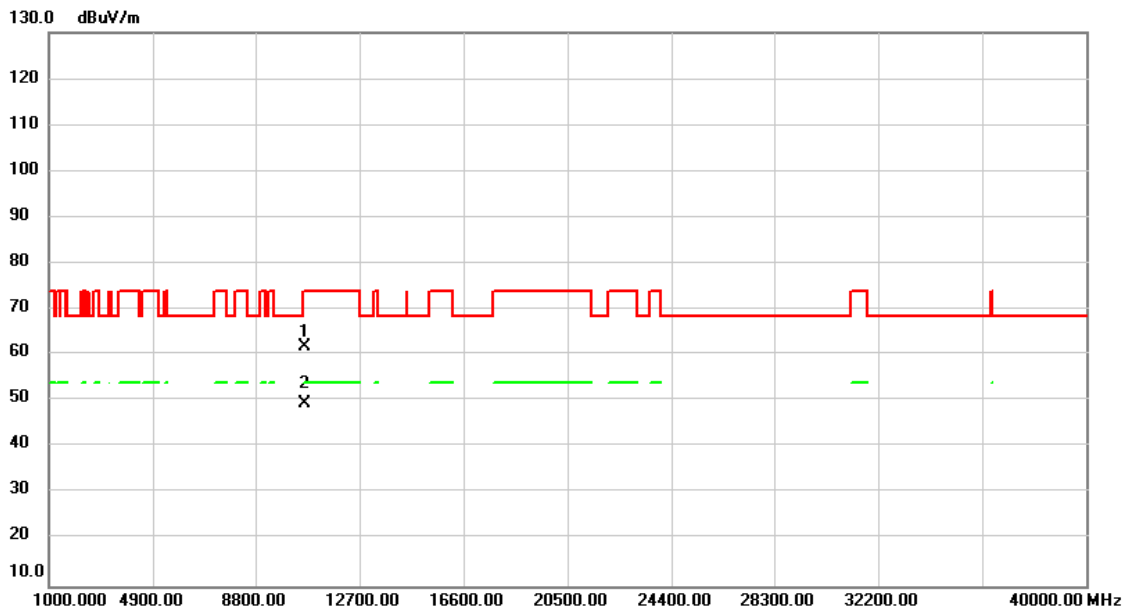


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.000	47.97	13.73	61.70	74.00	-12.30	peak	
2	*	10640.000	35.61	13.73	49.34	54.00	-4.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW20) Mode 5320MHz

Horizontal

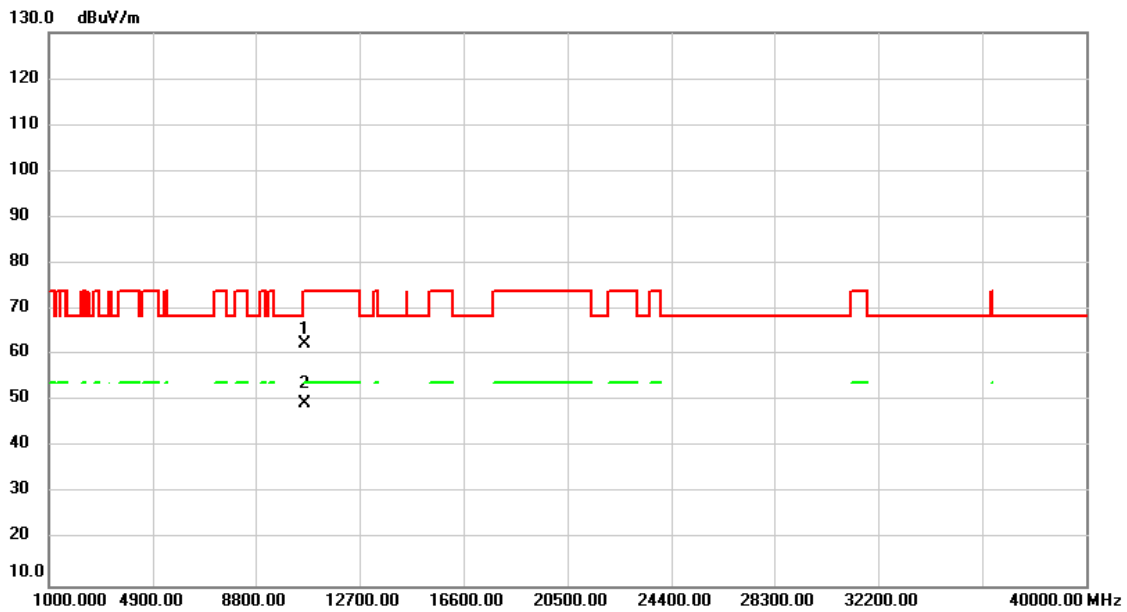


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.000	48.76	13.73	62.49	74.00	-11.51	peak	
2	*	10640.000	35.86	13.73	49.59	54.00	-4.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX ax (HEW20) Mode 5500MHz

Vertical

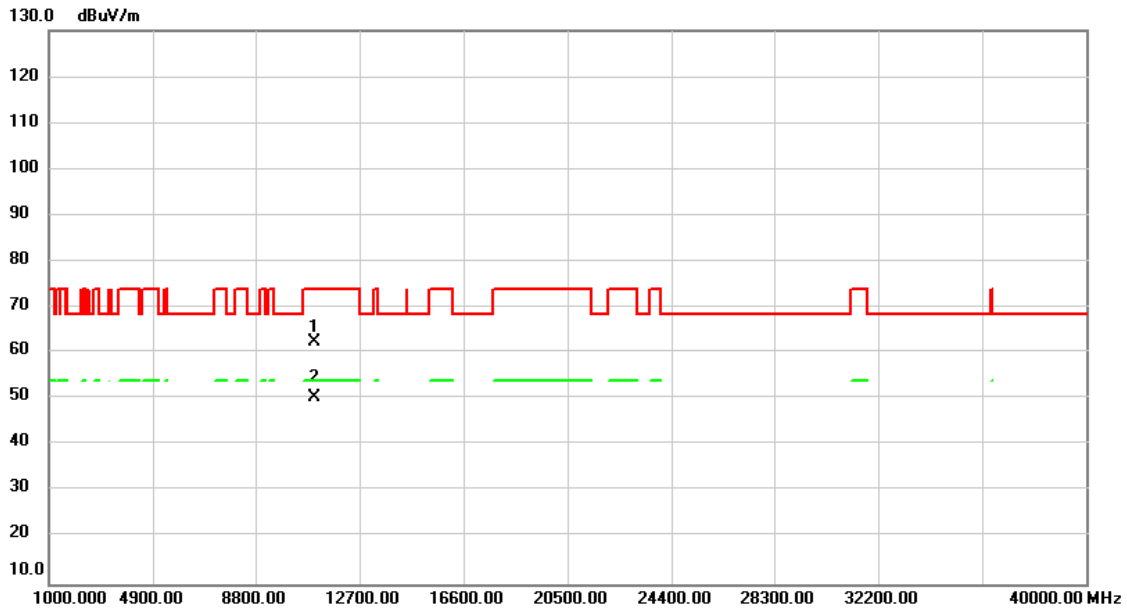


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	48.54	13.92	62.46	74.00	-11.54	peak	
2	*	11000.000	36.39	13.92	50.31	54.00	-3.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX ax (HEW20) Mode 5500MHz

Horizontal

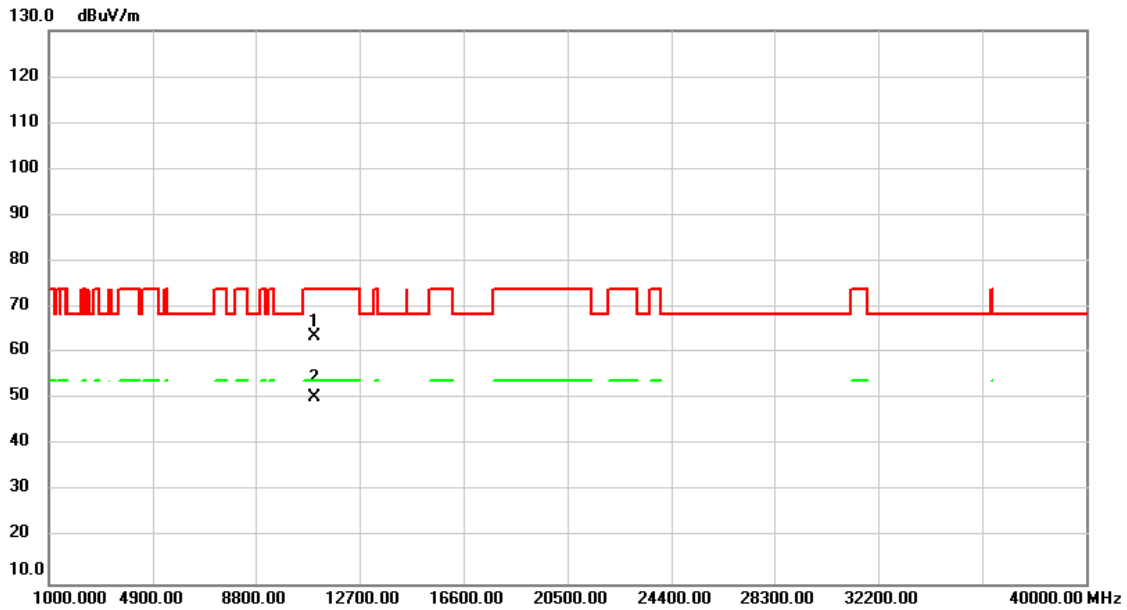


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.000	49.63	13.92	63.55	74.00	-10.45	peak	
2	*	11000.000	36.30	13.92	50.22	54.00	-3.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/ TX ax (HEW20) Mode 5580MHz
-----------	-------------------------------------

Vertical

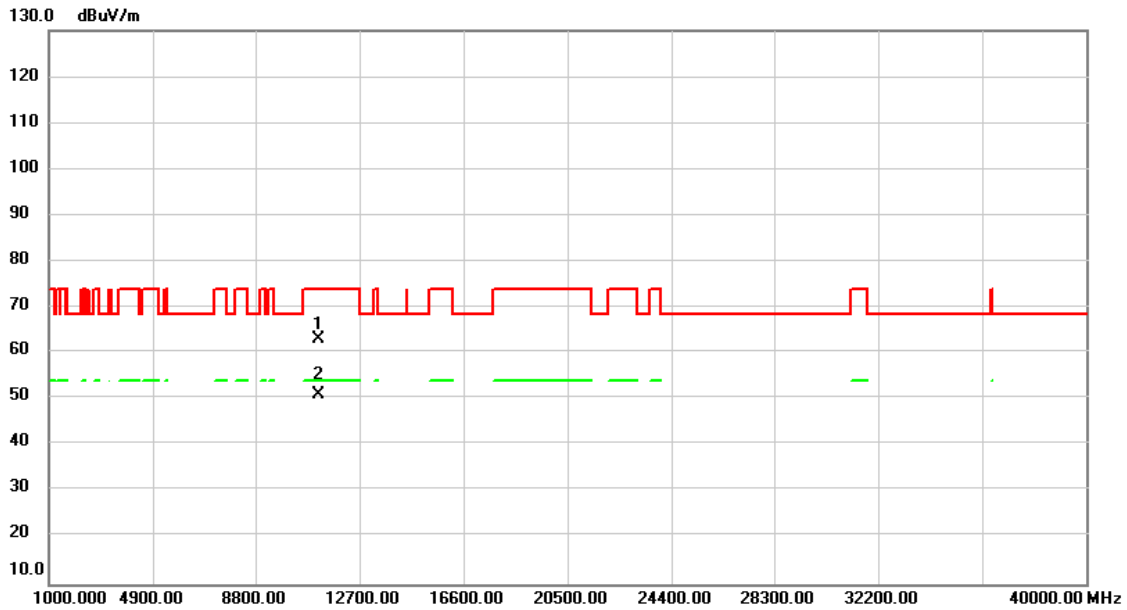


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.000	48.90	14.13	63.03	74.00	-10.97	peak	
2	*	11160.000	36.78	14.13	50.91	54.00	-3.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C/ TX ax (HEW20) Mode 5580MHz
-----------	-------------------------------------

Horizontal

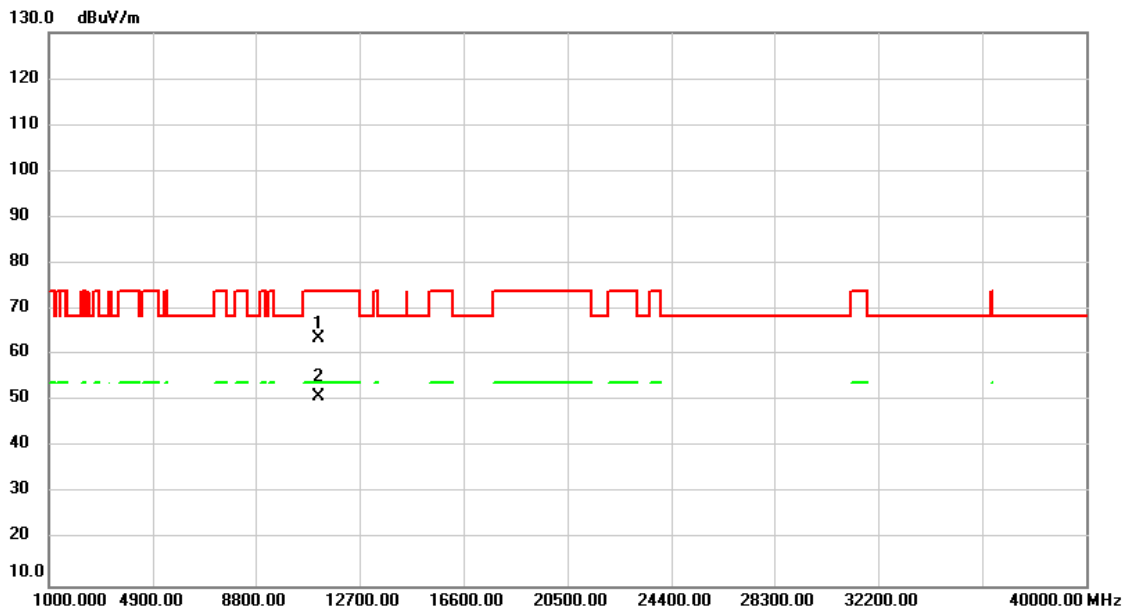


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.000	49.40	14.13	63.53	74.00	-10.47	peak	
2	*	11160.000	36.69	14.13	50.82	54.00	-3.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX ax (HEW20) Mode 5700MHz

Vertical

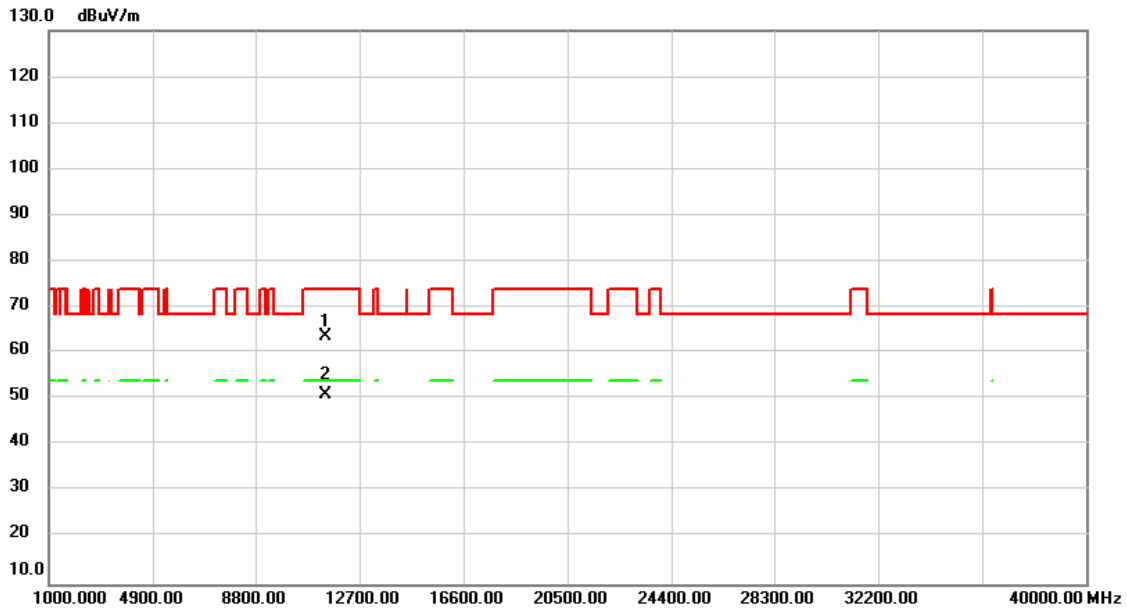


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.000	48.98	14.44	63.42	74.00	-10.58	peak	
2	*	11400.000	36.58	14.44	51.02	54.00	-2.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/ TX ax (HEW20) Mode 5700MHz

Horizontal

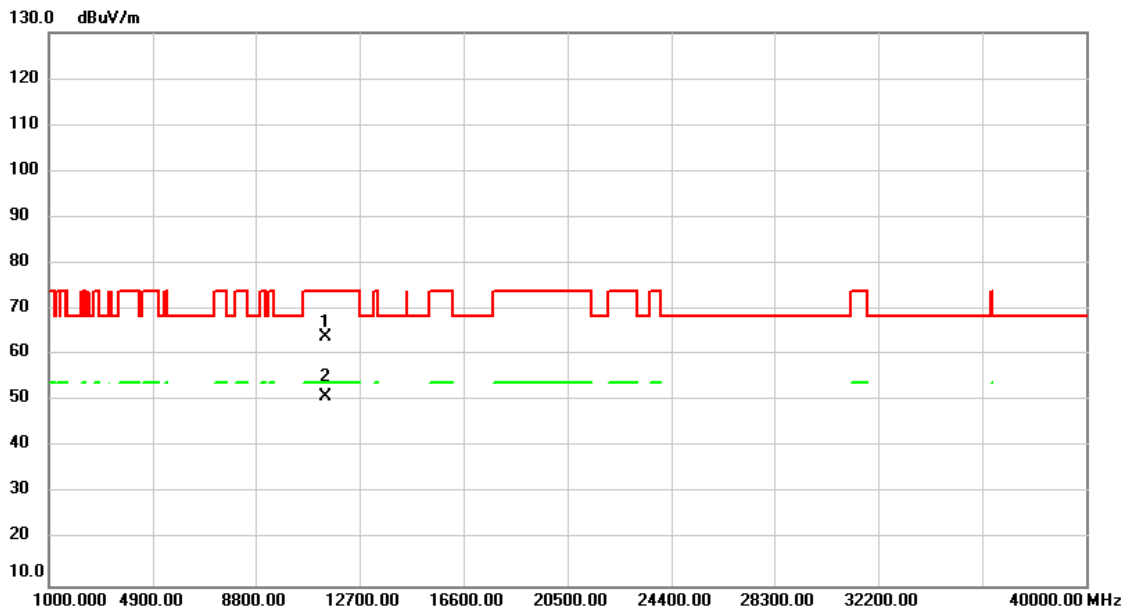


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.000	49.45	14.44	63.89	74.00	-10.11	peak	
2	*	11400.000	36.64	14.44	51.08	54.00	-2.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/ TX ax (HEW20) Mode 5745MHz
-----------	------------------------------------

Vertical

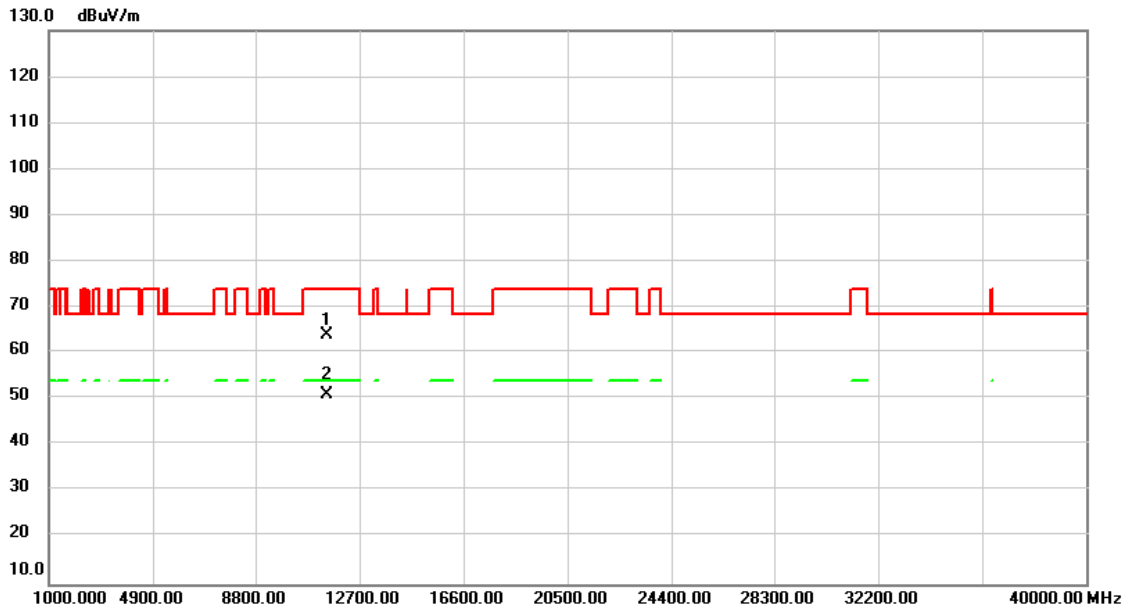


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.000	49.38	14.54	63.92	74.00	-10.08	peak	
2	*	11490.000	36.49	14.54	51.03	54.00	-2.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/ TX ax (HEW20) Mode 5745MHz

Horizontal

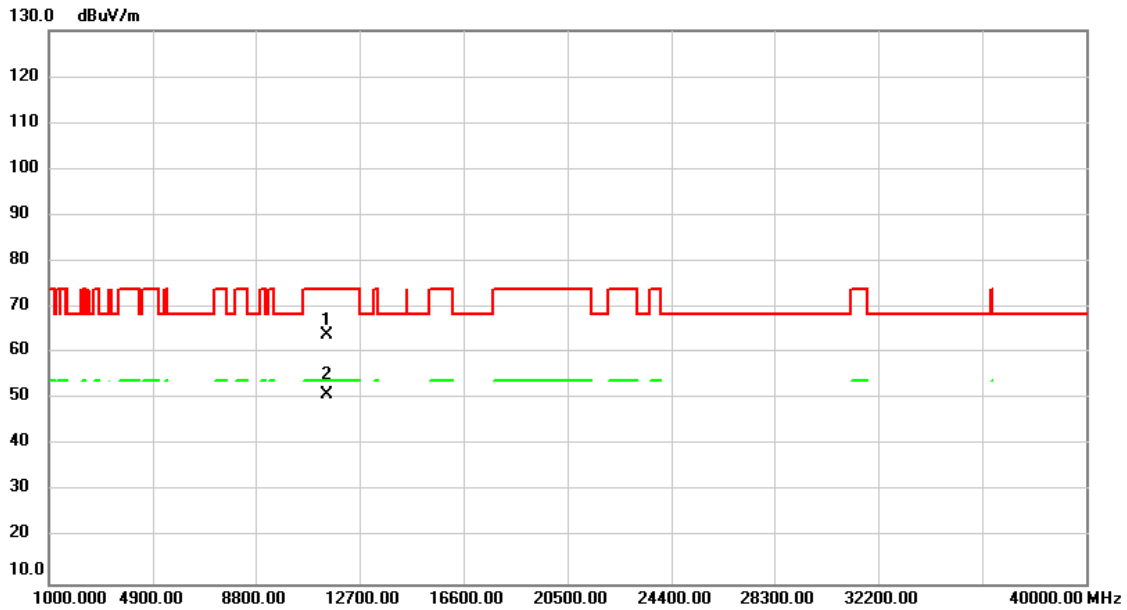


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.000	49.28	14.54	63.82	74.00	-10.18	peak	
2	*	11490.000	36.35	14.54	50.89	54.00	-3.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/ TX ax (HEW20) Mode 5785MHz
-----------	------------------------------------

Vertical

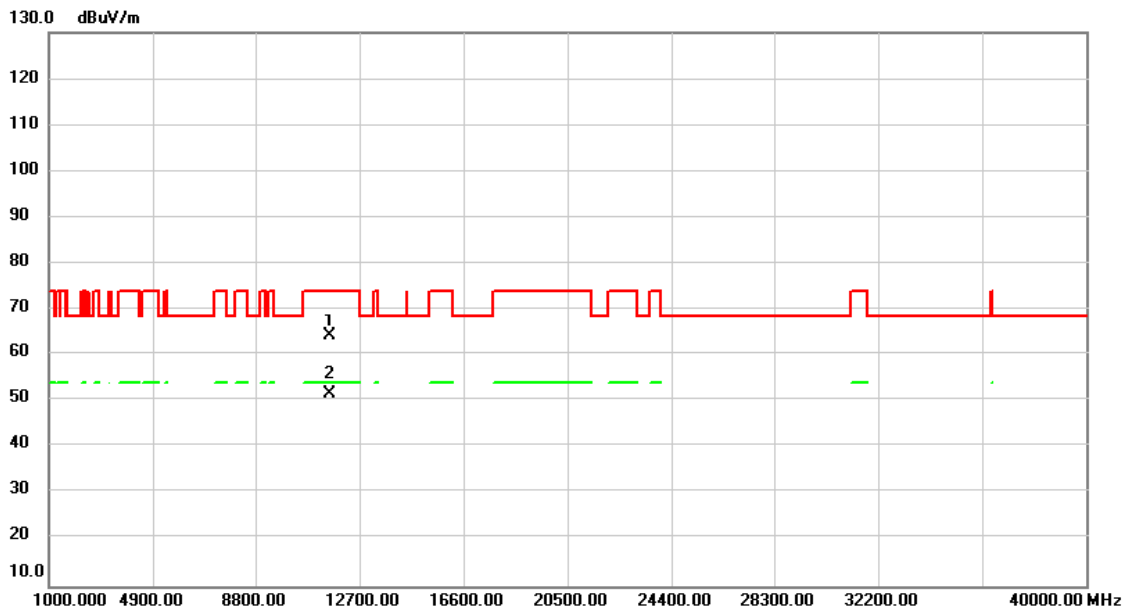


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.000	49.71	14.57	64.28	74.00	-9.72	peak	
2	*	11570.000	36.84	14.57	51.41	54.00	-2.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/ TX ax (HEW20) Mode 5785MHz

Horizontal

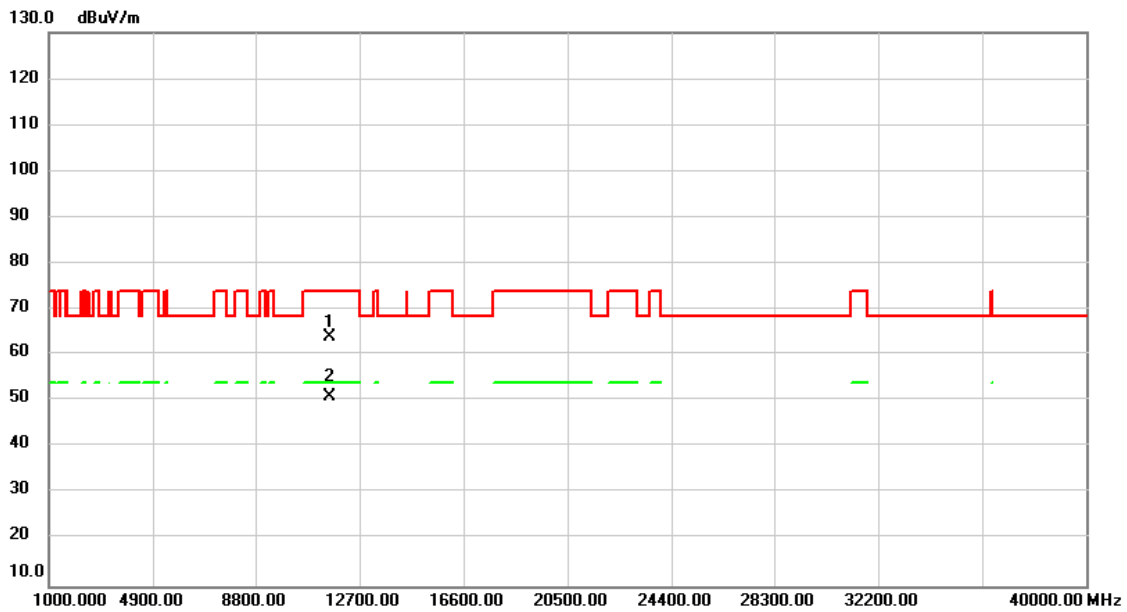

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.000	49.25	14.57	63.82	74.00	-10.18	peak	
2	*	11570.000	36.46	14.57	51.03	54.00	-2.97	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/ TX ax (HEW20)Mode 5825MHz

Vertical

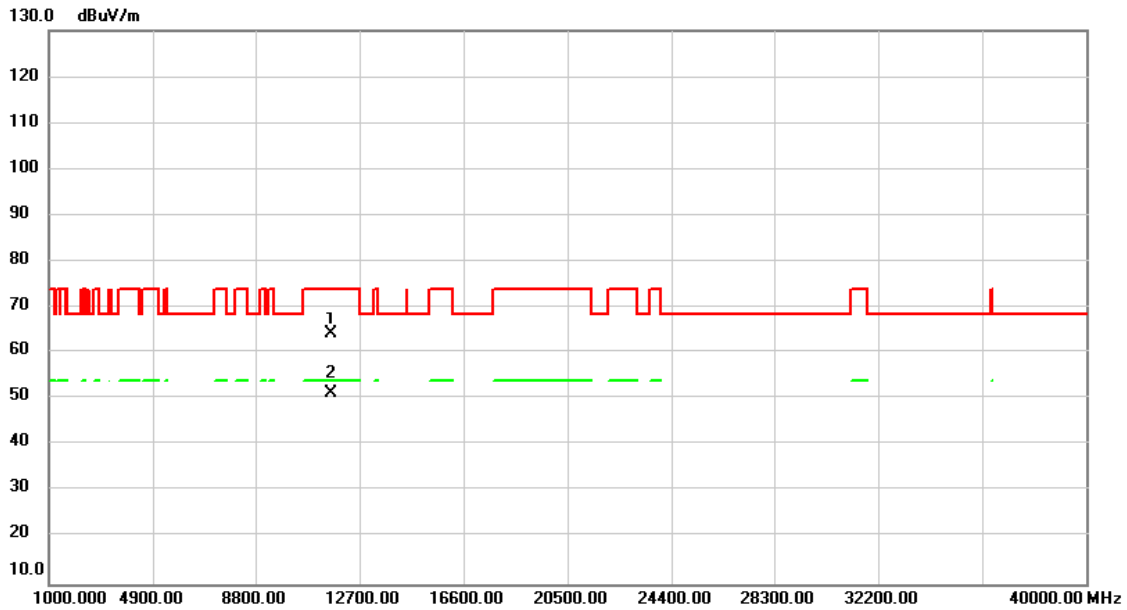


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.000	49.59	14.57	64.16	74.00	-9.84	peak	
2	*	11650.000	36.64	14.57	51.21	54.00	-2.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/ TX ax (HEW20)Mode 5825MHz

Horizontal

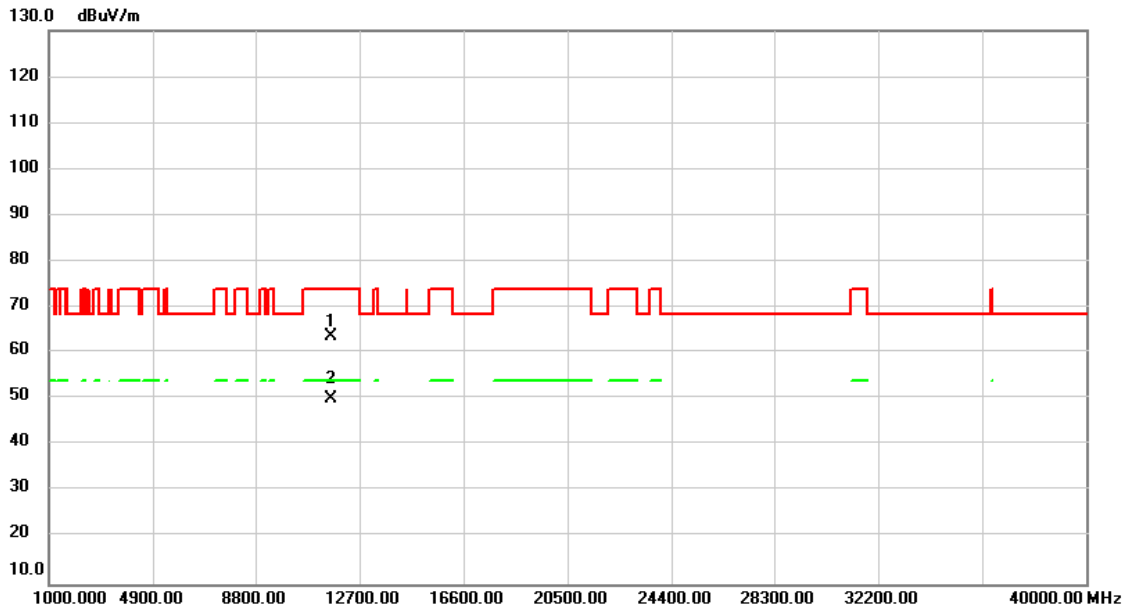


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.000	48.96	14.57	63.53	74.00	-10.47	peak	
2	*	11650.000	35.62	14.57	50.19	54.00	-3.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW40) Mode 5190MHz

Vertical

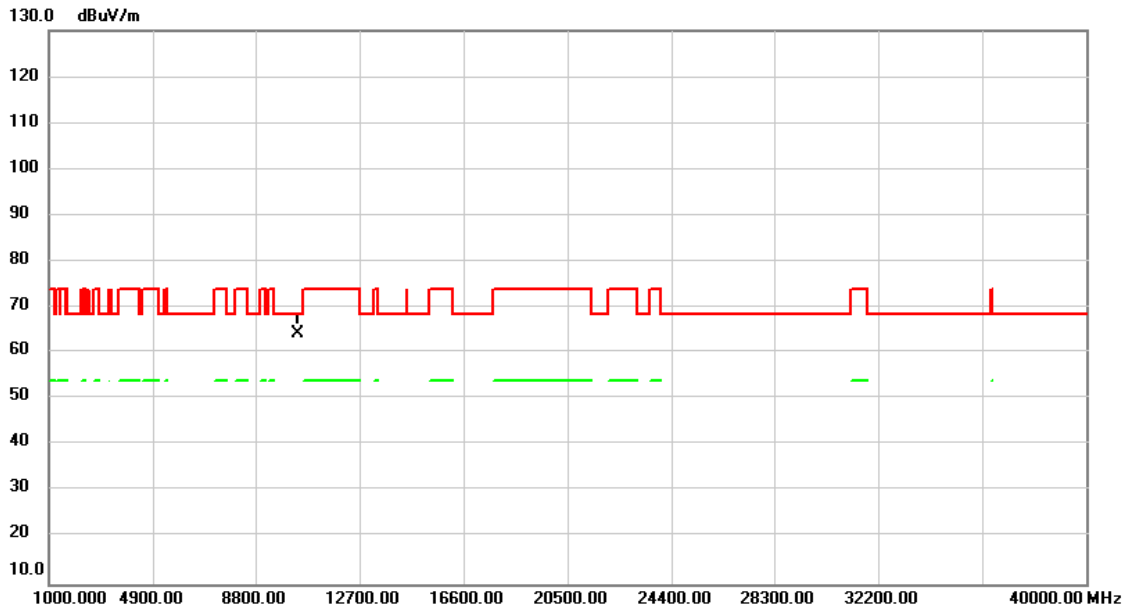


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.000	50.61	13.54	64.15	68.30	-4.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW40) Mode 5190MHz

Horizontal

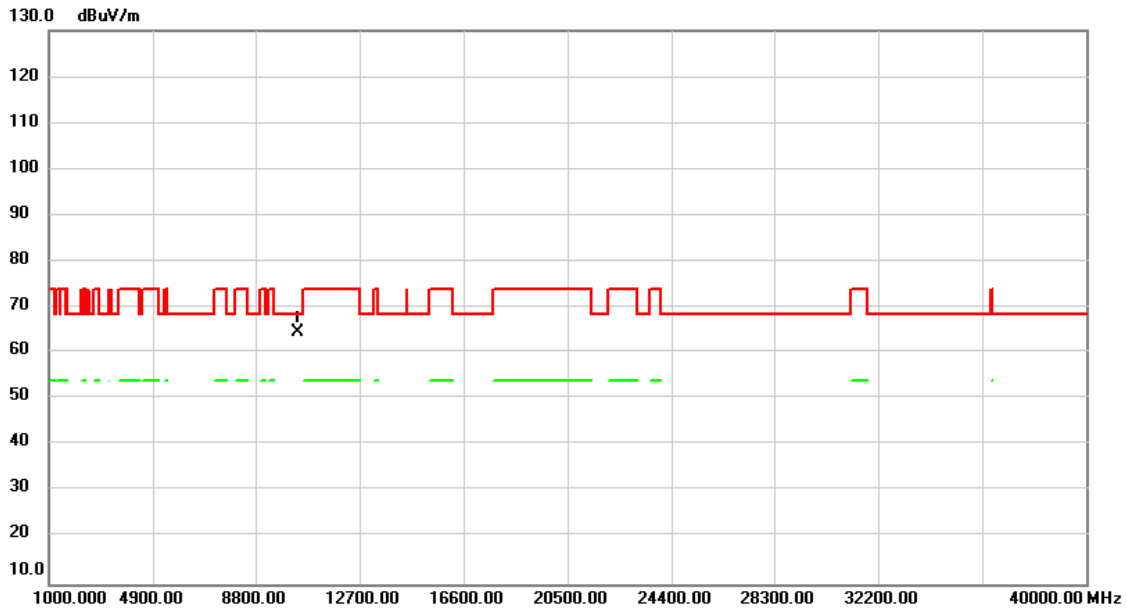


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.000	50.78	13.54	64.32	68.30	-3.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW40) Mode 5230MHz

Vertical

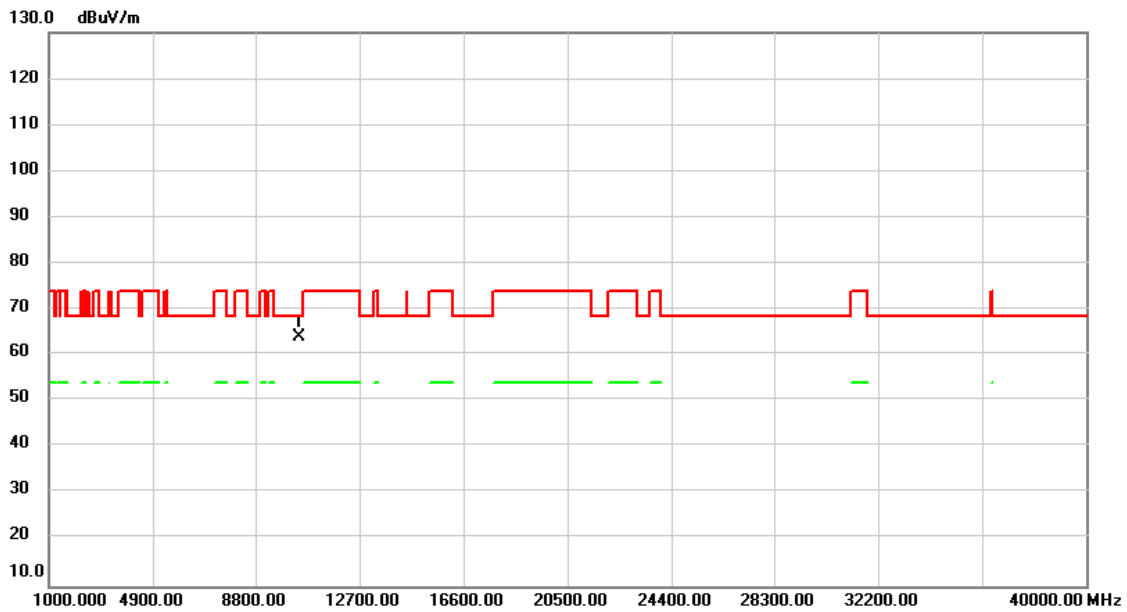


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.000	50.30	13.61	63.91	68.30	-4.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW40) Mode 5230MHz

Horizontal

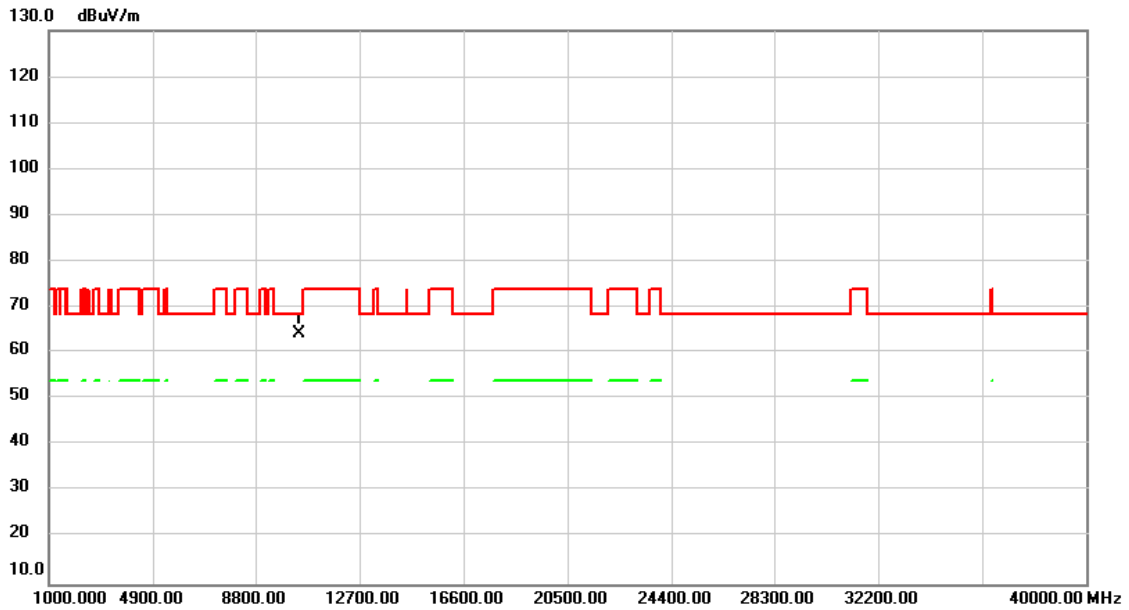


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.000	50.44	13.61	64.05	68.30	-4.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW40) Mode 5270MHz

Vertical

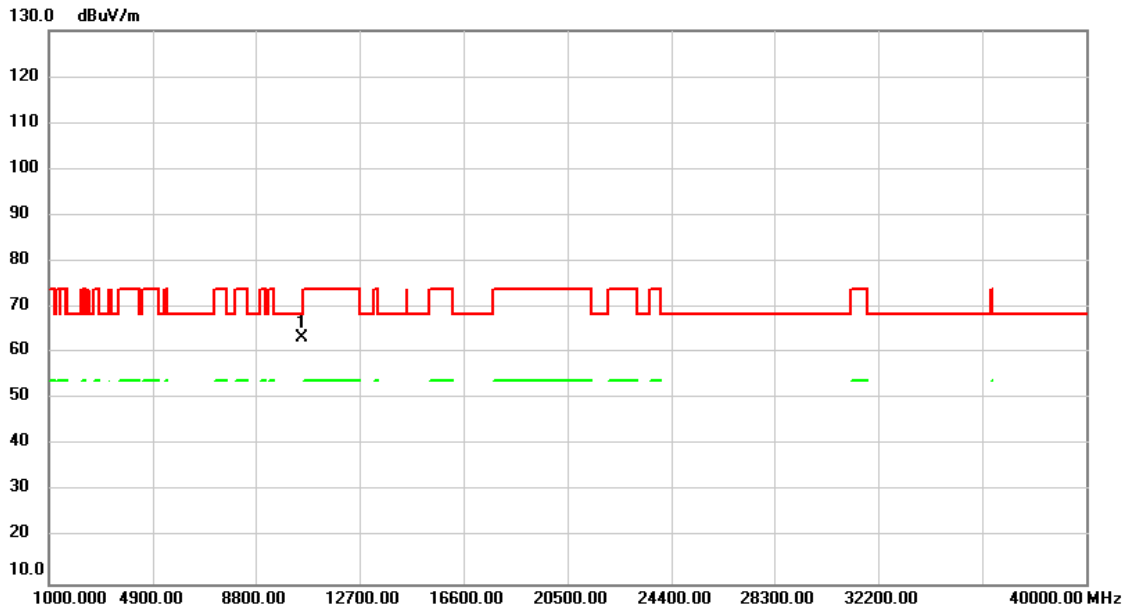


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.000	49.61	13.67	63.28	68.30	-5.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW40) Mode 5270MHz

Horizontal

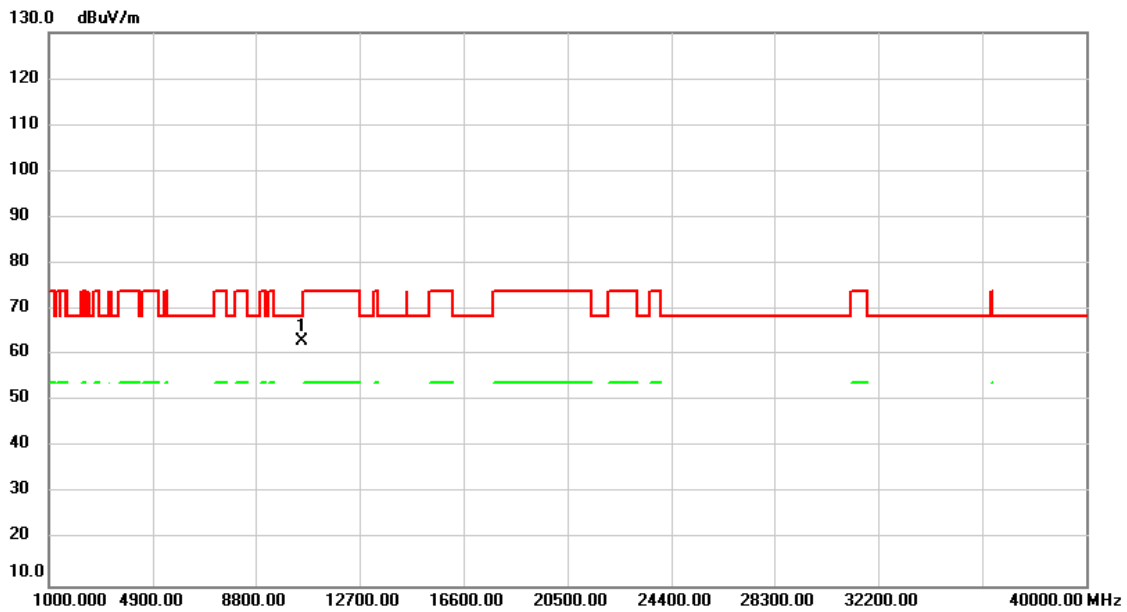


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.000	49.22	13.67	62.89	68.30	-5.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW40) Mode 5310MHz

Vertical

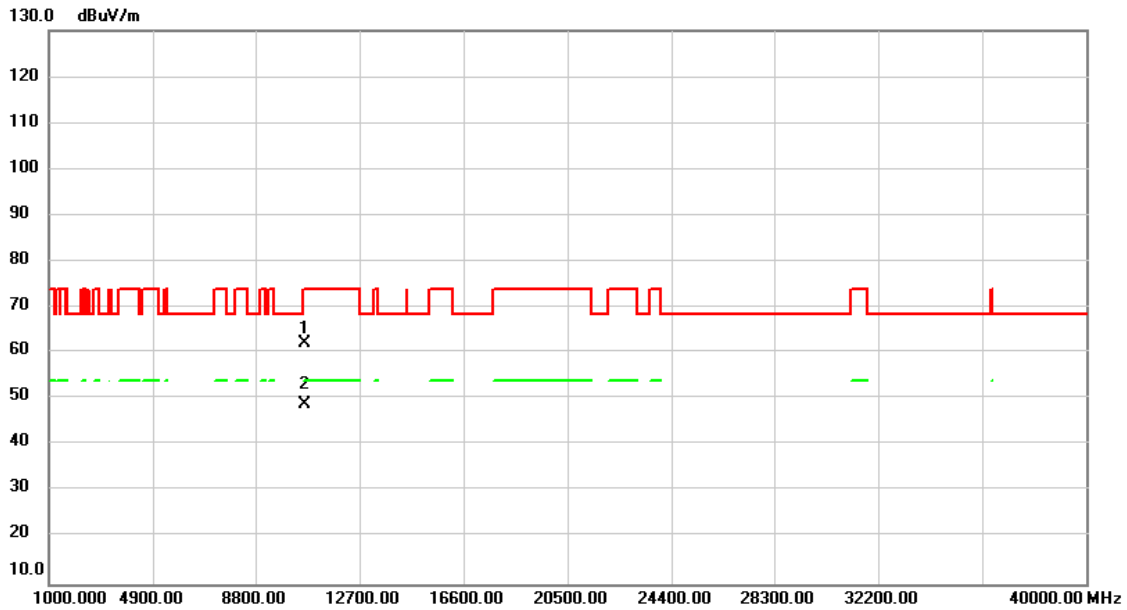


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.000	48.47	13.71	62.18	74.00	-11.82	peak	
2	*	10620.000	35.06	13.71	48.77	54.00	-5.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW40) Mode 5310MHz

Horizontal

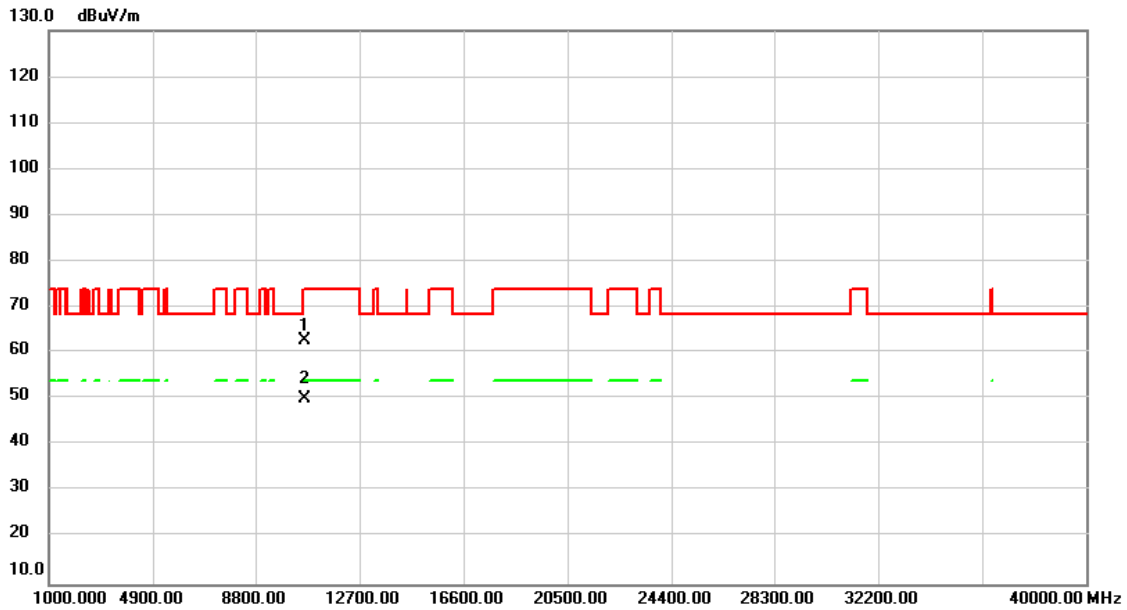


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.000	49.05	13.71	62.76	74.00	-11.24	peak	
2	*	10620.000	36.24	13.71	49.95	54.00	-4.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW40) Mode 5510MHz

Vertical

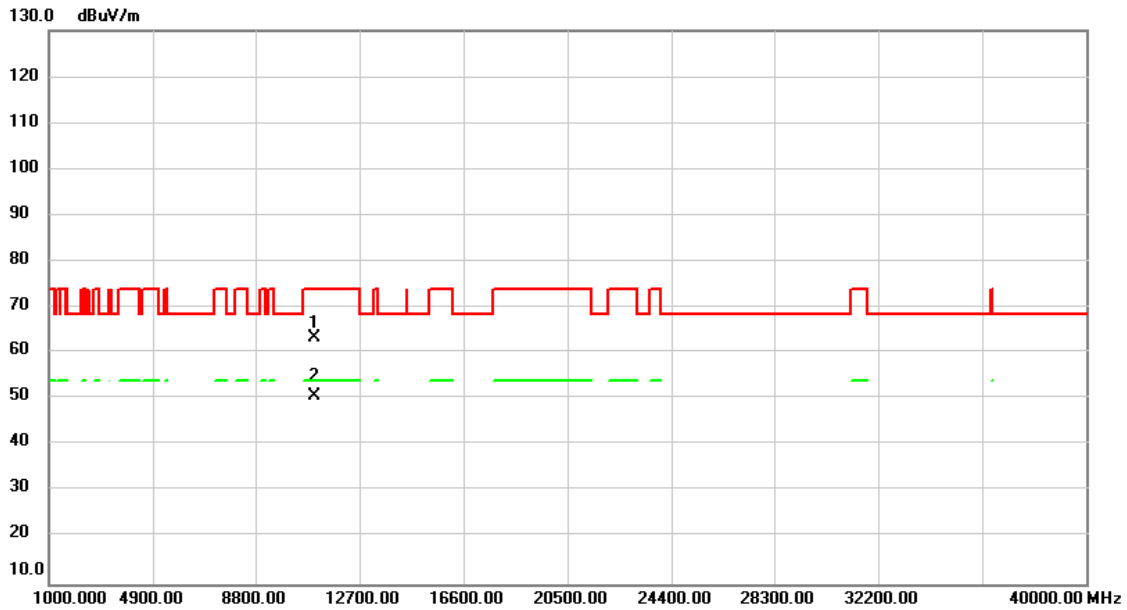


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.000	49.26	13.94	63.20	74.00	-10.80	peak	
2	*	11020.000	36.59	13.94	50.53	54.00	-3.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW40) Mode 5510MHz

Horizontal

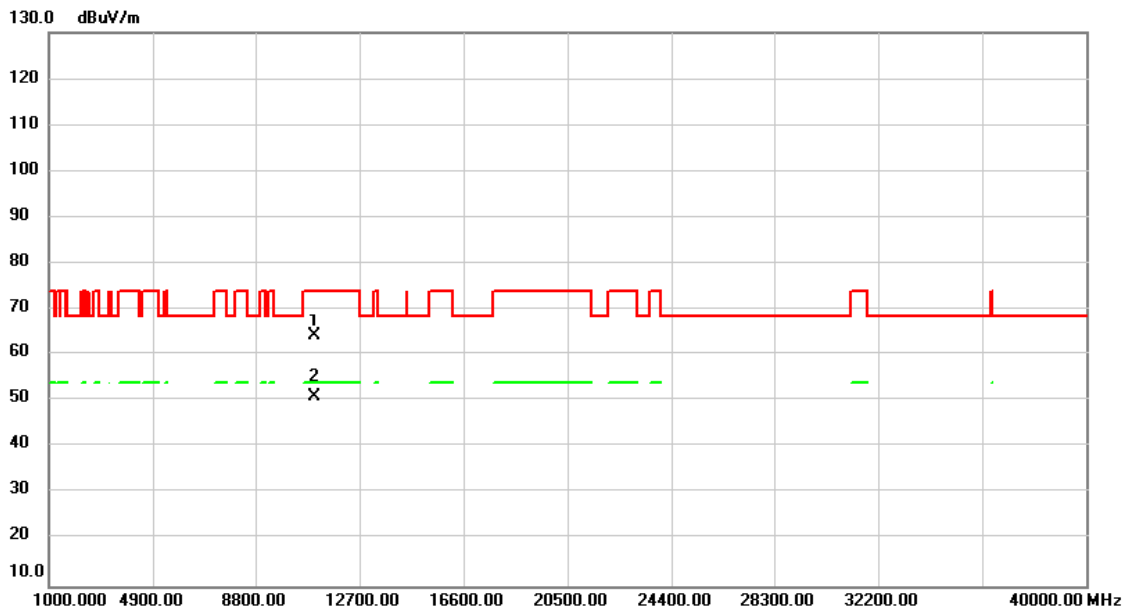


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.000	50.09	13.94	64.03	74.00	-9.97	peak	
2	*	11020.000	37.14	13.94	51.08	54.00	-2.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW40) Mode 5550MHz

Vertical

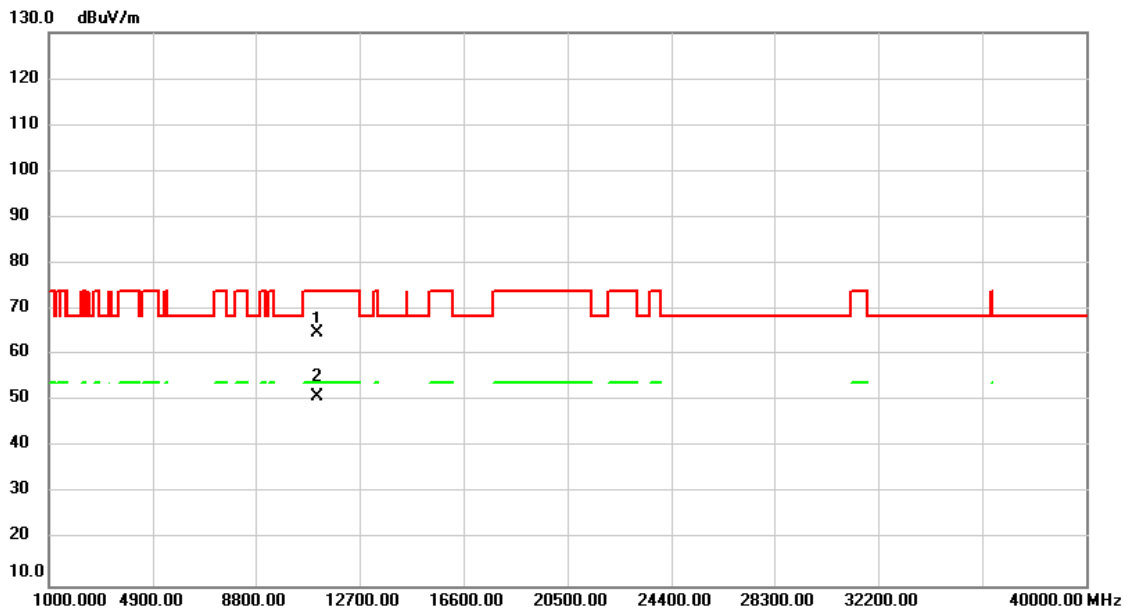


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.000	50.71	14.04	64.75	74.00	-9.25	peak	
2	*	11100.000	36.94	14.04	50.98	54.00	-3.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW40) Mode 5550MHz

Horizontal

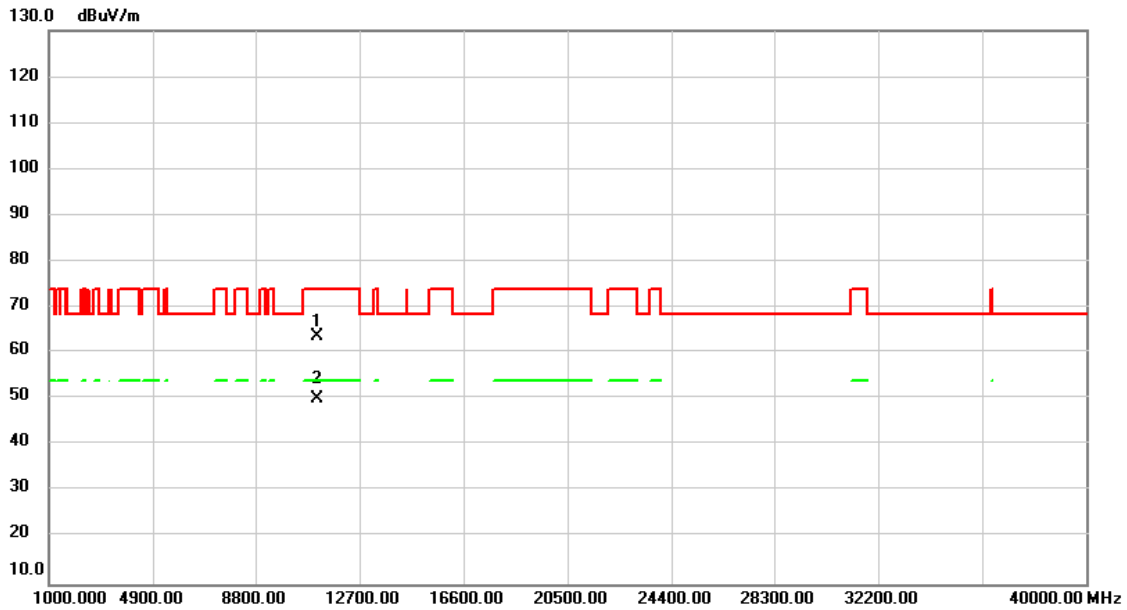


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.000	49.57	14.04	63.61	74.00	-10.39	peak	
2	*	11100.000	36.03	14.04	50.07	54.00	-3.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW40) Mode 5670MHz

Vertical

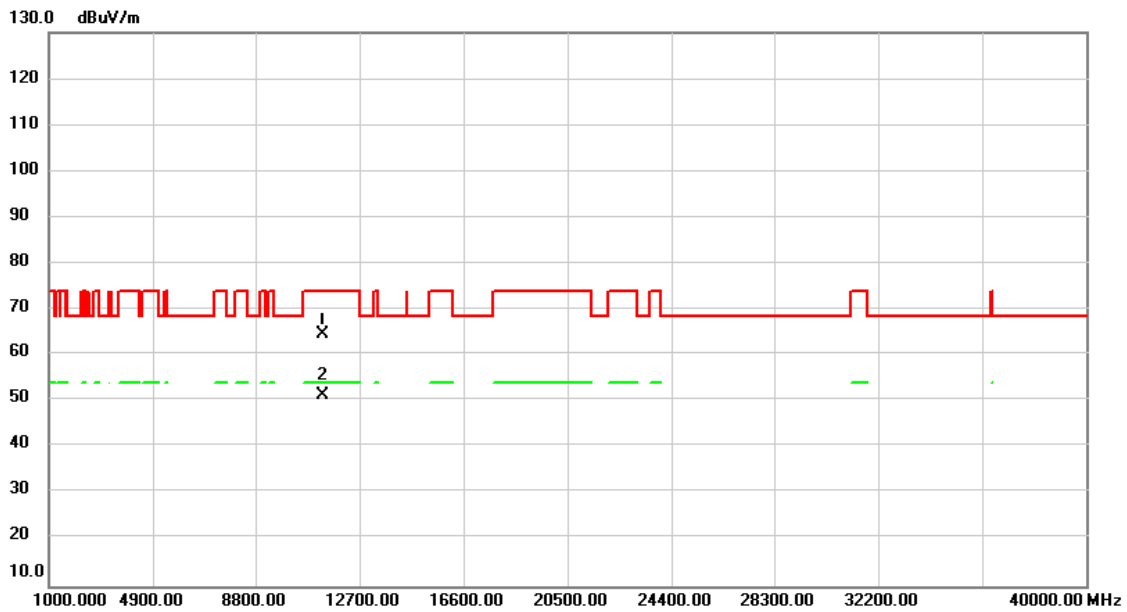


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.000	49.98	14.35	64.33	74.00	-9.67	peak	
2	*	11340.000	36.78	14.35	51.13	54.00	-2.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW40) Mode 5670MHz

Horizontal

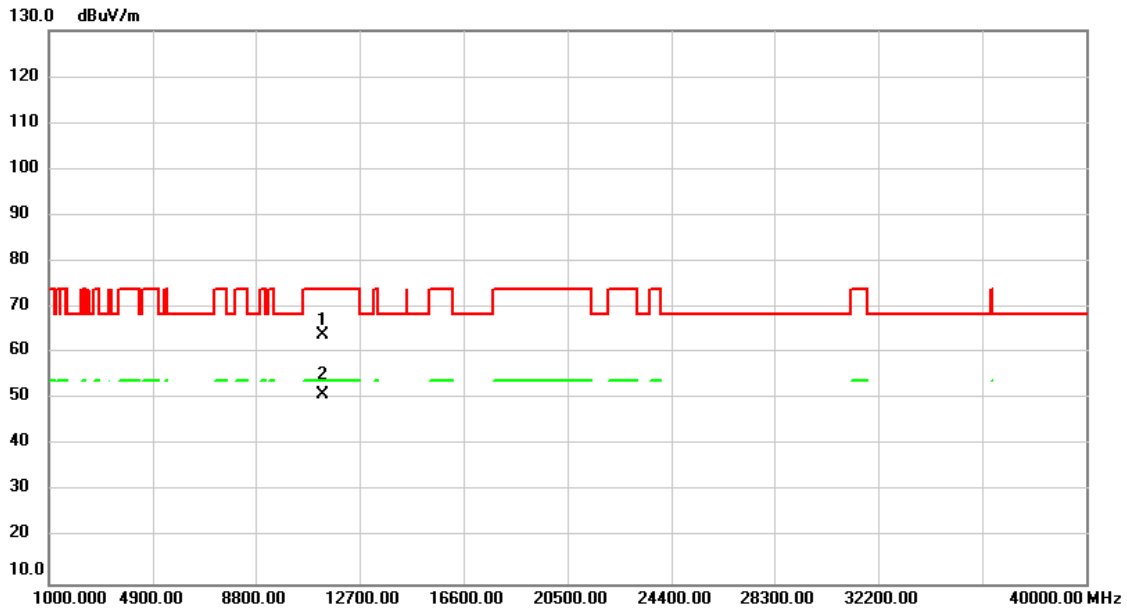


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.000	49.45	14.35	63.80	74.00	-10.20	peak	
2	*	11340.000	36.62	14.35	50.97	54.00	-3.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ax (HEW40) Mode 5755MHz

Vertical

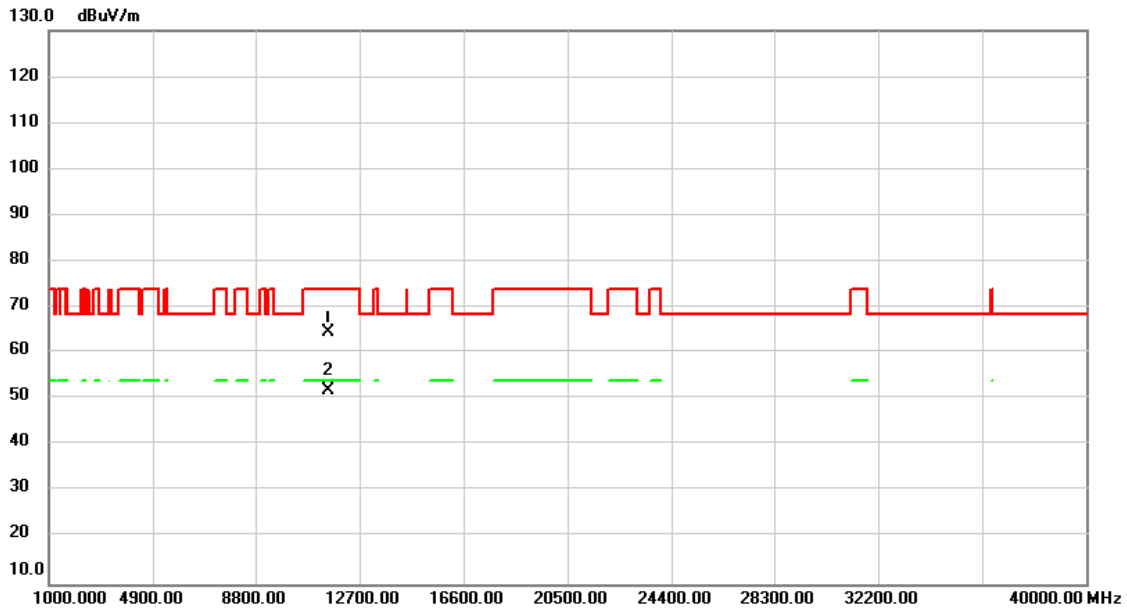


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.000	49.97	14.57	64.54	74.00	-9.46	peak	
2	*	11510.000	37.23	14.57	51.80	54.00	-2.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ax (HEW40) Mode 5755MHz

Horizontal

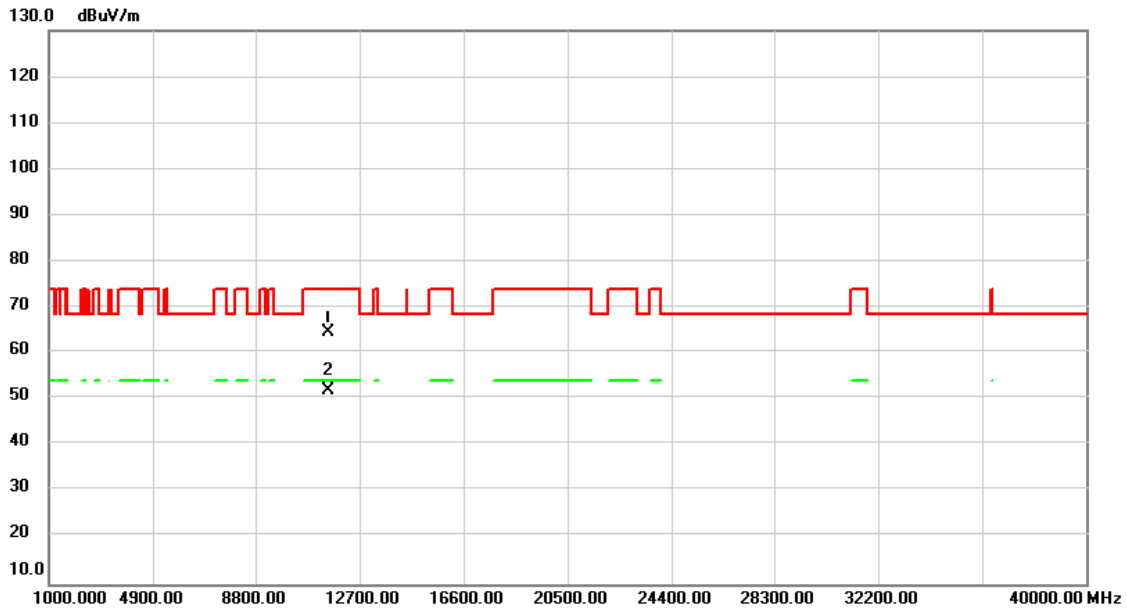


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.000	50.02	14.57	64.59	74.00	-9.41	peak	
2	*	11510.000	37.24	14.57	51.81	54.00	-2.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ax (HEW40) Mode 5795MHz

Vertical

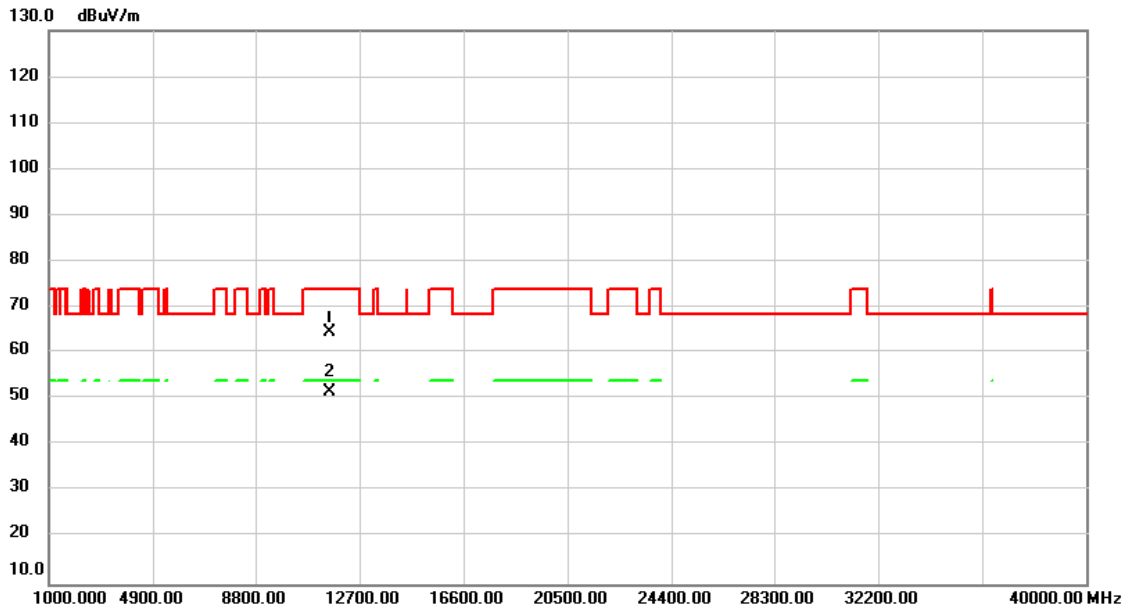


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.000	49.83	14.57	64.40	74.00	-9.60	peak	
2	*	11590.000	37.04	14.57	51.61	54.00	-2.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ax (HEW40) Mode 5795MHz

Horizontal

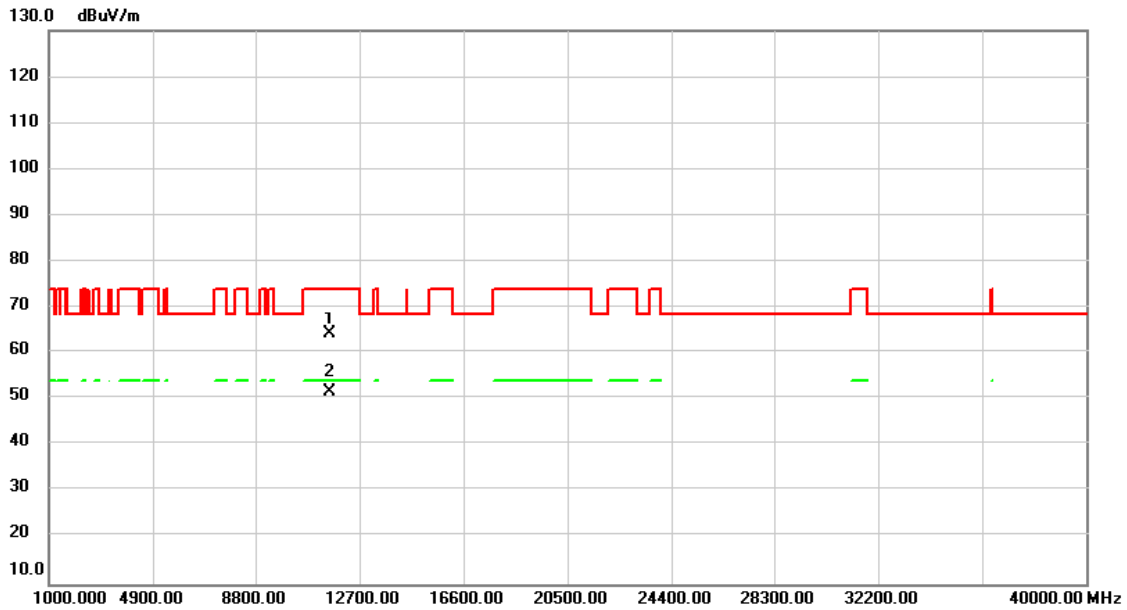


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.000	49.73	14.57	64.30	74.00	-9.70	peak	
2	*	11590.000	36.96	14.57	51.53	54.00	-2.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW80) Mode 5210MHz

Vertical

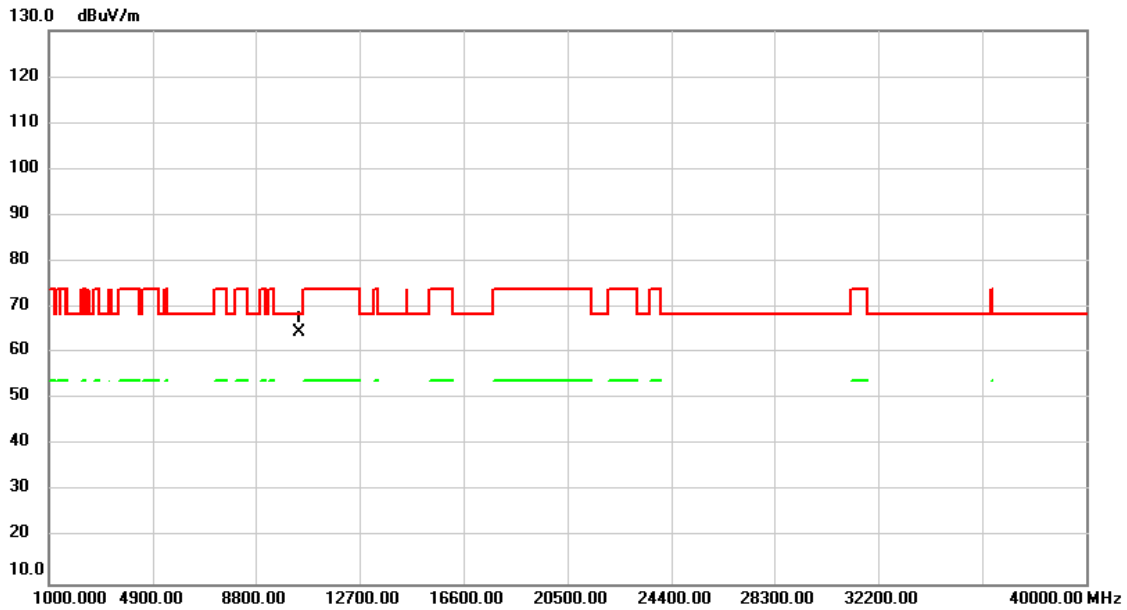


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.000	50.99	13.57	64.56	68.30	-3.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW80) Mode 5210MHz

Horizontal

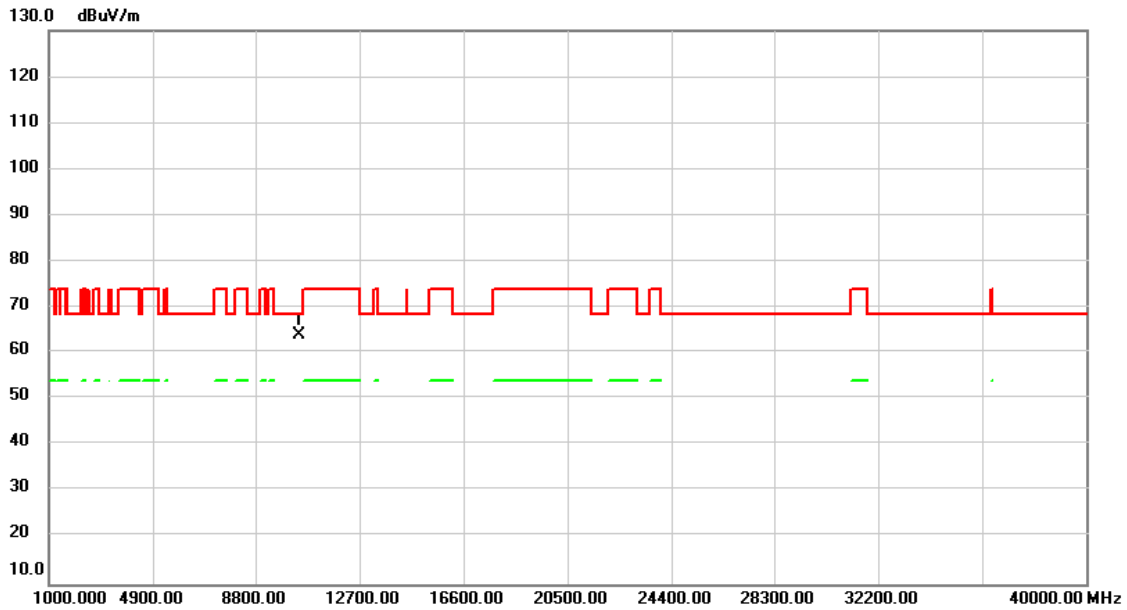


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.000	50.28	13.57	63.85	68.30	-4.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW80) Mode 5290MHz

Vertical

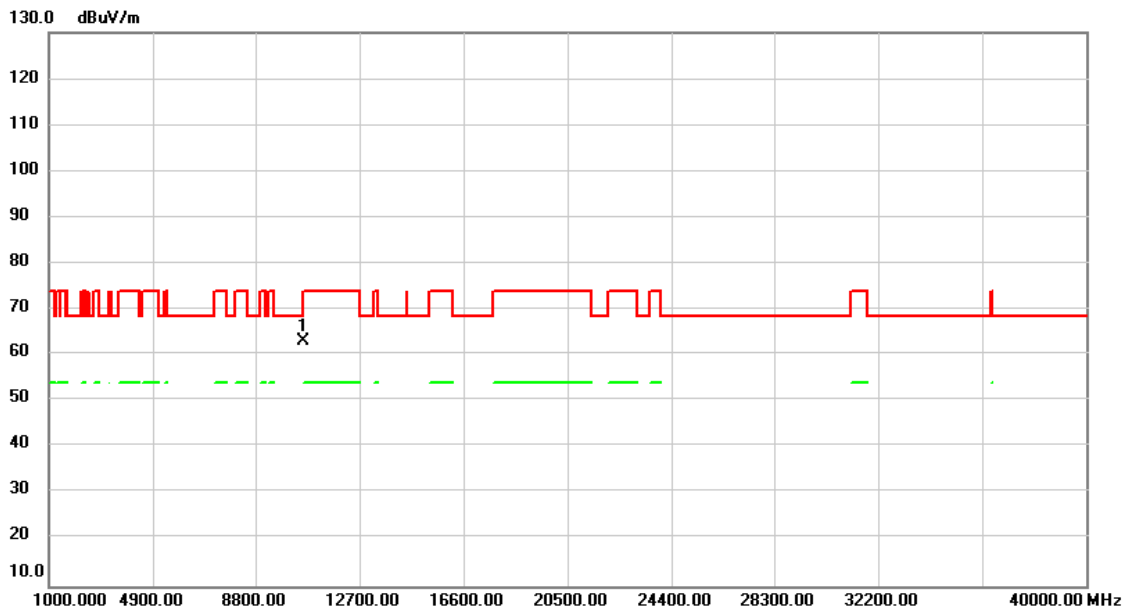


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.000	49.28	13.69	62.97	68.30	-5.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2A/TX ax (HEW80) Mode 5290MHz

Horizontal

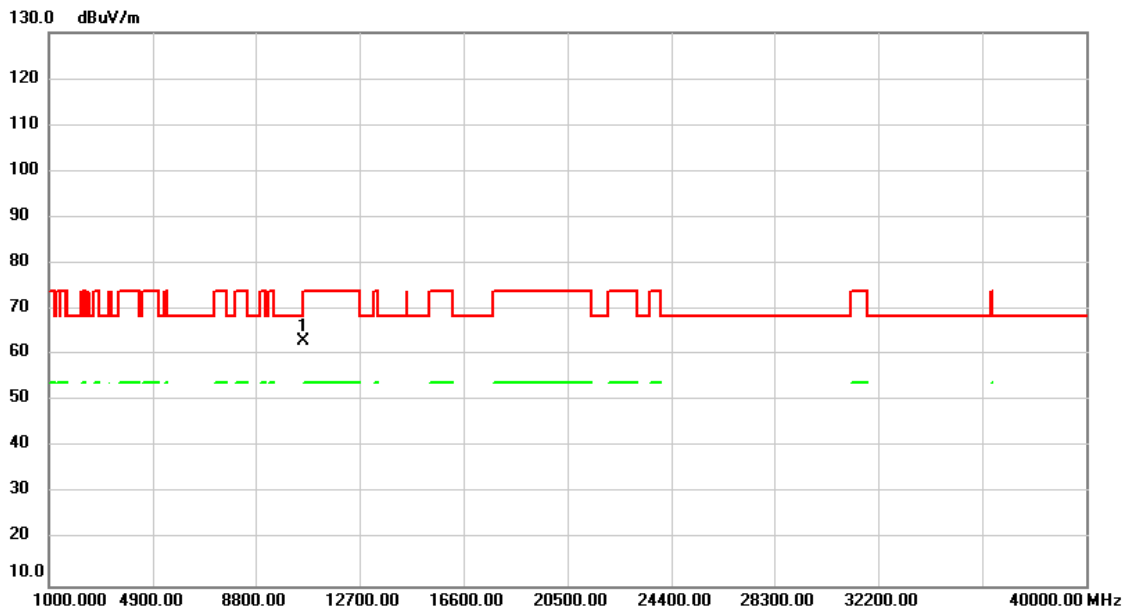


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.000	49.33	13.69	63.02	68.30	-5.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW80) Mode 530MHz

Vertical

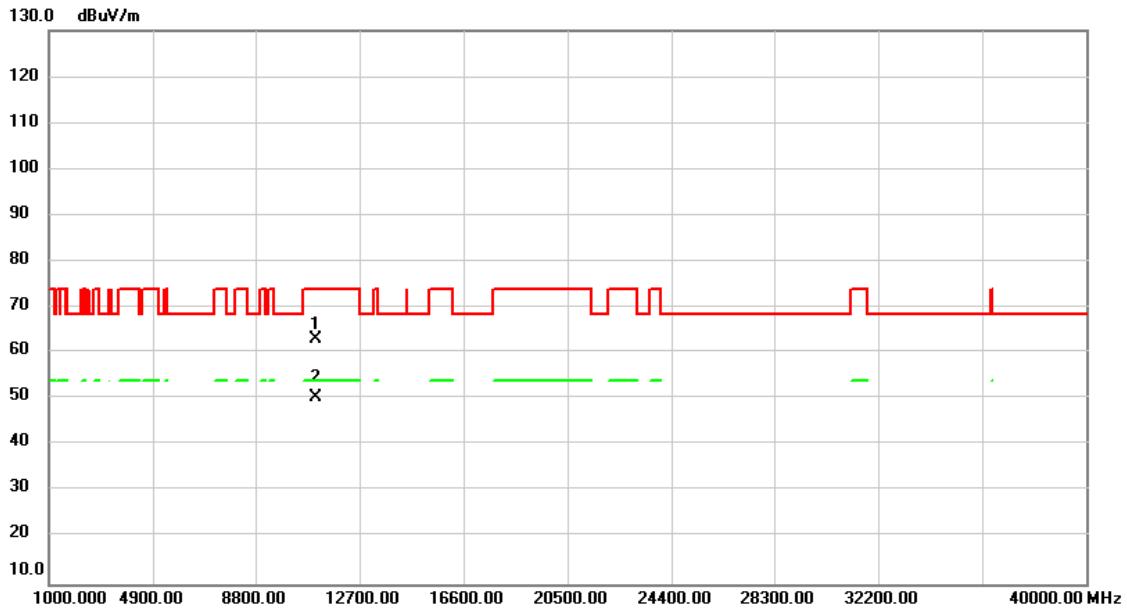


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.000	49.06	14.00	63.06	74.00	-10.94	peak	
2	*	11060.000	36.29	14.00	50.29	54.00	-3.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW80) Mode 530MHz

Horizontal

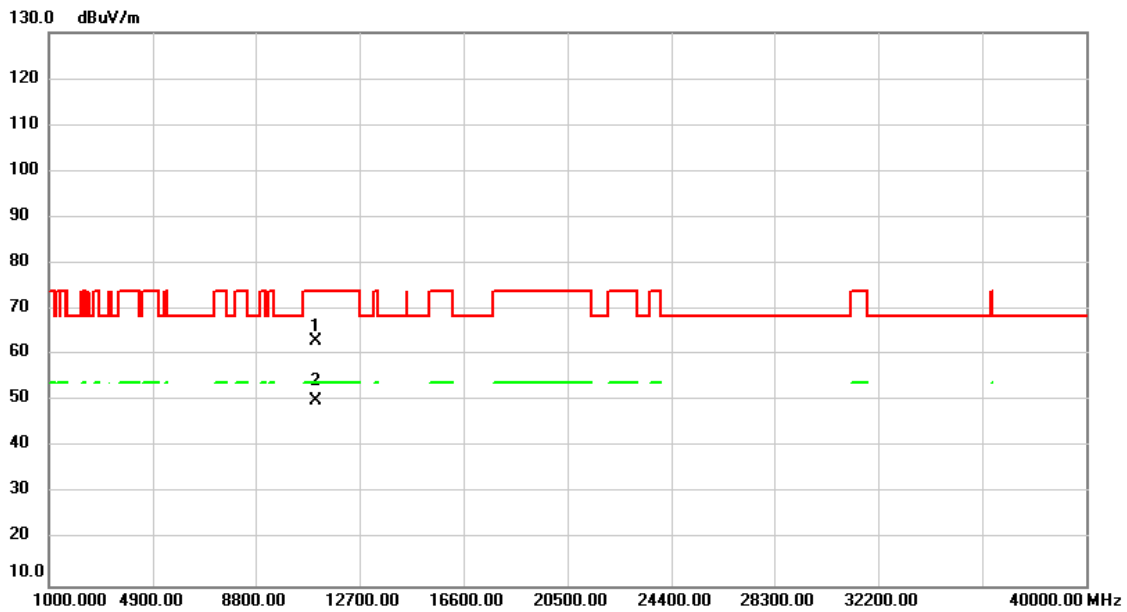

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.000	48.84	14.00	62.84	74.00	-11.16	peak	
2	*	11060.000	35.94	14.00	49.94	54.00	-4.06	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW80) Mode 5610MHz

Vertical

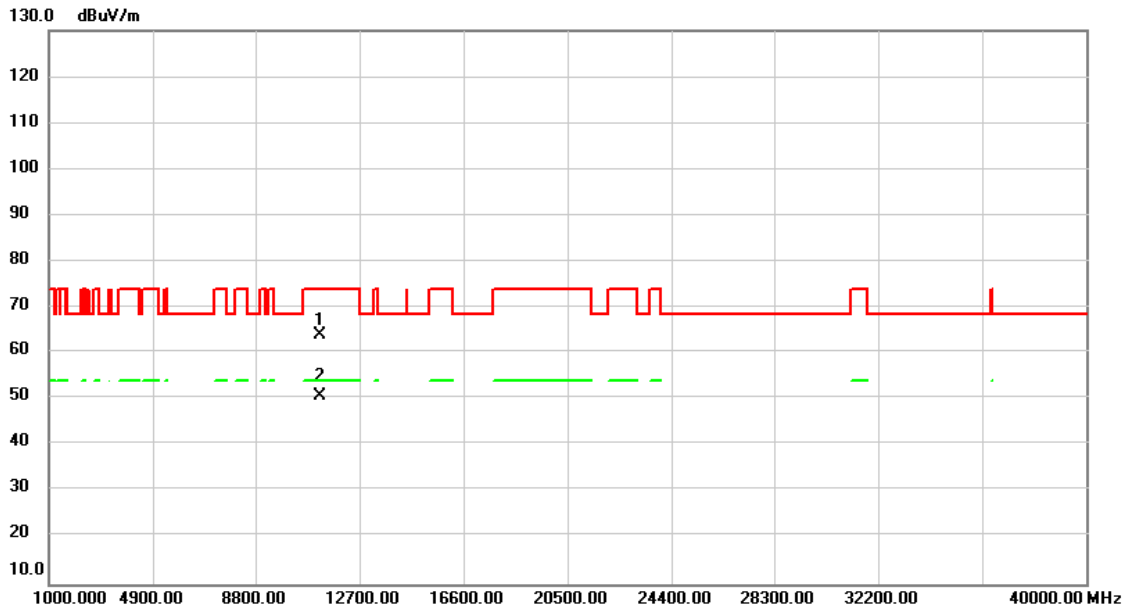


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.000	49.68	14.20	63.88	74.00	-10.12	peak	
2	*	11220.000	36.32	14.20	50.52	54.00	-3.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW80) Mode 5610MHz

Horizontal

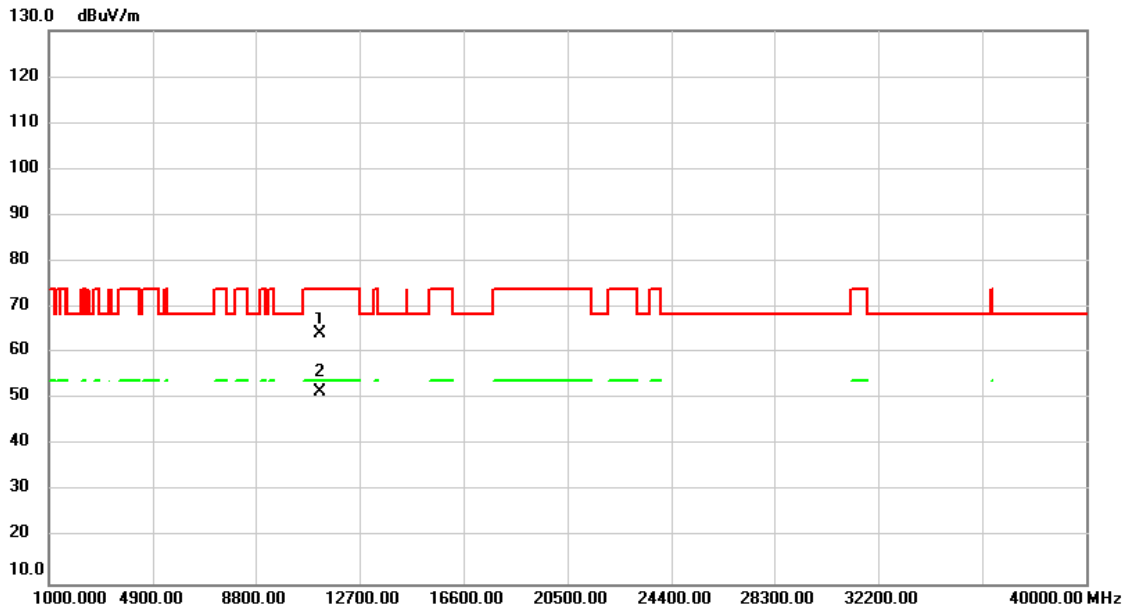


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.000	50.05	14.20	64.25	74.00	-9.75	peak	
2	*	11220.000	37.43	14.20	51.63	54.00	-2.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-3/TX ax (HEW80) Mode 5775MHz

Vertical

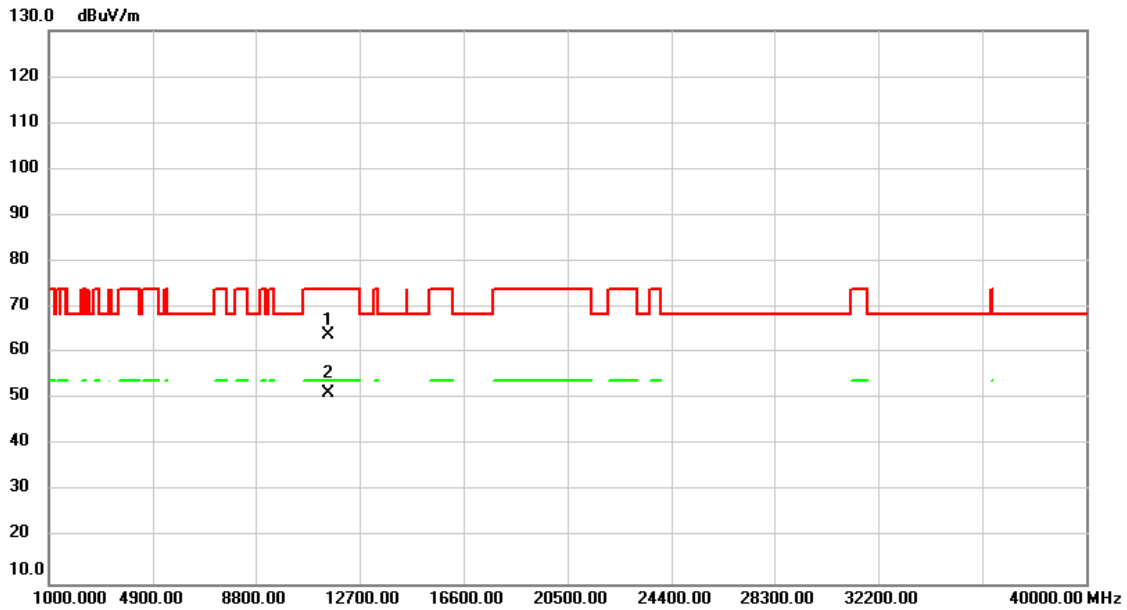


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.000	49.35	14.57	63.92	74.00	-10.08	peak	
2	*	11550.000	36.58	14.57	51.15	54.00	-2.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3/TX ax (HEW80) Mode 5775MHz
-----------	-----------------------------------

Horizontal

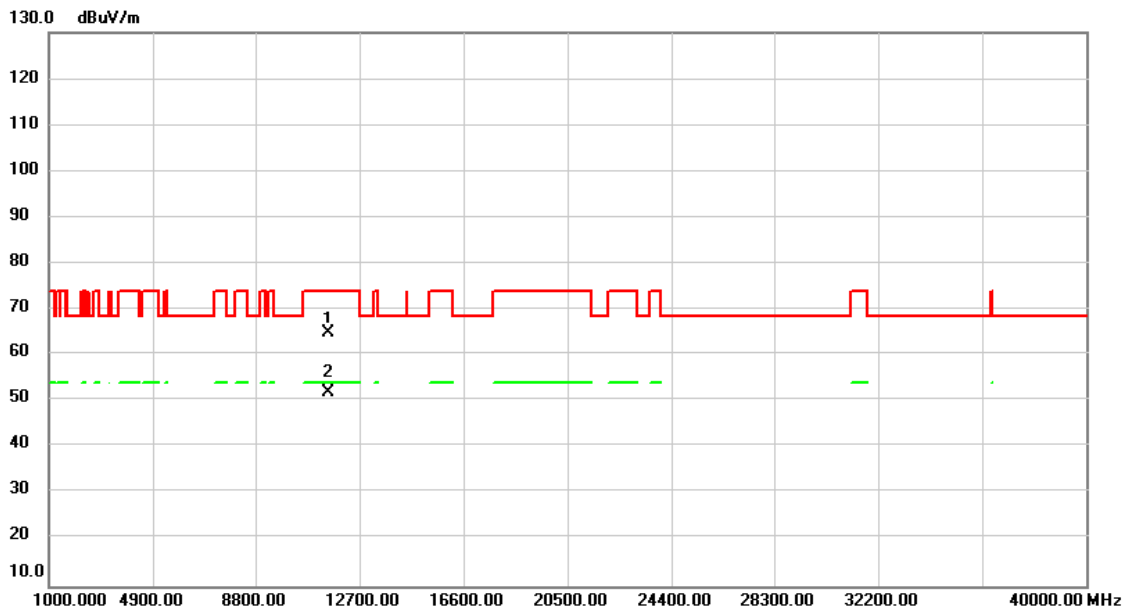


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.000	50.22	14.57	64.79	74.00	-9.21	peak	
2	*	11550.000	37.38	14.57	51.95	54.00	-2.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW160) Mode 5250MHz

Vertical

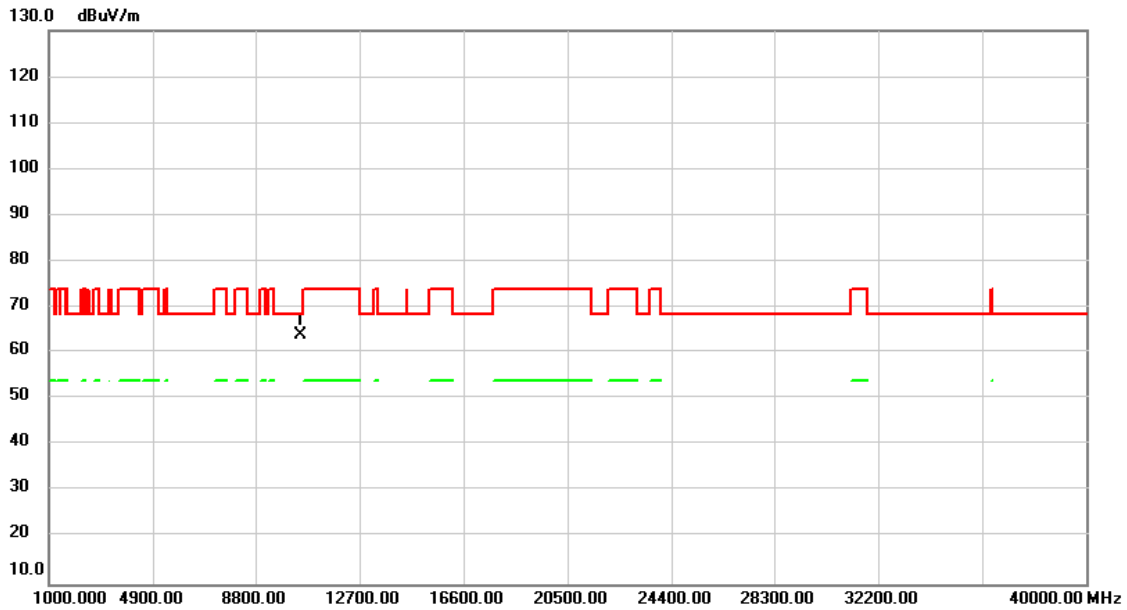


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.000	50.27	13.64	63.91	68.30	-4.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-1/TX ax (HEW160) Mode 5250MHz

Horizontal

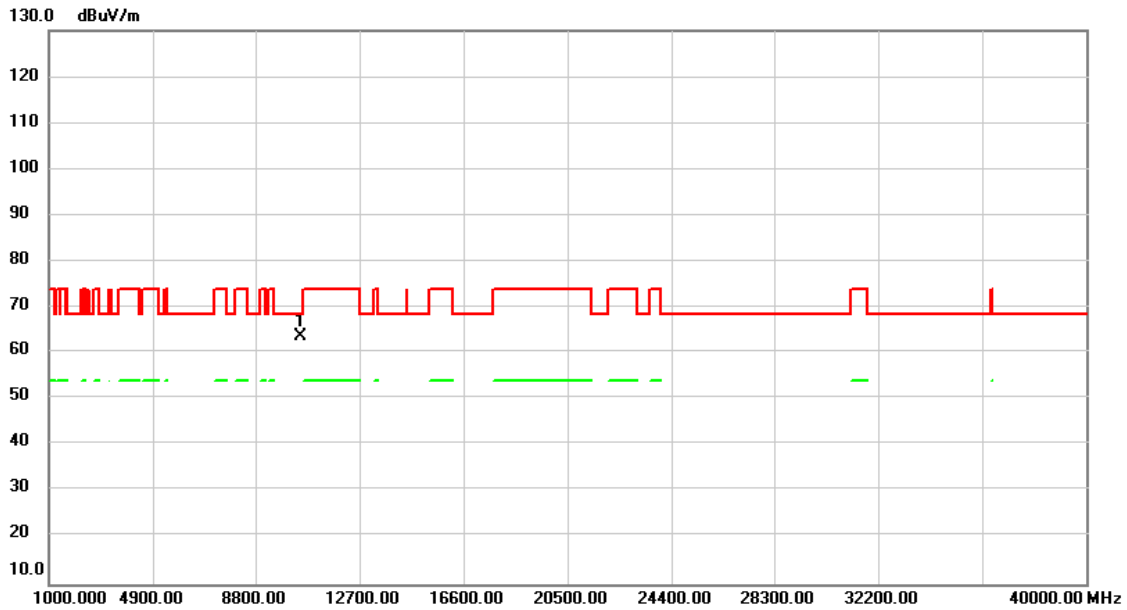


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.000	50.05	13.64	63.69	68.30	-4.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW160) Mode 5570MHz

Vertical

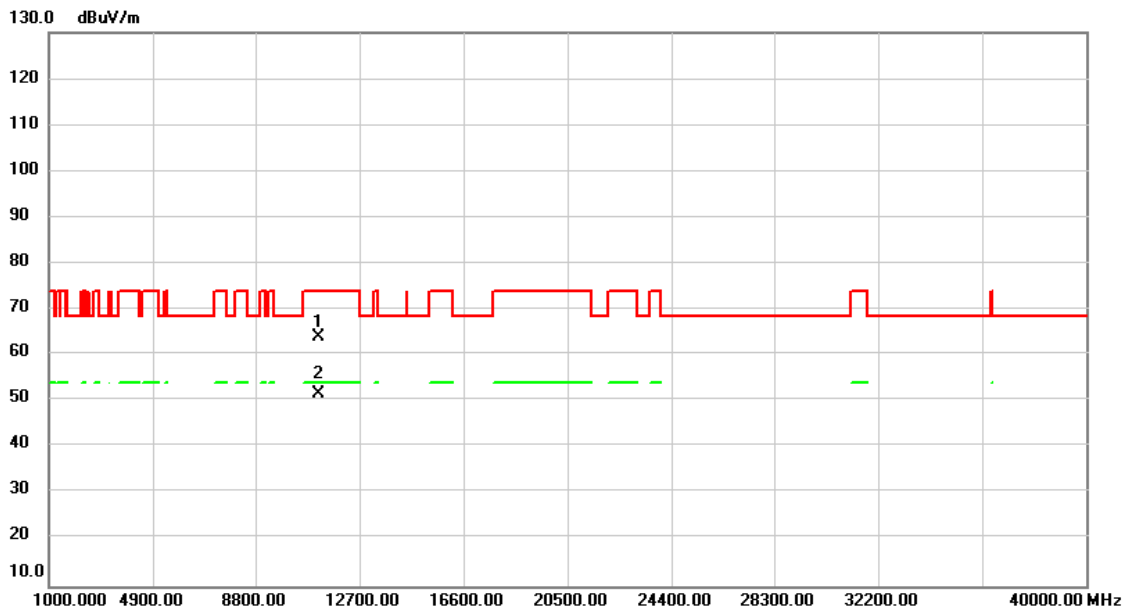


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.000	49.67	14.10	63.77	74.00	-10.23	peak	
2	*	11140.000	37.32	14.10	51.42	54.00	-2.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode UNII-2C/TX ax (HEW160) Mode 5570MHz

Horizontal

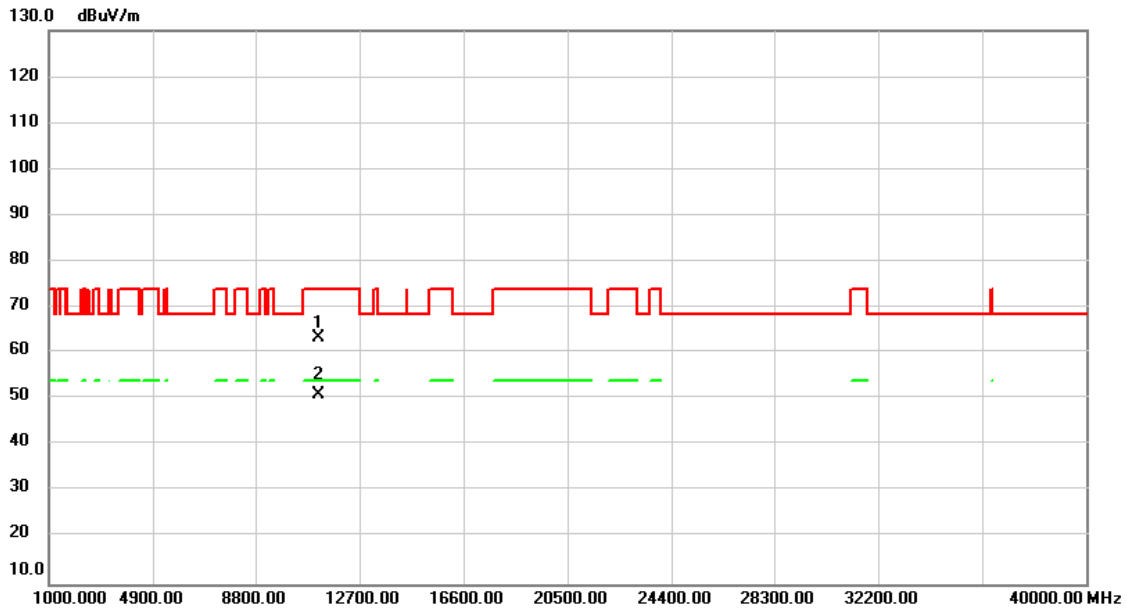

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.000	49.07	14.10	63.17	74.00	-10.83	peak	
2	*	11140.000	36.86	14.10	50.96	54.00	-3.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

End of Test Report