



JKS3

GPS Tracking Device



Table of Contents

1. GETTING STARTED	7
1.1 UNPACKING INFORMATION	7
1.2 INTRODUCTION.....	7
2. PORTS AND LED INDICATORS	8
2.1 PORTS	8
2.2 LED INDICATORS.....	9
3. INSTALLATION	10
4. SPECIFICATIONS	11

Declaration of Conformance

Manufacturer:

Name: Wistron NeWeb Corporation

Address: 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C

Radio Equipment:

Model: JKS3

Description: GPS Tracking Device

Marketing Name: JKS3

Radio-related Software Version:

Supplied Accessories and Components: NA

We, Wistron NeWeb Corporation, declare under our sole responsibility that the product described above conforms to the relevant Union harmonization legislation:

RE Directive (2014/53/EU), RoHS Directive (2011/65/EU)

The following harmonized standards and/or other relevant standards have been applied:

1. Health and Safety (Article 3.1(a) of the RE Directive)

- EN 62311:2008
- EN 60950-1:2006/A11:2009+A1:2010+A12:2011+A2:2013

2. Electromagnetic compatibility (Article 3.1 (b) of the RE Directive)

- Final Draft ETSI EN 301 489-1 V2.1.1,
- Draft ETSI EN 301 489-3 V2.1.0
- Final Draft ETSI EN 301 489-17 V3.1.1
- Draft ETSI EN 301 489-52 V1.1.0

3. Radio frequency spectrum usage (Article 3.2 of the RE Directive)

- ETSI EN 301 908-1 V11.1.1, ETSI EN 301 908-2 V11.1.1
- ETSI EN 300 328 V2.1.1
- Draft ETSI EN 301 511 V12.1.10
- Draft ETSI EN 300 440 V2.1.0

4. RoHS Directive (2011/65/EU)

- EN 50581:2012

Safety Instruction

- Only authorized service providers shall replace the battery in this device.
- Do not disassemble, open, crush, bend, deform, puncture, or shred.
- Do not modify or remanufacture, attempt to insert foreign objects into the battery, immerse or expose to water or other liquids, expose to fire, explosion or other hazards.
- Only use the battery with a charging system that has been qualified with the system per CTIA Certification Requirements for Battery System Compliance to IEEE 1725. Use of an unqualified battery or charger may present a risk of fire, explosion, leakage, or other hazardous occurrences.
- Replace the battery only with another battery that has been qualified with the system per this standard, IEEE-Std-1725. Use of an unqualified battery may present a risk of fire, explosion, leakage or other hazardous occurrences.
- Promptly dispose of used batteries in accordance with local regulations.
- Avoid dropping the device or battery. If the device or battery is dropped, especially on a hard surface, and the user suspects damage, take it to a service center for inspection.
- Improper battery use may result in a fire, explosion or other hazardous event.
- For those host devices that utilize a USB port as a charging source, the host device's user manual shall include a statement that the device shall only be connected to CTIA certified adapters, products that bear the USB-IF logo or products that have

Regulatory Statement



FCC Regulations:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation if this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure Information

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation.

Industry Canada statement

- ❶ This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:
 - 1) this device may not cause interference, and
 - 2) this device must accept any interference, including interference that may cause undesired operation of the device.

- ❶ Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:
 - 1) l'appareil ne doit pas produire de brouillage, et
 - 2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

1. Getting Started

1.1 Unpacking Information

Included in the package are the following items:

- JKS3 GPS Tracking Device
- Cable x1

1.2 Introduction

The JKS3 is a self-contained tracking device that combines GPS location with LTE Cat. M1 network connectivity. The device responds to user or server requests. Data reports contain all location data and the system status.

The device comes pre-configured from the factory, ready to use. It can be updated and configured either through a serial connection, an OTA (over the air) IP connection, or through SMS messaging.

2. Ports and LED Indicators

2.1 Ports



	Port	Description
1	8 Wire Port	Vin, GND, Open drain output, GPIO6, GPI, GPIO4, GPIO5, GND
2	Micro-USB	For manufacture and debugging


2.2 LED Indicators



LED	Indication	Description
WWAN	Flashing slowly	System is powering up and initializing
	Solid	WWAN data connection acquired
	Flashing quickly	WWAN data connection temporarily lost
	Off	Device is off or in hibernation mode
	Blip once every 30 seconds	Device is in monitoring or standby mode (keep 'off')
	Intermittent blips	FOTA session is on-going (keep 'off')
GPS	Flashing slowly	System is powering up and initializing
	Solid	GPS signal acquired
	Flashing quickly	GPS signal temporarily lost
	Off	Device is off or in hibernation mode
	Blip once every 30 seconds	Device is in monitoring or standby mode (blip)
	Intermittent blips	FOTA session is on-going (blip)

3. Installation

The image below shows how the JKS3 tracking device is installed.

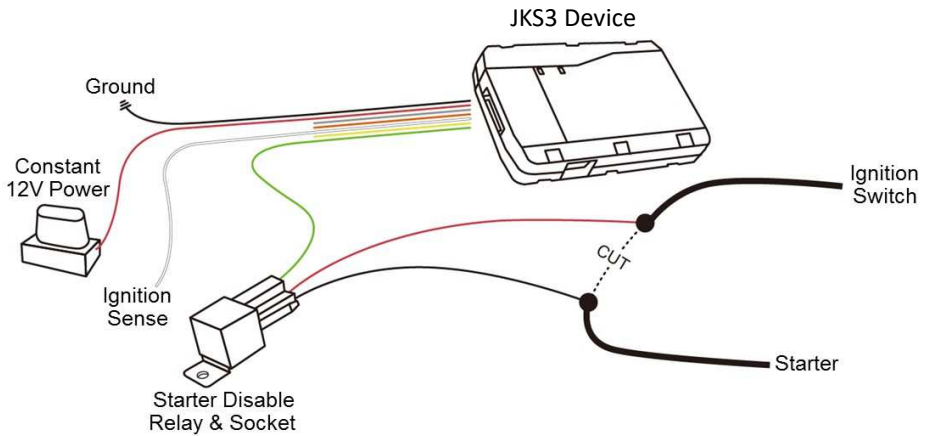

4. Specifications

Hardware & software

- WAN module: IMQ3
 - LTE CATM1 (B4/13/25/26)
 - GPS/GLONASS/aGPS
- USIM 3FF
- Microcontroller
 - STM32 F030
 - ADC/UART/SPI/I2C/GPIO
 - 5 power mode control

Backup battery

- Li-ion battery
 - Spec: 170 mAh/3.7 V
 - Max discharge current: 5 C
 - Operation temperature range: -10°C to $+60^{\circ}\text{C}$

Buzzer

- Electro-magnetic buzzer
- Operating voltage: 3 V to 6.5 V
- Resonant frequency: 2700 ± 300 Hz
- Sound output at 10 cm: ≥ 83 dBm

Mechanical

- Dimensions: 92.8 mm \times 60 mm \times 16.5 mm
- Interface:
 - 8 wires: Vin, GND, Open drain output, GPIO6, GPI, GPIO4, GPIO5, GND
 - Micro-USB: For manufacture and debugging

Others

- Operating temperature: -20°C to $+70^{\circ}\text{C}$