

4. TEST REPORT

4.1 RF Power Measurements

Figure 4-1 shows the test equipment setup for the RF power measurements.

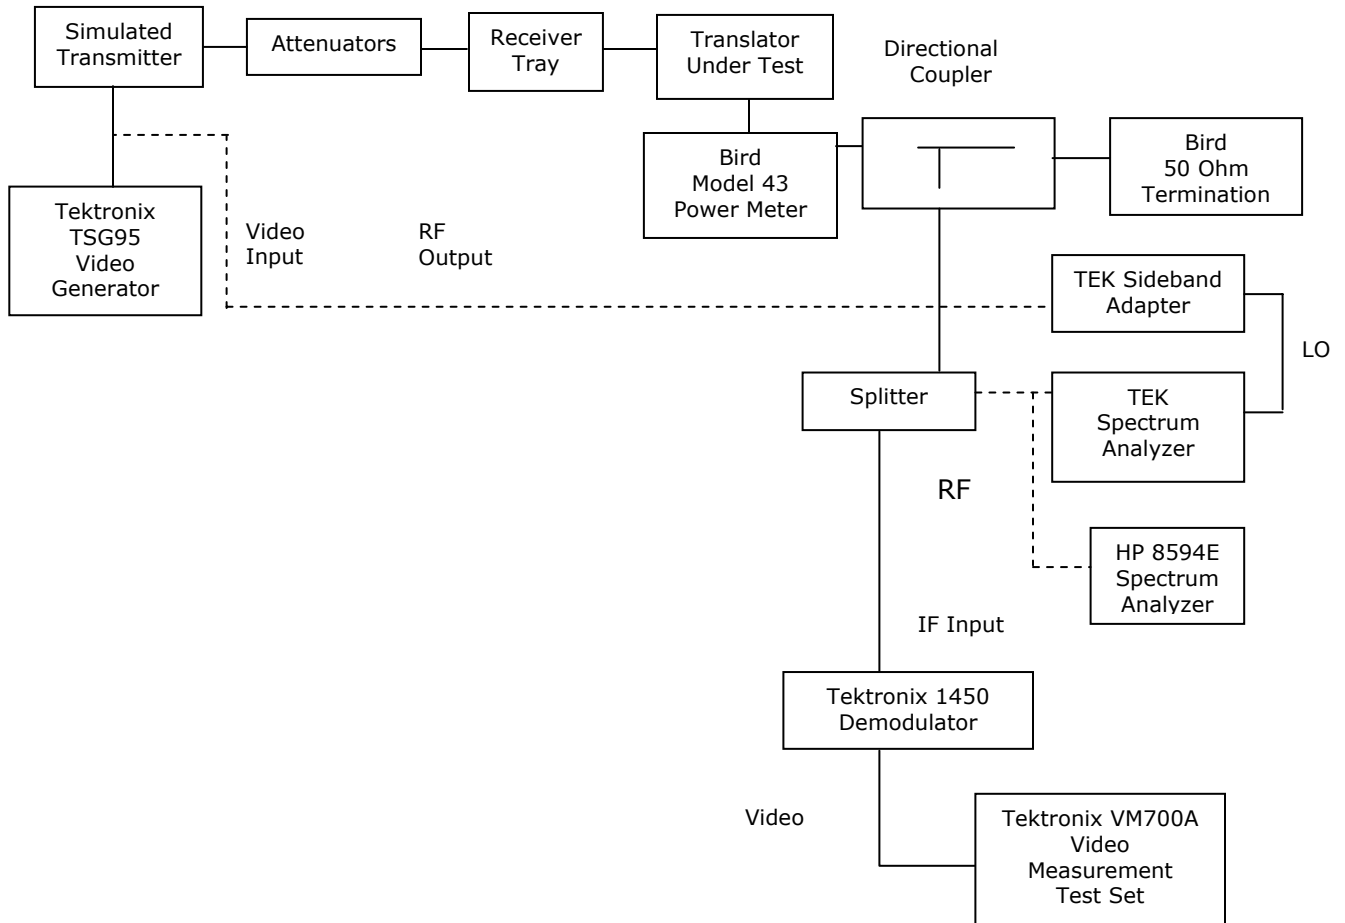


Figure 4-1. Test Equipment Setup for RF Power Measurements

The video modulation was adjusted for 25% with sync and blanking video signals and the aural power was turned off. The power was then adjusted to obtain 3000 watts of average visual RF output (5000 watts peak sync at the output connector). This level was used to establish a reference on the spectrum analyzer.

Next, the aural power was turned on and adjusted to 10 dB below the visual power. The following operating parameters were recorded:

Peak Visual Power/100%=5000 Watts Aural Power:/100%=500 Watts
 continuous wave (CW)
 Reflected Power: <1%

4.2 Modulation Characteristics

4.2.1 Video Modulation

The test setup shown in Figure 4-1 was used to adjust the video signal to obtain a white picture level. Using the Tektronix 1450 demodulator chopper function, the modulation was accurately measured to be 87.5% while maintaining a depth of modulation at blanking.

Next, the video was adjusted for modulated staircase and the differential phase and gain were measured and recorded as follows:

- Differential phase: $\pm .5^\circ$
- Differential gain : 2.0%

Figure 4-2 shows the substantially linear transfer characteristics of the transmitter as a demodulated video waveform.



Figure 4-2. Substantially Linear Transfer Characteristics of the Transmitter as a Demodulated Video Waveform

4.2.2 Video Envelope Delay

Not Applicable - Unit under test is a translator.

4.2.3 Video Noise

Not Applicable - Unit under test is a translator.

4.2.4 Video Frequency Response

The test setup shown in Figure 4-1 was used to record the detected video frequency response; the results are shown in Table 4-2 and Figure 4-3.

Note: For this test, the video signal was adjusted to provide a 50% average picture level and the video sweep signal level was set to cover the range from black to white picture.

Table 4-2. Detected Video Frequency Response

VIDEO FREQUENCY	RELATIVE RESPONSE
200 kHz	+2 dB
500 kHz	-.6 dB
750 kHz	-.2 dB
1.0 MHz	-.1 dB
1.25 MHz	+.1 dB
1.5 MHz	+.1 dB
2.0 MHz	+.2 dB
2.5 MHz	+.1 dB
3.0 MHz	+.1 dB
3.5 MHz	+.2 dB
3.58 MHz	+.2 dB
4.0 MHz	-1.0 dB
4.18 MHz	-1.4 dB
4.5 MHz	-20 dB
4.75 MHz	-43 dB
5.0 MHz	-49 dB



Figure 4-3. Graph of Detected Video Frequency Response

4.2.5 RF Sideband Response

The RF sideband response was recorded using the test setup shown in Figure 4-1. With the output power set to 5000 watts peak of sync, the Tektronix TSG95 video generator was adjusted to provide a cable sweep test signal and the RF sideband response was recorded. Data from this test is provided in Table 4-3.

Photographs of the spectrum analyzer results are shown in Figure 4-4.

Table 4-3. RF Sideband Response

OUTPUT FREQUENCY (MHz)	VIDEO FREQUENCY	RESPONSES
663.26	Carrier	--
663.46	+200 kHz	0 (reference)
663.51	+250	-0.3
663.76	+500	-0.4
664.01	+750	-0.3
664.26	+1000	-0.2
665.26	+2000	-0.2
666.26	+3000	-0.1
667.26	+4000	-1.2
667.76	+4500	-39.0
668.01	+4750	-49.0
668.26	+5000	-51.0
663.01	-250	-0.5
662.76	-500	-0.6
662.51	-750	-1.5
662.26	-1000	-28.0
662.01	-1250	-41.0
661.76	-1500	-47.0
661.51	-1750	-48.0
661.26	-2000	-52.0
660.26	-3000	-58.0
659.68	-3580	-59.0
659.26	-4000	-60.0
658.26	-5000	-60.0
669.01	+5750	-60.0

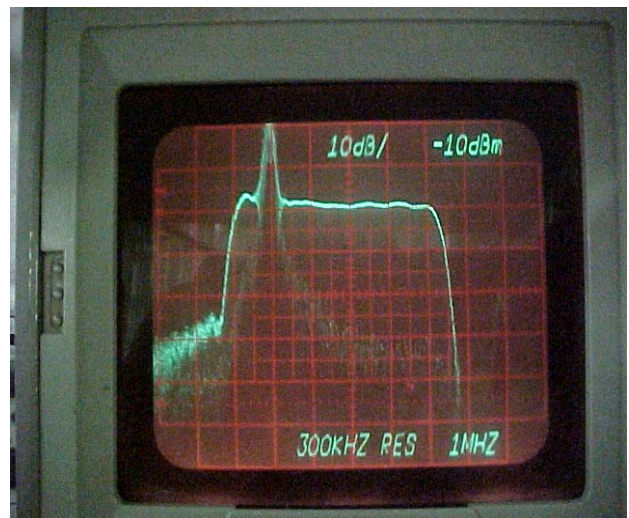
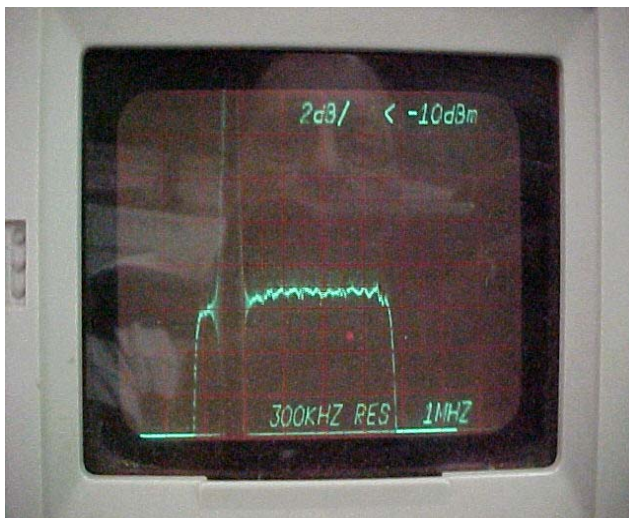


Figure 4-4. Spectrum Analyzer Results

4.2.6 Audio Modulation

Not Applicable - Unit under test is a translator.

4.2.7 AM and FM Noise

Not Applicable - Unit under test is a translator.

4.3 Occupied Bandwidth

Using the test setup in Figure 4-6, with the transmitter operating at maximum power, photographs of the translator-occupied bandwidth spectrum were taken and are shown in Figures 4-7 and 4-8.

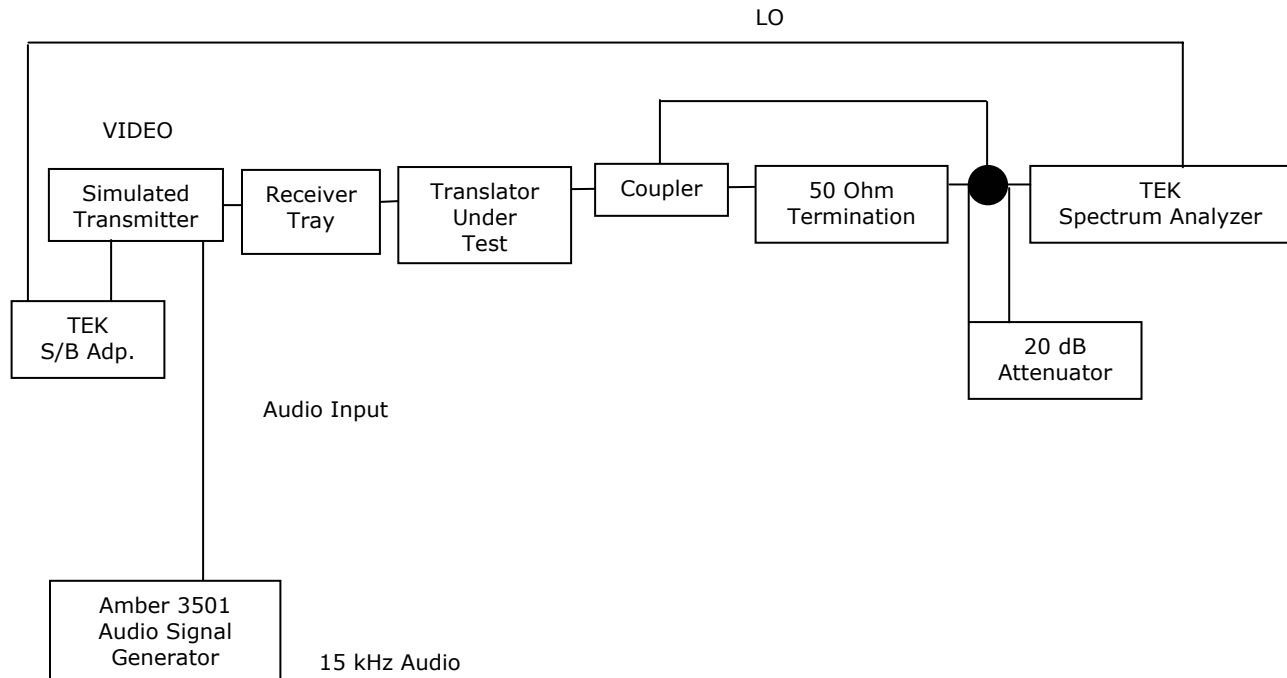


Figure 4-6. Test Setup for Occupied Bandwidth Spectrum Analysis

Note: Using the test setup shown in Figure 4-1, the visual modulation was adjusted to 87.5% at white with the modulated staircase waveform and the aural deviation adjusted to ± 25 kHz (100%) with the 400-Hz audio tone.

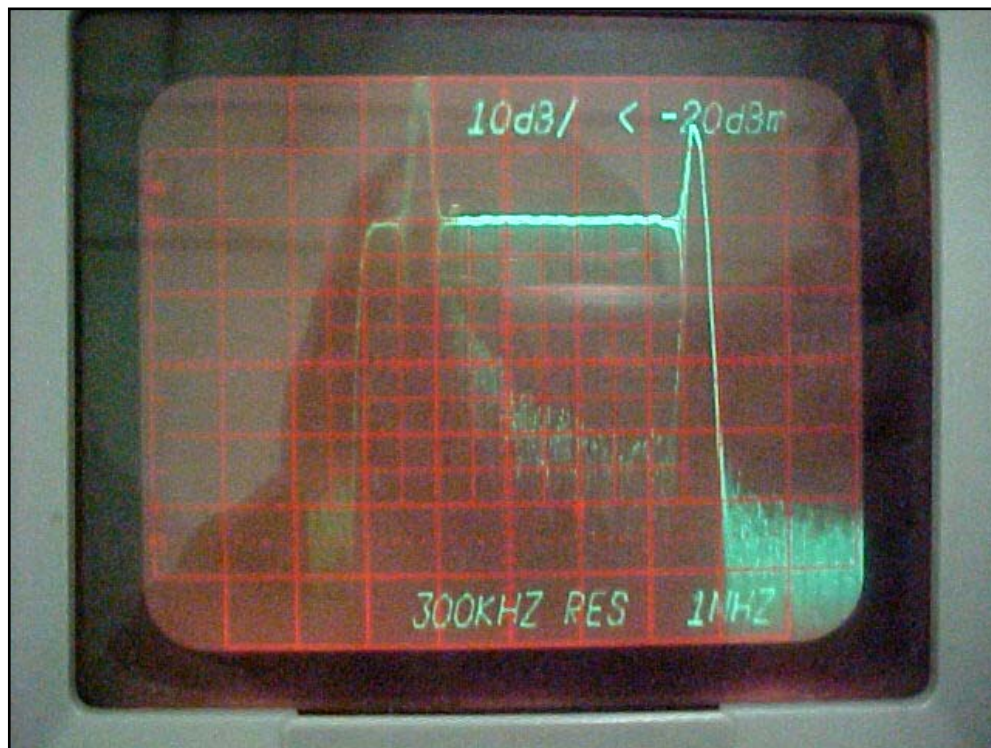


Figure 4-7. Channel-Occupied Bandwidth

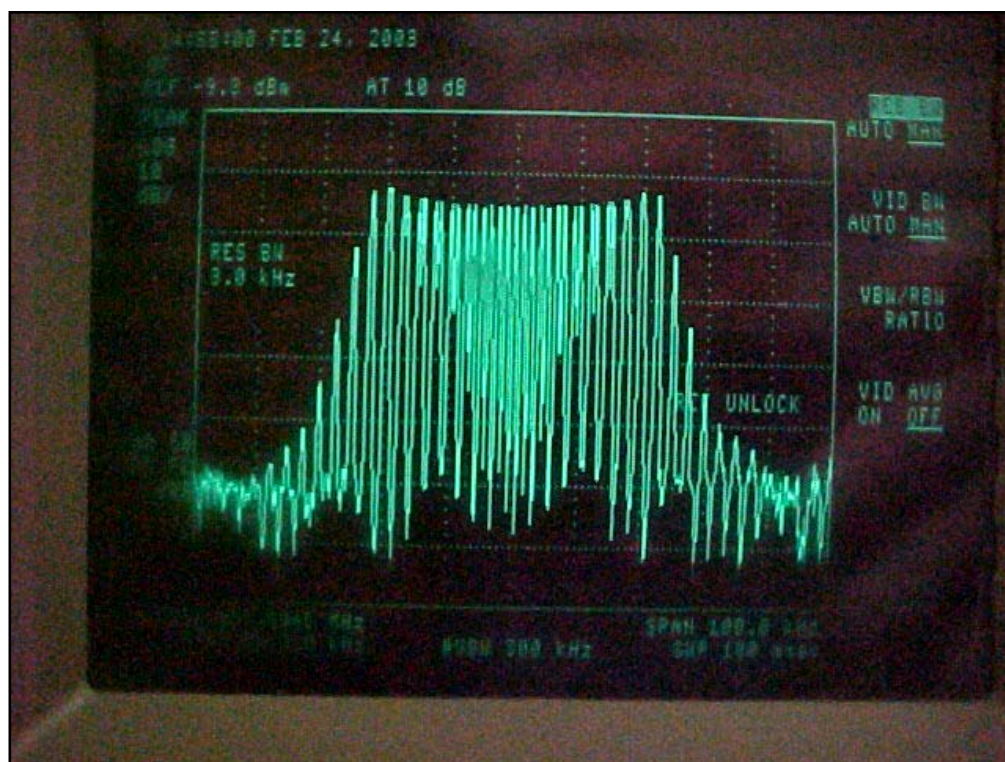


Figure 4-8. Aural Carrier-Occupied Bandwidth

4.4 Conducted Spurious Emissions

Using the test setup shown in Figure 4.1, the spectrum outside of the specified channel was observed and the data was recorded on all products above the 70-dB noise floor of the spectrum analyzer. This data is shown in Table 4-6 and is presented as graphs in Figures 4-9 and 4-10.

Table 4-6. Products Above the 70-dB Noise Floor of the Spectrum Analyzer

FREQUENCY (MHz)	SOURCE	PEAK LEVEL OBSERVED (dB)
754.76	Image Visual Carrier	None observed
750.26	Image Aural Carrier	None observed
709.01	Local Oscillator	None observed
654.26	-9-MHz Product	None observed
658.76	-4.5-MHz Product	-67
667.76	Aural Carrier	-10
663.26	Visual Carrier	0
670.46	+7.2-MHz Product	-68
674.06	+10.8-MHz Product	None observed
672.26	+9-MHz Product	None observed
671.34	+8.08-MHz Product	-65
668.68	+5.42-MHz Product	-62
659.68	-3.58-MHz Product	-64
1335.52	Second Harmonic-Aural Carrier	None observed
1356.52	Second Harmonic-Visual Carrier	None observed
2003.28	Third Harmonic-Aural Carrier	None observed
1989.78	Third Harmonic-Visual Carrier	None observed

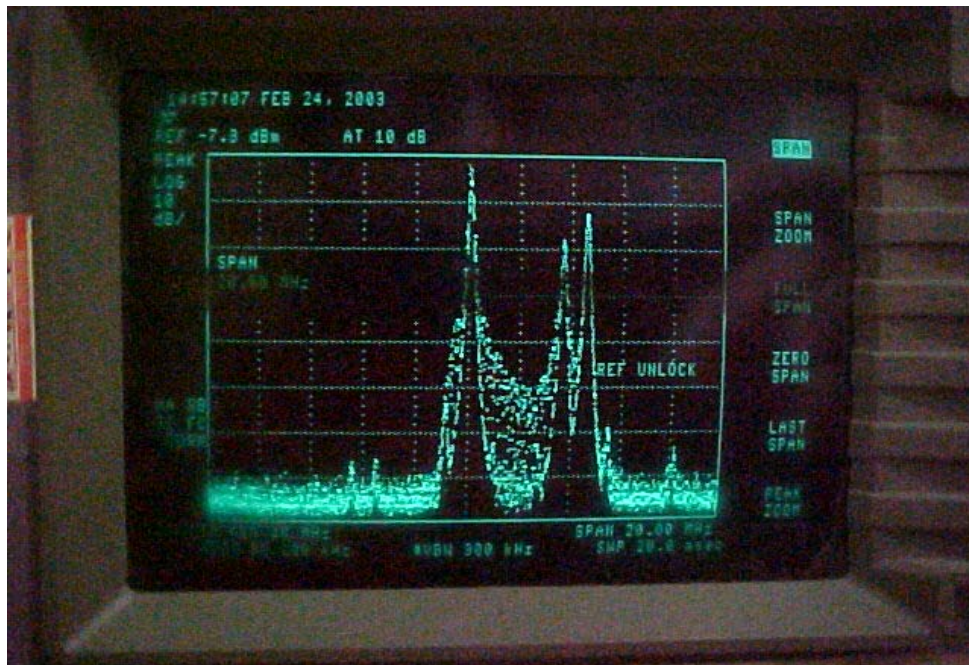


Figure 4-9. Products Above the 70-dB Noise Floor of the Spectrum Analyzer (1 of 2)

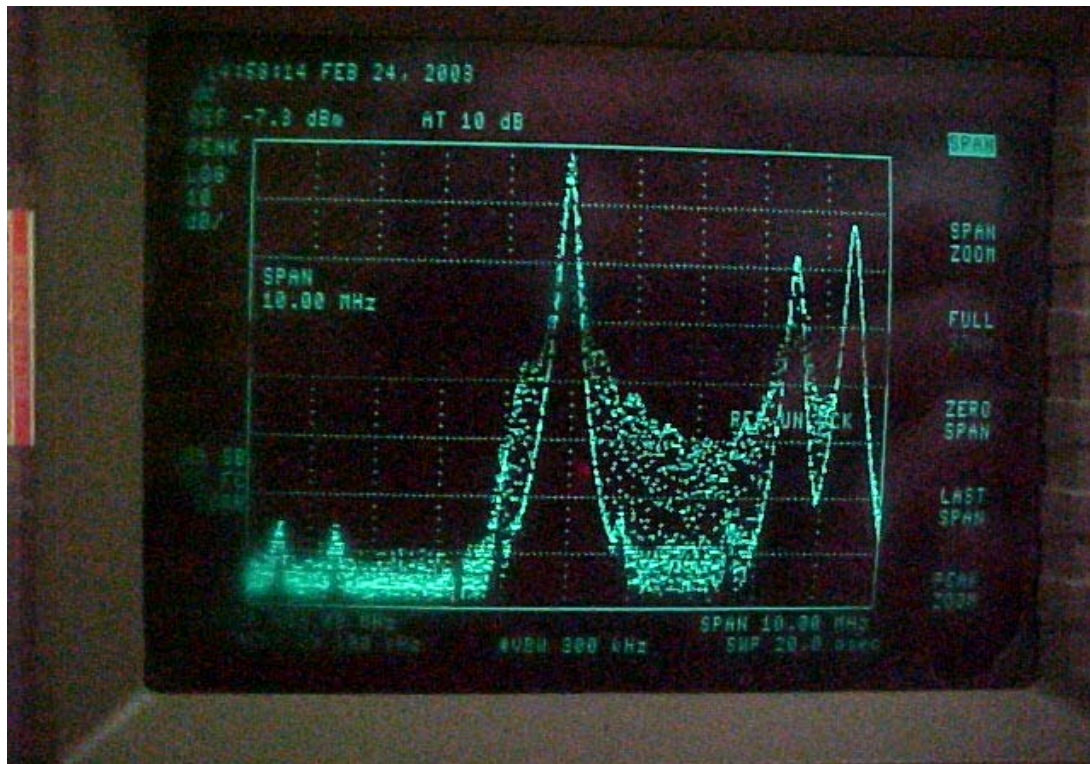


Figure 4-10. Products Above the 70-dB Noise Floor of the Spectrum Analyzer (2 of 2)

4.5 Radiated Emissions

Using the test setup shown in Figure 4-11, with the translator operating at full power, the spectrum analyzer was moved 20 meters from the transmitter and connected to a dipole antenna cut to 663 MHz. This antenna was oriented to maximize the received level and the data was recorded. The antenna was then cut to the local oscillator frequency and the second and third harmonic frequencies of the translator, and all of the signals received, were maximized by antenna orientation and their absolute levels were recorded.

With these various antennas, and with an adjustable length dipole for 40 to 2000 MHz, the frequency spectrum from 40 MHz to 2,000 MHz was observed. The only measurable levels observed were at 663.26 MHz and 667.76 MHz. These levels are shown below in Table 4-8 and an analysis of the relative field and strength is provided in the following paragraphs.

Table 4-8. Measurable Levels Observed in Frequency Spectrum

FREQUENCY	MEASURED LEVEL (INTO 50 Ω)
663.26	-46 dBm
667.76	-57 dBm

The spectrum analyzer had a maximum sensitivity of -110 dBm during these tests.

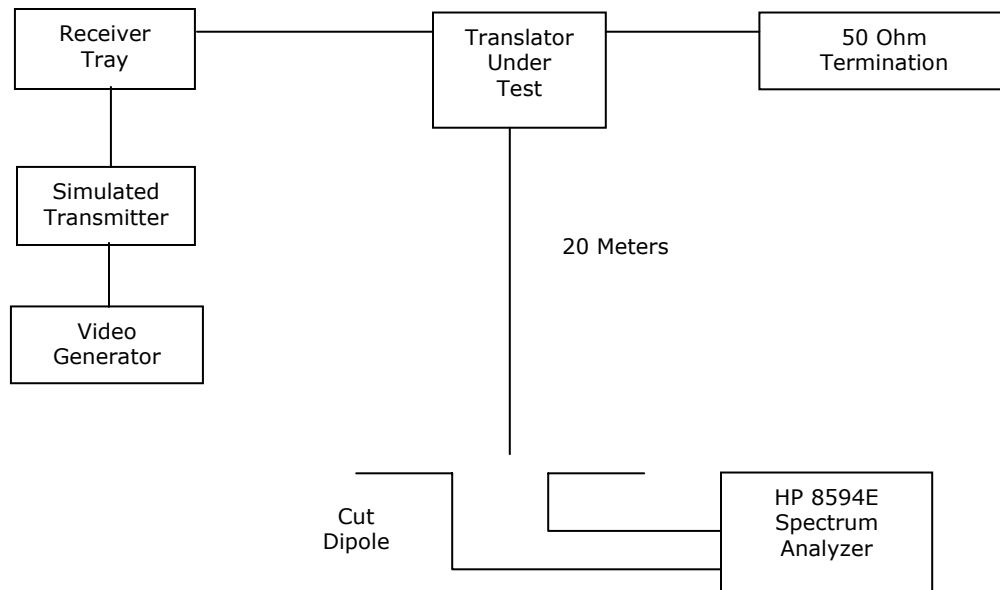


Figure 4-11. Test Setup for Measuring Radiated Emissions

Three levels were compared to the following reference level.

If all of the power of the transmitter was radiated by an isotropic radiator, the power density at 20 meters would be:

$$P = P_t / 4\pi R^2 = 5000 / 4\pi \cdot (20)^2 = 1 \text{ w/m}^2$$

Using a dipole-transmitting antenna increases this by 1.64 to:

$$1.64 \times 1 = 1.64 \text{ w/m}^2$$

If a dipole-receive antenna of area $1.64 \times \lambda^2 / 4\pi$ is used to receive the signal, the received level would be:

$$1.64w = +32.1 \text{ dBm}$$

The receive levels at -46 dBm and -57 dBm were therefore at -78 dB and -89 dB relative to this level.

The receive levels were therefore at the relative levels shown in Table 4-9.

Table 4-9. Receive Levels

FREQUENCY	(REF = +32 dBm) RELATIVE MEASURED LEVEL
663.26	-78 dB
667.76	-89 dB

With the receive dipole antenna cut to 663.26 MHz, the cabinet radiation was also checked, within very close proximity to the trays of the translator, and the received level that was recorded, and is shown below, did not exceed a power density above -16 dBm:

$$Pr/A = 0.025 \text{ mw/cm}^2$$

This level is far less than the current or proposed standard for safe radiation levels.

4.6 Frequency Stability

The output carrier frequency is determined by the crystal oscillator/multiplier in the receiver and the IF carrier out of the receiver tray. Because the IF aural oscillator at 4.5 MHz is phase locked to the IF crystal oscillator at 45.75 MHz, the error in visual/aural separation is very small.

Both oscillators and the related phase-locked loop circuitry were placed in a temperature-controlled chamber and the temperature was varied from -30° C to +50° C. The chamber was slowly heated and the frequency was measured at 10° C increments up to +50° C. The oscillators were allowed to stabilize at each temperature before measurements were recorded.

Tables 4-10, 4-11, and 4-12 provide data on the individual oscillator frequencies; a calculation of the output frequency error indicates that the output frequency of the transmitter is well within the FCC tolerance for this service.

Table 4-10. Oscillator Data

TEMP (°C)	OVEN- CONTROLLED EXCITER CRYSTAL OSCILLATOR (MHz)
-30	81.124932
-20	81.124968
-10	81.124969
0	81.124975
10	81.124986
20	81.125000
30	81.125031
40	81.125057
50	81.125070

Table 4-11. Calculated Frequency Errors

TEMP (°C)	DUAL OVEN OSCILLATOR ERROR Δ^1 KHz	TOTAL OUTPUT ERROR (kHz)
-30	-0.068	-0.544
-20	-0.032	-0.256
-10	-0.031	-0.248
0	-0.025	-0.200
10	-0.014	-0.112
20	0.0	0.0
30	0.031	0.248
40	0.057	0.456
50	0.070	0.560

Table 4-12. Frequency Stability Versus Line Voltage

LINE VOLTAGE	OSCILLATOR (MHz)	TOTAL OUTPUT ERROR kHz
95V	81.125000	0.00
115V	81.125000	0.00
135V	81.125000	0.00

4.7 Automatic Level Control Test

Using the test setup of Figure 4-1, the RF input level to the receiver tray was varied with step attenuators. The output level was monitored on the spectrum analyzer and recorded.

Table 4-13. Automatic Level Control Results

RF Input (dBm)	RF Output (dBm)
-65	Shut down (below receiver threshold)
-64	62.6
-62	62.7
-60	62.8
-58	62.8
-56	62.8
-46	63.0 (5000 Watts)
-36	63.1
-26	63.2

4.8 Test Equipment

The test equipment that was used to analyze the Axcera-837B-5 system is listed in Table 4-14.

Table 4-14. Test Equipment

MODEL	MANUFACTURER	DESCRIPTION	SERIAL #
TSG95	Tektronix	Video Generator	10242
1450-1	Tektronix	Demodulator	10028
4805	Bird	Power Meter	1934
4805	Bird	Thru-line Section	1934
10KE3	Bird	10KW Element	1934
8926	Bird	50 Ω Termination	10779
5253B	Hewlett-Packard	Frequency Counter	716-18295
VM-700A	Tektronix	Delay and Test Set	10808
ZFM-15	Mini-Circuits	Mixer	
3501	Amber	Distortion Analyzer	20014
1405	Tektronix	Sideband Adapter	20159
7623A	Tektronix	Spectrum Analyzer	20092
8594E	Hewlett-Packard	Spectrum Analyzer	10118
8901A	Hewlett-Packard	Modulation Analyzer	00553
1265-1300	Axcera	Exciter	N/A