

4. TEST REPORT

4.1 RF Power Measurements

Figure 4-1 shows the test equipment setup for the RF power measurements.

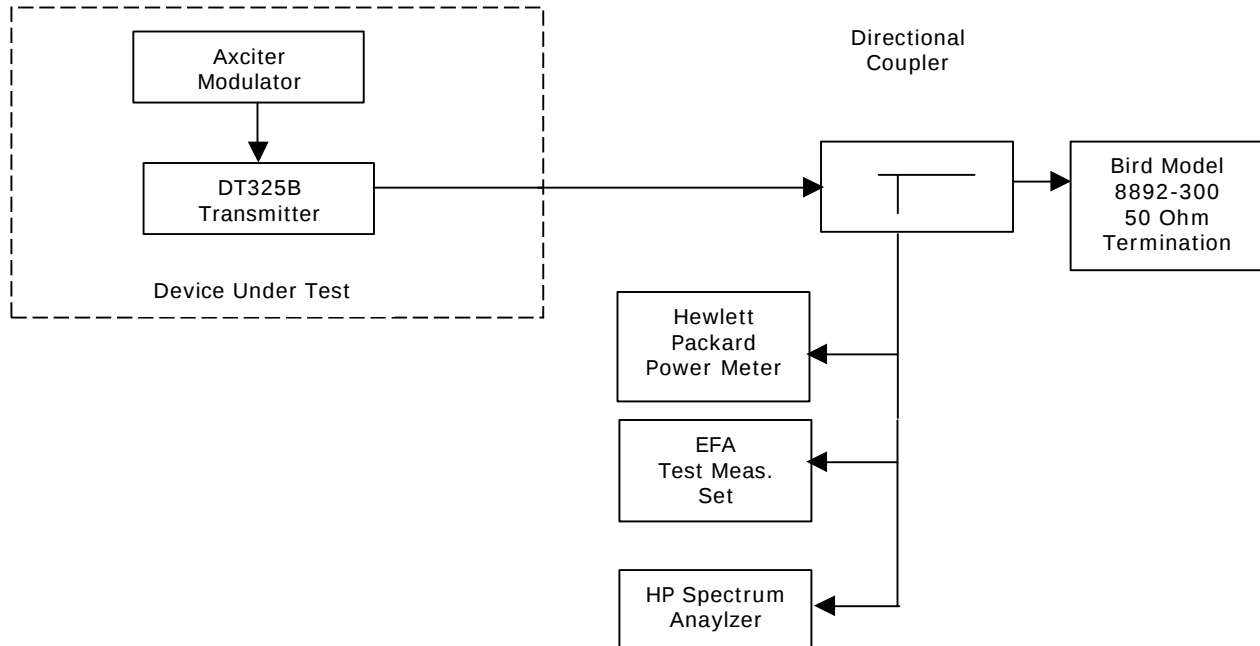


Figure 4-1. Test Equipment Setup for RF Power Measurements

The output power of the DT325B was adjusted to obtain 350 watts average RF output as observed on the power meter.

Measured Power: +29.1 dBm
Coupling Loss: -26.0 dB
Power: +55.1 dBm
Power = 350 Watts

With the power level properly set to 350 watts average, all required tests were performed and recorded in the following sections.

4. 2 Modulation Characteristics

The internal modulator incorporates a modulation technique known as 8-Level Vestigial Side-band (8-VSB), which uses a layered digital architecture and a single carrier frequency. A pilot tone is provided, to allow rapid acquisition of the signal by receivers. The 8-VSB system transmits a serial data bit stream at a rate of 19.4 Mbps in a 6 MHz television channel. This type of transmission is far less susceptible to propagation impairments such as multi-path, noise and interference as compared to analog transmissions.

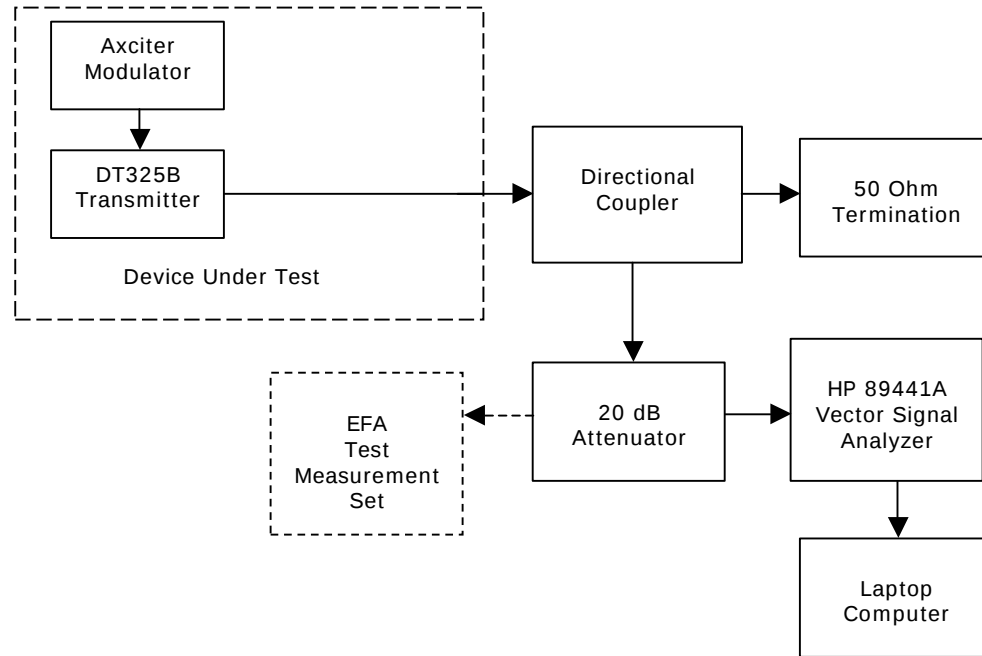


Figure 4-2. Typical Demodulation Test Setup

4. 3 Error Vector Magnitude (EVM) and Signal to Noise Ratio (SNR)

The Rohde & Schwartz EFA was used to measure that the un-equalized patterns are within the ATSC/FCC EVM limit of 4% and SNR limit of 27db.

ATSC/VSB MEASURE			
CENTER FREQ 85.00 MHz	CHANNEL 6	ATTEN : 40 dB -1.3 dBm	
SET CENTER FREQ	85.0000000 MHz	CONSTELL DIAGRAM...	
SET PILOT FREQ	82.3094406 MHz		
CALC PILOT FREQ	82.3094419 MHz		
PILOT FREQ OFFSET	1.3 Hz	FREQUENCY DOMAIN...	
SYMBOL RATE OFFSET	0.0 Hz		
MODULATION	8VSB		
MER (REAL,RMS)	29.4 dB	TIME DOMAIN...	
MER (REAL,RMS)	3.38 %		
BER BEFORE RS	0.0E-9 (411/1K00)	VSB PARA- METERS...	
BER AFTER RS	0.0E-8 (337/1K00)		
SEG ERR RATIO	0.0E-6 (337/1K00)		
SEG ERR / s	00000	RESET BER	
TS BIT RATE 19.393 Mbit/s			
SAW:6.0MHz		ADD. NOISE C/N= 56.0 dB	

Figure 4-3. EVM / SNR Diagram

4. 4 Frequency Response and Group Delay

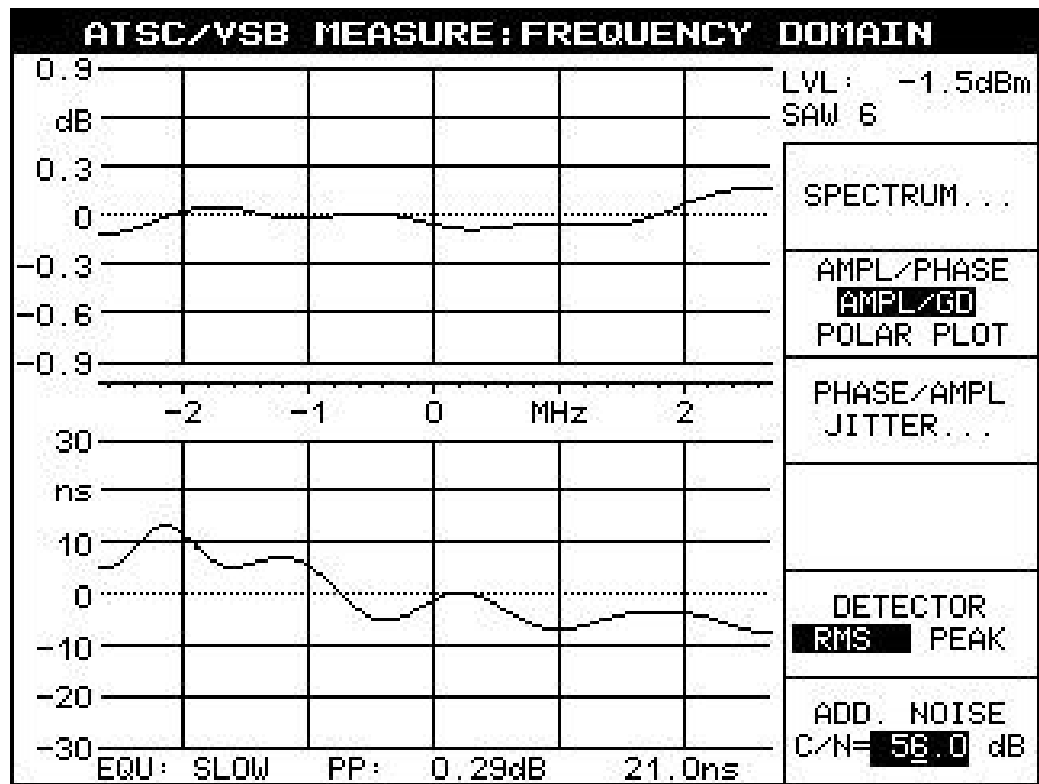


Figure 4-4. Frequency Response and Group Delay Plots

4.6 Phase Noise

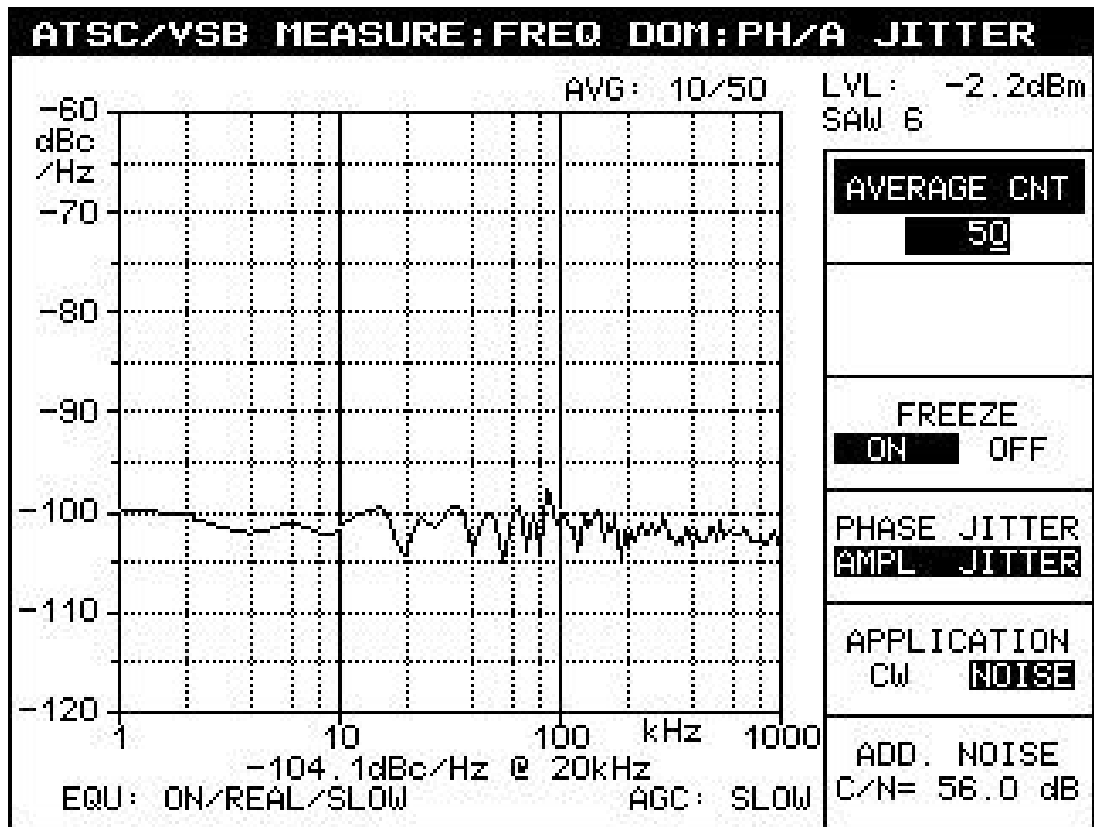


Figure 4-6. Phase Noise Plot

4.7 Occupied Bandwidth

Using the test setup in Figure 4-2, with the transmitter operating at maximum power, a photograph of the transmitter occupied bandwidth spectrum was taken and is shown in Figure 4-7.



Figure 4-7. Channel Occupied Bandwidth (Pre-Filter)

4.8 Conducted Spurious Emissions

The Hewlett Packard Spectrum Analyzer was used to measure harmonics before the low pass and mask filter. The levels were then added to the filter attenuation at the 2nd and 3rd harmonics for a reading of less than -110dB at output of the mask filter.

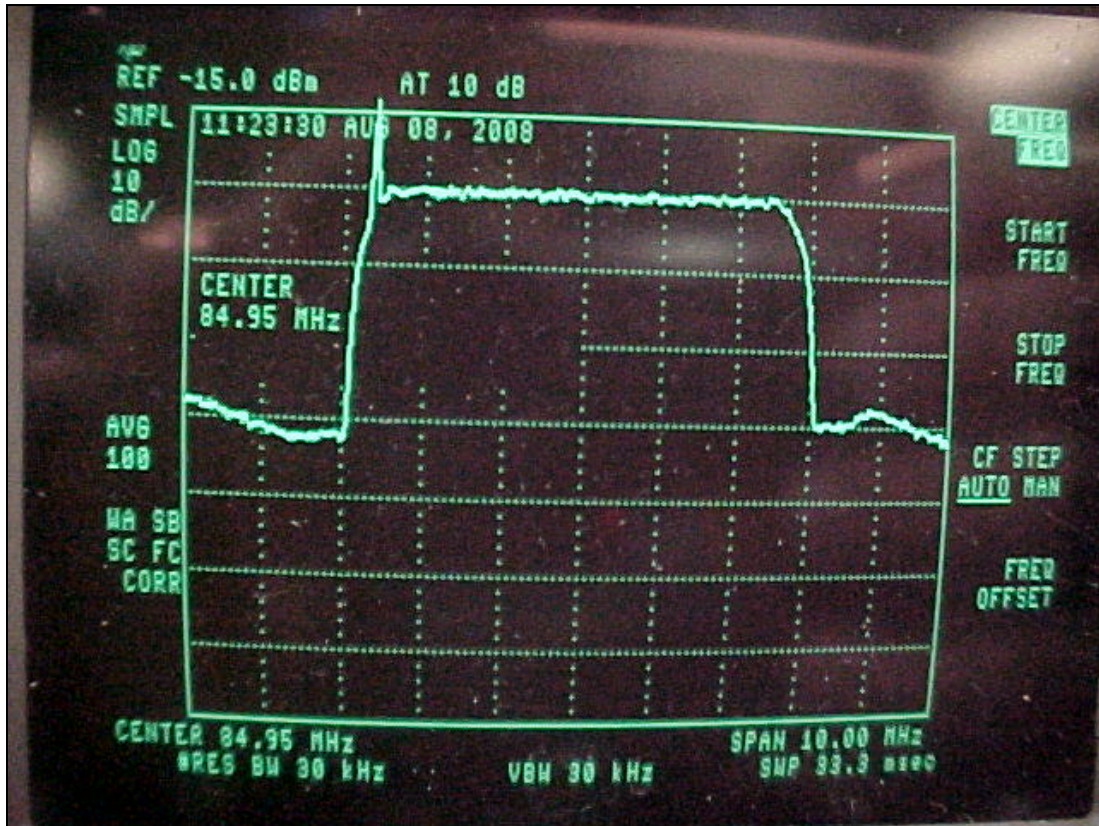


Figure 4-8A. Reference (85.00 MHz) = -25.0 dBm (Pre-Filter)



Figure 4-8B. Second Harmonic (170.00 MHz) = -68.0 dBm (Pre-Filter)

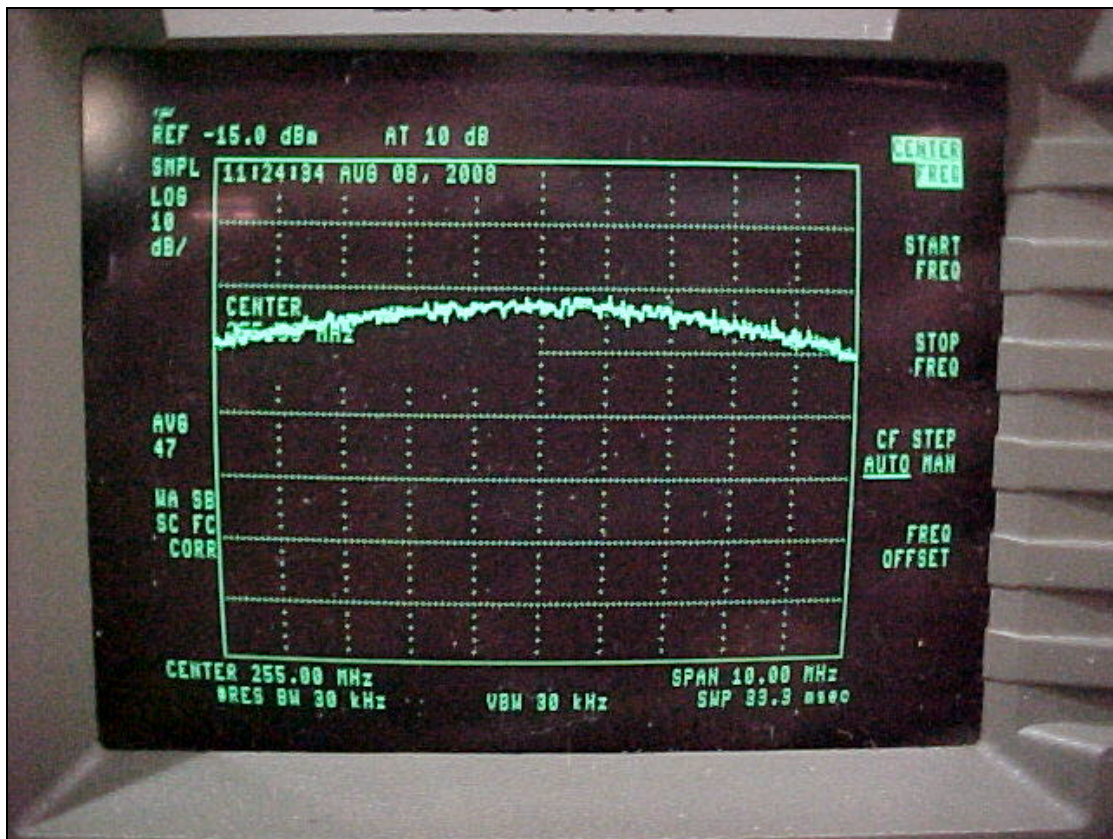


Figure 4-8C. Third Harmonic (255.00 MHz) = -37.0 dBm (Pre-Filter)

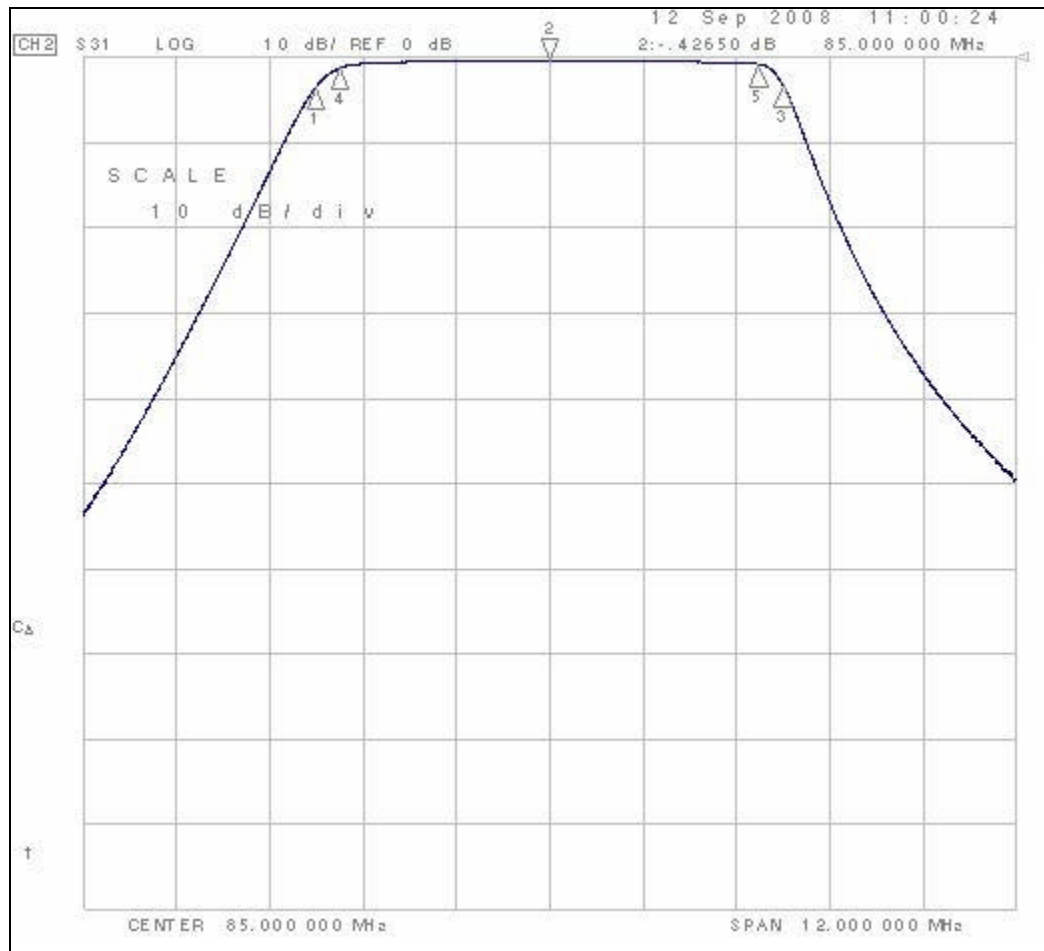


Figure 4-8D. Filter Response

Part 74.794 of the Rules states:

(ii) *Stringent mask. In the first 500 kHz from the channel edges, emissions must be attenuated no less than 47 dB. More than 3 MHz from the channel edges, emissions must be attenuated no less than 76 dB. At any frequency between 0.5 and 3 MHz from the channel edges, emissions must be attenuated no less than the value determined by the following formula: $A(\text{dB}) = 47 + 11.5 (Df - 0.5)$.*

3) *The attenuation values for the simple and stringent emission masks are based on a measurement bandwidth of 500 kHz. Other measurement bandwidths may be used and converted to the reference 500 kHz value by the following formula:*

$$A(\text{dB}) = A_{\text{alternate}} + 10 \log (B_{\text{Walternate}} / 500)$$

where $A(\text{dB})$ is the measured or calculated attenuation value for the reference 500 kHz bandwidth, and $A_{\text{alternate}}$ is the measured or calculated attenuation for a bandwidth $B_{\text{Walternate}}$. Emissions include sidebands, spurious emissions and radio harmonics. Attenuation is to be measured at the output terminals of the transmitter (including any filters that may be employed). In the event of interference caused to any service by out-of-channel emissions, greater attenuation may be required.

Calculating energy in first 500 kHz and comparing it to in channel power by converting out of band energy from dB to linear power and summing:

Lower Sideband:

Frequency (MHz)	Filter (dB)	Transmitter IMD	Linear
81.50	-10.79	-32	5.26E-05
81.51	-10.6	-32	5.50E-05
81.52	-10.44	-32	5.70E-05
81.53	-10.21	-32	6.01E-05
81.54	-10.04	-32	6.26E-05
81.55	-9.85	-32	6.53E-05
81.56	-9.65	-32	6.84E-05
81.57	-9.47	-32	7.13E-05
81.58	-9.27	-32	7.46E-05
81.59	-9.08	-32	7.80E-05
81.60	-8.9	-32	8.14E-05
81.61	-8.74	-32	8.44E-05
81.62	-8.53	-32	8.85E-05
81.63	-8.38	-32	9.17E-05
81.64	-8.17	-32	9.62E-05
81.65	-8	-32	1.00E-04
81.66	-7.81	-32	1.05E-04
81.67	-7.63	-32	1.09E-04
81.68	-7.46	-32	1.13E-04
81.69	-7.28	-32	1.18E-04

81.70	-7.11	-32	1.23E-04
81.71	-6.93	-32	1.28E-04
81.72	-6.77	-32	1.33E-04
81.73	-6.59	-32	1.38E-04
81.74	-6.43	-32	1.44E-04
81.75	-6.27	-32	1.49E-04
81.76	-6.09	-32	1.55E-04
81.77	-5.92	-32	1.61E-04
81.78	-5.77	-32	1.67E-04
81.79	-5.62	-32	1.73E-04
81.80	-5.45	-32	1.80E-04
81.81	-5.3	-32	1.86E-04
81.82	-5.14	-32	1.93E-04
81.83	-4.99	-32	2.00E-04
81.84	-4.82	-32	2.08E-04
81.85	-4.68	-32	2.15E-04
81.86	-4.55	-32	2.22E-04
81.87	-4.41	-32	2.29E-04
81.88	-4.28	-32	2.36E-04
81.89	-4.14	-32	2.43E-04
81.90	-4	-32	2.51E-04
81.91	-3.88	-32	2.58E-04
81.92	-3.74	-32	2.66E-04
81.93	-3.61	-32	2.74E-04
81.94	-3.48	-32	2.83E-04
81.95	-3.37	-32	2.91E-04
81.96	-3.24	-32	2.99E-04
81.97	-3.14	-32	3.06E-04
81.98	-3.03	-32	3.14E-04
81.99	-2.92	-32	3.22E-04
82.00	-2.82	-32	3.30E-04

Total Energy = 8.4E-03

In Band:

Frequency (MHz)	Filter (dB)	Transmitter IMD	Linear
82.31	-1		7.94E-01
82.32	-0.99		7.97E-01
82.33	-0.96		8.02E-01
82.34	-0.94		8.05E-01
82.35	-0.93		8.07E-01
82.36	-0.9		8.13E-01
82.37	-0.87		8.18E-01
82.38	-0.85		8.21E-01
82.39	-0.85		8.22E-01
82.40	-0.83		8.26E-01
82.41	-0.83		8.27E-01
82.42	-0.81		8.30E-01
82.43	-0.8		8.31E-01
82.44	-0.8		8.32E-01
82.45	-0.78		8.35E-01
82.46	-0.78		8.35E-01
82.47	-0.75		8.41E-01
82.48	-0.75		8.41E-01
82.49	-0.74		8.43E-01
82.50	-0.72		8.47E-01
82.51	-0.72		8.46E-01
82.52	-0.72		8.48E-01
82.53	-0.72		8.47E-01
82.54	-0.7		8.51E-01
82.55	-0.7		8.51E-01
82.56	-0.69		8.52E-01
82.57	-0.69		8.53E-01
82.58	-0.69		8.54E-01
82.59	-0.67		8.56E-01
82.60	-0.68		8.55E-01
82.61	-0.68		8.56E-01
82.62	-0.67		8.58E-01
82.63	-0.66		8.59E-01
82.64	-0.66		8.59E-01
82.65	-0.66		8.59E-01
82.66	-0.66		8.58E-01
82.67	-0.65		8.60E-01
82.68	-0.65		8.62E-01
82.69	-0.66		8.60E-01
82.70	-0.65		8.60E-01
82.71	-0.64		8.63E-01
82.72	-0.64		8.63E-01

82.73	-0.64		8.62E-01
82.74	-0.64		8.64E-01
82.75	-0.64		8.63E-01
82.76	-0.64		8.63E-01
82.77	-0.63		8.65E-01
82.78	-0.63		8.65E-01
82.79	-0.63		8.65E-01
82.80	-0.62		8.66E-01
82.81	-0.63		8.66E-01
82.82	-0.63		8.65E-01
82.83	-0.63		8.65E-01
82.84	-0.62		8.66E-01
82.85	-0.62		8.67E-01
82.86	-0.63		8.65E-01
82.87	-0.63		8.66E-01
82.88	-0.63		8.65E-01
82.89	-0.62		8.66E-01
82.90	-0.62		8.67E-01
82.91	-0.62		8.66E-01
82.92	-0.62		8.67E-01
82.93	-0.62		8.67E-01
82.94	-0.62		8.67E-01
82.95	-0.6		8.70E-01
82.96	-0.61		8.69E-01
82.97	-0.61		8.68E-01
82.98	-0.6		8.71E-01
82.99	-0.61		8.69E-01
83.00	-0.61		8.70E-01
83.01	-0.6		8.71E-01
83.02	-0.6		8.72E-01
83.03	-0.6		8.70E-01
83.04	-0.61		8.69E-01
83.05	-0.6		8.71E-01
83.06	-0.6		8.70E-01
83.07	-0.61		8.70E-01
83.08	-0.6		8.71E-01
83.09	-0.6		8.71E-01
83.10	-0.61		8.69E-01
83.11	-0.6		8.71E-01
83.12	-0.59		8.73E-01
83.13	-0.6		8.72E-01
83.14	-0.6		8.71E-01
83.15	-0.6		8.72E-01
83.16	-0.59		8.73E-01
83.17	-0.59		8.73E-01
83.18	-0.59		8.73E-01

83.19	-0.58		8.75E-01
83.20	-0.58		8.76E-01
83.21	-0.58		8.76E-01
83.22	-0.58		8.74E-01
83.23	-0.59		8.74E-01
83.24	-0.58		8.74E-01
83.25	-0.59		8.73E-01
83.26	-0.58		8.74E-01
83.27	-0.59		8.74E-01
83.28	-0.58		8.75E-01
83.29	-0.57		8.76E-01
83.30	-0.58		8.74E-01
83.31	-0.57		8.77E-01
83.32	-0.56		8.78E-01
83.33	-0.56		8.80E-01
83.34	-0.56		8.78E-01
83.35	-0.56		8.78E-01
83.36	-0.55		8.81E-01
83.37	-0.56		8.78E-01
83.38	-0.56		8.79E-01
83.39	-0.56		8.79E-01
83.40	-0.57		8.78E-01
83.41	-0.56		8.80E-01
83.42	-0.56		8.78E-01
83.43	-0.55		8.81E-01
83.44	-0.56		8.80E-01
83.45	-0.56		8.80E-01
83.46	-0.56		8.80E-01
83.47	-0.56		8.80E-01
83.48	-0.56		8.80E-01
83.49	-0.55		8.80E-01
83.50	-0.56		8.79E-01
83.51	-0.56		8.80E-01
83.52	-0.55		8.81E-01
83.53	-0.56		8.80E-01
83.54	-0.56		8.79E-01
83.55	-0.55		8.80E-01
83.56	-0.55		8.80E-01
83.57	-0.55		8.81E-01
83.58	-0.55		8.81E-01
83.59	-0.56		8.80E-01
83.60	-0.55		8.81E-01
83.61	-0.54		8.82E-01
83.62	-0.55		8.80E-01
83.63	-0.55		8.81E-01
83.64	-0.55		8.81E-01

83.65	-0.55		8.82E-01
83.66	-0.55		8.82E-01
83.67	-0.55		8.82E-01
83.68	-0.55		8.81E-01
83.69	-0.56		8.80E-01
83.70	-0.55		8.81E-01
83.71	-0.55		8.81E-01
83.72	-0.55		8.80E-01
83.73	-0.55		8.80E-01
83.74	-0.55		8.81E-01
83.75	-0.54		8.82E-01
83.76	-0.54		8.83E-01
83.77	-0.55		8.81E-01
83.78	-0.55		8.82E-01
83.79	-0.54		8.83E-01
83.80	-0.54		8.84E-01
83.81	-0.53		8.85E-01
83.82	-0.54		8.84E-01
83.83	-0.54		8.83E-01
83.84	-0.55		8.82E-01
83.85	-0.54		8.83E-01
83.86	-0.53		8.84E-01
83.87	-0.54		8.83E-01
83.88	-0.54		8.83E-01
83.89	-0.54		8.83E-01
83.90	-0.55		8.82E-01
83.91	-0.56		8.78E-01
83.92	-0.55		8.82E-01
83.93	-0.57		8.78E-01
83.94	-0.54		8.82E-01
83.95	-0.55		8.82E-01
83.96	-0.54		8.83E-01
83.97	-0.54		8.84E-01
83.98	-0.55		8.81E-01
83.99	-0.53		8.85E-01
84.00	-0.53		8.86E-01
84.01	-0.53		8.86E-01
84.02	-0.54		8.83E-01
84.03	-0.54		8.83E-01
84.04	-0.54		8.83E-01
84.05	-0.54		8.84E-01
84.06	-0.54		8.83E-01
84.07	-0.54		8.84E-01
84.08	-0.53		8.85E-01
84.09	-0.53		8.85E-01
84.10	-0.54		8.83E-01

84.11	-0.53		8.84E-01
84.12	-0.54		8.84E-01
84.13	-0.54		8.83E-01
84.14	-0.55		8.82E-01
84.15	-0.54		8.83E-01
84.16	-0.54		8.83E-01
84.17	-0.54		8.82E-01
84.18	-0.54		8.84E-01
84.19	-0.52		8.88E-01
84.20	-0.53		8.85E-01
84.21	-0.52		8.88E-01
84.22	-0.52		8.87E-01
84.23	-0.54		8.83E-01
84.24	-0.53		8.85E-01
84.25	-0.52		8.86E-01
84.26	-0.52		8.87E-01
84.27	-0.53		8.84E-01
84.28	-0.52		8.87E-01
84.29	-0.53		8.84E-01
84.30	-0.52		8.86E-01
84.31	-0.51		8.89E-01
84.32	-0.52		8.87E-01
84.33	-0.53		8.84E-01
84.34	-0.52		8.86E-01
84.35	-0.52		8.86E-01
84.36	-0.53		8.86E-01
84.37	-0.52		8.87E-01
84.38	-0.51		8.89E-01
84.39	-0.52		8.87E-01
84.40	-0.52		8.87E-01
84.41	-0.52		8.87E-01
84.42	-0.52		8.87E-01
84.43	-0.53		8.85E-01
84.44	-0.53		8.84E-01
84.45	-0.52		8.87E-01
84.46	-0.52		8.87E-01
84.47	-0.53		8.85E-01
84.48	-0.52		8.87E-01
84.49	-0.52		8.87E-01
84.50	-0.53		8.85E-01
84.51	-0.54		8.83E-01
84.52	-0.52		8.86E-01
84.53	-0.52		8.87E-01
84.54	-0.52		8.88E-01
84.55	-0.51		8.90E-01
84.56	-0.51		8.89E-01

84.57	-0.52		8.87E-01
84.58	-0.53		8.86E-01
84.59	-0.52		8.87E-01
84.60	-0.52		8.88E-01
84.61	-0.53		8.86E-01
84.62	-0.52		8.87E-01
84.63	-0.51		8.89E-01
84.64	-0.52		8.87E-01
84.65	-0.52		8.88E-01
84.66	-0.51		8.89E-01
84.67	-0.52		8.88E-01
84.68	-0.51		8.88E-01
84.69	-0.51		8.89E-01
84.70	-0.51		8.89E-01
84.71	-0.52		8.88E-01
84.72	-0.52		8.88E-01
84.73	-0.52		8.88E-01
84.74	-0.52		8.88E-01
84.75	-0.52		8.87E-01
84.76	-0.52		8.87E-01
84.77	-0.52		8.88E-01
84.78	-0.52		8.86E-01
84.79	-0.52		8.87E-01
84.80	-0.51		8.89E-01
84.81	-0.53		8.86E-01
84.82	-0.52		8.88E-01
84.83	-0.52		8.87E-01
84.84	-0.53		8.86E-01
84.85	-0.53		8.85E-01
84.86	-0.52		8.87E-01
84.87	-0.52		8.86E-01
84.88	-0.52		8.87E-01
84.89	-0.52		8.88E-01
84.90	-0.51		8.89E-01
84.91	-0.52		8.88E-01
84.92	-0.52		8.87E-01
84.93	-0.52		8.88E-01
84.94	-0.52		8.87E-01
84.95	-0.53		8.85E-01
84.96	-0.53		8.85E-01
84.97	-0.53		8.86E-01
84.98	-0.53		8.85E-01
84.99	-0.53		8.85E-01
85.00	-0.52		8.86E-01
85.01	-0.53		8.85E-01
85.02	-0.53		8.85E-01

85.03	-0.54		8.84E-01
85.04	-0.53		8.85E-01
85.05	-0.53		8.86E-01
85.06	-0.54		8.84E-01
85.07	-0.53		8.86E-01
85.08	-0.53		8.85E-01
85.09	-0.54		8.83E-01
85.10	-0.54		8.84E-01
85.11	-0.54		8.84E-01
85.12	-0.53		8.84E-01
85.13	-0.54		8.84E-01
85.14	-0.53		8.85E-01
85.15	-0.54		8.83E-01
85.16	-0.54		8.83E-01
85.17	-0.53		8.85E-01
85.18	-0.53		8.85E-01
85.19	-0.53		8.85E-01
85.20	-0.53		8.86E-01
85.21	-0.53		8.85E-01
85.22	-0.53		8.86E-01
85.23	-0.52		8.87E-01
85.24	-0.52		8.88E-01
85.25	-0.52		8.87E-01
85.26	-0.53		8.85E-01
85.27	-0.53		8.84E-01
85.28	-0.53		8.84E-01
85.29	-0.53		8.85E-01
85.30	-0.54		8.84E-01
85.31	-0.54		8.83E-01
85.32	-0.54		8.84E-01
85.33	-0.54		8.84E-01
85.34	-0.53		8.86E-01
85.35	-0.53		8.85E-01
85.36	-0.54		8.84E-01
85.37	-0.54		8.84E-01
85.38	-0.54		8.83E-01
85.39	-0.54		8.82E-01
85.40	-0.54		8.84E-01
85.41	-0.54		8.82E-01
85.42	-0.55		8.80E-01
85.43	-0.54		8.82E-01
85.44	-0.55		8.81E-01
85.45	-0.55		8.82E-01
85.46	-0.54		8.82E-01
85.47	-0.55		8.82E-01
85.48	-0.54		8.83E-01

85.49	-0.55		8.81E-01
85.50	-0.55		8.81E-01
85.51	-0.54		8.83E-01
85.52	-0.55		8.81E-01
85.53	-0.55		8.82E-01
85.54	-0.56		8.80E-01
85.55	-0.54		8.82E-01
85.56	-0.54		8.82E-01
85.57	-0.55		8.82E-01
85.58	-0.55		8.80E-01
85.59	-0.54		8.82E-01
85.60	-0.54		8.82E-01
85.61	-0.55		8.80E-01
85.62	-0.54		8.83E-01
85.63	-0.54		8.83E-01
85.64	-0.54		8.84E-01
85.65	-0.54		8.83E-01
85.66	-0.53		8.84E-01
85.67	-0.55		8.81E-01
85.68	-0.54		8.82E-01
85.69	-0.54		8.84E-01
85.70	-0.55		8.81E-01
85.71	-0.54		8.83E-01
85.72	-0.56		8.80E-01
85.73	-0.56		8.80E-01
85.74	-0.55		8.81E-01
85.75	-0.54		8.83E-01
85.76	-0.54		8.83E-01
85.77	-0.54		8.82E-01
85.78	-0.54		8.82E-01
85.79	-0.55		8.82E-01
85.80	-0.53		8.85E-01
85.81	-0.53		8.85E-01
85.82	-0.53		8.84E-01
85.83	-0.53		8.85E-01
85.84	-0.53		8.85E-01
85.85	-0.54		8.82E-01
85.86	-0.54		8.84E-01
85.87	-0.53		8.84E-01
85.88	-0.54		8.83E-01
85.89	-0.53		8.85E-01
85.90	-0.54		8.83E-01
85.91	-0.56		8.78E-01
85.92	-0.55		8.81E-01
85.93	-0.54		8.84E-01
85.94	-0.56		8.79E-01

85.95	-0.55		8.82E-01
85.96	-0.55		8.80E-01
85.97	-0.54		8.83E-01
85.98	-0.54		8.83E-01
85.99	-0.54		8.84E-01
86.00	-0.54		8.83E-01
86.01	-0.54		8.84E-01
86.02	-0.54		8.83E-01
86.03	-0.53		8.85E-01
86.04	-0.53		8.85E-01
86.05	-0.54		8.83E-01
86.06	-0.53		8.84E-01
86.07	-0.52		8.87E-01
86.08	-0.55		8.82E-01
86.09	-0.54		8.84E-01
86.10	-0.54		8.84E-01
86.11	-0.54		8.83E-01
86.12	-0.53		8.86E-01
86.13	-0.54		8.84E-01
86.14	-0.52		8.86E-01
86.15	-0.52		8.86E-01
86.16	-0.54		8.84E-01
86.17	-0.53		8.84E-01
86.18	-0.54		8.83E-01
86.19	-0.54		8.83E-01
86.20	-0.55		8.81E-01
86.21	-0.55		8.81E-01
86.22	-0.56		8.80E-01
86.23	-0.54		8.82E-01
86.24	-0.53		8.84E-01
86.25	-0.56		8.80E-01
86.26	-0.54		8.82E-01
86.27	-0.54		8.83E-01
86.28	-0.55		8.81E-01
86.29	-0.55		8.80E-01
86.30	-0.55		8.82E-01
86.31	-0.54		8.82E-01
86.32	-0.56		8.80E-01
86.33	-0.55		8.81E-01
86.34	-0.54		8.83E-01
86.35	-0.55		8.81E-01
86.36	-0.55		8.81E-01
86.37	-0.55		8.81E-01
86.38	-0.55		8.82E-01
86.39	-0.56		8.78E-01
86.40	-0.56		8.79E-01

86.41	-0.55		8.80E-01
86.42	-0.55		8.81E-01
86.43	-0.55		8.81E-01
86.44	-0.55		8.81E-01
86.45	-0.55		8.81E-01
86.46	-0.55		8.81E-01
86.47	-0.55		8.80E-01
86.48	-0.56		8.79E-01
86.49	-0.55		8.80E-01
86.50	-0.56		8.79E-01
86.51	-0.56		8.79E-01
86.52	-0.56		8.79E-01
86.53	-0.56		8.78E-01
86.54	-0.56		8.79E-01
86.55	-0.56		8.80E-01
86.56	-0.57		8.78E-01
86.57	-0.57		8.77E-01
86.58	-0.57		8.77E-01
86.59	-0.56		8.79E-01
86.60	-0.57		8.77E-01
86.61	-0.56		8.79E-01
86.62	-0.56		8.78E-01
86.63	-0.56		8.79E-01
86.64	-0.56		8.80E-01
86.65	-0.56		8.80E-01
86.66	-0.57		8.77E-01
86.67	-0.57		8.76E-01
86.68	-0.58		8.75E-01
86.69	-0.58		8.74E-01
86.70	-0.59		8.73E-01
86.71	-0.59		8.73E-01
86.72	-0.58		8.75E-01
86.73	-0.58		8.75E-01
86.74	-0.58		8.75E-01
86.75	-0.57		8.76E-01
86.76	-0.58		8.76E-01
86.77	-0.57		8.76E-01
86.78	-0.57		8.77E-01
86.79	-0.57		8.76E-01
86.80	-0.57		8.76E-01
86.81	-0.57		8.76E-01
86.82	-0.58		8.75E-01
86.83	-0.59		8.74E-01
86.84	-0.59		8.74E-01
86.85	-0.6		8.71E-01
86.86	-0.59		8.73E-01

86.87	-0.59		8.72E-01
86.88	-0.6		8.71E-01
86.89	-0.6		8.72E-01
86.9	-0.6		8.71E-01
86.91	-0.6		8.70E-01
86.92	-0.59		8.72E-01
86.93	-0.61		8.70E-01
86.94	-0.61		8.68E-01
86.95	-0.61		8.69E-01
86.96	-0.6		8.70E-01
86.97	-0.61		8.68E-01
86.98	-0.6		8.71E-01
86.99	-0.61		8.70E-01
87.00	-0.61		8.68E-01
87.01	-0.62		8.67E-01
87.02	-0.62		8.68E-01
87.03	-0.6		8.71E-01
87.04	-0.61		8.69E-01
87.05	-0.61		8.68E-01
87.06	-0.62		8.67E-01
87.07	-0.62		8.67E-01
87.08	-0.62		8.67E-01
87.09	-0.63		8.65E-01
87.10	-0.62		8.68E-01
87.11	-0.62		8.66E-01
87.12	-0.63		8.65E-01
87.13	-0.63		8.64E-01
87.14	-0.63		8.64E-01
87.15	-0.64		8.62E-01
87.16	-0.63		8.64E-01
87.17	-0.65		8.60E-01
87.18	-0.65		8.61E-01
87.19	-0.65		8.61E-01
87.20	-0.64		8.62E-01
87.21	-0.66		8.60E-01
87.22	-0.64		8.62E-01
87.23	-0.66		8.59E-01
87.24	-0.66		8.59E-01
87.25	-0.66		8.59E-01
87.26	-0.66		8.59E-01
87.27	-0.68		8.56E-01
87.28	-0.67		8.57E-01
87.29	-0.67		8.56E-01
87.30	-0.66		8.60E-01
87.31	-0.67		8.57E-01
87.32	-0.67		8.56E-01

87.33	-0.68		8.56E-01
87.34	-0.68		8.55E-01
87.35	-0.68		8.54E-01
87.36	-0.69		8.54E-01
87.37	-0.68		8.54E-01
87.38	-0.69		8.53E-01
87.39	-0.7		8.51E-01
87.40	-0.7		8.52E-01
87.41	-0.71		8.48E-01
87.42	-0.71		8.49E-01
87.43	-0.71		8.49E-01
87.44	-0.71		8.49E-01
87.45	-0.72		8.48E-01
87.46	-0.71		8.49E-01
87.47	-0.72		8.48E-01
87.48	-0.72		8.46E-01
87.49	-0.73		8.46E-01
87.50	-0.72		8.48E-01
87.51	-0.74		8.43E-01
87.52	-0.75		8.40E-01
87.53	-0.74		8.43E-01
87.54	-0.76		8.39E-01
87.55	-0.77		8.37E-01
87.56	-0.77		8.37E-01
87.57	-0.78		8.36E-01
87.58	-0.8		8.31E-01
87.59	-0.81		8.29E-01
87.60	-0.82		8.27E-01
87.61	-0.83		8.26E-01
87.62	-0.85		8.22E-01
87.63	-0.86		8.20E-01
87.64	-0.86		8.20E-01
87.65	-0.91		8.11E-01
87.66	-0.92		8.09E-01
87.67	-0.94		8.05E-01
87.68	-0.97		8.00E-01
87.69	-1		7.95E-01

Total In band Energy = 471

Upper Sideband:

Frequency (MHz)	Filter (dB)	Transmitter IMD	Linear
88.00	-3.88	-30	4.10E-04
88.01	-4.06	-30	3.93E-04
88.02	-4.23	-30	3.77E-04
88.03	-4.42	-30	3.62E-04
88.04	-4.61	-30	3.46E-04
88.05	-4.79	-30	3.32E-04
88.06	-5.01	-30	3.16E-04
88.07	-5.19	-30	3.02E-04
88.08	-5.41	-30	2.87E-04
88.09	-5.63	-30	2.74E-04
88.10	-5.84	-30	2.60E-04
88.11	-6.04	-30	2.49E-04
88.12	-6.26	-30	2.37E-04
88.13	-6.48	-30	2.25E-04
88.14	-6.69	-30	2.15E-04
88.15	-6.92	-30	2.03E-04
88.16	-7.14	-30	1.93E-04
88.17	-7.35	-30	1.84E-04
88.18	-7.6	-30	1.74E-04
88.19	-7.82	-30	1.65E-04
88.20	-8.06	-30	1.56E-04
88.21	-8.28	-30	1.49E-04
88.22	-8.52	-30	1.41E-04
88.23	-8.74	-30	1.34E-04
88.24	-8.98	-30	1.27E-04
88.25	-9.22	-30	1.20E-04
88.26	-9.46	-30	1.13E-04
88.27	-9.68	-30	1.08E-04
88.28	-9.93	-30	1.02E-04
88.29	-10.16	-30	9.65E-05
88.30	-10.38	-30	9.15E-05
88.31	-10.62	-30	8.67E-05
88.32	-10.88	-30	8.16E-05
88.33	-11.1	-30	7.77E-05
88.34	-11.35	-30	7.34E-05
88.35	-11.59	-30	6.93E-05
88.36	-11.81	-30	6.60E-05
88.37	-12.03	-30	6.26E-05
88.38	-12.26	-30	5.94E-05
88.39	-12.51	-30	5.61E-05
88.40	-12.74	-30	5.32E-05
88.41	-12.98	-30	5.04E-05

88.42	-13.21	-30	4.77E-05
88.43	-13.43	-30	4.54E-05
88.44	-13.63	-30	4.33E-05
88.45	-13.88	-30	4.09E-05
88.46	-14.12	-30	3.87E-05
88.47	-14.33	-30	3.69E-05
88.48	-14.56	-30	3.50E-05
88.49	-14.79	-30	3.32E-05
88.50	-15.02	-30	3.15E-05

Total Energy = 7.9E-03

Ratio of In band to lower sideband = $10 \cdot \log(471/8.4E-03) = 47.5$ dB

Ratio of In band to upper sideband = $10 \cdot \log(471/7.9E-03) = 47.7$ dB

The spectrum analyzer IMD numbers are the output power in 100 kHz relative to the in band energy measured in 100 kHz. The FCC limits are referenced to out of band energy in 500 kHz relative to the total channel power. To convert the in band energy measured on the spectrum analyzer in 100 kHz to the total channel power, add $10 \cdot \log(5.4 \text{ MHz}/100\text{kHz}) = 17.3$ dB to the in band power measured. To convert the out of band energy in 100 kHz to out of band energy in 500 kHz, add $10 \cdot \log(500\text{kHz}/100 \text{ kHz}) = 7$ dB to the out of band energy. This gives the following:

Out of band energy before mask filter in 500 kHz relative to total average power = measured IMD + 17.3 dB - 7 dB = measured IMD + 10.3 dB.

Distance from Channel edge	Filter Rejection (dB)	Pre-filter (dB)	Out of band energy in 500 kHz relative to channel power (dB)
-3 from lower	-43	-36.3	-79.3
-2 from lower	-38	-38.3	-76.3
-1 from lower	-20	-41.3	-61.3
+1 from upper	-25	-40.3	-65.3
+2 from upper	-39	-38.3	-76.3
+3 from upper	-40	-44.3	-88.3



Figure 4-8E. Out of Band Emissions Plot (Pre-Filter)

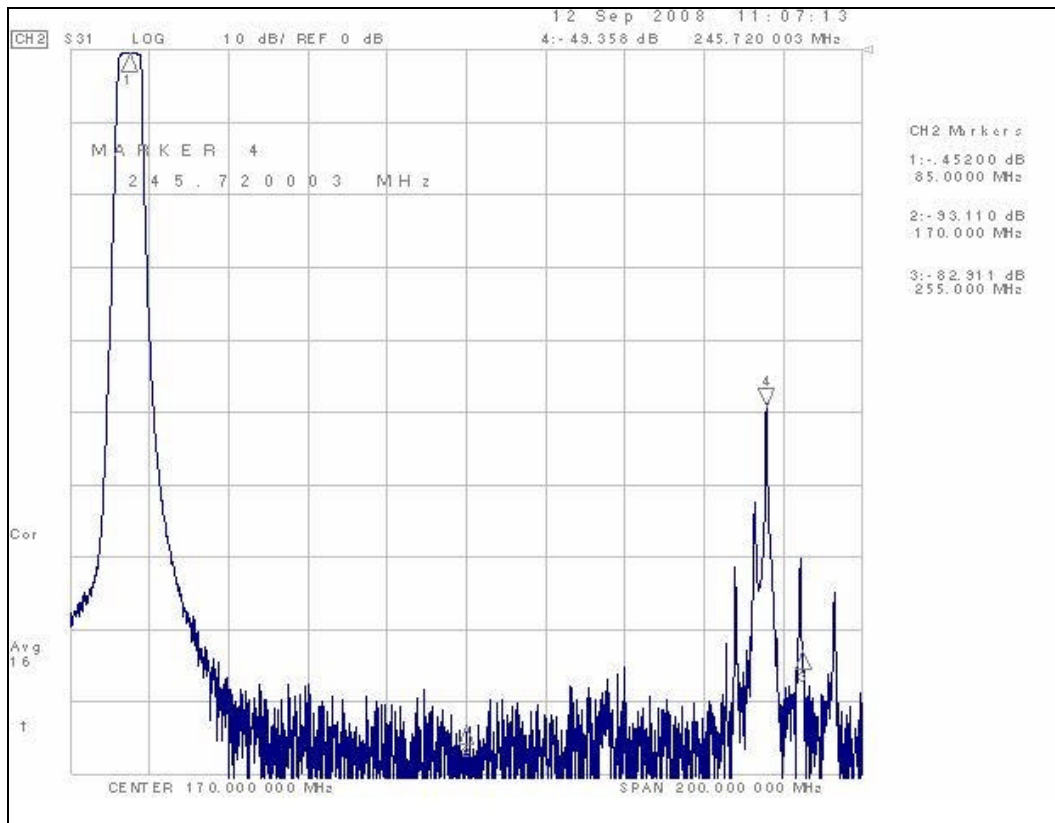


Figure 4-8F. Harmonics Plot (Post Filter)

Level of channel = -25 dBm, measured in 30 kHz. Total Channel power = $-25 + 10 \cdot \log(5.4 \text{ MHz}/30 \text{ kHz}) = -2.5 \text{ dBm}$

Second Harmonic level = -68 dBm, measured in 30 kHz. Out of band energy in 500 kHz = $-68 + 10 \cdot \log(500 \text{ kHz}/30 \text{ kHz}) = -55.8 \text{ dBm}$.

Their Harmonic Level = -37 dBm, measured in 30 kHz RBW. Out of band energy in 500 kHz = $-37 + 10 \cdot \log(500 \text{ kHz}/30 \text{ kHz}) = -24.8 \text{ dBm}$.

Harmonic (MHz)	Pre Filter Level (dBm)	Filter Rejection (dB)	Post Filter Level (dBm)
Second 170.00	-55.8	-90	-145.8
Third 255.00	-24.8	-70	-94.8

Table 4-1. Post Filter Harmonic Levels

4.9 Radiated Emissions

Using the test setup shown in Figure 4-1, with the transmitter operating at full power, the spectrum analyzer was moved 20 meters from the transmitter and connected to a dipole antenna cut to the 85 MHz. This antenna was oriented to maximize the received level and the data was recorded. The antenna was then cut to the local oscillator frequency and the second and third through harmonic frequencies of the transmitter, and all of the signals received, were maximized by antenna orientation and their absolute levels were recorded.

With these various antennas, the only measurable levels observed were at 85, 170 & 255 MHz. The levels are shown below in Table 4-2 and an analysis of the relative field and strength is provided in the following paragraphs.

Table 4-2. Measurable Levels Observed in Frequency Spectrum

FREQUENCY (MHz)	MEASURED LEVEL (INTO 50 W)
85.00	-49 dBm
170.00	-102 dBm
255.00	-71 dBm

The spectrum analyzer had a maximum sensitivity of -110 dBm during these tests.

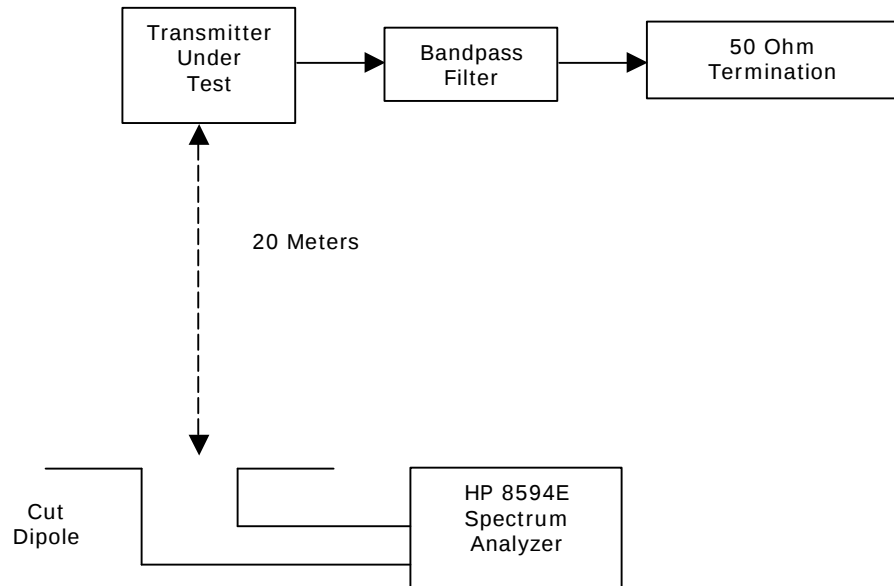


Figure 4-9. Test Setup for Measuring Radiated Emissions

One level was compared to the following reference level.

If all of the power of the transmitter was radiated by an isotropic radiator, the power density at 20 meters would be:

$$P = P_t / 4\pi R^2 = 350 / 4\pi \cdot (20)^2 = .07 \text{ w/m}^2$$

Using a dipole-transmitting antenna increases this by 1.64 to:

$$1.64 \times .07 = .115 \text{ w/m}^2$$

If a dipole-receive antenna of area $1.64 \times \lambda^2 / 4\pi$ is used to receive the signal, the received level would be:

$$20 \text{ mw} = +13 \text{ dBm}$$

The receive level at -49 dBm was therefore at -62 dB relative to this level.

The receive levels were therefore at the relative levels shown in Table 4-9.

Table 4-3. Receive Levels

FREQUENCY	(REF = +13 dBm) RELATIVE MEASURED LEVEL
85.00	-62
170.00	-115
255.00	-84

The cabinet radiation was also checked with the receive dipole antenna cut to 85.00 MHz, within very close proximity to the trays of the transmitters, and the received level that was recorded at no time exceeded a power density in excess of -10 dBm:

$$Pr/A = .1 \text{ mw/cm}^2$$

This level is far less than the current or proposed standard for safe radiation levels.

4.10 Frequency Stability

The DT325B is designed to operate using either an internal or external 10 MHz precise reference oscillator. The frequency stability of this reference determines the frequency stability of the transmitter.

The frequency determining variables of the transmitter may be defined as follows:

F_{LO1} = Desired local oscillator 1 frequency

F_{LO2} = Desired local oscillator 2 frequency

F_{IF} = Desired IF oscillator frequency

F_R = Desired external reference oscillator frequency

F_{RF} = Desired RF output frequency

E_{LO1} = Local oscillator 1 frequency offset error

E_{LO2} = Local oscillator 2 frequency offset error

E_{IF} = IF oscillator frequency offset error

E_R = External reference oscillator frequency offset error

E_{RF} = RF output frequency error

The PLL circuitry maintains a constant ratio between the external reference frequency and the output frequency of the oscillator. This ratio is defined below for both the LO and IF oscillators.

$$G_{LO1} = F_{LO1} / F_R$$

$$G_{LO2} = F_{LO2} / F_R$$

$$G_{IF} = F_{IF} / F_R$$

Any change in the external 10 MHz reference will effect a corresponding change in the output frequency such that the above ratios are maintained.

$$G_{LO1} = (F_{LO1} + E_{LO1}) / (F_R + E_R) = F_{LO1} / F_R$$

$$G_{LO2} = (F_{LO2} + E_{LO2}) / (F_R + E_R) = F_{LO2} / F_R$$

$$G_{IF} = (F_{IF} + E_{IF}) / (F_R + E_R) = F_{IF} / F_R$$

Solving for the change in output frequency yields:

$$E_{LO1} = E_R * (F_{LO1} / F_R) = E_R * G_{LO1}$$

$$E_{LO2} = E_R * (F_{LO2} / F_R) = E_R * G_{LO2}$$

$$E_{IF} = E_R * (F_{IF} / F_R) = E_R * G_{IF}$$

The desired RF carrier frequency is equal to the LO2 frequency minus the LO1 Frequency and the IF frequency:

$$F_{RF} = F_{LO2} - F_{IF} - F_{LO1}$$

The actual RF frequency, including any error introduced by the external reference, may be defined as follows:

$$F_{RF} + E_{RF} = (F_{LO2} + E_{LO2}) - (F_{IF} + E_{IF}) - (F_{LO1} + E_{LO1})$$

$$F_{RF} + E_{RF} = (F_{LO2} - F_{LO1} - F_{IF}) - (E_{LO2} - E_{LO1} - E_{IF})$$

$$F_{RF} + E_{RF} = F_{RF} + (E_{LO2} - E_{LO1} - E_{IF})$$

Calculating for the error of the carrier yields:

$$E_{RF} = (E_{LO2} - E_{LO1} - E_{IF})$$

$$E_{RF} = E_R (G_{LO2} - G_{LO1} - G_{IF})$$

$$E_{RF} = E_R / F_R * (F_{LO2} - F_{LO1} - F_{IF})$$

$$E_{RF} = E_R / F_R * F_{RF}$$

Therefore, the error of the RF carrier is a function of the external 10 MHz reference error.

The maximum RF frequency error for this service is +/- 1.0 KHz. The highest channel frequency for this service (CH. 69 = 801.25 MHz) represents the worst case condition. With these values, the maximum allowable reference error ($E_{R(max)}$) can be calculated.

$$E_{R(max)} = 12.48 \text{ Hz}$$

The required reference oscillator stability may be calculated as follows:

$$\text{Stability} = E_{R(max)} / F_R$$

$$\text{Stability} = 12.48 \text{ Hz} / 10 \times 10^6 \text{ Hz} = 1.248 \times 10^{-6}$$

Therefore, the RF frequency error of the DT325B will not exceed +/- 1.0 KHz when operated with a precise reference oscillator with a stability equal to or better than 1.248×10^{-6} .

The internal 10 MHz reference oscillator used in the DT325B has a stability of 1.000×10^{-6} (See included Crystek Crystals Corporation Datasheet, Part Number CXOH-APY-10.00) which insures a frequency stability within tolerance specified in the Rules and Regulations for this service.

Commercially available GPS precise reference oscillators, such as the TRACK Systems 8821, which has a frequency stability of 1×10^{-9} over a temperature range of 0 to 50 degrees C and a line voltage/frequency range from 85 to 265 VRMS/48 to 440Hz (See included TRACK Systems 8821 Specifications), insures a frequency stability within tolerance specified in the Rules and Regulations for this service.

4.10.1 Pilot Frequency Measurement

The Rohde & Schwartz EFA was used to verify the pilot frequency met the frequency stability of +/- 1000 Hz.

ATSC/VSB MEASURE			
CENTER FREQ 85.00 MHz	CHANNEL 6	ATTEN : 40 dB -1.3 dBm	
SET CENTER FREQ	85.0000000 MHz		CONSTELL DIAGRAM...
SET PILOT FREQ	82.3094406 MHz		
CALC PILOT FREQ	82.3094419 MHz		
PILOT FREQ OFFSET	1.3 Hz		FREQUENCY DOMAIN...
SYMBOL RATE OFFSET	0.0 Hz		
MODULATION	8VSB		TIME DOMAIN...
MER (REAL,RMS)	29.4 dB		
MER (REAL,RMS)	3.38 %		
BER BEFORE RS	0.0E-9 (411/1K00)		VSB PARA- METERS...
BER AFTER RS	0.0E-8 (337/1K00)		
SEG ERR RATIO	0.0E-6 (337/1K00)		
SEG ERR / s	00000		RESET BER
TS BIT RATE 19.393 Mbit/s			ADD. NOISE C/N= 58.0 dB
SAW: 6.0MHz			

Figure 4-12. Pilot Frequency Data

4.11 Test Equipment

The test equipment that was used to analyze the Axcera DT325B system is listed in Table 4-14.

Table 4-4. Test Equipment

MODEL	MANUFACTURER	DESCRIPTION	SERIAL #
435B	Hewlett Packard	Power Meter	2445A10994
8482B	Hewlett Packard	Power Sensor	N/A
8892-300	Bird	50 Ω Termination	2867
8594E	Hewlett-Packard	Spectrum Analyzer	10118
1093-1205	Axcera	Directional Coupler	N/a
EFA	Rohde & Schwartz	Test Measurement Set	2067.3004.53
8714ET	Agilent	Network Analyzer	VS40512357