

Low Level Continuous Wave Lightning Test

6/27/06

Submitted by

Ronald E Center
FCC Licensing Specialist
The Boeing Company
Frequency Management Services
South Park Complex Bldg 15-01.1
Seattle, WA
P.O. Box 3707 MC: 2T-22
Seattle, WA 98124-2207
206-544-6583 Office
206-544-6592 Fax
866-248-1493 Toll Free

This STA is required to conduct testing necessary to validate the lightning protection design on the 747-400LCF and similar type airframes. The test data will be scaled and transformed to obtain estimates of the peak voltage and current transients that can be expected on the aircraft systems as specified by the following:

1. FAA issue paper SE-2, "Lightning Protection Requirements."
2. JAA document JAR25X899, Electrical Grounding and Protection Against Lightning and Static Electricity."
3. FAA issue paper SE-1, Protection from High Intensity Radiated Fields (HIRF)."
4. JAA HIRF Certification Review Item D-5 – Stage 2, Special Condition Protection from External High Intensity Radiated Fields."
5. FAA Special Condition #25-ANM-25, Boeing 747-400 & 747-400F, "Boeing 747-400 Lightning and Radio Frequency Energy Protection."
6. JAA Special Condition AAB7747-400F/02, Boeing 747-400F, "Lightning Protection Indirect Effects."
7. JAA Special Condition AAB7747-400F/01, Boeing 747-400F, "High Intensity Radiated Fields (HIRF)."

The tests to be conducted are low level, swept continuous wave tests on production aircraft components. These tests require the aircraft to be located on a ground plane constructed of chicken wire. A vector network analyzer, an HP 3577B or equivalent, will be used to inject low level swept CW currents, from DC

Low Level Continuous Wave Lightning Test

to 100 MHz into the aircraft at a point that represent a typical lightning attachment location. Another connection from the aircraft will be made to the ground plane, which will represent a typical lightning exit location. The ground plane returns the current back to the network analyzer. It will sometimes be necessary to amplify the injected current using a laboratory grade 25 or 50 Watt linear amplifier. (See Attachment 2 for a typical test setup). These tests are repeated with a variety of injection and exit configurations to represent various lightning attachment configurations. Testing, using widely spaced discrete frequencies would miss critical resonant frequencies.

The desired frequency range for this test is DC to 100 MHz. The sweep time will be approximately 10 seconds with a dwell time at any single frequency that will not exceed 50 mS. A typical data acquisition will require 1 to 8 sweeps. The RF drive current will be turned off between data acquisitions. The down time between data acquisitions can be anywhere from minutes to hours depending on the complexity of the test configuration changes. The 747-400LCF as well as other aircraft types which have similar shapes, sizes, weights and composition may also be tested using this procedure. However the test procedure, RF parameters and test locations will not change.

The tests will be conducted in two separate locations; the 45-04 hangar building, Everett, WA; and the 3-390 hangar building, Seattle, WA. The specific location data is listed in attachment (1). The 45-04 and 3-390 buildings are metal construction aircraft hangars, and all doors will be closed during testing.

As shown in attachment (2), the test set up is a non-intentional radiator. The aircraft and ground plane form a transmission line, however parasitic emissions will occur. The emission type is CW. At best, the test set up is a very inefficient antenna at higher frequencies, and Boeing believes that this test will not cause RF interference. Boeing has been licensed to perform these tests before, all without interference.

The inputs to the HP 3577B Network Analyzer are from a current probe, and through a fiber optic transmitter and optical receiver. A computer is used to read the measurements and plot the test results.

Boeing has conducted prior coordination with both the local FAA and SBE representatives and their concurrence is submitted as separate attachments to the application.

The occupied bandwidth of the emission shall not extend beyond the band limits.

The tests will be conducted periodically from September 15, 2006 through March 15, 2007.

The "Stop Buzzer" is James W Daniels, telephone 206-200-5284.

Low Level Continuous Wave Lightning Test


Attachment 1

Equipment List and Transmitter Locations

RF Equipment Used
RF Sources
Agilent/HP 3577B Vector Network Analyzer or equivalent
RF Amplifiers
RF Power Labs M125L 25 Watt CW Amplifier
Amplifier Research 50WD1000 50 Watt CW Amplifier
Transmitter Information
Location 1
45-04 building, Everett, WA
Lat/Lon: N 47° 55' 11" W 122° 16' 25"
Antenna Height: Highest point on aircraft is approximately 65 feet
Location 2
3-390 building, Seattle, WA
Lat/Lon: N 47° 32' 17" W 122° 18' 52"
Antenna Height: Highest point on aircraft is approximately 65 feet

Low Level Continuous Wave Lightning Test

Attachment 2

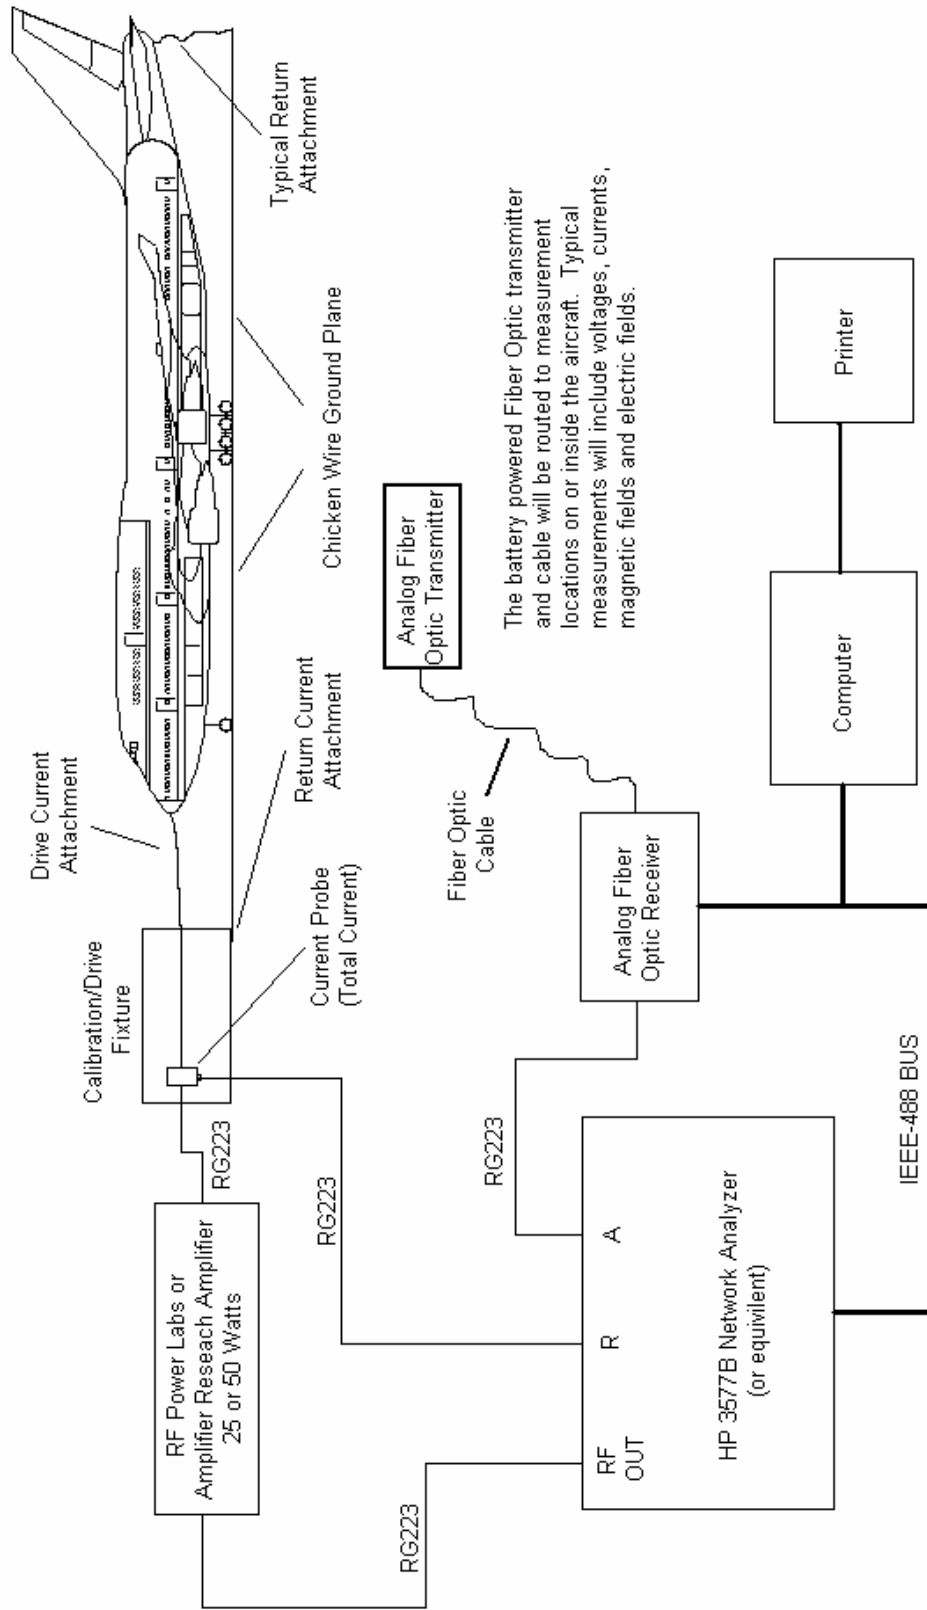

Low Level CW Direct Drive Test Setup for a Typical Full Scale Aircraft Test