

# 3 OUTLET WIRELESS REMOTE WITH TIMER


## INSTALLATION INSTRUCTIONS

### WARNING:

- The device must be mounted in a vertical position with the receptacle facing downward and with the receptacle at least 2 feet above the ground level not for water immersion.
- Cord-connected Operating Control.
- Temperature limits of the SWITCH HEAD: -40-40°C.

### Button Layout

1. Sensor:  
Sensor will turn receiver on at dusk and off at dawn.
2. Operating Mode:  
Timer will turn ON, 2, 4, 6, or 8 hours after dusk.
3. Select button:  
To select the function and repeatedly.  
Power ON → Sensor → 2H → 4H → 6H → 8H → OFF → ON
4. Outlets:  
Plug the lights or devices to be controlled by the timer into one of the outlets.
5. Transmitter

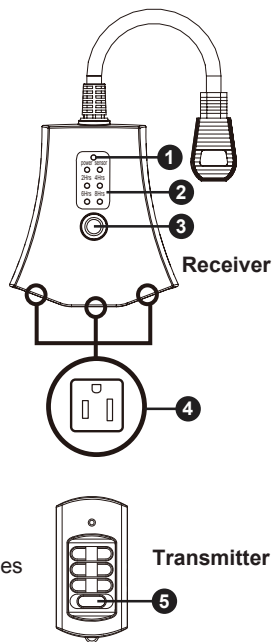

### CAUTION

- Suitable for use with outdoor appliances.
- For use ONLY with a three conductor GFCI protected outlet.
- Raintight when mounted vertically with receptacles facing downward.
- Do not immerse in water.
- DO NOT EXCEED RATED CAPACITY.

### Installation

1. Mount or hang the RECEIVER on the wall near a GFCI protected outlet (125V 60Hz) which the power supply cord of the RECEIVER will plug into.
2. Plug the cord of the device you wish to control remotely at the bottom of the RECEIVER.

### Operating Instructions

#### Receiver & Transmitter operation modes:

- ON: Power is ON to attached devices  
 Sensor(Dusk - Dawn): power will turn on at dusk and remain on until dawn  
 2 Hrs: Power will turn on at dusk and remain on for 2 hours  
 4 Hrs: Power will turn on at dusk and remain on for 4 hours  
 6 Hrs: Power will turn on at dusk and remain on for 6 hours  
 8 Hrs: Power will turn on at dusk and remain on for 8 hours  
 OFF: Power is OFF to attached devices
- \* Note for Transmitter: Control electrical outlet up to a distance of 100 feet.  
 \* Note: In the sensor mode, any external light sources will not interfere with the photocell function, unless the external light source is on for more than 15 minutes. In that case, the timer will shut off until darkness is restored. The improvement avoids the flickering.

### Helpful Tips

- Once programming activates at dusk in the 2hr, 4hr, 6hr, or 8hr mode, the program cycle will complete before the timer resets. Headlights, porch lights, street lamps and other external lighting sources will not interfere with the active timer program.
- The timer has daily repeat after setting, in case of power failure, it will stop operating when the power goes out. Once power is restored, reset the desired operating mode as the operating instructions.
- When set to "ON", the timer will provide continual power to attached devices until the timer is switched to "OFF", or to any of the other operating modes.

### Battery Handling and Usage


**▲ WARNING:** Keep batteries away from children and pets.

- Follow the battery manufacturer's safety and usage instructions.
- Insert the battery observing the proper polarity (+/-) as indicated inside Battery Compartment.

- Remove a spent or discharged battery from the product. Remove the battery when not using the product for an extended period.
- Never throw batteries into a fire. Do not expose batteries to fire or other heat sources.
- Dispose or recycle spent / discharged batteries in compliance with all applicable laws. For detailed information contact your local solid waste authority.
- Battery contains mercury. Do not put in trash. Recycle or manage as hazardous waste.

### Battery Replacement:

- Remove the Battery compartment cover from the back of the remote control.
- Remove the spent battery and place a new Type CR2032 battery into the Battery Compartment correctly observing the polarity indications (+/-) inside the Battery Compartment.
- Replace the Battery Compartment Cover.
- Clear the battery contacts and also those of the device prior to battery installation



### Safety Information

#### Federal Communications Commission Interference Statement

This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### FCC Caution:

The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

#### Industry Canada statement:

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

#### Déclaration d'Industrie Canada:

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

**▲ WARNING:** Cancer and Reproductive Harm -  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

RECEIVER MODEL #RC-021  
 TRANSMITTER MODEL #TR-033-7  
 FCC ID: PAGTR-033-7  
 IC : 4494A-TR0337

**SPECIFICATIONS:** 14/3 AWG SJTW vinyl cord  
**RATINGS:** 125Vac, 60Hz,  
 15 A General Purpose, 15 A Resistive,  
 1,000 W Tungsten,  
 500 VA Electronic Ballast, 1/2 HP,  
 120Vac, 60Hz, 8.3A Ballast.

Unique Identifier :  
 KAB Model No. :  
 RC-021/TR-033-7  
 Responsible Party - U.S.  
 Contact Information  
**Company Name :**  
**Customer Address :**  
**Tel/Internet Contact :**

MADE IN CHINA  
 SAVE THESE INSTRUCTIONS!