



**APPENDIX 5
CALIBRATION DATA
FOR RFI TEST REPORT SERIAL NO:
RFI/SARB3/RP70438JD10A**

Test Of: Intel Corporation.
Pro/Wireless GPRS 3110 PC Card

To: OET Bulletin 65 Supplement C: (2001-01)

RADIO FREQUENCY INVESTIGATION LTD.

Calibration Data

Operations Department

S.No. RFI/SARB2/RP70438JD10A

Issue Date: 22 January 2003

**Test Of: Intel Corporation.
Pro/Wireless GPRS 3110 PC Card**

To: OET Bulletin 65 Supplement C: (2001-01)

Calibration Data

This section contains the calibration data and certificates.

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

*Checked 20-6-2
Andrew (P. Lamm)*

Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1529

Place of Calibration:

Zurich

Date of Calibration:

June 13, 2002

Calibration Interval:

12 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

D. Vetter

Approved by:

Oliver Kätz

Probe ET3DV6

SN:1529

Manufactured:	March 21, 2000
Last calibration:	May 23, 2001
Repaired:	June 6, 2002
Recalibrated:	June 13, 2002

Calibrated for System DASY3

DASY3 - Parameters of Probe: ET3DV6 SN:1529**Sensitivity in Free Space**

NormX	1.66 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.95 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.71 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	96	mV
DCP Y	96	mV
DCP Z	96	mV

Sensitivity in Tissue Simulating Liquid

Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\%$ mho/m
Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\%$ mho/m
ConvF X	6.3 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	6.3 $\pm 9.5\%$ (k=2)	Alpha	0.28
ConvF Z	6.3 $\pm 9.5\%$ (k=2)	Depth	3.32
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
Head	1900 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
ConvF X	5.2 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	5.2 $\pm 9.5\%$ (k=2)	Alpha	0.54
ConvF Z	5.2 $\pm 9.5\%$ (k=2)	Depth	2.34

Boundary Effect


Head	900 MHz	Typical SAR gradient: 5 % per mm	
Probe Tip to Boundary		1 mm	2 mm
SAR _{be} [%] Without Correction Algorithm		10.7	6.6
SAR _{be} [%] With Correction Algorithm		0.6	0.6
Head	1800 MHz	Typical SAR gradient: 10 % per mm	
Probe Tip to Boundary		1 mm	2 mm
SAR _{be} [%] Without Correction Algorithm		12.2	8.0
SAR _{be} [%] With Correction Algorithm		0.2	0.2

Sensor Offset


Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.3 \pm 0.2	mm

Receiving Pattern (ϕ), $\theta = 0^\circ$


f = 30 MHz, TEM cell ifi110

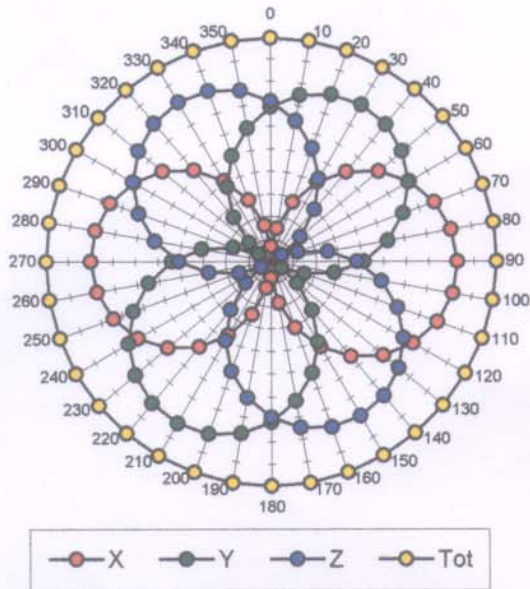


f = 100 MHz, TEM cell ifi110


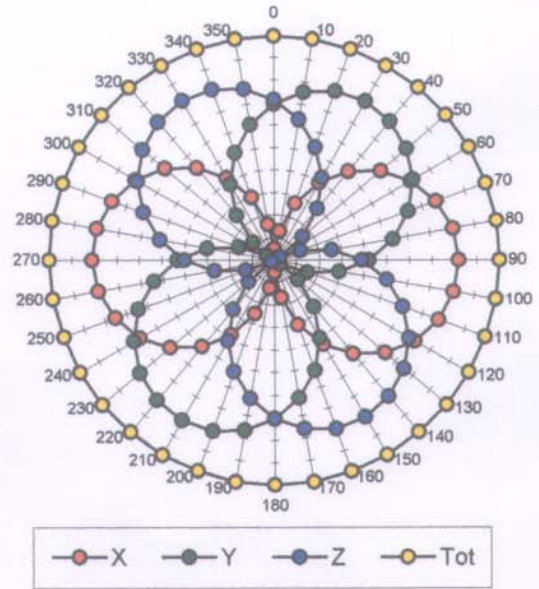


f = 300 MHz, TEM cell ifi110

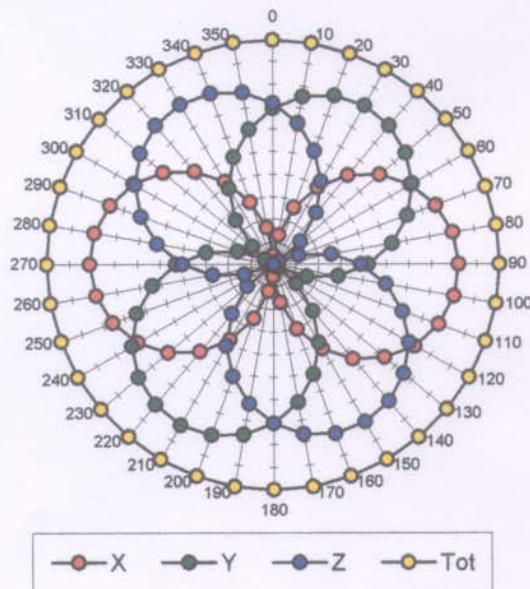


f = 900 MHz, TEM cell ifi110

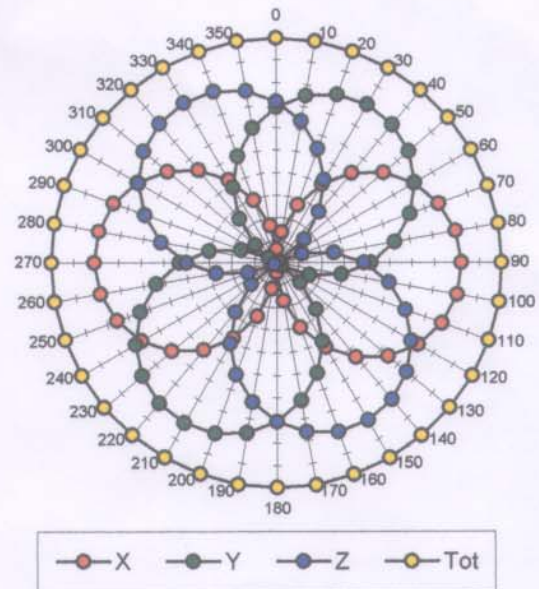

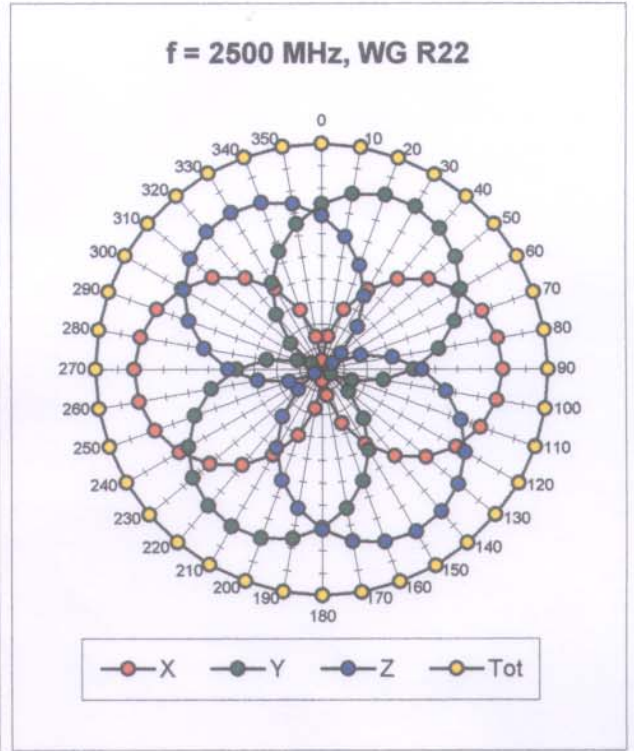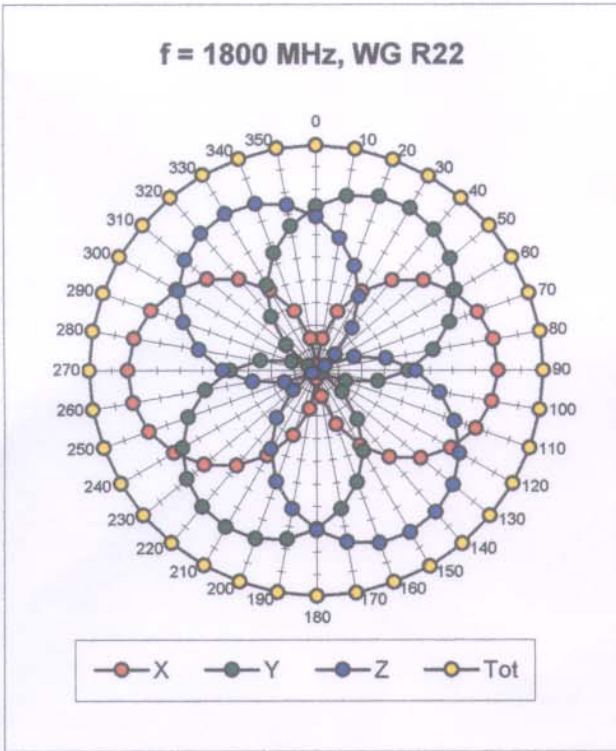


Isotropy Error (ϕ), $\theta = 0^\circ$


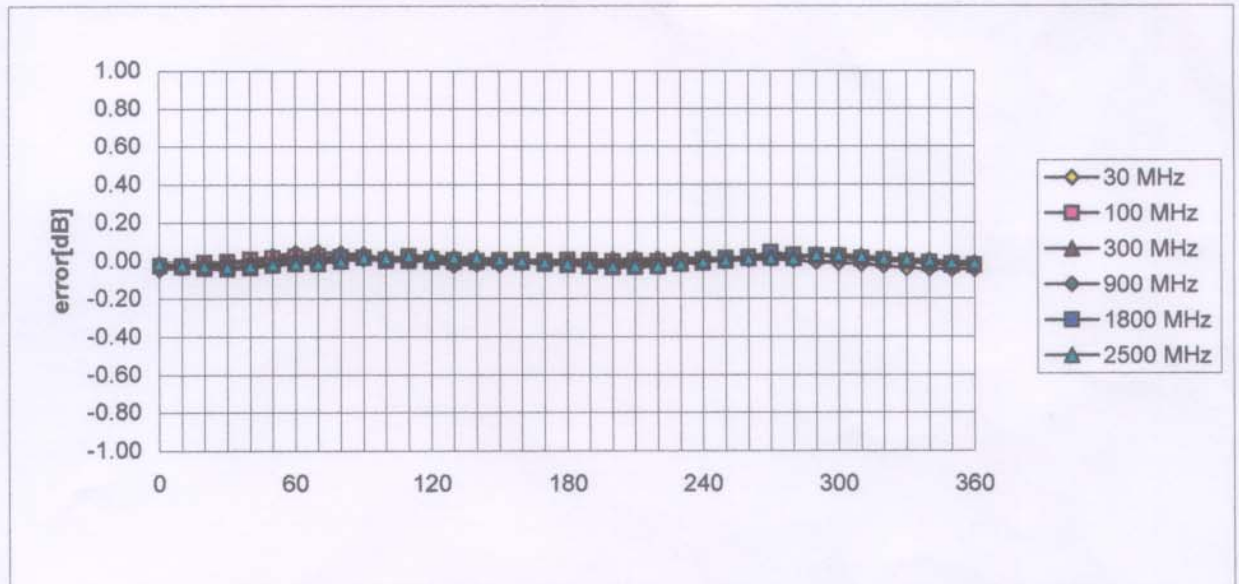


Frequency Response of E-Field


(TEM-Cell:ifi110, Waveguide R22)

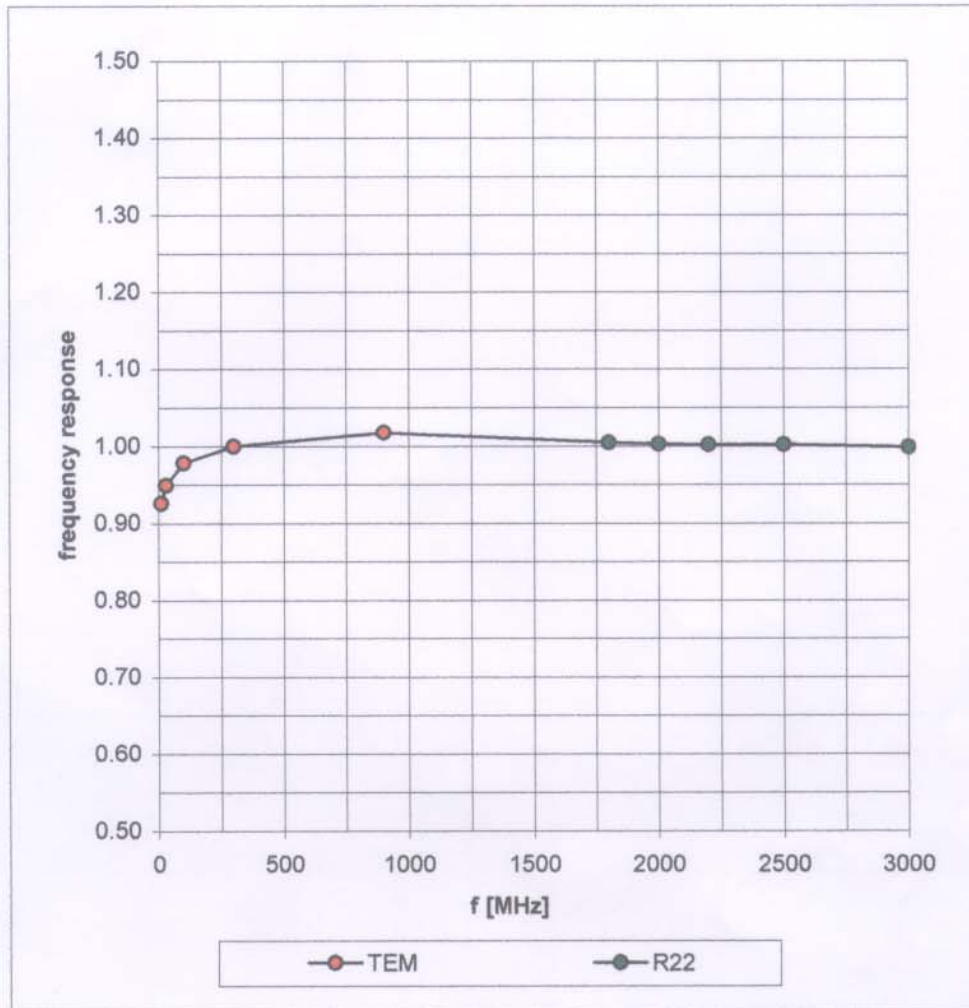

Dynamic Range f(SAR_{brain}) (Waveguide R22)

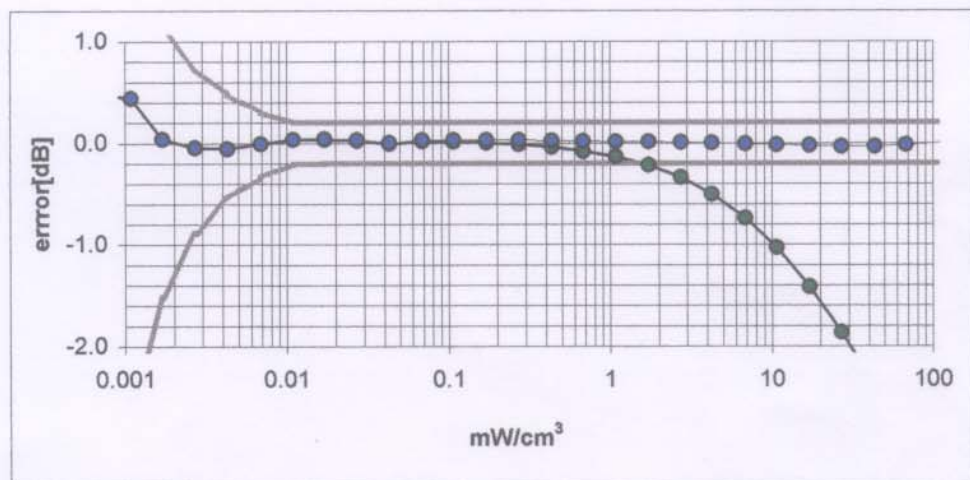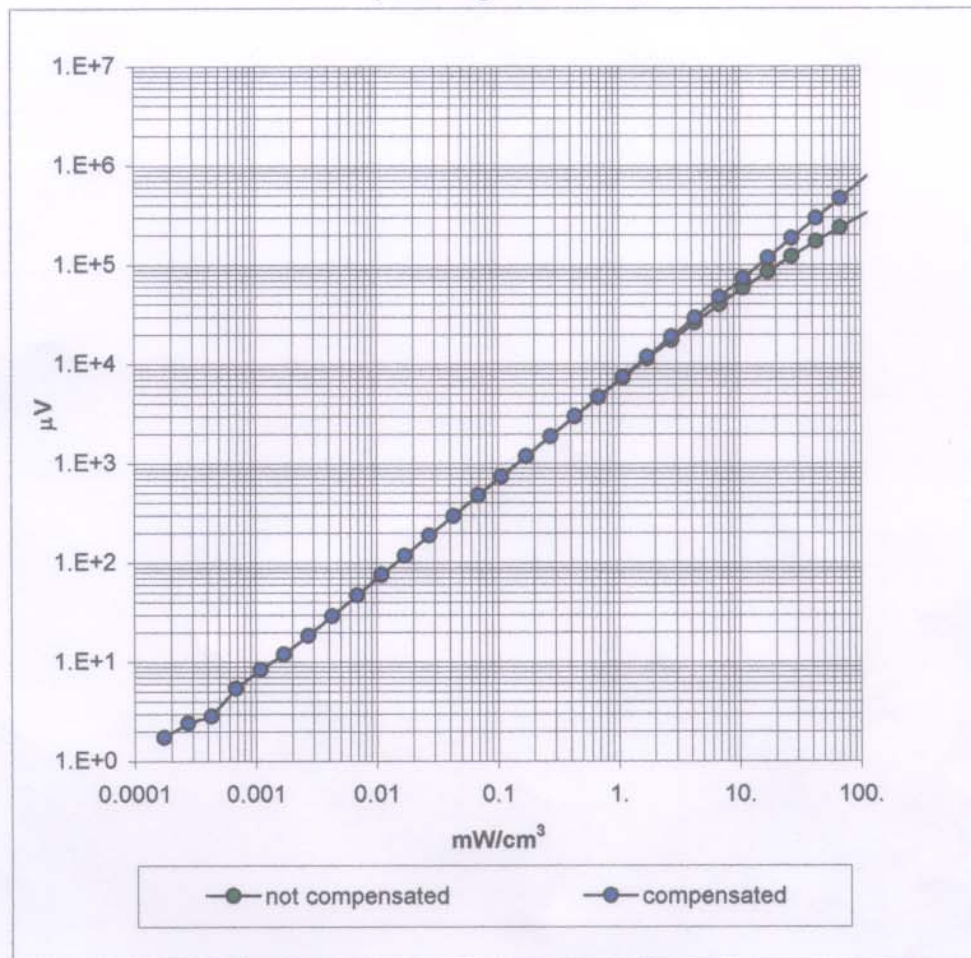


Conversion Factor Assessment

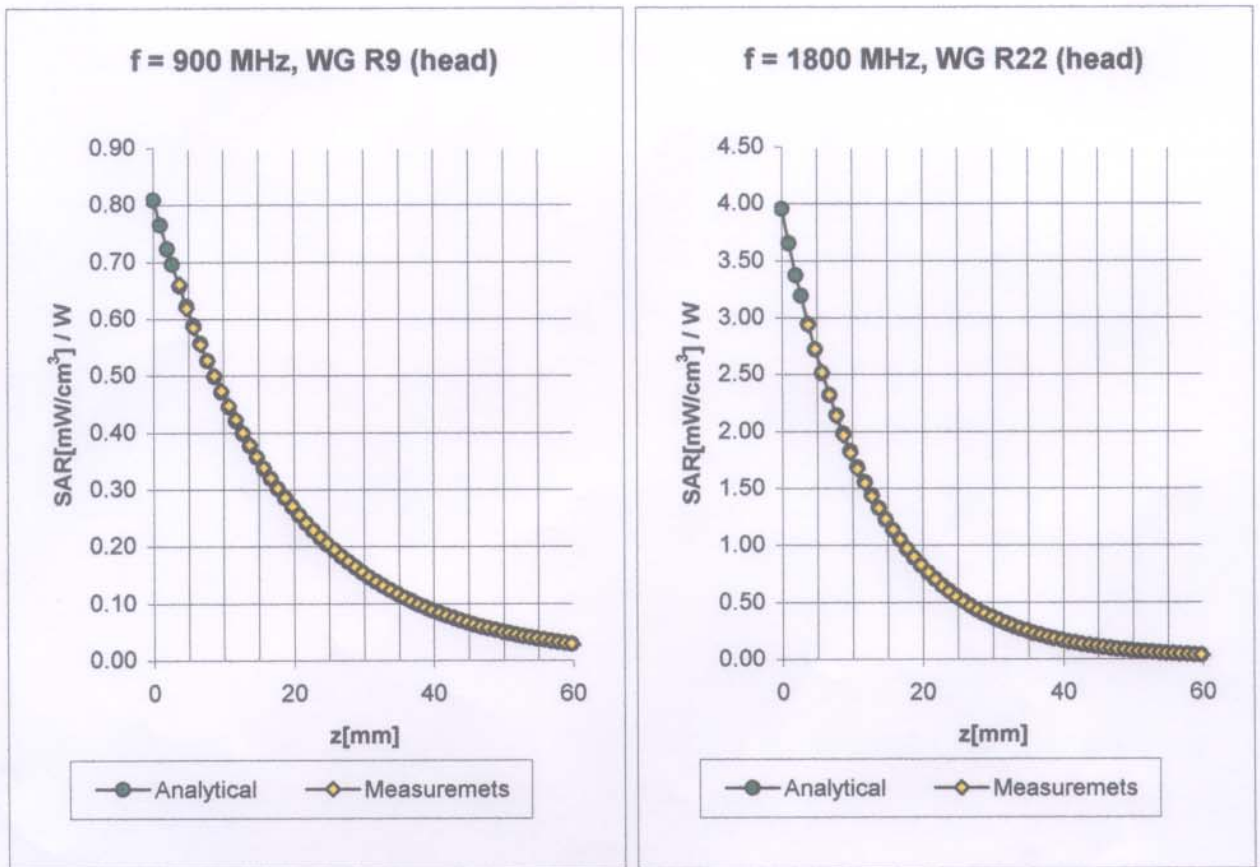



Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\%$ mho/m
Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\%$ mho/m
	ConvF X	6.3 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	6.3 $\pm 9.5\%$ (k=2)	Alpha 0.28
	ConvF Z	6.3 $\pm 9.5\%$ (k=2)	Depth 3.32
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
Head	1900 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
	ConvF X	5.2 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	5.2 $\pm 9.5\%$ (k=2)	Alpha 0.54
	ConvF Z	5.2 $\pm 9.5\%$ (k=2)	Depth 2.34

Conversion Factor Assessment

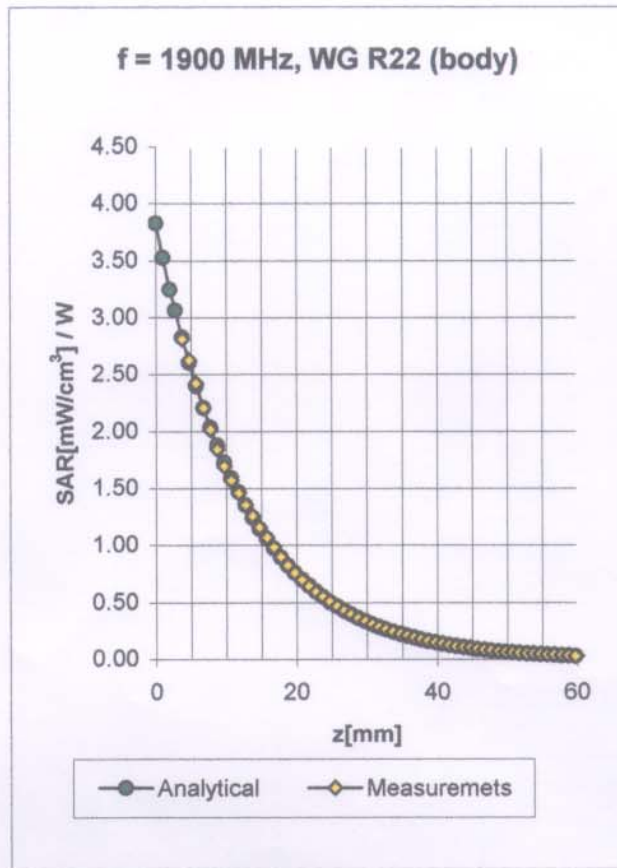

Body	1900 MHz	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\% \text{ mho/m}$
ConvF X	4.7 $\pm 8.9\%$ (k=2)	Boundary effect:	
ConvF Y	4.7 $\pm 8.9\%$ (k=2)	Alpha	0.80
ConvF Z	4.7 $\pm 8.9\%$ (k=2)	Depth	2.04

Conversion Factor Assessment

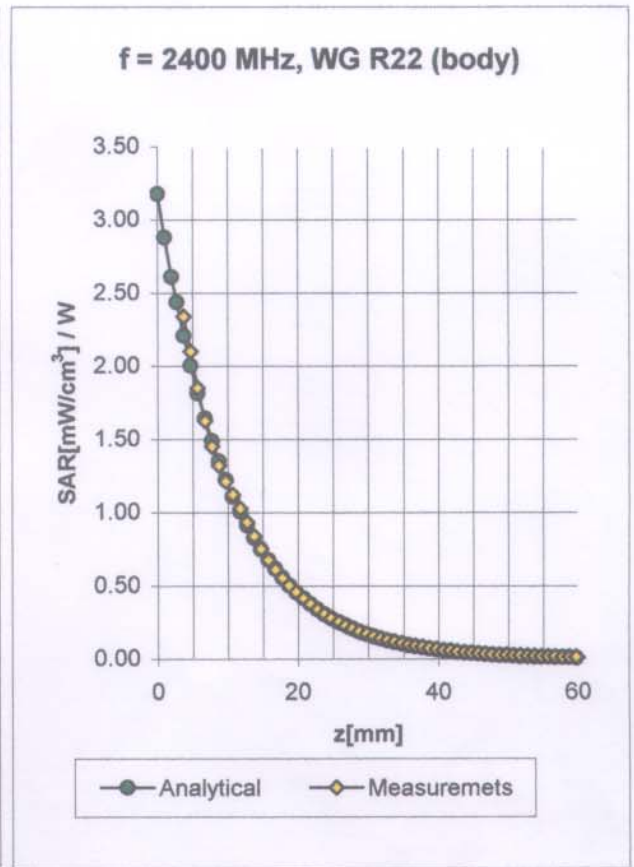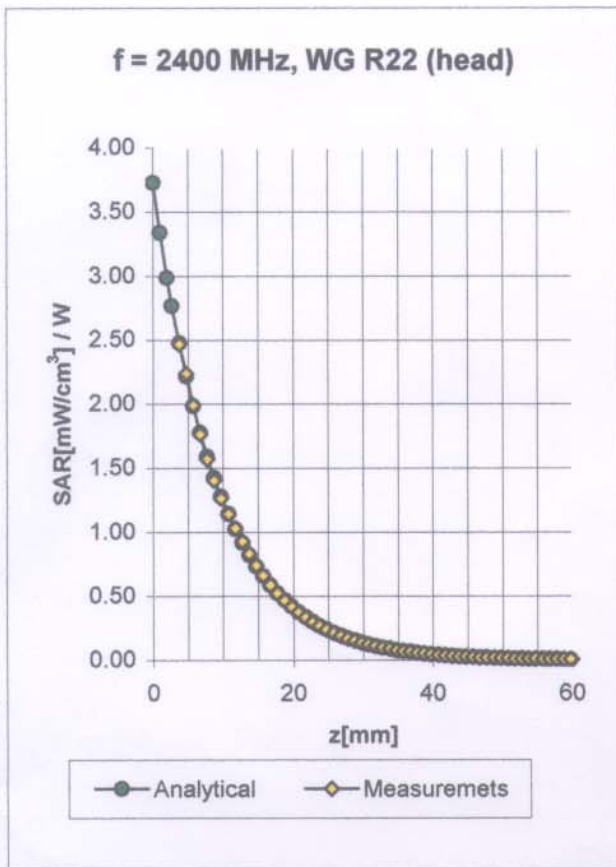


Head	2400 MHz	$\epsilon_r = 39.2 \pm 5\%$	$\sigma = 1.80 \pm 10\% \text{ mho/m}$
	ConvF X	4.9 $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y	4.9 $\pm 8.9\%$ (k=2)	Alpha 0.94
	ConvF Z	4.9 $\pm 8.9\%$ (k=2)	Depth 1.96

Body	2400 MHz	$\epsilon_r = 52.7 \pm 5\%$	$\sigma = 1.95 \pm 10\% \text{ mho/m}$
	ConvF X	4.3 $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y	4.3 $\pm 8.9\%$ (k=2)	Alpha 1.00
	ConvF Z	4.3 $\pm 8.9\%$ (k=2)	Depth 1.57

Deviation from Isotropy in HSL

Error (θ, ϕ), $f = 900$ MHz

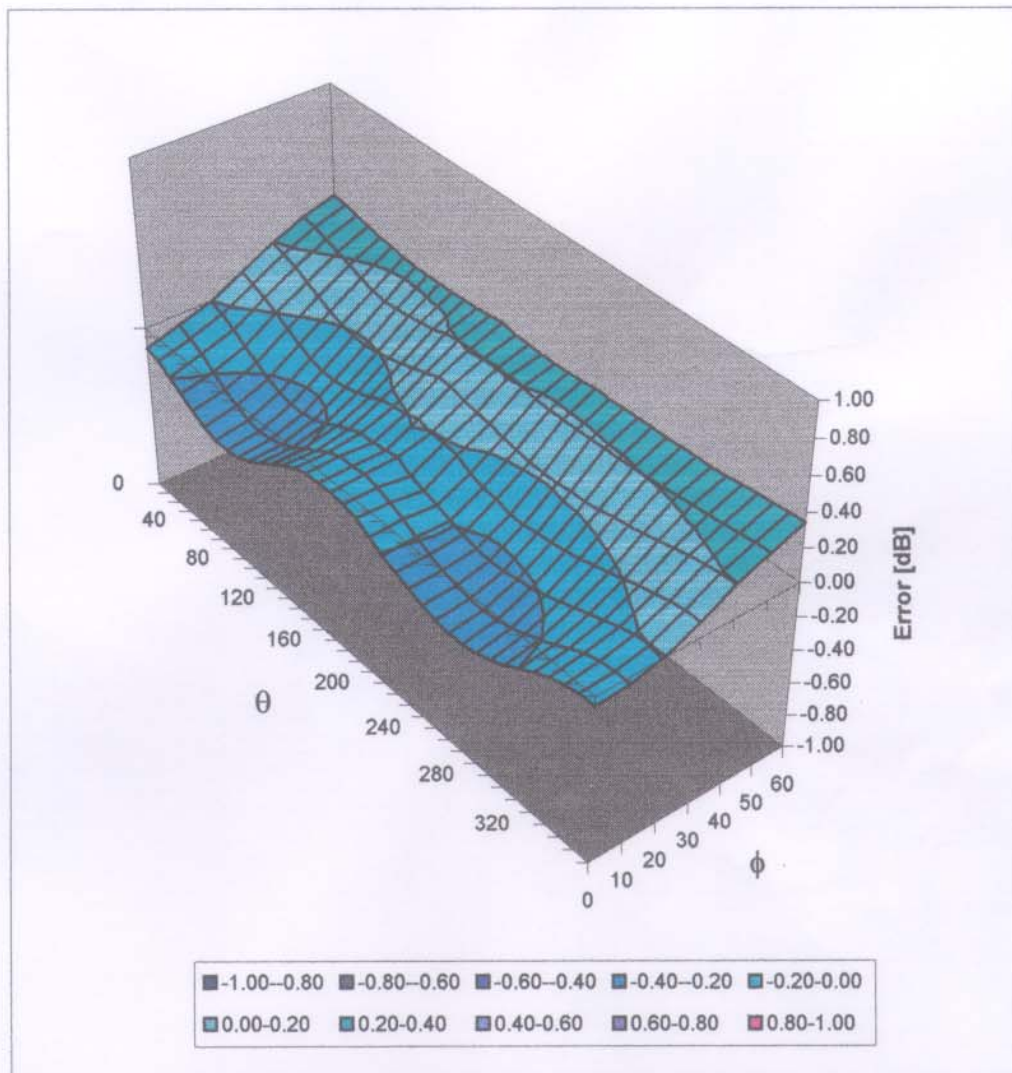

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79


Calibration Certificate


1900 MHz System Validation Dipole

Type:	D1900V2
Serial Number:	540
Place of Calibration:	Zurich
Date of Calibration:	August 6, 2001
Calibration Interval:	24 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by: 

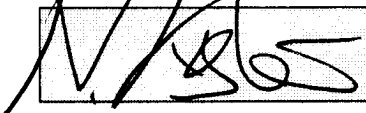Approved by: 

DASY3

Dipole Validation Kit

Type: D1900V2

Serial: 540

Manufactured: July 26, 2001

Calibrated: August 6, 2001

1. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with brain simulating sugar solution of the following electrical parameters at 1900 MHz:

Relative permittivity	39.5	$\pm 5\%$
Conductivity	1.47 mho/m	$\pm 10\%$

The DASY3 System (Software version 3.1c) with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 5.57 at 1800 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW $\pm 3\%$. The results are normalized to 1W input power.

2. SAR Measurement



Standard SAR-measurements were performed with the head phantom according to the measurement conditions described in section 1. The results (see figure) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values are:

averaged over 1 cm ³ (1 g) of tissue:	42.4 mW/g
averaged over 10 cm ³ (10 g) of tissue:	21.5 mW/g

Note: If the liquid parameters for validation are slightly different from the ones used for initial calibration, the SAR-values will be different as well. The estimated sensitivities of SAR-values and penetration depths to the liquid parameters are listed in the DASY Application Note 4: 'SAR Sensitivities'.


Validation Dipole D1900V2 SN:540, d = 10 mm

Frequency: 1900 MHz; Antenna Input Power: 250 [mW]
 SAM Phantom; Flat - SAM Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
 Probe: ET3DV6 - SN1507; ConvF(5.57,5.57,5.57) at 1800 MHz; IEEE1528 1900 MHz; $\sigma = 1.47$ mho/m $\epsilon_r = 39.5$ $\rho = 1.00$ g/cm³
 Cubes (2): Peak: 20.4 mW/g ± 0.01 dB, SAR (1g): 10.6 mW/g ± 0.02 dB, SAR (10g): 5.38 mW/g ± 0.04 dB, (Worst-case extrapolation)
 Penetration depth: 7.9 (7.4, 8.9) [mm]
 Powerdrift: -0.06 dB

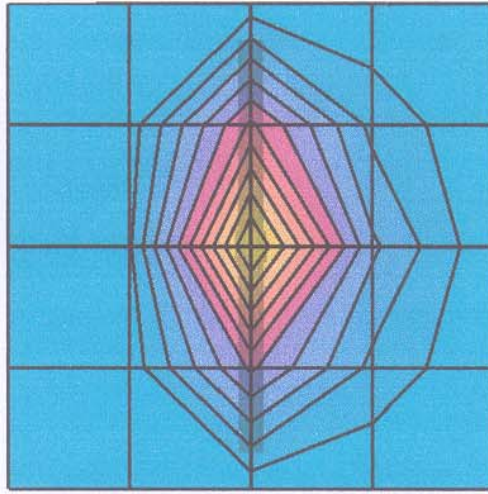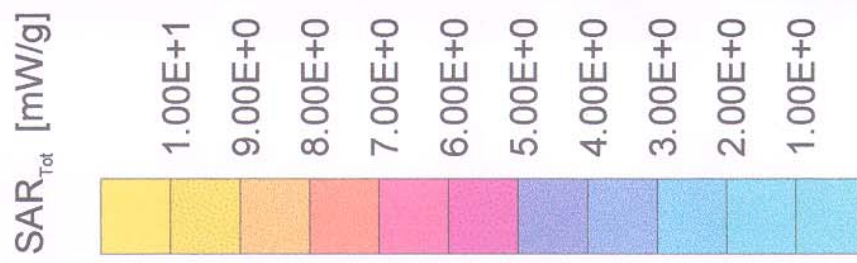


CH1 S11 1 U FS 1: 45.068 \angle -9.5801 \angle 8.7437 pF 1 900.000 000 MHz

↑
De i
PRm
Cor
Avg
15
↑

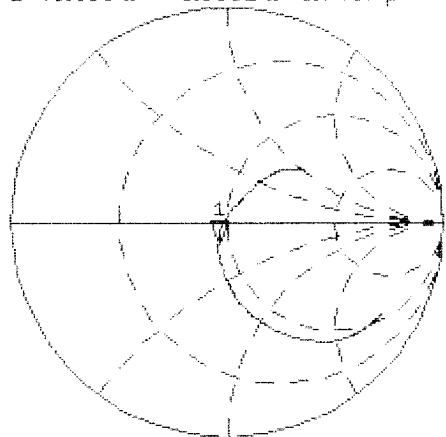

CH2 S11 LOG 5 dB/REF 0 dB 1:-19.023 dB 1 900.000 000 MHz

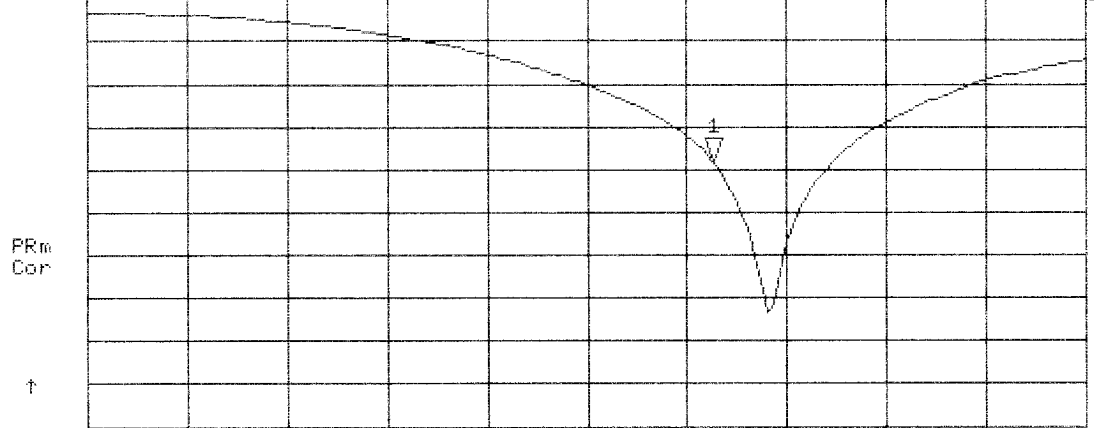

PRm
Cor
↑

START 1 400.000 000 MHz STOP 2 2 200.000 000 MHz