

. .

...



TEST REPORT

APPLICANT	Savant Technologies Llc, dba Ge ighting, a Savant Company	;
PRODUCT NAME	: LED LAMP	
MODEL NAME	CLEDBM6CDMS, CLEDBC6CDMS	
BRAND NAME	: GE	
FCC ID	: PUU-B11-DMFC	
STANDARD(S)	: 47 CFR Part 15 Subpart C	
RECEIPT DATE	: 2024-05-27	
TEST DATE	: 2024-05-31 to 2024-06-13	
ISSUE DATE	: 2024-07-02	



Edited by:

Yong Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn





DIRECTORY

1. S	Summary of Test Result ······· 4
1.1.	Testing Applied Standards 5
1.2.	Test Equipment List ······ 6
1.3.	Measurement Uncertainty ······ 8
1.4.	Testing Laboratory
2. 0	Seneral Description ·······9
2.1.	Information of Applicant and Manufacturer9
2.2.	Information of EUT······9
2.3.	Channel List of EUT ······10
2.4.	Test Configuration of EUT ······11
2.5.	Test Conditions11
2.6.	Test Setup Layout Diagram ······11
3. T	est Results ······14
3.1.	Antenna Requirement ······14
3.2.	Duty Cycle of Test Signal15
3.3.	Maximum Peak Conducted Output Power ······16
3.4.	Maximum Average Conducted Output Power ······17
3.5.	6 dB Bandwidth ······18
3.6.	Conducted Spurious Emissions and Band Edge19
3.7.	Power Spectral Density20
3.8.	Conducted Emission ······21
3.9.	Restricted Frequency Bands22
3.10	Radiated Emission ······23
Ann	ex A Test Data and Result ······25





Change History			
Version	Date	Reason for change	
1.0	2024-07-02	First edition	



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	May 31, 2024	Lin Haoyang	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	May 31, 2024	Lin Haoyang	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	May 31, 2024	Lin Haoyang	PASS	No deviation
5	15.247(a)	Bandwidth	May 31, 2024	Lin Haoyang	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	May 31, 2024	Lin Haoyang	PASS	No deviation
7	15.247(e)	Power Spectral Density	May 31, 2024	Lin Haoyang	PASS	No deviation
8	15.207	Conducted Emission	May 31, 2024	Wang Deyong	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Jun. 07 to 12, 2024	Lin Hanbin	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Jun. 09 to 12, 2024	Lin Hanbin	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.





1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• 47 CFR Part 15 Subpart C Radio Frequency Devices



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2024.02.19	2025.02.18
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Name	Manufacturer	Software Version
MTS 8310	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0






1.2.4 Radiated Test Equipment

Equipment	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Name		Type	Manalacturer	Oul. Dute	Bue Bute
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2023.06.26	2024.06.25
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2023.07.01	2024.06.30
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525





1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.	
	FL.3, Building A, FeiYang Science Park, No.8 LongChang	
Laboratory Address	Road, Block 67, BaoAn District, ShenZhen, GuangDong	
	Province, P. R. China	
Telephone	+86 755 36698555	
Facsimile	+86 755 36698525	
FCC Designation Number	CN1192	
FCC Test Firm	226174	
Registration Number	226174	





2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Savant Technologies Llc, dba Ge lighting, a Savant Company	
Applicant Address	icant Address 1975 Noble Road Cleveland Ohio United States 44112	
Manufacturer	Xiamen Topstar lighting Co.,Ltd.	
Manufacturer Address	676 Meixi Avenue, Tong'an District, Xiamen, China	

2.2. Information of EUT

Product Name:	LED LAMP
Sample No.:	3#
Hardware Version:	1
Software Version:	V11040
Equipment Type:	Bluetooth LE
Bluetooth Version:	5.0
Modulation Type:	GFSK
Data Rate:	1Mbps, 2Mbps,512kbps
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	Wire Antenna
Antenna Gain:	-0.98dBi

Note 1: According to the certificate holder, they declared that the models CLEDBM6CDMS and CLEDBC6CDMS only the model numbers are different, everything else is the same. The main measuring model is CLEDBM6CDMS, only the results for CLEDBM6CDMS were recorded in this report.

Note 2: We use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-7 Http://www.morlab.cn E-mail: sv

Fax: 86-755-36698525



2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1.Conducted Measurement



2.6.2.Conducted Emission Measurement

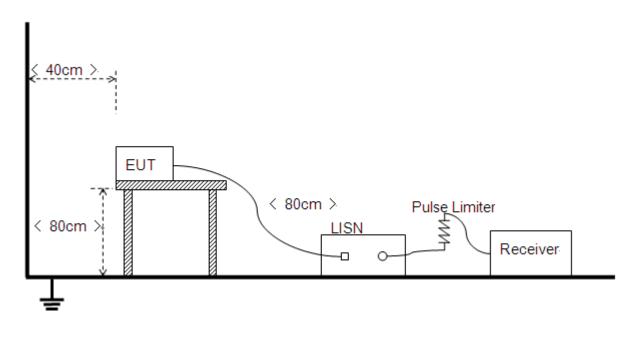



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn




2.6.3.Radiation Measurement

1) For radiated emissions from 9kHz to 30MHz

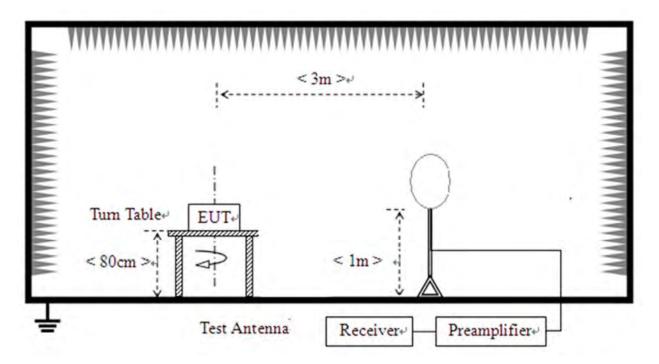

2) For radiated emissions from 30MHz to1GHz

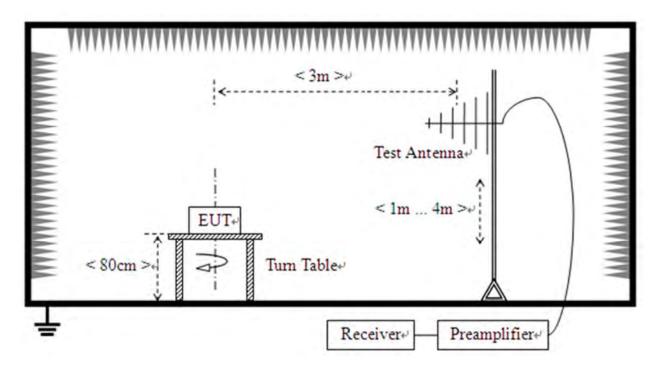




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



3) For radiated emissions above 1GHz

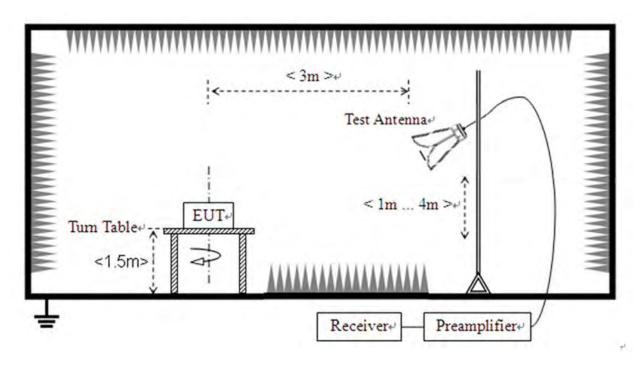



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



3.1. Antenna Requirement

3.1.1.Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2.Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.





3.2. Duty Cycle of Test Signal

3.2.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e.,no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2.Test Result

Refer to Annex A.1 in this report.





3.3. Maximum Peak Conducted Output Power

3.3.1.Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2.Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4.Test Result

Refer to Annex A.2 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 E-mail: service@morlab.cn

Fax: 86-755-36698525

Http://www.morlab.cn



3.4. Maximum Average Conducted Output Power

3.4.1.Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2.Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4.Test Result

Refer to Annex A.3 in this report.







3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize

h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \geq 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result


Refer to Annex A.4 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn





3.6. Conducted Spurious Emissions and Band Edge

3.6.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2.Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4.Test Result

Refer to Annex A.5 and A.6 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



3.7. Power Spectral Density

3.7.1.Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2.Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize

i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4.Test Result

Refer to Annex A.7 in this report.





3.8. Conducted Emission

3.8.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/50 Ω line impedance stabilization network (LISN).

Frequency Penge (MHz)	Conducted Limit (dBµV)				
Frequency Range (MHz)	Quai-peak	Average			
0.15 - 0.50	66 to 56	56 to 46			
0.50 - 5	56	46			
5 - 30	60	50			

Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.8.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4.Test Result

Refer to Annex A.8 in this report.





3.9. Restricted Frequency Bands

3.9.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1GHz

VBW = 3 MHz Sweep = auto Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.9 in this report.





3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).





3.10.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4.Test Result

Refer to Annex A.10 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



Annex A Test Data and Result

A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency	Antenna	Duty Cycle	Correction Factor	1/T
Condition	wode	(MHz)	Antenna	(%)	(dB)	(kHz)
NVNT	BLE 1M	2402	Ant1	63.49	1.97	2.5
NVNT	BLE 1M	2440	Ant1	62.9	2.01	2.56
NVNT	BLE 1M	2480	Ant1	63.49	1.97	2.5
NVNT	BLE 2M	2402	Ant1	33.33	4.77	4.76
NVNT	BLE 2M	2440	Ant1	33.87	4.7	4.76
NVNT	BLE 2M	2480	Ant1	33.33	4.77	4.76
NVNT	BLE_512K	2402	Ant1	57.22	2.42	0.93
NVNT	BLE_512K	2440	Ant1	57.22	2.42	0.93
NVNT	BLE_512K	2480	Ant1	57.22	2.42	0.93




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



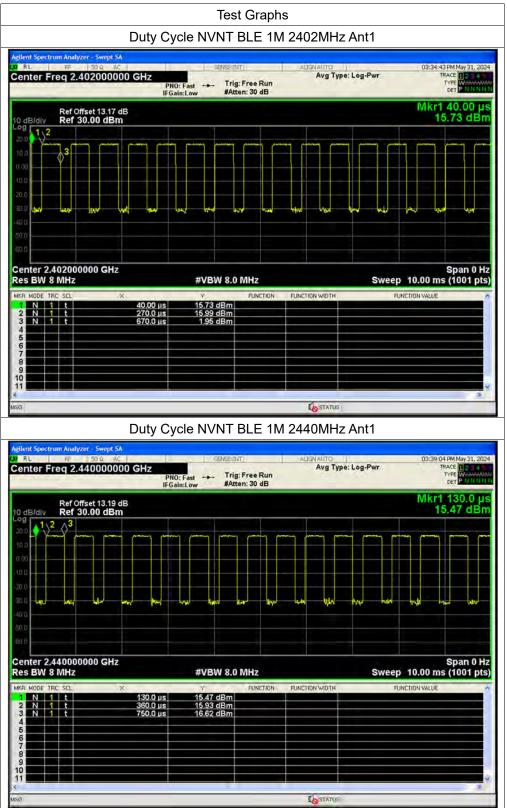




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn




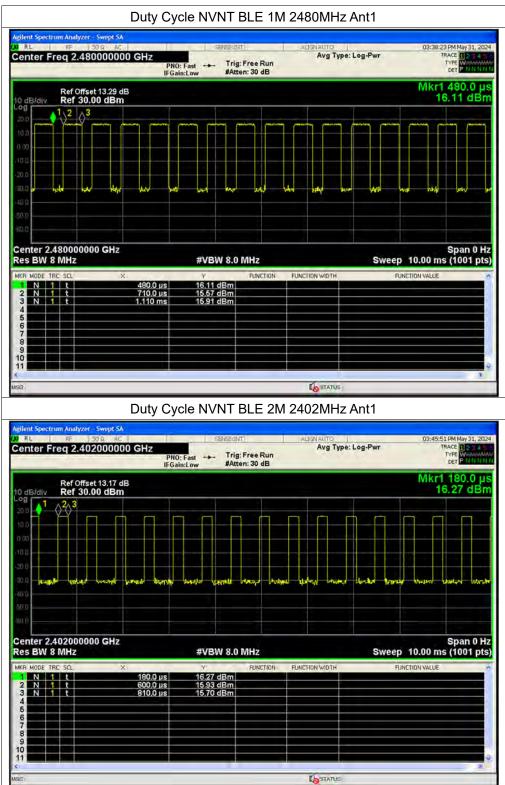

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



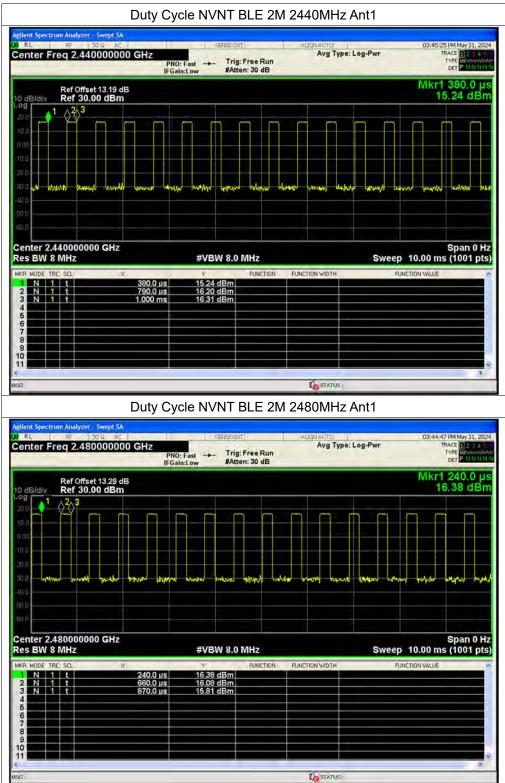

Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

MORLAB


Shenzhen Morlab Communications Technology Co., Ltd.

FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Page 28 of 93




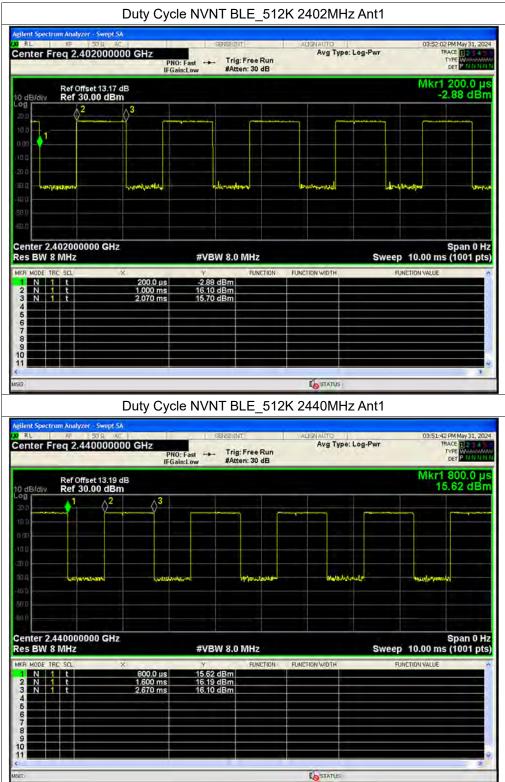



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



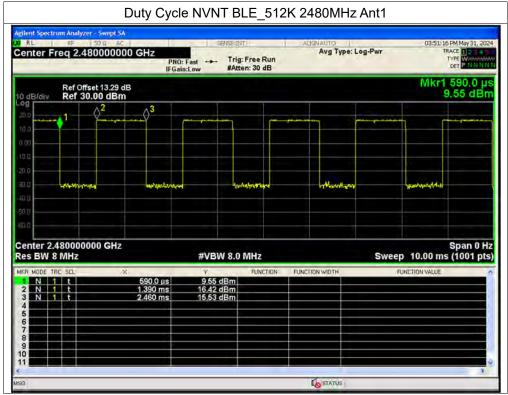



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.2. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	16.68	0	16.68	0.04656	30	Pass
NVNT	BLE 1M	2440	Ant1	16.75	0	16.75	0.04732	30	Pass
NVNT	BLE 1M	2480	Ant1	16.46	0	16.46	0.04426	30	Pass
NVNT	BLE 2M	2402	Ant1	16.06	0	16.06	0.04036	30	Pass
NVNT	BLE 2M	2440	Ant1	16.47	0	16.47	0.04436	30	Pass
NVNT	BLE 2M	2480	Ant1	18.34	0	18.34	0.06823	30	Pass
NVNT	BLE_512K	2402	Ant1	13.34	0	13.34	0.02158	30	Pass
NVNT	BLE_512K	2440	Ant1	13.34	0	13.34	0.02158	30	Pass
NVNT	BLE_512K	2480	Ant1	13.39	0	13.39	0.02183	30	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



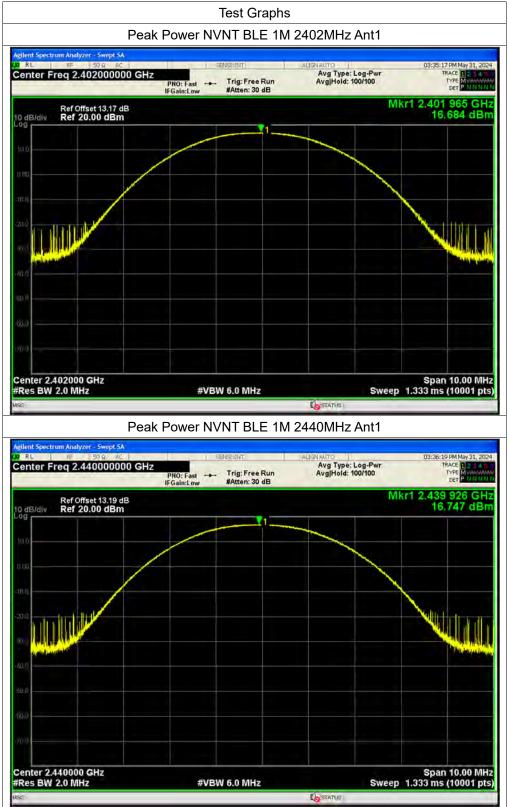




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn




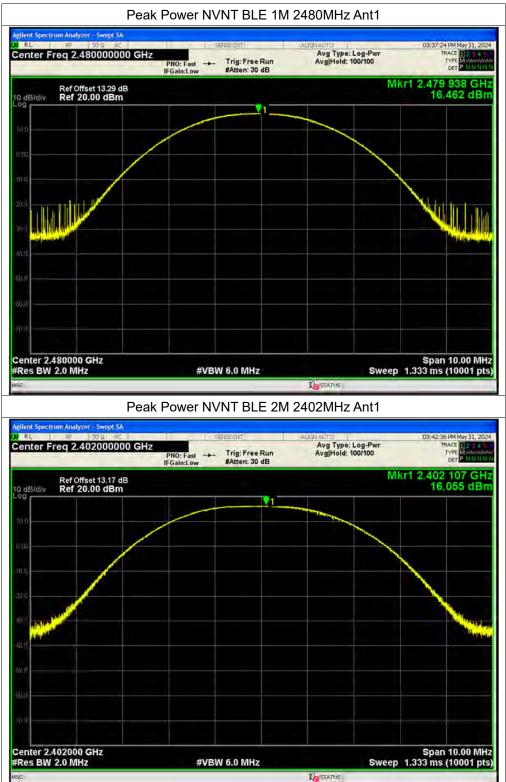

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




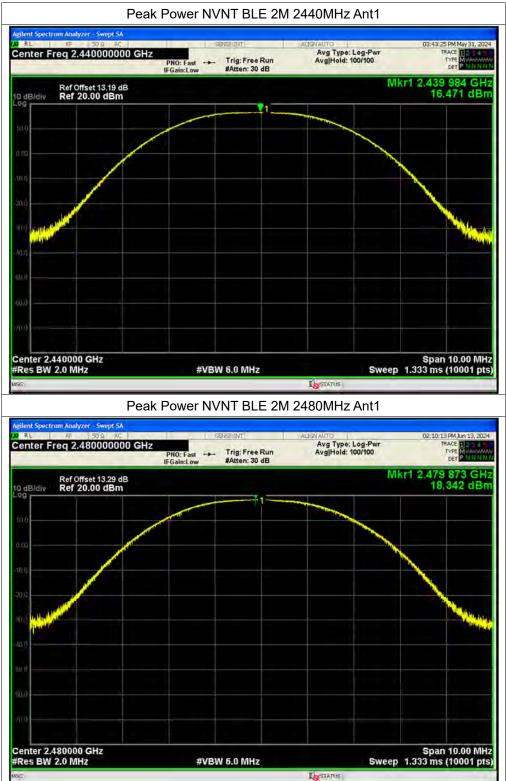

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



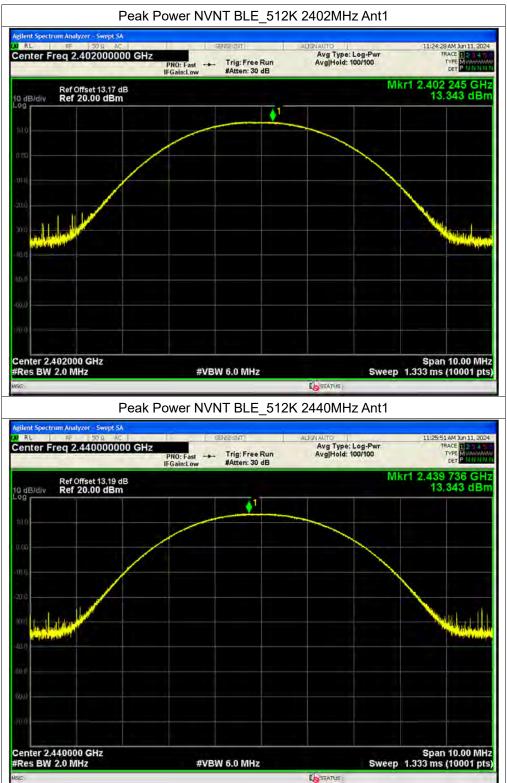

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China








Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





A.3. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	13.05	1.97	15.02	0.03177	30	Pass
NVNT	BLE 1M	2440	Ant1	13.31	1.97	15.28	0.03373	30	Pass
NVNT	BLE 1M	2480	Ant1	12.96	1.97	14.93	0.03112	30	Pass
NVNT	BLE 2M	2402	Ant1	10.49	4.7	15.19	0.03304	30	Pass
NVNT	BLE 2M	2440	Ant1	10.87	4.7	15.57	0.03606	30	Pass
NVNT	BLE 2M	2480	Ant1	12.37	4.77	17.14	0.05176	30	Pass
NVNT	BLE_512K	2402	Ant1	9.53	2.42	11.95	0.01567	30	Pass
NVNT	BLE_512K	2440	Ant1	9.49	2.42	11.91	0.01552	30	Pass
NVNT	BLE_512K	2480	Ant1	9.35	2.42	11.77	0.01503	30	Pass



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn








Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



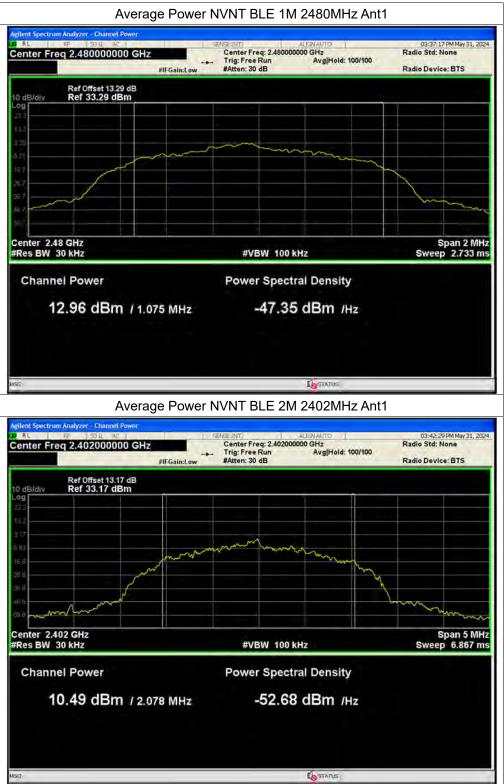




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



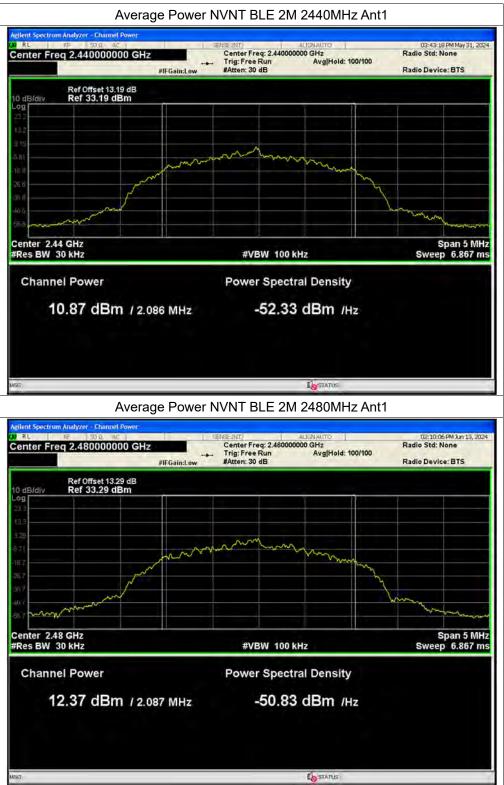



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn





MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.4. 6 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.623	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.62	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.621	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.049	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.071	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1	0.5	Pass
NVNT	BLE_512K	2402	Ant1	0.64	0.5	Pass
NVNT	BLE_512K	2440	Ant1	0.618	0.5	Pass
NVNT	BLE_512K	2480	Ant1	0.593	0.5	Pass



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn








Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



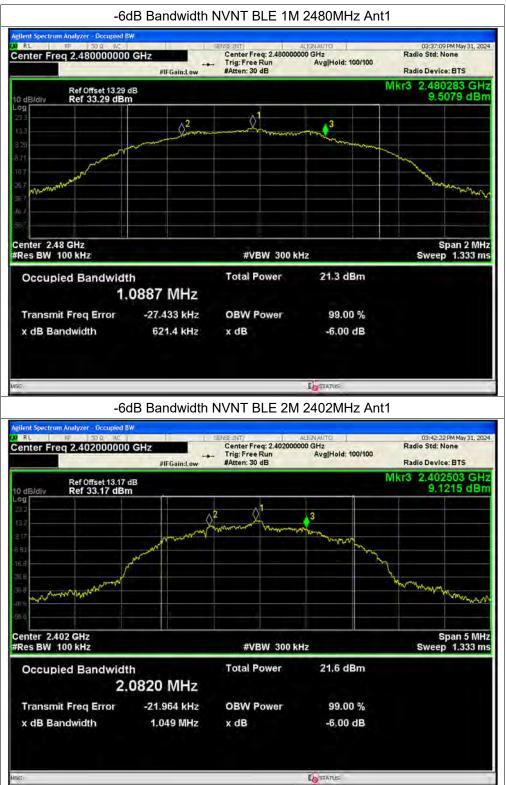




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



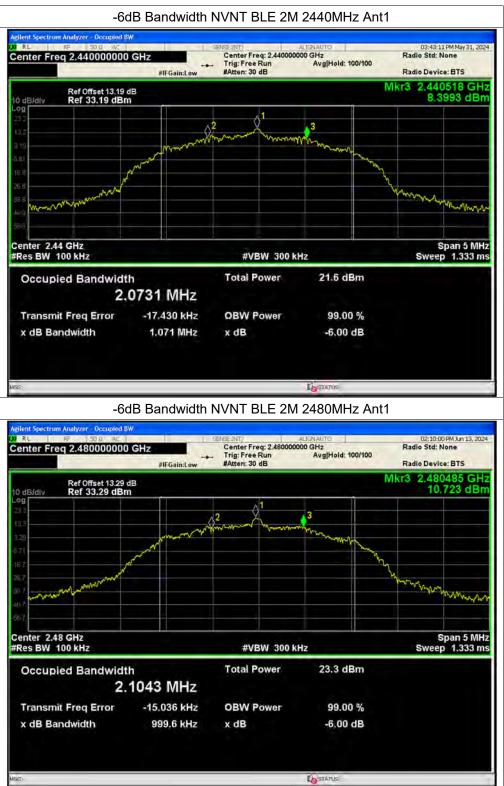

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.5. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-44.79	-20	Pass
NVNT	BLE 1M	2440	Ant1	-44.99	-20	Pass
NVNT	BLE 1M	2480	Ant1	-44.71	-20	Pass
NVNT	BLE 2M	2402	Ant1	-44.8	-20	Pass
NVNT	BLE 2M	2440	Ant1	-44.41	-20	Pass
NVNT	BLE 2M	2480	Ant1	-44.42	-20	Pass
NVNT	BLE_512K	2402	Ant1	-40.53	-20	Pass
NVNT	BLE_512K	2440	Ant1	-42.2	-20	Pass
NVNT	BLE_512K	2480	Ant1	-41.36	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



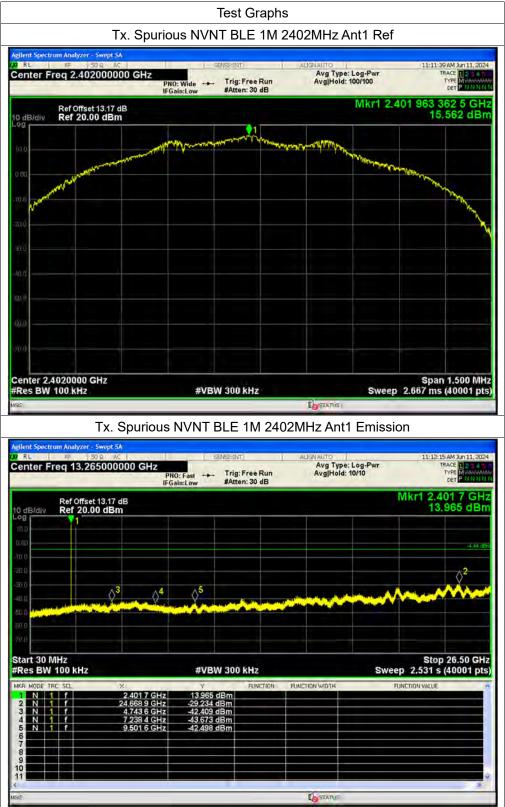


MORLAB



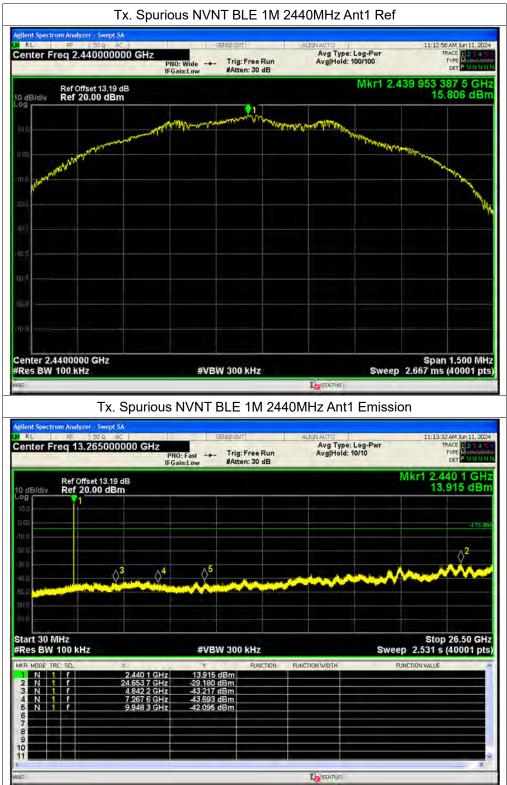


MORLAB



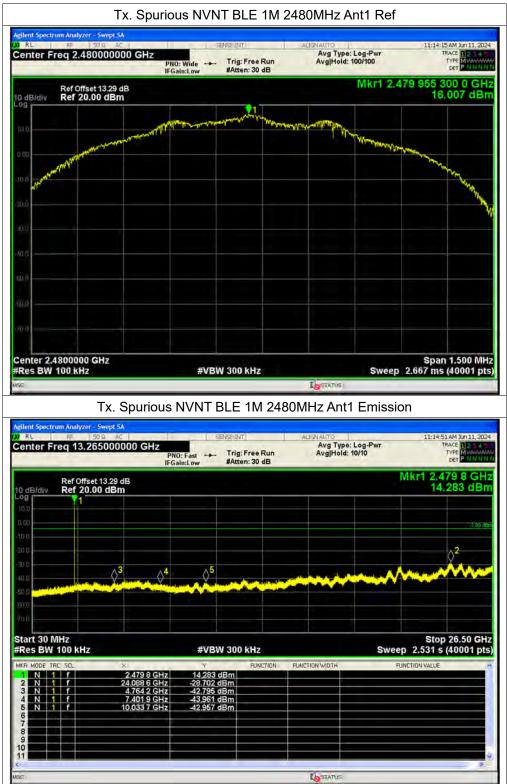


MORLAB



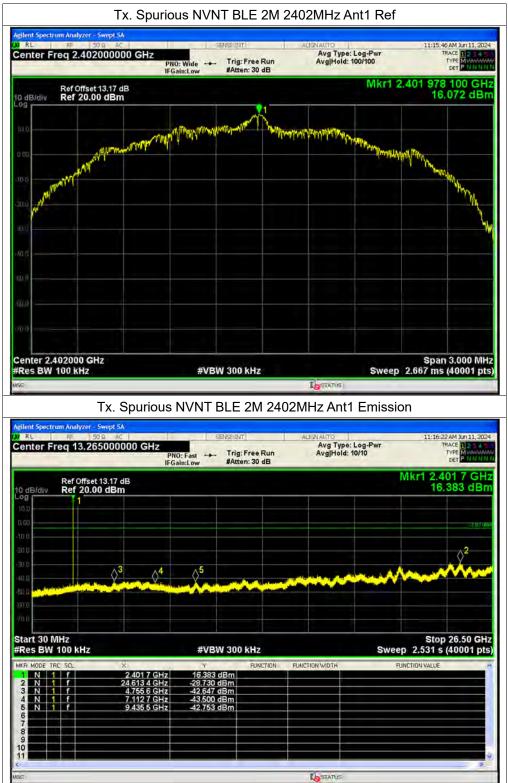


MORLAB



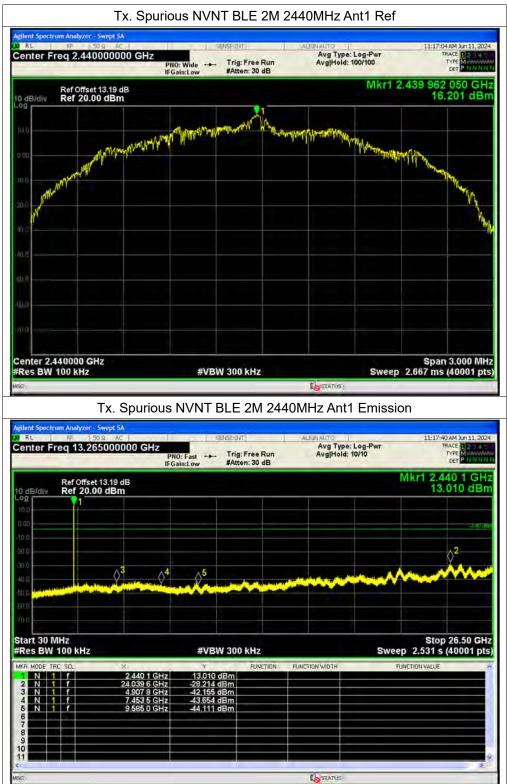


MORLAB



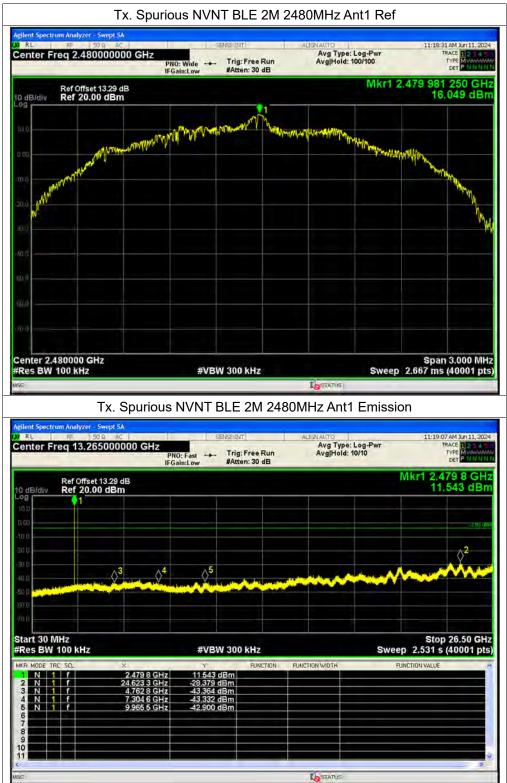


MORLAB



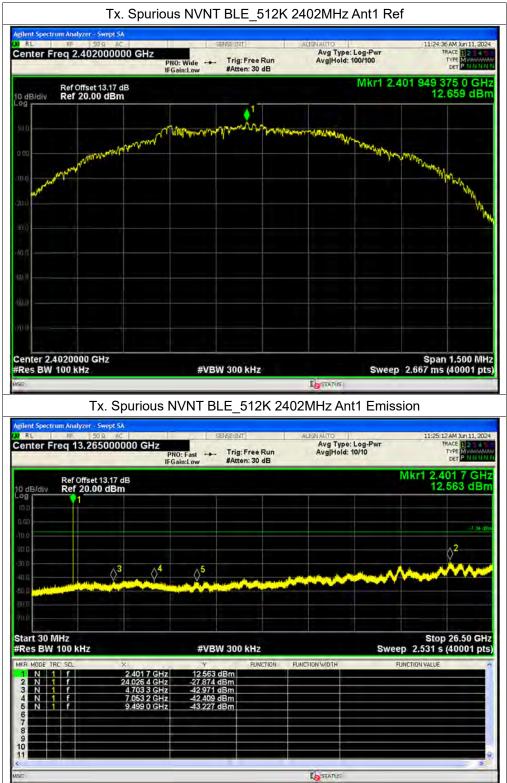


MORLAB



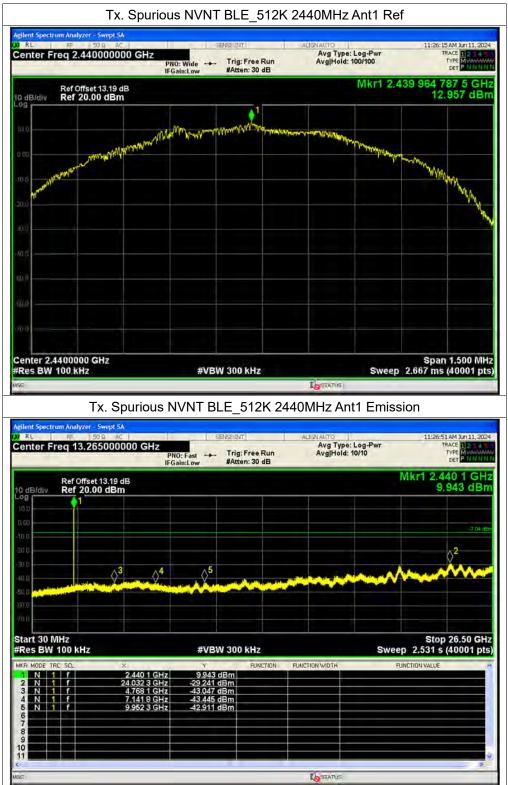

MORLAB



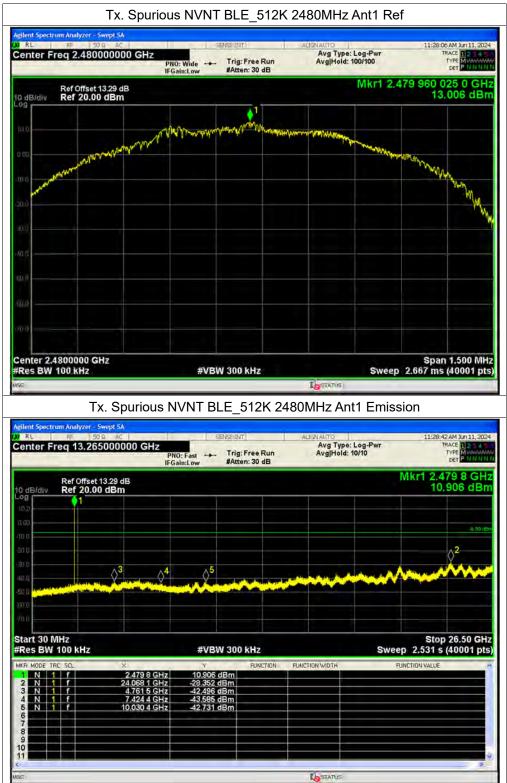

MORLAB



A.6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-54.37	-20	Pass
NVNT	BLE 1M	2480	Ant1	-59.01	-20	Pass
NVNT	BLE 2M	2402	Ant1	-49.97	-20	Pass
NVNT	BLE 2M	2480	Ant1	-57.35	-20	Pass
NVNT	BLE_512K	2402	Ant1	-54.26	-20	Pass
NVNT	BLE_512K	2480	Ant1	-57.44	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



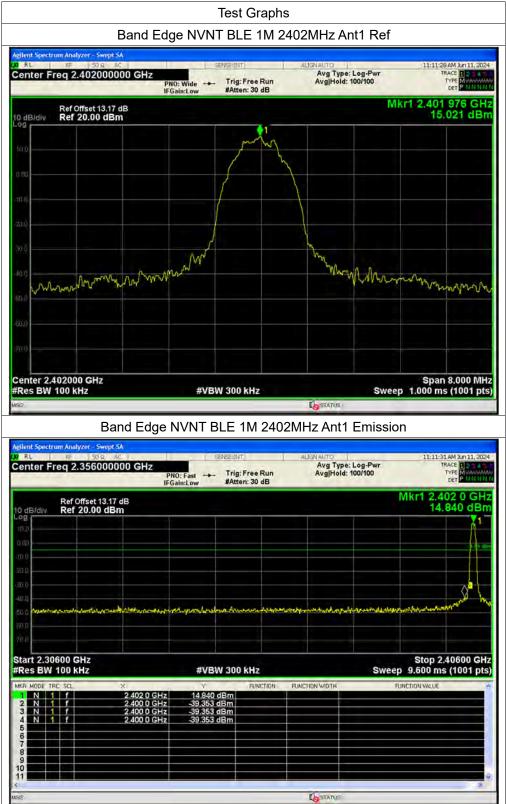






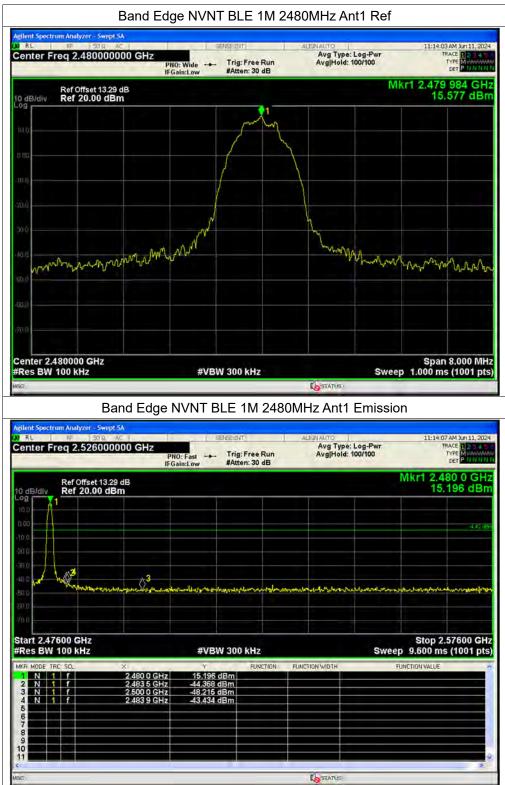

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China






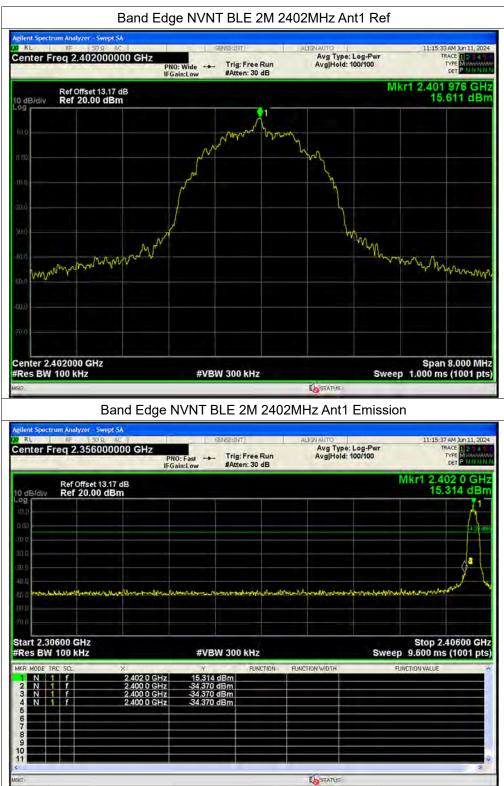





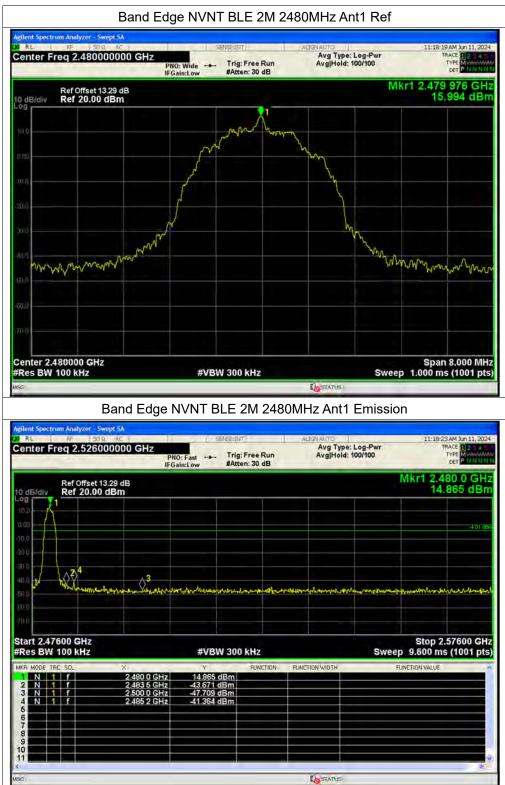

Page 63 of 93

Fax: 86-755-36698525


E-mail: service@morlab.cn

Tel: 86-755-36698555

Http://www.morlab.cn

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




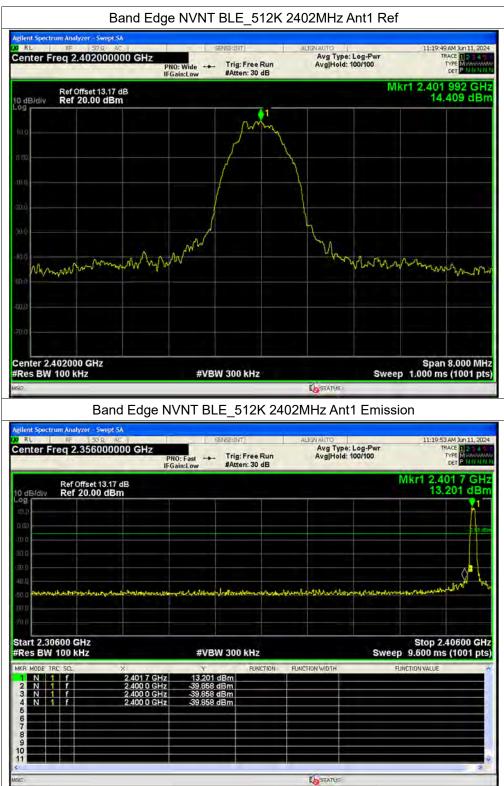

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





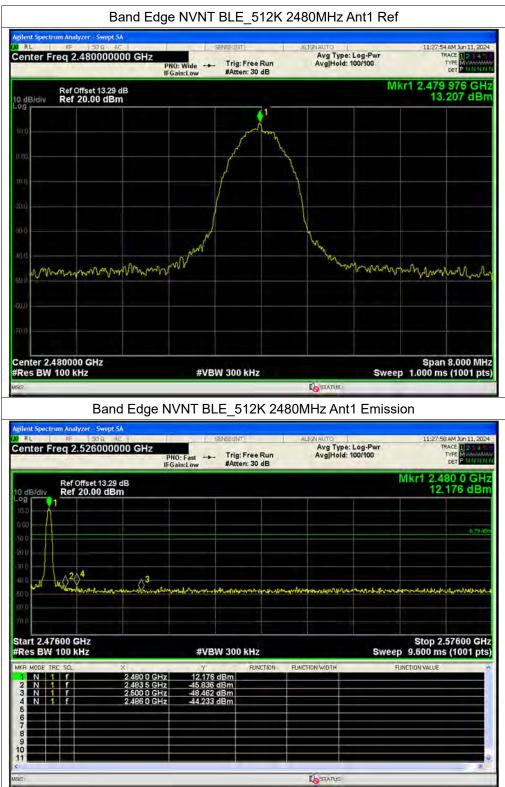

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





A.7. Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.42	0	0.42	8	Pass
NVNT	BLE 1M	2440	Ant1	0.55	0	0.55	8	Pass
NVNT	BLE 1M	2480	Ant1	0.56	0	0.56	8	Pass
NVNT	BLE 2M	2402	Ant1	-0.66	0	-0.66	8	Pass
NVNT	BLE 2M	2440	Ant1	-0.3	0	-0.3	8	Pass
NVNT	BLE 2M	2480	Ant1	1.23	0	1.23	8	Pass
NVNT	BLE_512K	2402	Ant1	5.2	0	5.2	8	Pass
NVNT	BLE_512K	2440	Ant1	5.17	0	5.17	8	Pass
NVNT	BLE_512K	2480	Ant1	5.12	0	5.12	8	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



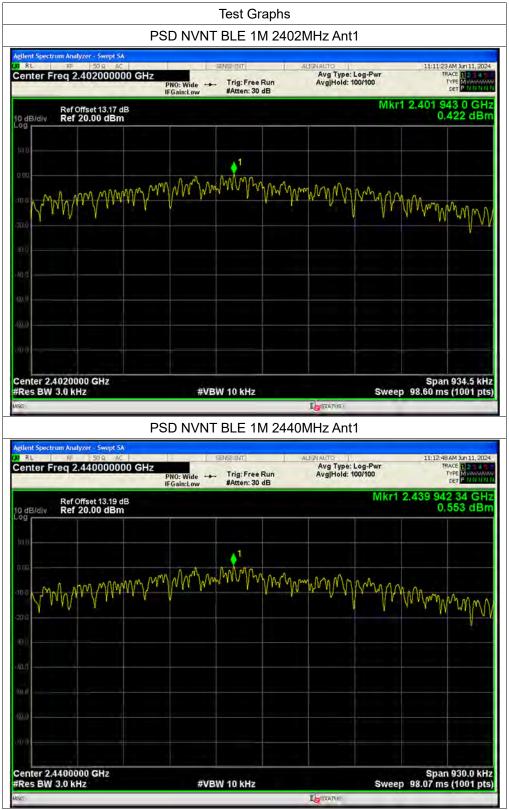





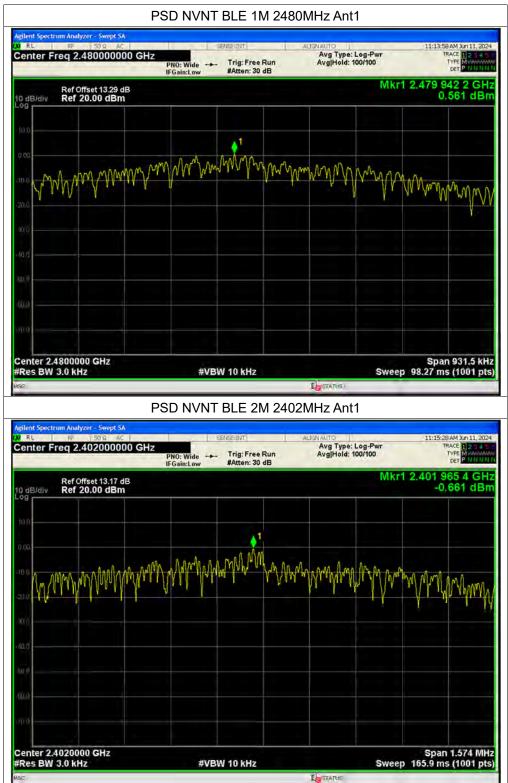


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



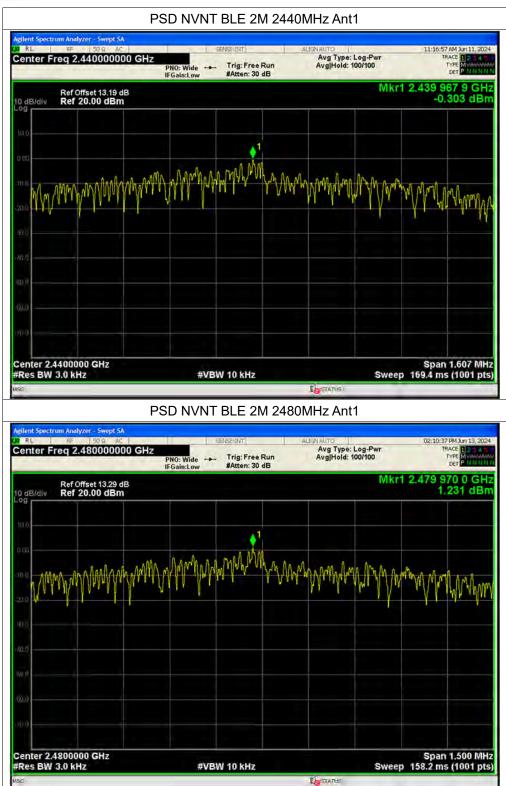


MORLAB





MORLAB



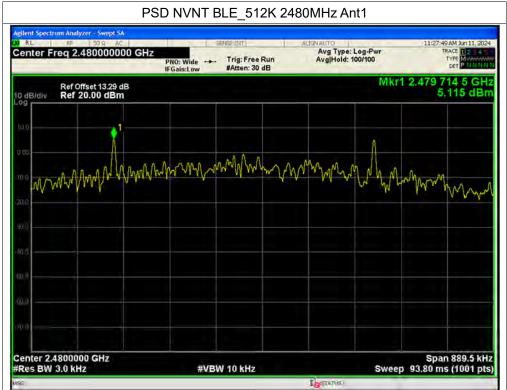



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.


A. Test Setup:

Test Mode: <u>EUT + PC + PC Adapter + BT TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB μ V] =U_R + L_{Cable loss} [dB] + A_{Factor} U_R: Receiver Reading A_{Factor}: Voltage division factor of LISN





B. Test Plot:

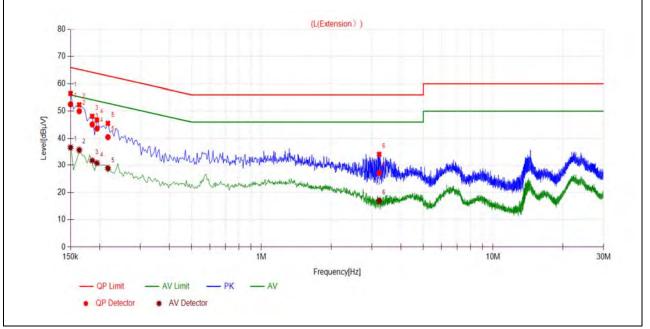


(L	Phase)
----	-------	---

No.	Fre.	Emission L	.evel (dBµV)	Limit (dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1500	52.54	36.64	66.00	56.00		PASS
2	0.1635	50.01	35.72	65.29	55.29		PASS
3	0.1860	45.13	31.76	64.21	54.21	Line	PASS
4	0.1950	43.60	30.81	63.82	53.82	Line	PASS
5	0.2175	40.46	28.82	62.91	52.91		PASS
6	3.2236	27.12	16.82	56.00	46.00		PASS



Fax: 86-755-36698525



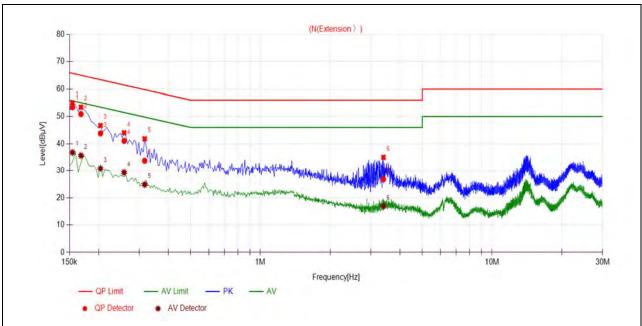

(N	Phase)
----	--------

No.	Fre.	Emission L	evel (dBµV)	Limit (dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	e Quai-peak Average			
1	0.1545	53.44	36.82	65.75	55.75		PASS
2	0.1680	50.92	35.68	65.06	55.06		PASS
3	0.2040	43.82	30.82	63.45	53.45	Noutral	PASS
4	0.2580	41.07	29.32	61.50	51.50	Neutral	PASS
5	0.3165	33.79	24.84	59.80	49.80		PASS
6	3.3991	26.83	16.91	56.00	46.00		PASS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Onanner	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdict
0	2306.24	PK	23.75	6.74	27.20	57.69	74	PASS
0	2388.92	AV	12.76	6.74	27.20	46.70	54	PASS
39	2483.74	PK	32.65	6.74	27.20	66.59	74	PASS
39	2483.61	AV	16.53	6.74	27.20	50.47	54	PASS

1Mbps



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



RL RF PRESEL 50 Q DO		SENSE:INT	-	ALIGN OFF	02:45:52 AM Jun 09, 2024	Marker
PREAMP	PNO: Fast IFGain:Low	Trig: Free Run #Atten: 6 dB	Avg	Type: Voltage Hold:>100/100	TRACE 2 3 4 5 6 TYPE MWWWWW DET P P N N N N	Select Marker
dB/div Ref 82.99 dBµ				Mkr2	2.306 240 GHz 23.749 dBµV	Select Marker 2
0					Λ	Norma
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			radio No. Angelana		- O' work	Delt
0 						Fixed
art 2.30000 GHz es BW (CISPR) 1 MHz		(3.0 MHz		Sweep 1.	Stop 2.40400 GHz 000 ms (1001 pts)	o
N 1 f 2	× 2,390 000 GHz 2,306 240 GHz	21.858 dBµV 23.749 dBµV	FUNCTION	FUNCTION WOTH	FUNCTION VALUE	Properties
<u> </u>						Mor
						1 of

(PEAK, Channel 0)

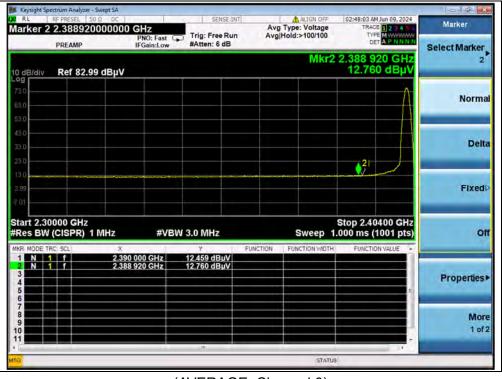

(AVERAGE, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



Marker	02:54:49 AM Jun 09, 2024 TRACE 1 2 3 4 5 6	ALIGN OFF		SENSE:1/	0 GHz	EL 50 9 DC	
Select Marker	DET P P N N N N	Hold:>100/100	Av	Trig: Free Run #Atten: 6 dB	PNO: Fast IFGain:Low	and the second se	PREA
2	2.483 742 GHz 32.645 dBµV	Mkr2				82.99 dBµV	B/div Ref
Norm							\square
Del			An-on-Martines	Marsh which the property	2	hand	
Fixed							
Fixed	Stop 2.50000 GHz .000 ms (1001 pts)	Sweep 1.		N 3.0 MHz	#VB	R) 1 MHz	t 2.47800 (s BW (CISF
c	Stop 2.50000 GHz .000 ms (1001 pts) FUNCTION VALUE	Sweep 1.	FUNCTION	V 3.0 MHz Y 30.087 dBuV 32.645 dBuV	#VB 83 500 GHz 83 742 GHz	PR) 1 MHz × 2.48	
	.000 ms (1001 pts)	Sweep 1.	FUNCTION	Y 30.087 dBµV	3 500 GHz	PR) 1 MHz × 2.48	S BW (CISP
c	.000 ms (1001 pts)	Sweep 1.	FUNCTION	Y 30.087 dBµV	3 500 GHz	PR) 1 MHz × 2.48	S BW (CISP

(PEAK, Channel 39)



(AVERAGE, Channel 39)


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Fax: 86-755-36698525



2Mbps

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Channer	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	verdict
0	2376.44	PK	22.23	6.74	27.20	56.17	74	PASS
0	2389.65	AV	13.15	6.74	27.20	47.09	54	PASS
39	2483.65	РК	26.73	6.74	27.20	60.67	74	PASS
39	2483.50	AV	16.68	6.74	27.20	50.62	54	PASS

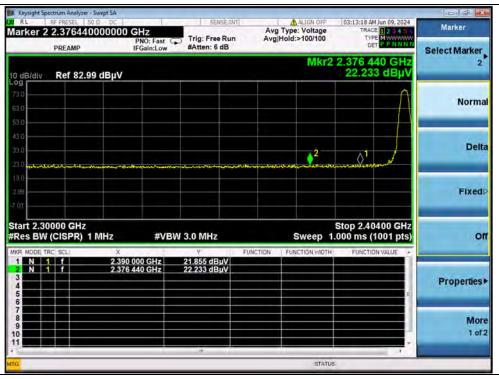

(PEAK, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



Marker	1 Jun 09, 2024		ALIGN OFF		SENSE:IN			F PRESEL	
Select Marker	E 123456 M WWWWW TAPNNNN	TYPE	Type: Voltage Hold:>100/100		Trig: Free Run #Atten: 6 dB	PNO: Fast	18000000	PREAMP	-
2	48 GHz 9 dBµV	2.389 64 13.149	Mkr2				.99 dBµV	Ref 82.	dív
Norm	$ \land$								
Dell		2							
Fixed		<u></u>							
c	1001 pts)		Sweep 1.	FUNCTION	3.0 MHz	#VBW	1 MHz	00 GHz CISPR)	
Properties		FUNCTION	FUNCTION WIDTH	FUNCTION	12.623 dBµV 13.149 dBµV			f	
Mor 1 of									

(AVERAGE, Channel 0)



(PEAK, Channel 39)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn



Marker	02:38:50 AM Jun 12, 2024 TRACE 2 3 4 5 1	ALIGN OFF Type: Voltage		SENSE:1	GHz	a DC 000000 G	483522	
Select Marker	DET A P N N N N	Hold:>100/100	n	Trig: Free Run #Atten: 6 dB	PNO: Fast G	1	REAMP	F
2	2.483 522 GHz 16.579 dBµV	Mkr2				dBµV	tef 82.99	lív
Norm								1
Del						2		/
Fixed								
c	Stop 2.50000 GHz .000 ms (1001 pts)	Sweep 1.		3.0 MHz	#VBW	MHz	0 GHz ISPR) 1	BW (C
	FUNCTION VALUE	FUNCTION WIDTH	FUNC	16.677 dBuV	500 GHz	× 2.483 5	SCL)	
Properties	e .			16.579 dBµV	522 GHz	2,483 5		
Ma 1 o								
1 of			_					
		STATUS						

(AVERAGE, Channel 39)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax:

Fax: 86-755-36698525



512kbps

-	1	1						
Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Channel	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	verdict
0	2387.36	PK	23.31	6.74	27.20	57.25	74	PASS
0	2380.60	AV	11.87	6.74	27.20	45.81	54	PASS
39	2483.61	PK	30.47	6.74	27.20	64.41	74	PASS
39	2483.50	AV	15.70	6.74	27.20	49.64	54	PASS



(PEAK, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



Marker Select Marker	AM Jun 09, 2024 ACE 1 2 3 4 5 6 YPE M WWWWWWW DET A P N N N N	TRAC	ALIGN OFF Type: Voltage fold:>100/100	Avg	SENSE:IN Trig: Free Run #Atten: 6 dB	GHz PNO: Fast 😱 IFGain:Low	0000000	RF PRESEL 2.38060 PREAMP	
2	600 GHz 67 dBµV	2.380 6 11.86	Mkr2				99 dBµV	Ref 82.	3/dív
Norm	A								
Del									
Fixed		\.	→ ²						
c	0400 GHz (1001 pts)	000 ms (*	Sweep 1.	FUNCTION	3.0 MHz	#VBW		000 GHz (CISPR)	
Properties					11.775 dBµV 11.867 dBµV		2.390 2.380	f	
Mo 1 of									
			STATUS						

(AVERAGE, Channel 0)



(PEAK, Channel 39)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525

Page 82 of 93



Marker	03:07:36 AM Jun 09, 2024 TRACE 1 2 3 4 5 6	ALIGN OFF		SENSE:IN	GHZ	a pc	RESEL 50	
Select Mark	DET A P N N N N	Hold:>100/100		Trig: Free Run #Atten: 6 dB	PNO: Fast G IFGain:Low	1000	REAMP	
	2.483 500 GHz 15.697 dBµV	Mkr2				dBµV	ef 82.99	div
Norr								1
De						2		
Fixe								
-	Stop 2.50000 GHz 000 ms (1001 pts)	Sweep 1.		3.0 MHz	#VB		0 GHz SPR) 1 I	BW (C
Propertie	FUNCTION VALUE	FUNCTION WIDTH	FUNCTION	15.697 dBµV 15.697 dBµV	500 GHz 500 GHz	× 2.483 (2.483 (CL) f	
M	e.							
1	-							
		STATUS						_

(AVERAGE, Channel 39)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 8

Fax: 86-755-36698525

Http://www.morlab.cn



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

riola otrongar of landamontal.										
Frequency	Reading_Peak	Antenna	Path Loss	Final_Peak	Antenna					
(MHz)	(dBµV/m)	Factor (dB)	(dB)	(dBµV/m)	Polarity					
2401.96	75.49	27.20	6.74	109.43	Horizontal					
2401.98	76.99	27.20	6.74	110.93	Vertical					


Field strength of fundamental:


The field strength (the lowest) of fundamenta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).






1Mbps



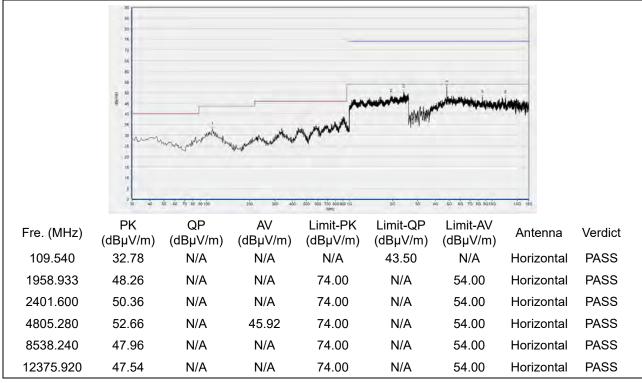

(Antenna Horizontal, 30MHz to 18GHz)

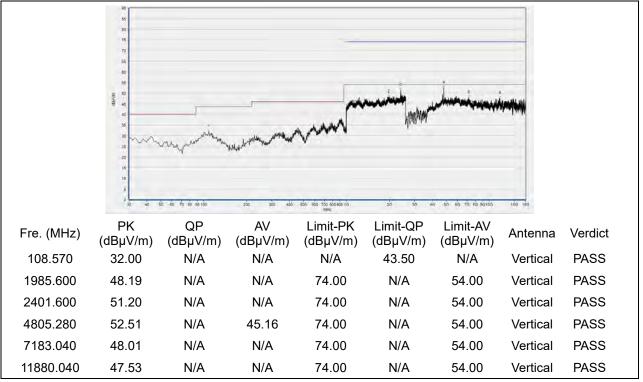


(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555


Fax: 86-755-36698525





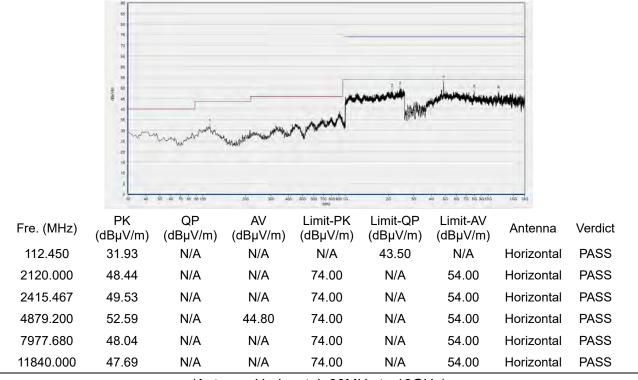

(Antenna Horizontal, 30MHz to 18GHz)

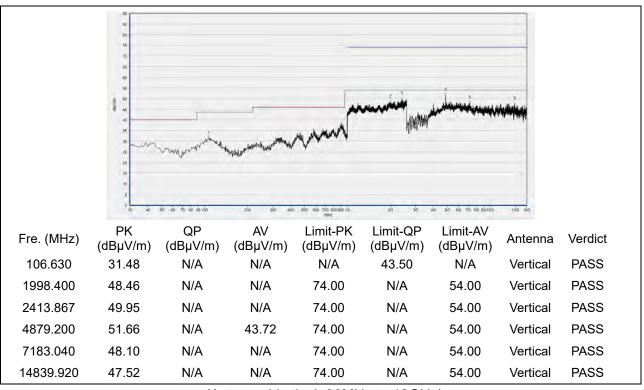


(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525





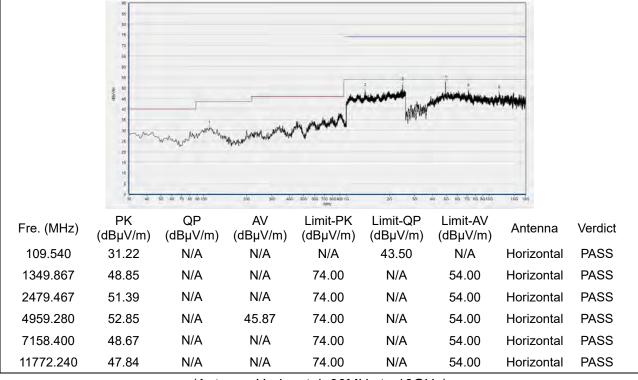

(Antenna Horizontal, 30MHz to 18GHz)

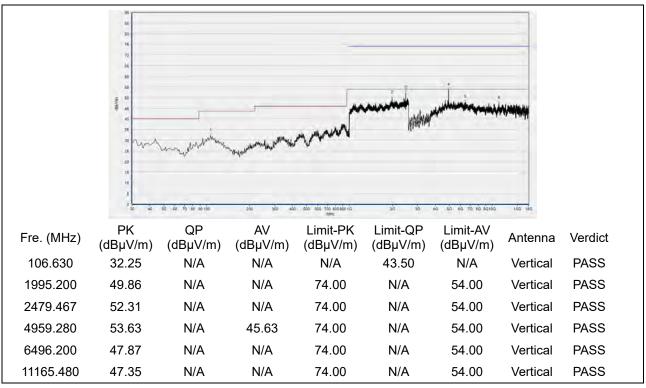

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn




2Mbps



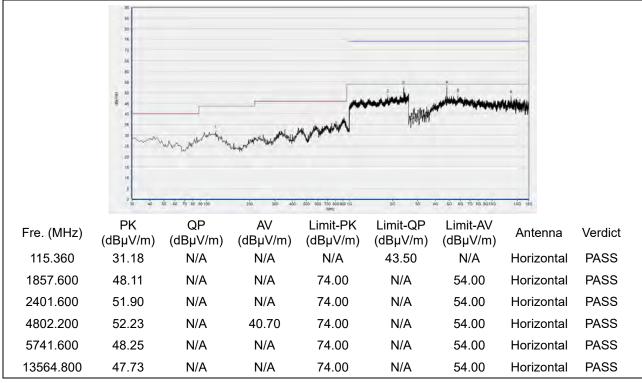

(Antenna Horizontal, 30MHz to 18GHz)

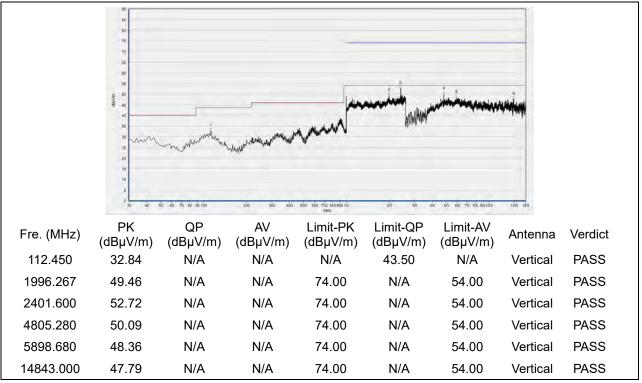

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn





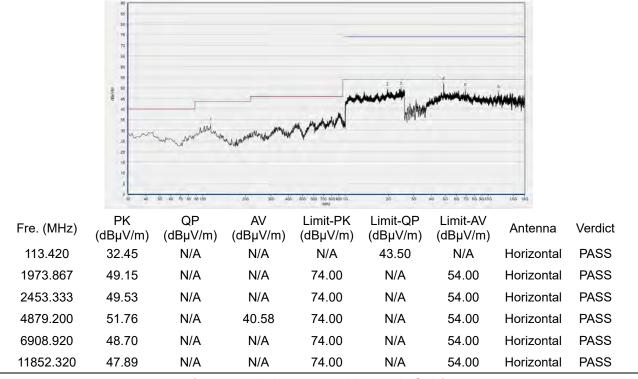

(Antenna Horizontal, 30MHz to 18GHz)

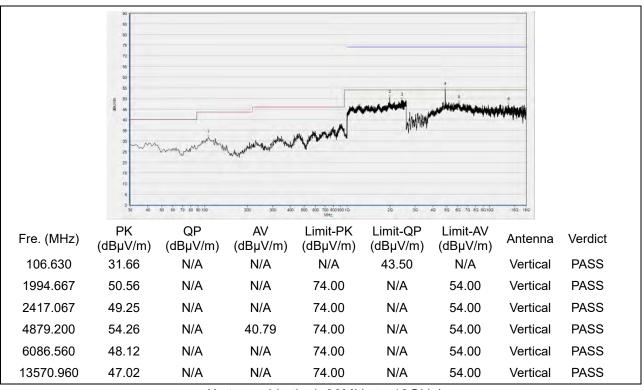

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn





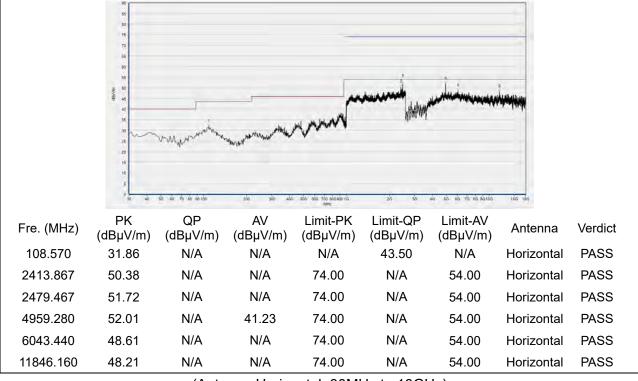

(Antenna Horizontal, 30MHz to 18GHz)

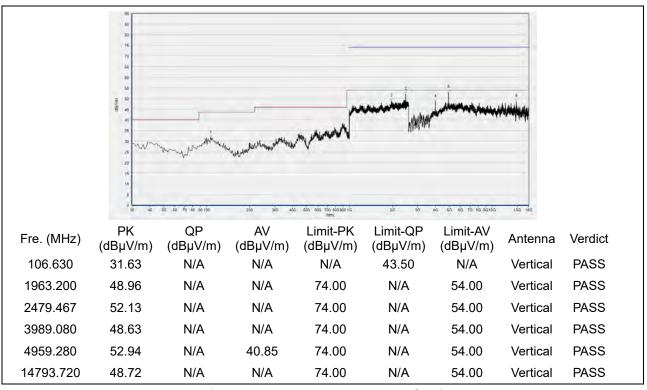

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn




512kbps

Plot for Channel 0

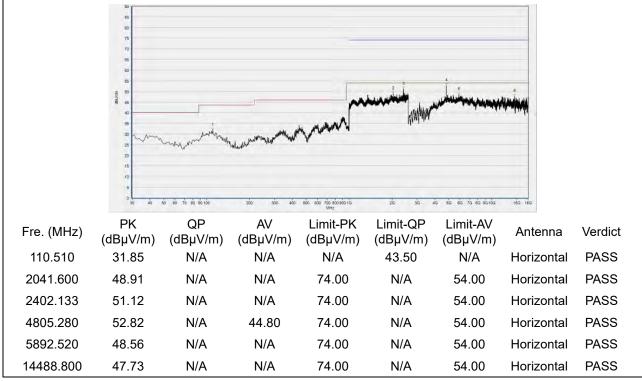

(Antenna Horizontal, 30MHz to 18GHz)

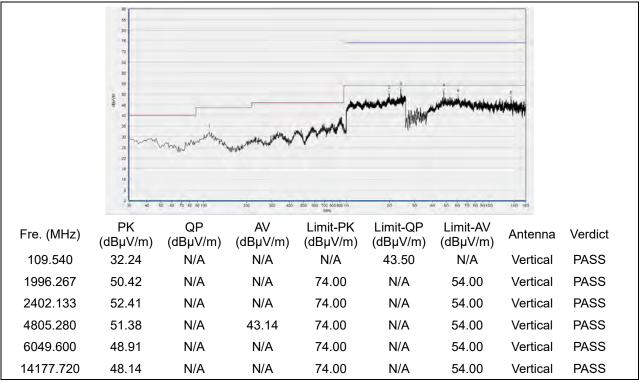


(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555


Fax: 86-755-36698525





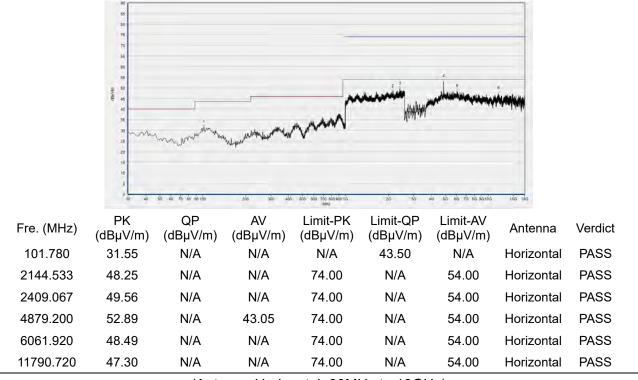

(Antenna Horizontal, 30MHz to 18GHz)

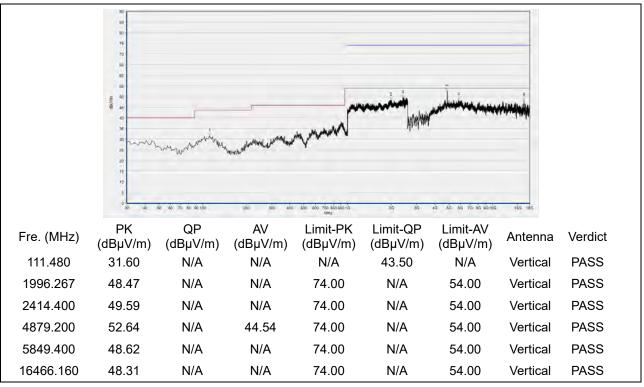


(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn





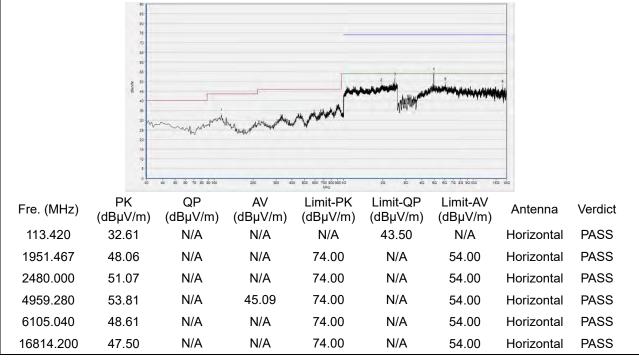

(Antenna Horizontal, 30MHz to 18GHz)

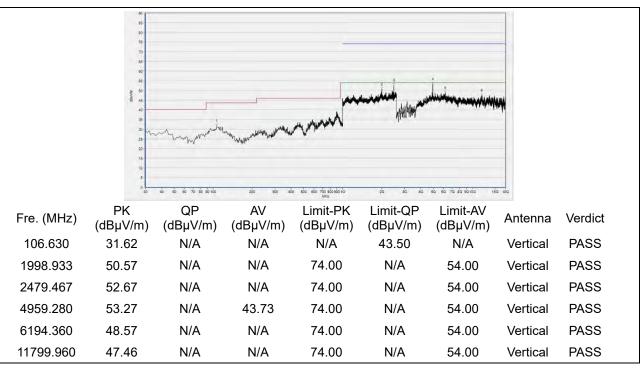

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525