



Product Service

**Choose certainty.
Add value.**

Report On

DFS Testing of the u-blox WiBear11n / ELLA-W1
In accordance with FCC 47 CFR Part 15E and
Industry Canada RSS-247

COMMERCIAL-IN-CONFIDENCE

FCC ID: PV7-WIBEAR11N-DF1, PV7-WIBEAR11N-DF2, XPYELLAW161,
XPYELLAW163

IC: 7738A-WB11NDF1, 7738A-WB11NDF2, 8595A-ELLAW161, 8595A-
ELLAW163

Document 75931213 Report 01 Issue 2

December 2015



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

DFS Testing of the
u-blox WiBear11n / ELLA-W1
In accordance with FCC 47 CFR Part 15E and
Industry Canada RSS-247


Document 75931213 Report 01 Issue 2

December 2015

PREPARED FOR

u-blox AG
Zürcherstrasse 68
CH-8800 Thalwil
Switzerland

PREPARED BY



Simon Bennett
Wireless Test Engineer

APPROVED BY



Nic Forsyth
Authorised Signatory

DATED

24 December 2015

This report has been up-issued to Issue 2 to remove references to CAC tests in the brief summary of results and test results sections for the '802.11n - 40 MHz Bandwidth' configuration.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate compliance with the FCC 47 CFR Part 15E and Industry Canada RSS-247. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s):



S Bennett





CONTENTS

| Section | Page No |
|----------------|--|
| 1 | REPORT SUMMARY 3 |
| 1.1 | Introduction 4 |
| 1.2 | Test Requirements 5 |
| 1.3 | Brief Summary of Results 11 |
| 1.4 | Application Form 14 |
| 1.5 | Product Information 17 |
| 1.6 | Test Conditions 17 |
| 1.7 | Deviations from the Standard 17 |
| 1.8 | Modification Record 17 |
| 1.9 | Test Configuration 18 |
| 2 | TEST DETAILS 38 |
| 2.1 | U-NII Detection Bandwidth 39 |
| 2.2 | Initial Channel Availability Check Time 47 |
| 2.3 | Radar Burst at the Beginning of the Channel Availability Check Time 50 |
| 2.4 | Radar Burst at the End of the Channel Availability Check Time 53 |
| 2.5 | In-service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-occupancy Period 56 |
| 2.6 | Statistical Performance Check 64 |
| 2.7 | Uniform Spreading 80 |
| 3 | TEST EQUIPMENT USED 81 |
| 3.1 | Test Equipment Used 82 |
| 3.2 | Support Test Equipment 83 |
| 3.3 | Measurement Uncertainty 84 |
| 4 | PHOTOGRAPHS 85 |
| 4.1 | Test Set-Up Photographs 86 |
| 4.2 | DFS Test Equipment 86 |
| 5 | ACCREDITATION, DISCLAIMERS AND COPYRIGHT 87 |
| 5.1 | Accreditation, Disclaimers and Copyright 88 |
| ANNEX A | Test Waveforms Used A.2 |



Product Service

SECTION 1

REPORT SUMMARY

DFS Testing of the
u-blox WiBear11n / ELLA-W1
In accordance with FCC 47 CFR Part 15E and Industry Canada RSS-247



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the DFS Testing of the U-Blox WiBear11n / ELLA-W1 to the requirements of FCC 47 CFR Part 15E and Industry Canada RSS-247.

| | |
|--------------------------------|---|
| Objective | To perform DFS Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out. |
| Manufacturer | U-Blox |
| Model Number(s) | WiBear11n / ELLA-W1 |
| Serial Number(s) | 0489341 |
| Number of Samples Tested | 01 |
| Test Specification/Issue/Date | FCC 47 CFR Part 15E (2014) Industry Canada RSS-247 (Issue 1, May 2015) |
| Incoming Release Date | Application Form 16 July 2015 |
| Disposal Reference Number Date | Held Pending Disposal Not Applicable Not Applicable |
| Order Number Date | LALB-201507081_Rev0 8 July 2015 |
| Start of Test | 8 July 2015 |
| Finish of Test | 30 July 2015 |
| Name of Engineer(s) | S Bennett |
| Related Documents | KDB 905462 D02 v01r02 KDB 905462 D06 v01r02 KDB 905462 D04 v01 KDB 662911 D01 UKAS M3003: Edition 2 (2007) ETSI TR 100 028 (2001) |



1.2 TEST REQUIREMENTS

1.2.1 FCC 47 CFR Part 15E

1.2.1.1 DFS Overview

The requirements according to FCC 47 CFR Part 15, clause 15.407 (h)(2) are described below.

U-NII devices operating in the 5.25 GHz to 5.35 GHz and 5.47 GHz to 5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems. The minimum DFS detection threshold for devices with a maximum e.i.r.p. of 200 mW to 1 W is -64 dBm. For devices that operate with less than 200 mW e.i.r.p. the minimum detection threshold is -62 dBm.

Master mode U-NII devices shall comply with Channel Availability Check Time, Channel Move Time and Non-occupancy Period DFS requirements.

Client mode U-NII devices shall comply with Channel Move Time DFS requirements.

1.2.1.2 Channel Availability Check Time

The requirements according to FCC 47 CFR Part 15, clause 15.407 (h)(2)(ii) are described below.

A master mode U-NII device shall check if there is a radar system already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel. The U-NII device may start using the channel if no radar signal with a power level greater than the DFS detection threshold, is detected within 60 seconds.

1.2.1.3 Channel Move Time

The requirements according to FCC 47 CFR Part 15, clause 15.407 (h)(2)(iii) are described below.

After a radar's presence is detected, all transmissions shall cease on the operating channel within 10 seconds. Transmissions during this period shall consist of normal traffic for a maximum of 200 ms after detection of the radar signal. In addition, intermittent management and control signals can be sent during the remaining time to facilitate vacating the operating channel.

1.2.1.4 Non-occupancy Period

The requirements according to FCC 47 CFR Part 15, clause 15.407 (h)(2)(iv) are described below.

A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.



1.2.2 KDB 905462

1.2.2.1 DFS Overview

The requirements according to KDB 905462, clause 5.1 are described below.

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid co-channel operation with these systems. This applies to the 5250 to 5350 MHz and/or 5470 to 5725 MHz bands.

Within the context of the operation of the DFS function, a U-NII device will operate in either Master Mode or Client Mode. U-NII devices operating in Client Mode can only operate in a network controlled by a U-NII device operating in Master Mode.

Tables 1 and 2 summarise the information contained in sections 5.1.1 and 5.1.2 of the test specification.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

| Requirement | Operational Mode | | |
|---------------------------------|------------------|--------------------------------|-----------------------------|
| | Master | Client Without Radar Detection | Client With Radar Detection |
| Non-Occupancy Period | Yes | Not required | Yes |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Availability Check Time | Yes | Not required | Not required |
| U-NII Detection Bandwidth | Yes | Not required | Yes |

Table 2: Applicability of DFS requirements during normal operation

| Requirement | Operational Mode | |
|-----------------------------------|--|--------------------------------|
| | Master Device or Client with Radar Detection | Client without Radar Detection |
| DFS Detection Threshold | Yes | Not Required |
| Channel Closing Transmission Time | Yes | Yes |
| Channel Move Time | Yes | Yes |
| U-NII Detection Bandwidth | Yes | Not Required |

| | | |
|---|--|--|
| Additional requirements for devices with multiple bandwidth modes | Master Device or Client with Radar Detection | Client without Radar Detection |
| U-NII Detection Bandwidth and Statistical Performance Check | All BW modes must be tested | Not required |
| Channel Move Time and Channel Closing Transmission Time | Test using widest BW mode available | Test using the widest BW mode available for the link |
| All other tests | Any single BW mode | Not required |
| Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. | | |



Master Mode Devices

The specific master mode device requirements according to KDB 905462, clause 5.1.1 are described below.

- a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz bands. DFS is not required in the 5150 MHz to 5250 MHz or 5725 MHz to 5825 MHz bands.
- b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- f) Once the Master Device has detected a Radar Waveform it will not utilise the Channel for the duration of the Non-Occupancy Period.
- g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.



Product Service

Client Devices

The specific client mode device requirements according to KDB 905462, clause 5.1.2 are described below.

- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

1.2.2.2 DFS Detection Thresholds

The requirements according to KDB 905462, clause 5.2 are described below.

Table 3 provides the DFS Detection Thresholds for Master Devices as well as Client Devices incorporating In-Service Monitoring.

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

| Maximum Transmit Power | Value (See Notes 1, 2, and 3) |
|--|----------------------------------|
| EIRP ≥ 200 mW | -64 dBm |
| EIRP < 200 mW and power spectral density < 10 dBm/MHz | -62 dBm |
| EIRP < 200 mW that do not meet the power spectral density requirement | -64 dBm |
| <p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01</p> | |



1.2.2.3 Test Protocol

The test protocol requirements according to KDB 905462, clause 7.1 are described below.

The test transmission will always be from the Master Device to the Client Device, for all configurations irrespective of In-Service Monitoring capability.

Master Devices

The conformance requirements specified in KDB 905462, clause 7.8 will be verified utilising the Short Pulse Radar types defined in Table 5.

The Channel Move Time and Channel Closing Transmission Time requirements will be verified utilising the Short Pulse Radar Type 0 defined in Table 5.

The statistical performance check will be verified utilising all Radar Types (1-6).

Client Devices with In-Service Monitoring

Two configurations must be tested.

- (1) Client with injection at the Client:
 - (a) The client device detects the Radar Waveform.
 - (b) The Channel Move Time and Channel Closing Transmission Time requirements will be verified utilising Short Pulse Radar Types (0-4), defined in Table 5 and the Long Pulse Radar Types (5) defined in Table 6.
 - (c) The statistical performance check will be verified utilising all Radar Types (1-6). During this test it must be ensured that the Client Device is responding independently based on the Client Device's self-detection rather than responding to detection by the Master Device.
 - (d) The signal level of the Radar Waveform as received by the Client Device must be set in accordance with the DFS Detection Threshold specified by the DFS technical requirements in Table 3.
- (2) Client with injection at the Master:
 - (a) The master device detects the Radar Waveform.
 - (b) The Channel Move Time and Channel Closing Transmission Time will be verified utilising Short Pulse Radar Type defined in Table 5. During this test, it must be ensured that the Client Device is responding to detection by the Master Device rather than self-detection by the Client Device.
 - (c) For all tests of Client Devices (with or without In-Service Monitoring), the Master device which the Client Device is associated must meet the DFS conformance requirements.

Client Devices without Radar Detection

The Channel Move Time and Channel Closing Transmission Time requirements will be verified with one Short Pulse Radar Type defined in table 5.



1.2.2.4 Response Requirements

The requirements according to KDB 905462, clause 5.3 are described below.

Table 4 provides the response requirements for Master Devices incorporating DFS.

Table 4: DFS Response Requirement Values

| Parameter | Value |
|---|---|
| Non-occupancy period | Minimum 30 minutes |
| Channel Availability Check Time | 60 seconds |
| Channel Move Time | 10 seconds See Note 1. |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| U-NII Detection Bandwidth | Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3. |
| <p>Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p>Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p>Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> | |

1.2.2.5 DFS Conformance Test Procedures

The requirements according to KDB 905462, clause 7.8 are described below.

If the UUT fails any one of the tests it will count as a failure of compliance. To show compliance, all tests must be performed with waveforms randomly generated as specified with test results meeting the required percentage of successful detection criteria. All test results must be reported to the FCC. One frequency will be chosen from the operating Channels of the UUT within the 5250 MHz to 5350 MHz or 5470 MHz to 5725 MHz bands.



Product Service

1.3 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15E and Industry Canada RSS-247 is shown below.

| Section | Specification Clause | | Test Description | Result | Comments |
|---------|----------------------|---------------------|---|-------------|----------|
| | Part 15 | RSS-247 | | | |
| 802.11a | | | | | |
| 2.1 | 15.407 (h)(2) | - | U-NII Detection Bandwidth | Pass | |
| 2.2 | 15.407 (h)(2)(ii) | 6.3 (2)(ii) | Initial Channel Availability Check Time | Pass | |
| 2.3 | 15.407 (h)(2)(ii) | 6.3 (2)(ii) | Radar Burst at the Beginning of the Channel Availability Check Time | Pass | |
| 2.4 | 15.407 (h)(2)(ii) | 6.3 (2)(ii) | Radar Burst at the End of the Channel Availability Check Time | Pass | |
| 2.5 | 15.407 (h)(2) | 6.3 (2)(i)(iii)(iv) | In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period | Pass | |
| 2.6 | 15.407 (h)(2) | - | Statistical Performance Check | Pass | |
| 2.7 | 15.407 (h)(2) | - | Uniform Spreading | Declaration | |



Product Service

| Section | Specification Clause | | Test Description | Result | Comments |
|----------------------------|----------------------|---------------------|---|-------------|----------|
| | Part 15 | RSS-247 | | | |
| 802.11n - 20 MHz Bandwidth | | | | | |
| 2.1 | 15.407 (h)(2) | - | U-NII Detection Bandwidth | Pass | |
| 2.2 | 15.407 (h)(2)(ii) | 6.3 (2)(ii) | Initial Channel Availability Check Time | Pass | |
| 2.3 | 15.407 (h)(2)(ii) | 6.3 (2)(ii) | Radar Burst at the Beginning of the Channel Availability Check Time | Pass | |
| 2.4 | 15.407 (h)(2)(ii) | 6.3 (2)(ii) | Radar Burst at the End of the Channel Availability Check Time | Pass | |
| 2.5 | 15.407 (h)(2) | 6.3 (2)(i)(iii)(iv) | In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period | Pass | |
| 2.6 | 15.407 (h)(2) | - | Statistical Performance Check | Pass | |
| 2.7 | 15.407 (h)(2) | - | Uniform Spreading | Declaration | |



Product Service

| Section | Specification Clause | | Test Description | Result | Comments |
|----------------------------|----------------------|------------------------|---|-------------|----------|
| | Part 15 | RSS-247 | | | |
| 802.11n - 40 MHz Bandwidth | | | | | |
| 2.1 | 15.407 (h)(2) | - | U-NII Detection Bandwidth | Pass | |
| 2.5 | 15.407 (h)(2) | 6.3 (2)(i)(iii)(iv)(v) | In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period | Pass | |
| 2.6 | 15.407 (h)(2) | - | Statistical Performance Check | Pass | |
| 2.7 | 15.407 (h)(2) | - | Uniform Spreading | Declaration | |



1.4 APPLICATION FORM

| EQUIPMENT DESCRIPTION | |
|---|--|
| Model Name/Number | WiBear11n-DF1/-DF2, ELLA-W161/-W163 |
| Part Number | AN00J93172/AN00J94360, AN00J94362/AN00J93176, ELLA-W161-00B-00, ELLA-W163-00B-00, ELLA-W161-00A-00, ELLA-W163-00A-00 |
| Hardware Version | WiBear11n: E6, ELLA-W1: G8 |
| Software Version | 14.44.35 |
| FCC ID | PV7-WIBEAR11N-DF1, PV7-WIBEAR11N-DF2, XPYELLOW161, XPYELLOW163 |
| IC | 7738A-WB11NDF1, 7738A-WB11NDF2, 8595A-ELLAW161, 8595A-ELLAW163 |
| Technical Description (Please provide a brief description of the intended use of the equipment) | Short-range radio module supporting IEEE 802.11a/b/g/n Wi-Fi, Bluetooth 3.0+HS |

| TYPE OF EQUIPMENT | |
|-------------------------------------|--------------------------------|
| <input checked="" type="checkbox"/> | Master |
| <input type="checkbox"/> | Client with Radar Detection |
| <input checked="" type="checkbox"/> | Client without Radar Detection |
| <input checked="" type="checkbox"/> | Wi-Fi Direct Support |

| TRANSMITTER TECHNICAL CHARACTERISTICS | |
|---|--|
| FREQUENCY CHARACTERISTICS | |
| <input checked="" type="checkbox"/> | 5.150 GHz to 5.250 GHz |
| <input checked="" type="checkbox"/> | 5.250 GHz to 5.350 GHz |
| <input checked="" type="checkbox"/> | 5.470 GHz to 5.725 GHz |
| <input checked="" type="checkbox"/> | 5.725 GHz to 5.825 GHz |
| <input checked="" type="checkbox"/> | Please confirm the EUT does not operate in the frequency band 5600 – 5650 MHz |
| <input type="checkbox"/> | Off Channel CAC Implemented |
| | Off Channel CAC within 5600 – 5650 MHz band hours, (1 – 24) |
| | Off Channel CAC outside 5600 – 5650 MHz band minutes, (6 – 240) |
| Note: DFS is not required in the ranges 5.15 – 5.25 GHz and 5.725 – 5.825 GHz | |

| TRANSMITTER RF POWER CHARACTERISTICS | |
|--|---|
| Maximum rated transmitter output power as stated by manufacturer | |
| Conducted Power | 15 dBm |
| Maximum Antenna Gain | 4.6 dBi |
| EIRP | 19.6 dBm |
| Minimum rated transmitter output power as stated by manufacturer (if applicable) | |
| Conducted Power | 6 dBm |
| Maximum Antenna Gain | 4.6 dBi |
| EIRP | 10.6 dBm |
| Is TPC supported? | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |
| If Yes, provide a description of operation. | |
| Power depends on modulation scheme and distance to access point or client. | |



Product Service

| POWER SOURCE | |
|---|---------------|
| <input type="checkbox"/> AC mains supply | State voltage |
| AC supply frequency (Hz) | VAC |
| <input checked="" type="checkbox"/> DC supply | |
| Nominal voltage | 3.3 |

| SYSTEM ARCHITECTURE | | | |
|-------------------------------------|---------------------|-----------------------|--------|
| <input type="checkbox"/> | Frame Based | | |
| <input checked="" type="checkbox"/> | IP Based | | |
| <input type="checkbox"/> | Other | If other please state | |
| <input checked="" type="checkbox"/> | 802.11(a) | Receiver Bandwidth: | 20 MHz |
| <input checked="" type="checkbox"/> | 802.11(n) – 20 MHz | Receiver Bandwidth: | 20 MHz |
| <input checked="" type="checkbox"/> | 802.11(n) – 40 MHz | Receiver Bandwidth: | 40 MHz |
| <input type="checkbox"/> | 802.11(ac) – 20 MHz | Receiver Bandwidth: | MHz |
| <input type="checkbox"/> | 802.11(ac) – 40 MHz | Receiver Bandwidth: | MHz |
| <input type="checkbox"/> | 802.11(ac) – 80 MHz | Receiver Bandwidth: | MHz |

| DECLARATION | |
|--|--------------------------------|
| No parameter or information relating to the detected radar waveforms is available or accessible to the end user. | |
| <input checked="" type="checkbox"/> True | <input type="checkbox"/> False |

| MISCELLANEOUS (Master Device Only) | |
|---|-----|
| Power-on cycle time* | 0 s |
| * Time from switching on the UUT to the point at which Channel Availability Check (CAC) commences | |

| UNIFORM SPREADING (Master Device Only) | |
|---|--|
| Describe how the meter provides, on aggregate, uniform channel loading of the spectrum across all channels. | |
| Channels are randomly selected by the access point. | |



| ANTENNA OPTIONS | |
|--------------------------|-----------------------|
| Antenna 1 | |
| Antenna Description: | .On board SMT antenna |
| Antenna Model: | Antenova A10194 |
| Antenna Maximum Gain: | 4.1 dB |
| Antenna Frequency Range: | 4.900 - 5.900 GHz |
| Antenna 2 | |
| Antenna Description: | Dipole antenna |
| Antenna Model: | Linx ANT-DB1-RAF-RPS |
| Antenna Maximum Gain: | 4.6 dB |
| Antenna Frequency Range: | 5.150 - 5.850 GHz |
| Antenna 3 | |
| Antenna Description: | Dipole antenna |
| Antenna Model: | Taoglas GW.40.2153 |
| Antenna Maximum Gain: | 2.5 dB |
| Antenna Frequency Range: | 5.150 - 5.850 GHz |
| Antenna 4 | |
| Antenna Description: | Dipole antenna |
| Antenna Model: | Taoglas GW.59.3153 |
| Antenna Maximum Gain: | 2.93 dB |
| Antenna Frequency Range: | 5.150 - 5.850 GHz |
| Antenna 5 | |
| Antenna Description: | |
| Antenna Model: | |
| Antenna Maximum Gain: | |
| Antenna Frequency Range: | |

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature: *Mahlig* Name: *Matthias Mahlig*
 Position held: *Manager HW-Engineering* Date: *2015-07-16*



Product Service

1.5 PRODUCT INFORMATION

1.5.1 Technical Description

The Equipment Under Test (EUT) was a u-blox WiBear11n / ELLA-W1. A full technical description can be found in the manufacturer's documentation.

The EUT is a master mode device employing a Radar Detection Device (RDD).

The following is provided by the applicant as part of the FCC filing:

- A complete User's Manual and/or Professional Installers Manual.
- A Statement of Conformity for the Client in Non-Associated mode is required. The Form 731 application must include a Cover Letter Attachment stating that the client software and associated drivers will not initiate any transmission on DFS frequencies without initiation by a master. This includes restriction on transmissions for beacons and support for ad-hoc peer-to-peer modes.
- A channel/frequency plan for the device showing the channels that have active scanning or passive scanning. Active scanning is where the device can transmit a probe (beacon) and passive scanning is where the device can listen only without probes.
- Software security description.

1.6 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. See individual test clauses.

The development board was powered from a 10.0 V DC supply, which in turn provided 3.3 V DC to the EUT.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

1.7 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard were made during testing.

1.8 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



1.9 TEST CONFIGURATION

1.9.1 DFS Measurement Instrumentation

The Aeroflex Dynamic Frequency Selection Radar Simulation and Analyser Test Suite was utilised. This test system consists of hardware and software; which comprises of a radar test signal generator and a test signal analyser.

The DFS test system utilises a PXI chassis with PXI instruments populating this chassis; which allows all instrumentation to communicate on a common bus. The following PXI instruments are populated in the PXI chassis; PC with a dual core processor, Frequency References, Vector Signal Generator and a Digitiser.

The test signal and analysis software is run on the PC and controls all of the instruments such that the required test signals are generated and analysed using test sequences in the test software application. The specific test utilisation of this system is described within applicable measurement procedures.

1.9.1.1 Test Signal Generator

The PXI Vector Signal Generator is capable of generating all test signals required by the relevant test specification and is driven using the Aeroflex DFS Simulation and Analyser Test Suite on the PXI PC. An external trigger is also provided at the SMB output of the signal generator which is employed when an external spectrum analyser is utilised for DFS measurements instead of the Aeroflex Digitiser.

1.9.1.2 Test Signal Analyser

The PXI Digitiser is used for channel monitoring during DFS testing and is capable of capturing measurement sweeps with sample rates of 5 Msamples/s and 2.5 Msamples/s with sweep times of 12 s and 24 s respectively.

Various markers are contained within the generated test signals. The markers are used to trigger the Signal Analyser at the correct points. Once a measurement sweep has completed, the signal analyser software evaluates the data according the relevant test requirement.




1.9.2 DFS Setup

DFS testing was completed using the Conducted Test method as described in KDB 905462, clause 7.2. A frequency stable path was utilised between the Radar Test Signal Generator and the Radar Detection Device.

Conducted Setup for Master with injection at the Master

Setup for Master

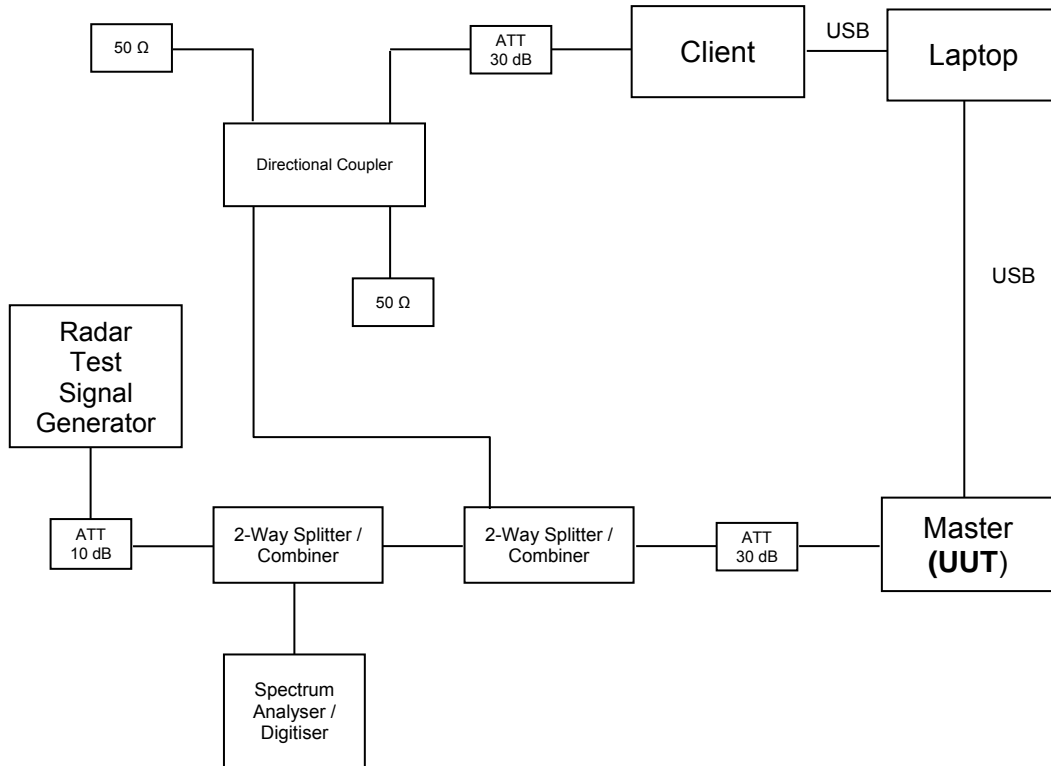



1.9.3 Test Channel, Channel Bandwidth and Data Rate Selection

This device is capable of operating within 5600 to 5650 MHz except when operating within the scope of Industry Canada RSS-247.

In cases where the fundamental emission channel bandwidth exceeds DFS band edges and where it is not possible to select a channel that has the entire emission bandwidth within the DFS band (e.g. 802.11ac 160 MHz), specific requirements and procedures are detailed further in the relevant test sections.

A single test channel was selected for each channel bandwidth of every mode. Where applicable, the control channels were identified. The following channels and data rates were utilised during testing:

| Mode | Channel Bandwidth (MHz) | Data Rate (Mbps) | Fundamental Emission | | Control Channel | |
|---------|-------------------------|------------------|----------------------|-----------------|-----------------|-----------------|
| | | | Channel Number | Frequency (MHz) | Channel Number | Frequency (MHz) |
| 802.11a | 20 | 6 | 56 | 5280 | 56 | 5280 |
| 802.11n | 20 | 6.5 | 56 | 5280 | 56 | 5280 |
| 802.11n | 40 | 13.5 | 52 | 5260 | 56 | 5280 |

1.9.4 Test Signal Selection and Calibration

The test signal calibration was completed using the calibration procedure as described in KDB 905462, clause 7.5.

The EUT is a master mode device employing a Radar Detection Device, with the following power and antenna assembly characteristics:

- The maximum declared antenna gain is 4.6 dBi. Testing was carried out in a worst case configuration using an antenna gain of 0 dBi.
- The maximum EIRP is 91.2 mW.
- The maximum power spectral density is <10 dBm/MHz.

Note that the maximum EIRP is based on the highest antenna gain. In the cases of MIMO devices, the maximum EIRP has been obtained according to KDB 662911.

A spectrum analyser was used to establish the test signal level for the radar types utilised during testing. During this process, there were no transmissions by the EUT or ancillary devices. The spectrum analyser was switched to the zero span (time domain) mode at the frequency of the radar waveform generator. The peak detector function of the spectrum analyser was utilised. The spectrum analyser resolution bandwidth and video bandwidth were set to 3 MHz.

According to KDB 905462, clause 5.2, Table 3, Note 2; throughout the test procedures an additional 1 dB should be added to the amplitude of the test transmission waveforms to account for variations in measurement equipment and thus ensuring that the test signal is at or above the detection threshold level to trigger a DFS response. As such, the radar test signal level was calibrated for each operating channel to a level of, the DFS Detection Threshold + 1dB; yielding a radar signal level of -61 dBm at the receiver.

Test waveforms conforming to KDB 905462, Clause 6 were utilised during testing. The parameters and calibration of the waveforms to be used for determining DFS compliance are detailed further.



Step intervals of 0.1 μs for Pulse Width, 1 μs for PRI, 1 MHz for chirp width and 1 for the number of pulses were utilised for the random determination of specific test waveforms.

1.9.4.1 Short Pulse Radar Test Waveforms

An excerpt from KDB 905462, Clause 6.1 and Table 5 details the required parameters for short pulse radar test waveforms.

Table 5: Short Pulse Radar Test Waveforms

| Radar Type | Pulse Width (μs) | PRI (μs) | Number of Pulses |
|---|------------------|---|--|
| 0 | 1 | 1428 | 18 |
| 1 | 1 | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a | $RoundUp \left\{ \frac{1}{360} \times \frac{19 \times 10^6}{PRI_{\mu sec}} \right\}$ |
| | | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A | - |
| 2 | 1-5 | 150-230 | 23-29 |
| 3 | 6-10 | 200-500 | 16-18 |
| 4 | 11-20 | 200-500 | 12-16 |
| Note 1: Short Pulse Radar Type 0 shall only be used for the channel availability and detection bandwidth tests. It should be noted that any of the radar test waveforms 0 – 4 can be used for the channel availability and detection bandwidth tests. | | | |

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

KDB 905462, Clause 6.1, Table 5a details 15 unique PRI values randomly selected from a list of 23 PRI values.



Table 5a: Pulse Repetition Intervals Values for Test A

| Pulse Repetition Frequency Number | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (Microseconds) |
|-----------------------------------|--|--|
| 1 | 1930.5 | 518 |
| 2 | 1858.7 | 538 |
| 3 | 1792.1 | 558 |
| 4 | 1730.1 | 578 |
| 5 | 1672.2 | 598 |
| 6 | 1618.1 | 618 |
| 7 | 1567.4 | 638 |
| 8 | 1519.8 | 658 |
| 9 | 1474.9 | 678 |
| 10 | 1432.7 | 698 |
| 11 | 1392.8 | 718 |
| 12 | 1355.0 | 738 |
| 13 | 1319.3 | 758 |
| 14 | 1285.3 | 778 |
| 15 | 1253.1 | 798 |
| 16 | 1222.5 | 818 |
| 17 | 1193.3 | 838 |
| 18 | 1165.6 | 858 |
| 19 | 1139.0 | 878 |
| 20 | 1113.6 | 898 |
| 21 | 1089.3 | 918 |
| 22 | 1066.1 | 938 |
| 23 | 326.2 | 3066 |


Spectrum analyser plots for the calibration of the burst of pulses on the Channel frequency were recorded. Test signal calibrations for each Short Pulse Radar Waveform Type utilised during testing are shown below.



Product Service


5270 MHz

Radar Type 0

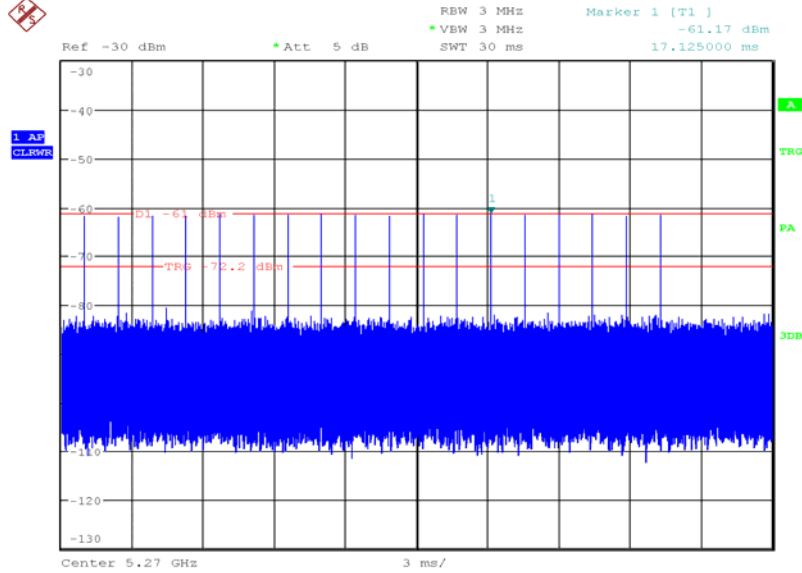

Date: 8.JUL.2015 12:48:11


Radar Type 1

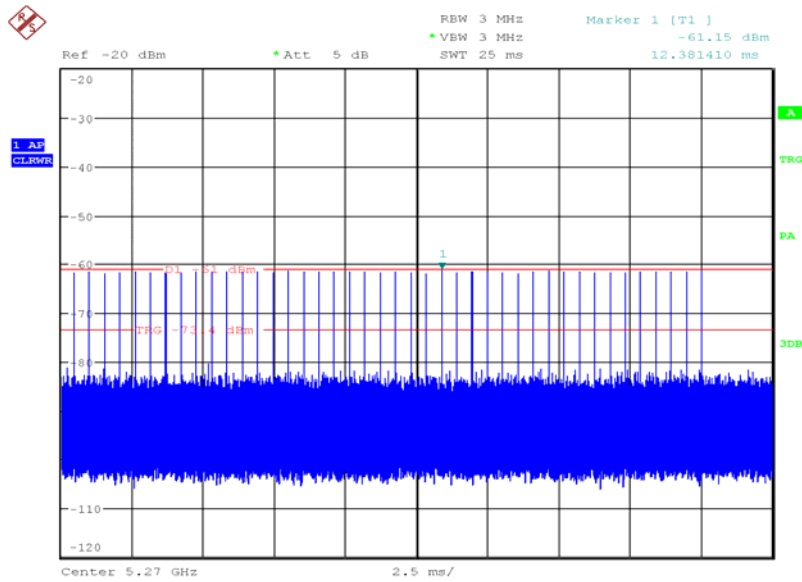

Date: 9.JUL.2015 08:31:28




Radar Type 2

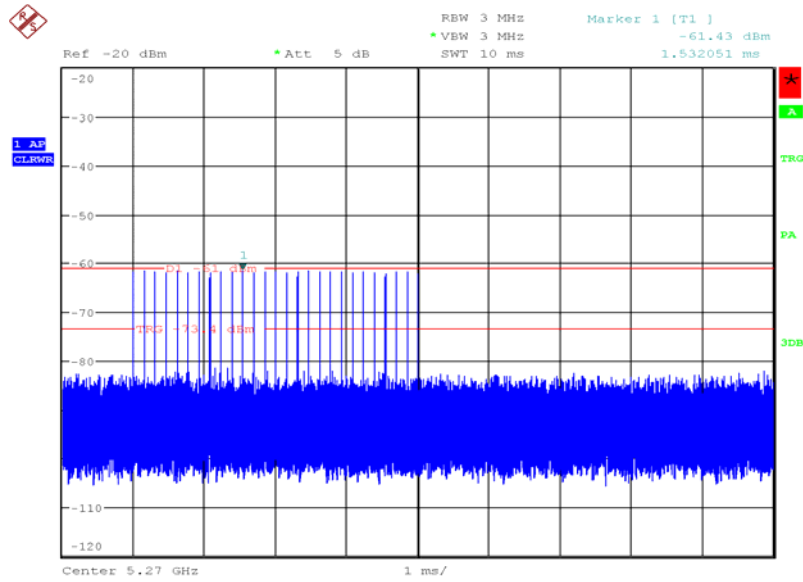

Date: 9.JUL.2015 08:39:06

Radar Type 3

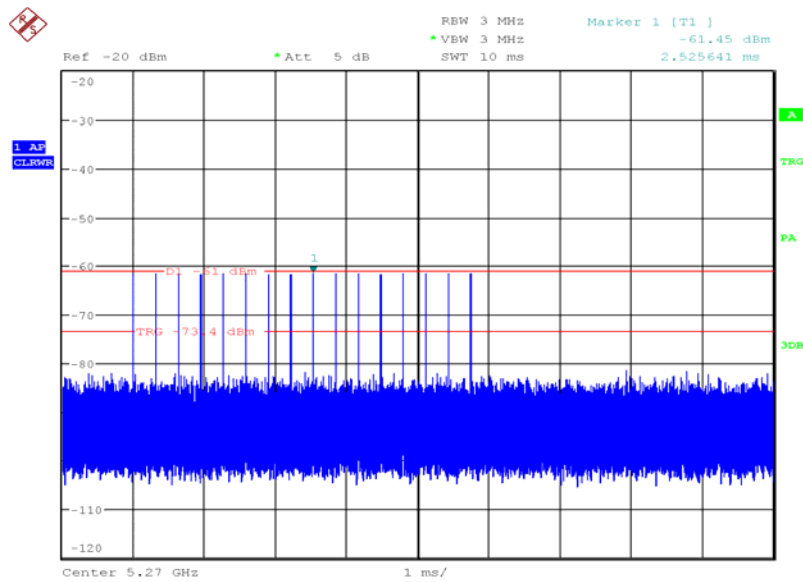


Date: 9.JUL.2015 08:42:37



Product Service


Radars Type 4

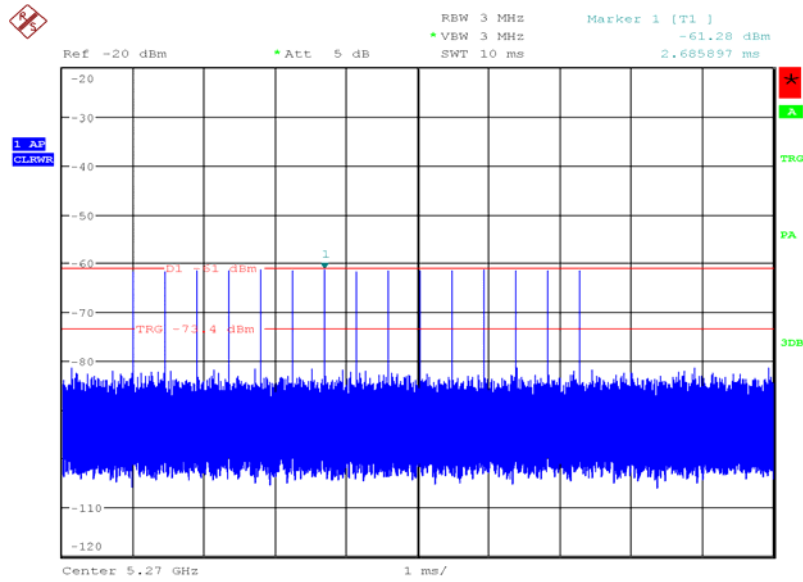

Date: 9.JUL.2015 08:45:36

5280 MHz

Radars Type 0

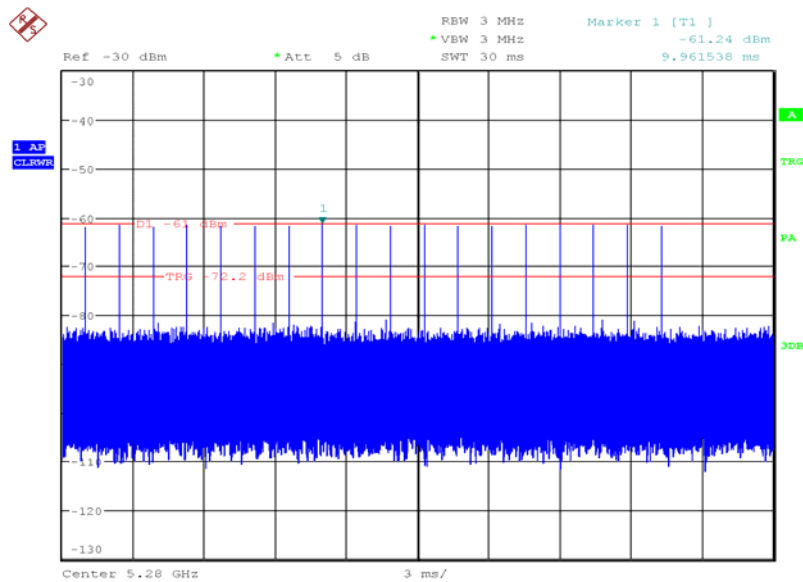


Date: 8.JUL.2015 12:49:28




Product Service

Radar Type 1

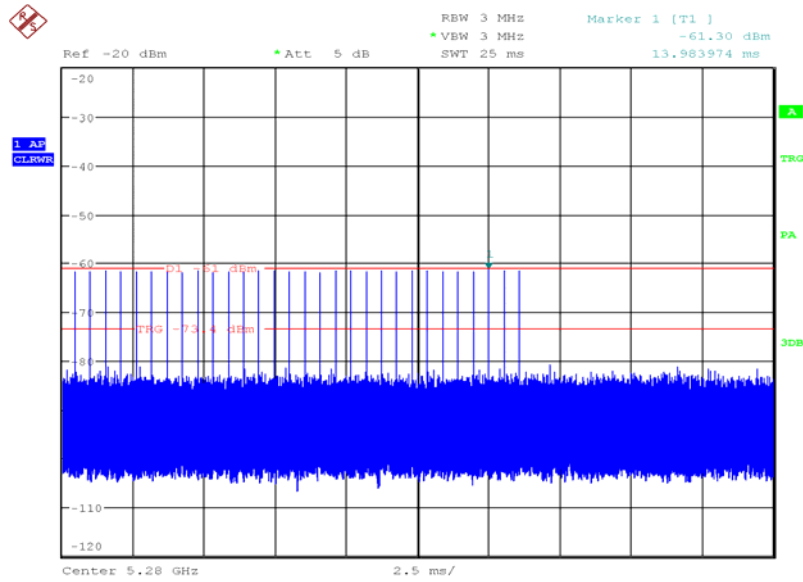

Date: 9.JUL.2015 08:30:33

Radar Type 2

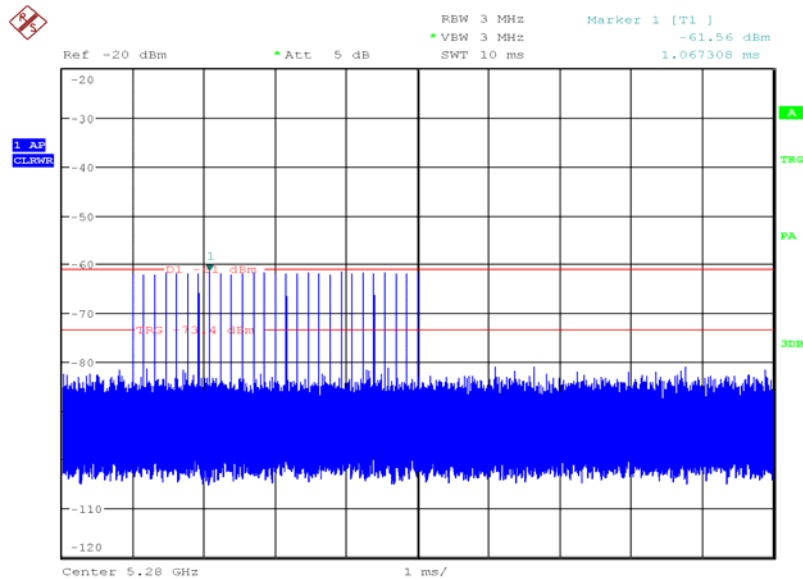


Date: 9.JUL.2015 08:40:04




Product Service

Radar Type 3

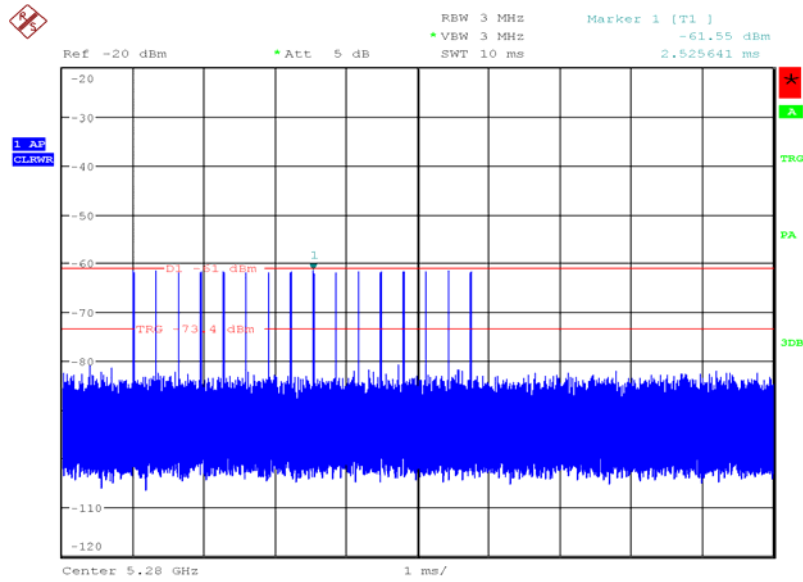

Date: 9.JUL.2015 08:41:52

Radar Type 4

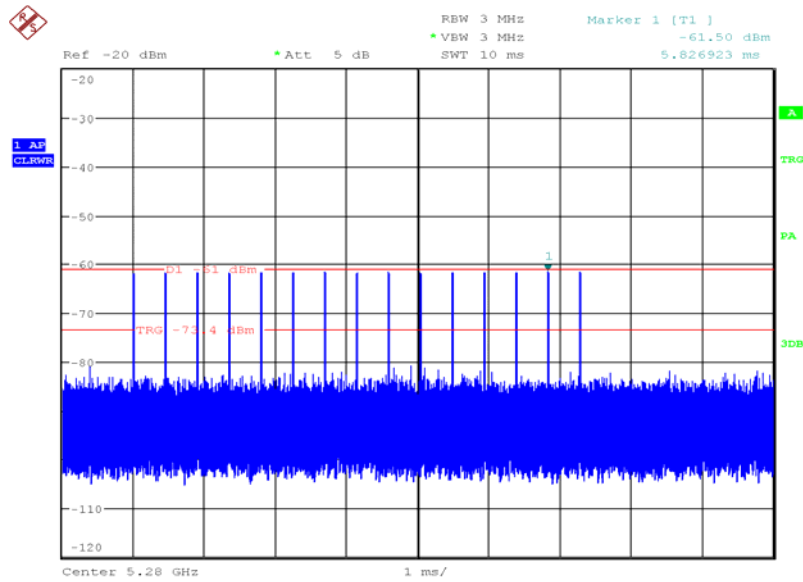

Date: 9.JUL.2015 08:46:26



1.9.4.2 Long Pulse Radar Test Waveforms

An excerpt from KDB 905462, Clause 6.2 and Table 6 details the required parameters for long pulse radar test waveforms.

Table 6: Long Pulse Radar Test Waveforms

| Radar Type | Pulse Width (µs) | Chirp Width (MHz) | PRI (µs) | Number of Pulses per Burst | Number of Bursts |
|------------|------------------|-------------------|-----------|----------------------------|------------------|
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 |

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

The transmission period for the Long Pulse Radar test signal is 12 seconds.

There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.

Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.

The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.

Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.

If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.


A Spectrum analyser plot for the calibration of a single burst (1-3 pulses) on the channel frequency was recorded. Test signal calibration for the Long Pulse Radar Waveform Type utilised during testing is shown below.



Product Service

5270 MHz


Radar Type 5

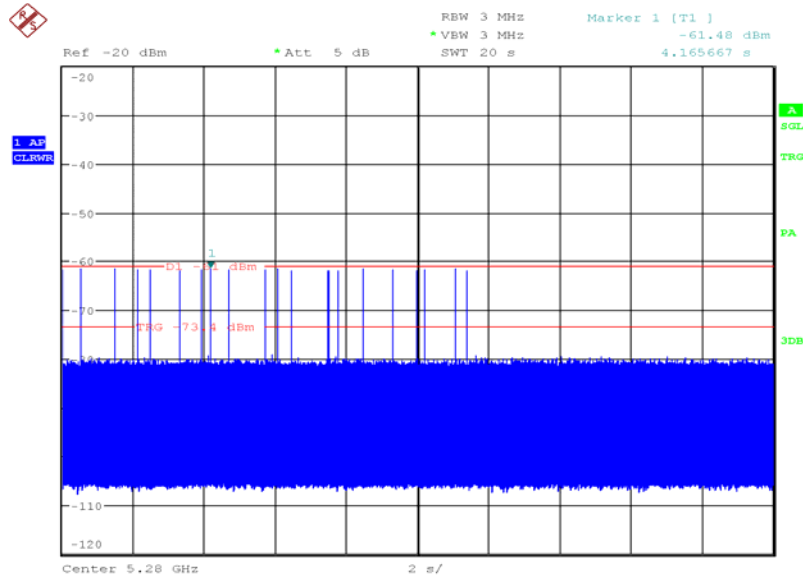

Date: 9.JUL.2015 08:57:38

5280 MHz

Radar Type 5

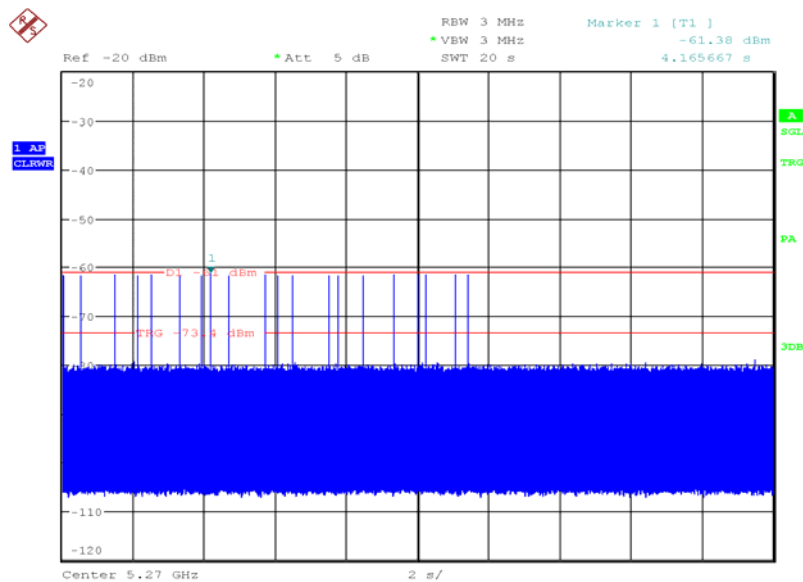

Date: 9.JUL.2015 08:56:31



1.9.4.3 Frequency Hopping Radar Test Waveform

An excerpt from KDB 905462, Clause 6.3 and Table 7 details the required parameters for Frequency Hopping Radar test waveforms.

Table 7: Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (µs) | PRI (µs) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) |
|------------|------------------|----------|----------------|--------------------|--------------------------------|
| 6 | 1 | 333 | 9 | 0.333 | 300 |

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 MHz to 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

If a segment does not contain at least 1 frequency within the U-NII Detection Bandwidth of the EUT, then that segment is not used.

A spectrum analyser plot showing 9 pulses of a Frequency Hopping Radar Test Waveform on one frequency within the U-NII Detection Bandwidth was recorded and is shown below.

5270 MHz

Radar Type 6

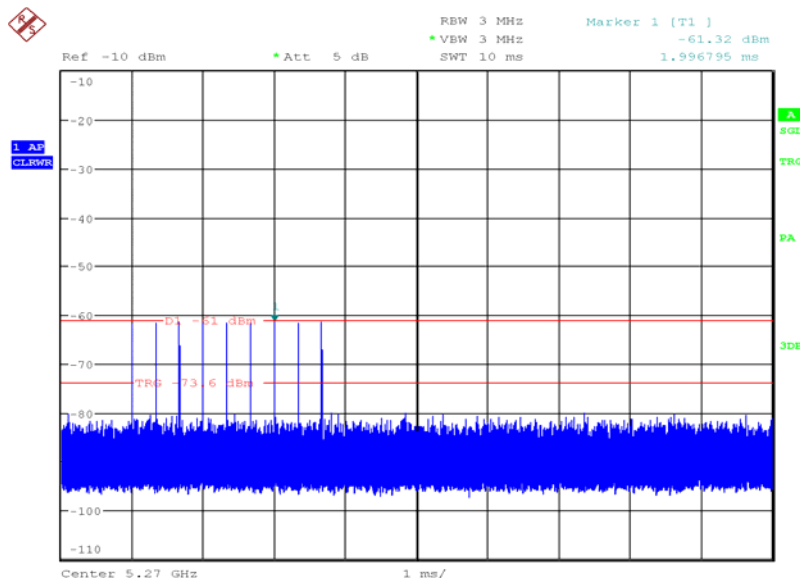


Date: 10.JUL.2015 13:21:57



5280 MHz

Radar Type 6

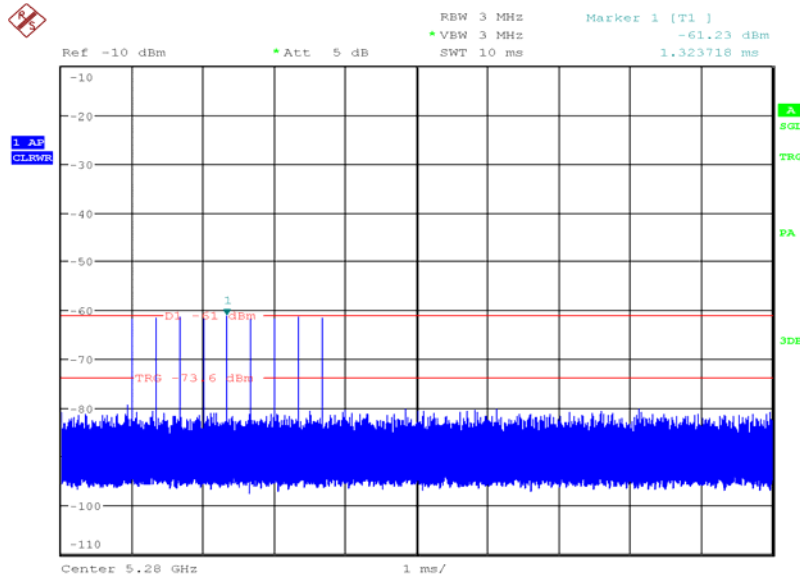

Date: 10.JUL.2015 13:20:02

1.9.5 Control Signal and Channel Loading Verification

Control Signal Verification

The presence of control signals were verified by disabling channel loading and monitoring with a spectrum analyser. A spectrum analyser utilising a peak detector was used to verify the control signals frequency.

Channel Loading

Initially, the Master was configured to a Client device. The system is an IP based system and data was transferred from the Master to the Client as per Clause 7.7.1.

Initial testing was carried out to determine which data rates/modulation schemes produced a duty cycle of >17 %. The EUT was configured to send equal length packets with a random ping interval as defined in Clause 7.7(b). A Unicast, (UDP), protocol was used as described in Clause 7.7(d).

The minimum channel loading requirement of 17 % was adhered to throughout all testing. Channel loading results for each operating mode and data rate under test has been recorded. These channel loading configurations were utilised throughout all testing unless otherwise stated.



Product Service

The channel loading was determined using the methods described in KDB 789033 D02, Clause II.B. A spectrum analyser in zero-span mode was employed. A peak detector was utilised with resolution and video bandwidths that exceeded the fundamental emission bandwidth wherever possible. The measurement sweep trace showing transmissions on the channel frequency was exported to a data file and then analysed. An amplitude threshold was applied to the trace data in the file, such that all the total number of the sweep points that exceeded this threshold was determined. The duration of each sweep point was calculated by dividing the sweep time by the number of sweep points. The channel loading was calculated by multiplying this total number of sweep points by the time duration of each sweep point.



Product Service


802.11a

Data Rate: 6 Mbps


Channel Loading

5280 MHz

The channel loading was 28.04 %.

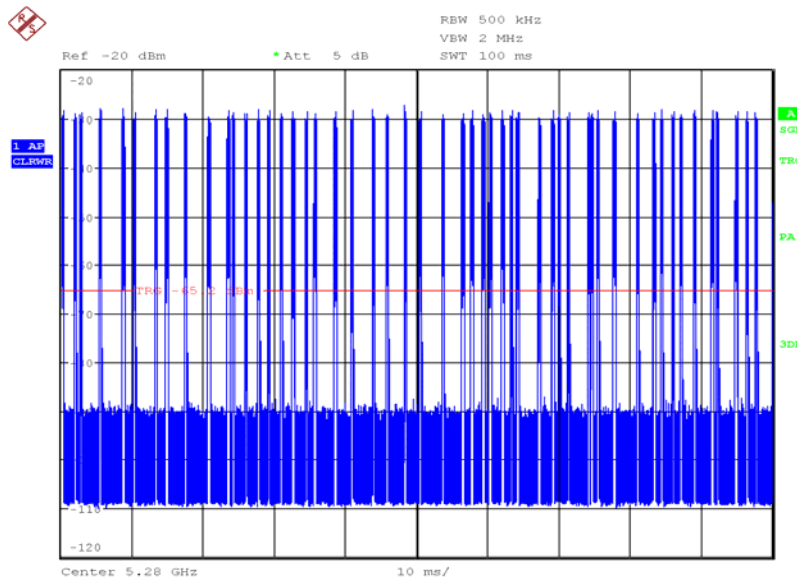

Date: 8.JUL.2015 10:56:59

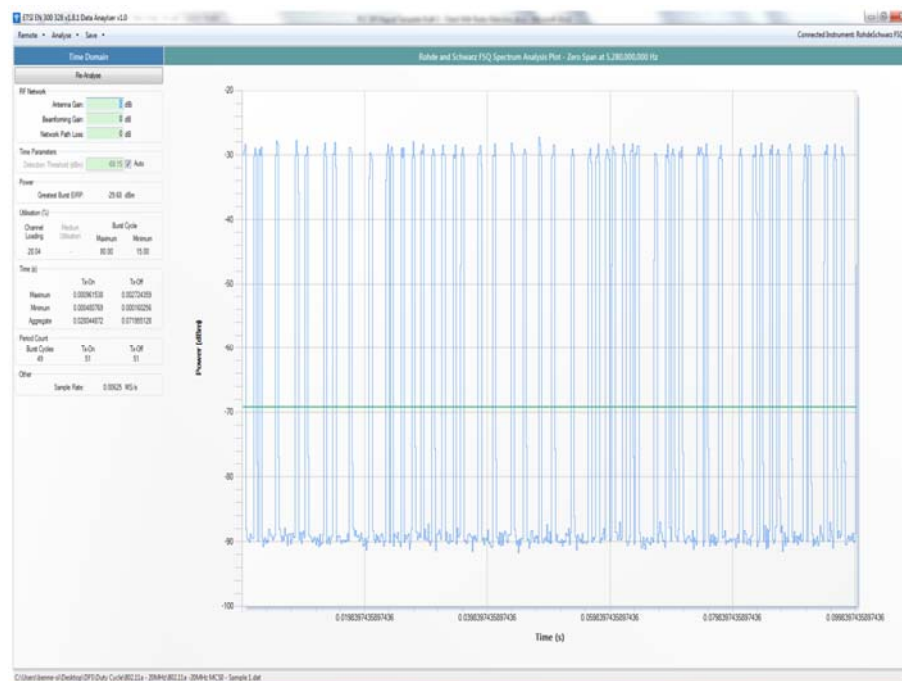



Product Service


802.11n – 20 MHz Bandwidth

Data Rate: 6.5 Mbps


Channel Loading

5280 MHz

The channel loading was 24.84 %.

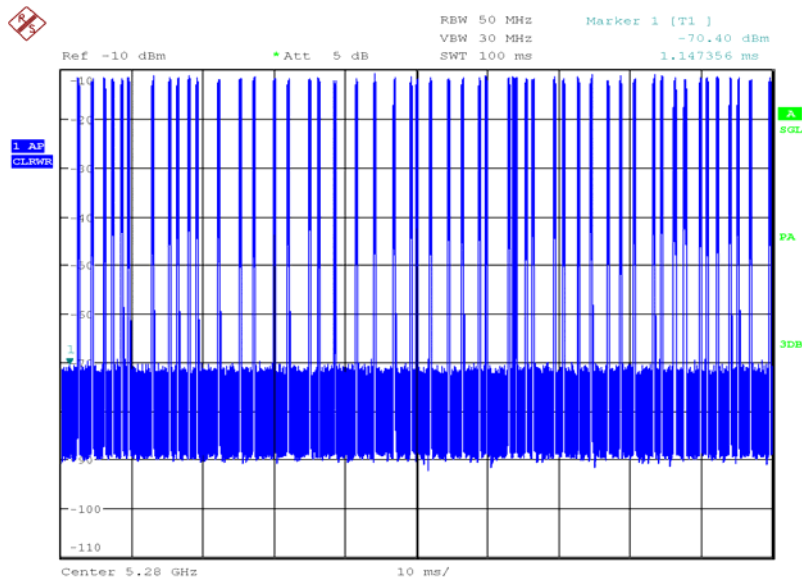

Date: 8.JUL.2015 10:10:23

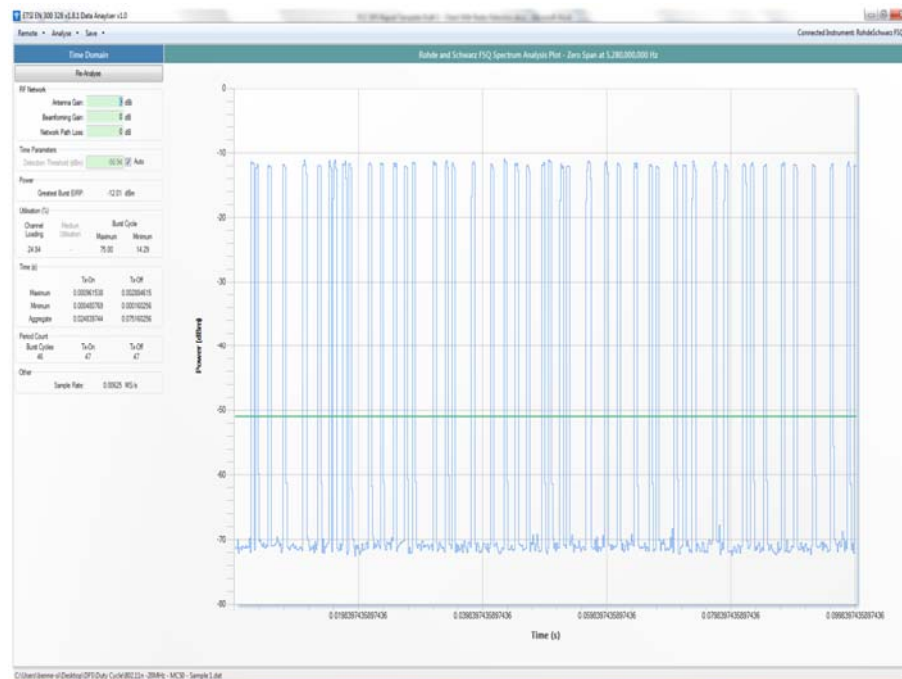



Product Service

802.11n – 40 MHz Bandwidth

Data Rate: 13 Mbps


Control Channel Verification

Control signals were observed on test frequency 5260 MHz which was configured as the Primary Control Channel. 5280 MHz was configured as the supplementary channel. As the loading was reduced, it was observed that the Supplementary channel switched off to leave the Primary Channel.

Channel Loading

5270 MHz

The channel loading was 26.44 %.

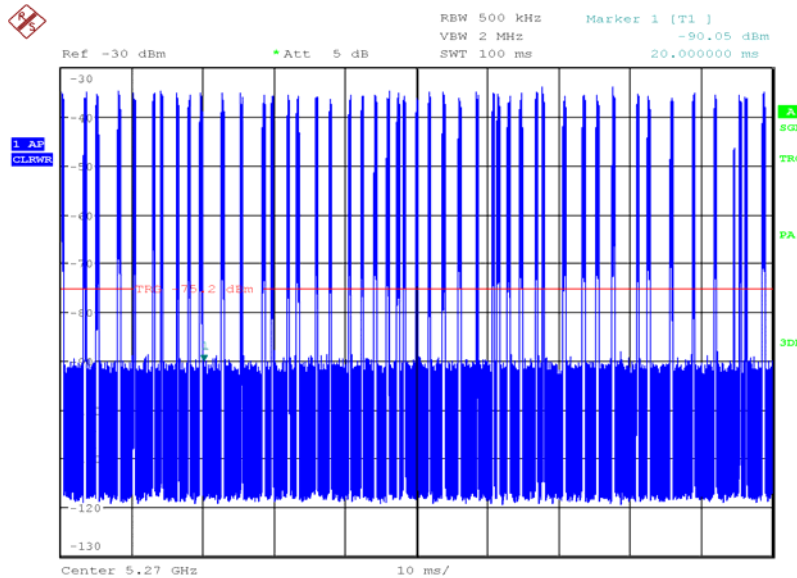

Date: 8.JUL.2015 10:47:39



Product Service

SECTION 2

TEST DETAILS

DFS Testing of the
U-Blox WiBear11n-DF1
In accordance with FCC 47 CFR Part 15E and Industry Canada RSS-247



2.1 U-NII DETECTION BANDWIDTH

2.1.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.407 (h)(2)

2.1.2 Equipment Under Test and Modification State

WiBear11n-DF1 S/N: 0489341 - Modification State 0

2.1.3 Date of Test

8 July 2015

2.1.4 Environmental Conditions

| | |
|---------------------|---------|
| Ambient Temperature | 22.4 °C |
| Relative Humidity | 51.5 % |

2.1.5 Test Requirements

The requirements according to KDB 905462, clause 5.3, Table 4:

The EUT must meet the minimum detection requirement within a minimum 100% of the U-NII 99% transmission power bandwidth.

During the U-NII Detection Bandwidth detection test, any one of radar types 0 - 4 can be used and for each frequency step the minimum percentage of detection is 90 %. Measurements are performed with no data traffic

The requirements according to KDB 905462, clause 7.8.1:

The U-NII Detection Bandwidth must meet the U-NII Detection Bandwidth criterion specified in Table 4. Otherwise, the EUT does not comply with DFS requirements. This is essential to ensure that the EUT is capable of detecting Radar Waveforms across the same frequency spectrum that contains the significant energy from the system. In the case that the U-NII Detection Bandwidth is greater than or equal to the 99 % power bandwidth for the measured F_H and F_L , the test can be truncated and the U-NII Detection Bandwidth can be reported as the measured F_H and F_L .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

Where F_H is highest frequency and F_L is the lowest frequency, at which detection is greater than or equal to the U-NII Detection Bandwidth criterion.



2.1.6 Test Procedure

To determine the required detection bandwidth, the 99% occupied bandwidth was measured with the required resolution bandwidth of 200 kHz in conjunction with the occupied bandwidth measurement method described in KDB 789033 D02, Clause II.D.

The 99% occupied bandwidth of the fundamental emission was measured using a 99 % occupied bandwidth measurement function on a spectrum analyser. The spectrum analyser employed a peak detector utilising resolution and video bandwidths of 200 kHz and 1 MHz respectively.

The U-NII Detection Bandwidth was measured according to the method described in to KDB 905462, Clause 7.8.1.

The EUT was configured as a standalone device with no associations with any other devices and with no channel loading. Starting at the centre frequency of the EUT operating channel, a single radar burst of a short pulse radar test signal (types 0 to 4) was produced with a level of the required DFS Detection Threshold, at the antenna port of the EUT. The EUT response from this radar test signal was noted.

This procedure was repeated for a minimum of 10 trials, while adjusting the radar test signal frequency in ± 5 MHz steps until the detection rate fell below the U-NII Detection Bandwidth criterion. At this point the previous procedure was repeated in 1 MHz steps until the highest and lowest frequencies were determined by the points at which detection was greater than or equal to the U-NII Detection Bandwidth criterion.

In cases where the fundamental emission channel bandwidth exceeds DFS band edges and where it is not possible to select a channel that has the entire emission bandwidth within the DFS band (e.g. 802.11ac 160 MHz); the detection bandwidth was tested up to the DFS band edges.



Product Service

2.1.7 Test Results


802.11a

Data Rate: 6 Mbps

5280 MHz

99 % Occupied Bandwidth

The measured occupied bandwidth was 16.634 MHz.

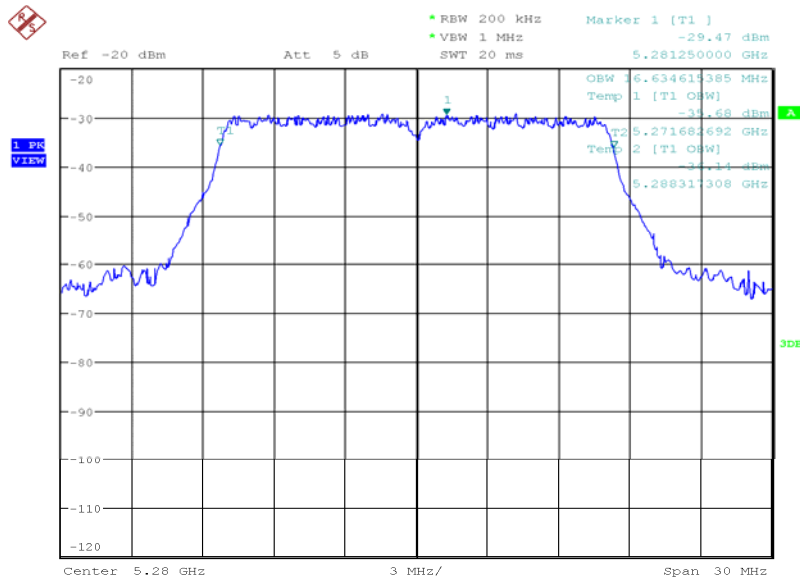

Date: 8.JUL.2015 11:09:45



Product Service

U-NII Detection Bandwidth

The specific parameters of the waveforms used during these measurements are detailed in Appendix A of this report.

The highest detection frequency is 5289 MHz and the lowest detection frequency is 5271 MHz, yielding a Detection Bandwidth of 18 MHz. The specific measurements are detailed below.

| Radar Waveform | Radar Frequency Offset (MHz) | Number of Detections | Number of Non-detections | Detection Rate (%) |
|--------------------------------|------------------------------|----------------------|--------------------------|--------------------|
| FCC Short Pulse Radar (Type 0) | -10 | 0 | 10 | 0 |
| | -9 | 10 | 0 | 100 |
| | -8 | 10 | 0 | 100 |
| | -7 | 10 | 0 | 100 |
| | -6 | 10 | 0 | 100 |
| | -5 | 10 | 0 | 100 |
| | 0 | 10 | 0 | 100 |
| | 5 | 10 | 0 | 100 |
| | 6 | 10 | 0 | 100 |
| | 7 | 10 | 0 | 100 |
| | 8 | 10 | 0 | 100 |
| | 9 | 10 | 0 | 100 |
| | 10 | 0 | 10 | 0 |



Product Service


802.11n – 20 MHz Bandwidth

Data Rate: 6.5 Mbps

5280 MHz

99 % Occupied Bandwidth

The measured occupied bandwidth was 17.788 MHz.

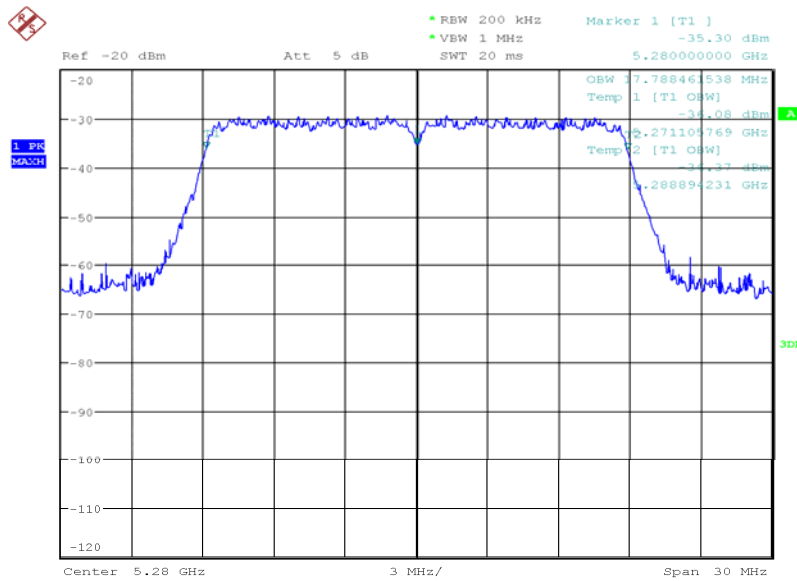

Date: 8.JUL.2015 11:14:28



Product Service

U-NII Detection Bandwidth

The specific parameters of the waveforms used during these measurements are detailed in Appendix A of this report.

The highest detection frequency is 5289 MHz and the lowest detection frequency is 5271 MHz, yielding a Detection Bandwidth of 18 MHz. The specific measurements are detailed below.

| Radar Waveform | Radar Frequency Offset (MHz) | Number of Detections | Number of Non-detections | Detection Rate (%) |
|--------------------------------|------------------------------|----------------------|--------------------------|--------------------|
| FCC Short Pulse Radar (Type 0) | -10 | 0 | 10 | 0 |
| | -9 | 10 | 0 | 100 |
| | -8 | 10 | 0 | 100 |
| | -7 | 10 | 0 | 100 |
| | -6 | 10 | 0 | 100 |
| | -5 | 10 | 0 | 100 |
| | 0 | 10 | 0 | 100 |
| | 5 | 10 | 0 | 100 |
| | 6 | 10 | 0 | 100 |
| | 7 | 10 | 0 | 100 |
| | 8 | 10 | 0 | 100 |
| | 9 | 10 | 0 | 100 |
| | 10 | 0 | 10 | 0 |



Product Service


802.11n – 40 MHz Bandwidth

Data Rate: 13.5 Mbps

5270 MHz

99 % Occupied Bandwidth

The measured occupied bandwidth was 36.731 MHz.

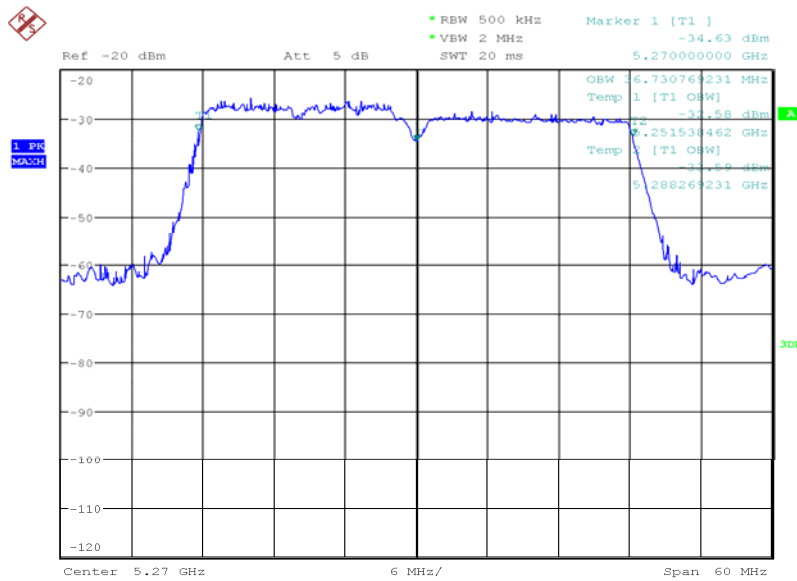

Date: 8.JUL.2015 11:18:16



U-NII Detection Bandwidth

The specific parameters of the waveforms used during these measurements are detailed in Appendix A of this report.

The highest detection frequency is 5289 MHz and the lowest detection frequency is 5251 MHz, yielding a Detection Bandwidth of 38 MHz. The specific measurements are detailed below.

| Radar Waveform | Radar Frequency Offset (MHz) | Number of Detections | Number of Non-detections | Detection Rate (%) |
|--------------------------------|------------------------------|----------------------|--------------------------|--------------------|
| FCC Short Pulse Radar (Type 0) | -20 | 0 | 10 | 0 |
| | -19 | 10 | 0 | 100 |
| | -18 | 10 | 0 | 100 |
| | -17 | 10 | 0 | 100 |
| | -16 | 10 | 0 | 100 |
| | -15 | 10 | 0 | 100 |
| | -10 | 10 | 0 | 100 |
| | -5 | 10 | 0 | 100 |
| | 0 | 10 | 0 | 100 |
| | 5 | 10 | 0 | 100 |
| | 10 | 10 | 0 | 100 |
| | 15 | 10 | 0 | 100 |
| | 16 | 10 | 0 | 100 |
| | 17 | 10 | 0 | 100 |
| | 18 | 10 | 0 | 100 |
| | 19 | 10 | 0 | 100 |
| | 20 | 0 | 10 | 0 |



2.2 INITIAL CHANNEL AVAILABILITY CHECK TIME

2.2.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.407 (h)(2)(ii)
Industry Canada RSS-247, Clause 6.3 (2)(ii)

2.2.2 Equipment Under Test and Modification State

WiBear11n-DF1 S/N: 0489341 - Modification State 0

2.2.3 Date of Test

8 July 2015

2.2.4 Environmental Conditions

| | |
|---------------------|---------|
| Ambient Temperature | 23.7 °C |
| Relative Humidity | 46.3 % |

2.2.5 Test Requirements

The requirements according to FCC 47 CFR Part 15, clause 15.407 (h)(2)(ii) are described below.

A master mode U-NII device shall check if there is a radar system already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel. The U-NII device may start using the channel if no radar signal with a power level greater than the DFS detection threshold, is detected within 60 seconds.

In addition, according to KDB 905462, clause 5.3, Table 4; the channel availability check shall be performed for a minimum of 60 seconds by the U-NII device.

2.2.6 Test Procedure

The measurement was made in accordance with the method described in to KDB 905462, Clause 7.8.2.1.

The Initial Channel Availability Check Time tests that the EUT does not emit beacon, control, or data signals on the test Channel until the power-up sequence has been completed, therefore this test does not use any Radar Waveforms and was only performed once for each mode and test frequency.

A spectrum analyser was used for measurements. The spectrum analyser centre frequency was set to the intended test frequency and utilised a peak detector with resolution and video bandwidths of 3 MHz. During the channel availability testing a measurement sweep duration no less than 2.5 minutes was observed. The spectrum analyser sweep was started at the same time that power was applied to the EUT.

The manufacturer declared that the power-cycle time is 0 seconds.



Product Service

When performing channel availability check measurements, the EUT was pre-configured to operate in each mode and set to operate on the test frequency before commencing the Channel Availability Check. Upon the EUT CAC being started, the spectrum analyser sweep was triggered whereby the channel activity was monitored. Using delta markers on the measurement sweep, the channel availability check time was determined. The start of sweep, (0 seconds), was the start of the EUT's CAC period.


The spectrum analyser nominal noise floor was characterised with a 10 second sweep time before testing, using the same resolution and video bandwidths utilised during testing. During this process, there were no transmissions by the EUT or companion devices.

2.2.7 Test Results

802.11a

Data Rate: 6 Mbps

The initial channel availability check time was 60.24 seconds.

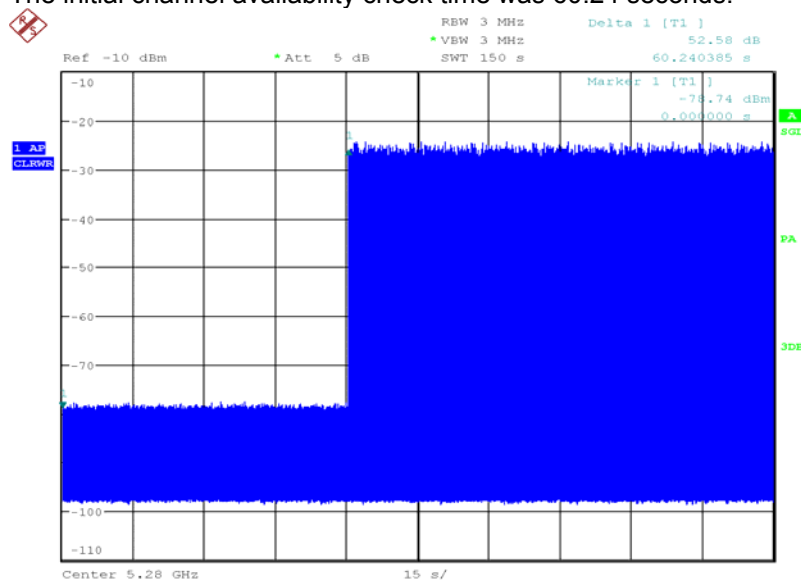

Date: 8.JUL.2015 14:27:27




Product Service

802.11n – 20 MHz Bandwidth

Data Rate: 6.5 Mbps

The initial channel availability check time was 60.24 seconds.

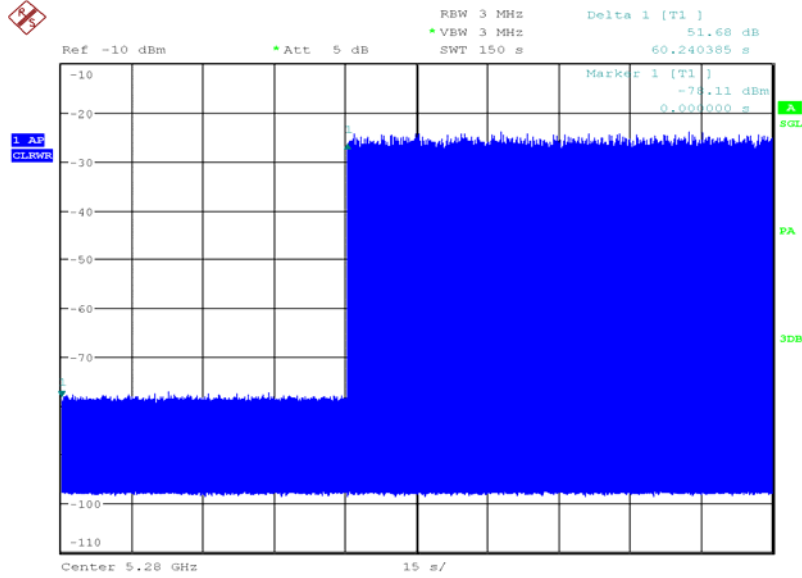

Date: 8.JUL.2015 14:37:17



2.3 RADAR BURST AT THE BEGINNING OF THE CHANNEL AVAILABILITY CHECK TIME

2.3.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.407 (h)(2)(ii)
Industry Canada RSS-247, Clause 6.3 (2)(ii)

2.3.2 Equipment Under Test and Modification State

WiBear11n-DF1 S/N: 0489341 - Modification State 0

2.3.3 Date of Test

8 July 2015

2.3.4 Environmental Conditions

| | |
|---------------------|---------|
| Ambient Temperature | 23.8 °C |
| Relative Humidity | 45.4 % |

2.3.5 Test Requirements

The requirements according to FCC 47 CFR, clause 15.407 (h)(2)(ii) are described below.

A master mode U-NII device shall check if there is a radar system already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel. The U-NII device may start using the channel if no radar signal with a power level greater than the DFS detection threshold, is detected within 60 seconds.

In addition, according to KDB 905462, clause 5.3, Table 4; the channel availability check shall be performed for a minimum of 60 seconds by the U-NII device.

2.3.6 Test Procedure

The measurement was made in accordance with the method described in to KDB 905462, Clause 7.8.2.2.

The radar burst at the beginning of the channel availability check time verifies successful radar detection on the test channel during a period equal to the channel availability check time as well as avoidance of operation on that channel when a radar burst with a level equal to the DFS detection threshold + 1 dB occurs at the beginning of the channel availability check time.

A spectrum analyser was used for measurements. The spectrum analyser centre frequency was set to the intended test frequency and utilised a peak detector with resolution and video bandwidths of 3 MHz.

When performing channel availability check measurements, the EUT was pre-configured to operate in each mode and set to operate on the test frequency before commencing the Channel Availability Check. Upon the EUT CAC being started, the spectrum analyser sweep was triggered whereby the channel activity was monitored. Using delta markers on the measurement sweep, the Radar signal injection time was indicated. The start of sweep, (0 seconds), was the start of the EUT's CAC period.



Product Service

A single short pulse radar type 0 was applied to the EUT receiver within 6 seconds of the beginning of the channel availability check time, at a level equal to the detection threshold level + 1 dB, accounting for equipment variation/errors.


The measurement observation period was no less than 2.5 minutes proceeding the time at with the radar test signal was generated. It was verified that no EUT transmissions occurred on the test channel during this 2.5 minutes measurement period.

2.3.7 Test Results

802.11a

Data Rate: 6 Mbps

It was verified that no transmissions were produced from the EUT on the test channel during the channel availability check time.

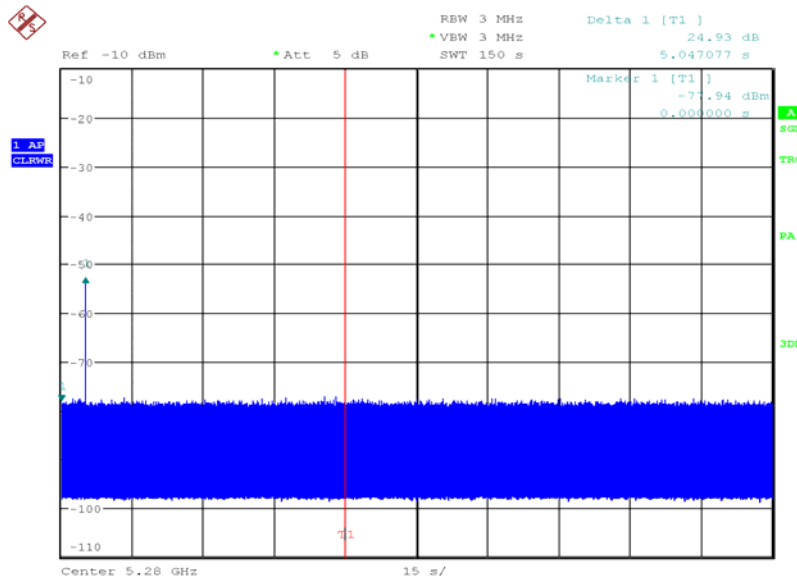

Date: 8.JUL.2015 15:12:02

Note: T1 denotes 60 second CAC period. Marker delta denotes Radar injection time relative to CAC Start time.




Product Service

802.11n – 20 MHz Bandwidth

Data Rate: 6.5 Mbps

It was verified that no transmissions were produced from the EUT on the test channel during the channel availability check time.

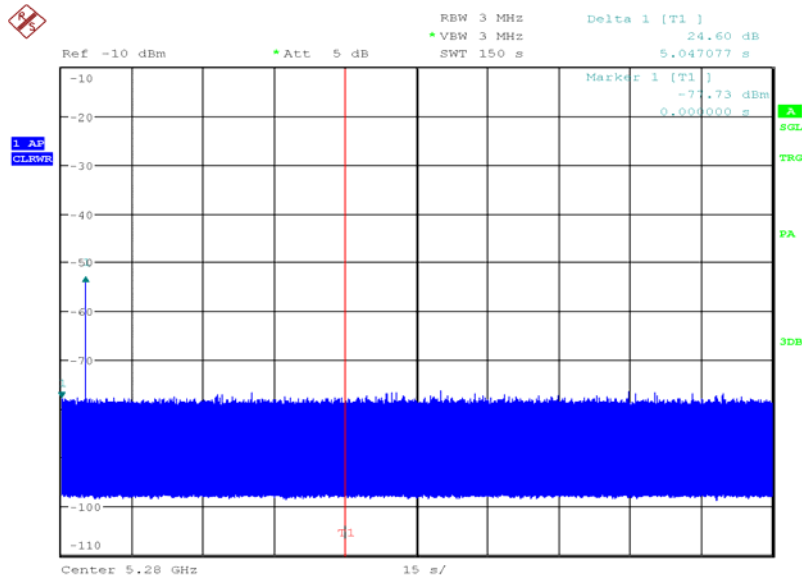

Date: 8.JUL.2015 15:20:30

Note: T1 denotes 60 second CAC period. Marker delta denotes Radar injection time relative to CAC Start time.



2.4 RADAR BURST AT THE END OF THE CHANNEL AVAILABILITY CHECK TIME

2.4.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.407 (h)(2)(ii)
Industry Canada RSS-247, Clause 6.3 (2)(ii)

2.4.2 Equipment Under Test and Modification State

WiBear11n-DF1 S/N: 0489341 - Modification State 0

2.4.3 Date of Test

8 July 2015

2.4.4 Environmental Conditions

| | |
|---------------------|---------|
| Ambient Temperature | 24.1 °C |
| Relative Humidity | 44.0 % |

2.4.5 Test Requirements

The measurement was made in accordance with the method described in to KDB 905462, Clause 7.8.2.1.

The requirements according to FCC 47 CFR Part 15, clause 15.407 (h)(2)(ii) are described below.

A master mode U-NII device shall check if there is a radar system already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel. The U-NII device may start using the channel if no radar signal with a power level greater than the DFS detection threshold, is detected within 60 seconds.

In addition, according to KDB 905462, clause 5.3, Table 4; the channel availability check shall be performed for a minimum of 60 seconds by the U-NII device.

2.4.6 Test Procedure

The radar burst at the end of the channel availability check time verifies successful radar detection on the test channel during a period equal to the channel availability check time as well as avoidance of operation on that channel when a radar burst with a level equal to the DFS detection threshold + 1 dB occurs at the end of the channel availability check time.

A spectrum analyser was used for measurements. The spectrum analyser centre frequency was set to the intended test frequency and utilised a peak detector with resolution and video bandwidths of 3 MHz.

When performing channel availability check measurements, the EUT was pre-configured to operate in each mode and set to operate on the test frequency before commencing the Channel Availability Check. Upon the EUT CAC being started, the spectrum analyser sweep was triggered whereby the channel activity was monitored. Using delta markers on the measurement sweep, the Radar signal injection time was indicated. The start of sweep, (0 seconds), was the start of the EUT's CAC period.



Product Service

A single short pulse radar type 0 was applied to the EUT receiver within 6 seconds of the end of the channel availability check time, at a level equal to the detection threshold level + 1 dB, accounting for equipment variation/errors.


The measurement observation period was no less than 2.5 minutes proceeding the time at with the radar test signal was generated. It was verified that no EUT transmissions occurred on the test channel during this 2.5 minutes measurement period.

2.4.7 Test Results

802.11a

Data Rate: 6 Mbps

It was verified that no transmissions were produced from the EUT on the test channel during the channel availability check time.

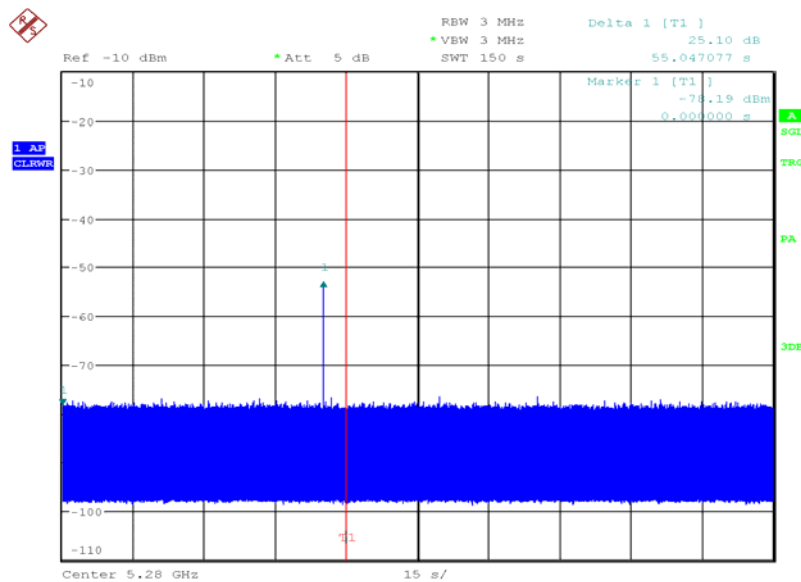

Date: 8.JUL.2015 16:13:44

Note: T1 denotes 60 second CAC period. Marker delta denotes Radar injection time relative to CAC Start time.




Product Service

802.11n – 20 MHz Bandwidth

Data Rate: 6.5 Mbps

It was verified that no transmissions were produced from the EUT on the test channel during the channel availability check time.

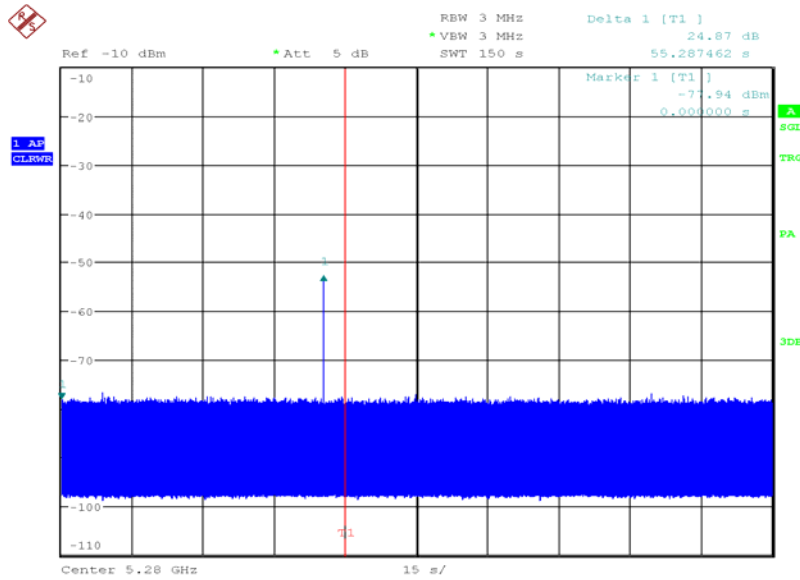

Date: 8.JUL.2015 16:21:48

Note: T1 denotes 60 second CAC period. Marker delta denotes Radar injection time relative to CAC Start time.



2.5 IN-SERVICE MONITORING FOR CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

2.5.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.407 (h)(2)(ii)
Industry Canada RSS-247, Clause 6.3 (2)(i)(iii)(iv)

2.5.2 Equipment Under Test and Modification State

WiBear11n-DF1 S/N: 0489341 - Modification State 0

2.5.3 Date of Test

8 July 2015

2.5.4 Environmental Conditions

| | |
|---------------------|---------|
| Ambient Temperature | 23.9 °C |
| Relative Humidity | 40.9 % |

2.5.5 Test Requirements

The requirements according to FCC 47 CFR Part 15, clause 15.407 (h)(2)(iii). After a radar's presence is detected, all transmissions shall cease on the operating channel within 10 seconds. Transmissions during this period shall consist of normal traffic for a maximum of 200 ms after detection of the radar signal. In addition, intermittent management and control signals can be sent during the remaining time to facilitate vacating the operating channel.

The requirements according to FCC 47 CFR Part 15, clause 15.407 (h)(2)(iv). A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.

In addition, according to KDB 905462, clause 5.3, Table 4; the following requirements apply:

- The channel move time is 10 seconds. The channel move time begins at the end of the final pulse of the type 0 radar test signal.
- The channel closing transmission time, comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
- The non-occupancy period is a minimum of 30 minutes.



Product Service

2.5.6 Test Procedure

The measurement was made in accordance with the method described in to KDB 905462, Clause 7.8.3.

Two test sequences were conducted to verify in-service monitoring:

1. Channel move time and channel closing transmission time.
2. Non-occupancy period.

Each test frequency was verified to contain control signals during the control signals and channel loading verification. The presence of control signals were verified by disabling channel loading and monitoring with a spectrum analyser.

The channel was loaded with data transmissions from the master mode device to the associated client device. A type 0 radar test signal was applied to the EUT/Master mode device, at a level equal to the detection threshold + 1 dB, accounting for equipment variation/errors.

Channel Move Time and Channel Closing Transmission Time

The transmissions of the EUT were observed for a duration greater than 10 seconds, after the final radar pulse. The transmissions from the EUT during the observation time were measured, such that the channel move time and channel closing transmission time were determined.

Non-occupancy Period

The test frequency was monitored for no less than 30 minutes after the channel move time to verify that the EUT did not resume transmissions during the non-occupancy period.



Product Service

2.5.7 Test Results

802.11a

Data Rate: 6 Mbps


| | |
|-----------------------------------|---------------|
| Channel Move Time | 0.547 seconds |
| Channel Closing Transmission Time | 1.431 ms |

Channel Move and Close Time Summary

| Radar Type | Channel Move Time (seconds) | Channel Closing Time (ms) |
|------------|-----------------------------|---------------------------|
| 1 | 0.540 | 1.432 |
| 2 | 0.537 | 1.501 |
| 3 | 0.539 | 1.676 |
| 4 | 0.540 | 1.428 |
| 5 | 0.767 | 0 |
| 6 | 0.678 | 1.072 |

Channel Move Time and Channel Closing Transmission Time


Radar Test Signal Verification Plot

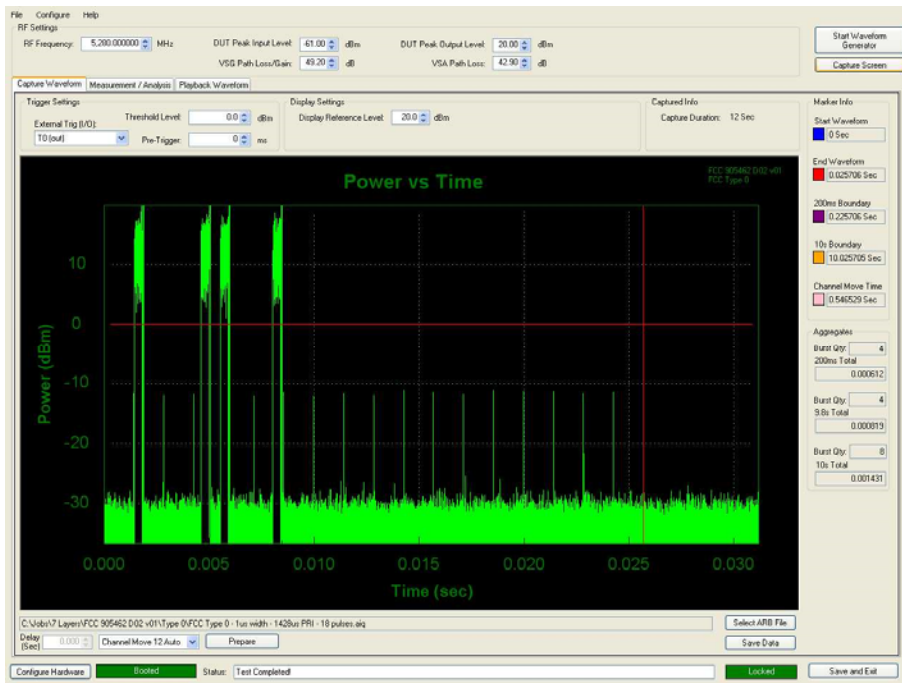




Product Service

250 ms Test Observation Period

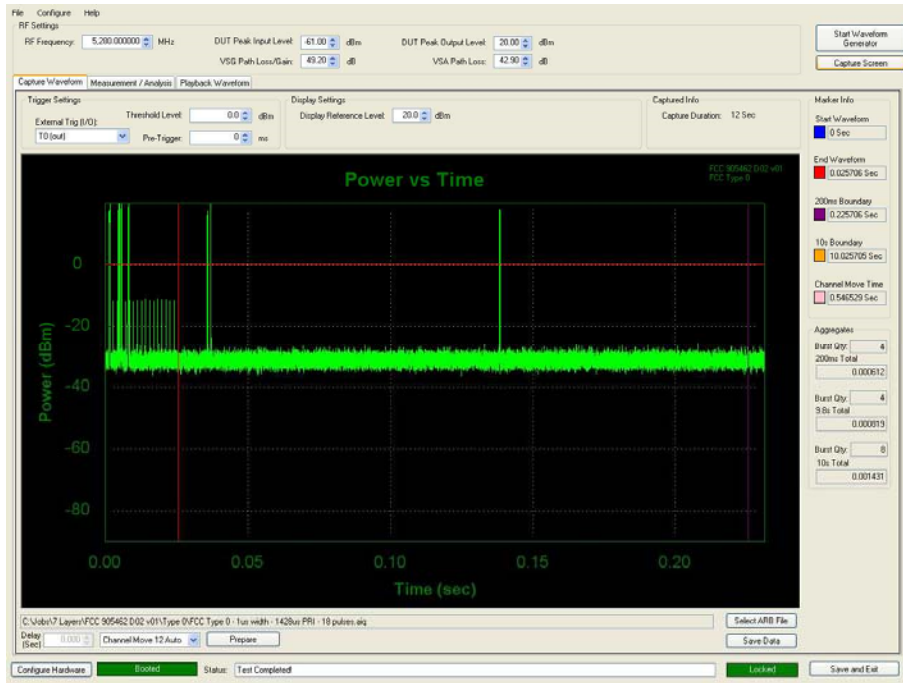

12 s Test Observation Period

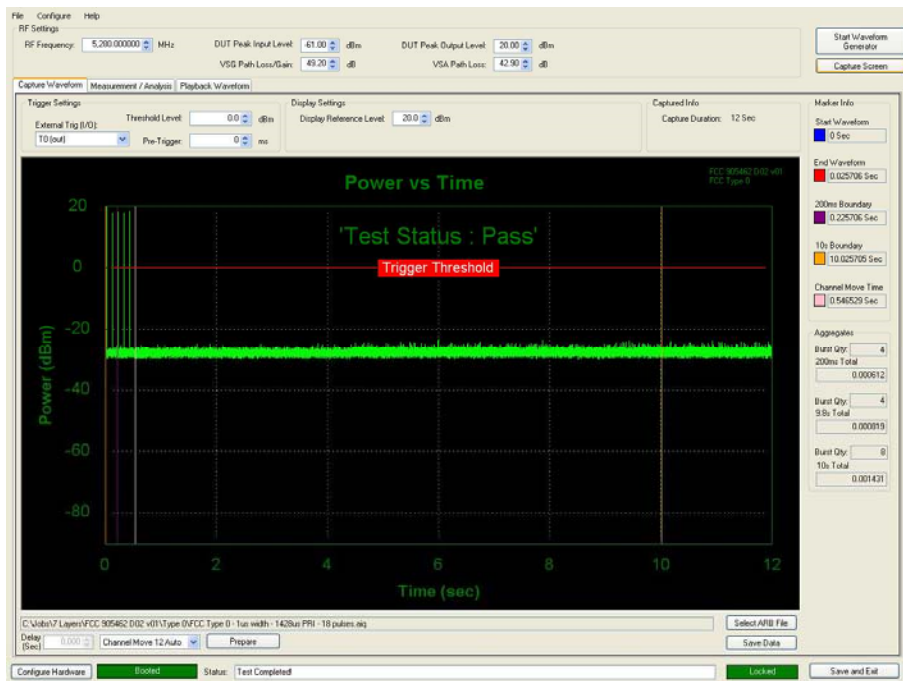




Product Service

Non-occupancy Period

The EUT did not resume transmissions during the non-occupancy period.

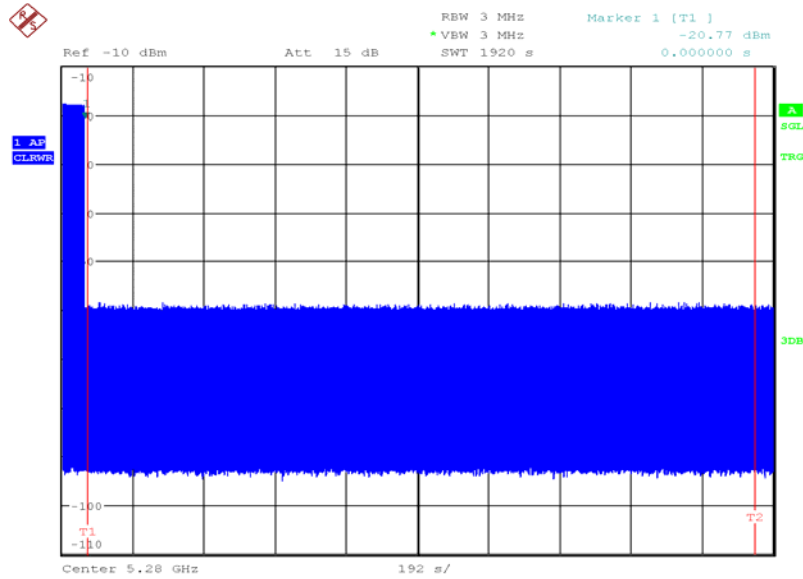

Date: 9.JUL.2015 08:09:19



Product Service

802.11n – 40 MHz Bandwidth

Data Rate: 13.5 Mbps


| | |
|-----------------------------------|---------------|
| Channel Move Time | 0.547 seconds |
| Channel Closing Transmission Time | 1.467 ms |

Channel Move and Close Time Summary

| Radars Type | Channel Move Time (seconds) | Channel Closing Time (ms) |
|-------------|-----------------------------|---------------------------|
| 1 | 0.541 | 1.467 |
| 2 | 0.538 | 1.722 |
| 3 | 0.539 | 1.600 |
| 4 | 0.541 | 1.535 |
| 5 | 0.767 | 0 |
| 6 | 0.677 | 1.070 |

Channel Move Time and Channel Closing Transmission Time


Radars Test Signal Verification Plot

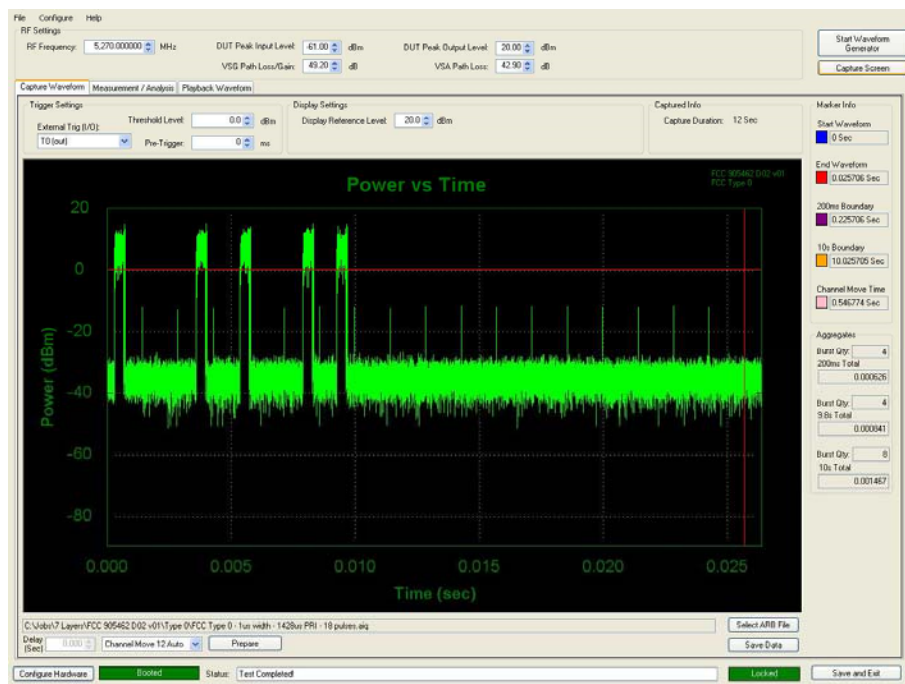




Product Service

250 ms Test Observation Period

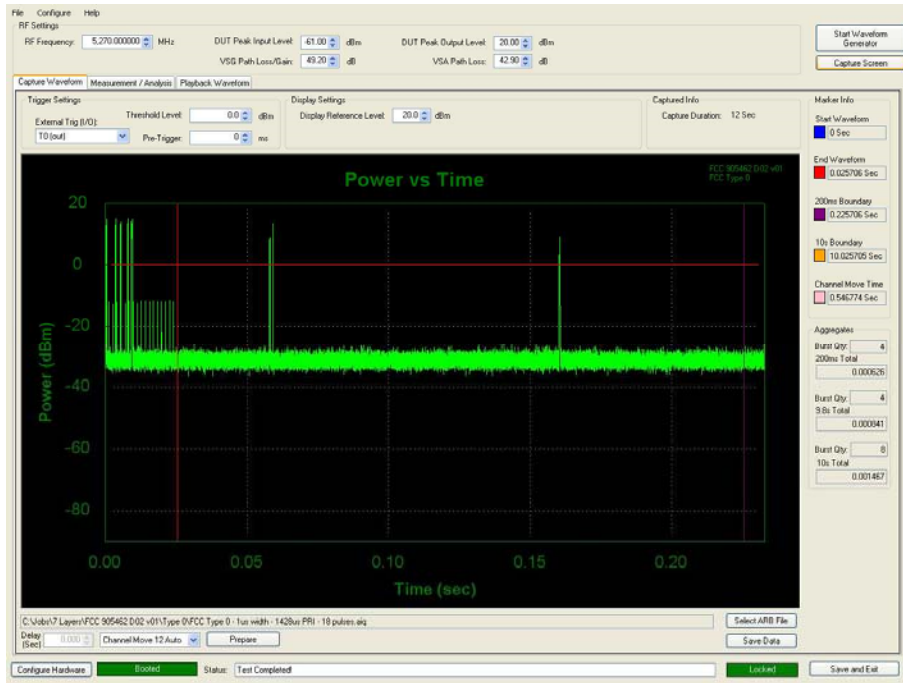

12 s Test Observation Period

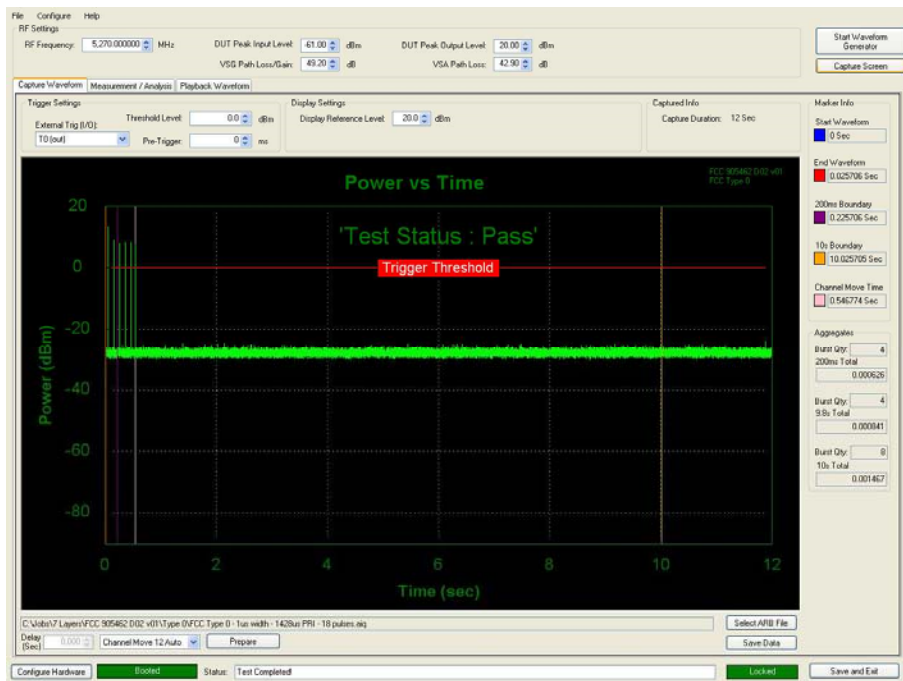




Product Service

Non-occupancy Period

The EUT did not resume transmissions during the non-occupancy period.

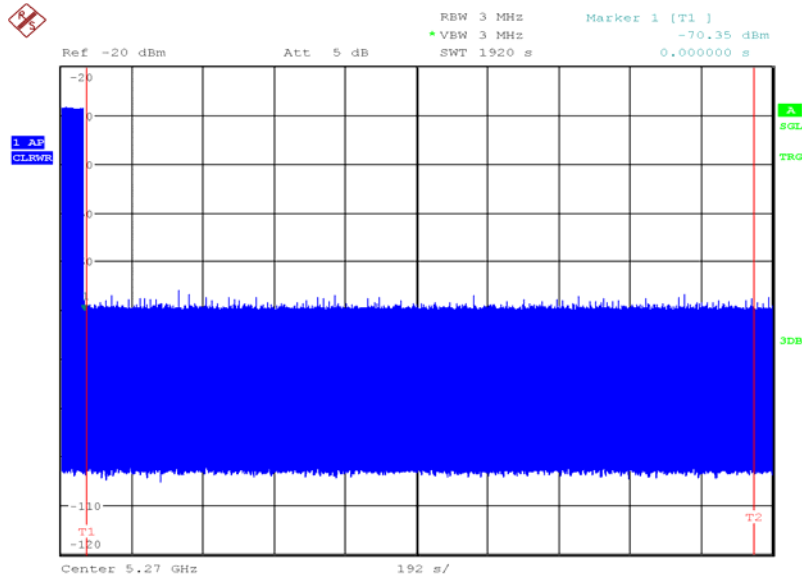

Date: 8.JUL.2015 18:29:44

Note: Marker 1 indicates the end of the Radar burst. T1 is situated 10 seconds after the end of the Radar Burst. T2 equates to T1 + 30 minutes.



Product Service

2.6 STATISTICAL PERFORMANCE CHECK

2.6.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.407 (h)(2)

2.6.2 Equipment Under Test and Modification State

WiBear11n-DF1 S/N: 0489341 - Modification State 0

2.6.3 Date of Test

9 July & 10 July 2015 (Types 1, 2, 3, 4, 6)
30th July 2015 (Type 5)

2.6.4 Environmental Conditions

Ambient Temperature 21.5 - 23.7 °C
Relative Humidity 37.9 – 44.7 %

2.6.5 Test Requirements

The requirements according to FCC 47 CFR Part 15, clause 15.407 (h)(2). U-NII devices operating in the 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

In addition, according to KDB 905462, clause 6; Tables 5-7:

| Radar Type | Pulse Length Type | Minimum Percentage of Successful Detection (%) | Minimum Number of Trials |
|-----------------|-------------------|--|--------------------------|
| 0 | Short Pulse | - | - |
| 1 | Short Pulse | 60 | 30 |
| 2 | Short Pulse | 60 | 30 |
| 3 | Short Pulse | 60 | 30 |
| 4 | Short Pulse | 60 | 30 |
| Aggregate (1-4) | Short Pulse | 80 | 120 |
| 5 | Long Pulse | 80 | 30 |
| 6 | Frequency Hopping | 70 | 30 |



Product Service

2.6.6 Test Procedure

The measurement was made in accordance with the method described in to KDB 905462, Clause 7.8.4.

The EUT is a Master Device, a companion U-NII device operating as a Client Device was used and the Client was associated with the EUT (Master).

The channel was loaded with data transmissions from the master mode device to the associated client device.

Radar types 1-6 radar test signal were individually applied to the EUT/Master mode device, at a level equal to the detection threshold + 1 dB, accounting for equipment variation/errors.

The test frequency was observed for at least 10 seconds after generating each short pulse radar test signal to ensure detection had occurred. The test frequency was observed for at least 22 seconds after generating each long pulse radar test signal to ensure detection had occurred.

Once the performance requirements checks were completed, the statistical data for each radar type was calculated using the percentage of successful detection methods described in KDB 905462, clause 7.8.4.

2.6.7 Test Results

802.11a

Data Rate: 6 Mbps

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 1 | 1 | 5280 | Y | 16 | 5276 | Y |
| | 2 | 5280 | Y | 17 | 5276 | Y |
| | 3 | 5280 | Y | 18 | 5276 | Y |
| | 4 | 5280 | Y | 19 | 5276 | Y |
| | 5 | 5280 | Y | 20 | 5276 | Y |
| | 6 | 5280 | Y | 21 | 5284 | Y |
| | 7 | 5280 | Y | 22 | 5284 | Y |
| | 8 | 5280 | Y | 23 | 5284 | Y |
| | 9 | 5280 | Y | 24 | 5284 | Y |
| | 10 | 5280 | Y | 25 | 5284 | Y |
| | 11 | 5271 | Y | 26 | 5289 | Y |
| | 12 | 5271 | Y | 27 | 5289 | Y |
| | 13 | 5271 | Y | 28 | 5289 | Y |
| | 14 | 5271 | Y | 29 | 5289 | Y |
| | 15 | 5271 | Y | 30 | 5289 | Y |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 30 (100 %) |



| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 2 | 1 | 5280 | Y | 16 | 5276 | Y |
| | 2 | 5280 | Y | 17 | 5276 | Y |
| | 3 | 5280 | Y | 18 | 5276 | Y |
| | 4 | 5280 | Y | 19 | 5276 | Y |
| | 5 | 5280 | Y | 20 | 5276 | Y |
| | 6 | 5280 | Y | 21 | 5284 | Y |
| | 7 | 5280 | Y | 22 | 5284 | Y |
| | 8 | 5280 | Y | 23 | 5284 | Y |
| | 9 | 5280 | Y | 24 | 5284 | Y |
| | 10 | 5280 | Y | 25 | 5284 | Y |
| | 11 | 5271 | Y | 26 | 5289 | Y |
| | 12 | 5271 | Y | 27 | 5289 | Y |
| | 13 | 5271 | Y | 28 | 5289 | Y |
| | 14 | 5271 | Y | 29 | 5289 | Y |
| | 15 | 5271 | Y | 30 | 5289 | Y |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 30 (100 %) |

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 3 | 1 | 5280 | Y | 16 | 5276 | Y |
| | 2 | 5280 | Y | 17 | 5276 | Y |
| | 3 | 5280 | Y | 18 | 5276 | Y |
| | 4 | 5280 | Y | 19 | 5276 | Y |
| | 5 | 5280 | Y | 20 | 5276 | Y |
| | 6 | 5280 | Y | 21 | 5284 | Y |
| | 7 | 5280 | Y | 22 | 5284 | Y |
| | 8 | 5280 | Y | 23 | 5284 | Y |
| | 9 | 5280 | Y | 24 | 5284 | Y |
| | 10 | 5280 | Y | 25 | 5284 | Y |
| | 11 | 5271 | Y | 26 | 5289 | Y |
| | 12 | 5271 | Y | 27 | 5289 | N |
| | 13 | 5271 | Y | 28 | 5289 | Y |
| | 14 | 5271 | Y | 29 | 5289 | Y |
| | 15 | 5271 | Y | 30 | 5289 | Y |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 29 (96.7 %) |



Product Service

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 4 | 1 | 5280 | Y | 16 | 5276 | Y |
| | 2 | 5280 | Y | 17 | 5276 | Y |
| | 3 | 5280 | Y | 18 | 5276 | Y |
| | 4 | 5280 | Y | 19 | 5276 | Y |
| | 5 | 5280 | Y | 20 | 5276 | Y |
| | 6 | 5280 | Y | 21 | 5284 | Y |
| | 7 | 5280 | Y | 22 | 5284 | Y |
| | 8 | 5280 | Y | 23 | 5284 | Y |
| | 9 | 5280 | Y | 24 | 5284 | Y |
| | 10 | 5280 | Y | 25 | 5284 | Y |
| | 11 | 5271 | Y | 26 | 5289 | Y |
| | 12 | 5271 | N | 27 | 5289 | Y |
| | 13 | 5271 | Y | 28 | 5289 | Y |
| | 14 | 5271 | Y | 29 | 5289 | Y |
| | 15 | 5271 | Y | 30 | 5289 | Y |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 29 (96.7 %) |

| Radar Type | Number Of Trials | Number Of Successful Detections | Minimum Percentage Of Successful Detection |
|--|------------------|---------------------------------|--|
| 1 | 30 | 30 | 100 % |
| 2 | 30 | 30 | 100 % |
| 3 | 30 | 29 | 96.7 % |
| 4 | 30 | 29 | 96.7 % |
| Aggregate (100 % + 100 % + 96.7 % + 96.7 %) / 4 = 98.4 % | | | |



Product Service

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 5 | 1 | 5285 | Y | 16 | 5277.1 | Y |
| | 2 | 5281.9 | Y | 17 | 5281.5 | Y |
| | 3 | 5282.2 | Y | 18 | 5278.1 | Y |
| | 4 | 5278.3 | Y | 19 | 5284.7 | Y |
| | 5 | 5274.4 | Y | 20 | 5276.2 | Y |
| | 6 | 5279.2 | Y | 21 | 5273.6 | Y |
| | 7 | 5275.1 | Y | 22 | 5283.7 | Y |
| | 8 | 5276 | Y | 23 | 5276.5 | Y |
| | 9 | 5286 | Y | 24 | 5279.5 | Y |
| | 10 | 5279.8 | Y | 25 | 5286.9 | Y |
| | 11 | 5286.5 | Y | 26 | 5282.4 | Y |
| | 12 | 5283 | Y | 27 | 5273.3 | Y |
| | 13 | 5281.6 | Y | 28 | 5285.8 | Y |
| | 14 | 5283.2 | Y | 29 | 5274.1 | Y |
| | 15 | 5283.4 | Y | 30 | 5286.2 | Y |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 30 (100%) |



| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-------------------|-----------------|----------------|-------------------|-----------------|
| 6 | 1 | Frequency Hopping | Y | 16 | Frequency Hopping | Y |
| | 2 | Frequency Hopping | Y | 17 | Frequency Hopping | Y |
| | 3 | Frequency Hopping | Y | 18 | Frequency Hopping | Y |
| | 4 | Frequency Hopping | Y | 19 | Frequency Hopping | Y |
| | 5 | Frequency Hopping | Y | 20 | Frequency Hopping | Y |
| | 6 | Frequency Hopping | Y | 21 | Frequency Hopping | Y |
| | 7 | Frequency Hopping | Y | 22 | Frequency Hopping | Y |
| | 8 | Frequency Hopping | Y | 23 | Frequency Hopping | Y |
| | 9 | Frequency Hopping | Y | 24 | Frequency Hopping | Y |
| | 10 | Frequency Hopping | Y | 25 | Frequency Hopping | Y |
| | 11 | Frequency Hopping | Y | 26 | Frequency Hopping | Y |
| | 12 | Frequency Hopping | Y | 27 | Frequency Hopping | Y |
| | 13 | Frequency Hopping | Y | 28 | Frequency Hopping | Y |
| | 14 | Frequency Hopping | Y | 29 | Frequency Hopping | Y |
| | 15 | Frequency Hopping | Y | 30 | Frequency Hopping | Y |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 30 (100%) |



802.11n – 20 MHz Bandwidth

Data Rate: 6.5 Mbps

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 1 | 1 | 5280 | Y | 16 | 5276 | Y |
| | 2 | 5280 | Y | 17 | 5276 | Y |
| | 3 | 5280 | Y | 18 | 5276 | Y |
| | 4 | 5280 | Y | 19 | 5276 | Y |
| | 5 | 5280 | Y | 20 | 5276 | Y |
| | 6 | 5280 | Y | 21 | 5284 | Y |
| | 7 | 5280 | Y | 22 | 5284 | Y |
| | 8 | 5280 | Y | 23 | 5284 | Y |
| | 9 | 5280 | Y | 24 | 5284 | Y |
| | 10 | 5280 | Y | 25 | 5284 | Y |
| | 11 | 5271 | Y | 26 | 5289 | Y |
| | 12 | 5271 | Y | 27 | 5289 | Y |
| | 13 | 5271 | Y | 28 | 5289 | Y |
| | 14 | 5271 | Y | 29 | 5289 | Y |
| | 15 | 5271 | Y | 30 | 5289 | Y |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 30 (100%) |

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 2 | 1 | 5280 | Y | 16 | 5276 | Y |
| | 2 | 5280 | Y | 17 | 5276 | Y |
| | 3 | 5280 | Y | 18 | 5276 | Y |
| | 4 | 5280 | Y | 19 | 5276 | Y |
| | 5 | 5280 | Y | 20 | 5276 | Y |
| | 6 | 5280 | Y | 21 | 5284 | Y |
| | 7 | 5280 | Y | 22 | 5284 | Y |
| | 8 | 5280 | Y | 23 | 5284 | Y |
| | 9 | 5280 | Y | 24 | 5284 | Y |
| | 10 | 5280 | Y | 25 | 5284 | Y |
| | 11 | 5271 | Y | 26 | 5289 | Y |
| | 12 | 5271 | Y | 27 | 5289 | Y |
| | 13 | 5271 | Y | 28 | 5289 | Y |
| | 14 | 5271 | Y | 29 | 5289 | Y |
| | 15 | 5271 | Y | 30 | 5289 | Y |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 30 (100%) |



Product Service

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 3 | 1 | 5280 | Y | 16 | 5276 | Y |
| | 2 | 5280 | Y | 17 | 5276 | Y |
| | 3 | 5280 | Y | 18 | 5276 | Y |
| | 4 | 5280 | Y | 19 | 5276 | Y |
| | 5 | 5280 | Y | 20 | 5276 | Y |
| | 6 | 5280 | Y | 21 | 5284 | Y |
| | 7 | 5280 | Y | 22 | 5284 | Y |
| | 8 | 5280 | Y | 23 | 5284 | Y |
| | 9 | 5280 | Y | 24 | 5284 | Y |
| | 10 | 5280 | Y | 25 | 5284 | Y |
| | 11 | 5271 | Y | 26 | 5289 | Y |
| | 12 | 5271 | Y | 27 | 5289 | Y |
| | 13 | 5271 | Y | 28 | 5289 | Y |
| | 14 | 5271 | Y | 29 | 5289 | Y |
| | 15 | 5271 | Y | 30 | 5289 | Y |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 30 (100%) |



Product Service

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 4 | 1 | 5280 | Y | 16 | 5276 | Y |
| | 2 | 5280 | Y | 17 | 5276 | Y |
| | 3 | 5280 | Y | 18 | 5276 | N |
| | 4 | 5280 | Y | 19 | 5276 | Y |
| | 5 | 5280 | Y | 20 | 5276 | Y |
| | 6 | 5280 | Y | 21 | 5284 | Y |
| | 7 | 5280 | Y | 22 | 5284 | Y |
| | 8 | 5280 | Y | 23 | 5284 | Y |
| | 9 | 5280 | Y | 24 | 5284 | Y |
| | 10 | 5280 | Y | 25 | 5284 | Y |
| | 11 | 5271 | Y | 26 | 5289 | Y |
| | 12 | 5271 | Y | 27 | 5289 | Y |
| | 13 | 5271 | Y | 28 | 5289 | Y |
| | 14 | 5271 | Y | 29 | 5289 | Y |
| | 15 | 5271 | Y | 30 | 5289 | Y |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 29 (96.7 %) |

| Radar Type | Number Of Trials | Number Of Successful Detections | Minimum Percentage Of Successful Detection |
|---|------------------|---------------------------------|--|
| 1 | 30 | 30 | 100 % |
| 2 | 30 | 30 | 100 % |
| 3 | 30 | 30 | 100 % |
| 4 | 30 | 29 | 96.7 % |
| Aggregate (100 % + 100 % + 100 % + 96.7 %) / 4 = 99.2 % | | | |



Product Service

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 5 | 1 | 5277.4 | Y | 16 | 5287.1 | Y |
| | 2 | 5281.6 | Y | 17 | 5279.9 | Y |
| | 3 | 5282.2 | Y | 18 | 5275.8 | Y |
| | 4 | 5284.7 | Y | 19 | 5278.9 | Y |
| | 5 | 5287.9 | Y | 20 | 5283 | Y |
| | 6 | 5280.2 | Y | 21 | 5272.8 | Y |
| | 7 | 5283.6 | Y | 22 | 5275.5 | Y |
| | 8 | 5278.7 | Y | 23 | 5273.6 | Y |
| | 9 | 5274.3 | Y | 24 | 5279.8 | Y |
| | 10 | 5273.5 | Y | 25 | 5279 | Y |
| | 11 | 5279.7 | Y | 26 | 5283.2 | Y |
| | 12 | 5278.6 | Y | 27 | 5285.2 | Y |
| | 13 | 5283.9 | Y | 28 | 5277 | Y |
| | 14 | 5273.1 | Y | 29 | 5280.8 | Y |
| | 15 | 5273.8 | Y | 30 | 5275.3 | Y |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 30 (100%) |



| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|-------------------------------|----------|-------------------|-----------------|----------------|-----------------|-------------------|
| 6 | 1 | Frequency Hopping | Y | 16 | Y | Frequency Hopping |
| | 2 | Frequency Hopping | Y | 17 | Y | Frequency Hopping |
| | 3 | Frequency Hopping | Y | 18 | Y | Frequency Hopping |
| | 4 | Frequency Hopping | Y | 19 | Y | Frequency Hopping |
| | 5 | Frequency Hopping | Y | 20 | Y | Frequency Hopping |
| | 6 | Frequency Hopping | Y | 21 | Y | Frequency Hopping |
| | 7 | Frequency Hopping | Y | 22 | Y | Frequency Hopping |
| | 8 | Frequency Hopping | Y | 23 | Y | Frequency Hopping |
| | 9 | Frequency Hopping | Y | 24 | Y | Frequency Hopping |
| | 10 | Frequency Hopping | Y | 25 | Y | Frequency Hopping |
| | 11 | Frequency Hopping | Y | 26 | Y | Frequency Hopping |
| | 12 | Frequency Hopping | N | 27 | Y | Frequency Hopping |
| | 13 | Frequency Hopping | Y | 28 | Y | Frequency Hopping |
| | 14 | Frequency Hopping | Y | 29 | Y | Frequency Hopping |
| | 15 | Frequency Hopping | Y | 30 | Y | Frequency Hopping |
| EUT Test Frequency : 5280 MHz | | | | Total Detected | | 29 (96.7 %) |



Product Service

802.11n – 40 MHz Bandwidth

Data Rate: 13.5 Mbps

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|--|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 1 | 1 | 5270 | Y | 16 | 5260 | Y |
| | 2 | 5270 | Y | 17 | 5260 | Y |
| | 3 | 5270 | Y | 18 | 5260 | Y |
| | 4 | 5270 | Y | 19 | 5260 | Y |
| | 5 | 5270 | Y | 20 | 5260 | Y |
| | 6 | 5270 | Y | 21 | 5280 | Y |
| | 7 | 5270 | Y | 22 | 5280 | Y |
| | 8 | 5270 | Y | 23 | 5280 | Y |
| | 9 | 5270 | Y | 24 | 5280 | Y |
| | 10 | 5270 | Y | 25 | 5280 | Y |
| | 11 | 5251 | N | 26 | 5289 | Y |
| | 12 | 5251 | Y | 27 | 5289 | Y |
| | 13 | 5251 | Y | 28 | 5289 | Y |
| | 14 | 5251 | Y | 29 | 5289 | Y |
| | 15 | 5251 | Y | 30 | 5289 | Y |
| EUT Test Frequency : 5270 MHz (Primary : 5260 MHz, Secondary: 5280 MHz) | | | | Total Detected | | 29 (96.7 %) |



| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|--|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 2 | 1 | 5270 | Y | 16 | 5260 | Y |
| | 2 | 5270 | Y | 17 | 5260 | Y |
| | 3 | 5270 | Y | 18 | 5260 | Y |
| | 4 | 5270 | Y | 19 | 5260 | Y |
| | 5 | 5270 | Y | 20 | 5260 | Y |
| | 6 | 5270 | Y | 21 | 5280 | Y |
| | 7 | 5270 | Y | 22 | 5280 | Y |
| | 8 | 5270 | Y | 23 | 5280 | Y |
| | 9 | 5270 | Y | 24 | 5280 | Y |
| | 10 | 5270 | Y | 25 | 5280 | Y |
| | 11 | 5251 | N | 26 | 5289 | Y |
| | 12 | 5251 | N | 27 | 5289 | Y |
| | 13 | 5251 | N | 28 | 5289 | Y |
| | 14 | 5251 | N | 29 | 5289 | Y |
| | 15 | 5251 | N | 30 | 5289 | Y |
| EUT Test Frequency : 5270 MHz (Primary : 5260 MHz, Secondary: 5280 MHz) | | | | Total Detected | | 25 (83.3 %) |

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|--|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 3 | 1 | 5270 | Y | 16 | 5260 | Y |
| | 2 | 5270 | Y | 17 | 5260 | Y |
| | 3 | 5270 | Y | 18 | 5260 | Y |
| | 4 | 5270 | Y | 19 | 5260 | Y |
| | 5 | 5270 | Y | 20 | 5260 | Y |
| | 6 | 5270 | Y | 21 | 5280 | Y |
| | 7 | 5270 | Y | 22 | 5280 | Y |
| | 8 | 5270 | Y | 23 | 5280 | Y |
| | 9 | 5270 | Y | 24 | 5280 | Y |
| | 10 | 5270 | Y | 25 | 5280 | Y |
| | 11 | 5251.5 | Y | 26 | 5288.5 | Y |
| | 12 | 5251.5 | Y | 27 | 5288.5 | Y |
| | 13 | 5251.5 | Y | 28 | 5288.5 | Y |
| | 14 | 5251.5 | N | 29 | 5288.5 | Y |
| | 15 | 5251.5 | Y | 30 | 5288.5 | Y |
| EUT Test Frequency : 5270 MHz (Primary : 5260 MHz, Secondary: 5280 MHz) | | | | Total Detected | | 29 (96.7 %) |



Product Service

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|--|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 4 | 1 | 5270 | Y | 16 | 5260 | Y |
| | 2 | 5270 | Y | 17 | 5260 | Y |
| | 3 | 5270 | Y | 18 | 5260 | Y |
| | 4 | 5270 | Y | 19 | 5260 | Y |
| | 5 | 5270 | Y | 20 | 5260 | Y |
| | 6 | 5270 | Y | 21 | 5280 | Y |
| | 7 | 5270 | Y | 22 | 5280 | Y |
| | 8 | 5270 | Y | 23 | 5280 | Y |
| | 9 | 5270 | Y | 24 | 5280 | Y |
| | 10 | 5270 | Y | 25 | 5280 | Y |
| | 11 | 5251.5 | Y | 26 | 5288.5 | Y |
| | 12 | 5251.5 | Y | 27 | 5288.5 | Y |
| | 13 | 5251.5 | Y | 28 | 5288.5 | Y |
| | 14 | 5251.5 | Y | 29 | 5288.5 | Y |
| | 15 | 5251.5 | Y | 30 | 5288.5 | Y |
| EUT Test Frequency : 5270 MHz (Primary : 5260 MHz, Secondary: 5280 MHz) | | | | Total Detected | | 29 (96.7 %) |

| Radar Type | Number Of Trials | Number Of Successful Detections | Minimum Percentage Of Successful Detection |
|--|------------------|---------------------------------|--|
| 1 | 30 | 29 | 96.7 % |
| 2 | 30 | 25 | 83.3 % |
| 3 | 30 | 29 | 96.7 % |
| 4 | 30 | 29 | 96.7 % |
| Aggregate (96.7 % + 83.3 % + 96.7 % + 96.7 %) / 4 = 93.4 % | | | |



Product Service

| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|--|----------|-----------------|-----------------|----------------|-----------------|-----------------|
| 5 | 1 | 5275.1 | Y | 16 | 5266.8 | Y |
| | 2 | 5280.4 | Y | 17 | 5273.8 | Y |
| | 3 | 5265.1 | Y | 18 | 5272 | Y |
| | 4 | 5285 | Y | 19 | 5280.1 | Y |
| | 5 | 5262.7 | Y | 20 | 5280.3 | Y |
| | 6 | 5266.5 | Y | 21 | 5281.4 | Y |
| | 7 | 5275.6 | Y | 22 | 5281.2 | Y |
| | 8 | 5267.4 | Y | 23 | 5255.3 | Y |
| | 9 | 5280.8 | Y | 24 | 5264.5 | Y |
| | 10 | 5279.2 | Y | 25 | 5283.9 | Y |
| | 11 | 5264.9 | Y | 26 | 5269.4 | Y |
| | 12 | 5276.8 | Y | 27 | 5282.4 | Y |
| | 13 | 5262.3 | Y | 28 | 5267.3 | Y |
| | 14 | 5259.8 | Y | 29 | 5270.4 | Y |
| | 15 | 5262.4 | Y | 30 | 5268.7 | Y |
| EUT Test Frequency : 5270 MHz (Primary : 5260 MHz, Secondary: 5280 MHz) | | | | Total Detected | | 30 (100%) |



| Radar Type | Trial No | Frequency (MHz) | Detection (Y/N) | Trial No | Frequency (MHz) | Detection (Y/N) |
|--|----------|-------------------|-----------------|----------------|-------------------|-----------------|
| 6 | 1 | Frequency Hopping | Y | 16 | Frequency Hopping | Y |
| | 2 | Frequency Hopping | Y | 17 | Frequency Hopping | Y |
| | 3 | Frequency Hopping | Y | 18 | Frequency Hopping | Y |
| | 4 | Frequency Hopping | Y | 19 | Frequency Hopping | Y |
| | 5 | Frequency Hopping | Y | 20 | Frequency Hopping | Y |
| | 6 | Frequency Hopping | Y | 21 | Frequency Hopping | Y |
| | 7 | Frequency Hopping | Y | 22 | Frequency Hopping | Y |
| | 8 | Frequency Hopping | Y | 23 | Frequency Hopping | Y |
| | 9 | Frequency Hopping | Y | 24 | Frequency Hopping | Y |
| | 10 | Frequency Hopping | Y | 25 | Frequency Hopping | Y |
| | 11 | Frequency Hopping | Y | 26 | Frequency Hopping | Y |
| | 12 | Frequency Hopping | Y | 27 | Frequency Hopping | Y |
| | 13 | Frequency Hopping | Y | 28 | Frequency Hopping | Y |
| | 14 | Frequency Hopping | Y | 29 | Frequency Hopping | Y |
| | 15 | Frequency Hopping | Y | 30 | Frequency Hopping | Y |
| EUT Test Frequency : 5270 MHz (Primary : 5260 MHz, Secondary: 5280 MHz) | | | | Total Detected | | 30 (100%) |



Product Service

2.7 UNIFORM SPREADING

2.7.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.407 (h)(2)

2.7.2 Equipment Under Test

WiBear11n-DF1

2.7.3 Test Requirements

The requirements according to FCC 47 CFR Part 15, clause 15.407 (h)(2); The DFS process shall be required to provide a uniform spreading of the loading over all the available channels.

2.7.4 Test Results

Customer Declaration



Product Service

SECTION 3

TEST EQUIPMENT USED



Product Service

3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

| Instrument | Manufacturer | Type No. | TE No. | Calibration Period (months) | Calibration Due |
|--|-----------------|----------------|--------|-----------------------------|-----------------|
| Section 2.1 – In-Service Monitoring | | | | | |
| Directional Coupler | Hewlett Packard | 11692D | 451 | 12 | 2-Oct-2015 |
| Multimeter | Fluke | 75 Mk3 | 455 | 12 | 23-Jul-2015 |
| 30dB/2W Attenuator | Narda | 4772-30 | 460 | - | TU |
| 30dB Attenuator | Narda | 4772-30 | 463 | - | TU |
| Hygrometer | Rotronic | I-1000 | 2891 | 12 | 16-Jul-2015 |
| Termination (50ohm, 1W) | Suhner | | 3080 | 12 | 5-Mar-2016 |
| Signal Analyser | Rohde & Schwarz | FSQ 26 | 3545 | 12 | 6-Aug-2015 |
| PXI Digital RF Signal Generator | Aeroflex | 3025 | 4015 | 24 | 3-Oct-2015 |
| 1800-6000 MHz Power Splitter | Mini-Circuits | ZN2PD-63-S+ | 4055 | - | O/P Mon |
| 1800-6000 MHz Power Splitter | Mini-Circuits | ZN2PD-63-S+ | 4056 | - | O/P Mon |
| Attenuator | Seaelectro | SO-674-1010-89 | N/S | - | TU |
| Hygrometer | Rotronic | A1 | 2677 | 12 | 11-Jun-2016 |
| Spectrum Analyser | Rohde & Schwarz | FSU 26 | 2747 | 12 | 20-Jan-2016 |
| PXI Digital RF Digitizer | Aeroflex | 3035 | 4012 | 24 | 3-Oct-2015 |
| PXI Digital RF Signal Generator | Aeroflex | 3010 | 4013 | 24 | 3-Oct-2015 |
| PXI Digital RF Signal Generator | Aeroflex | 3011 | 4014 | 24 | 3-Oct-2015 |

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



Product Service

3.2 SUPPORT TEST EQUIPMENT

| Instrument | Manufacturer | Type No. | Serial Number |
|-------------------|--------------|----------------|---------------|
| Development Board | U-Blox | EVK-E05 | Unknown |
| Client | U-Blox | DF1 | 0489369 |
| Laptop | Fujitsu | Litebook S7220 | YKKF052471 |



3.3 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

| Test Discipline | MU |
|---|--|
| Channel Availability Check | Time Measurement Uncertainty: $\pm 0.47\%$ Amplitude Uncertainty: ± 1.29 dB |
| Channel Availability Check – Radar Burst at the Beginning | Time Measurement Uncertainty: $\pm 0.47\%$ Amplitude Uncertainty: ± 1.29 dB |
| Channel Availability Check – Radar Burst at the End | Time Measurement Uncertainty: $\pm 0.47\%$ Amplitude Uncertainty: ± 1.29 dB |
| Channel Shutdown | Time Measurement Uncertainty: $\pm 0.47\%$ Amplitude Uncertainty: ± 1.29 dB |
| Non-Occupancy Period | Time Measurement Uncertainty: $\pm 0.47\%$ Amplitude Uncertainty: ± 1.29 dB |



Product Service

SECTION 4

PHOTOGRAPHS




Product Service

4.1 TEST SET-UP PHOTOGRAPHS

See test set-up photographs exhibit “75931213 FCC Set Up Photos.pdf”.

4.2 DFS TEST EQUIPMENT

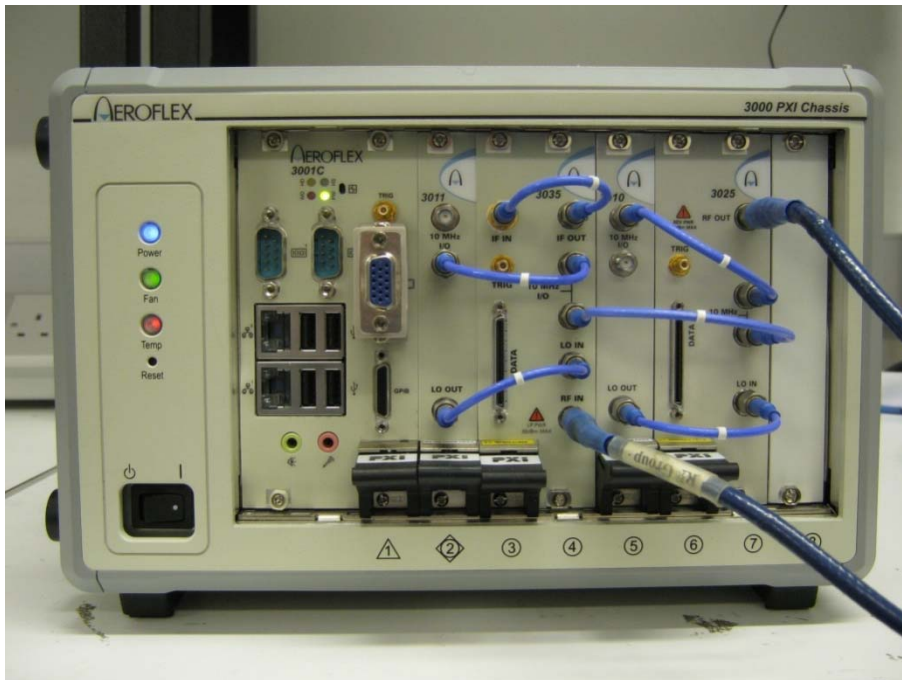

Test Set Up



Product Service

SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service

© 2015 TÜV SÜD Product Service

ANNEX A

TEST WAVEFORMS USED

U-NII Detection Bandwidth

Type 0

| Pulse Width (μs) | Number of Pulses | Pulse Repetition Interval (μs) |
|-------------------------------|------------------|---|
| 1 | 18 | 1428 |

Channel Availability Check – Radar Burst at the Beginning

Type 0

| Pulse Width (μs) | Number of Pulses | Pulse Repetition Interval (μs) |
|-------------------------------|------------------|---|
| 1 | 18 | 1428 |

Channel Availability Check – Radar Burst at the End

Type 0

| Pulse Width (μs) | Number of Pulses | Pulse Repetition Interval (μs) |
|-------------------------------|------------------|---|
| 1 | 18 | 1428 |

In-service Monitoring

Type 1

| Pulse Width (μs) | Number of Pulses | Pulse Repetition Interval (μs) |
|-------------------------------|------------------|---|
| 2 | 99 | 538 |

Type 2

| Pulse Width (μs) | Number of Pulses | Pulse Repetition Interval (μs) |
|-------------------------------|------------------|---|
| 27 | 1.1 | 154 |

Type 3

| Pulse Width (μs) | Number of Pulses | Pulse Repetition Interval (μs) |
|-------------------------------|------------------|---|
| 16 | 6.4 | 316 |

Type 4

| Pulse Width (μs) | Number of Pulses | Pulse Repetition Interval (μs) |
|-------------------------------|------------------|---|
| 11.1 | 15 | 448 |

Type 5

| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
|-------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| 1 | 2 | 64 | 19 | 1980 | 0 | 220036 |
| 2 | 3 | 98 | 16 | 1825 | 1974 | 119802 |
| 3 | 2 | 50 | 16 | 1599 | 0 | 488073 |
| 4 | 1 | 56 | 8 | 0 | 0 | 527511 |
| 5 | 2 | 96 | 18 | 1483 | 0 | 286745 |
| 6 | 1 | 52 | 7 | 0 | 0 | 494477 |
| 7 | 2 | 60 | 11 | 1233 | 0 | 504362 |
| 8 | 3 | 68 | 6 | 1848 | 1348 | 161387 |
| 9 | 2 | 54 | 15 | 1576 | 0 | 69078 |
| 10 | 2 | 55 | 11 | 1429 | 0 | 515077 |
| 11 | 2 | 88 | 13 | 1206 | 0 | 250181 |
| 12 | 2 | 71 | 11 | 1500 | 0 | 54394 |
| 13 | 3 | 89 | 19 | 1338 | 1770 | 482296 |
| 14 | 1 | 58 | 19 | 0 | 0 | 142735 |
| 15 | 3 | 68 | 17 | 1946 | 1357 | 259438 |
| 16 | 1 | 64 | 10 | 0 | 0 | 507385 |
| 17 | 1 | 84 | 17 | 0 | 0 | 578037 |
| 18 | 3 | 72 | 18 | 1027 | 1424 | 197262 |
| 19 | 3 | 85 | 10 | 1257 | 1600 | 447637 |
| 20 | 1 | 65 | 17 | 0 | 0 | 184228 |

Type 6

| Hopping Frequency List (MHz) |
|---|
| 5447,5361,5434,5556,5383,5401,5373,5503,5389,5482,5583,5646,5539,5412,5504,5312,5625,5615,5293,5397,5455,5551,5451,5478,5390,5411,5623,5316,5456,5354,5692,5723,5356,5631,5576,5672,5295,5457,5379,5308,5336,5502,5467,5366,5263,5518,5302,5639,5527,5593,5596,5299,5437,5408,5621,5635,5681,5444,5718,5714,5475,5657,5378,5616,5648,5433,5505,5652,5364,5579,5407,5638,5338,5368,5709,5348,5358,5708,5513,5587,5642,5535,5673,5260,5666,5716,5575,5464,5558,5624,5569,5339,5335,5522,5712,5264,5439,5385,5289,5572 |

Statistical Performance Check

| RADAR TYPE 1 | | | |
|--------------|---|--|--|
| Trial # | Pulse Repetition Frequency Number (1 to 23) | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (Microseconds) |
| 1 | 2 | 99 | 538 |
| 2 | 4 | 92 | 578 |
| 3 | TEST B | 90 | 590 |
| 4 | 6 | 86 | 618 |
| 5 | 7 | 83 | 638 |
| 6 | TEST B | 81 | 653 |
| 7 | 9 | 78 | 678 |
| 8 | 11 | 74 | 718 |
| 9 | 13 | 70 | 758 |
| 10 | 15 | 67 | 798 |
| 11 | TEST B | 67 | 799 |
| 12 | 16 | 65 | 818 |
| 13 | 17 | 63 | 838 |
| 14 | 18 | 62 | 858 |
| 15 | 19 | 61 | 878 |
| 16 | 20 | 59 | 898 |
| 17 | 21 | 58 | 918 |
| 18 | 22 | 58 | 921 |
| 19 | TEST B | 57 | 938 |
| 20 | TEST B | 40 | 1321 |
| 21 | TEST B | 37 | 1435 |
| 22 | TEST B | 36 | 1485 |
| 23 | TEST B | 36 | 1498 |
| 24 | TEST B | 33 | 1614 |
| 25 | TEST B | 30 | 1808 |
| 26 | TEST B | 28 | 1924 |
| 27 | TEST B | 23 | 2303 |
| 28 | TEST B | 22 | 2416 |
| 29 | TEST B | 21 | 2577 |
| 30 | TEST B | 19 | 2789 |

| RADAR TYPE 2 | | | |
|--------------|-------------------------|------------------------|----------------|
| Trial # | Number Pulses per Burst | Pulse Width (μ s) | PRI (μ s) |
| 1 | 27 | 1.1 | 154 |
| 2 | 23 | 1.1 | 155 |
| 3 | 26 | 1.1 | 224 |
| 4 | 23 | 1.4 | 153 |
| 5 | 27 | 1.6 | 187 |
| 6 | 29 | 1.6 | 190 |
| 7 | 26 | 1.8 | 152 |
| 8 | 28 | 1.0 | 197 |
| 9 | 25 | 2.1 | 158 |
| 10 | 25 | 2.3 | 180 |
| 11 | 25 | 2.4 | 185 |
| 12 | 29 | 2.5 | 196 |
| 13 | 29 | 2.6 | 181 |
| 14 | 24 | 2.6 | 198 |
| 15 | 28 | 2.7 | 165 |
| 16 | 27 | 2.8 | 201 |
| 17 | 27 | 2.9 | 163 |
| 18 | 26 | 2.9 | 216 |
| 19 | 25 | 2.0 | 169 |
| 20 | 26 | 2.0 | 202 |
| 21 | 27 | 3.1 | 212 |
| 22 | 25 | 3.6 | 181 |
| 23 | 25 | 3.9 | 161 |
| 24 | 29 | 3.9 | 182 |
| 25 | 27 | 3.9 | 187 |
| 26 | 24 | 4.1 | 207 |
| 27 | 26 | 4.1 | 227 |
| 28 | 25 | 4.3 | 176 |
| 29 | 27 | 4.7 | 174 |
| 30 | 25 | 4.9 | 224 |

| RADAR TYPE 3 | | | |
|--------------|-------------------------|-------------------------------|-----------------------|
| Trial # | Number Pulses per Burst | Pulse Width (μs) | PRI (μs) |
| 1 | 16 | 6.4 | 316 |
| 2 | 18 | 6.4 | 473 |
| 3 | 18 | 6.7 | 304 |
| 4 | 16 | 6.8 | 213 |
| 5 | 16 | 6.8 | 214 |
| 6 | 18 | 6.8 | 246 |
| 7 | 18 | 6.8 | 446 |
| 8 | 17 | 6.0 | 226 |
| 9 | 16 | 7.3 | 294 |
| 10 | 17 | 7.4 | 477 |
| 11 | 16 | 7.5 | 460 |
| 12 | 18 | 7.8 | 422 |
| 13 | 18 | 7.0 | 294 |
| 14 | 18 | 8.1 | 336 |
| 15 | 16 | 8.1 | 408 |
| 16 | 18 | 8.4 | 273 |
| 17 | 17 | 8.5 | 356 |
| 18 | 17 | 8.6 | 405 |
| 19 | 16 | 8.8 | 303 |
| 20 | 18 | 8.8 | 425 |
| 21 | 16 | 8.9 | 338 |
| 22 | 16 | 8.0 | 493 |
| 23 | 16 | 9.2 | 221 |
| 24 | 17 | 9.2 | 475 |
| 25 | 17 | 9.3 | 331 |
| 26 | 18 | 9.4 | 246 |
| 27 | 16 | 9.6 | 200 |
| 28 | 17 | 9.6 | 385 |
| 29 | 16 | 9.7 | 469 |
| 30 | 17 | 9.0 | 256 |

| RADAR TYPE 4 | | | |
|--------------|-------------------------|------------------------|----------------|
| Trial # | Number Pulses per Burst | Pulse Width (μ s) | PRI (μ s) |
| 1 | 11.1 | 15 | 448 |
| 2 | 11.2 | 12 | 436 |
| 3 | 11.2 | 16 | 403 |
| 4 | 11.5 | 15 | 311 |
| 5 | 411.8 | 13 | 250 |
| 6 | 11.0 | 12 | 231 |
| 7 | 11.0 | 16 | 253 |
| 8 | 12.4 | 12 | 428 |
| 9 | 12.5 | 12 | 274 |
| 10 | 12.9 | 13 | 307 |
| 11 | 12.9 | 13 | 350 |
| 12 | 13.4 | 14 | 259 |
| 13 | 13.6 | 16 | 340 |
| 14 | 14.5 | 15 | 325 |
| 15 | 15.2 | 13 | 365 |
| 16 | 15.2 | 16 | 425 |
| 17 | 15.4 | 12 | 315 |
| 18 | 15.6 | 15 | 460 |
| 19 | 16.5 | 15 | 406 |
| 20 | 16.8 | 15 | 225 |
| 21 | 18.1 | 15 | 257 |
| 22 | 18.1 | 13 | 476 |
| 23 | 18.5 | 16 | 221 |
| 24 | 18.0 | 15 | 413 |
| 25 | 19.8 | 15 | 309 |
| 26 | 19.9 | 13 | 332 |
| 27 | 19.0 | 13 | 209 |
| 28 | 19.0 | 12 | 433 |
| 29 | 20.0 | 16 | 332 |
| 30 | 20.0 | 16 | 343 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:1 | | | | | | |
| Number of Bursts in Trial:20 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 64 | 19 | 1980 | 0 | 220036 |
| 2 | 3 | 98 | 16 | 1825 | 1974 | 119802 |
| 3 | 2 | 50 | 16 | 1599 | 0 | 488073 |
| 4 | 1 | 56 | 8 | 0 | 0 | 527511 |
| 5 | 2 | 96 | 18 | 1483 | 0 | 286745 |
| 6 | 1 | 52 | 7 | 0 | 0 | 494477 |
| 7 | 2 | 60 | 11 | 1233 | 0 | 504362 |
| 8 | 3 | 68 | 6 | 1848 | 1348 | 161387 |
| 9 | 2 | 54 | 15 | 1576 | 0 | 69078 |
| 10 | 2 | 55 | 11 | 1429 | 0 | 515077 |
| 11 | 2 | 88 | 13 | 1206 | 0 | 250181 |
| 12 | 2 | 71 | 11 | 1500 | 0 | 54394 |
| 13 | 3 | 89 | 19 | 1338 | 1770 | 482296 |
| 14 | 1 | 58 | 19 | 0 | 0 | 142735 |
| 15 | 3 | 68 | 17 | 1946 | 1357 | 259438 |
| 16 | 1 | 64 | 10 | 0 | 0 | 507385 |
| 17 | 1 | 84 | 17 | 0 | 0 | 578037 |
| 18 | 3 | 72 | 18 | 1027 | 1424 | 197262 |
| 19 | 3 | 85 | 10 | 1257 | 1600 | 447637 |
| 20 | 1 | 65 | 17 | 0 | 0 | 184228 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:2 | | | | | | |
| Number of Bursts in Trial:14 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 3 | 73 | 8 | 1158 | 1252 | 832114 |
| 2 | 2 | 93 | 20 | 1196 | 0 | 111466 |
| 3 | 1 | 83 | 19 | 0 | 0 | 524 |
| 4 | 1 | 98 | 12 | 0 | 0 | 275877 |
| 5 | 3 | 55 | 16 | 1599 | 1299 | 8057 |
| 6 | 1 | 76 | 10 | 0 | 0 | 520366 |
| 7 | 1 | 99 | 12 | 0 | 0 | 51497 |
| 8 | 2 | 61 | 8 | 1561 | 0 | 688707 |
| 9 | 2 | 74 | 8 | 1178 | 0 | 377911 |
| 10 | 1 | 91 | 15 | 0 | 0 | 593983 |
| 11 | 2 | 80 | 16 | 1203 | 0 | 717783 |
| 12 | 2 | 66 | 11 | 1211 | 0 | 732627 |
| 13 | 3 | 57 | 8 | 1450 | 1269 | 206471 |
| 14 | 3 | 61 | 15 | 1994 | 1300 | 588514 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:3 | | | | | | |
| Number of Bursts in Trial:18 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 57 | 18 | 1848 | 0 | 504076 |
| 2 | 3 | 64 | 12 | 1491 | 1370 | 214095 |
| 3 | 1 | 88 | 19 | 0 | 0 | 45741 |
| 4 | 1 | 50 | 16 | 0 | 0 | 651363 |
| 5 | 1 | 68 | 15 | 0 | 0 | 437323 |
| 6 | 2 | 51 | 20 | 1937 | 0 | 485304 |
| 7 | 3 | 58 | 15 | 1393 | 1651 | 540046 |
| 8 | 1 | 52 | 20 | 0 | 0 | 424254 |
| 9 | 2 | 72 | 19 | 1392 | 0 | 266560 |
| 10 | 3 | 96 | 9 | 1523 | 1365 | 426472 |
| 11 | 1 | 82 | 9 | 0 | 0 | 215488 |
| 12 | 3 | 71 | 17 | 1499 | 1469 | 546297 |
| 13 | 3 | 100 | 13 | 1558 | 1327 | 480759 |
| 14 | 3 | 77 | 19 | 1604 | 1020 | 92926 |
| 15 | 2 | 57 | 13 | 1098 | 0 | 643849 |
| 16 | 1 | 94 | 12 | 0 | 0 | 505874 |
| 17 | 2 | 79 | 6 | 1807 | 0 | 347851 |
| 18 | 2 | 53 | 20 | 1388 | 0 | 321464 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:4 | | | | | | |
| Number of Bursts in Trial:15 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (μs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (μs) | Pulse 2-to-3 spacing (μs) | Starting Location Within Interval (μs) |
| 1 | 2 | 91 | 17 | 1441 | 0 | 284235 |
| 2 | 3 | 53 | 5 | 1985 | 1732 | 469670 |
| 3 | 3 | 81 | 20 | 1275 | 1108 | 627318 |
| 4 | 2 | 73 | 13 | 1622 | 0 | 945 |
| 5 | 1 | 69 | 11 | 0 | 0 | 379933 |
| 6 | 3 | 90 | 10 | 1861 | 1555 | 433477 |
| 7 | 1 | 74 | 14 | 0 | 0 | 442295 |
| 8 | 2 | 54 | 16 | 1134 | 0 | 155262 |
| 9 | 3 | 74 | 5 | 1836 | 1811 | 370654 |
| 10 | 3 | 62 | 9 | 1282 | 1405 | 741280 |
| 11 | 3 | 97 | 13 | 1749 | 1379 | 9998 |
| 12 | 3 | 54 | 9 | 1711 | 1123 | 140876 |
| 13 | 1 | 82 | 7 | 0 | 0 | 271861 |
| 14 | 3 | 86 | 16 | 1831 | 1324 | 260012 |
| 15 | 3 | 76 | 5 | 1548 | 1618 | 7479 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:5 | | | | | | |
| Number of Bursts in Trial:19 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 53 | 14 | 1150 | 0 | 387280 |
| 2 | 1 | 77 | 6 | 0 | 0 | 507928 |
| 3 | 1 | 54 | 18 | 0 | 0 | 33118 |
| 4 | 3 | 55 | 10 | 1851 | 1791 | 107093 |
| 5 | 1 | 75 | 13 | 0 | 0 | 352195 |
| 6 | 2 | 79 | 14 | 1636 | 0 | 80424 |
| 7 | 1 | 86 | 18 | 0 | 0 | 249361 |
| 8 | 3 | 58 | 16 | 1640 | 1546 | 16795 |
| 9 | 2 | 74 | 14 | 1239 | 0 | 578517 |
| 10 | 3 | 80 | 20 | 1272 | 1402 | 431506 |
| 11 | 1 | 59 | 17 | 0 | 0 | 282342 |
| 12 | 3 | 70 | 5 | 1513 | 1987 | 361222 |
| 13 | 1 | 76 | 11 | 0 | 0 | 63039 |
| 14 | 1 | 59 | 16 | 0 | 0 | 625279 |
| 15 | 3 | 60 | 12 | 1815 | 1824 | 225592 |
| 16 | 3 | 86 | 9 | 1608 | 1857 | 617715 |
| 17 | 2 | 67 | 8 | 1441 | 0 | 531127 |
| 18 | 2 | 53 | 20 | 1178 | 0 | 489866 |
| 19 | 3 | 56 | 13 | 1451 | 1422 | 602908 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:6 | | | | | | |
| Number of Bursts in Trial:10 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 1 | 92 | 13 | 0 | 0 | 1103329 |
| 2 | 3 | 70 | 8 | 1214 | 1344 | 435440 |
| 3 | 2 | 88 | 20 | 1131 | 0 | 505737 |
| 4 | 2 | 50 | 20 | 1675 | 0 | 345947 |
| 5 | 3 | 63 | 14 | 1107 | 1741 | 971535 |
| 6 | 1 | 76 | 10 | 0 | 0 | 305770 |
| 7 | 2 | 97 | 16 | 1527 | 0 | 154099 |
| 8 | 3 | 67 | 6 | 1628 | 1939 | 47975 |
| 9 | 1 | 75 | 7 | 0 | 0 | 812336 |
| 10 | 1 | 60 | 15 | 0 | 0 | 316108 |
| 11 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13 | 0 | 0 | 0 | 0 | 0 | 0 |
| 14 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:7 | | | | | | |
| Number of Bursts in Trial:14 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 74 | 16 | 1671 | 0 | 178185 |
| 2 | 3 | 63 | 11 | 1179 | 1167 | 253163 |
| 3 | 3 | 94 | 6 | 1992 | 1461 | 24112 |
| 4 | 2 | 50 | 15 | 1319 | 0 | 802710 |
| 5 | 2 | 87 | 8 | 1750 | 0 | 647869 |
| 6 | 2 | 71 | 13 | 1614 | 0 | 387589 |
| 7 | 1 | 94 | 16 | 0 | 0 | 762707 |
| 8 | 1 | 53 | 10 | 0 | 0 | 211056 |
| 9 | 2 | 97 | 19 | 1461 | 0 | 549333 |
| 10 | 2 | 68 | 11 | 1168 | 0 | 185082 |
| 11 | 1 | 87 | 15 | 0 | 0 | 535197 |
| 12 | 1 | 81 | 7 | 0 | 0 | 9293 |
| 13 | 2 | 73 | 6 | 1847 | 0 | 838694 |
| 14 | 2 | 78 | 18 | 1410 | 0 | 850225 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:8 | | | | | | |
| Number of Bursts in Trial:13 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 1 | 63 | 20 | 0 | 0 | 123613 |
| 2 | 3 | 55 | 11 | 1052 | 1881 | 86916 |
| 3 | 3 | 69 | 10 | 1240 | 1214 | 358313 |
| 4 | 3 | 91 | 15 | 1723 | 1078 | 689520 |
| 5 | 1 | 82 | 18 | 0 | 0 | 112090 |
| 6 | 3 | 98 | 9 | 1908 | 1799 | 882690 |
| 7 | 2 | 50 | 6 | 1945 | 0 | 177322 |
| 8 | 2 | 95 | 13 | 1760 | 0 | 521576 |
| 9 | 1 | 96 | 13 | 0 | 0 | 62818 |
| 10 | 3 | 80 | 17 | 1239 | 1684 | 30895 |
| 11 | 3 | 63 | 9 | 1352 | 1092 | 305182 |
| 12 | 1 | 82 | 11 | 0 | 0 | 412454 |
| 13 | 3 | 99 | 9 | 1918 | 1025 | 301984 |
| 14 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:9 | | | | | | |
| Number of Bursts in Trial:11 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 1 | 60 | 9 | 0 | 0 | 1106599 |
| 2 | 1 | 99 | 13 | 0 | 0 | 588046 |
| 3 | 1 | 54 | 17 | 0 | 0 | 412748 |
| 4 | 1 | 59 | 5 | 0 | 0 | 267914 |
| 5 | 3 | 59 | 6 | 1707 | 1715 | 1019888 |
| 6 | 3 | 67 | 9 | 1082 | 1312 | 922778 |
| 7 | 1 | 81 | 15 | 0 | 0 | 50910 |
| 8 | 2 | 72 | 12 | 1042 | 0 | 511130 |
| 9 | 1 | 83 | 9 | 0 | 0 | 959506 |
| 10 | 3 | 92 | 8 | 1481 | 1291 | 426379 |
| 11 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13 | 0 | 0 | 0 | 0 | 0 | 0 |
| 14 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:10 | | | | | | |
| Number of Bursts in Trial:11 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 3 | 88 | 13 | 1732 | 1932 | 675625 |
| 2 | 2 | 71 | 10 | 1921 | 0 | 729214 |
| 3 | 1 | 83 | 16 | 0 | 0 | 222735 |
| 4 | 2 | 73 | 16 | 1895 | 0 | 699027 |
| 5 | 3 | 99 | 17 | 1654 | 1535 | 855720 |
| 6 | 3 | 93 | 5 | 1623 | 1856 | 1045460 |
| 7 | 3 | 52 | 20 | 1536 | 1090 | 972523 |
| 8 | 1 | 92 | 20 | 0 | 0 | 87602 |
| 9 | 3 | 75 | 12 | 1610 | 1657 | 62680 |
| 10 | 2 | 59 | 17 | 1732 | 0 | 431317 |
| 11 | 3 | 79 | 17 | 1954 | 1876 | 213603 |
| 12 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13 | 0 | 0 | 0 | 0 | 0 | 0 |
| 14 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:11 | | | | | | |
| Number of Bursts in Trial:9 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 3 | 80 | 11 | 1713 | 1064 | 941946 |
| 2 | 1 | 80 | 16 | 0 | 0 | 891327 |
| 3 | 2 | 79 | 15 | 1067 | 0 | 890014 |
| 4 | 2 | 63 | 9 | 1212 | 0 | 1231883 |
| 5 | 1 | 93 | 8 | 0 | 0 | 1111002 |
| 6 | 3 | 56 | 14 | 1011 | 1459 | 255353 |
| 7 | 2 | 60 | 16 | 1967 | 0 | 150625 |
| 8 | 2 | 84 | 20 | 1441 | 0 | 976952 |
| 9 | 1 | 52 | 9 | 0 | 0 | 1319170 |
| 10 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13 | 0 | 0 | 0 | 0 | 0 | 0 |
| 14 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:12 | | | | | | |
| Number of Bursts in Trial:16 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 1 | 54 | 10 | 0 | 0 | 34588 |
| 2 | 3 | 77 | 15 | 1664 | 1271 | 10420 |
| 3 | 3 | 70 | 13 | 1859 | 1940 | 106271 |
| 4 | 1 | 57 | 13 | 0 | 0 | 64651 |
| 5 | 2 | 94 | 15 | 1955 | 0 | 224746 |
| 6 | 3 | 64 | 18 | 1479 | 1630 | 59831 |
| 7 | 2 | 60 | 8 | 1660 | 0 | 24056 |
| 8 | 1 | 99 | 12 | 0 | 0 | 495101 |
| 9 | 3 | 78 | 11 | 1953 | 1248 | 713688 |
| 10 | 1 | 56 | 13 | 0 | 0 | 443325 |
| 11 | 3 | 96 | 17 | 1904 | 1303 | 236545 |
| 12 | 2 | 69 | 16 | 1068 | 0 | 191599 |
| 13 | 3 | 59 | 15 | 1934 | 1324 | 154131 |
| 14 | 2 | 60 | 19 | 1906 | 0 | 252984 |
| 15 | 3 | 95 | 7 | 1785 | 1452 | 537117 |
| 16 | 3 | 67 | 17 | 1140 | 1348 | 663352 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:13 | | | | | | |
| Number of Bursts in Trial:16 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (μs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (μs) | Pulse 2-to-3 spacing (μs) | Starting Location Within Interval (μs) |
| 1 | 1 | 90 | 9 | 0 | 0 | 669096 |
| 2 | 2 | 81 | 18 | 1220 | 0 | 304684 |
| 3 | 2 | 55 | 10 | 1784 | 0 | 14093 |
| 4 | 3 | 88 | 17 | 1938 | 1594 | 511483 |
| 5 | 2 | 61 | 18 | 1737 | 0 | 387819 |
| 6 | 3 | 85 | 15 | 1401 | 1276 | 86456 |
| 7 | 2 | 65 | 5 | 1757 | 0 | 400920 |
| 8 | 3 | 74 | 18 | 1296 | 1043 | 88521 |
| 9 | 1 | 75 | 5 | 0 | 0 | 313347 |
| 10 | 3 | 85 | 17 | 1595 | 1033 | 151602 |
| 11 | 3 | 60 | 20 | 1946 | 1934 | 421388 |
| 12 | 2 | 74 | 19 | 1193 | 0 | 612966 |
| 13 | 1 | 64 | 15 | 0 | 0 | 52018 |
| 14 | 3 | 63 | 11 | 1845 | 1284 | 61070 |
| 15 | 1 | 82 | 13 | 0 | 0 | 724821 |
| 16 | 2 | 84 | 6 | 1196 | 0 | 115 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:14 | | | | | | |
| Number of Bursts in Trial:19 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 3 | 62 | 19 | 1711 | 1095 | 12022 |
| 2 | 3 | 80 | 10 | 1100 | 1377 | 242006 |
| 3 | 3 | 65 | 7 | 1203 | 1416 | 219108 |
| 4 | 3 | 72 | 11 | 1750 | 1750 | 76052 |
| 5 | 2 | 78 | 12 | 1979 | 0 | 358792 |
| 6 | 3 | 63 | 9 | 1911 | 1306 | 8015 |
| 7 | 3 | 69 | 19 | 1975 | 1761 | 282380 |
| 8 | 3 | 75 | 7 | 1705 | 1914 | 496567 |
| 9 | 1 | 92 | 7 | 0 | 0 | 165644 |
| 10 | 3 | 65 | 13 | 1492 | 1056 | 309850 |
| 11 | 3 | 63 | 13 | 1569 | 1833 | 20577 |
| 12 | 2 | 92 | 6 | 1474 | 0 | 342849 |
| 13 | 1 | 62 | 18 | 0 | 0 | 306051 |
| 14 | 2 | 56 | 20 | 1610 | 0 | 154028 |
| 15 | 2 | 71 | 13 | 1770 | 0 | 135171 |
| 16 | 1 | 70 | 14 | 0 | 0 | 329176 |
| 17 | 3 | 67 | 18 | 1957 | 1395 | 366845 |
| 18 | 3 | 72 | 8 | 1617 | 1753 | 32935 |
| 19 | 2 | 81 | 12 | 1247 | 0 | 597588 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:15 | | | | | | |
| Number of Bursts in Trial:15 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 1 | 89 | 11 | 0 | 0 | 143247 |
| 2 | 2 | 95 | 17 | 1927 | 0 | 299188 |
| 3 | 3 | 89 | 10 | 1687 | 1622 | 660071 |
| 4 | 1 | 56 | 6 | 0 | 0 | 584083 |
| 5 | 1 | 93 | 8 | 0 | 0 | 647391 |
| 6 | 3 | 97 | 10 | 1857 | 1192 | 167151 |
| 7 | 3 | 55 | 13 | 1266 | 1561 | 62956 |
| 8 | 3 | 57 | 17 | 1778 | 1932 | 115715 |
| 9 | 2 | 60 | 20 | 1675 | 0 | 667828 |
| 10 | 3 | 56 | 8 | 1050 | 1487 | 251244 |
| 11 | 2 | 81 | 16 | 1087 | 0 | 773469 |
| 12 | 2 | 62 | 8 | 1025 | 0 | 494756 |
| 13 | 3 | 78 | 14 | 1242 | 1088 | 100489 |
| 14 | 2 | 100 | 7 | 1326 | 0 | 277139 |
| 15 | 3 | 59 | 11 | 1034 | 1849 | 206459 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:16 | | | | | | |
| Number of Bursts in Trial:9 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 87 | 20 | 1159 | 0 | 427217 |
| 2 | 3 | 50 | 15 | 1826 | 1992 | 1167458 |
| 3 | 3 | 78 | 14 | 1906 | 1526 | 1000378 |
| 4 | 2 | 67 | 11 | 1749 | 0 | 1070741 |
| 5 | 2 | 62 | 19 | 1160 | 0 | 1289470 |
| 6 | 3 | 72 | 10 | 1053 | 1119 | 246084 |
| 7 | 1 | 88 | 9 | 0 | 0 | 867790 |
| 8 | 2 | 62 | 18 | 1236 | 0 | 586038 |
| 9 | 1 | 78 | 6 | 0 | 0 | 617573 |
| 10 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13 | 0 | 0 | 0 | 0 | 0 | 0 |
| 14 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:17 | | | | | | |
| Number of Bursts in Trial:18 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 3 | 95 | 15 | 1630 | 1392 | 332478 |
| 2 | 3 | 67 | 15 | 1140 | 1727 | 179569 |
| 3 | 1 | 91 | 9 | 0 | 0 | 143215 |
| 4 | 2 | 97 | 17 | 1514 | 0 | 273881 |
| 5 | 3 | 80 | 19 | 1194 | 1396 | 346033 |
| 6 | 1 | 65 | 13 | 0 | 0 | 23196 |
| 7 | 1 | 71 | 11 | 0 | 0 | 132282 |
| 8 | 3 | 89 | 16 | 1661 | 1618 | 237738 |
| 9 | 3 | 56 | 7 | 1924 | 1287 | 57291 |
| 10 | 1 | 98 | 8 | 0 | 0 | 551406 |
| 11 | 2 | 67 | 20 | 1361 | 0 | 631904 |
| 12 | 1 | 89 | 11 | 0 | 0 | 664304 |
| 13 | 3 | 82 | 5 | 1134 | 1105 | 391639 |
| 14 | 3 | 89 | 14 | 1464 | 1440 | 497740 |
| 15 | 1 | 57 | 7 | 0 | 0 | 415032 |
| 16 | 3 | 72 | 20 | 1908 | 1309 | 340613 |
| 17 | 1 | 54 | 15 | 0 | 0 | 280402 |
| 18 | 3 | 74 | 5 | 1248 | 1538 | 657646 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:18 | | | | | | |
| Number of Bursts in Trial:11 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 82 | 16 | 1746 | 0 | 1073886 |
| 2 | 1 | 67 | 12 | 0 | 0 | 342651 |
| 3 | 2 | 74 | 17 | 1077 | 0 | 367293 |
| 4 | 1 | 90 | 16 | 0 | 0 | 273174 |
| 5 | 3 | 92 | 13 | 1687 | 1466 | 414783 |
| 6 | 3 | 73 | 15 | 1798 | 1369 | 811208 |
| 7 | 2 | 97 | 12 | 1462 | 0 | 667590 |
| 8 | 2 | 71 | 19 | 1714 | 0 | 430662 |
| 9 | 2 | 73 | 20 | 1126 | 0 | 833249 |
| 10 | 1 | 80 | 6 | 0 | 0 | 640182 |
| 11 | 3 | 64 | 20 | 1700 | 1158 | 827409 |
| 12 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13 | 0 | 0 | 0 | 0 | 0 | 0 |
| 14 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:19 | | | | | | |
| Number of Bursts in Trial:20 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 1 | 67 | 17 | 0 | 0 | 317290 |
| 2 | 2 | 77 | 6 | 1568 | 0 | 9454 |
| 3 | 2 | 67 | 14 | 1724 | 0 | 420646 |
| 4 | 2 | 93 | 13 | 1443 | 0 | 128818 |
| 5 | 1 | 85 | 10 | 0 | 0 | 369976 |
| 6 | 2 | 93 | 14 | 1211 | 0 | 410479 |
| 7 | 2 | 69 | 8 | 1291 | 0 | 420057 |
| 8 | 2 | 66 | 6 | 1091 | 0 | 110511 |
| 9 | 1 | 54 | 11 | 0 | 0 | 256286 |
| 10 | 1 | 60 | 20 | 0 | 0 | 590897 |
| 11 | 2 | 95 | 10 | 1426 | 0 | 275875 |
| 12 | 1 | 98 | 16 | 0 | 0 | 171202 |
| 13 | 3 | 87 | 6 | 1671 | 1767 | 194234 |
| 14 | 2 | 55 | 15 | 1331 | 0 | 26809 |
| 15 | 3 | 54 | 10 | 1285 | 1771 | 210327 |
| 16 | 2 | 56 | 15 | 1264 | 0 | 137738 |
| 17 | 2 | 85 | 18 | 1242 | 0 | 195840 |
| 18 | 2 | 51 | 19 | 1970 | 0 | 207755 |
| 19 | 1 | 67 | 12 | 0 | 0 | 209809 |
| 20 | 3 | 76 | 9 | 1755 | 1007 | 189420 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:20 | | | | | | |
| Number of Bursts in Trial:14 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 3 | 96 | 6 | 1271 | 1510 | 27519 |
| 2 | 2 | 55 | 18 | 1809 | 0 | 27725 |
| 3 | 1 | 80 | 10 | 0 | 0 | 364266 |
| 4 | 3 | 76 | 20 | 1018 | 1077 | 623546 |
| 5 | 2 | 85 | 19 | 1738 | 0 | 748612 |
| 6 | 3 | 90 | 18 | 1155 | 1380 | 563922 |
| 7 | 3 | 88 | 13 | 1781 | 1801 | 828405 |
| 8 | 3 | 67 | 11 | 1804 | 1128 | 460208 |
| 9 | 3 | 66 | 19 | 1028 | 1543 | 610653 |
| 10 | 3 | 88 | 20 | 1240 | 1739 | 440259 |
| 11 | 1 | 58 | 13 | 0 | 0 | 544126 |
| 12 | 1 | 93 | 9 | 0 | 0 | 588240 |
| 13 | 2 | 68 | 6 | 1840 | 0 | 673798 |
| 14 | 2 | 100 | 13 | 1181 | 0 | 584413 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:21 | | | | | | |
| Number of Bursts in Trial:17 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 3 | 61 | 7 | 1941 | 1408 | 687490 |
| 2 | 3 | 63 | 6 | 1420 | 1624 | 471946 |
| 3 | 3 | 51 | 5 | 1560 | 1640 | 307589 |
| 4 | 1 | 62 | 13 | 0 | 0 | 377331 |
| 5 | 2 | 55 | 14 | 1256 | 0 | 40036 |
| 6 | 1 | 95 | 16 | 0 | 0 | 127662 |
| 7 | 2 | 65 | 13 | 1814 | 0 | 199263 |
| 8 | 1 | 61 | 6 | 0 | 0 | 463030 |
| 9 | 1 | 80 | 7 | 0 | 0 | 188033 |
| 10 | 3 | 85 | 10 | 1817 | 1771 | 59467 |
| 11 | 2 | 55 | 20 | 1444 | 0 | 124064 |
| 12 | 2 | 90 | 5 | 1343 | 0 | 107385 |
| 13 | 3 | 83 | 10 | 1407 | 1239 | 34390 |
| 14 | 2 | 58 | 8 | 1735 | 0 | 350146 |
| 15 | 2 | 65 | 13 | 1049 | 0 | 656510 |
| 16 | 2 | 58 | 9 | 1897 | 0 | 626325 |
| 17 | 1 | 73 | 18 | 0 | 0 | 253031 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:22 | | | | | | |
| Number of Bursts in Trial:8 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 93 | 10 | 1422 | 0 | 738059 |
| 2 | 1 | 94 | 20 | 0 | 0 | 1100931 |
| 3 | 2 | 61 | 16 | 1027 | 0 | 1133381 |
| 4 | 2 | 60 | 14 | 1036 | 0 | 880362 |
| 5 | 3 | 90 | 12 | 1394 | 1244 | 1881 |
| 6 | 2 | 87 | 12 | 1262 | 0 | 1021393 |
| 7 | 1 | 77 | 5 | 0 | 0 | 261973 |
| 8 | 2 | 75 | 17 | 1788 | 0 | 362233 |
| 9 | 0 | 0 | 0 | 0 | 0 | 0 |
| 10 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13 | 0 | 0 | 0 | 0 | 0 | 0 |
| 14 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:23 | | | | | | |
| Number of Bursts in Trial:14 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 67 | 17 | 1527 | 0 | 599536 |
| 2 | 2 | 57 | 13 | 1562 | 0 | 591697 |
| 3 | 2 | 72 | 8 | 1419 | 0 | 223490 |
| 4 | 1 | 73 | 6 | 0 | 0 | 361050 |
| 5 | 3 | 63 | 11 | 1710 | 1052 | 279824 |
| 6 | 3 | 85 | 18 | 1282 | 1831 | 335922 |
| 7 | 3 | 90 | 6 | 1396 | 1462 | 581780 |
| 8 | 3 | 77 | 10 | 1467 | 1194 | 755720 |
| 9 | 2 | 52 | 17 | 1322 | 0 | 538785 |
| 10 | 3 | 68 | 5 | 1686 | 1366 | 310924 |
| 11 | 1 | 55 | 15 | 0 | 0 | 633981 |
| 12 | 1 | 50 | 20 | 0 | 0 | 253338 |
| 13 | 1 | 87 | 9 | 0 | 0 | 698531 |
| 14 | 2 | 56 | 5 | 1799 | 0 | 359769 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:24 | | | | | | |
| Number of Bursts in Trial:15 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 53 | 11 | 1076 | 0 | 435411 |
| 2 | 1 | 50 | 14 | 0 | 0 | 288135 |
| 3 | 1 | 97 | 19 | 0 | 0 | 635308 |
| 4 | 3 | 73 | 11 | 1892 | 1283 | 661442 |
| 5 | 3 | 84 | 13 | 1386 | 1171 | 739629 |
| 6 | 1 | 63 | 8 | 0 | 0 | 97174 |
| 7 | 1 | 80 | 6 | 0 | 0 | 760814 |
| 8 | 2 | 55 | 9 | 1954 | 0 | 108166 |
| 9 | 2 | 75 | 16 | 1633 | 0 | 525389 |
| 10 | 3 | 68 | 10 | 1938 | 1591 | 288450 |
| 11 | 1 | 61 | 16 | 0 | 0 | 775035 |
| 12 | 2 | 97 | 5 | 1686 | 0 | 191540 |
| 13 | 1 | 70 | 18 | 0 | 0 | 617796 |
| 14 | 2 | 58 | 12 | 1825 | 0 | 765813 |
| 15 | 2 | 80 | 7 | 1477 | 0 | 603812 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:25 | | | | | | |
| Number of Bursts in Trial:17 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 60 | 5 | 1867 | 0 | 338770 |
| 2 | 3 | 79 | 8 | 1682 | 1871 | 640088 |
| 3 | 3 | 94 | 7 | 1472 | 1502 | 43017 |
| 4 | 2 | 86 | 20 | 1175 | 0 | 442037 |
| 5 | 3 | 59 | 12 | 1452 | 1531 | 278380 |
| 6 | 2 | 100 | 8 | 1733 | 0 | 333546 |
| 7 | 1 | 82 | 9 | 0 | 0 | 633688 |
| 8 | 1 | 60 | 11 | 0 | 0 | 407166 |
| 9 | 1 | 59 | 19 | 0 | 0 | 376187 |
| 10 | 1 | 79 | 15 | 0 | 0 | 344159 |
| 11 | 3 | 77 | 13 | 1764 | 1770 | 379248 |
| 12 | 3 | 62 | 18 | 1369 | 1028 | 199297 |
| 13 | 1 | 82 | 16 | 0 | 0 | 470493 |
| 14 | 1 | 75 | 18 | 0 | 0 | 362545 |
| 15 | 1 | 80 | 19 | 0 | 0 | 284564 |
| 16 | 1 | 70 | 20 | 0 | 0 | 313153 |
| 17 | 1 | 83 | 9 | 0 | 0 | 612165 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:26 | | | | | | |
| Number of Bursts in Trial:19 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 3 | 86 | 12 | 1653 | 1969 | 441991 |
| 2 | 2 | 97 | 5 | 1050 | 0 | 512909 |
| 3 | 1 | 57 | 11 | 0 | 0 | 341588 |
| 4 | 2 | 62 | 10 | 1694 | 0 | 467023 |
| 5 | 1 | 64 | 9 | 0 | 0 | 414719 |
| 6 | 1 | 74 | 10 | 0 | 0 | 342356 |
| 7 | 1 | 59 | 8 | 0 | 0 | 38202 |
| 8 | 1 | 72 | 9 | 0 | 0 | 578338 |
| 9 | 1 | 50 | 8 | 0 | 0 | 500255 |
| 10 | 2 | 80 | 7 | 1553 | 0 | 40895 |
| 11 | 1 | 57 | 5 | 0 | 0 | 288684 |
| 12 | 3 | 92 | 9 | 1615 | 1125 | 431064 |
| 13 | 2 | 73 | 17 | 1506 | 0 | 310256 |
| 14 | 2 | 98 | 15 | 1845 | 0 | 540734 |
| 15 | 3 | 50 | 16 | 1133 | 1625 | 167737 |
| 16 | 1 | 57 | 19 | 0 | 0 | 241150 |
| 17 | 2 | 55 | 16 | 1592 | 0 | 579547 |
| 18 | 1 | 67 | 6 | 0 | 0 | 200971 |
| 19 | 2 | 95 | 12 | 1035 | 0 | 470144 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:27 | | | | | | |
| Number of Bursts in Trial:16 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 71 | 13 | 1718 | 0 | 335091 |
| 2 | 2 | 97 | 10 | 1694 | 0 | 233193 |
| 3 | 1 | 72 | 19 | 0 | 0 | 623966 |
| 4 | 3 | 80 | 7 | 1714 | 1744 | 83220 |
| 5 | 2 | 89 | 8 | 1586 | 0 | 121433 |
| 6 | 3 | 93 | 10 | 1486 | 1969 | 229502 |
| 7 | 3 | 99 | 12 | 1176 | 1840 | 533363 |
| 8 | 2 | 73 | 20 | 1639 | 0 | 591218 |
| 9 | 1 | 64 | 16 | 0 | 0 | 670866 |
| 10 | 2 | 62 | 15 | 1756 | 0 | 548421 |
| 11 | 3 | 64 | 15 | 1143 | 1682 | 161805 |
| 12 | 3 | 78 | 12 | 1562 | 1598 | 627582 |
| 13 | 3 | 50 | 8 | 1471 | 1388 | 489769 |
| 14 | 3 | 95 | 16 | 1260 | 1781 | 353129 |
| 15 | 3 | 88 | 19 | 1879 | 1267 | 386197 |
| 16 | 2 | 85 | 16 | 1235 | 0 | 430599 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:28 | | | | | | |
| Number of Bursts in Trial:16 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 1 | 67 | 12 | 0 | 0 | 467402 |
| 2 | 3 | 94 | 20 | 1402 | 1040 | 709608 |
| 3 | 1 | 64 | 12 | 0 | 0 | 317456 |
| 4 | 1 | 80 | 17 | 0 | 0 | 649898 |
| 5 | 1 | 74 | 13 | 0 | 0 | 121036 |
| 6 | 2 | 97 | 9 | 1043 | 0 | 215455 |
| 7 | 3 | 98 | 19 | 1110 | 1491 | 320483 |
| 8 | 2 | 57 | 5 | 1161 | 0 | 163129 |
| 9 | 1 | 93 | 9 | 0 | 0 | 283619 |
| 10 | 2 | 88 | 12 | 1655 | 0 | 303674 |
| 11 | 3 | 71 | 5 | 1905 | 1864 | 174438 |
| 12 | 1 | 58 | 7 | 0 | 0 | 685151 |
| 13 | 2 | 67 | 16 | 1583 | 0 | 45879 |
| 14 | 2 | 57 | 18 | 1790 | 0 | 633586 |
| 15 | 3 | 64 | 5 | 1436 | 1578 | 575151 |
| 16 | 1 | 60 | 7 | 0 | 0 | 546736 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|---------------------------------------|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:29 | | | | | | |
| Number of Bursts in Trial:16 | | | | | | |
| Chirp Center Frequency: See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 82 | 15 | 1443 | 0 | 379791 |
| 2 | 3 | 100 | 8 | 1257 | 1326 | 278893 |
| 3 | 3 | 56 | 14 | 1881 | 1347 | 207917 |
| 4 | 1 | 97 | 9 | 0 | 0 | 693107 |
| 5 | 3 | 91 | 12 | 1562 | 1388 | 425903 |
| 6 | 1 | 54 | 6 | 0 | 0 | 668361 |
| 7 | 1 | 72 | 8 | 0 | 0 | 98058 |
| 8 | 3 | 55 | 7 | 1554 | 1492 | 111940 |
| 9 | 2 | 77 | 13 | 1551 | 0 | 231727 |
| 10 | 3 | 93 | 16 | 1423 | 1862 | 8788 |
| 11 | 1 | 72 | 16 | 0 | 0 | 563569 |
| 12 | 3 | 57 | 19 | 1119 | 1381 | 498485 |
| 13 | 1 | 58 | 11 | 0 | 0 | 249059 |
| 14 | 2 | 95 | 12 | 1176 | 0 | 176715 |
| 15 | 1 | 82 | 12 | 0 | 0 | 104549 |
| 16 | 1 | 58 | 9 | 0 | 0 | 697366 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 5 | | | | | | |
|--|------------------|------------------|-------------------|---------------------------|---------------------------|--|
| Trial Number:30 or 0 as per the file structure | | | | | | |
| Number of Bursts in Trial: 11 | | | | | | |
| Chirp Center Frequency:See test page | | | | | | |
| Burst | Number of Pulses | Pulse Width (µs) | Chirp Width (MHz) | Pulse 1-to-2 spacing (µs) | Pulse 2-to-3 spacing (µs) | Starting Location Within Interval (µs) |
| 1 | 2 | 86 | 15 | 1671 | 0 | 252427 |
| 2 | 3 | 92 | 20 | 1506 | 1379 | 957631 |
| 3 | 3 | 63 | 11 | 1110 | 1483 | 480427 |
| 4 | 2 | 54 | 8 | 1777 | 0 | 28991 |
| 5 | 2 | 76 | 7 | 1723 | 0 | 398474 |
| 6 | 3 | 65 | 11 | 1594 | 1538 | 246196 |
| 7 | 2 | 82 | 15 | 1038 | 0 | 524109 |
| 8 | 3 | 78 | 12 | 1533 | 1378 | 85767 |
| 9 | 1 | 64 | 19 | 0 | 0 | 230819 |
| 10 | 1 | 83 | 19 | 0 | 0 | 859229 |
| 11 | 1 | 86 | 12 | 0 | 0 | 491740 |
| 12 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13 | 0 | 0 | 0 | 0 | 0 | 0 |
| 14 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17 | 0 | 0 | 0 | 0 | 0 | 0 |
| 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| 19 | 0 | 0 | 0 | 0 | 0 | 0 |
| 20 | 0 | 0 | 0 | 0 | 0 | 0 |

| RADAR TYPE 6 | |
|--------------|---|
| Trial # | Hopping Frequency List (MHz) |
| 1 | 5447,5361,5434,5556,5383,5401,5373,5503,5389,5482,5583,5646,5539,5412,5504,5312,5625,5615,5293,5397,5455,5551,5451,5478,5390,5411,5623,5316,5456,5354,5692,5723,5356,5631,5576,5672,5295,5457,5379,5308,5336,5502,5467,5366,5263,5518,5302,5639,5527,5593,5596,5299,5437,5408,5621,5635,5681,5444,5718,5714,5475,5657,5378,5616,5648,5433,5505,5652,5364,5579,5407,5638,5338,5368,5709,5348,5358,5708,5513,5587,5642,5535,5673,5260,5666,5716,5575,5464,5558,5624,5569,5339,5335,5522,5712,5264,5439,5385,5289,5572 |
| 2 | 5650,5570,5346,5371,5605,5491,5649,5319,5621,5698,5363,5485,5495,5710,5373,5253,5668,5498,5505,5469,5454,5620,5610,5258,5511,5561,5721,5350,5573,5293,5507,5436,5634,5413,5266,5395,5478,5343,5509,5316,5700,5499,5443,5501,5701,5575,5276,5251,5289,5260,5611,5568,5544,5367,5280,5684,5338,5585,5494,5548,5470,5578,5441,5651,5576,5332,5693,5703,5500,5574,5714,5439,5679,5427,5359,5282,5661,5534,5719,5311,5563,5522,5593,5339,5295,5435,5390,5483,5465,5546,5402,5279,5590,5310,5299,5723,5669,5283,5646,5622 |
| 3 | 5378,5299,5413,5578,5575,5305,5648,5484,5499,5486,5632,5545,5308,5286,5708,5517,5359,5341,5498,5617,5342,5650,5562,5662,5590,5686,5250,5328,5600,5723,5464,5290,5607,5382,5585,5335,5559,5706,5296,5640,5371,5534,5489,5716,5487,5633,5300,5518,5376,5554,5373,5681,5266,5526,5321,5711,5618,5538,5485,5429,5547,5568,5446,5404,5657,5273,5506,5570,5427,5529,5277,5717,5425,5682,5636,5457,5677,5599,5703,5333,5369,5366,5309,5263,5573,5337,5483,5405,5542,5354,5667,5397,5291,5478,5449,5586,5352,5297,5581,5641 |
| 4 | 5504,5683,5713,5716,5329,5536,5661,5626,5277,5601,5383,5673,5590,5363,5284,5459,5598,5259,5658,5429,5336,5271,5711,5648,5592,5569,5453,5436,5596,5574,5723,5267,5312,5553,5411,5378,5317,5659,5287,5400,5582,5377,5665,5695,5718,5532,5652,5444,5715,5342,5364,5402,5554,5483,5696,5314,5374,5485,5458,5439,5406,5276,5385,5655,5528,5535,5597,5330,5530,5325,5620,5278,5479,5619,5295,5678,5286,5455,5446,5608,5482,5319,5313,5667,5423,5610,5392,5638,5559,5254,5367,5571,5634,5432,5266,5468,5373,5589,5651,5361 |
| 5 | 5501,5448,5671,5449,5718,5522,5519,5502,5314,5295,5465,5408,5267,5588,5627,5260,5336,5647,5381,5368,5534,5281,5338,5412,5536,5426,5466,5389,5467,5407,5455,5513,5677,5416,5699,5664,5399,5424,5369,5307,5723,5684,5413,5617,5569,5364,5458,5286,5713,5666,5717,5691,5417,5582,5431,5346,5303,5362,5572,5613,5259,5619,5315,5421,5652,5321,5594,5662,5473,5261,5310,5322,5435,5724,5644,5351,5655,5430,5418,5450,5532,5331,5692,5327,5316,5669,5401,5320,5518,5552,5397,5436,5387,5300,5443,5507,5656,5405,5344,5287 |
| 6 | 5512,5489,5676,5431,5391,5444,5470,5626,5355,5695,5369,5714,5412,5395,5670,5365,5384,5251,5543,5455,5342,5434,5639,5518,5263,5368,5320,5460,5278,5295,5437,5659,5393,5430,5563,5364,5488,5259,5600,5396,5617,5446,5426,5317,5397,5254,5330,5297,5562,5540,5270,5578,5556,5419,5304,5286,5638,5378,5326,5400,5415,5327,5650,5657,5305,5269,5515,5555,5602,5374,5376,5620,5257,5572,5370,5258,5288,5272,5623,5462,5274,5344,5260,5509,5328,5575,5606,5523,5721,5452,5501,5385,5710,5466,5256,5663,5691,5432,5718,5524 |
| 7 | 5297,5439,5517,5369,5288,5377,5516,5589,5625,5562,5700,5431,5504,5477,5277,5493,5577,5399,5361,5500,5481,5437,5278,5273,5472,5531,5617,5524,5378,5622,5569,5460,5462,5613,5307,5486,5485,5593,5660,5600,5547,5367,5528,5285,5419,5503,5635,5364,5282,5606,5274,5540,5251,5488,5346,5571,5624,5315,5496,5434,5327,5587,5293,5560,5588,5694,5256,5342,5530,5425,5720,5605,5614,5636,5469,5362,5363,5264,5687,5436,5646,5612,5544,5389,5669,5272,5286,5353,5289,5666,5716,5583,5639,5370,5271,5476,5430,5659,5576,5602 |

| RADAR TYPE 6 | |
|--------------|---|
| Trial # | Hopping Frequency List (MHz) |
| 8 | 5353,5459,5510,5427,5495,5419,5462,5624,5582,5638,5701,5400,5592,5398,5508,5389,5531,5502,5500,5597,5528,5445,5503,5449,5672,5605,5717,5362,5506,5408,5711,5692,5512,5565,5537,5501,5261,5583,5668,5552,5291,5384,5670,5663,5515,5598,5693,5471,5407,5586,5704,5323,5632,5681,5311,5479,5614,5349,5368,5423,5652,5451,5432,5329,5557,5696,5613,5519,5644,5556,5294,5487,5558,5406,5352,5369,5394,5465,5662,5554,5713,5439,5658,5581,5507,5491,5452,5648,5686,5267,5461,5333,5424,5290,5721,5403,5676,5488,5280,5659 |
| 9 | 5561,5571,5373,5525,5323,5511,5308,5679,5627,5486,5348,5537,5444,5615,5624,5365,5423,5262,5675,5315,5567,5564,5349,5540,5298,5322,5653,5328,5398,5311,5710,5608,5303,5602,5336,5457,5639,5434,5432,5433,5498,5270,5449,5644,5649,5614,5533,5391,5606,5705,5663,5538,5689,5342,5722,5471,5557,5476,5250,5583,5704,5531,5566,5500,5282,5654,5390,5632,5508,5553,5493,5319,5543,5620,5374,5369,5661,5516,5331,5297,5502,5643,5685,5605,5589,5625,5413,5573,5453,5691,5429,5674,5612,5719,5473,5520,5579,5699,5446,5360 |
| 10 | 5295,5333,5273,5428,5571,5662,5351,5541,5463,5293,5265,5484,5453,5504,5260,5429,5382,5672,5257,5345,5369,5644,5403,5352,5364,5675,5258,5379,5684,5573,5332,5610,5457,5560,5427,5267,5688,5311,5617,5359,5410,5676,5669,5470,5357,5709,5388,5631,5692,5715,5375,5654,5645,5313,5621,5653,5696,5581,5614,5685,5448,5598,5516,5297,5425,5492,5680,5283,5477,5534,5717,5401,5420,5455,5626,5395,5641,5435,5426,5574,5509,5671,5331,5630,5266,5363,5371,5284,5339,5285,5469,5449,5320,5679,5309,5526,5432,5701,5648,5317 |
| 11 | 5487,5566,5662,5494,5618,5416,5276,5551,5665,5429,5509,5599,5339,5569,5690,5519,5475,5533,5259,5669,5442,5314,5517,5648,5349,5500,5586,5364,5252,5449,5650,5441,5433,5490,5693,5497,5470,5680,5258,5512,5344,5290,5603,5706,5359,5264,5300,5591,5418,5639,5373,5295,5501,5394,5570,5640,5434,5427,5309,5674,5622,5386,5550,5702,5346,5577,5250,5406,5347,5274,5368,5391,5472,5571,5313,5281,5260,5318,5387,5713,5549,5652,5676,5548,5547,5518,5588,5605,5654,5333,5698,5619,5439,5323,5638,5691,5673,5477,5541,5524 |
| 12 | 5401,5499,5687,5369,5487,5290,5278,5663,5554,5723,5461,5251,5300,5395,5537,5427,5583,5553,5410,5697,5366,5284,5418,5577,5382,5715,5616,5439,5347,5352,5485,5258,5377,5525,5516,5585,5428,5281,5547,5576,5716,5504,5699,5408,5438,5273,5349,5279,5357,5317,5569,5330,5360,5711,5496,5398,5563,5565,5452,5533,5700,5717,5647,5594,5270,5566,5405,5522,5587,5370,5375,5505,5443,5419,5669,5692,5517,5610,5719,5320,5413,5694,5409,5435,5475,5441,5509,5399,5262,5400,5301,5416,5432,5445,5351,5479,5619,5677,5571,5454 |
| 13 | 5449,5282,5585,5612,5666,5292,5529,5606,5402,5679,5457,5463,5532,5554,5677,5435,5560,5341,5688,5263,5438,5357,5700,5453,5277,5711,5474,5590,5288,5716,5291,5473,5689,5661,5548,5547,5534,5398,5704,5518,5445,5569,5625,5615,5293,5422,5528,5713,5558,5265,5307,5381,5543,5664,5567,5250,5416,5715,5589,5262,5540,5283,5645,5497,5504,5609,5324,5336,5583,5442,5719,5705,5303,5640,5674,5597,5604,5417,5686,5579,5580,5290,5675,5584,5482,5403,5687,5276,5383,5406,5409,5720,5423,5524,5344,5496,5511,5593,5685,5471 |
| 14 | 5573,5270,5499,5363,5324,5618,5716,5386,5444,5301,5677,5684,5718,5695,5637,5272,5456,5362,5278,5557,5308,5562,5545,5442,5604,5366,5579,5326,5645,5425,5711,5619,5543,5351,5564,5707,5289,5612,5414,5284,5721,5686,5358,5293,5463,5530,5373,5657,5505,5398,5378,5413,5260,5449,5307,5483,5683,5288,5688,5310,5524,5600,5691,5314,5424,5593,5322,5290,5416,5475,5589,5522,5312,5436,5399,5390,5560,5455,5346,5605,5277,5396,5491,5380,5341,5365,5650,5531,5653,5375,5321,5661,5412,5327,5355,5504,5584,5464,5598,5648 |

| RADAR TYPE 6 | |
|--------------|---|
| Trial # | Hopping Frequency List (MHz) |
| 15 | 5700,5580,5351,5384,5263,5632,5343,5373,5558,5591,5489,5643,5573,5544,5548,5294,5502,5682,5365,5610,5547,5464,5451,5375,5438,5678,5322,5716,5454,5675,5486,5330,5257,5353,5420,5635,5279,5681,5267,5529,5541,5421,5494,5634,5507,5575,5311,5252,5627,5349,5712,5350,5379,5671,5310,5560,5644,5607,5354,5408,5636,5469,5374,5637,5265,5546,5347,5422,5647,5721,5679,5669,5293,5540,5391,5393,5673,5584,5706,5269,5659,5506,5303,5260,5291,5432,5336,5262,5582,5415,5383,5662,5295,5431,5296,5251,5333,5563,5382,5270 |
| 16 | 5252,5266,5269,5685,5501,5658,5495,5427,5616,5466,5439,5381,5686,5535,5539,5640,5335,5382,5713,5622,5666,5336,5603,5407,5453,5347,5492,5538,5705,5454,5644,5345,5373,5282,5258,5275,5412,5376,5358,5250,5579,5560,5691,5673,5668,5531,5333,5620,5482,5675,5575,5485,5329,5388,5587,5481,5403,5416,5681,5446,5411,5547,5343,5653,5527,5514,5478,5684,5273,5712,5292,5355,5369,5654,5463,5646,5263,5597,5306,5619,5694,5612,5678,5342,5611,5549,5680,5559,5363,5529,5523,5405,5693,5582,5651,5588,5442,5698,5521,5458 |
| 17 | 5374,5559,5389,5543,5625,5552,5411,5577,5573,5370,5700,5435,5627,5653,5314,5318,5403,5394,5717,5564,5528,5613,5373,5583,5504,5338,5286,5479,5292,5632,5419,5705,5546,5425,5309,5540,5265,5722,5536,5368,5523,5252,5429,5315,5654,5430,5582,5298,5706,5681,5486,5436,5531,5289,5515,5656,5535,5666,5675,5720,5474,5477,5254,5503,5387,5396,5431,5446,5255,5610,5695,5597,5272,5356,5299,5434,5371,5723,5589,5473,5664,5598,5258,5701,5270,5712,5310,5452,5268,5566,5427,5329,5297,5626,5524,5484,5648,5600,5465,5378 |
| 18 | 5417,5513,5409,5607,5350,5469,5553,5721,5274,5250,5538,5381,5494,5411,5685,5410,5260,5267,5549,5492,5693,5578,5431,5654,5598,5355,5399,5470,5448,5354,5314,5382,5605,5533,5647,5586,5612,5566,5623,5438,5719,5614,5294,5559,5610,5665,5363,5474,5631,5300,5697,5563,5332,5479,5258,5320,5333,5522,5644,5425,5473,5723,5602,5288,5380,5708,5594,5505,5584,5589,5290,5554,5520,5530,5334,5643,5263,5446,5695,5564,5356,5545,5617,5496,5540,5641,5325,5390,5295,5670,5627,5539,5293,5501,5316,5353,5629,5704,5467,5439 |
| 19 | 5429,5448,5531,5528,5437,5288,5507,5459,5563,5417,5632,5443,5611,5487,5461,5303,5588,5509,5449,5625,5508,5575,5505,5627,5520,5562,5392,5671,5306,5541,5716,5346,5642,5365,5418,5689,5262,5453,5286,5608,5655,5457,5502,5350,5428,5345,5407,5263,5579,5300,5290,5445,5268,5538,5646,5598,5276,5641,5451,5364,5512,5600,5352,5525,5495,5318,5497,5384,5472,5565,5694,5301,5322,5404,5425,5405,5378,5341,5255,5501,5521,5328,5353,5444,5545,5662,5362,5537,5559,5494,5674,5626,5434,5326,5636,5669,5332,5260,5630,5697 |
| 20 | 5427,5569,5594,5525,5597,5425,5466,5296,5710,5421,5502,5349,5369,5273,5422,5300,5498,5560,5652,5572,5638,5321,5552,5351,5694,5372,5604,5493,5433,5259,5720,5595,5548,5625,5509,5574,5269,5314,5661,5513,5508,5696,5527,5302,5373,5586,5497,5332,5308,5309,5355,5267,5492,5354,5628,5303,5528,5526,5411,5506,5478,5546,5637,5450,5495,5716,5501,5374,5538,5580,5654,5618,5629,5320,5481,5632,5262,5487,5537,5489,5520,5639,5608,5459,5709,5707,5535,5640,5298,5655,5460,5385,5667,5251,5341,5532,5659,5542,5562,5723 |
| 21 | 5708,5354,5621,5514,5649,5593,5665,5306,5577,5395,5368,5564,5334,5357,5291,5390,5556,5295,5264,5570,5385,5389,5271,5496,5319,5485,5547,5255,5555,5702,5330,5494,5428,5412,5625,5355,5338,5442,5610,5296,5358,5437,5327,5314,5266,5353,5642,5491,5519,5711,5365,5548,5615,5588,5568,5332,5374,5444,5413,5660,5475,5599,5315,5647,5456,5301,5363,5409,5692,5461,5673,5312,5681,5479,5690,5567,5563,5489,5286,5716,5689,5670,5538,5307,5272,5723,5446,5250,5423,5686,5452,5724,5392,5693,5720,5501,5468,5597,5580,5403 |

| RADAR TYPE 6 | |
|--------------|---|
| Trial # | Hopping Frequency List (MHz) |
| 22 | 5640,5505,5375,5619,5478,5571,5457,5420,5439,5608,5350,5653,5348,5399,5637,5336,5365,5688,5692,5288,5711,5584,5682,5337,5722,5572,5311,5659,5543,5368,5258,5339,5384,5633,5526,5621,5319,5494,5600,5517,5252,5496,5569,5624,5464,5371,5622,5352,5642,5381,5482,5717,5613,5364,5646,5418,5532,5481,5723,5395,5486,5489,5341,5563,5437,5598,5266,5267,5595,5425,5286,5264,5307,5675,5684,5411,5610,5265,5451,5269,5705,5604,5452,5512,5263,5601,5491,5330,5625,5432,5626,5363,5612,5630,5438,5328,5632,5361,5605,5298 |
| 23 | 5435,5469,5459,5604,5325,5362,5417,5458,5718,5538,5480,5581,5460,5303,5519,5589,5659,5500,5697,5666,5492,5455,5365,5297,5722,5360,5263,5516,5341,5577,5383,5553,5660,5271,5390,5451,5456,5513,5699,5485,5338,5608,5280,5420,5384,5533,5574,5698,5586,5686,5664,5531,5705,5354,5411,5606,5690,5348,5475,5667,5270,5446,5627,5448,5632,5368,5497,5449,5293,5434,5423,5518,5695,5277,5414,5692,5665,5603,5382,5724,5615,5444,5680,5642,5703,5570,5490,5266,5281,5464,5616,5706,5557,5512,5285,5374,5542,5502,5259,5326 |
| 24 | 5722,5639,5275,5470,5343,5724,5271,5690,5261,5254,5611,5412,5580,5612,5527,5270,5407,5486,5480,5385,5432,5384,5402,5587,5347,5542,5484,5662,5363,5678,5257,5670,5566,5705,5655,5465,5668,5648,5281,5443,5650,5694,5553,5626,5578,5430,5628,5602,5265,5481,5332,5502,5504,5665,5539,5598,5607,5720,5511,5278,5623,5300,5603,5467,5263,5490,5682,5312,5326,5483,5454,5286,5460,5463,5556,5501,5259,5641,5638,5647,5595,5416,5625,5415,5401,5592,5311,5652,5574,5656,5622,5321,5272,5360,5388,5644,5404,5297,5455,5672 |
| 25 | 5346,5597,5329,5518,5629,5356,5266,5429,5373,5300,5363,5324,5530,5444,5265,5556,5605,5355,5563,5392,5304,5478,5623,5474,5499,5687,5693,5452,5271,5432,5674,5420,5339,5453,5495,5438,5573,5305,5277,5516,5322,5624,5310,5303,5314,5364,5483,5389,5267,5417,5362,5617,5659,5618,5593,5699,5579,5268,5666,5387,5539,5408,5665,5351,5668,5709,5327,5551,5708,5550,5328,5296,5336,5706,5578,5435,5459,5312,5253,5561,5527,5404,5559,5626,5464,5718,5286,5335,5378,5491,5639,5683,5360,5287,5534,5562,5284,5592,5570,5572 |
| 26 | 5637,5264,5385,5408,5558,5343,5653,5476,5404,5650,5514,5390,5555,5492,5297,5337,5714,5513,5717,5643,5570,5317,5620,5605,5310,5356,5535,5475,5694,5398,5527,5682,5557,5647,5612,5328,5559,5453,5716,5450,5485,5283,5418,5499,5519,5486,5474,5294,5291,5651,5251,5369,5505,5348,5451,5533,5252,5434,5502,5711,5433,5722,5409,5259,5405,5443,5556,5586,5436,5340,5582,5266,5413,5250,5649,5319,5280,5327,5493,5547,5461,5447,5263,5300,5506,5431,5511,5501,5674,5464,5614,5268,5289,5458,5421,5507,5318,5257,5594,5516 |
| 27 | 5564,5250,5510,5432,5475,5403,5417,5493,5641,5436,5668,5308,5543,5720,5542,5506,5330,5255,5554,5316,5336,5284,5301,5446,5546,5384,5313,5710,5479,5453,5382,5608,5262,5515,5323,5681,5357,5334,5431,5410,5277,5671,5684,5471,5462,5603,5482,5426,5427,5514,5450,5478,5465,5381,5278,5582,5282,5429,5655,5682,5464,5651,5626,5362,5529,5716,5257,5298,5447,5721,5610,5650,5338,5341,5700,5333,5505,5555,5534,5415,5276,5592,5441,5379,5522,5289,5666,5653,5500,5251,5480,5320,5456,5283,5569,5349,5491,5419,5264,5705 |
| 28 | 5518,5564,5552,5707,5387,5290,5302,5498,5501,5598,5371,5516,5438,5308,5435,5257,5677,5315,5370,5671,5669,5608,5420,5412,5606,5307,5380,5708,5432,5314,5364,5401,5295,5324,5601,5539,5626,5600,5252,5524,5377,5358,5528,5267,5699,5384,5367,5316,5354,5618,5284,5573,5681,5381,5545,5505,5647,5514,5319,5534,5365,5393,5559,5405,5442,5300,5413,5495,5394,5480,5312,5589,5333,5721,5591,5500,5259,5507,5261,5476,5644,5421,5719,5462,5454,5568,5351,5599,5715,5550,5686,5488,5666,5373,5339,5428,5450,5661,5641,5623 |

| RADAR TYPE 6 | |
|--------------|---|
| Trial # | Hopping Frequency List (MHz) |
| 29 | 5651,5648,5678,5283,5723,5582,5382,5482,5639,5709,5447,5654,5493,5542,5457,5664,5637,5686,5445,5714,5342,5420,5629,5492,5261,5317,5384,5646,5297,5444,5351,5308,5454,5270,5276,5539,5501,5534,5352,5555,5467,5483,5636,5702,5401,5559,5422,5607,5489,5538,5358,5465,5531,5480,5268,5436,5272,5655,5460,5435,5389,5450,5473,5516,5642,5413,5583,5615,5497,5584,5509,5652,5340,5427,5620,5554,5288,5533,5631,5718,5567,5527,5464,5521,5314,5512,5357,5256,5441,5345,5262,5674,5289,5689,5325,5499,5575,5403,5671,5696 |
| 30 | 5341,5346,5570,5285,5618,5422,5627,5538,5613,5546,5647,5259,5720,5371,5349,5565,5410,5507,5491,5536,5317,5556,5328,5318,5671,5515,5323,5457,5446,5469,5717,5373,5517,5550,5429,5693,5667,5387,5464,5558,5395,5628,5440,5436,5664,5294,5567,5701,5594,5339,5637,5384,5509,5267,5501,5353,5348,5420,5342,5394,5554,5523,5467,5666,5380,5623,5273,5293,5657,5391,5414,5607,5256,5470,5480,5576,5379,5648,5461,5382,5646,5645,5676,5415,5298,5360,5460,5700,5313,5611,5447,5599,5626,5696,5315,5274,5705,5718,5463,5619 |