


### Emission Mask Compliance

To determine emission mask compliance the test equipment configuration shown on Figure 1 and Figure 2 was used. The transmitter was tested for compliance with the stringent emission mask classification. The first part of the tests measured the adjacent channel emission and the second part of the tests measured the harmonic and spurious energy.

Step 1: The transmitter was energized at 10 watts on channel 31 (center frequency of 575 MHz) as calculated by the insertion loss of the directional coupler and the reference was established on the spectrum analyzer (using the channel power measurement mode).

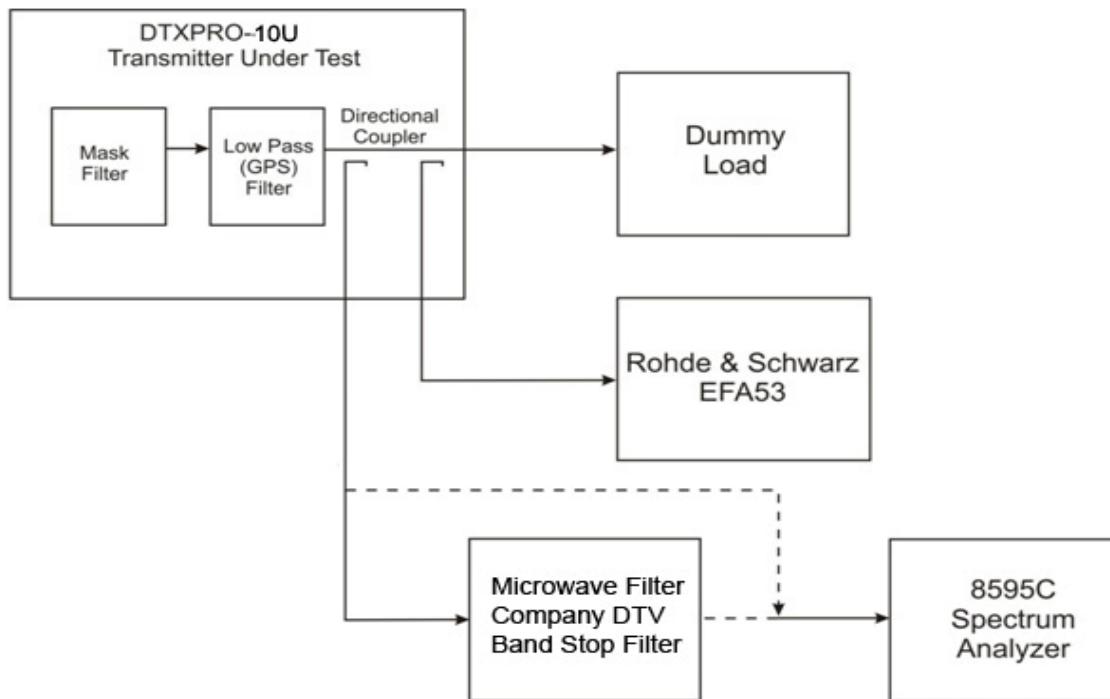

Note: Dashed line indicates connection for the first part of the adjacent channel measurement.

Figure 2

## Emission Mask Compliance

Step 2: Measure the first four 500 kHz sub-bands on each side of the desired channel. For this part of the measurement, the stop band filter was not necessary. The attenuator on the spectrum analyzer was adjusted so that it was not being overloaded. Once the first four sub-bands were measured, the signal was close to the noise floor. Screenshots 2 and 3 show the spectrum on either side of the desired channel as an example of the measurements.



Screenshot 1 - Channel power measured at 575.25 MHz


### Emission Mask Compliance



Screenshot 2

Lower sideband spectrum measured using channel power mode

Center frequency = 571.75 MHz Sub Band -1

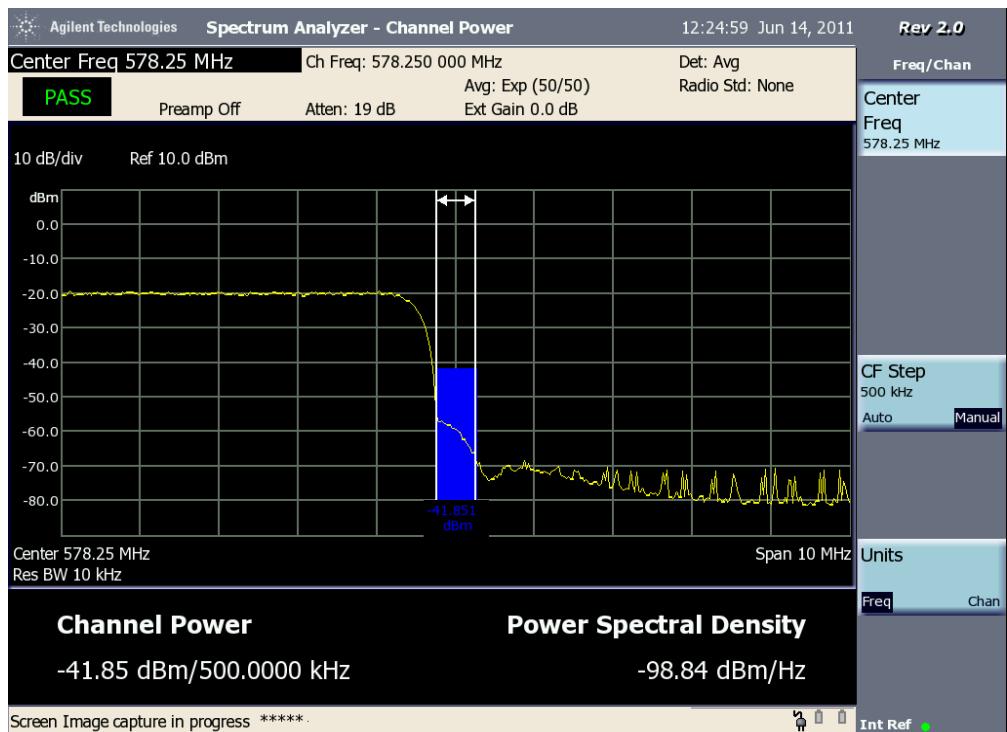


Screenshot 3

Lower sideband spectrum measured using channel power mode

Center frequency = 578.25 MHz Sub Band +1

**Emission Mask Compliance**

Step 3: Install the band stop filter in the path from the coupler to the spectrum analyzer and reduce the attenuation so that the emissions in the remaining sub-bands could be measured. The band stop filter frequency response was determined using a network analyzer. The insertion loss at the center of each of the twelve 500 kHz segments on either side of the main channel was tabulated. The band stop filter response is shown below as Plot 1.

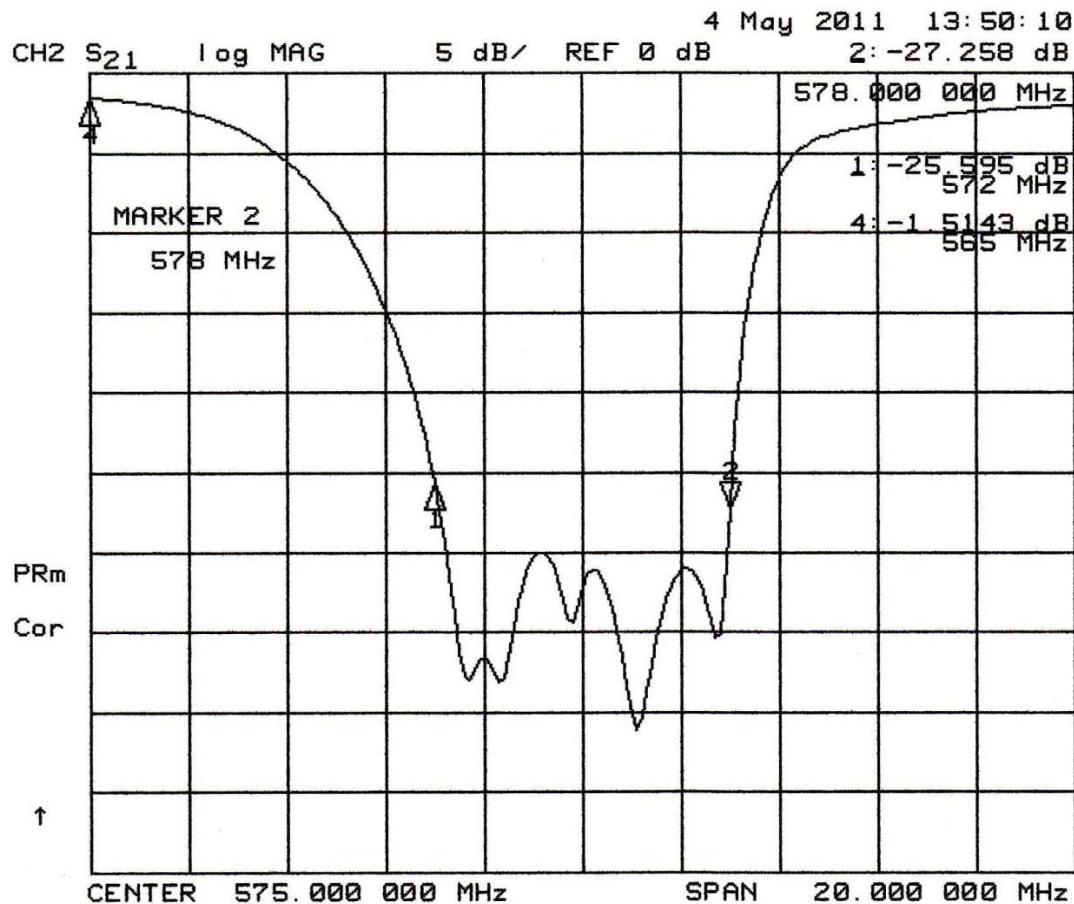

Plot 1

### Emission Mask Compliance

The first step of the procedure optimized the level of the spectrum analyzer dynamic range ensuring the noise floor was below the value assumed if the transmitter spectrum just met the limits of the emission mask. Once that was done, the spectrum analyzer attenuator was not changed and the channel power mode was engaged to measure each of the remaining 500kHz segments (on both sides of the desired channel) using the center frequency of that segment.

The final step was to make any adjustments necessary for the proximity of the noise floor and to take into account the stop band filter loss in that order and record the values in the table. Then those recorded power levels were subtracted from the total power in the desired channel and values were tabulated to determine if they met the emission mask.

The table with the corrected emission mask measurement values is presented below. The transmitter emissions met the requirements as indicated by comparison with the FCC Stringent Emission Mask.

Lower Adjacent Channel Measurements (15 Watts Average)										
Channel	31	Center Frequency		575						
Sub-band	Center Freq MHz	6MHz Channel Power dBm (0dB <sub>DTV</sub> )	500kHz Spectrum Analyzer Noise Channel Power dBm	500kHz Measured Channel Power dBm	Stop Band Filter Gain dB	500kHz Channel Power Corrected For Noise Floor	500kHz Channel Power Corrected For Stop Band Filter dBm	Sub Band Power dB <sub>DTV</sub>	FCC Mask Limit dB <sub>DTV</sub>	
-1	571.75	7.6	-60.5	-43.1	----	**	-----	-50.7	-47.0	
-2	571.25	7.6	-61.7	-55.8	----	**	-----	-63.4	-49.9	
-3	570.75	7.6	-60.8	-55.6	----	**	-----	-63.2	-55.6	
-4	570.25	7.6	-60.5	-56.7	----	**	-----	-64.3	-61.4	
STOP BAND FILTER USED BELOW THIS LINE										
-5	569.75	7.6	-93.3	-69.7	-7.5	**	-62.2	-69.8	-67.1	
-6	569.25	7.6	-94.0	-70.3	-5.8	**	-64.5	-72.1	-71.9	
-7	568.75	7.6	-93.6	-71.3	-4.6	**	-66.7	-74.3	-76.0	
-8	568.25	7.6	-93.5	-72.4	-3.7	**	-68.7	-76.3	-76.0	
-9	567.75	7.6	-93.3	-73.8	-3.1	**	-70.7	-78.3	-76.0	
-10	567.25	7.6	-94.0	-75.6	-2.6	**	-73.0	-80.6	-76.0	
-11	566.75	7.6	-93.6	-77.8	-2.3	**	-75.5	-83.1	-76.0	
-12	566.25	7.6	-93.4	-79.6	-2.0	**	-77.6	-85.2	-76.0	
A	B	C	D	E	F	G	H	I	J	
** Noise floor proximity correction was not necessary to meet the mask and was not computed here.										
H = E-F		I = E-C (sub band 1 thru 4)			I = H-C (sub band 5 thru 12)					

**Emission Mask Compliance**

<b>Lower Adjacent Channel Measurements (5 Watts Average)</b>									
Channel <u>31</u>		Center Frequency <u>575</u>							
Sub-band	Center Freq MHz	6MHz Channel Power dBm (0dB <sub>DTV</sub> )	500kHz Spectrum Analyzer Noise Channel Power dBm	500kHz Measured Channel Power dBm	Stop Band Filter Gain dB	500kHz Channel Power Corrected For Noise Floor	500kHz Channel Power Corrected For Stop Band Filter dBm	Sub Band Power dB <sub>DTV</sub>	FCC Mask Limit dB <sub>DTV</sub>
-1	571.75	2.9	-63.5	-53.4	----	**	----	-56.3	-47.0
-2	571.25	2.9	-64.9	-63.6	----	**	----	-66.5	-49.9
-3	570.75	2.9	-64.3	-62.9	----	**	----	-65.8	-55.6
-4	570.25	2.9	-63.2	-62.7	----	**	----	-65.6	-61.4
<b>STOP BAND FILTER USED BELOW THIS LINE</b>									
-5	569.75	2.9	-95.1	-83.8	-7.49	**	-76.3	-79.2	-67.1
-6	569.25	2.9	-96.2	-85.4	-5.83	**	-79.6	-82.5	-71.9
-7	568.75	2.9	-95.8	-87.4	-4.61	**	-82.8	-85.7	-76.0
-8	568.25	2.9	-95.2	-89.1	-3.73	**	-85.4	-88.3	-76.0
-9	567.75	2.9	-95.2	-91.0	-3.08	**	-87.9	-90.8	-76.0
-10	567.25	2.9	96.3	-93.0	-2.62	**	-90.4	-93.3	-76.0
-11	566.75	2.9	-95.6	-94.5	-2.28	**	-92.2	-95.1	-76.0
-12	566.25	2.9	-95.1	-94.5	-2.03	**	-92.5	-95.4	-76.0
A	B	C	D	E	F	G	H	I	J

\*\* Noise floor proximity correction was not necessary to meet the mask and was not computed here.

H = E-F      I = E-C (sub band 1 thru 4)      I = H-C (sub band 5 thru 12)

**Emission Mask Compliance****Upper Adjacent Channel Measurements (15 Watts Average)**Channel 31 Center Frequency 575 MHz

Sub-band	Center Freq MHz	6MHz Channel Power dBm (0dB <sub>DTV</sub> )	500kHz Spectrum Analyzer Noise Channel Power dBm	500kHz Measured Channel Power dBm	Stop Band Filter Gain dB	500kHz Channel Power Corrected For Noise Floor	500kHz Channel Power Corrected For Stop Band Filter dBm	Sub Band Power dB <sub>DTV</sub>	FCC Mask Limit dB <sub>DTV</sub>
1	578.25	7.6	-60.8	-41.8	----	**	-----	-49.4	-47.0
2	578.75	7.6	-61.6	-54.4	----	**	-----	-62.0	-49.9
3	579.25	7.6	-61.5	-54.6	----	**	-----	-62.2	-55.6
4	579.75	7.6	-60.4	-55.7	----	**	-----	-63.3	-61.4
<b>STOP BAND FILTER USED BELOW THIS LINE</b>									
5	580.25	7.6	-93.5	-63.7	-3.57	**	-60.1	-67.7	-67.1
6	580.75	7.6	-93.7	-66.6	-3.29	**	-63.3	-70.9	-71.9
7	581.25	7.6	-94.3	-69.3	-3.04	**	-66.3	-73.9	-76.0
8	581.75	7.6	-93.3	-72.1	-2.79	**	-69.3	-76.9	-76.0
9	582.25	7.6	-93.4	-74.7	-2.57	**	-72.1	-79.7	-76.0
10	582.75	7.6	-93.6	-77.4	-2.38	**	-75.0	-82.6	-76.0
11	583.25	7.6	-94.1	-79.8	-2.18	**	-77.6	-85.2	-76.0
12	583.75	7.6	-93.2	-82.2	-2.02	**	-80.2	-87.8	-76.0
A	B	C	D	E	F	G	H	I	J

\*\* Noise floor proximity correction was not necessary to meet the mask and was not computed here.

H = E-F      I = E-C (sub band 1 thru 4)

I = H-C (sub band 5 thru 12)

**Emission Mask Compliance****Upper Adjacent Channel Measurements (5 Watts Average)**Channel 31 Center Frequency 575 MHz

Sub-band	Center Freq MHz	6MHz Channel Power dBm (0dB <sub>DTV</sub> )	500kHz Spectrum Analyzer Noise Channel Power dBm	500kHz Measured Channel Power dBm	Stop Band Filter Gain dB	500kHz Channel Power Corrected For Noise Floor	500kHz Channel Power Corrected For Stop Band Filter dBm	Sub Band Power dB <sub>DTV</sub>	FCC Mask Limit dB <sub>DTV</sub>
1	578.25	2.9	-63.3	-53.1	----	**	----	-56.0	-47.0
2	578.75	2.9	-64.3	-63.0	----	**	----	-65.9	-49.9
3	579.25	2.9	-65.1	-63.6	----	**	----	-66.5	-55.6
4	579.75	2.9	-63.5	-62.8	----	**	----	-65.7	-61.4
<b>STOP BAND FILTER USED BELOW THIS LINE</b>									
5	580.25	2.9	95.0	-95.2	-3.6	**	-91.6	-94.5	-67.1
6	580.75	2.9	-95.2	-95.8	-3.3	**	-92.5	-95.4	-71.9
7	581.25	2.9	-96.1	-96.2	-3.0	**	-93.2	-96.1	-76.0
8	581.75	2.9	-95.1	-95.2	-2.8	**	-92.4	-95.3	-76.0
9	582.25	2.9	-95.1	-95.0	-2.6	**	-92.4	-95.3	-76.0
10	582.75	2.9	-95.7	-95.9	-2.4	**	-93.5	-96.4	-76.0
11	583.25	2.9	-96.3	-96.2	-2.2	**	-94.0	-96.9	-76.0
12	583.75	2.9	-95.2	-95.3	-3.0	**	-92.3	-95.2	-76.0
A	B	C	D	E	F	G	H	I	J

\*\* Noise floor proximity correction was not necessary to meet the mask and was not computed here.

H = E-F      I = E-C (sub band 1 thru 4)      I = H-C (sub band 5 thru 12)

Step 4: Reconfigure the test setup as shown in Figure 1 in the Power Exhibit to insert the high pass filter NHB 1000 at point "B".

The high pass filter attenuates the on-channel frequencies and passes the harmonic frequencies.

Proceed with spurs and harmonics measurements with results shown on the following page.

**Emission Mask Compliance****ATSC Transmitter Spurs and Harmonics Output Power: 5 Watts Average**

Channel 31 Center Frequency 575 MHz

							500kHz Spectrum Analyzer Noise Channel Power dBm	500kHz Signal Channel Power dBm	500kHz Signal Channel Power Corrected for Noise Floor	500kHz Corrected Spurious Power dBm	6 MHz Main Channel Power 0dBTV	Spurious to Main Ratio dBTV	FCC Limit dBTV
Fc	575	6	-33.1	0.0	0.0	-43.30	-----	-----	**	-----	3.6	-----	-----
2Fc	1150	12	-27.3	5.8	-0.1	-0.70	-92.4	-88.8	**	-93.80	3.6	-97.4	-76
3Fc	1725	18	-24.2	8.9	-0.2	-0.49	-92.2	-91.3	**	-99.51	3.6	-103.1	-76
4Fc	2300	24	-22.5	10.6	-0.3	-0.72	-91.6	-91.5	**	-101.08	3.6	-104.7	-76
5Fc	2875	30	-21.3	11.8	-0.4	-0.59	-94.0	-94.1	**	-104.91	3.6	-108.5	-76
6Fc	3450	36	-21.1	12.0	-0.5	-0.55	-93.8	-93.7	**	-104.65	3.6	-108.3	-76
7Fc	4025	42	-21.6	11.5	-6.0	-0.62	-92.4	-92.2	**	-97.08	3.6	-100.7	-76
8Fc	4600	48	-23.6	9.5	-0.7	-0.82	-90.5	-90.4	**	-98.38	3.6	-102.0	-76
9Fc	5175	56	-25.6	7.5	-0.8	-1.36	-89.2	-89.2	**	-94.54	3.6	-98.1	-76
10Fc	5750	60	-30.1	3.0	-0.8	-1.35	-83.6	-87.6	**	-88.45	3.6	-92.1	-76
A	B	C	D	E	F	G	H	I	J	K	L	M	N

**ATSC Transmitter Spurs and Harmonics Output Power: 15W Watts Average**

Channel 31 Center Frequency 575 MHz

							500kHz Spectrum Analyzer Noise Channel Power dBm	500kHz Signal Channel Power dBm	500kHz Signal Channel Power Corrected for Noise Floor	500kHz Corrected Spurious Power dBm	6 MHz Main Channel Power 0dBTV	Spurious to Main Ratio dBTV	FCC Limit dBTV
Fc	575	6	-33.1	0.0	0.0	-43.30	-----	-----	**	-----	8.3	-----	-----
2Fc	1150	12	-27.3	5.8	-0.1	-0.70	-92.4	-82.0	**	-87.00	8.3	-95.3	-76
3Fc	1725	18	-24.2	8.9	-0.2	-0.49	-91.2	-91.3	**	-99.51	8.3	-107.8	-76
4Fc	2300	24	-22.5	10.6	-0.3	-0.72	-91.3	-91.5	**	-101.08	8.3	-109.4	-76
5Fc	2875	30	-21.3	11.8	-0.4	-0.59	-94.0	-93.9	**	-104.71	8.3	-113.0	-76
6Fc	3450	36	-21.1	12.0	-0.5	-0.55	-93.6	-93.8	**	-104.75	8.3	-113.1	-76
7Fc	4025	42	-21.6	11.5	-0.6	-0.62	-92.4	-92.4	**	-102.68	8.3	-111.0	-76
8Fc	4600	48	-23.6	9.5	-0.7	0.82	-90.3	-90.6	**	-100.22	8.3	-108.5	-76
9Fc	5175	56	-25.6	7.5	-0.8	-1.36	-89.2	-89.3	**	-94.64	8.3	-102.9	-76
10Fc	5750	60	-30.1	3.0	-0.8	-1.35	-87.5	-87.6	**	-88.45	8.3	-96.8	-76
A	B	C	D	E	F	G	H	I	J	K	L	M	N

\*\* Noise floor proximity correction was not necessary to meet the mask and was not computed here.

K=I-E-F-G      M=K-L

ITEM IDENTIFICATION	
Serial No.	Code
<b>0950-052353</b>	<b>C-LP39C-04</b>
Customer	Site Ref. <i>Click here to enter text.</i>
XU0120	
VALIDATION	
Repairs	Specs Ref. <i>Click here to enter text.</i>
Notes	<i>Click here to enter text.</i>
Date	Tester
14/12/2009	Danilo Passamonti

