

PRO 140i

Industrial-Class, In-Building Cell Signal Amplifier



Installation Guide

NEED HELP?

 wilsonpro.com

 866.294.1660

Index

| | |
|--------------------------|----|
| Package Contents | 1 |
| About The Pro 140i | 2 |
| Key Features | 4 |
| Post-Install Setup | 5 |
| User Interface | 7 |
| Safety Guidelines | 11 |
| Warranty | 13 |

Package Contents



Pro 140i



Outside Directional
Antenna + 75'
Wilson 400 Cable



Low Profile Inside
Antenna + 75'
Wilson 400 Cable

Pro 140i

Industrial-Class, In-Building Cell Signal Amplifier



Up to +26 dBm uplink power and 90 dB gain for maintaining connections with faraway cell towers



Up to +25 dBm downlink power for improved indoor cell coverage area

XDR
TECHNOLOGY


eXtended Dynamic Range (XDR)
for continuous connectivity



Color LCD screen, for easy installation and displaying detailed amplifier status



The Pro 140i industrial-class, in-building, cell signal amplifier provides significantly enhanced band 14 (700MHz) signal strength, supporting 4G LTE and 5G technology. The Pro 140i can be installed as either a “stand-alone” amplifier providing exclusive band 14 amplification, or it can be combined with a new or existing WilsonPro amplifier system, supporting multiple bands. Because the Pro 140i is an industrial class amplifier, local band 14 carrier approval must be obtained for every installation.

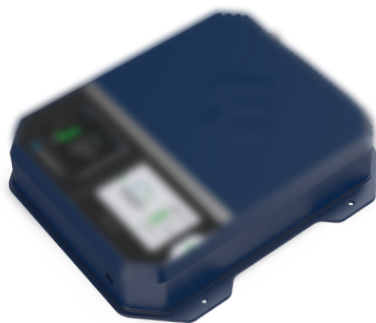

The Pro 140i also incorporates Wilson Electronics' state-of-the-art XDR (eXtended Dynamic Range) technology that prevents signal overload conditions which can, in accordance with regulations, force the amplifier to shut down. When the Pro 140i senses that any incoming cell signal is too strong and threatens to overload the system, XDR automatically reduces amplifier gain to compensate while maintaining signal coverage throughout the building. The Pro 140i incorporates an easy-to-use color LCD screen, and both antenna ports are located on the top of the unit for simple installation. Like all WilsonPro cell signal amplifiers, the Pro 140i amplifier system is universal: it works for all cellular devices, and all U.S. and Canada cell phone carriers using band 14 (700MHz).

Key Features



Industrial-Class Amplification: Up to 100,000 sq. ft. of Band 14 (700MHz) coverage with a single amplifier (local carrier approval required for each installation).



Extended Dynamic Range (XDR) for continuous connectivity: XDR allows the Pro 140i system to make automatic, real-time adjustments so it never shuts down due to a strong outside signal.



Onboard Software for Better Control: The amplifier is automatically controlled with built-in onboard software, ensuring reliable connectivity throughout large spaces and multi-story buildings. The amplifier will adjust its gain level up or down as required by the conditions of the immediate signal environment.



Color LCD Screen: The Pro 140i utilizes a color LCD screen for assessing amplifier performance and making necessary antenna adjustments.

Post-Install Setup

The Pro 140i is designed with advanced internal programming, which allows it to automatically adjust for a variety of conditions, while still amplifying weak signals.


Once the antenna cables are connected, turn the unit ON by inserting and twisting the power supply cord until it is securely locked in place.



Installation Diagram


A Wilson Lightning Surge Protector (859902) is recommended for all building installations. Make sure the protector is installed outside the building. Connect it to a suitable ground and in line, between the Outside Antenna and the Signal Amplifier.

Combined

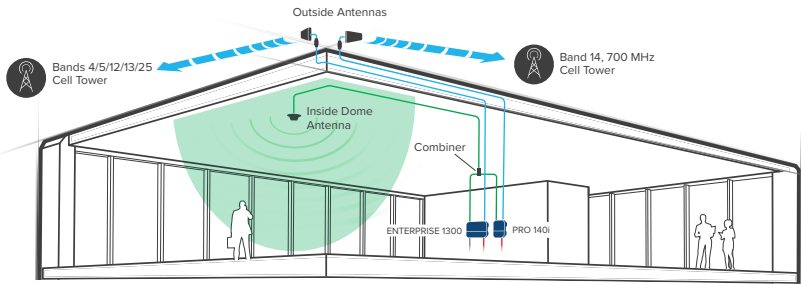

Pro140i and Enterprise 1300 (Common Mode) combined.

Stand Alone

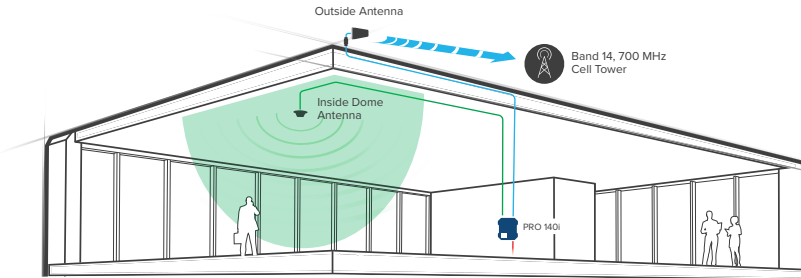

Stand-alone installation, providing cell coverage for Band 14 only.


User Interface

The Pro 140i takes about five seconds to boot up. Once boot up is complete, the main screen will appear, showing the amplification and status of Band 14.




Startup Screen

“FULL GAIN” is displayed in green if there is a weak outside signal requiring the amplifier to operate with maximum allowable gain. The amplifier is functioning normally; however, a stronger signal might be obtained with some antenna adjustments.

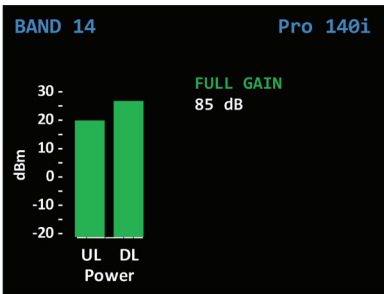


(User Interface cont.)

“XDR GAIN” is displayed in green, indicating that the amplifier has reduced its gain to accommodate a moderate to strong outside signal. The amplifier is functioning normally and no adjustments are needed.

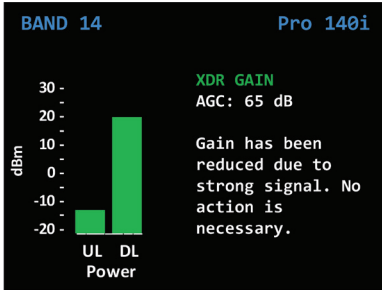


“OSCILLATION” is displayed in green, indicating that the amplifier has reduced its gain to accommodate a moderate oscillation condition. The amplifier is operating normally; however, a better performance might be obtained with some antenna adjustments.

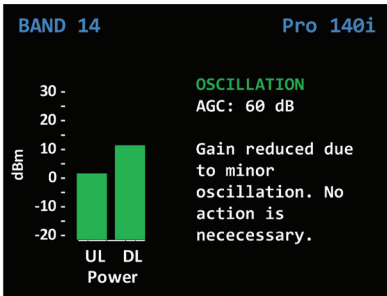


(User Interface cont.)

“OSCILLATION” is displayed in yellow, indicating a significant oscillation is occurring and band gain has been reduced below 65 dB. Reposition antennas (increase separation between inside and outside antennas and point in opposite directions) and then reboot (turn the unit off, then on) the Pro140i to reactivate Band 14 and maximize performance. When adequate separation is achieved, the yellow color will return to green upon reboot. Note: when the color is yellow, the band is Operational; however, performance is reduced.

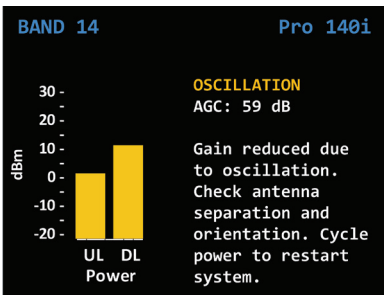

“SHUTDOWN” is displayed in red, indicating severe or repeated oscillations have occurred and the amplifier has shut off. Reposition antennas (increase separation between Outside and Inside Antenna, and point in opposite directions) and then reboot (turn the unit off & on) the Pro 140i to reactivate Band 14 and maximize performance. When adequate separation is achieved, the red color will return to green upon reboot.

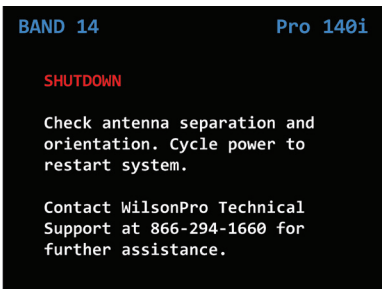

Safety Guidelines

Warnings

WARNING: Changes or modifications not expressly approved by Wilson Electronics will void the user's authority to operate the equipment.

WARNING: E911 location information may not be provided or may be inaccurate for calls served BY USING THIS DEVICE.

To uphold compliance with network protection standards, all active cellular devices must maintain at least 6 feet of separation distance from Panel and Dome antennas.

Use only the power supply provided in this package. Use of a non-Wilson Electronics product may damage your equipment.

RF Safety Warning: Any antenna used with this device must be located at least 10.4 inches from all persons.

WARNING. This is **NOT** a **CONSUMER** device. Is designed for installation by **FCC LICENSEES** and **QUALIFIED INSTALLERS**. You **MUST** have an **FCC LICENSE** or express consent of an FCC Licensee to operate this device. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each continuing violation.

WARNING. This is **NOT** a **CONSUMER** device. It is designed for installation by an installer approved by an **ISED** licensee. You **MUST** have an **ISED LICENCE** or the express consent of an **ISED** licensee to operate this device.

AVERTISSEMENT: Ce n'est **PAS** un appareil **CONSOMMATEUR**. Il est conçu pour être installé par un installateur agréé par un licencié **ISED**. Vous **DEVEZ** détenir une **LICENCE ISED** ou le consentement exprès d'un titulaire de licence **ISDE** pour utiliser cet appareil.

FOR MORE INFORMATION ON REQUIREMENTS SET OUT IN ISED CPC-2-1-05, SEE BELOW:

<http://www.ic.gc.ca/eic/site/smt-gst.nsf/eng/sf08942.html>

Antenna Specifications

This radio transmitter has been approved by the FCC and Innovation, Science and Economic Development (ISED) Canada to operate with the maximum permissible antenna gain below. Antenna that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

| | BAND 14 |
|--|---------|
| Outside antenna maximum permissible antenna gain (dBi) 50Ω | 6.3 dB |
| Inside antenna maximum permissible antenna gain (dBi) 50Ω | 7.0 dB |

| INSIDE ANTENNAS | | |
|-----------------|--|------------------|
| PN # | Antenna Type | Result |
| 314406 | 4G Low-Profile Dome Antenna w/ Reflector | Supports Band 14 |

| OUTSIDE ANTENNAS | | |
|------------------|-------------------------------|------------------|
| PN # | Antenna Type | Result |
| 311233 | Wide Band Directional Antenna | Supports Band 14 |

Specifications

| | |
|--|-------------------------------|
| Model Number | 074 |
| FCC ID | PW0074 |
| IC ID | 4726A-074 |
| Connectors | N-Female |
| Antenna Impedance | 50 Ohms |
| Max Gain | 90 dB |
| Frequency | 758-768 MHz, 788-798 MHz |
| Power output for single cell phone (Uplink) dBm | 700MHz Band 14 57 |
| Power output for single cell phone (Downlink) dBm | 700MHz Band 14 24.5 |
| Noise Figure | 5 dB nominal |
| Isolation | > 90 dB |
| Power Requirements | 120V AC 0.5A |

Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.

This device complies with Part 15 of FCC rules. Operation is subject to two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by Wilson Electronics could void the authority to operate this equipment.

Warranty

✓ 30-DAY MONEY-BACK GUARANTEE

All WilsonPro products are protected by WilsonPro 30-day money-back guarantee. If for any reason the performance of any product is not acceptable, simply return the product directly to the reseller with a dated proof of purchase.

✓ 3-YEAR WARRANTY

WilsonPro Amplifiers are warranted for three (3) years against defects in workmanship and/or materials. Warranty cases may be resolved by returning the product directly to the reseller with a dated proof of purchase.

Signal Amplifiers may also be returned directly to the manufacturer at the consumer's expense, with a dated proof of purchase and a Returned Material Authorization (RMA) number supplied by WilsonPro. WilsonPro shall, at its option, either repair or replace the product.

This warranty does not apply to any Signal Amplifiers determined by WilsonPro to have been subjected to misuse, abuse, neglect, or mishandling that alters or damages physical or electronic properties.

Replacement products may include refurbished WilsonPro products that have been recertified to conform with product specifications.

RMA numbers may be obtained by contacting Customer Support.

DISCLAIMER: The information provided by WilsonPro is believed to be complete and accurate. However, no responsibility is assumed by WilsonPro for any business or personal losses arising from its use, or for any infringements of patents or other rights of third parties that may result from its use.

MARKETING APPROVAL: Installer and end customer hereby grants to Wilson Electronics the express right to use installers or end customers company logo in marketing, sales, financial, and public relations materials and other communications solely to identify Customer as a Wilson Electronics customer.



3301 East Deseret Drive, St. George, UT
www.wilsonpro.com | support.wilsonpro.com

Copyright © 2023 Wilson Electronics. All rights reserved.
Wilson Electronics products covered by U.S. patent(s) and pending application(s)
For patents go to: weboost.com/us/patents