



WILSONPRO™
A Wilson Electronics Brand

WILSON PRO 1050

In-Building Cellular Signal Booster
With In-Line Amplification



User Manual

NEED HELP?

wilsonpro.com

866.294.1660

Index

Package Content	1
About The WilsonPro 1050 System	2
Key Features	4
Competitive Advantages	5
Post Install Setup	7
1050 Main Status Screen	8
1050 In-Line Status Screens	10
Safety Guidelines	12
Warranty	17

Package Content

Kit 460230



WilsonPro 1050
Two-Part Booster
System



Wide Band Directional
Antenna + 75'
Wilson 400 Cable



Dome Antenna +
100' Wilson 400 Cable



100' Wilson
400 Cable



2' Wilson
400 Cable




Lightning Surge
Protector

WilsonPro 1050 System


FCC Approved In-Line Amplification

Compensates for up to 300' of indoor cable losses using in-line amplification.

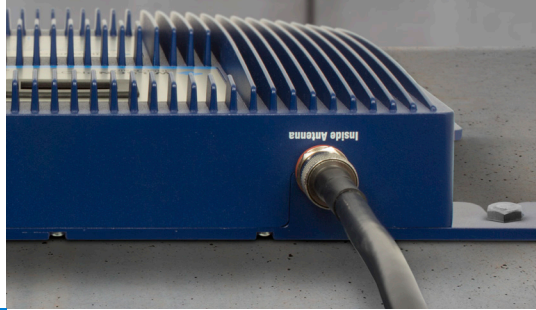

Onboard Software For Better Control


Automatically controlled with onboard software, ensuring great connectivity throughout large spaces and multi-story buildings.

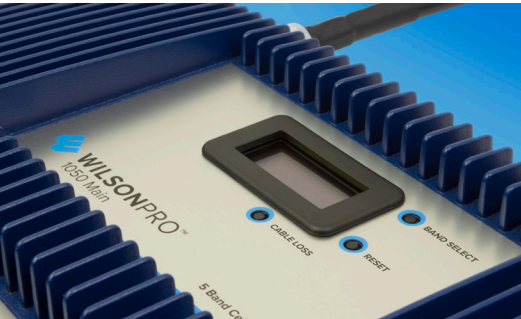

Extended Dynamic Range For Continuous Connectivity

XDR allows the booster system to never shutdown due to too strong of a signal. No matter how strong, the booster system will never overpower and shutdown.

XDR TECHNOLOGY

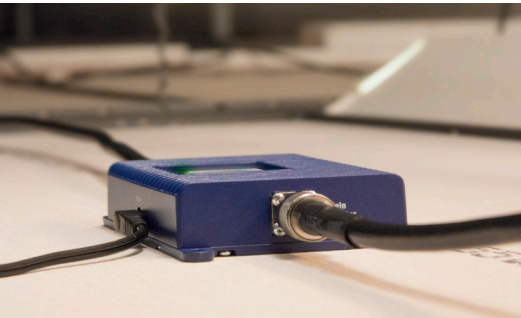

Auto-Calibration

Main booster & In-Line booster automatically link, communicate & calibrate.

In-Line Amplification

The WilsonPRO 1050 Cellular Signal Booster System automatically compensates for signal loss resulting from a long indoor RF coax cable run. Simply connect the 1050 In-Line unit at a cable length between 100' and 300' from the 1050 Main unit. When both units are powered up, they will begin to



communicate with each other, sending signals and calculating the amount of signal loss in the cable. Once cable losses are calculated, the gain levels are adjusted between the 1050 Main and 1050 In-Line units so that only enough extra gain is added to the system to compensate for the signal loss of the indoor cable.

This capability to overcome significant cable losses allows the 1050 System to provide cellular coverage in areas that were previously impossible, such as the lower floors of apartment buildings and other multi-dwelling units.

The WilsonPro 1050 system also includes Wilson Electronics' state-of-the-art XDR (Extended Dynamic Range) technology that prevents signal overload conditions which can, in accordance with FCC regulations, force a booster to shut down.

When the WilsonPro 1050 system senses that any incoming cell signal is too strong, and threatens to overload the system, XDR automatically reduces signal gain to compensate for this overload condition while maintaining signal coverage throughout the building. In contrast, competing signal boosters shut down when they reach a maximum incoming signal strength threshold, causing the indoor cell signal to drop out. Both antenna ports are located on the top of the 1050 Main unit for easy installation. Like all WilsonPro cell signal boosters, the WilsonPRO 1050 Cellular Signal Booster System is universal: it works for all cellular devices, all services including 4G LTE, and all U.S. and Canada cell phone carriers.

Key Features



FCC Approved In-Line Amplification: Compensates for up to 300' of indoor cable losses using in-line amplification, providing cell coverage to hard-to-reach areas.



Onboard Software for Better Control: Booster is automatically controlled with automatic onboard software, ensuring great connectivity throughout large spaces and multi-story buildings. The booster will adjust its gain level up or down as required by the conditions of the immediate signal environment.



Extended Dynamic Range (XDR) for continuous connectivity: Gives the 1050 much greater tolerance for a strong incoming signal from the tower. XDR lets the 1050 system work with an incoming signal stronger than any competing booster and never shuts down due to a strong outside signal.



Automatic Calibration: Main booster and In-Line booster automatically link, communicate, and calibrate.

Competitive Advantages



Highest Downlink Power: Up to +15dB more downlink power than the competition allows for stronger signal in environments where the incoming signal is weak. The benefit is a stronger signal sent to the inside antennas, providing larger coverage area from a single booster.



Highest Uplink Power: This allows for a stronger signal transmitted to the tower, up to +3dB more than the competition, providing greater user capacity and increased range from the cell site.



Lower Overload and Shutdown Threshold: No matter how strong the outside signal, the WilsonPro 1050 system never shuts down. This is a huge benefit in strong signal environments like cities and locations close to a carrier tower.




Intelligent Control: WilsonPro cellular boosters automatically adjust signal gain while still providing even signal coverage throughout the building.




Sophisticated Software: Cellular signals are constantly fluctuating. The software is always monitoring signal levels and making immediate adjustments as needed, allowing the booster to operate at maximum gain consistently.

Installation Diagram

A Wilson Lightning Surge Protector is recommended for all building installations. Make sure the protector is installed outside the building at point of entry connected to a suitable ground and in line between the Outside Antenna and the Signal Booster.

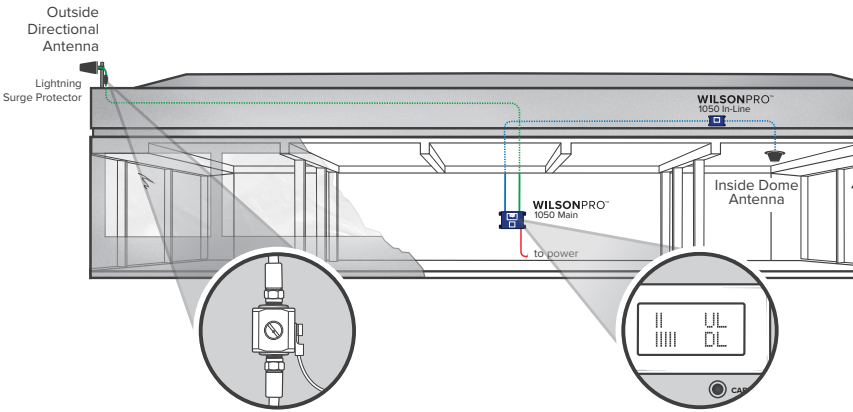

The direction of the outside antenna should be adjusted until the "DL" bar is maximized.

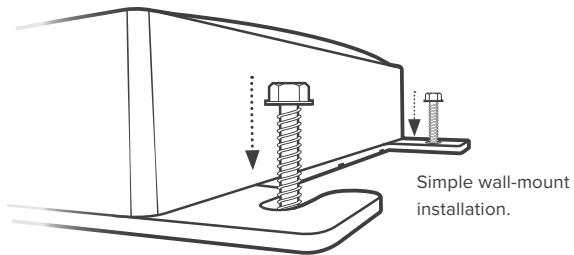


Simple wall-mount installation.

Post Install Setup

The WilsonPRO 1050 System is designed with advanced internal programming, which allows it to automatically adjust for a variety of conditions, while still boosting weak signals.

Once the AC power cable and antenna cables are connected, turn the unit on by toggling the power switch located near the AC power receptacle.

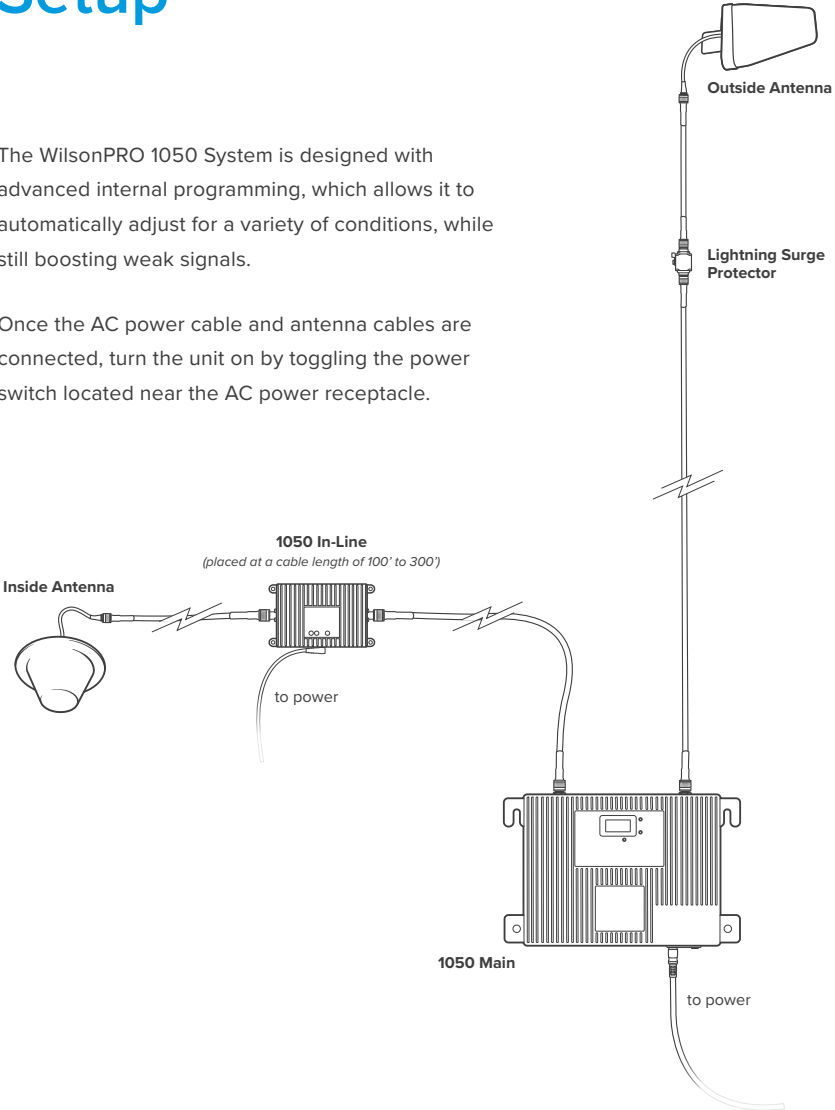


1050 Main Status Screen

Upon power up, the 1050 MAIN unit will attempt to begin its calibration routine, which lasts approximately 14 seconds during which time one of the following messages will appear on the screen:




In-Line Found Screen

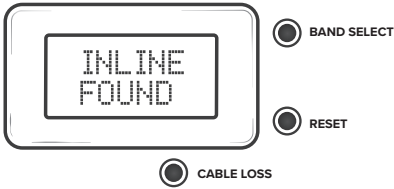


The 1050 In-Line unit has been found and is communicating with the 1050 Main. Cable loss calibration is in progress.

No In-Line Screen

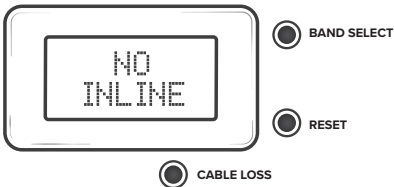


The 1050 In-Line unit has not been found.

Failed Calibration Screen

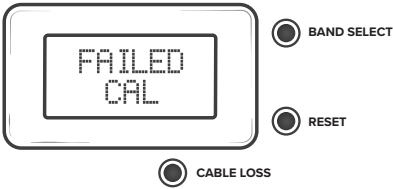


Failed cable loss calibration. Cable loss must be between 4dB and 25dB for all bands. If the cable loss is calculated to be outside of this range, calibration will fail. This range corresponds between 100 feet and 300 feet of Wilson 400 Cable.

Successful Calibration Screen

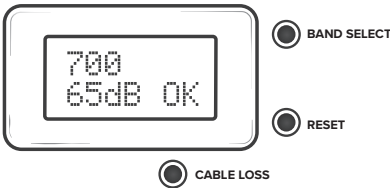

Once cable calibration has successfully completed, the band status screens will appear.


Cable Loss Button

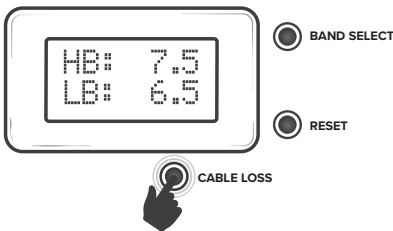


Pressing the Cable Loss Button will display the cable loss compensation at the upper bands and lower bands.

1050 In-Line Status Lights

The 1050 In-Line has 3 status lights:

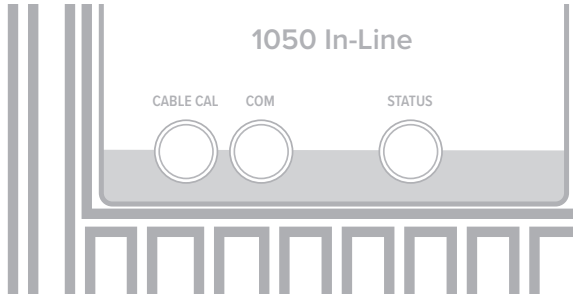

'STATUS' LED:

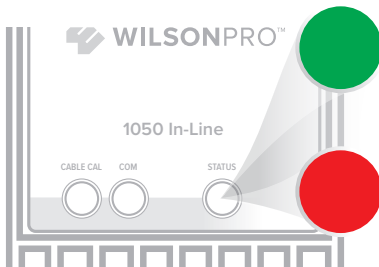


GREEN: Normal

RED: One or more bands has shut off due to OSCILLATION.

1050 In-Line Status Screen (cont.)

‘COM’ LED:

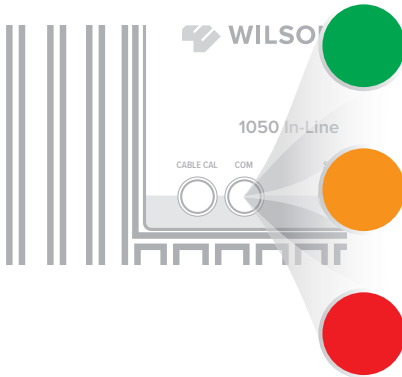

GREEN: Normal, waiting for next communications event

ORANGE: Brief orange blink when communicating with 1050 Main.

RED: Communications failure when attempting to communicate with 1050 Main.

‘CABLE CAL’ LED:



GREEN: Calibration complete.

ORANGE: Calibration in process.

RED: Calibration failed.

Safety Guidelines

Warnings

To uphold compliance with network protection standards, all active cellular devices must maintain at least 6 feet of separation distance from Panel and Dome antennas.

Use only the power supply provided in this package. Use of a non-Wilson Electronics product may damage your equipment.

The Signal Booster unit is designed for use in an indoor, temperature-controlled environment (less than 100 degrees Fahrenheit). It is not intended for use in attics or similar locations subject to temperatures in excess of that range.

RF Safety Warning: Any antenna used with this device must be located at least 8 inches from all persons.

AWS Warning: The Outside Antenna must be installed no higher than 10 meters (31'9") above ground.

This is a CONSUMER device.

BEFORE USE, you **MUST REGISTER THIS DEVICE** with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.

In Canada, **BEFORE USE** you must meet all requirements set out in ISED CPC-2-1-05.

You **MUST** operate this device with approved antennas and cables as specified by the manufacturer. Antennas **MUST** be installed at least 20 cm (8 inches) from (i.e., **MUST NOT** be installed within 20 cm of) any person.

You **MUST** cease operating this device immediately if requested by the FCC (or ISED in Canada) or licensed wireless service provider.

WARNING. E911 location information may not be provided or may be inaccurate for calls served by using this device.

This device may be operated **ONLY** in a fixed location (i.e..may operate in a fixed location only) for in-building use.

This device complies with Part 15 of FCC rules. Operation is subject to two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by weBoost could void the authority to operate this equipment.

FOR MORE INFORMATION ON REGISTERING YOUR SIGNAL BOOSTER WITH YOUR WIRELESS PROVIDER, PLEASE SEE BELOW:

Sprint: http://www.sprint.com/legal/fcc_boosters.html

T-Mobile/MetroPCS: <https://support.t-mobile.com/docs/DOC-9827>

Verizon Wireless: <http://www.verizonwireless.com/wcms/consumer/register-signal-booster.html>

AT&T: <https://securec45.securewebsession.com/attsignalbooster.com/>

U.S. Cellular: <http://www.uscellular.com/uscellular/support/fcc-booster-registration.jsp>

Antenna Kit Options

The following accessories are certified by the FCC to be used with the **Wilson PRO 1050 System**.

In-Line Box-To-Box Expansion Kit*

Kit 952300-1N
1 - 100' Wilson 400 Cable
1 - N-Female to N-Female Connector
Kit 952300-2N
2 - 100' Wilson 400 Cable
2 - N-Female to N-Female Connector
** Only Wilson Kit 952300-1N / Kit 952300-2N are authorized for extension of 200ft and 300ft total length on box-to-box connection.*

Inside Antenna Expansion Kit

Kit 309900-50N40090
2 - Wall Panel antennas
1 - 50 ohm 3-Way Splitter
1 - 100' Wilson 400
Kit 309905-50N17420
3 - Wall Panel Antennas
3 - 2-Way 50 Ohm Splitters
20' RG174
Kit 309902-75F0650
2 - Wall Panel Antennas
1 - 3-Way 75Ohm Splitter
50' RG6
Kit 309903-75F1180
3 - Wall Panel Antennas
3 - 2-Way 75Ohm Splitters
80' RG11 cable
Kit 309904-75F5830
1 - Wall Panel Antenna
1 - 2-Way 75 Ohm Splitter
30' RG58 cable

Inside Antenna Kits

Kit 311155-0670
75 Ohm Wall mount Panel Antenna
70' RG6 Cable
Kit 311135-5840
50 Ohm Wall mount Panel Antenna
40' RG58 Cable
Kit 311135-400150
50 Ohm Wall mount Panel Antenna
150' Wilson 400
Kit 311155-11120
75 Ohm Wall mount Panel Antenna
10' RG11 cable
Kit 304412-400100
50 Ohm 4G Dome Antenna
100' Wilson400 cable
Kit 304412-5830
50 Ohm 4G Dome Antenna
30' RG58 cable

Kit 304419-1175
75 Ohm 4G Dome Antenna
75' RG 11 cable
Kit 304419-17450
75 Ohm 4G Dome Antenna
50' RG174 cable
May need separate adapter
Kit 304419-0650
75 Ohm 4G Dome Antenna
50' RG6 cable

50 Ohm Outside Antenna Kits

Kit 314453-5825
50 Ohm Pole Mount Panel Antenna
25' RG58 Cable
Kit 314411-5825
50 Ohm Wide Band Directional
25' RG58 Cable
Kit 301111-5850
Yagi Directional Antenna
50' RG58 Cable
Kit 311203-5820
Omni-Directional antenna
20' RG58 Cable
Kit 314411-40075
50 Ohm Wide Band Directional
75' LMR400 Cable
Kit 311203-40020
Omni-Directional antenna
20' LMR400 Cable
Kit 301111-400170
Yagi Directional w/ N-Female
170' LMR400
Kit 314453-40075
50 Ohm Pole Mount Panel Antenna
75' LMR400 Cable
Kit 304422-40020
50 Ohm 4G Omni Antenna
20' Wilson400 cable
Kit 304422-5810
50 Ohm 4G Omni Antenna
10' RG58 cable
Kit 304422-1120
50 Ohm 4G Omni Antenna
20' RG11 cable
May need separate adapter

75 Ohm Outside Antenna Kits

Kit 301111-0675
Yagi Directional Antenna
75' RG6 Cable
N-Male to F-Female adapter

Kit 311201-0620
Omni Directional w/ F-Female
20' RG6 Cable
Kit 314473-0640
75 Ohm Pole Mount Panel Antenna
40' RG6 Cable
Kit 311141-0620
75 Ohm Grey Brick Antenna
20' RG6 Cable
Kit 301111-11140
Yagi Directional Antenna
140' RG11 Cable
N-Male to F-Female adapter
Kit 311201-1120
Omni Directional w/ F-Female
20' RG11 Cable
Kit 314473-1175
75 Ohm Pole Mount Panel Antenna
75' RG11 Cable
Kit 314475-0630
75 Ohm Wide Band Directional
30' RG6 Cable
Kit 314475-1175
75 Ohm Wide Band Directional
75' RG11 Cable
Kit 311141-1120
75 Ohm Grey Brick Antenna
20' RG11 Cable
Kit 304421-17410
75 Ohm 4G Omni Antenna
10' RG174 cable
Kit 304421-0610
75 Ohm 4G Omni Antenna
10' RG6 cable
Kit 304421-5810
75 Ohm 4G Omni Antenna
10' RG58 cable
May need separate adapter
Kit 304421-1120
75 Ohm 4G Omni Antenna
20' RG 11 cable

Specifications

Product Number	460030				
Model Number	460030				
FCC ID	PWO460030 / PWO0460030IL				
IC ID	4726A-460030				
Connectors	N-Female				
Antenna Impedance	50 Ohms				
Frequency	698-716 MHz, 729-746 MHz, 746-756 MHz, 777-787 MHz, 824-894 MHz, 1850-1995 MHz, 1710-1755/2110-2155 MHz				
Power output for single cell phone (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz
	24.7	24.7	24.4	25.1	24.5
Power output for single cell phone (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz
	14.8	14.3	15.6	15	15.1
	1050 Main			1050 In-Line	
Noise Figure	5 dB nominal			5 dB nominal	
Isolation	> 90 dB			> 90 dB	
Power Requirements	110-220V AC			5V 3A	

The term "IC" before the radio certification number only signifies that Industry Canada technical specifications were met.

Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.

Warranty

30 DAY MONEY-BACK GUARANTEE

All WilsonPro products are protected by WilsonPro 30-day money-back guarantee. If for any reason the performance of any product is not acceptable, simply return the product directly to the reseller with a dated proof of purchase.

3 YEAR WARRANTY

WilsonPro Boosters are warranted for three (3) years against defects in workmanship and/or materials. Warranty cases may be resolved by returning the product directly to the reseller with a dated proof of purchase.

Signal Boosters may also be returned directly to the manufacturer at the consumer's expense, with a dated proof of purchase and a Returned Material Authorization (RMA) number supplied by WilsonPro. WilsonPro shall, at its option, either repair or replace the product.

This warranty does not apply to any Signal Boosters determined by WilsonPro to have been subjected to misuse, abuse, neglect, or mishandling that alters or damages physical or electronic properties.

Replacement products may include refurbished weBoost products that have been recertified to conform with product specifications.

RMA numbers may be obtained by contacting Customer Support.

DISCLAIMER: The information provided by WilsonPro is believed to be complete and accurate. However, no responsibility is assumed by WilsonPro for any business or personal losses arising from its use, or for any infringements of patents or other rights of third parties that may result from its use.

NEED HELP?



support.wilsonpro.com



866.294.1660



3301 East Deseret Drive, St. George, UT
www.wilsonpro.com | support.wilsonpro.com

Copyright © 2017 Wilson Electronics. All rights reserved.
Wilson Electronics products covered by U.S. patent(s) and pending application(s)
For patents go to: weboost.com/us/patents