

Recognized by the  
Federal Communications Commission  
**Anechoic chamber registration no.: 90462 (FCC)**  
**Anechoic chamber registration no.: 3463 (IC)**  
TCB ID: DE 0001



Accredited by the  
German Accreditation Council  
DAR-Registration Number  
DAT-P-176/94-D1



Independent ETSI  
compliance test house



## Accredited Bluetooth<sup>®</sup> Test Facility (BQTF)

|                             |                                             |
|-----------------------------|---------------------------------------------|
| <b>Test report No.</b>      | <b>: 2-4375-03-02/06</b>                    |
| <b>Applicant</b>            | <b>: BenQ Mobile GmbH &amp; Co.<br/>OHG</b> |
| <b>Type</b>                 | <b>: E71</b>                                |
| <b>Test Standard</b>        | <b>: FCC Part 24<br/>RSS-133</b>            |
| <b>FCC ID</b>               | <b>: PWX-E71</b>                            |
| <b>Certification No. IC</b> | <b>: 6175C-E71</b>                          |

*The Bluetooth word mark and logos are owned by the Bluetooth SIG,  
Inc. and any use of such marks by Cetecom ICT is under license*

## Table of contents

|          |                                                       |           |
|----------|-------------------------------------------------------|-----------|
| <b>1</b> | <b>GENERAL INFORMATION</b>                            | <b>3</b>  |
| 1.1.     | ADMINISTRATIVE DATA OF THE TEST FACILITY              | 3         |
| 1.1.1    | Identification of the testing laboratory              | 3         |
| 1.2.     | NOTES                                                 | 3         |
| 1.3      | DETAILS OF APPLICANT                                  | 4         |
| 1.4      | APPLICATION DETAILS                                   | 4         |
| 1.5      | ADDITIONAL EUT INFORMATION FOR IC CANADA (APPENDIX 2) | 5         |
| 1.6      | TEST SETUP                                            | 6         |
| 1.7      | TEST STANDARDS                                        | 6         |
| <b>2</b> | <b>STATEMENT OF COMPLIANCE</b>                        | <b>7</b>  |
| 2.1      | SUMMARY OF MEASUREMENT RESULTS                        | 7         |
| 2.1.1    | PCS 1900                                              | 7         |
| <b>3</b> | <b>MEASUREMENTS AND RESULTS</b>                       | <b>8</b>  |
| 3.1      | PART PCS 1900                                         | 8         |
| 3.1.1    | RF Power Output                                       | 8         |
| 3.1.2    | Radiated Emissions                                    | 12        |
| 3.1.3    | Receiver Radiated Emissions                           | 19        |
| <b>4</b> | <b>USED TEST EQUIPMENT</b>                            | <b>22</b> |

## 1 General information

### 1.1. Administrative data of the test facility

#### 1.1.1 Identification of the testing laboratory


|                                     |                                                                                                                                          |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Company name:                       | Cetecom ICT Services GmbH                                                                                                                |
| Address:                            | Untertürkheimerstr. 6-10<br>D-66117 Saarbruecken<br>Germany                                                                              |
| Laboratory accreditation:           | DAR-Registration No. DAT-P-176/94-D1<br>Bluetooth Qualification Test Facility (BQTF)<br>Federal Communications Commission (FCC)          |
| Responsible for testing laboratory: | Identification/Registration No : 90462<br>Dirk Hausknecht<br>Phone: +49 681 598 0<br>Fax: +49 681 598 9075<br>email: info@ict.cetecom.de |

### 1.2. Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.



.....  
Responsible for testing  
(Jakob Reschke)



.....  
Responsible for laboratory  
(Dirk Hausknecht)

## 1.3 Details of Applicant

|         |   |                               |
|---------|---|-------------------------------|
| Name    | : | BenQ Mobile GmbH & Co. OHG    |
| Address | : | Haidenauplatz 1               |
| City    | : | 81667 München                 |
| Country | : | Germany                       |
| Phone   | : | +49 (0) 89 722 37148          |
| Fax     | : | -.-                           |
| Contact | : | Martin Weinberger             |
| Phone   | : | +49 (0) 89 722 37148          |
| Fax     | : | -.-                           |
| e-mail  | : | Martin.weinberger@siemens.com |

## 1.4 Application Details

|                                |   |                          |
|--------------------------------|---|--------------------------|
| Date of receipt of application | : | 2006-06-20               |
| Date of receipt of test item   | : | 2006-07-17               |
| Date(s) of test                | : | 2006-07-17 to 2006-07-27 |
| Date of report                 | : | 2006-07-28               |

## 1.5 Additional EUT information for IC Canada (appendix 2)

Type of equipment : GSM Mobile Phone (EGSM900/GSM1800/GSM1900)  
Type name : E71  
Manufacturer : BenQ Mobile GmbH & Co. OHG  
Address : Südstr. 9  
City : 47475 Kamp-Lintfort  
Country : Germany

Frequency : 1850.2 – 1909.8 MHz  
Type of modulation : 300KGXW (GMSK) / 300KG7W (8-PSK)  
Number of channels : 300 (PCS1900)  
Antenna Type : Integrated antenna  
Power supply (normal) : 3.7V DC  
Output power GSM1900 / GMSK : EIRP: 29.9 dBm (Burst)  
Output power EDGE1900 / 8-PSK : EIRP: 27.9 dBm (Burst)

Transmitter Spurious (worst case) : -41.00 dBm  
Receiver Spurious (worst case) : 152 µV/m @ 3 m

FCC ID : PWX-E71  
Certification No. IC : 6175C-E71  
Open Area Test Site IC No. : 3463  
IC Standards : RSS133, Issue 3

### ATTESTATION:

#### DECLARATION OF COMPLIANCE:

I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

#### Laboratory Manager :

2006-07-28

Jakob Reschke

Date

Name



Signature

## 1.6 Test Setup

Hardware : B1+  
Software : -/-

Mobile; (cond. measurements) : -.-  
Mobile; (rad. measurements) : S30880-S3340-A90-1

The radiated measurements were performed with standard AC charging unit.

## 1.7 Test Standards

|             |                         |
|-------------|-------------------------|
| <b>FCC:</b> | <b>CFR Part 24 E</b>    |
| <b>IC:</b>  | <b>RSS 133, Issue 3</b> |

## 2 Statement of Compliance

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

### 2.1 Summary of Measurement Results

#### 2.1.1 PCS 1900

| Section in this Report | Test Name                    | Verdict |
|------------------------|------------------------------|---------|
| 3.1.1                  | RF Power Output              | pass    |
| 3.1.2                  | Frequency Stability          | n.a.    |
| 3.1.3                  | Radiated Emissions           | pass    |
| 3.1.4                  | Receiver Radiated Emissions  | pass    |
| 3.1.5                  | Conducted Spurious Emissions | n.a.    |
| 3.1.6                  | Block Edge Compliance        | n.a.    |
| 3.1.7                  | Occupied Bandwidth           | n.a.    |

### 3 Measurements and results

For Part 24/22 we use the substitution method ( TIA/EIA 603).

All measurements in this report are done in GSM mode. The device is able to transmit data in GPRS mode also. But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible. The only different is the modulation average power, which is 3 dB higher (by using 2 timeslots in the Up-link ). All relevant tests have been repeated in 8-PSK Modulation if EDGE Mode is supported.

#### 3.1 PART PCS 1900

##### 3.1.1 RF Power Output

###### Reference

|      |                               |
|------|-------------------------------|
| FCC: | CFR Part 24.232, 2.1046       |
| IC:  | RSS 133, Issue 3, Section 4.3 |

###### Summary:

This paragraph contains both average/peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

###### Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range).

###### Limits:

| Power Step | Nominal Peak Output Power (dBm) | Tolerance (dB) |
|------------|---------------------------------|----------------|
| 0          | +30                             | ± 2            |



## EIRP Measurements

### Description:

This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) The measurements was performed with full rf output power and modulation.

(b) Test was performed at listed 3m test site (listed with FCC, IC).

(c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)

(d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.

(e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency

Resolution BW: 100 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

(g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.

(h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.

(j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.

(k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.

(l) Repeat for all different test signal frequencies

## Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency : equal to the signal source  
Resolution BW : 10 kHz  
Video BW : same  
Detector Mode : positive  
Average : off  
Span : 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):

DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

## Limits:

| Power Step | Burst PEAK EIRP (dBm) |
|------------|-----------------------|
| 0          | <33                   |

## GSM1900 / GMSK

### Test Results: Output Power (radiated)

| Frequency (MHz)         | Power Class | BURST PEAK EIRP (dBm) |
|-------------------------|-------------|-----------------------|
| 1850.2                  | 1           | 29.9                  |
| 1880.0                  | 1           | 29.0                  |
| 1909.8                  | 1           | 28.5                  |
| Measurement uncertainty | ±3 dB       |                       |

## EDGE1900 / 8-PSK

### Test Results: Output Power (radiated)

| Frequency (MHz)         | Power Class | BURST PEAK EIRP (dBm) |
|-------------------------|-------------|-----------------------|
| 1850.2                  | E2          | 26.2                  |
| 1880.0                  | E2          | 26.2                  |
| 1909.8                  | E2          | 27.9                  |
| Measurement uncertainty | ±3 dB       |                       |

## Sample Calculation:

| Freq   | SA Reading | SG Setting | Ant. gain | Dipol gain | Cable loss | EIRP Result |  |  |  |
|--------|------------|------------|-----------|------------|------------|-------------|--|--|--|
| MHz    | dBμV       | dBm        | dBd       | dBd        | dB         | dBm         |  |  |  |
| 1850.2 | 133.4      | 24.8       | 8.4       | 0.0        | 3.3        | 29.9        |  |  |  |

$$\text{EIRP} = \text{SG (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dBd)}$$

## 3.1.2 Radiated Emissions

### Reference

|      |                               |
|------|-------------------------------|
| FCC: | CFR Part 24.238, 2.1053       |
| IC:  | RSS 133, Issue 3, Section 4.4 |

### Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2003 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission ( here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- The antenna output was terminated in a 50 ohm load.
- A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

### Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

## Measurement Results: Radiated Emissions

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next table.

All measurements were done in horizontal and vertical polarization, the plots show the worst case. As can be seen from this data, the emissions from the test item were within the specification limit.

| Harmonic | Tx ch.-512<br>Freq. (MHz) | Level<br>(dBm) | Tx ch.-661<br>Freq. (MHz) | Level<br>(dBm) | Tx ch.-810<br>Freq. (MHz) | Level<br>(dBm) |
|----------|---------------------------|----------------|---------------------------|----------------|---------------------------|----------------|
|          | 1700.0                    | -43.0          | 1730                      | -42.5          | 1755                      | -41.0          |
| 2        | 3700.4                    | -              | 3760                      | -              | 3819.6                    | -              |
| 3        | 5550.6                    | -              | 5640                      | -              | 5729.4                    | -              |
| 4        | 7400.8                    | -              | 7520                      | -              | 7639.2                    | -              |
| 5        | 9251.0                    | -              | 9400                      | -              | 9549.0                    | -              |
| 6        | 11101.2                   | -              | 11280                     | -              | 11458.8                   | -              |
| 7        | 12951.4                   | -              | 13160                     | -              | 13368.6                   | -              |
| 8        | 14801.6                   | -              | 15040                     | -              | 15278.4                   | -              |
| 9        | 16651.8                   | -              | 16920                     | -              | 17188.2                   | -              |
| 10       | 18502.0                   | -              | 18800                     | -              | 19098.0                   | -              |


**No peaks found < 20 dB below limit.**

## Sample calculation:


| Freq   | SA<br>Reading | SG<br>Setting | Ant.<br>gain | Dipol<br>gain | Cable<br>loss | EIRP<br>Result |  |  |  |
|--------|---------------|---------------|--------------|---------------|---------------|----------------|--|--|--|
| MHz    | dBμV          | dBm           | dB           | dBd           | dB            | dBm            |  |  |  |
| 1850.2 | 133.4         | 24.77         | 8.4          | 0.0           | 3.3           | 29.87          |  |  |  |

EIRP = SG (dBm) - Cable Loss (dB) + Ant. gain (dBi)

## Traffic mode up to 30 MHz (Valid for all 3 channels)

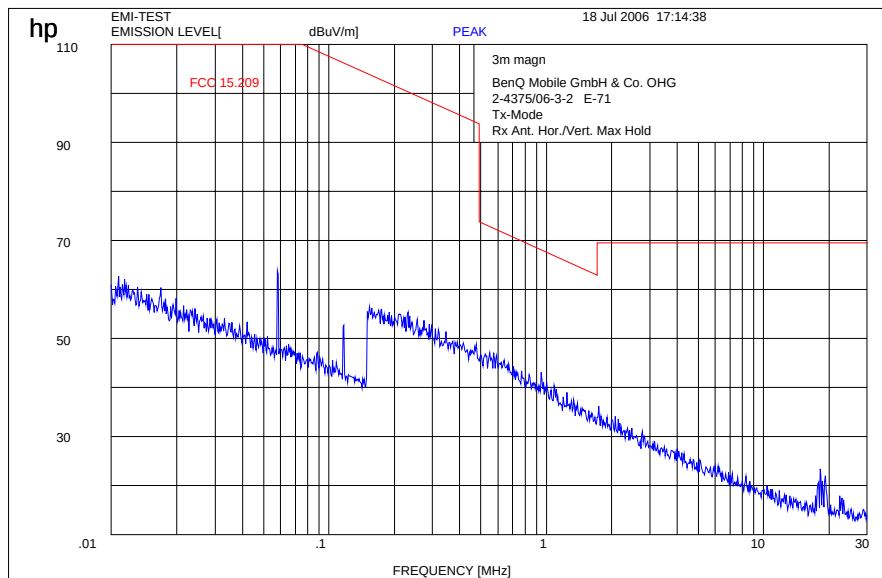

## Channel 512 (30 MHz - 4 GHz)

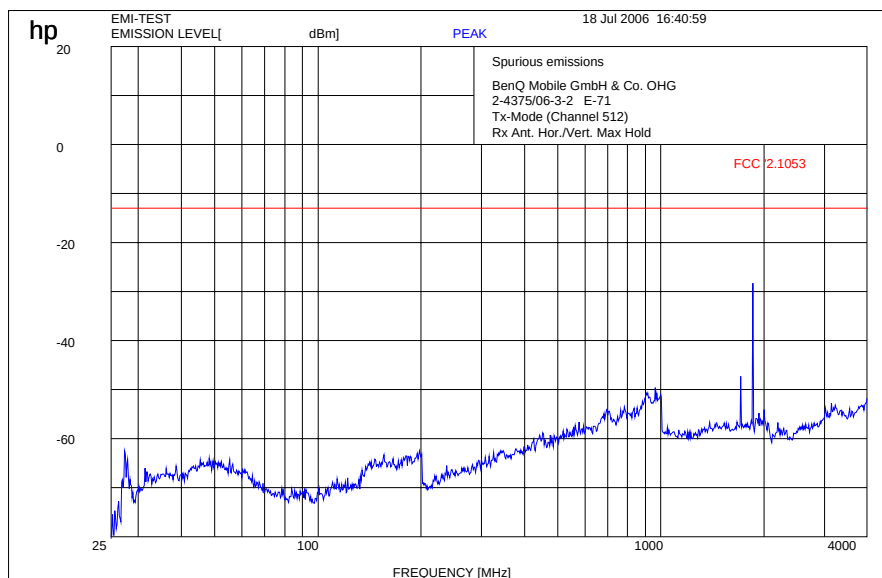


$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

Carrier suppressed with a rejection filter

## Channel 512 (4 GHz – 12.5 GHz)

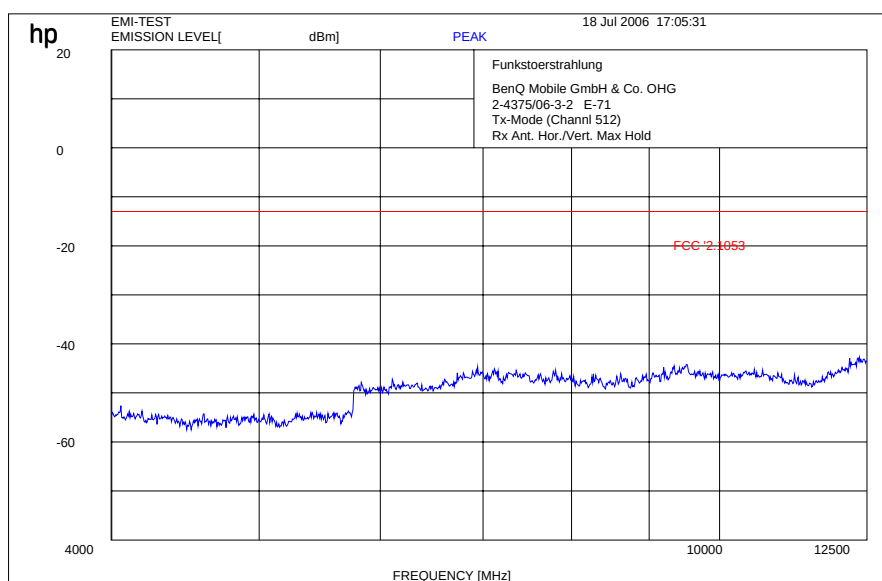


$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz




Channel 512 (12 GHz - 25 GHz) valid for all 3 channels

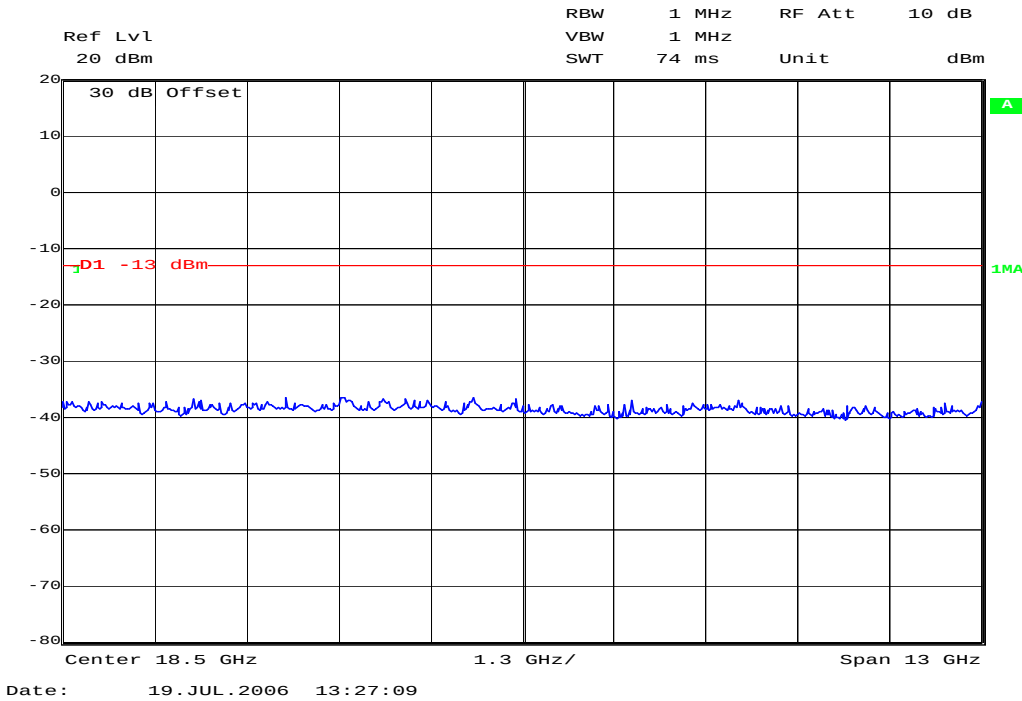



## Channel 661 (30 MHz - 4 GHz)

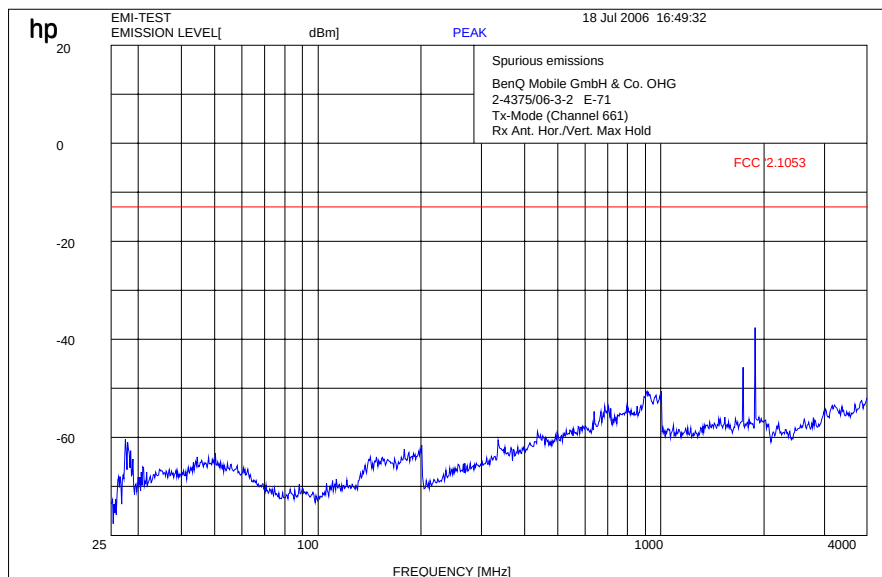


$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

Carrier suppressed with a rejection filter


## Channel 661 (4 GHz – 12.5 GHz)

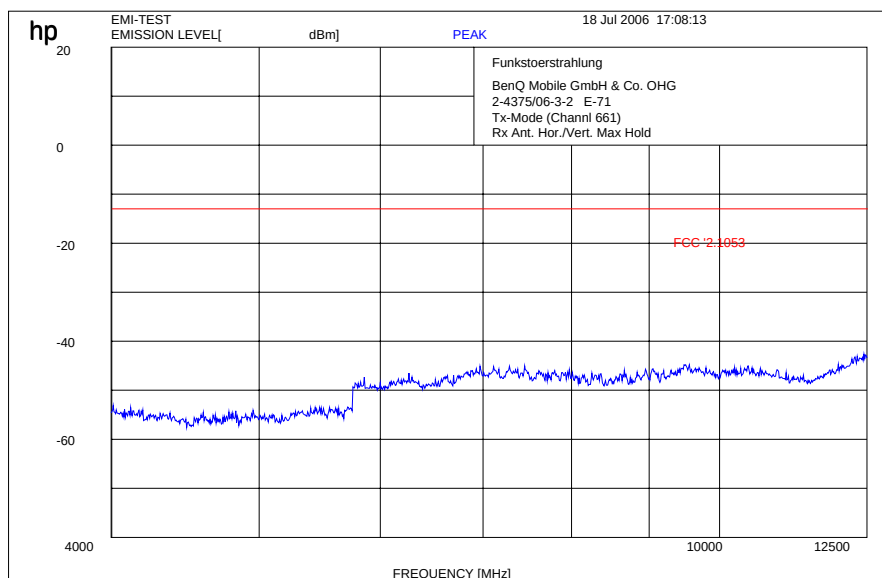

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

## Channel 810 (30 MHz - 4 GHz)

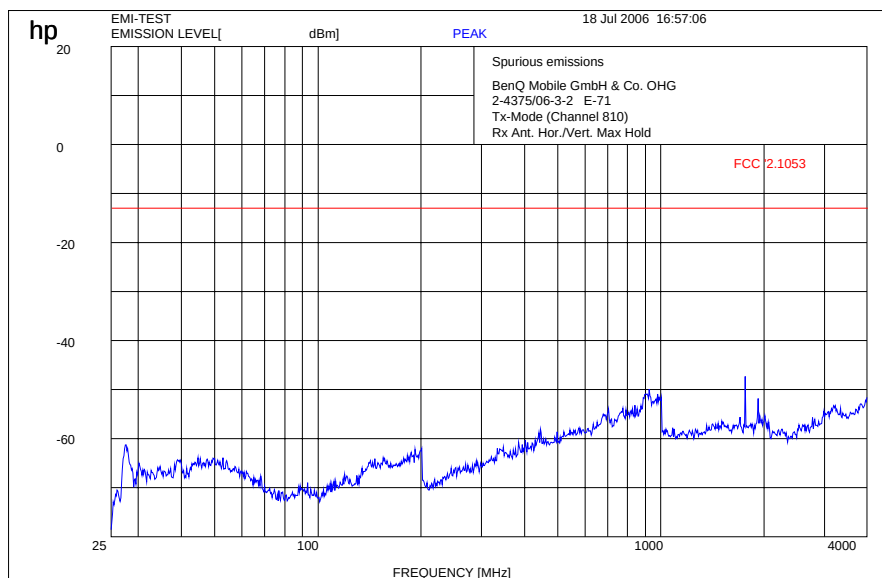


$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

Carrier suppressed with a rejection filter

## Channel 810 (4 GHz – 12.5 GHz)

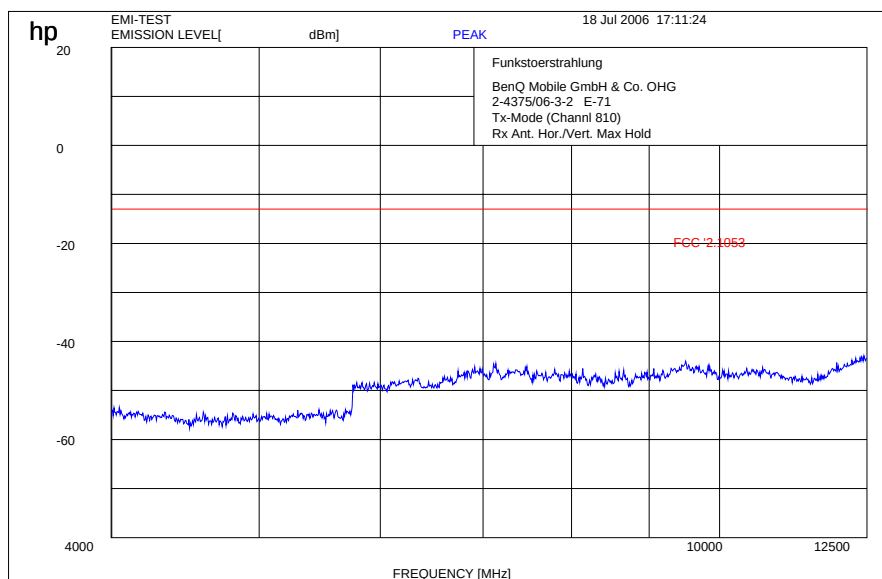

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

## 3.1.3 Receiver Radiated Emissions

### Reference

|      |                               |
|------|-------------------------------|
| FCC: | CFR Part 15.109, 2.1053       |
| IC:  | RSS 133, Issue 3, Section 4.5 |

### Measurement Results

| SPURIOUS EMISSIONS LEVEL ( $\mu\text{V/m}$ ) |          |                              |                    |          |                              |            |          |                              |
|----------------------------------------------|----------|------------------------------|--------------------|----------|------------------------------|------------|----------|------------------------------|
| Idle mode                                    |          |                              |                    |          |                              |            |          |                              |
| f<br>(MHz)                                   | Detector | Level<br>( $\mu\text{V/m}$ ) | f<br>(MHz)         | Detector | Level<br>( $\mu\text{V/m}$ ) | f<br>(MHz) | Detector | Level<br>( $\mu\text{V/m}$ ) |
| 24973                                        | peak     | 43.66                        | -                  | -        | -                            | -          | -        | -                            |
| -                                            | -        | -                            | -                  | -        | -                            | -          | -        | -                            |
| -                                            | -        | -                            | -                  | -        | -                            | -          | -        | -                            |
| -                                            | -        | -                            | -                  | -        | -                            | -          | -        | -                            |
| -                                            | -        | -                            | -                  | -        | -                            | -          | -        | -                            |
| -                                            | -        | -                            | -                  | -        | -                            | -          | -        | -                            |
| -                                            | -        | -                            | -                  | -        | -                            | -          | -        | -                            |
| Measurement uncertainty                      |          |                              | $\pm 3 \text{ dB}$ |          |                              |            |          |                              |

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz


H = Horizontal ; V= Vertical

For measurement distance see table below

### Limits: § 15.109

| Frequency (MHz) | Field strength ( $\mu\text{V/m}$ ) | Measurement distance (m) |
|-----------------|------------------------------------|--------------------------|
| 30 - 88         | 100                                | 3                        |
| 88 - 216        | 150                                | 3                        |
| 216 - 960       | 200                                | 3                        |
| above 960       | 500                                | 3                        |


## IDLE MODE (30 MHz - 4 GHz)

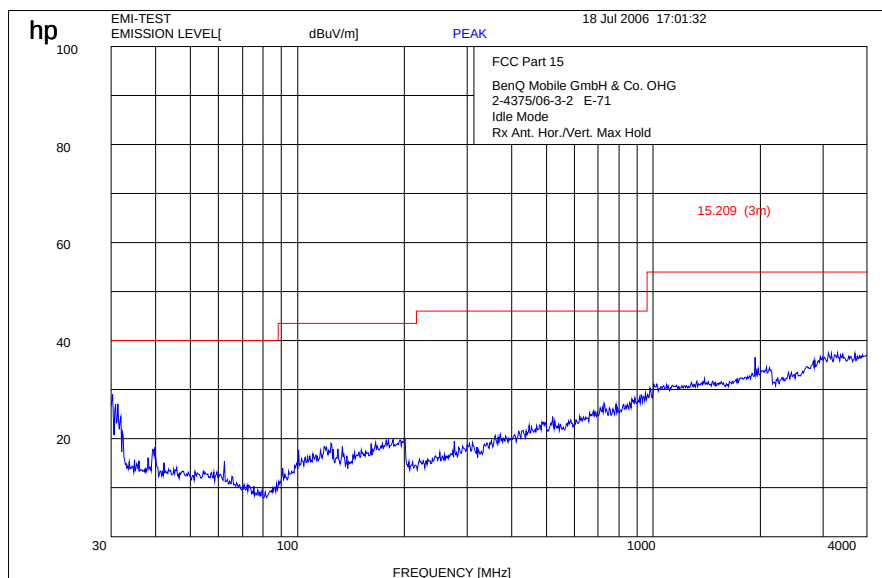

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz


## Idle Mode (4 GHz – 12.0 GHz)

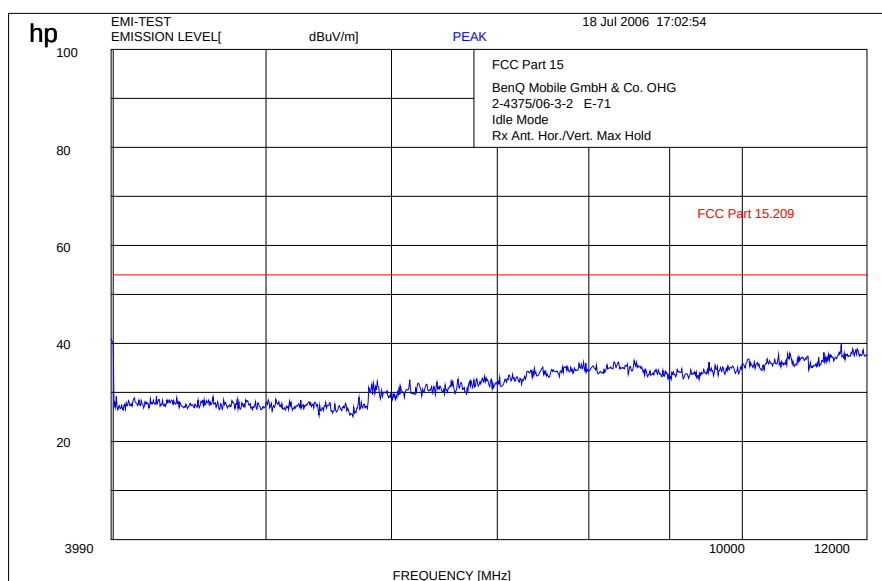

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

## Idle Mode (12 GHz - 25 GHz)

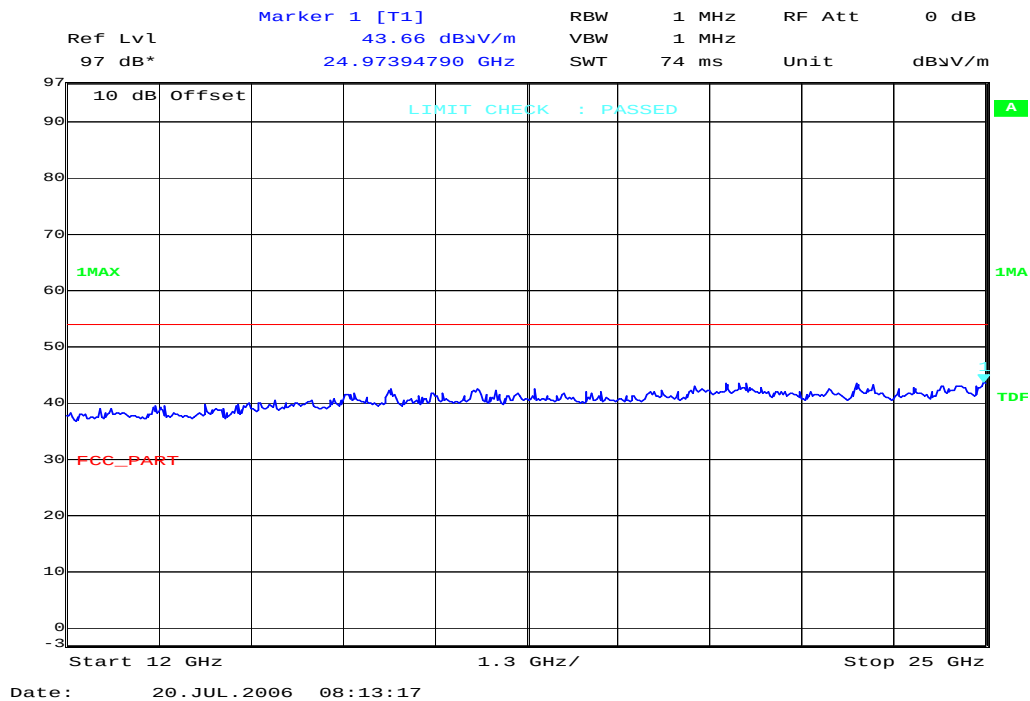

## 4 Used Test Equipment

| No.                                     | Instrument/<br>Ancillary                   | Manufacturer       | Type                    | Serial-No.                   | Internal ID<br>No. |  |  |
|-----------------------------------------|--------------------------------------------|--------------------|-------------------------|------------------------------|--------------------|--|--|
| <b>Anechoic chamber</b>                 |                                            |                    |                         |                              |                    |  |  |
| 1.                                      | Anechoic chamber                           | MWB                |                         | 87400/02                     | 300000996          |  |  |
| 2.                                      | Bi conical antenna                         | EMCO               | 3104C                   | 9909-4868                    | 300002590          |  |  |
| 3.                                      | Log. Per. antenna                          | EMCO               | 3146                    | 2130                         | 300001603          |  |  |
| 4.                                      | Double ridge horn                          | EMCO               | 3115P                   | 3088                         | 300001032          |  |  |
| 5.                                      | Active loop antenna                        | EMCO               | 6502                    | 2210                         | 300001015          |  |  |
| 6.                                      | Loop antenna                               | Rohde & Schwarz    | HFH2-Z2                 | 891847-35                    | 300001169          |  |  |
| 7.                                      | Spectrum analyzer                          | Hewlett-Packard    | 8566B                   | 2747A05306                   | 300001000          |  |  |
| 8.                                      | Spectrum analyzer<br>display               | Hewlett-Packard    | 85662A                  | 2816A16541                   | 300002297          |  |  |
| 9.                                      | Quasi peak adapter                         | Hewlett-Packard    | 85650A                  | 2811A01131                   | 300000999          |  |  |
| 10.                                     | RF pre selector                            | Hewlett-Packard    | 85685A                  | 2833A00768                   | 400000081          |  |  |
| 11.                                     | Workstation                                | Hewlett-Packard    | Vectra VL               |                              | 300001688          |  |  |
| 12.                                     | Software                                   | Hewlett-Packard    | EMI Halle C             |                              | 300000983          |  |  |
| 13.                                     | Power attenuator                           | Byrd               | 8325                    | 1530                         | 300001595          |  |  |
| 14.                                     | Band reject filter                         | Wainwright         | WRCG1855/1910           | 7                            | 300003350          |  |  |
| 15.                                     | Band reject filter                         | Wainwright         | WRCG2400/2483           | 11                           | 300003351          |  |  |
| 16.                                     | Power supply unit                          | Hewlett-Packard    | 6032A                   | 2818A03450                   | 300001040          |  |  |
| 17.                                     | Universal<br>communication tester          | Rohde & Schwarz    | CMU 200                 | 103992                       | 300003231          |  |  |
| <b>Laboratories Short Range Devices</b> |                                            |                    |                         |                              |                    |  |  |
| 18.                                     | Amplifier                                  | Parzich GMBH       | js42-00502650-<br>28-5a | 928979                       | 300003143          |  |  |
| 19.                                     | Analog-/Digital multi-<br>meter            |                    | DF-971A                 | 438309,<br>438320,<br>438361 | 400000082          |  |  |
| 20.                                     | Audio Analyzer 2Hz -<br>300 kHz            | Rohde & Schwarz    | UPD                     | 841074/009                   | 300001236          |  |  |
| 21.                                     | Bit error analyzer                         | Hewlett-Packard    | 37732A                  | 3606U03073                   | 300001446          |  |  |
| 22.                                     | Communication tester                       | Rohde & Schwarz    | CMD55                   | 831050/082                   | 300003018          |  |  |
| 23.                                     | Communication test Set                     | Schlumberger       | 4040                    | 1725117                      | 300001387          |  |  |
| 24.                                     | Directional coupler                        | Amplifier Research | DC 3010                 | 12709                        | 300001226          |  |  |
| 25.                                     | Directional coupler                        | EMV                | DC3010                  | 12306                        | 300001429          |  |  |
| 26.                                     | Field strength meter<br>(Near field probe) | EMCO               | 7405                    | 9202-2150                    | 300001203          |  |  |
| 27.                                     | Frequency Counter                          | Hewlett-Packard    | 5386A                   | 2704A01243                   | 300000998          |  |  |
| 28.                                     | Climatic chamber                           | Heraeus Voetsch    | VT 4002                 | 5,8566E+13                   | 300003019          |  |  |
| 29.                                     | Climatic chamber                           | Heraeus Voetsch    | VT 4002                 | 521/83761                    | 300002326          |  |  |
| 30.                                     | Power sensor                               | Hewlett-Packard    | 8484A                   | 2237A10156                   | 300001140          |  |  |
| 31.                                     | Power sensor                               | Hewlett-Packard    | 8482A                   | 2237A06016                   | 300001139          |  |  |
| 32.                                     | Power sensor                               | Hewlett-Packard    | 8484A                   | 2237A10494                   | 300001666          |  |  |
| 33.                                     | Power sensor                               | Hewlett-Packard    | 8482A                   | 1925A04674                   | 300001667          |  |  |
| 34.                                     | Power sensor                               | Hewlett-Packard    | 8485A                   | 2238A00849                   | 300001668          |  |  |
| 35.                                     | Power sensor                               | Hewlett-Packard    | 8482A                   | 2237A06009                   | 300001267          |  |  |
| 36.                                     | Power sensor<br>(attenuator)               | Hewlett-Packard    | 8482B                   | 2703A02586                   | 300001492          |  |  |
| 37.                                     | Local Oscillator                           | Hewlett-Packard    | 70900A                  | 2842A02221                   | 300002019          |  |  |
| 38.                                     | Measurement Receiver                       | Rohde & Schwarz    | ESH 2                   | 871921/095                   | 300002505          |  |  |
| 39.                                     | Multi-meter (Hand)                         | Siemens            | Multizet                |                              | 300001102          |  |  |
| 40.                                     | Multi-meter (Hand)                         | Goerz              | 6EP                     |                              | 300001116          |  |  |
| 41.                                     | Multi-meter (Hand)                         | MetraWatt          | MA4S                    |                              | 300001740          |  |  |
| 42.                                     | Multi-meter digital                        | Rohde & Schwarz    | UDS 5                   | 872677/042                   | 300001325          |  |  |
| 43.                                     | Power supply                               | Hewlett-Packard    | 6038A                   | 3122A11097                   | 300001204          |  |  |
| 44.                                     | Power supply                               | Hewlett-Packard    | 6038A                   | 2848A07027                   | 300001174          |  |  |
| 45.                                     | Power supply                               | Zentro             | 2X30V                   | 2007                         | 300001109          |  |  |
| 46.                                     | Power supply                               | Hewlett-Packard    | 6038A                   | 2752A04866                   | 300001161          |  |  |
| 47.                                     | Power supply                               | Heiden             | 1108-32                 | 1701                         | 300001392          |  |  |
| 48.                                     | Power supply                               | Heiden             | 1108-32                 | 1802                         | 300001383          |  |  |
| 49.                                     | Power supply                               | Heiden             | 1108-32                 | 3202                         | 300001187          |  |  |

| No. | Instrument/<br>Ancillary             | Manufacturer    | Type           | Serial-No.  | Internal ID<br>No. |  |  |
|-----|--------------------------------------|-----------------|----------------|-------------|--------------------|--|--|
| 50. | Power supply                         | Zentro          | LA 2x30/5GB2   | 2012        | 300001275          |  |  |
| 51. | Power supply                         | Syston          | M5P 40/15A     | 828233      | 300001291          |  |  |
| 52. | V-network AC                         | Rohde & Schwarz | ESH3-Z5        | 828576/020  | 300001210          |  |  |
| 53. | Oscilloscope                         | Hewlett-Packard | 54502A         | 2934A01917  | 300001374          |  |  |
| 54. | Power meter                          | Hewlett-Packard | 436A           | 2101A12378  | 300001136          |  |  |
| 55. | Power meter                          | Hewlett-Packard | 436A           | 2031U01461  | 300001105          |  |  |
| 56. | Precision – frequency –<br>reference | Hewlett-Packard | 70310A         | 2736A00707  | 300002018          |  |  |
| 57. | Radio communication<br>analyzer      | Rohde & Schwarz | CMTA 54        | 894043/010  | 300001175          |  |  |
| 58. | Radio communication<br>analyzer      | Rohde & Schwarz | CMTA 84        | 894199/012  | 300001176          |  |  |
| 59. | Radio communication<br>analyzer      | Rohde & Schwarz | CMTA 84        | 894581/013  | 300001355          |  |  |
| 60. | Signal generator                     | Hewlett-Packard | 8111A          | 2215G00867  | 300001117          |  |  |
| 61. | Signal generator                     | Rohde & Schwarz | SMPC           | 882416/019  | 300001162          |  |  |
| 62. | Function signal<br>generator         | Rohde & Schwarz | AFGU           | 862490/032  | 300001201          |  |  |
| 63. | Function signal<br>generator         | Rohde & Schwarz | APN-04         | 894326/014  | 300001184          |  |  |
| 64. | Signal generator 0.01-<br>1280 MHz   | Hewlett-Packard | 8662A          | 2224A01012  | 300001110          |  |  |
| 65. | Signal generator 0.01-<br>1280 MHz   | Hewlett-Packard | 8662A          | 2232A01038  | 300001264          |  |  |
| 66. | Signal generator 0.1-<br>2000 MHz    | Rohde & Schwarz | SMH            | 864219/033  | 300001410          |  |  |
| 67. | Signal generator 0.1-<br>2000 MHz    | Rohde & Schwarz | SMH            | 883909/010  | 300001183          |  |  |
| 68. | Signal generator 0.1-<br>2060 MHz    | Hewlett-Packard | 8657A          | 2838U00736  | 300001009          |  |  |
| 69. | Signal generator 0.1-<br>4200 MHz    | Hewlett-Packard | 8665A          | 2833A00109  | 300001177          |  |  |
| 70. | Signal generator 0.1-<br>4200 MHz    | Hewlett-Packard | 8665A          | 2833A00112  | 300001373          |  |  |
| 71. | Signal generator 0.1-<br>4320 MHz    | Rohde & Schwarz | SMHU           | 2790575     | 300001404          |  |  |
| 72. | Signal generator 0.1-<br>4320 MHz    | Rohde & Schwarz | SMHU           | 894055/005  | 300001190          |  |  |
| 73. | Signal generator DC-<br>600 KHz      | Hewlett-Packard | 8904A          | 2822A01213  | 300001157          |  |  |
| 74. | Signal generator DC-<br>600 KHz      | Hewlett-Packard | 8904A          | 2822A01214  | 300001158          |  |  |
| 75. | Signal generator DC-<br>600 KHz      | Hewlett-Packard | 8904A          | 2822A01203  | 300001367          |  |  |
| 76. | Function signal<br>generator         | Rohde & Schwarz | APN 04         | 2273637     | 300001395          |  |  |
| 77. | Signal generator NF                  | Rohde & Schwarz | SPN            | 880139/068  | 300001142          |  |  |
| 78. | Spectrum Analyzer                    | Rohde & Schwarz | FSiQ26         | 835111/0004 | 300002678          |  |  |
| 79. | Spectrum analyzer                    | Hewlett-Packard | 71210A (70000) | 2731A02347  | 300000321          |  |  |
| 80. | Spectrum analyzer                    | Rohde & Schwarz | FSMS           | 826067/004  | 300001223          |  |  |
| 81. | Spectrum analyzer 2                  | Hewlett-Packard | 85660B         | 3138A07614  | 300001207          |  |  |
| 82. | Spectrum analyzer 3                  | Hewlett-Packard | 8566A          | 1925A00257  | 300001098          |  |  |
| 83. | Spectrum analyzer<br>Display         | Hewlett-Packard | 70206A         | 2840A01553  | 300002017          |  |  |
| 84. | Spectrum analyzer<br>Display 2       | Hewlett-Packard | 85662A         | 3144A20627  | 300001208          |  |  |
| 85. | Spectrum analyzer<br>Display 3       | Hewlett-Packard | 85662          | 1925A00860  | 300002306          |  |  |
| 86. | Isolating transformer                | ErFi            | 913501         |             | 300001205          |  |  |
| 87. | Isolating transformer                | ErFi            | MPL            | 91350       | 300001155          |  |  |
| 88. | Isolating transformer                | ErFi            | MPL            | 91350       | 300001151          |  |  |
| 89. | Isolating transformer                | ErFi            | 6210           |             | 300001179          |  |  |
| 90. | Isolating transformer                | Grundig         | RT5A           | 8781        | 300001277          |  |  |
| 91. | Isolating transformer                | Grundig         | RT5A           | 9242        | 300001263          |  |  |
| 92. | Amplifier                            | Hewlett-Packard | 8447D          | 2648A04780  | 300001360          |  |  |
| 93. | Amplifier                            | EMV             | 10W1000        | 9549        | 300001377          |  |  |

Test report no.: 2-4375-03-02/06

Date: 2006-07-28

Page 24 of 24

| No.                                           | Instrument/<br>Ancillary | Manufacturer       | Type     | Serial-No.  | Internal ID<br>No. |  |  |
|-----------------------------------------------|--------------------------|--------------------|----------|-------------|--------------------|--|--|
| 94.                                           | Amplifier                | EMV                | 25W1000  | 12948       | 300001440          |  |  |
| 95.                                           | Amplifier 5W             | Amplifier Research | 5W1000   | 9725        | 300001592          |  |  |
|                                               |                          |                    |          |             |                    |  |  |
| <b>Laboratory Bluetooth</b>                   |                          |                    |          |             |                    |  |  |
| 96.                                           | Power splitter           | Inmet Corp.        | 1499382  |             | 300002841          |  |  |
| 97.                                           | Power sensor             | Rohde & Schwarz    | NRV-Z1   | 833894/011  | 300002681-0010     |  |  |
| 98.                                           | Signal generator         | Rohde & Schwarz    | SMIQ03   | 836206/0092 | 300002680          |  |  |
| 99.                                           | Bluetooth RF-test system | Rohde & Schwarz    | TS8960   |             | 300002681-0000     |  |  |
| 100.                                          | Signal generator         | Rohde & Schwarz    | SMIQ03   | 835541/055  | 300002681-0001     |  |  |
| 101.                                          | Signal generator         | Rohde & Schwarz    | SMIQ03   | 835541/056  | 300002681-0002     |  |  |
| 102.                                          | Signal generator         | Rohde & Schwarz    | SMP02    | 835133/011  | 300002681-0003     |  |  |
| 103.                                          | Power meter              | Rohde & Schwarz    | NRVD     | 835430/044  | 300002681-0004     |  |  |
| 104.                                          | Spectrum - analyzer      | Rohde & Schwarz    | FSIQ     | 835540/018  | 300002681-0005     |  |  |
| 105.                                          | Switch unit              | Rohde & Schwarz    | SSCU     |             | 300002681-0006     |  |  |
| 106.                                          | Attenuator-step          | Rohde & Schwarz    | RSP      | 834500/010  | 300002681-0007     |  |  |
| 107.                                          | Frequency normal         | Rohde & Schwarz    | Rubidium |             | 300002681-0009     |  |  |
| 108.                                          | Power sensor             | Rohde & Schwarz    | NRV-Z1   | 833894/012  | 300002681-0013     |  |  |
|                                               |                          |                    |          |             |                    |  |  |
| <b>Conducted emission on AC line Room 006</b> |                          |                    |          |             |                    |  |  |
| 109.                                          | Measurement receiver     | Rohde & Schwarz    | ESH3     | 881515/002  | 300002490          |  |  |
| 110.                                          | Measurement receiver     | Rohde & Schwarz    | ESVP     | 881487/021  | 300002491          |  |  |
| 111.                                          | Measurement receiver     | Rohde & Schwarz    | ESH3     | 890174/002  | 300000296          |  |  |
| 112.                                          | V-network AC             | Rohde & Schwarz    | ESH3 Z5  | 892475/017  | 300002209          |  |  |
| 113.                                          | V-network AC             | Rohde & Schwarz    | ESH3-Z5  | 892239/020  | 300002506          |  |  |
| 114.                                          | Software                 | Rohde & Schwarz    | ESK-1    |             |                    |  |  |
| 115.                                          | DC power supply          | Hewlett-Packard    | 6032A    | 2743A02600  | 300001498          |  |  |
| 116.                                          | V-network AC             | Rohde & Schwarz    | ESH3-Z5  | 861189/014  | 300001458          |  |  |
| 117.                                          | V-network DC             | Rohde & Schwarz    | ESH3-Z6  | 893689/012  | 300001504          |  |  |
| 118.                                          | V-network DC             | Rohde & Schwarz    | ESH3-Z6  | 861406/005  | 300001518          |  |  |
| 119.                                          |                          |                    |          |             |                    |  |  |
| 120.                                          |                          |                    |          |             |                    |  |  |
| 121.                                          |                          |                    |          |             |                    |  |  |
| 122.                                          |                          |                    |          |             |                    |  |  |
| 123.                                          |                          |                    |          |             |                    |  |  |
| 124.                                          |                          |                    |          |             |                    |  |  |
| 125.                                          |                          |                    |          |             |                    |  |  |
| 126.                                          |                          |                    |          |             |                    |  |  |
| 127.                                          |                          |                    |          |             |                    |  |  |
| 128.                                          |                          |                    |          |             |                    |  |  |
| 129.                                          |                          |                    |          |             |                    |  |  |
| 130.                                          |                          |                    |          |             |                    |  |  |
| 131.                                          |                          |                    |          |             |                    |  |  |
| 132.                                          |                          |                    |          |             |                    |  |  |
| 133.                                          |                          |                    |          |             |                    |  |  |
| 134.                                          |                          |                    |          |             |                    |  |  |