




12.5.5.3.1.3.2. Uplink

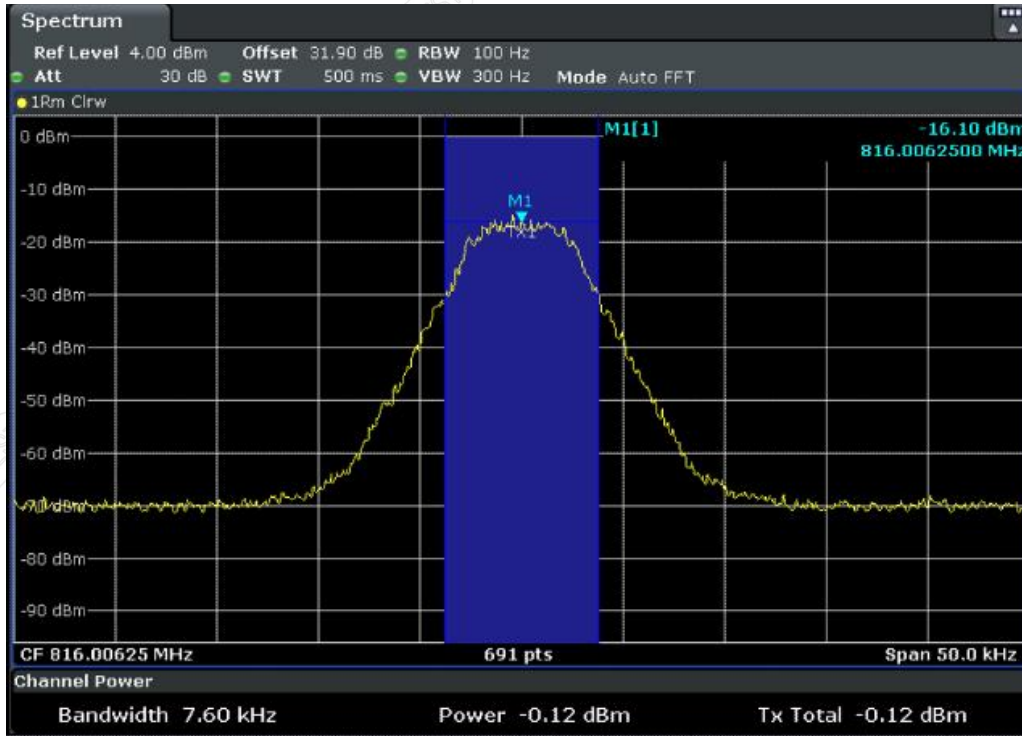


Lowest Frequency: 816.00625MHz, Input occupied BW

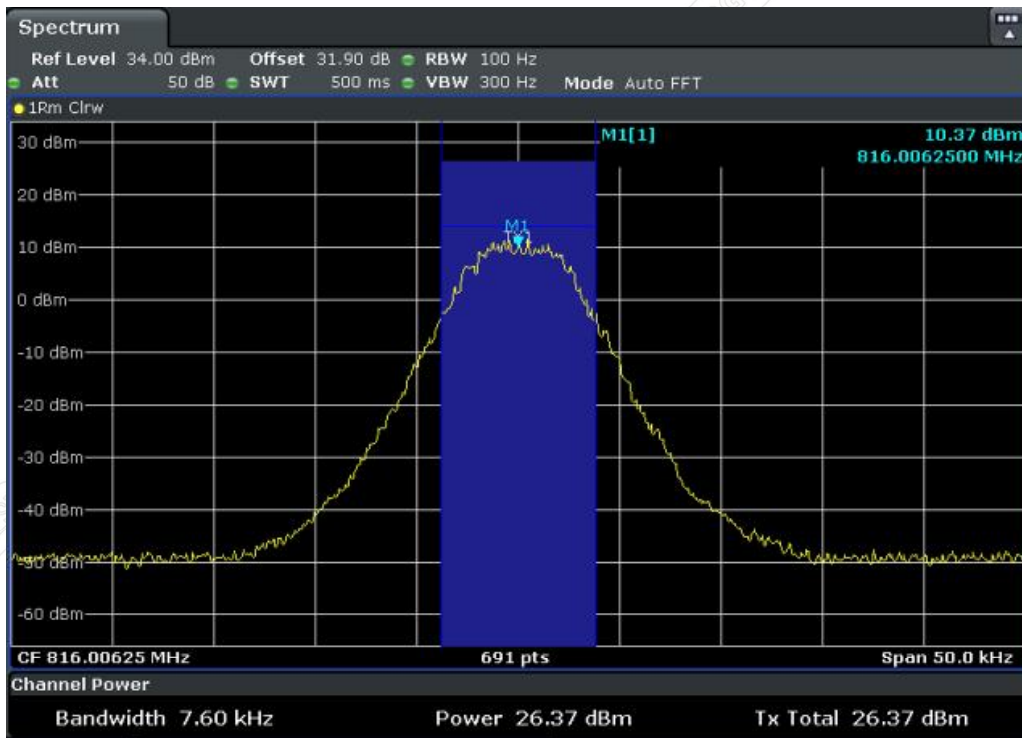


Lowest Frequency: 816.00625MHz, Output occupied BW(AGC)

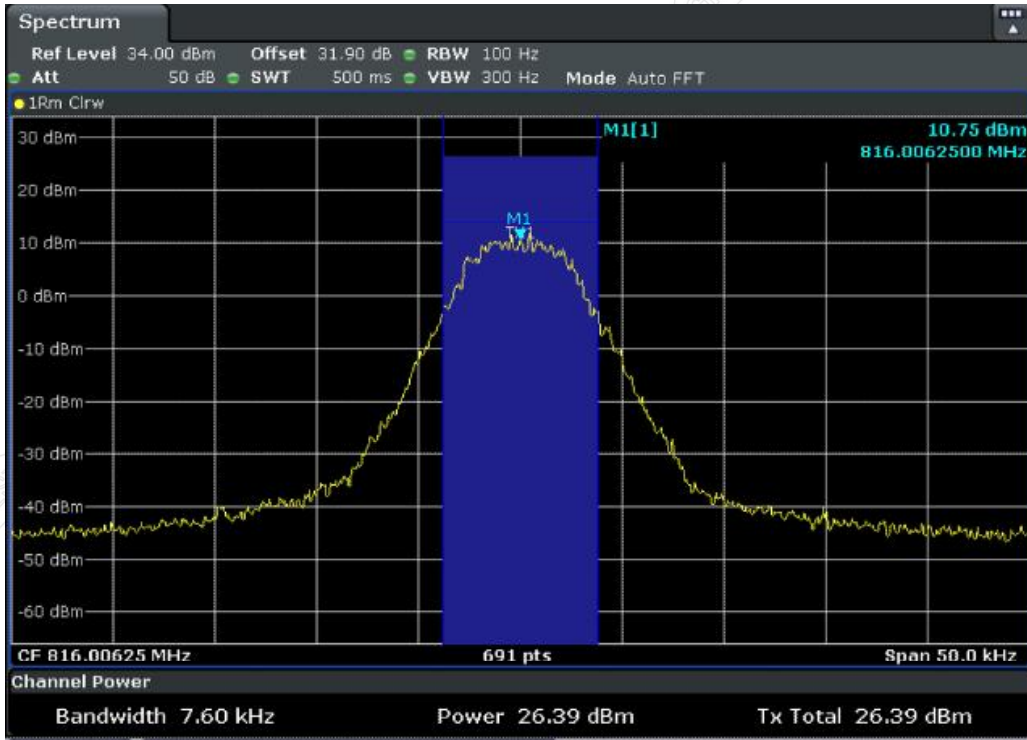


Lowest Frequency: 816.00625MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

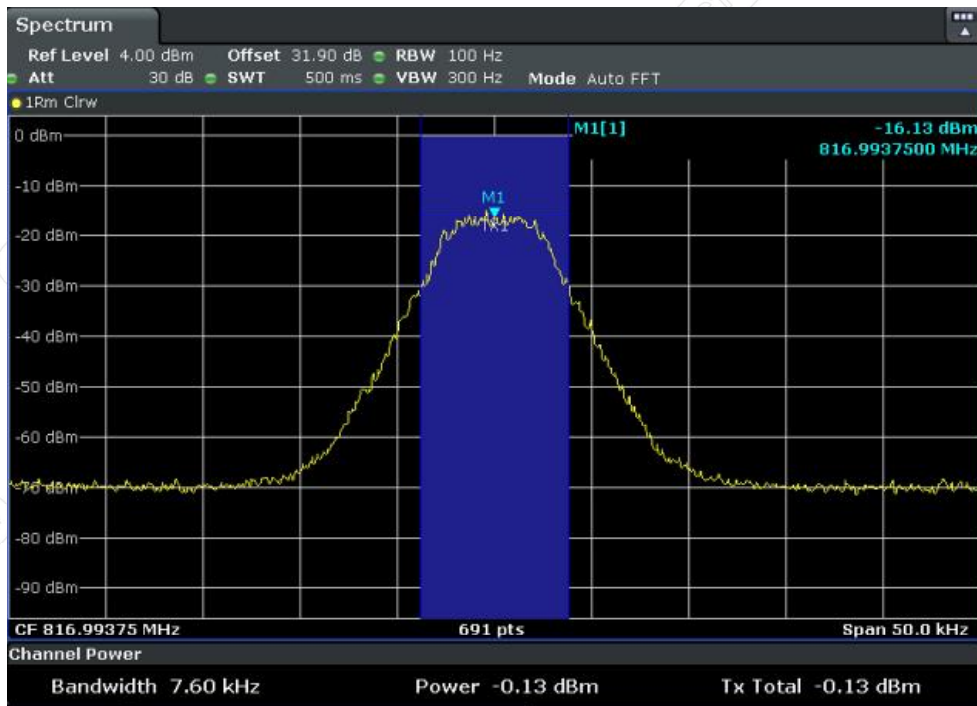

Highest Frequency: 816.99375MHz, Input occupied BW

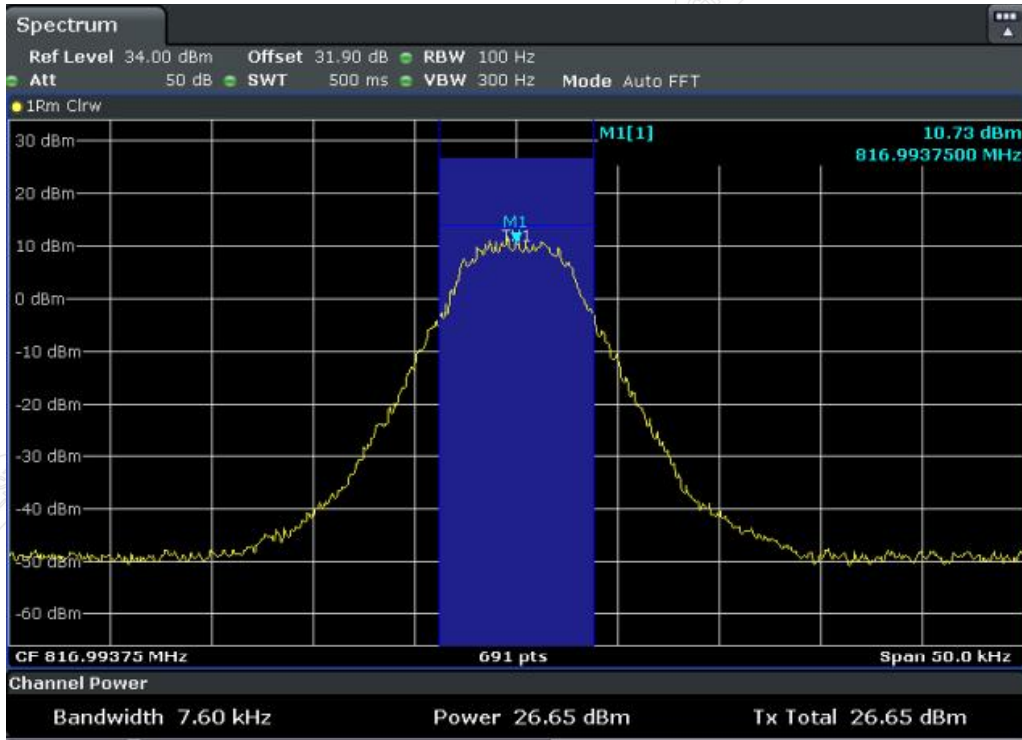


Highest Frequency: 816.99375MHz, Output occupied BW(AGC)

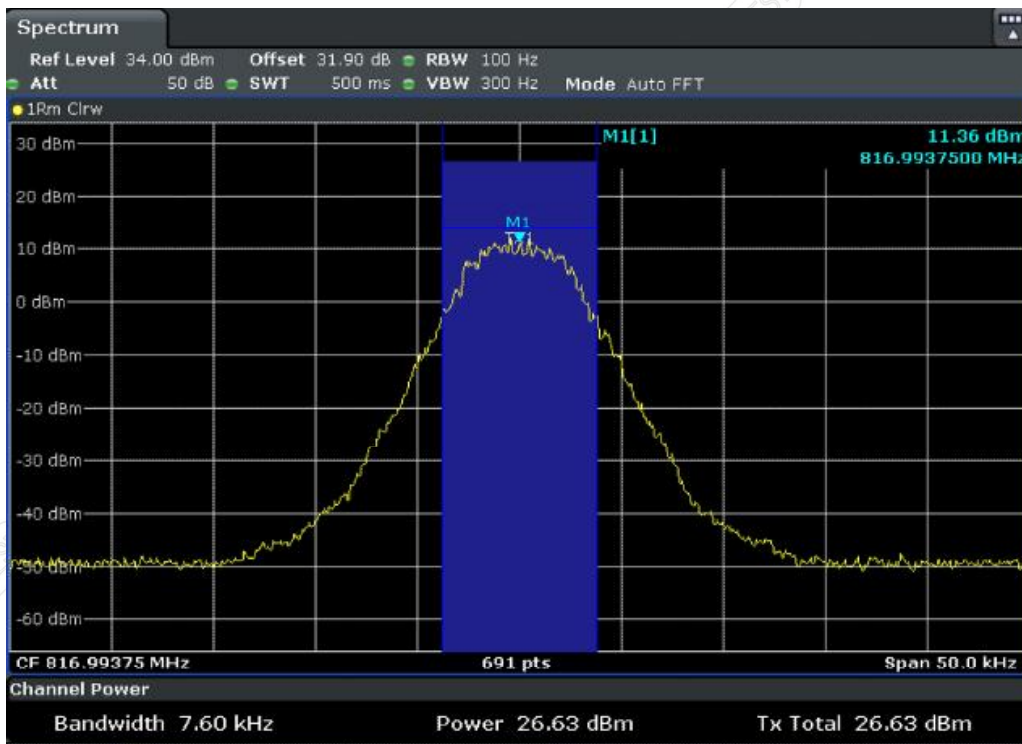


Highest Frequency: 816.99375MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

### 12.5.5.3.1.4. Analog FM


#### 12.5.5.3.1.4.1. Downlink

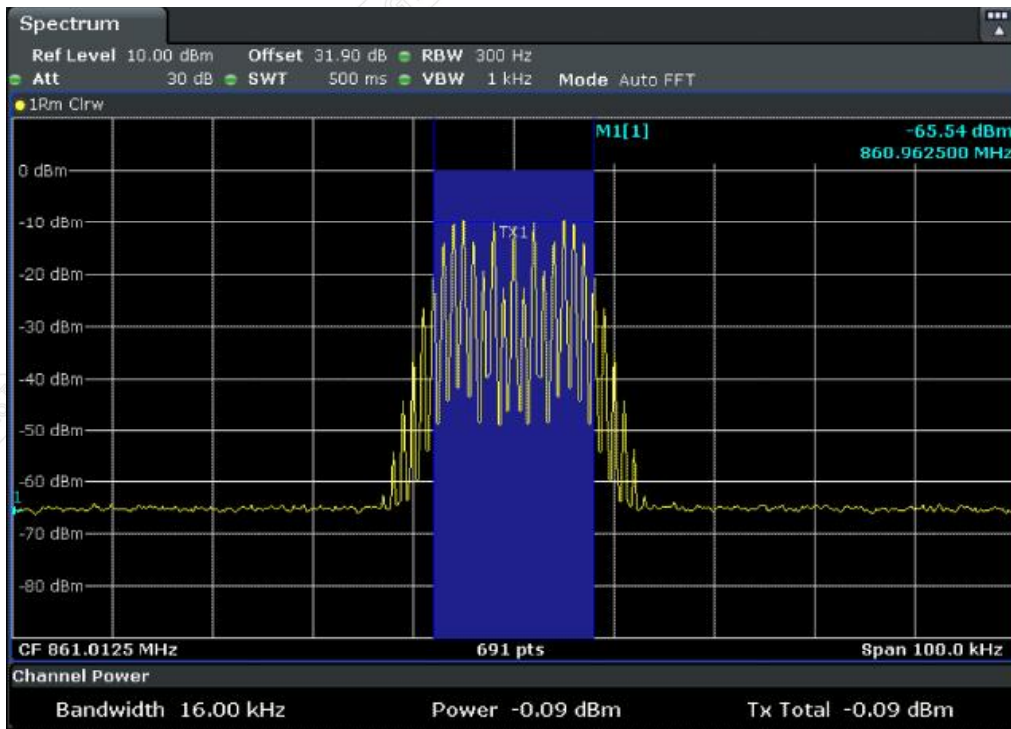


Lowest Frequency: 861.0125MHz, Input occupied BW

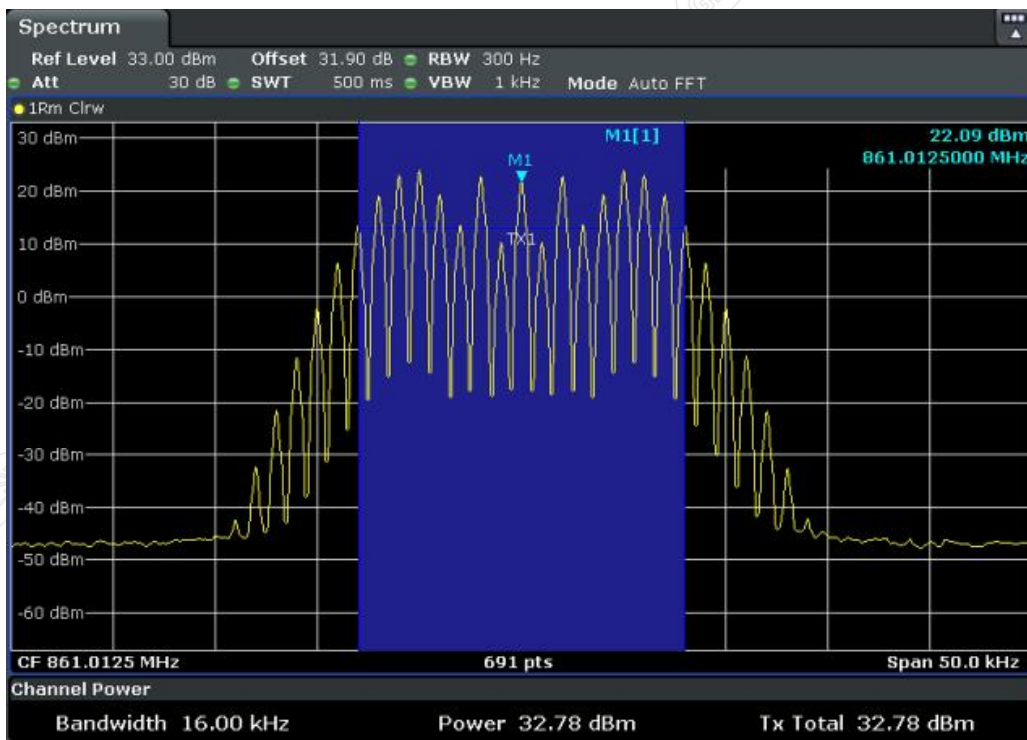


Lowest Frequency: 861.0125MHz, Output occupied BW(AGC)

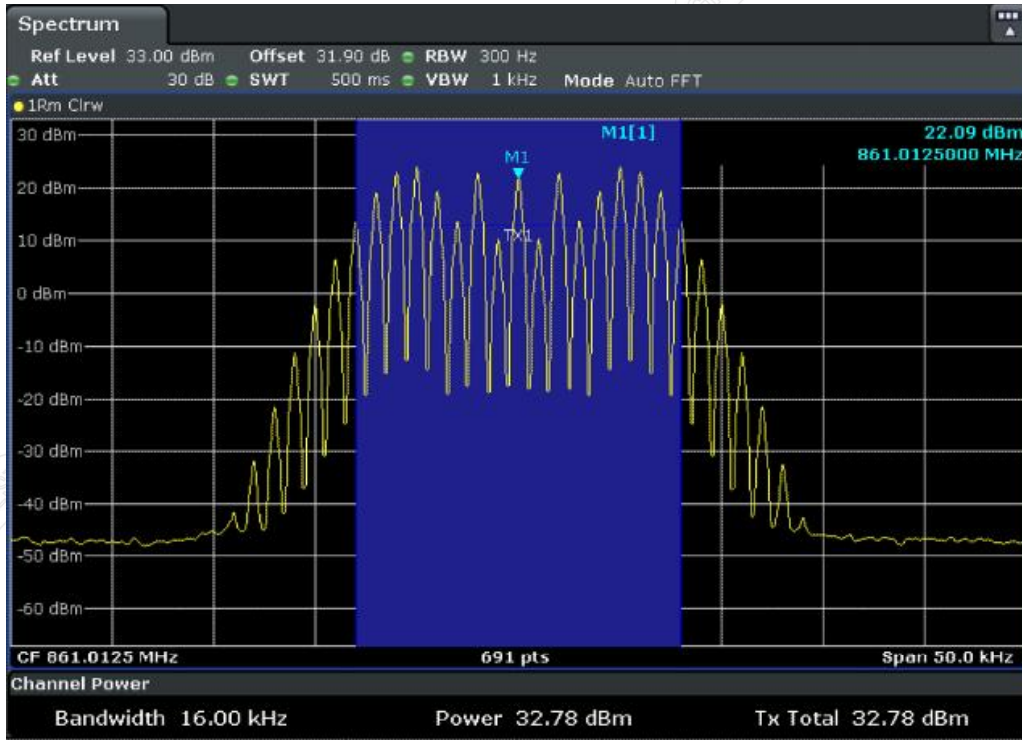


Lowest Frequency: 861.0125MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

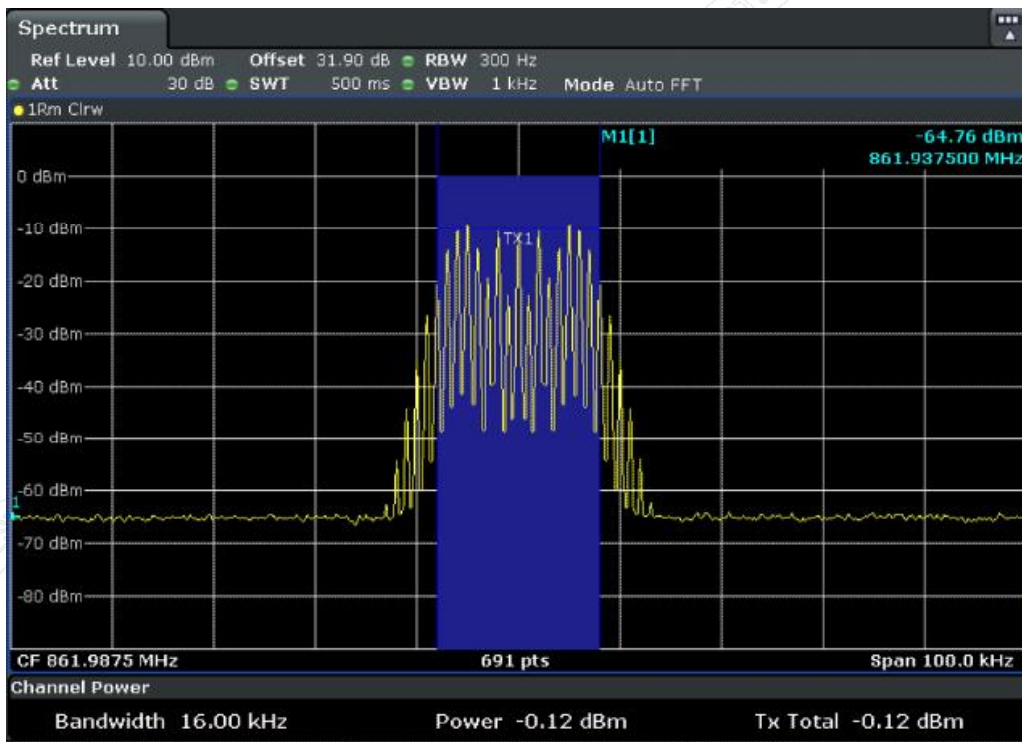

Highest Frequency: 861.9875MHz, Input occupied BW

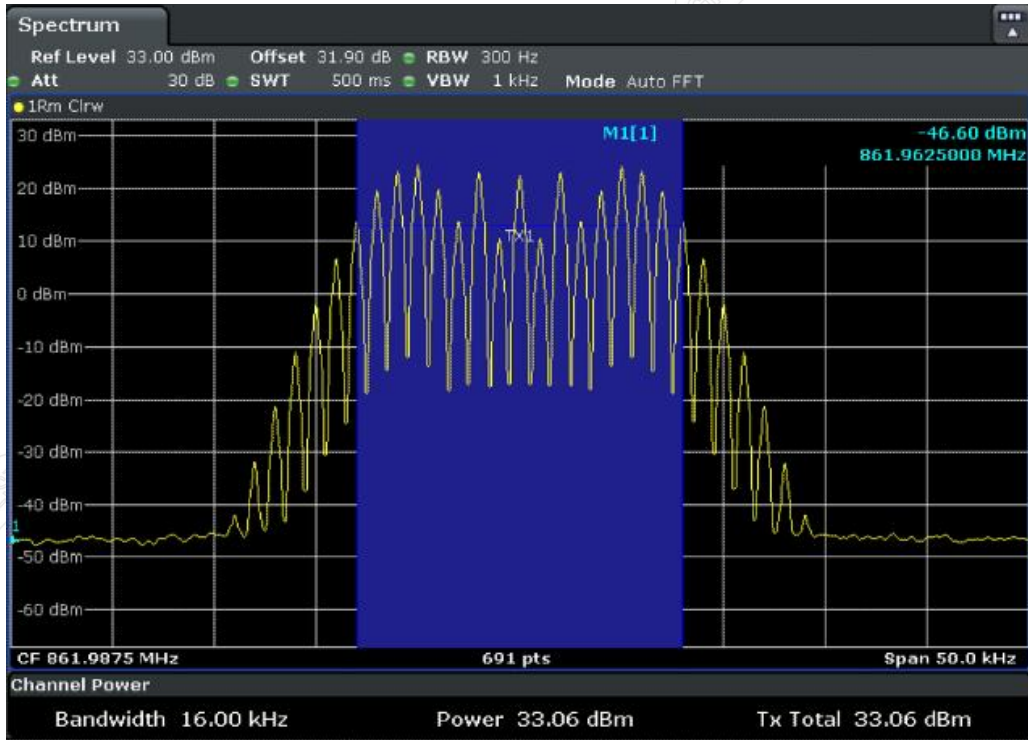


Highest Frequency: 861.9875MHz, Output occupied BW(AGC)

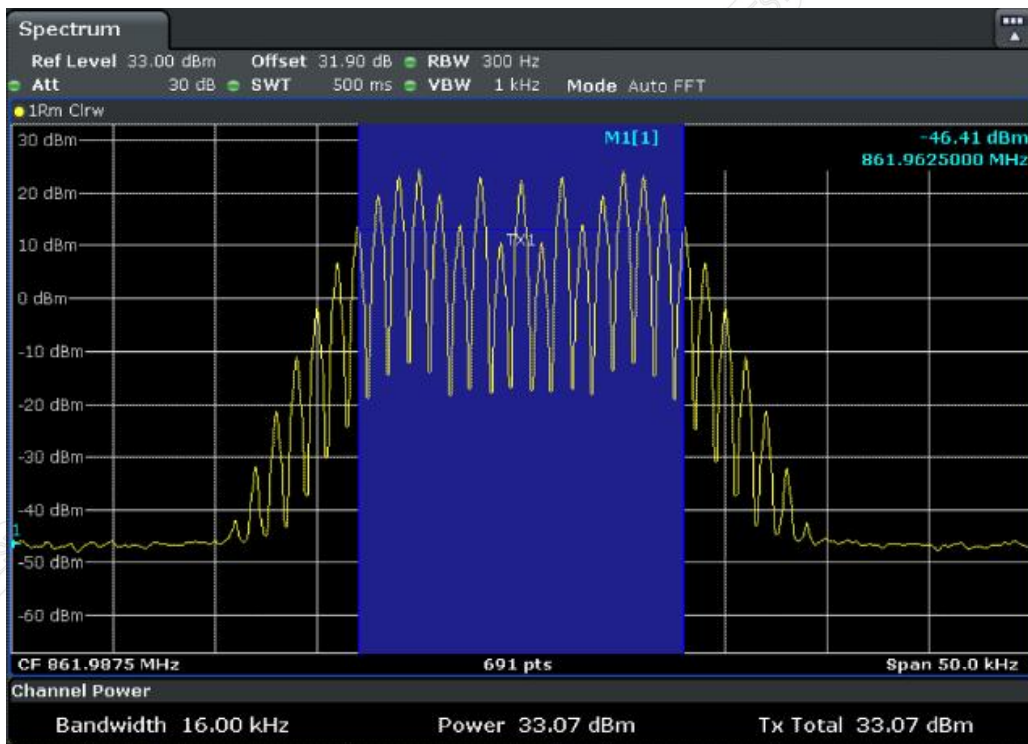


Highest Frequency: 861.9875MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)


12.5.5.3.1.4.2. Uplink

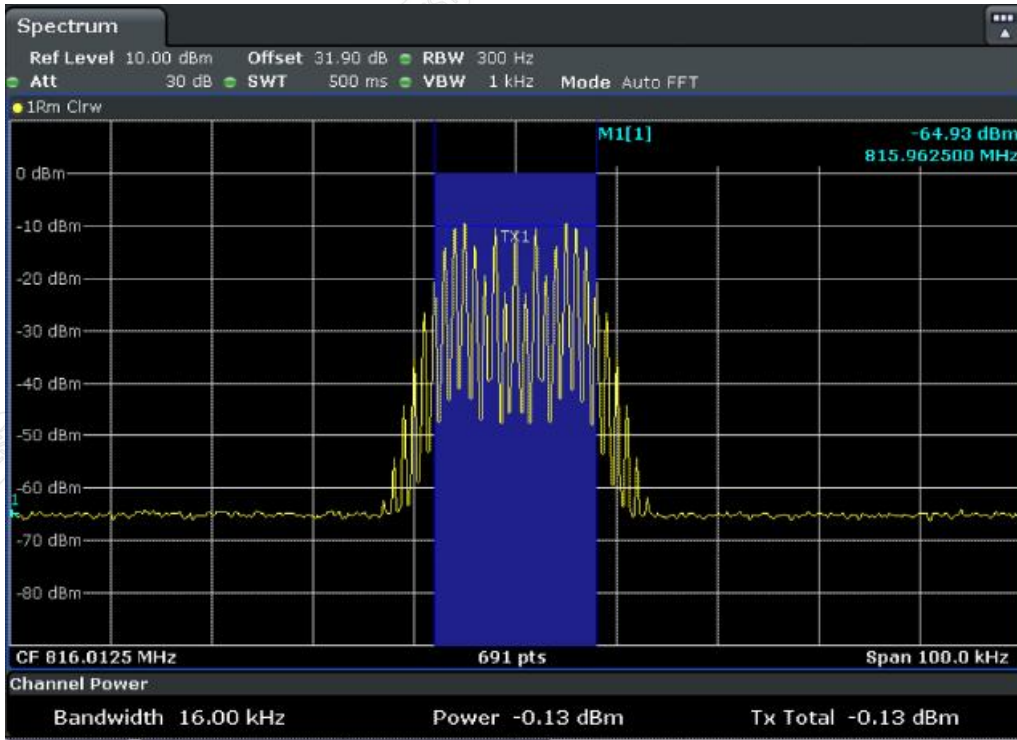


Lowest Frequency: 816.0125MHz, Input occupied BW

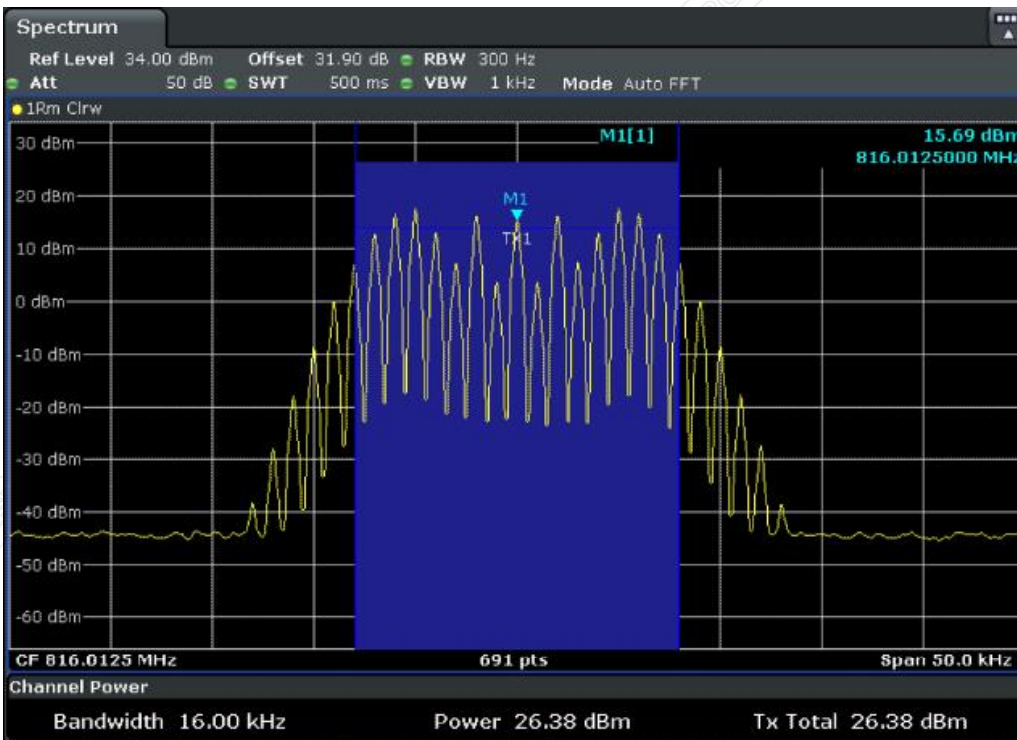

Lowest Frequency: 816.0125MHz, Output occupied BW(AGC)

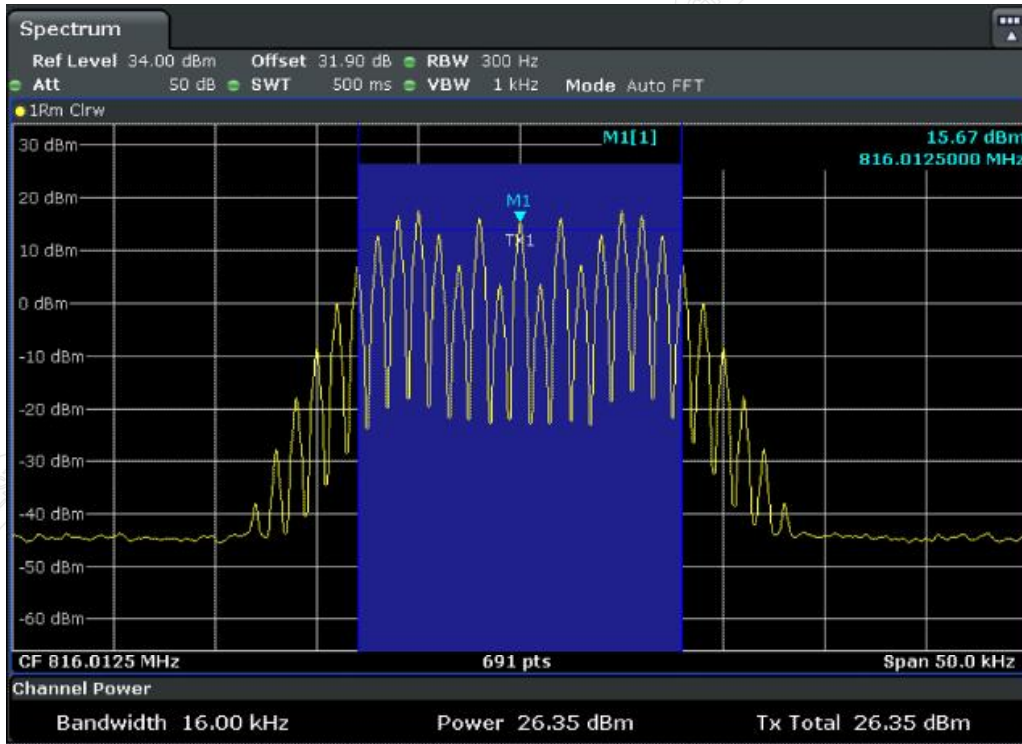


Lowest Frequency: 816.0125MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

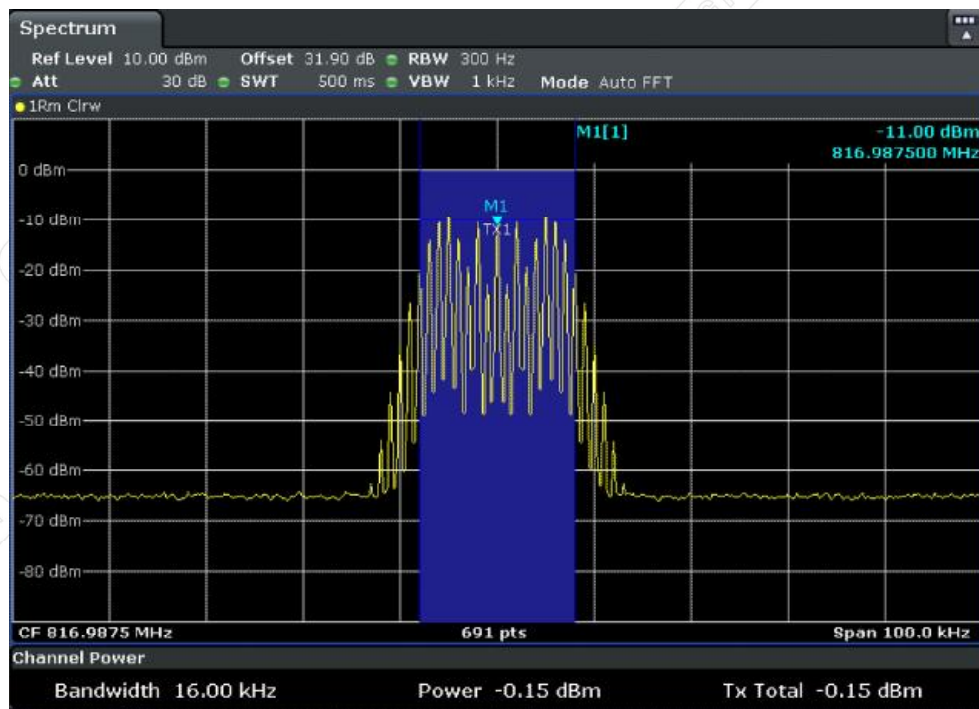


Highest Frequency: 816.9875MHz, Input occupied BW



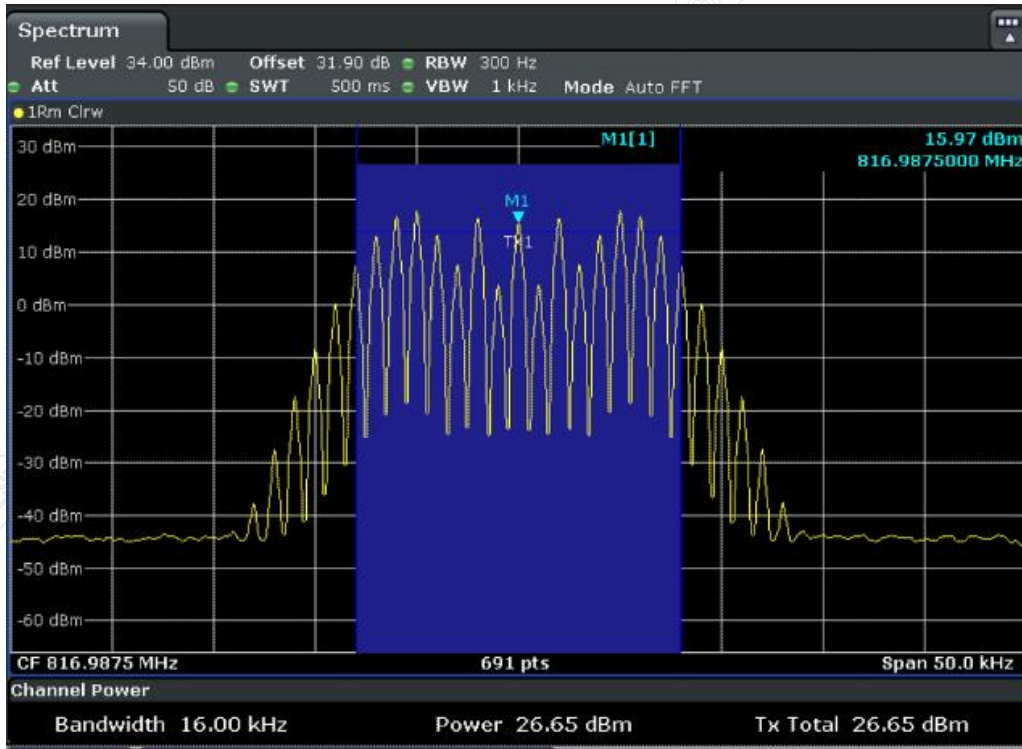


Highest Frequency: 816.9875MHz, Output occupied BW(AGC)

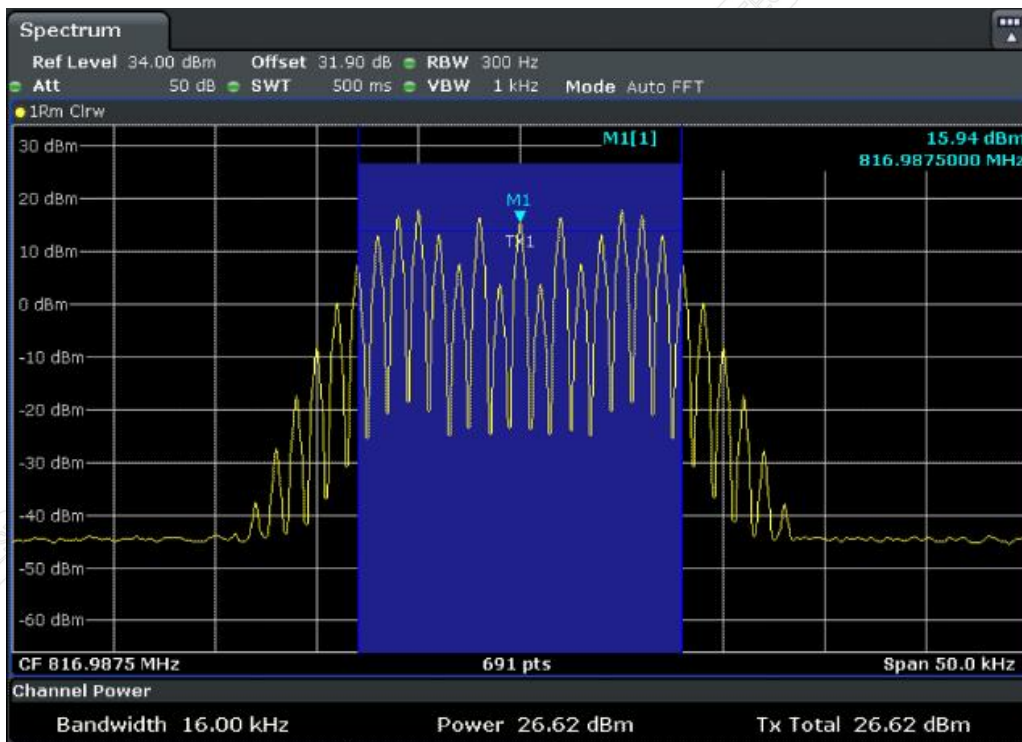


Highest Frequency: 816.9875MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

12.5.5.3.1.5. Tetra


12.5.5.3.1.5.1. Downlink

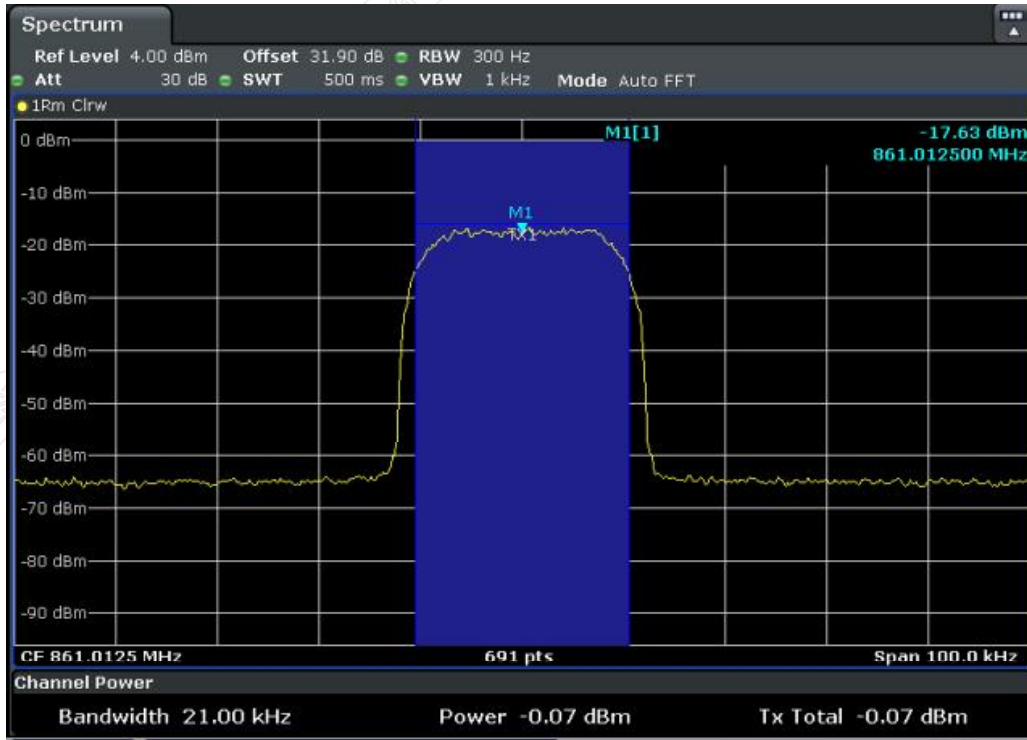


Lowest Frequency: 861.0125MHz, Input occupied BW

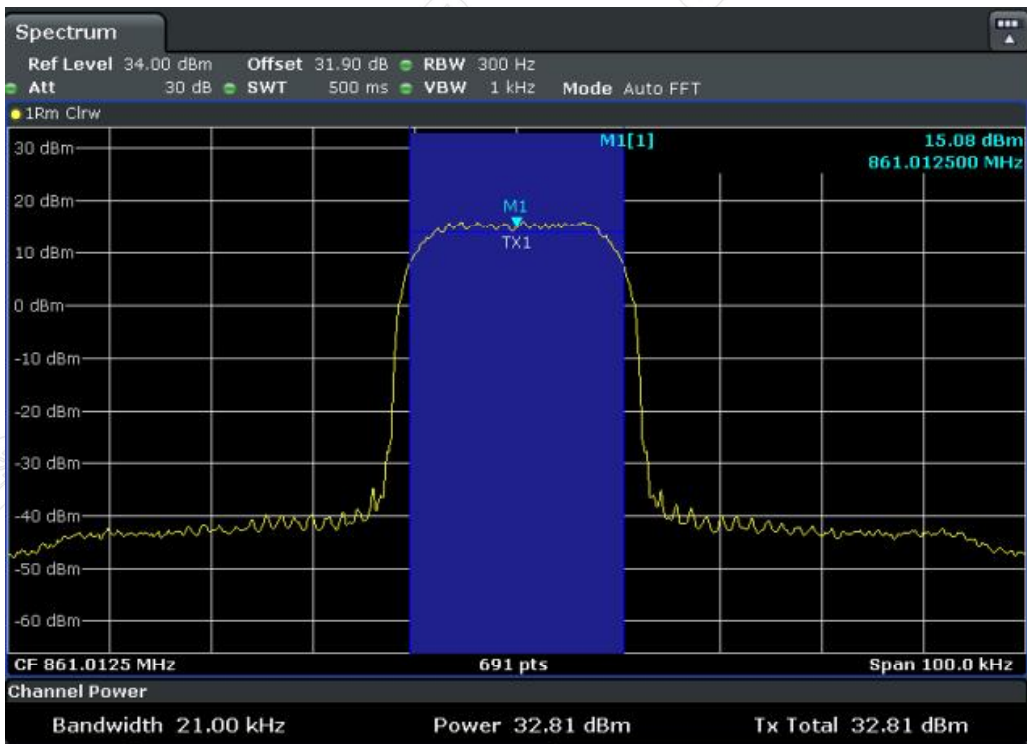


Lowest Frequency: 861.0125MHz, Output occupied BW(AGC)

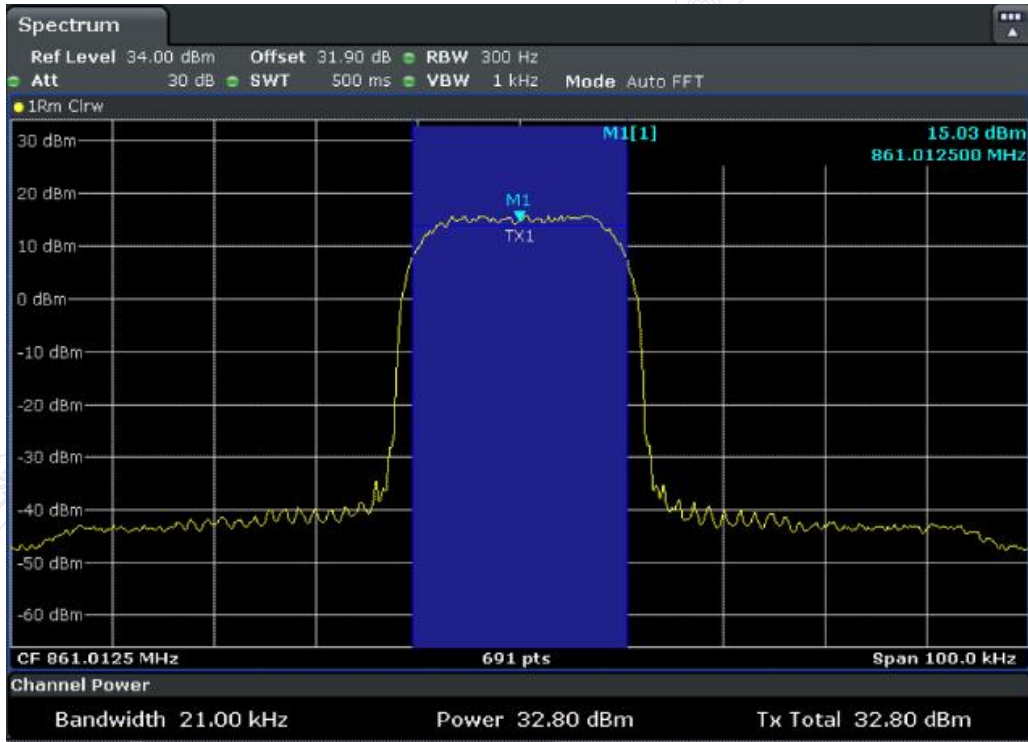


Lowest Frequency: 861.0125MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

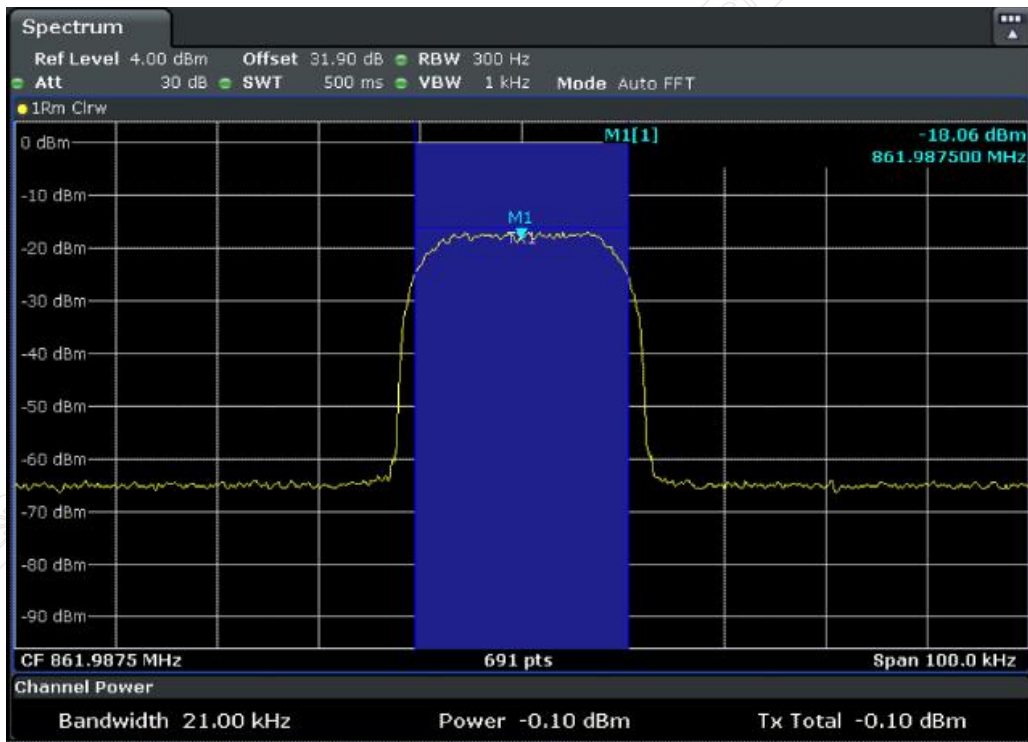

Highest Frequency: 861.9875MHz, Input occupied BW

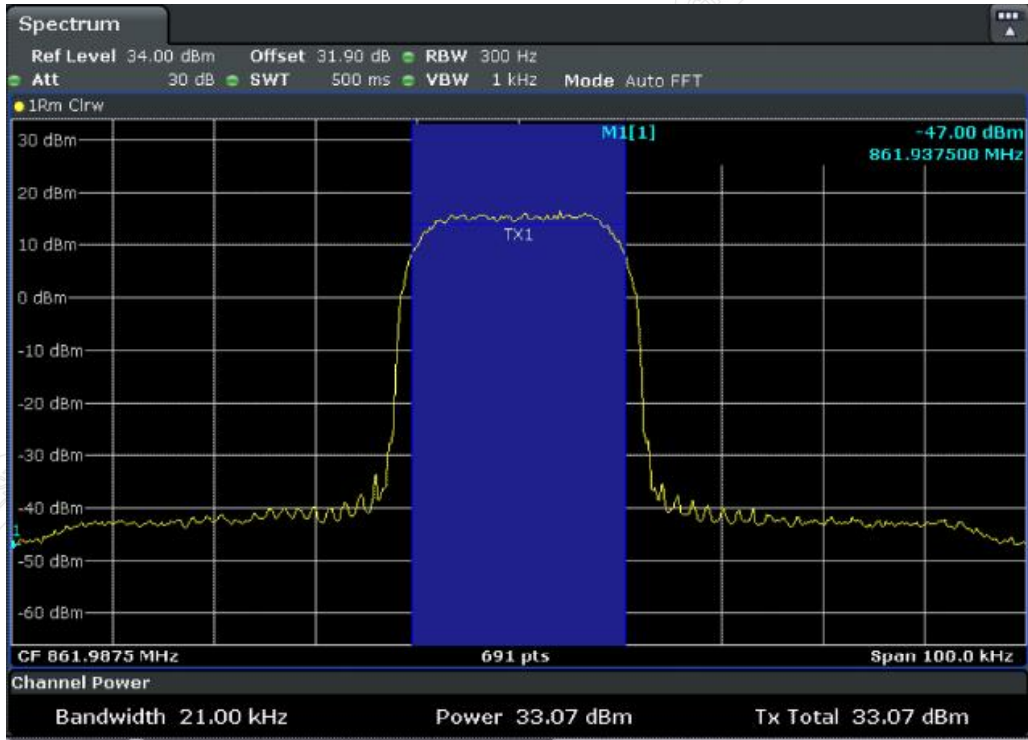


Highest Frequency: 861.9875MHz, Output occupied BW(AGC)

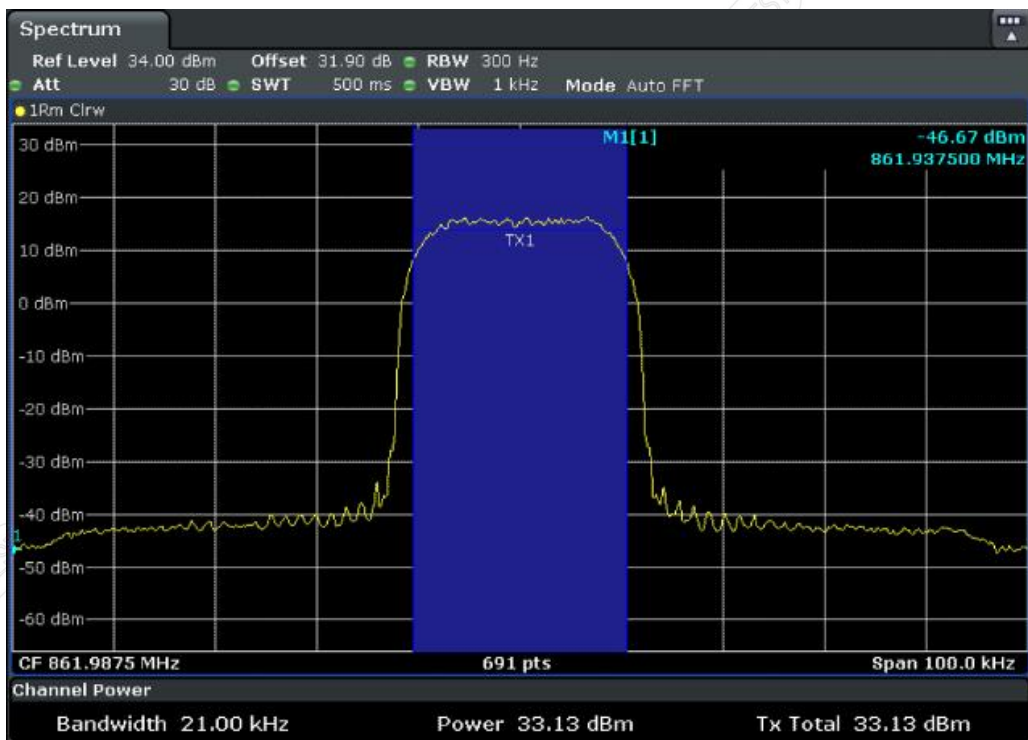


Highest Frequency: 861.9875MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)


12.5.5.3.1.5.2. Uplink

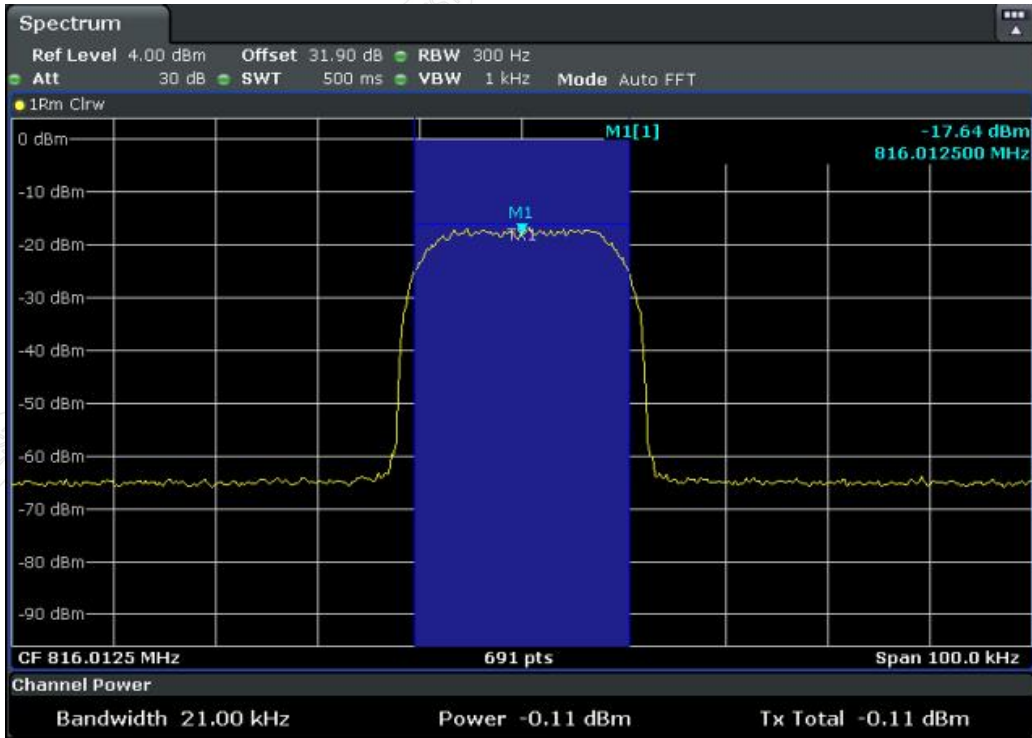


Lowest Frequency: 816.0125MHz, Input occupied BW

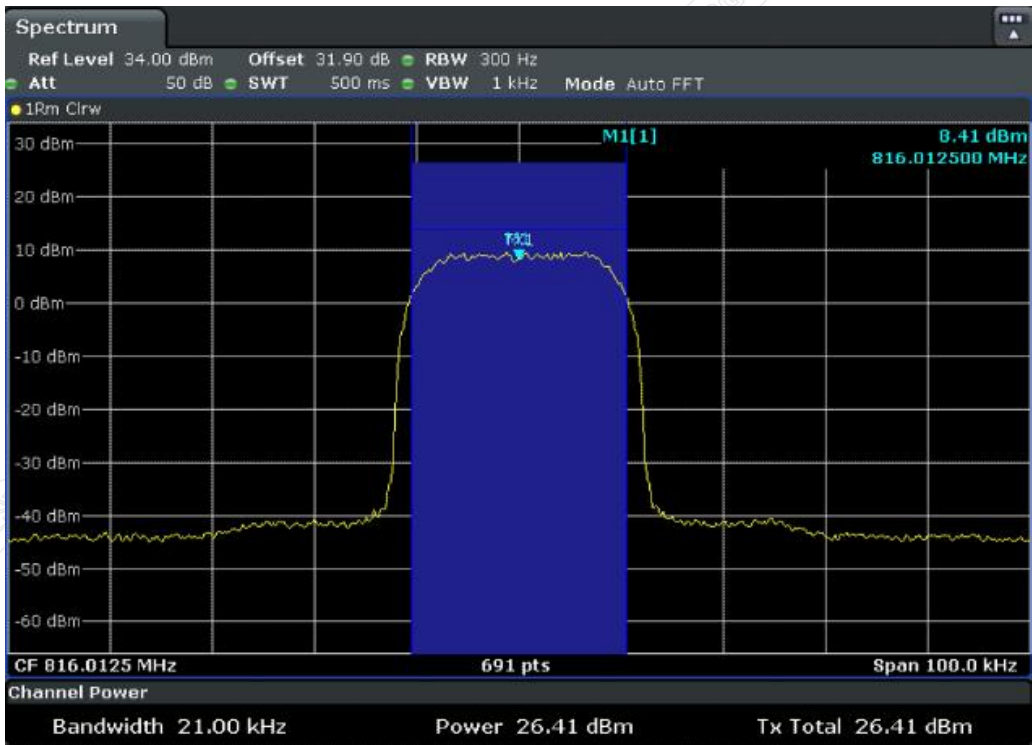


Lowest Frequency: 816.0125MHz, Output occupied BW(AGC)

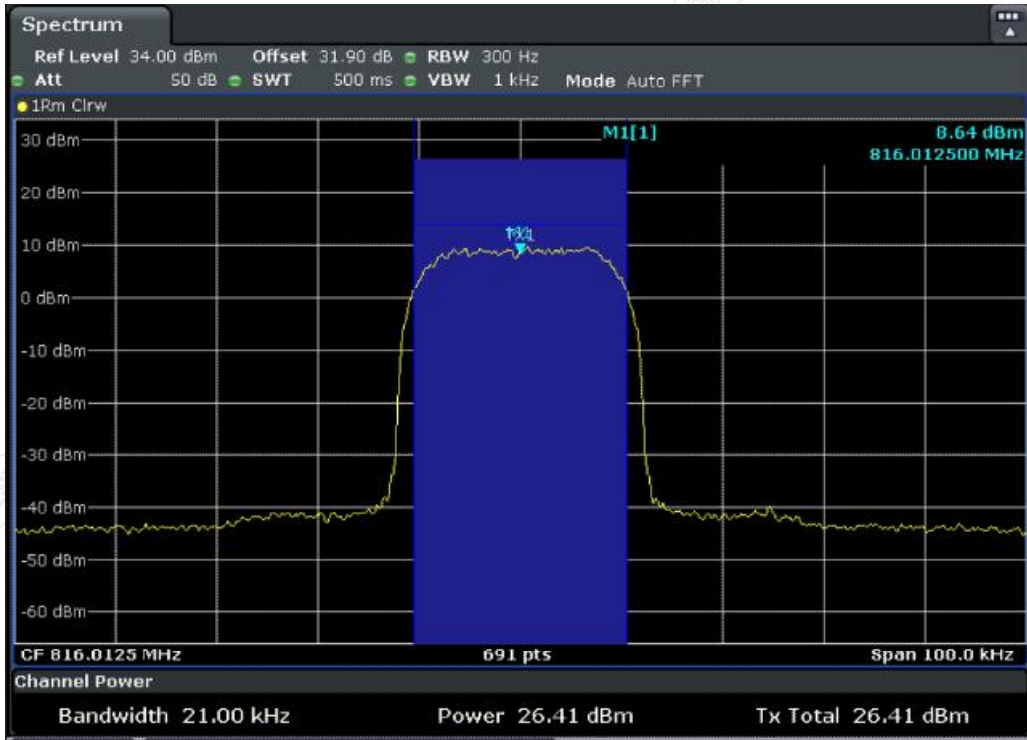


Lowest Frequency: 816.0125MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

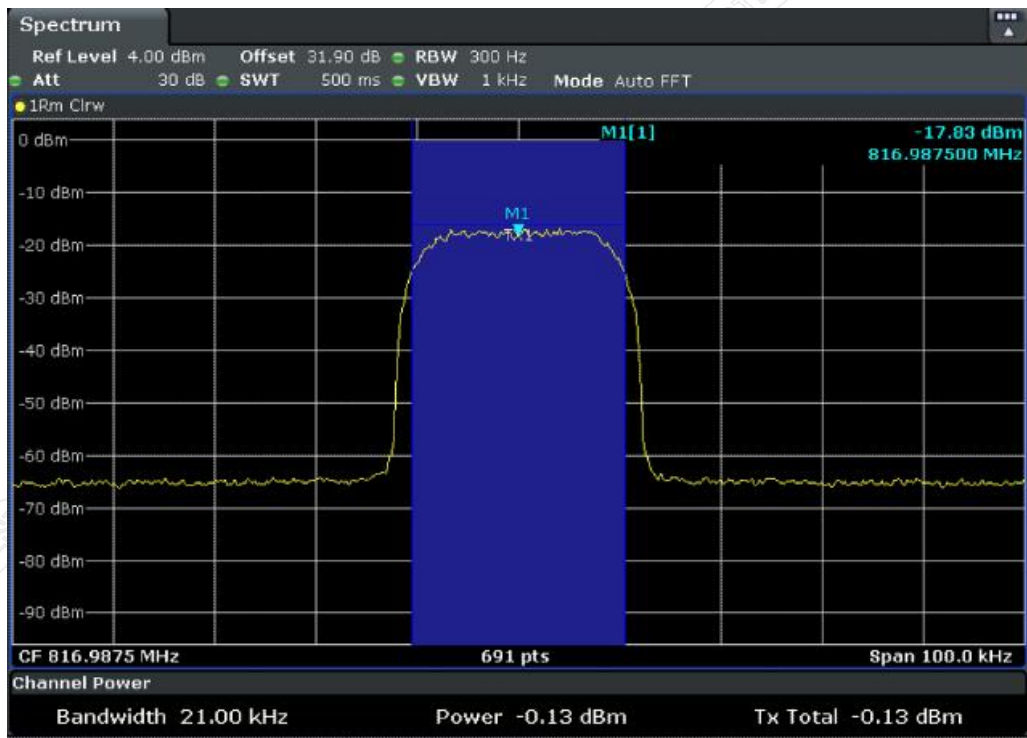

Highest Frequency: 816.9875MHz, Input occupied BW

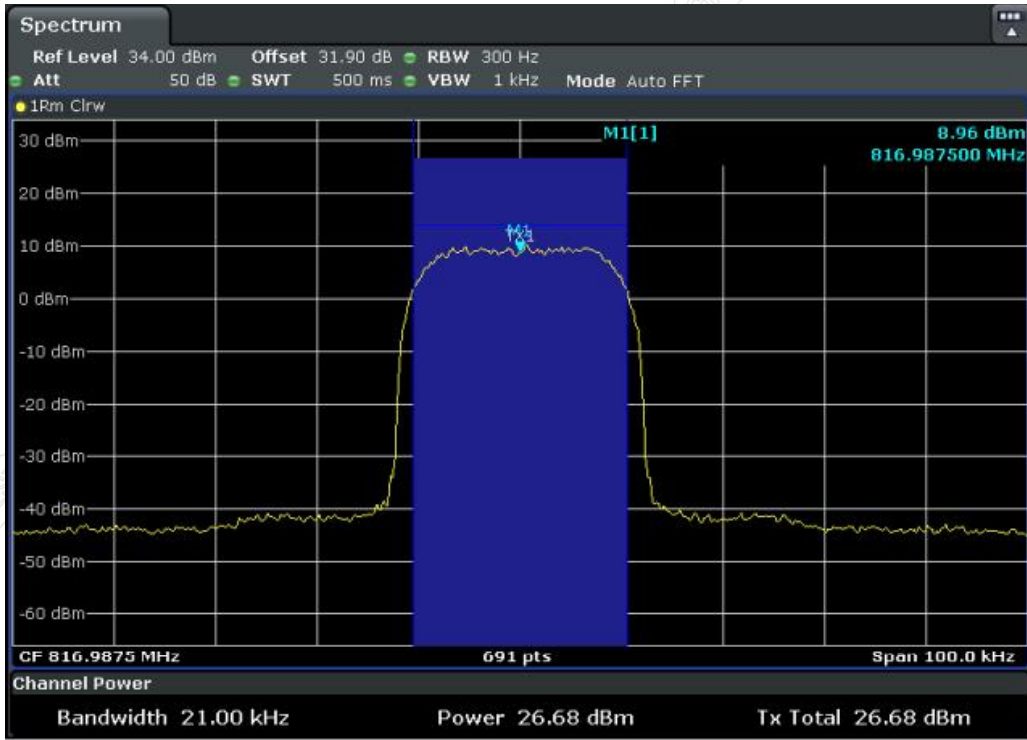

Highest Frequency: 816.9875MHz, Output occupied BW(AGC)

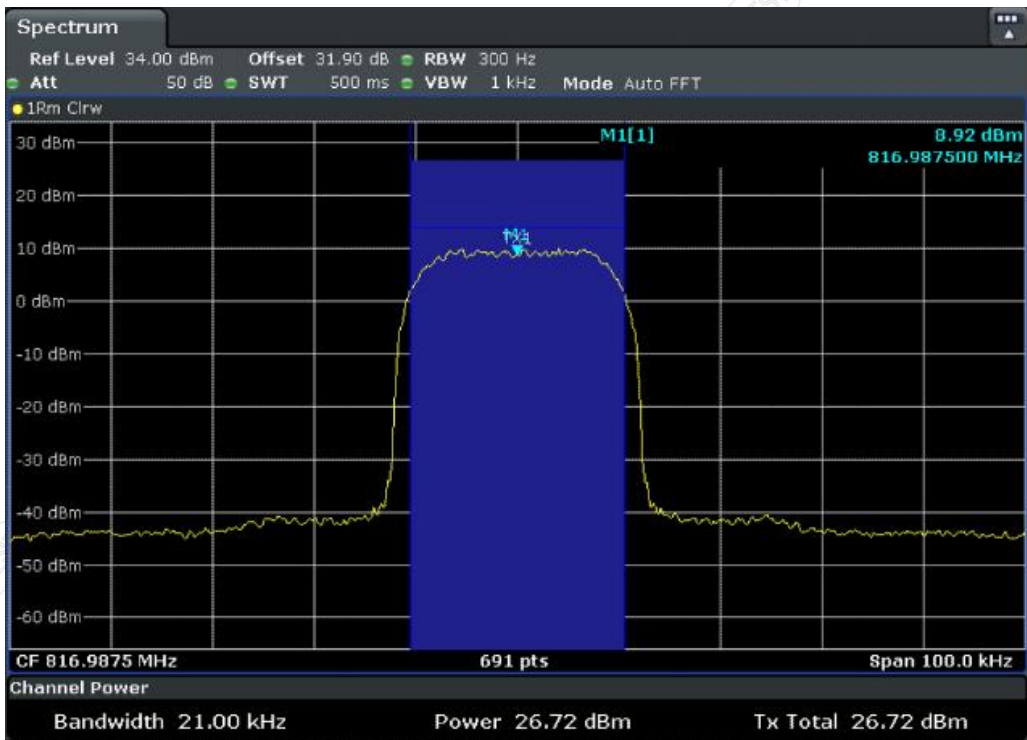

Highest Frequency: 816.9875MHz, Output occupied BW (with the input signal amplitude set 3 dB above the AGC threshold)

12.6. Mean power and amplifier/booster gain

Test requirement: KDB 935210 D05 clause 4.5  
 FCC PART 90.219 (e)(1)

Test Method: KDB 935210 D05 clause 4.5

12.6.1. Requirements

According to KDB 935210 D05 clause 4.5, the mean input and output power and the amplifier gain was measured by adjusting the internal gain control of the EUT to the maximum gain for which equipment certification is sought. Any EUT attenuation settings were set to their minimum value.

Input power levels (Downlink and Uplink) were set to maximum input ratings while confirming that the device is not capable of operating in saturation (Non-linear mode) at the rated input levels, including during the performance of the input/output power measurements.

For FCC PART 90.219 (e)(1) requirement:

**(e) Device Specifications.** In addition to the general rules for equipment certification in §90.203(a)(2) and part 2, subpart J of this chapter, a signal booster must also meet the rules in this paragraph.

**(1) The output power capability of a signal booster must be designed for deployments providing a radiated power not exceeding 5 Watts ERP for each retransmitted channel.**

12.6.2. Test configuration

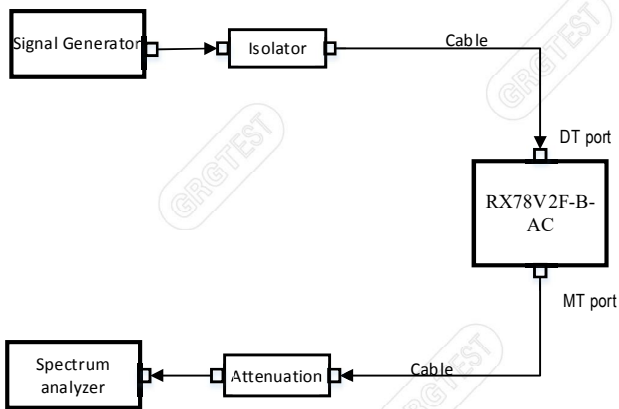


Figure 12.6-1 Downlink connection diagram

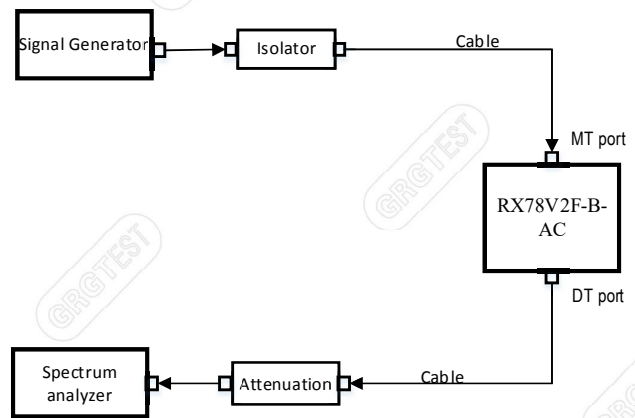


Figure 12.6-2 Uplink connection diagram



### 12.6.3. Test procedures

According to KDB 935210 D05 clause 3.5.2 and clause 4.5.2, test procedures are as follows:

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the test signal.
- c) The frequency of the signal generator shall be set to the frequency  $f_0$  as determined from 3.3.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- f) Measure and record the output power of the EUT; use 3.5.3 or 3.5.4 for power measurement.
- g) Remove the EUT from the measurement setup. Using the same signal generator settings, repeat the power measurement at the signal generator port, which was used as the input signal to the EUT, and record as the input power. EUT gain may be calculated as described in 3.5.5.
- h) Repeat steps f) and g) with input signal amplitude set to 3 dB above the AGC threshold level.
- i) Repeat steps e) to h) with the narrowband test signal.
- j) Repeat steps e) to i) for all frequency bands authorized for use by the EUT.

----- The following blanks -----

## 12.6.4. Test results

Test Date (yy-mm-dd): 2024-05-14

Normal condition: Temp:25.3°C, Humid: 42%, Atmospheric Pressure:101kpa

Supply Voltage: AC 110V, 50Hz

## 12.6.4.1. Mean power and gain

12.6.4.1.1. 800MHz Band(Downlink: 861MHz ~862MHz, Uplink: 816MHz ~ 817MHz)

## 12.6.4.1.1.1. Downlink

Test link	Frequency (MHz)	Sig output power (dBm)	Input Cable Loss (dB)	Peak power (dBm)	Output Atten +Output Cable Loss(dB)	Output power (dBm)	Output power (W)	Gain (dB)
1. P25 Phase I(C4FM)								
Down <sup>(1)</sup>	861.00625	-56.1	1.8	0.7	31.9	32.6	1.82	90.5
Down <sup>(2)</sup>	861.00625	-53.1	1.8	0.7	31.9	32.6	1.82	87.5
Down <sup>(1)</sup>	861.99375	-56.1	1.8	1.0	31.9	32.9	1.95	90.8
Down <sup>(2)</sup>	861.99375	-53.1	1.8	1.0	31.9	32.9	1.95	87.8
2. P25 Phase II(H-DQPSK)								
Down <sup>(1)</sup>	861.00625	-56.1	1.8	0.7	31.9	32.6	1.82	90.5
Down <sup>(2)</sup>	861.00625	-53.1	1.8	0.7	31.9	32.6	1.82	87.5
Down <sup>(1)</sup>	861.99375	-56.1	1.8	1.0	31.9	32.9	1.95	90.8
Down <sup>(2)</sup>	861.99375	-53.1	1.8	1.0	31.9	32.9	1.95	87.8
3. DMR								
Down <sup>(1)</sup>	861.00625	-56.1	1.8	0.7	31.9	32.6	1.82	90.5
Down <sup>(2)</sup>	861.00625	-53.1	1.8	0.7	31.9	32.6	1.82	87.5
Down <sup>(1)</sup>	861.99375	-56.1	1.8	1.0	31.9	32.9	1.95	90.8
Down <sup>(2)</sup>	861.99375	-53.1	1.8	1.0	31.9	32.9	1.95	87.8
4. Analog FM mode								
Down <sup>(1)</sup>	861.0125	-56.1	1.8	0.9	31.9	32.8	1.91	90.7
Down <sup>(2)</sup>	861.0125	-53.1	1.8	0.9	31.9	32.8	1.91	87.7
Down <sup>(1)</sup>	861.9875	-56.1	1.8	1.2	31.9	33.1	2.04	91.0
Down <sup>(2)</sup>	861.9875	-53.1	1.8	1.2	31.9	33.1	2.04	88.0
5. Tetra								
Down <sup>(1)</sup>	861.0125	-56.1	1.8	0.9	31.9	32.8	1.91	90.7
Down <sup>(2)</sup>	861.0125	-53.1	1.8	0.9	31.9	32.8	1.91	87.7
Down <sup>(1)</sup>	861.9875	-56.1	1.8	1.2	31.9	33.1	2.04	91.0
Down <sup>(2)</sup>	861.9875	-53.1	1.8	1.2	31.9	33.1	2.04	88.0

NOTE: <sup>(1)</sup> Level is 0.5 dB below AGC threshold; <sup>(2)</sup> Level is 3dB above AGC threshold.

## 12.6.4.1.1.2. Uplink

Test link	Frequency (MHz)	Sig output power (dBm)	Input Cable Loss (dB)	Peak power (dBm)	Output Atten +Output Cable Loss(dB)	Output power (dBm)	Output power (W)	Gain (dB)
1. P25 Phase I(C4FM)								
Up <sup>(1)</sup>	816.00625	-63.1	1.0	-5.4	31.9	26.5	0.45	90.6
Up <sup>(2)</sup>	816.00625	-60.1	1.0	-5.4	31.9	26.5	0.45	87.6
Up <sup>(1)</sup>	816.99375	-62.8	1.0	-5.3	31.9	26.6	0.46	90.4
Up <sup>(2)</sup>	816.99375	-59.8	1.0	-5.3	31.9	26.6	0.46	87.4
2. P25 Phase II(H-DQPSK)								
Up <sup>(1)</sup>	816.00625	-63.1	1.0	-5.4	31.9	26.5	0.45	90.6
Up <sup>(2)</sup>	816.00625	-60.1	1.0	-5.4	31.9	26.5	0.45	87.6
Up <sup>(1)</sup>	816.99375	-62.8	1.0	-5.2	31.9	26.7	0.47	90.5
Up <sup>(2)</sup>	816.99375	-59.8	1.0	-5.2	31.9	26.7	0.47	87.5
3. DMR								
Up <sup>(1)</sup>	816.00625	-63.1	1.0	-5.5	31.9	26.4	0.44	90.5
Up <sup>(2)</sup>	816.00625	-60.1	1.0	-5.5	31.9	26.4	0.44	87.5
Up <sup>(1)</sup>	816.99375	-62.8	1.0	-5.3	31.9	26.6	0.46	90.4
Up <sup>(2)</sup>	816.99375	-59.8	1.0	-5.3	31.9	26.6	0.46	87.4
4. Analog FM mode								
Up <sup>(1)</sup>	816.0125	-63.1	1.0	-5.5	31.9	26.4	0.44	90.5
Up <sup>(2)</sup>	816.0125	-60.1	1.0	-5.5	31.9	26.4	0.44	87.5
Up <sup>(1)</sup>	816.9875	-62.8	1.0	-5.3	31.9	26.6	0.46	90.4
Up <sup>(2)</sup>	816.9875	-59.8	1.0	-5.3	31.9	26.6	0.46	87.4
5. Tetra								
Up <sup>(1)</sup>	816.0125	-63.1	1.0	-5.5	31.9	26.4	0.44	90.5
Up <sup>(2)</sup>	816.0125	-60.1	1.0	-5.5	31.9	26.4	0.44	87.5
Up <sup>(1)</sup>	816.9875	-62.8	1.0	-5.2	31.9	26.7	0.47	90.5
Up <sup>(2)</sup>	816.9875	-59.8	1.0	-5.2	31.9	26.7	0.47	87.5

NOTE: <sup>(1)</sup> Level is 0.5 dB below AGC threshold; <sup>(2)</sup> Level is 3dB above AGC threshold.

## 12.6.4.2. ERP Calculations

## 12.6.4.2.1. 800MHz Band(Downlink: 861MHz ~862MHz, Uplink: 816MHz ~ 817MHz)

## 12.6.4.2.1.1. Downlink

Test link	Frequency (MHz)	EUT Max. output power (dBm)	Max. Ant Gain(dBi)	ERP (W)	ERP Limit (W)	AGC Mode
1. P25 Phase I(C4FM)						
Down	861.00625	32.6	3.0	3.6	5.0	-0.5dB Below
Down	861.00625	32.6	3.0	3.6	5.0	+3.0dB above
Down	861.99375	32.9	3.0	3.9	5.0	-0.5dB Below
Down	861.99375	32.9	3.0	3.9	5.0	+3.0dB above
2. P25 Phase II(H-DQPSK)						
Down	861.00625	32.6	3.0	3.6	5.0	-0.5dB Below
Down	861.00625	32.6	3.0	3.6	5.0	+3.0dB above
Down	861.99375	32.9	3.0	3.9	5.0	-0.5dB Below
Down	861.99375	32.9	3.0	3.9	5.0	+3.0dB above
3. DMR						
Down	861.00625	32.6	3.0	3.6	5.0	-0.5dB Below
Down	861.00625	32.6	3.0	3.6	5.0	+3.0dB above
Down	861.99375	32.9	3.0	3.9	5.0	-0.5dB Below
Down	861.99375	32.9	3.0	3.9	5.0	+3.0dB above
4. Analog FM						
Down	861.0125	32.8	3.0	3.8	5.0	-0.5dB Below
Down	861.0125	32.8	3.0	3.8	5.0	+3.0dB above
Down	861.9875	33.1	3.0	4.1	5.0	-0.5dB Below
Down	861.9875	33.1	3.0	4.1	5.0	+3.0dB above
5. Tetra						
Down	861.0125	32.8	3.0	3.8	5.0	-0.5dB Below
Down	861.0125	32.8	3.0	3.8	5.0	+3.0dB above
Down	861.9875	33.1	3.0	4.1	5.0	-0.5dB Below
Down	861.9875	33.1	3.0	4.1	5.0	+3.0dB above

## 12.6.4.2.1.2. Uplink

Test link	Frequency (MHz)	EUT Max. output power (dBm)	Max. Ant Gain(dBi)	ERP (W)	ERP Limit (W)	AGC Mode
1. P25 Phase I(C4FM)						
Up	816.00625	26.5	9.0	3.5	5.0	-0.5dB Below
Up	816.00625	26.5	9.0	3.5	5.0	+3.0dB above
Up	816.99375	26.6	9.0	3.6	5.0	-0.5dB Below
Up	816.99375	26.6	9.0	3.6	5.0	+3.0dB above
2. P25 Phase II(H-DQPSK)						
Up	816.00625	26.5	9.0	3.5	5.0	-0.5dB Below
Up	816.00625	26.5	9.0	3.5	5.0	+3.0dB above
Up	816.99375	26.7	9.0	3.7	5.0	-0.5dB Below
Up	816.99375	26.7	9.0	3.7	5.0	+3.0dB above
3. DMR						
Up	816.00625	26.4	9.0	3.5	5.0	-0.5dB Below
Up	816.00625	26.4	9.0	3.5	5.0	+3.0dB above
Up	816.99375	26.6	9.0	3.6	5.0	-0.5dB Below
Up	816.99375	26.6	9.0	3.6	5.0	+3.0dB above
4. Analog FM						
Up	816.0125	26.4	9.0	3.5	5.0	-0.5dB Below
Up	816.0125	26.4	9.0	3.5	5.0	+3.0dB above
Up	816.9875	26.6	9.0	3.6	5.0	-0.5dB Below
Up	816.9875	26.6	9.0	3.6	5.0	+3.0dB above
5. Tetra						
Up	816.0125	26.4	9.0	3.5	5.0	-0.5dB Below
Up	816.0125	26.4	9.0	3.5	5.0	+3.0dB above
Up	816.9875	26.7	9.0	3.7	5.0	-0.5dB Below
Up	816.9875	26.7	9.0	3.7	5.0	+3.0dB above

12.7. Noise figure

Test requirement: KDB 935210 D05 clause 4.6  
 FCC PART 90.219 (e)(2)

Test Method: KDB 935210 D05/4.6

12.7.1. Requirements

According to FCC PART 90§90.219 (e) (2) requirement, the noise figure limit of a signal booster must be given in table 10.7-1 in either direction.

Table 10.7-1 Noise figure limits

frequency range(MHz)	Max. Noise figure limit(dB)
851-861/806-816	9

12.7.2. Test configuration

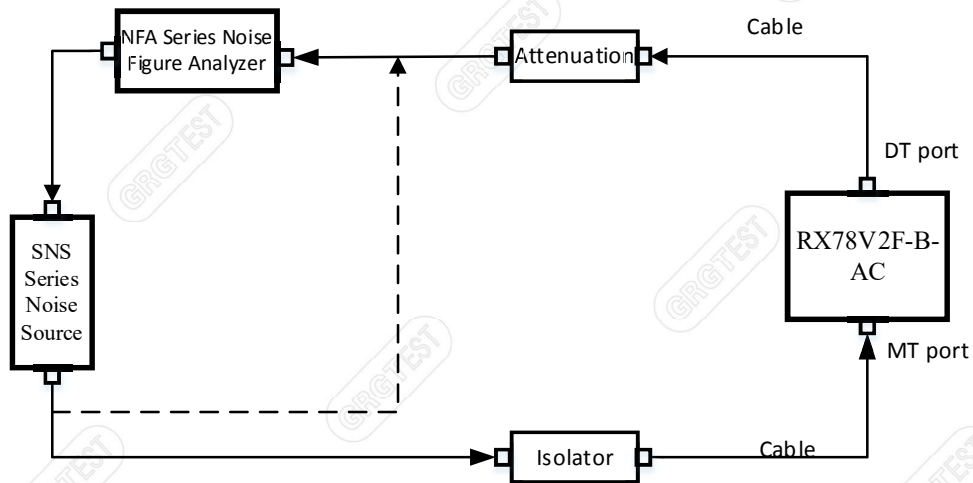


Figure 12.7-1 Downlink connection diagram

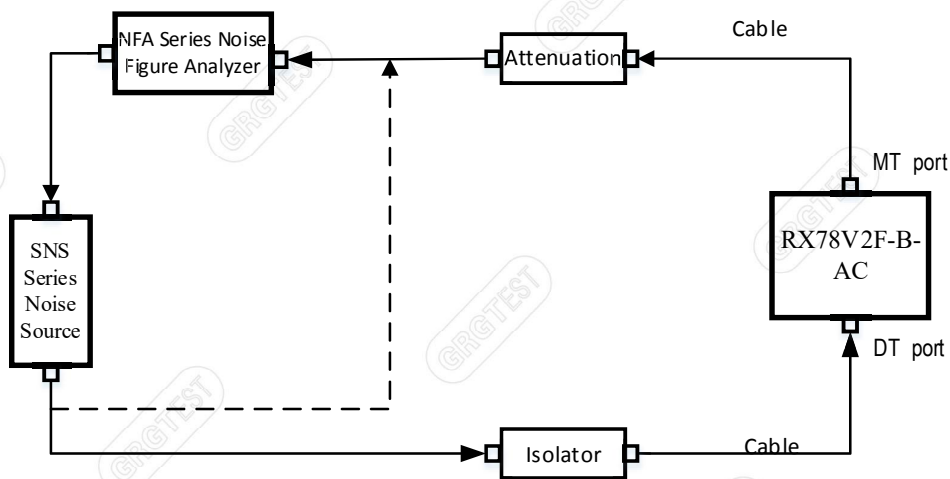


Figure 12.7-2 Uplink connection diagram

12.7.3. Test procedures

- (1) Connect the device as illustrated Figure, when the output power is over the maximum value of the Noise meter, add the attenuator to avoid destroying;
- (2) Set the EUT operating band and maximum gain;
- (3) Set the relevant parameters for 800MHz of device and connect the dotted line to calibrate;
- (4) After calibrating, according to the solid line connecting and testing Noise figure and record data;

----- The following blanks -----

## 12.7.4. Test results

Test Date (yy-mm-dd): 2024-05-18

Normal condition: Temp:25.8°C, Humid:51%, Atmospheric Pressure:101kpa

Supply Voltage: AC 110V, 50Hz

## 12.7.4.1. 800MHz Band(Downlink: 861MHz ~862MHz, Uplink: 816MHz ~ 817MHz)

Frequency(MHz)	Max. Limit (dB)	Noise figure data (dB)	Margin (dB)	Result
Downlink: 861~862	9.0	3.03	5.97	PASS
Uplink: 816~817	9.0	3.20	5.80	PASS

NOTE: Margin= specification limit - Noise figure data.


----- The following blanks -----



12.7.5. Test screenshot



Downlink: 861MHz~862MHz

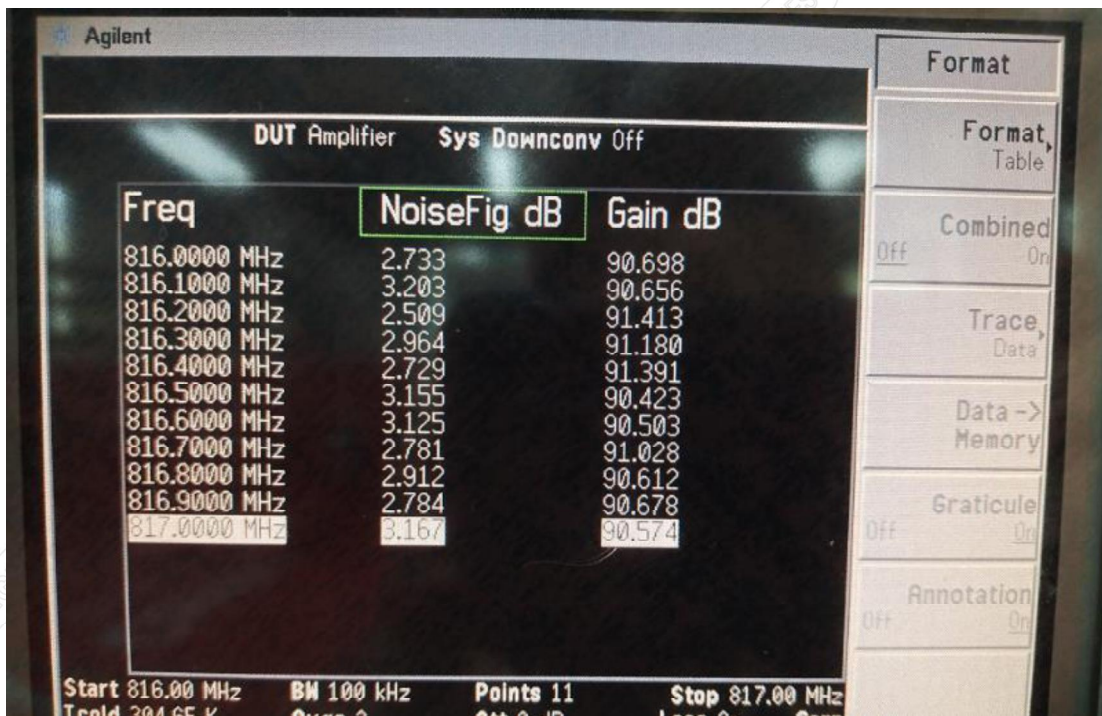

Uplink: 816MHz~817MHz

## 12.8. Out-of-band/out-of-block emissions

Test requirement: KDB 935210 D05 clause 4.7.2  
FCC PART 90.219 (d)(6)(i)  
FCC PART 90.219 (e)(3)

Test Method: KDB 935210 D05/4.7.1 and 4.7.2

### 12.8.1. Requirements

Refer to the applicable rule part(s) for specified limits on unwanted (out-of-band/out-of-block and spurious) emissions (e.g., Section 90.210).

Spurious emissions shall be measured using a single test signal sequentially tuned to the low, middle, and high channels or frequencies within each authorized frequency band of operation.

Intermodulation products shall be measured using two CW signals with all available channel spacings (e.g., 12.5 kHz and 6.25 kHz) with the center between these channels being equal to the center frequency  $f_0$  as determined from 4.3.

**NOTE**—Intermodulation-product spurious emission measurements are not required for single-channel boosters that cannot accommodate two simultaneous signals within the passband.

For a multi-channel enhancer, any intermodulation product level must be attenuated, relative to P, by at least:  $43 + 10 \cdot \log_{10} P$  is less stringent than 70dB, that limit was used.

Spurious emissions shall be measured using a single test signal sequentially tuned to the low, middle, and high channels or frequencies within each authorized frequency band of operation.

Out-of-band/out-of-block emissions (including intermodulation products) shall be measured under each of the following two stimulus conditions:

- a) two adjacent test signals sequentially tuned to the lower and upper frequency band/block edges;
- b) a single test signal, sequentially tuned to the lowest and highest frequencies or channels within the frequency band/block under examination.

**NOTE**—Single-channel boosters that cannot accommodate two simultaneous signals within the passband may be excluded from the test stipulated in step a).

----- The following blanks -----

## 12.8.2. Test configuration

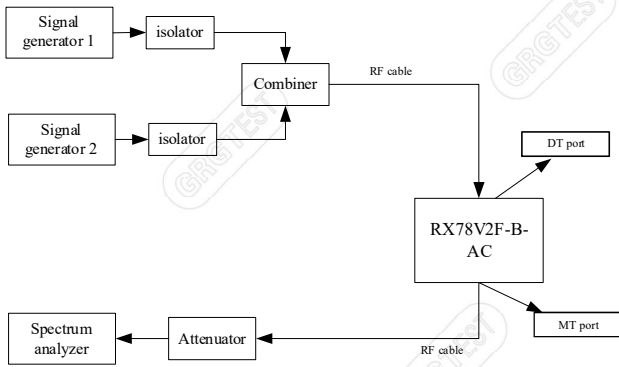


Figure 12.8-1 Downlink connection diagram

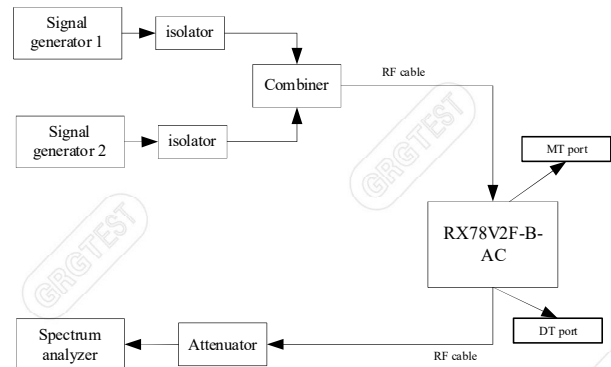


Figure 12.8-2 Uplink connection diagram

## 12.8.3. Test procedures

- a) Connect a signal generator to the input of the EUT.  
If the signal generator is not capable of producing two independent modulated carriers simultaneously, then two discrete signal generators can be connected, with an appropriate combining network to support the two-signal test.
- b) Configure the two signal generators to produce CW on frequencies spaced consistent with 4.7.1, with amplitude levels set to just below the AGC threshold (see 4.2). Set the signal generator amplitudes so that the power from each into the EUT is equivalent.
- c) Connect a spectrum analyzer to the EUT output.
- d) Set the span to 100 kHz.
- e) Set RBW = 300 Hz with  $VBW \geq 3 \times RBW$ .
- f) Set the detector to power averaging (rms).
- g) Place a marker on highest intermodulation product amplitude.
- h) Capture the plot for inclusion in the test report.
- i) Repeat steps c) to h) with the composite input power level set to 3 dB above the AGC threshold.
- j) Repeat steps b) to i) for all operational bands.

Any frequency outside the authorized bandwidth was attenuated by at least  $43+10*\log(P)$ dB. This corresponds to an absolute level of  $-13\text{dBm} - (43+10*\log(P_w))$ .

----- The following blanks -----

## 12.8.4. Test results

Test Date (yy-mm-dd): 2024-05-14

Normal condition: Temp:25.3°C, Humid: 42%, Atmospheric Pressure:101kpa

Supply Voltage: AC 110V, 50Hz

## 12.8.4.1. 800MHz Band(Downlink: 861MHz ~862MHz, Uplink: 816MHz ~ 817MHz)

## 12.8.4.1.1. Downlink Transmit

Test status	Test frequency	Intermodulation product Limit (dBm)	Max. intermodulation product (dBm)	Margin (dB)	Result
(1) Channel Bandwidth: 12.5kHz					
With the ALC threshold level	Low frequency: f1:861.00625MHz f2:861.01875MHz	-13.0	-21.4	8.4	PASS
	High frequency: f1:861.98125MHz f2:861.99375MHz	-13.0	-21.3	8.3	PASS
With the input signal amplitude set 3 dB above the AGC threshold	Low frequency: f1:861.00625MHz f2:861.01875MHz	-13.0	-21.5	8.5	PASS
	High frequency: f1:861.98125MHz f2:861.99375MHz	-13.0	-21.5	8.3	PASS
(2) Channel Bandwidth: 25kHz					
With the ALC threshold level	Low frequency: f1:861.0125MHz f2:861.0375MHz	-13.0	-16.4	3.4	PASS
	High frequency: f1:861.9625MHz f2:861.9875MHz	-13.0	-15.8	2.8	PASS
With the input signal amplitude set 3 dB above the AGC threshold	Low frequency: f1:861.0125MHz f2:861.0375MHz	-13.0	-15.8	2.8	PASS
	High frequency: f1:861.9625MHz f2:861.9875MHz	-13.0	-15.5	2.5	PASS
NOTE 1: Intermodulation products select the worst data record.					
NOTE 2: Margin= specification limit -Maximum mark level.					

## 12.8.4.1.2. Uplink Transmit


Test status	Test frequency	Intermodulation product Limit (dBm)	Max. intermodulation product (dBm)	Margin (dB)	Result
(1) Channel Bandwidth: 12.5kHz					
With the ALC threshold level	Low frequency: f1:816.00625MHz f2:816.01875MHz	-13.0	-22.2	9.2	PASS
	High frequency: f1:816.98125MHz f2:816.99375MHz	-13.0	-22.4	9.4	PASS
With the input signal amplitude set 3 dB above the AGC threshold	Low frequency: f1:816.00625MHz f2:816.01875MHz	-13.0	-22.0	9.0	PASS
	High frequency: f1:816.98125MHz f2:816.99375MHz	-13.0	-22.3	9.3	PASS
(2) Channel Bandwidth: 25kHz					
With the ALC threshold level	Low frequency: f1:816.0125MHz f2:816.0375MHz	-13.0	-23.6	10.6	PASS
	High frequency: f1:816.9625MHz f2:816.9875MHz	-13.0	-24.4	11.4	PASS
With the input signal amplitude set 3 dB above the AGC threshold	Low frequency: f1:816.0125MHz f2:816.0375MHz	-13.0	-23.2	10.2	PASS
	High frequency: f1:816.9625MHz f2:816.9875MHz	-13.0	-24.2	11.2	PASS
NOTE 1: Intermodulation products select the worst data record. NOTE 2: Margin= specification limit -Maximum mark level.					

----- The following blanks -----


12.8.5. Test screenshot

12.8.5.1. Channel bandwidth 12.5kHz


12.8.5.1.1. Downlink

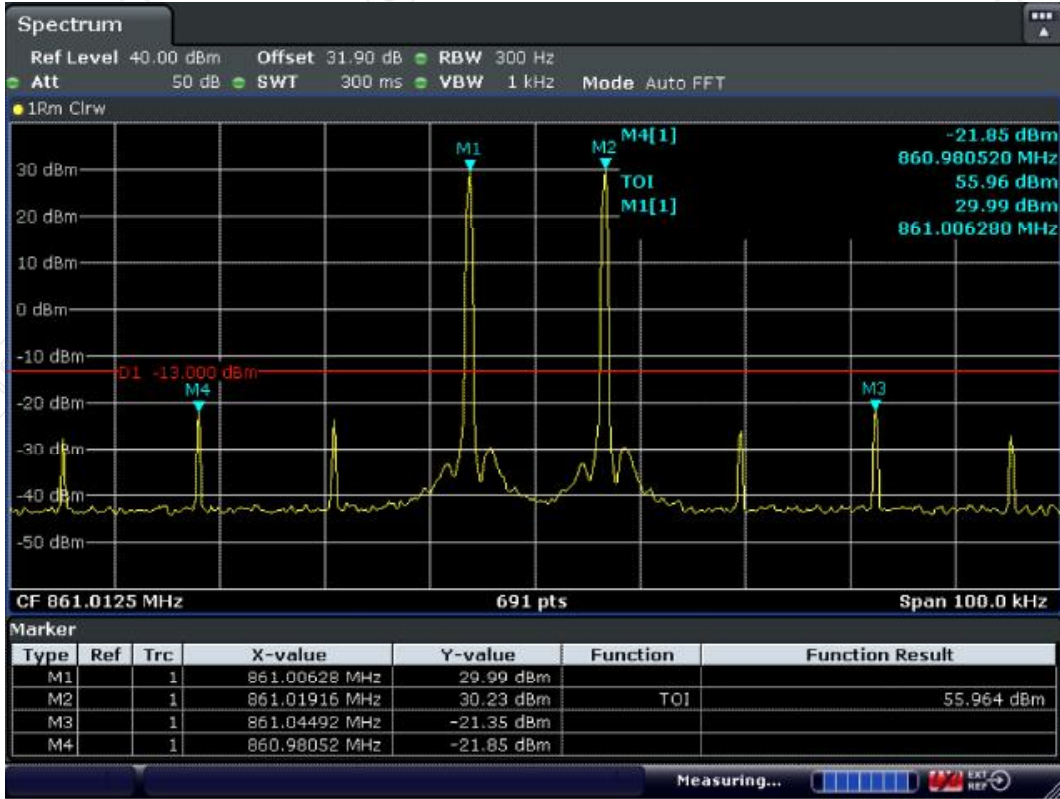


Low Frequency and with the ALC threshold level

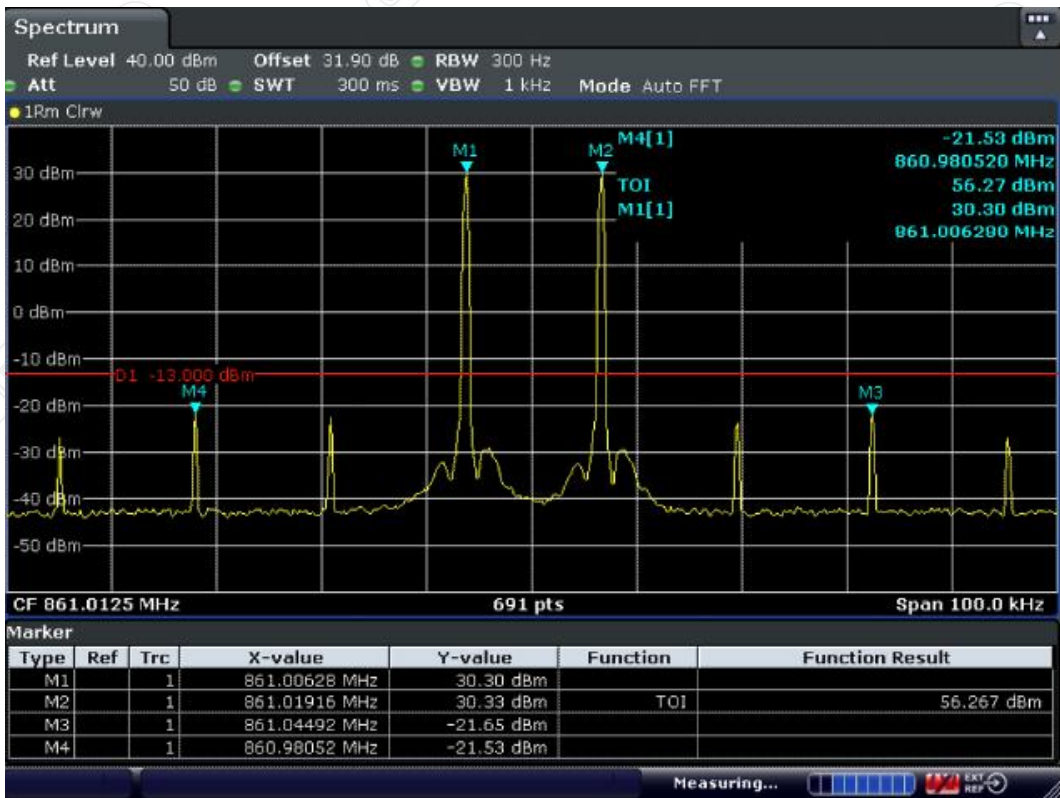

Low Frequency and with the input signal amplitude set 3 dB above the ALC threshold

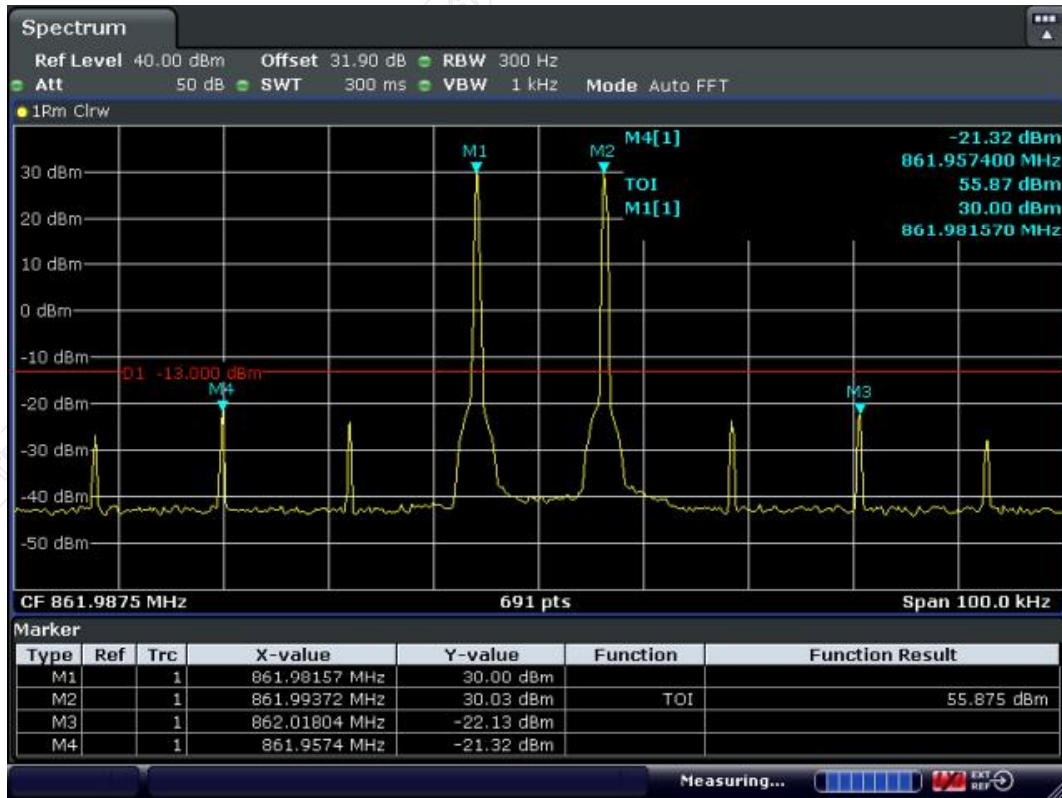

High Frequency and with the ALC threshold level

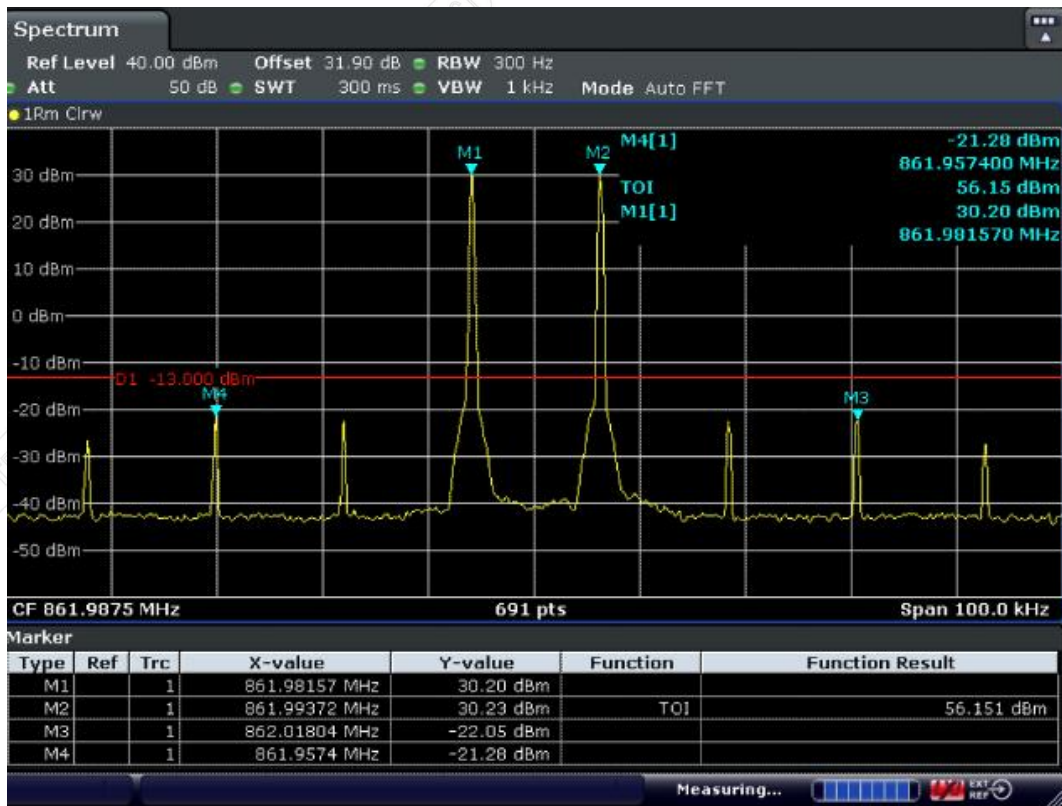

High Frequency and with the input signal amplitude set 3 dB above the ALC threshold