


## 18GHz - 27.5GHz

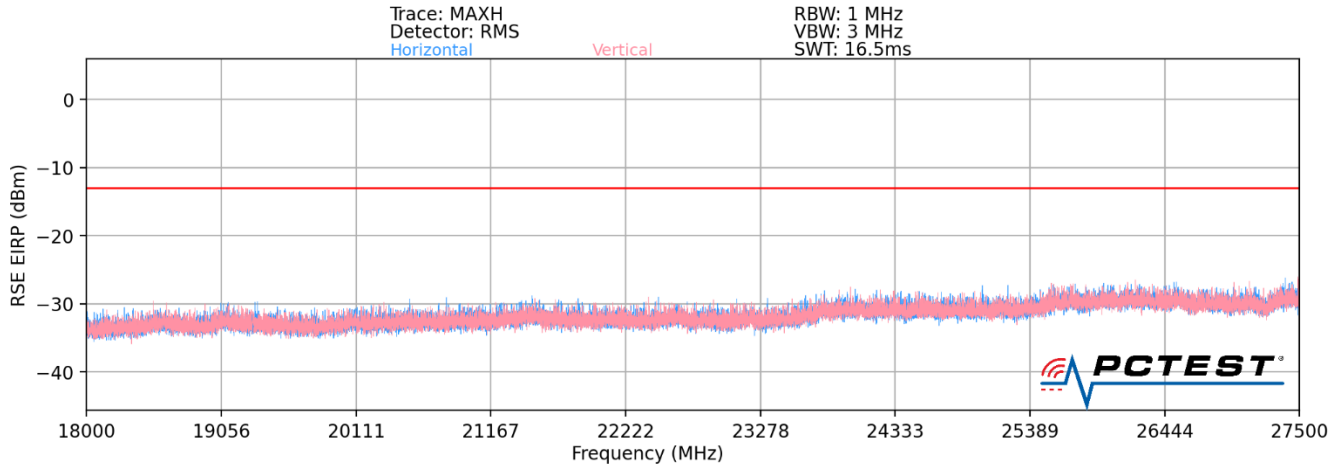

Plot 7-42. Ant 3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
27241.33	Low	50	V	QPSK	H	-	-	-36.01	-13.00	-23.01
27320.66	Mid	50	V	QPSK	H	-	-	-37.14	-13.00	-24.14
27252.00	High	50	V	QPSK	H	-	-	-37.11	-13.00	-24.11


Table 7-34. Ant 3 - DFT-s 2Tx -Spurious Emissions Table (18GHz - 27.5GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 67 of 152

## 28.35GHz - 40GHz

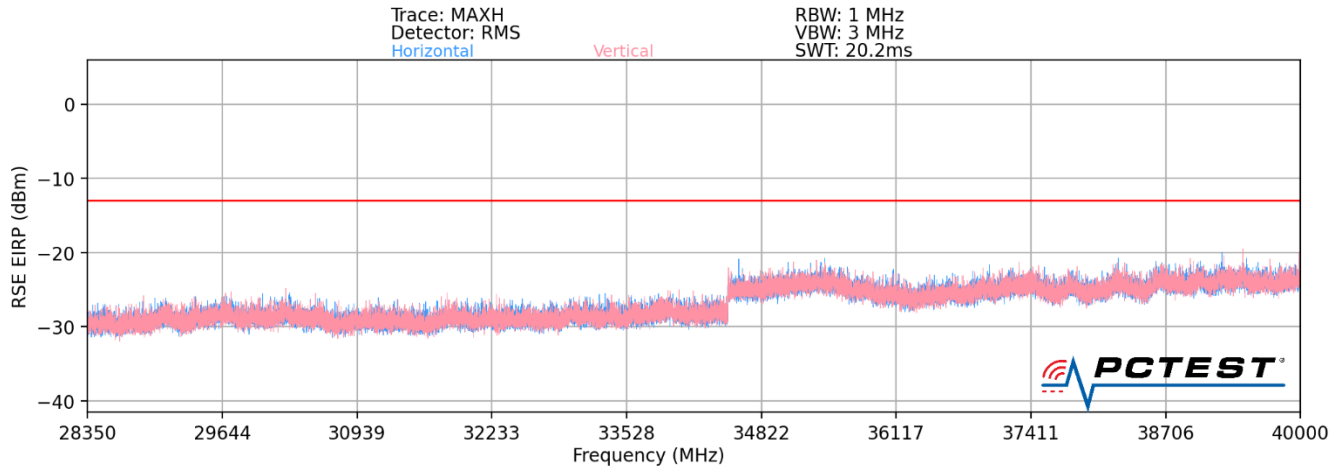

Plot 7-43. Ant 3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
28591.68	Low	50	V	QPSK	H	-	-	-36.84	-13.00	-23.84
26649.44	Mid	50	V	QPSK	H	-	-	-37.78	-13.00	-24.78
28674.46	High	50	V	QPSK	H	-	-	-37.87	-13.00	-24.87


Table 7-35. Ant 3 - DFT-s 2Tx -Spurious Emissions Table (28.35GHz - 40GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset	Page 68 of 152	

## 40GHz - 60GHz

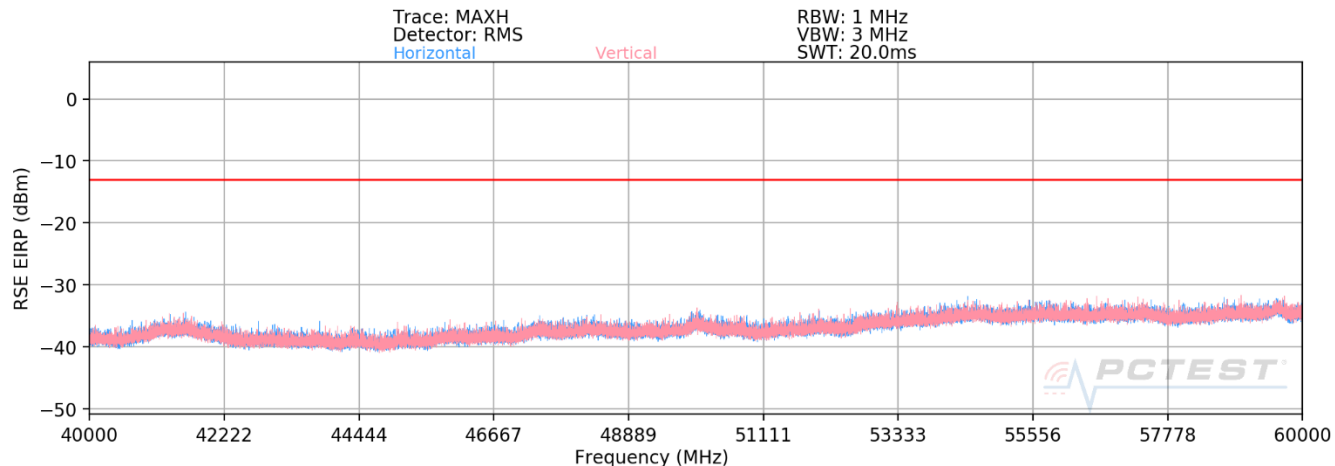

Plot 7-44. Ant 3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55050.80	Low	50	H	QPSK	H	198	148	-39.51	-13.00	-26.51
55850.97	Mid	50	H	QPSK	H	188	169	-38.64	-13.00	-25.64
56641.94	High	50	H	QPSK	H	201	154	-38.78	-13.00	-25.78


Table 7-36. Ant 3 - DFT-s 2Tx -Spurious Emissions Table (40GHz - 60GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 69 of 152

## 60GHz - 90GHz

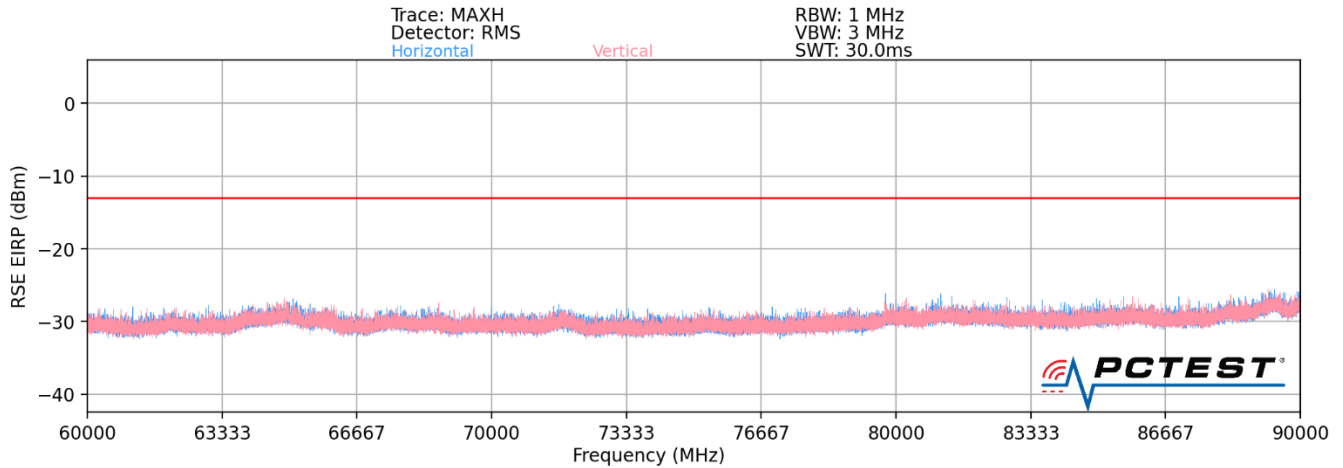

Plot 7-45. Ant 3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74835.00	Low	50	H	QPSK	H	-	-	-45.70	-13.00	-32.70
83776.46	Mid	50	V	QPSK	H	-	-	-44.71	-13.00	-31.71
84977.92	High	50	V	QPSK	H	-	-	-44.68	-13.00	-31.68


Table 7-37. Ant 3 - MIMO -Spurious Emissions Table (60GHz - 90GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset	Page 70 of 152	

## 90GHz - 100GHz

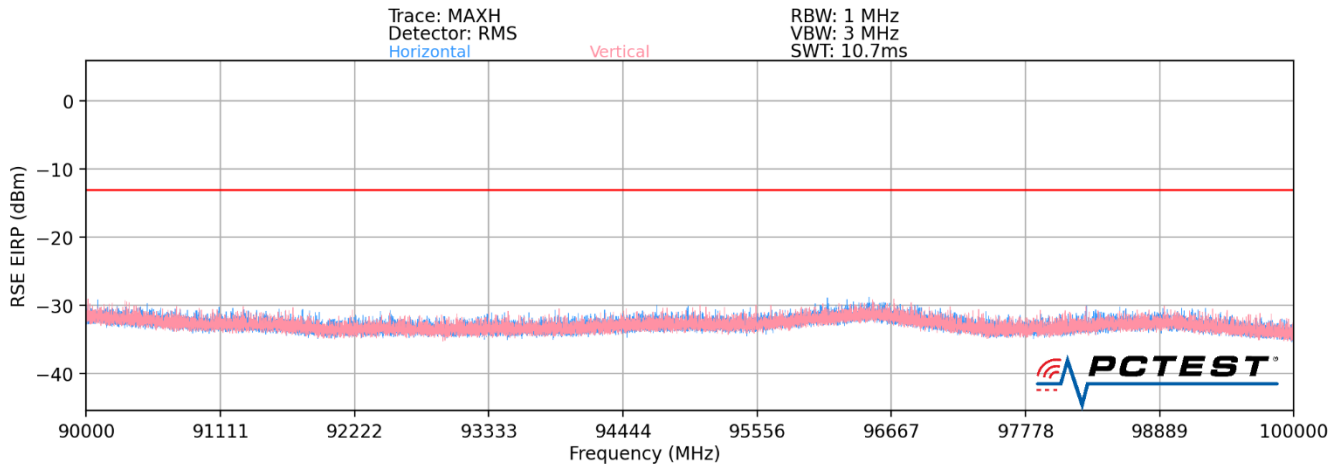

Plot 7-46. Ant 3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel DFT-s 2Tx – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
92435.00	Low	50	V	QPSK	H	-	-	-40.59	-13.00	-27.59
94568.33	Mid	50	V	QPSK	H	-	-	-45.08	-13.00	-32.08
99821.14	High	50	V	QPSK	H	-	-	-46.21	-13.00	-33.21

Table 7-38. Ant 3 – DFT-s 2Tx -Spurious Emissions Table (90GHz - 100GHz)


### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset	Page 71 of 152	

## Band n261 – Ant 4

### 30MHz - 1GHz

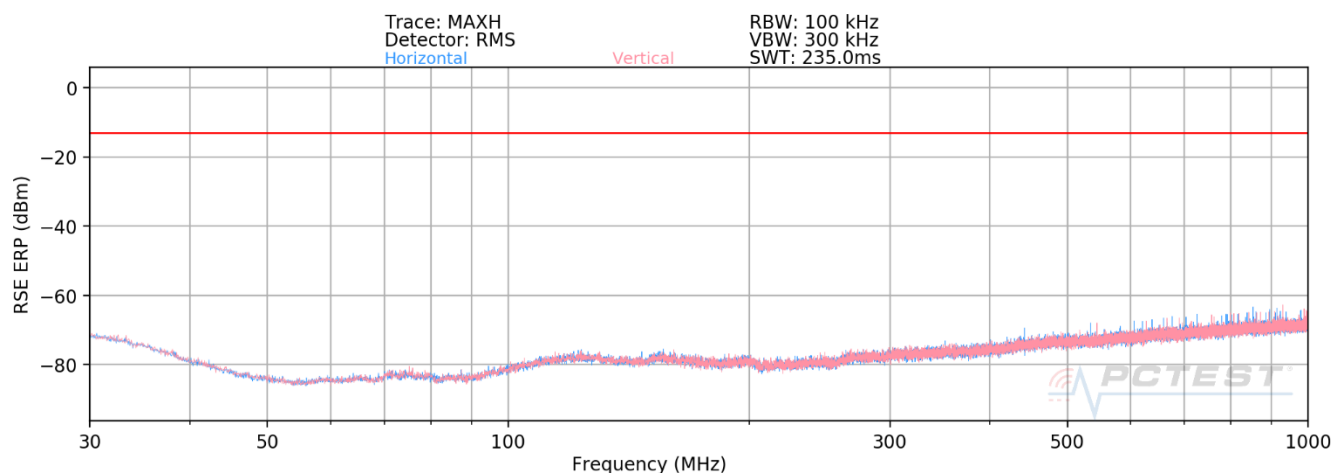

Plot 7-40. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
724.36	Low	50	H	QPSK	H	-	-	-70.42	-13.00	-57.42
659.47	Mid	50	H	QPSK	H	-	-	-75.33	-13.00	-62.33
902.42	High	50	H	QPSK	H	-	-	-69.54	-13.00	-56.54


Table 7-32. Ant 4 - MIMO -Spurious Emissions Table (30MHz - 1GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 72 of 152

## 1GHz - 18GHz

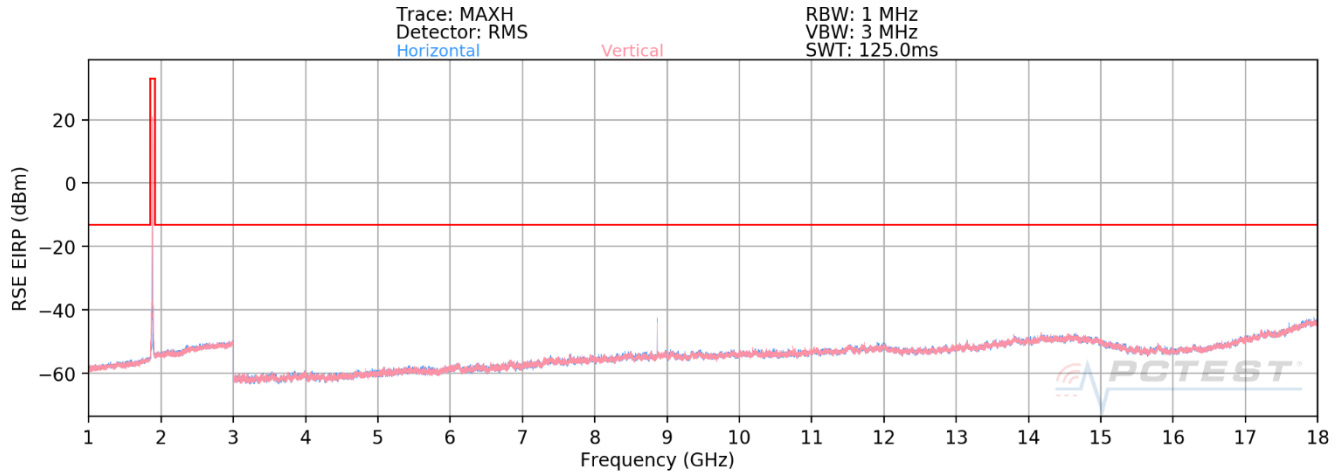

Plot 7-41. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8801.42	Low	50	H	QPSK	H	-	-	-45.41	-13.00	-32.41
9114.52	Mid	50	H	QPSK	H	163	251	-38.45	-13.00	-25.45
9006.39	High	50	H	QPSK	H	175	1	-39.21	-13.00	-26.21


Table 7-33. Ant 4 - MIMO -Spurious Emissions Table (1GHz - 18GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset	Page 73 of 152	

## 18GHz - 27.5GHz

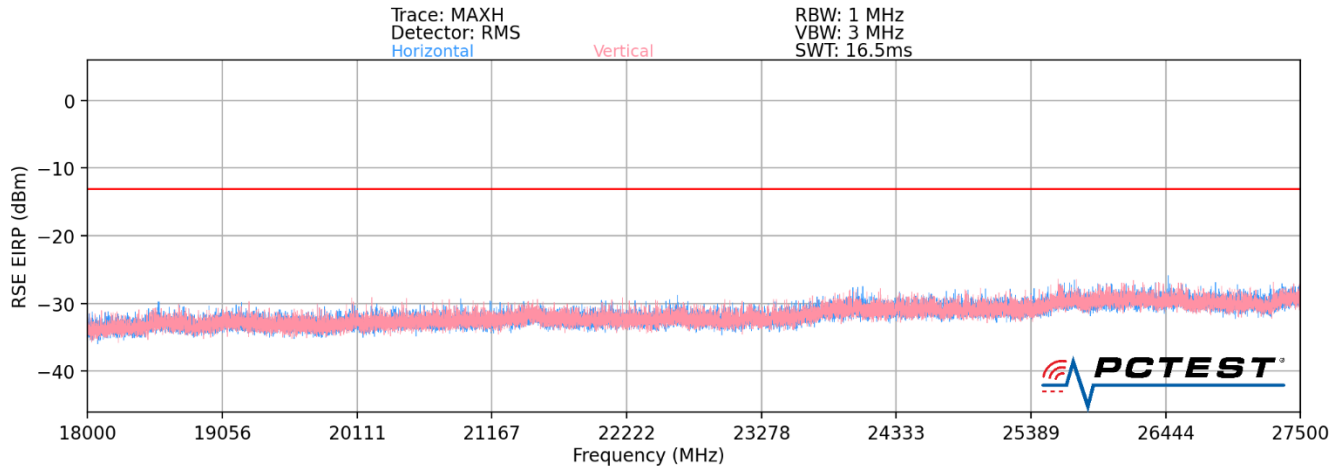

Plot 7-42. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

## Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
27242.33	Low	50	V	QPSK	H	-	-	-35.89	-13.00	-22.89
27321.66	Mid	50	V	QPSK	H	-	-	-36.48	-13.00	-23.48
27253.00	High	50	V	QPSK	H	-	-	-36.88	-13.00	-23.88

Table 7-34. Ant 4 - DFT-s 2Tx -Spurious Emissions Table (18GHz - 27.5GHz)


## Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 74 of 152



## 28.35GHz - 40GHz

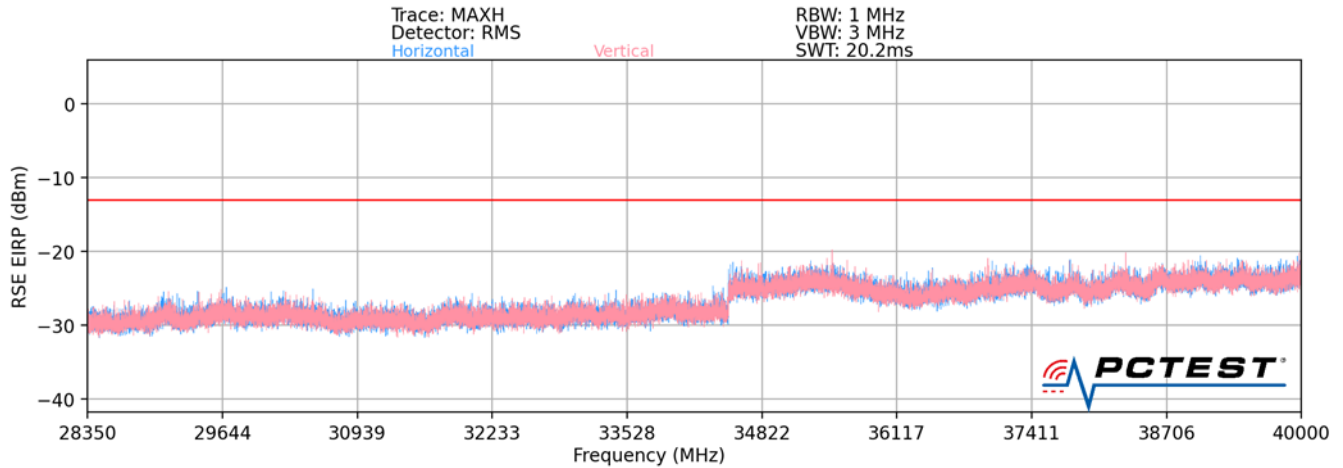

??

Plot 7-43. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
28600.24	Low	50	V	QPSK	H	-	-	-36.49	-13.00	-23.49
26651.23	Mid	50	V	QPSK	H	-	-	-37.98	-13.00	-24.98
28677.22	High	50	V	QPSK	H	-	-	-36.35	-13.00	-23.35


Table 7-35. Ant 4 - DFT-s 2Tx -Spurious Emissions Table (28.35GHz - 40GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 75 of 152

## 40GHz - 60GHz

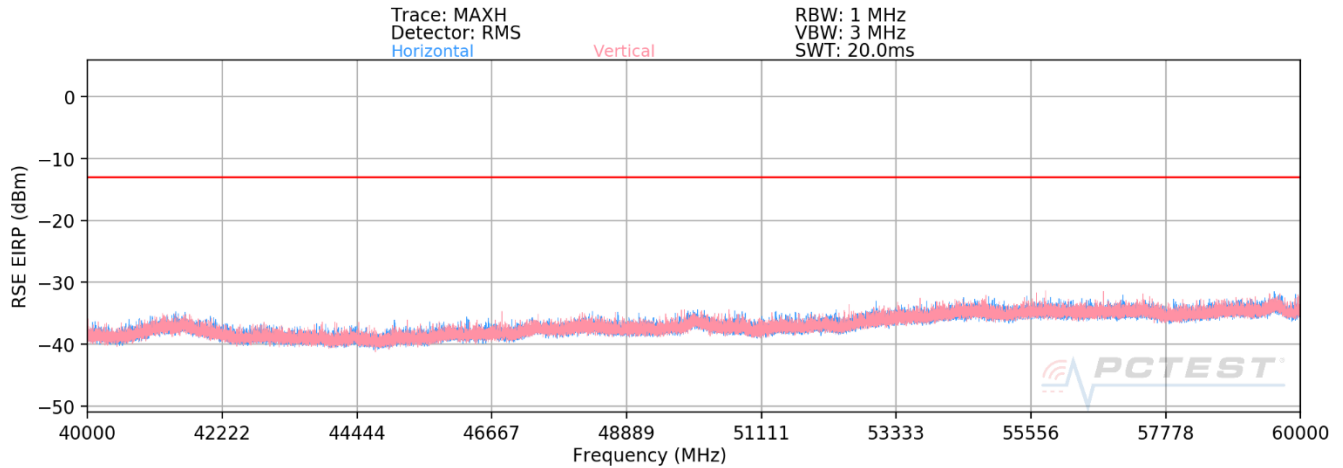

Plot 7-44. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55051.22	Low	50	H	QPSK	V	-	-	-42.26	-13.00	-29.26
55850.58	Mid	50	H	QPSK	V	-	-	-41.54	-13.00	-28.54
56650.38	High	50	H	QPSK	V	329	64	-42.36	-13.00	-29.36


Table 7-36. Ant 4 - DFT-s 2Tx -Spurious Emissions Table (40GHz - 60GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 76 of 152

## 60GHz - 90GHz

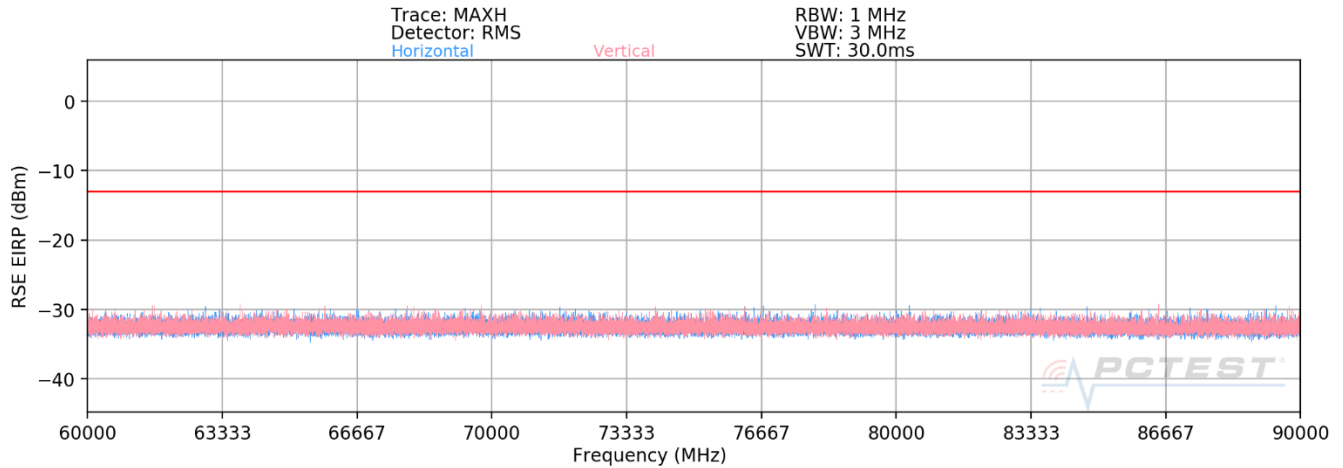

Plot 7-45. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74835.00	Low	50	H	QPSK	H	-	-	-43.90	-13.00	-30.90
83776.46	Mid	50	V	QPSK	H	-	-	-44.64	-13.00	-31.64
84977.92	High	50	V	QPSK	H	-	-	-44.46	-13.00	-31.46


Table 7-37. Ant 4 - MIMO -Spurious Emissions Table (60GHz - 90GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset	Page 77 of 152	

## 90GHz - 100GHz

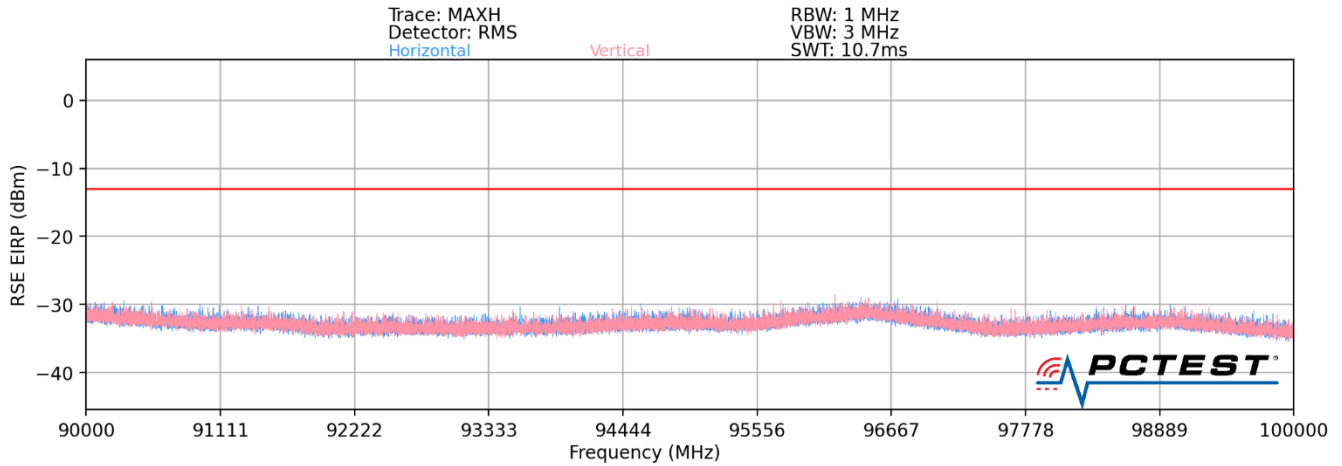

Plot 7-46. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel DFT-s 2Tx – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
94782.22	Low	50	H	QPSK	H	-	-	-41.00	-13.00	-28.00
95478.25	Mid	50	H	QPSK	H	-	-	-41.21	-13.00	-28.21
96211.63	High	50	H	QPSK	H	-	-	-40.70	-13.00	-27.70

Table 7-38. Ant 4 – DFT-s 2Tx -Spurious Emissions Table (90GHz - 100GHz)


### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 78 of 152

## Band n260- Ant 1

### 30MHz - 1GHz

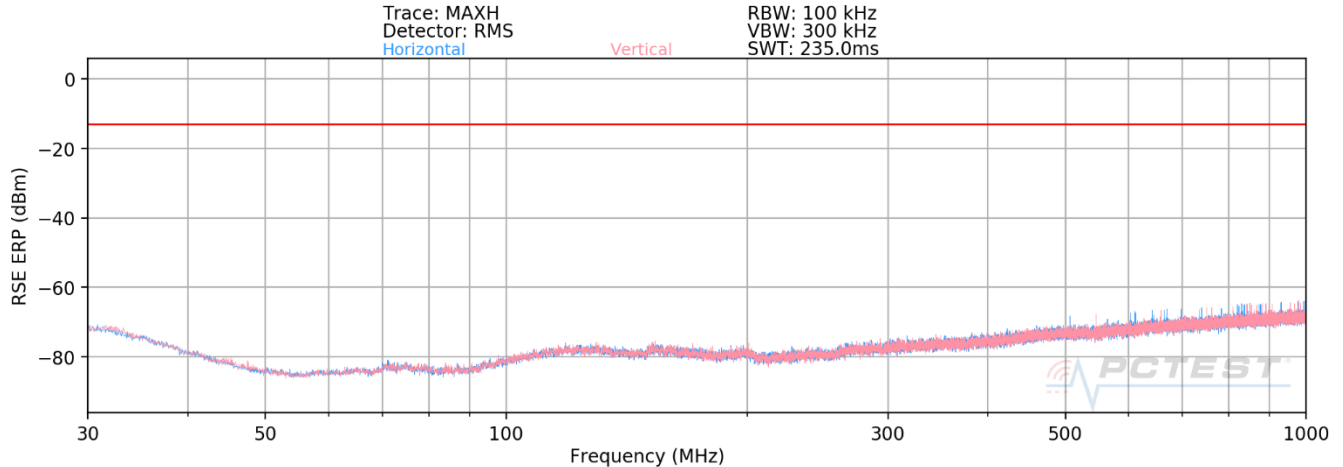

Plot 7-47. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
777.69	Low	50	H	QPSK	H	-	-	-71.55	-13.00	-58.55
624.58	Mid	50	H	QPSK	H	-	-	-72.24	-13.00	-59.24
870.14	High	50	H	QPSK	H	-	-	-71.04	-13.00	-58.04


Table 7-39. Ant 1 - SISO -Spurious Emissions Table (30MHz - 1GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 79 of 152

## 1GHz - 18GHz

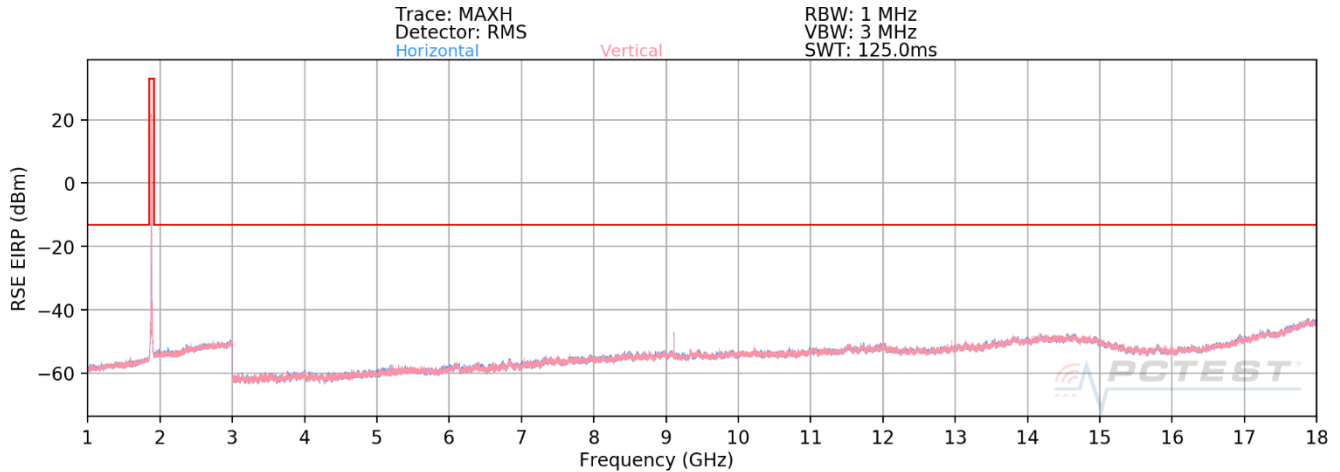

Plot 7-48. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
9089.65	Low	50	H	QPSK	H	149	116	-38.00	-13.00	-25.00
9111.76	Mid	50	H	QPSK	H	148	100	-36.03	-13.00	-23.03
9153.43	High	50	H	QPSK	H	167	252	-35.97	-13.00	-22.97


Table 7-40. Ant 1 - SISO -Spurious Emissions Table (1GHz - 18GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 80 of 152

## 18GHz – 37GHz

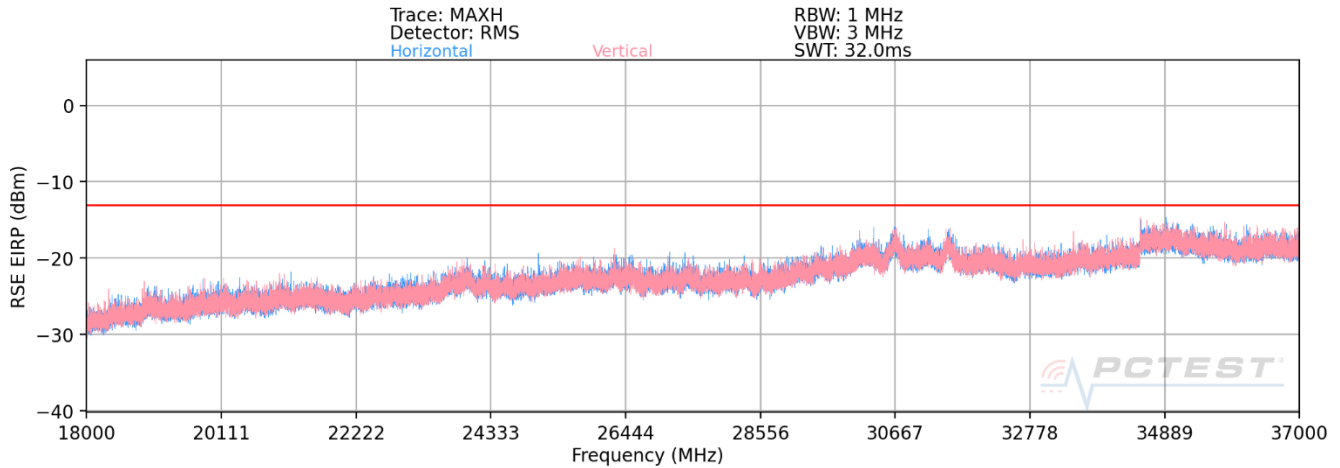

Plot 7-49. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log}(Dm) - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36563.50	Low	50	V	QPSK	V	362	283	-39.63	-13.00	-26.63
36696.85	Mid	50	V	QPSK	V	-	-	-39.38	-13.00	-26.38
31180.50	High	50	V	QPSK	V	-	-	-39.46	-13.00	-26.46


Table 7-41. Ant 1 - SISO -Spurious Emissions Table (18GHz – 37GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 81 of 152

## 40GHz - 60GHz

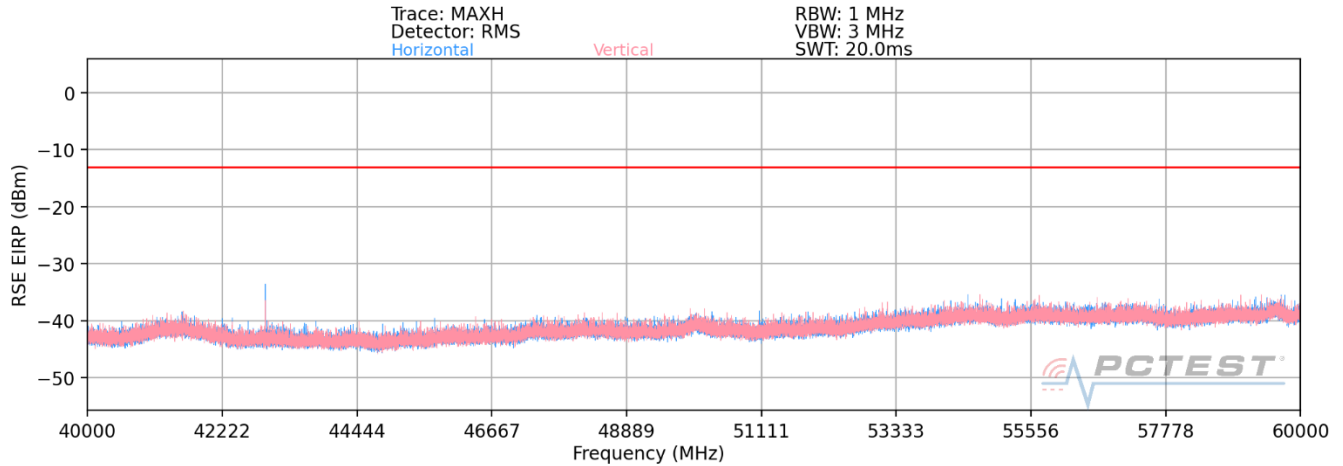

Plot 7-50. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42931.00	Low	50	H	QPSK	V	332	353	-38.26	-13.00	-25.26
44082.92	Mid	50	V	QPSK	V	252	8	-37.20	-13.00	-24.20
46233.50	High	50	V	QPSK	V	253	11	-39.57	-13.00	-26.57

Table 7-42. Ant 1 - SISO -Spurious Emissions Table (40GHz - 60GHz)


### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset	Page 82 of 152	



## 60GHz - 90GHz

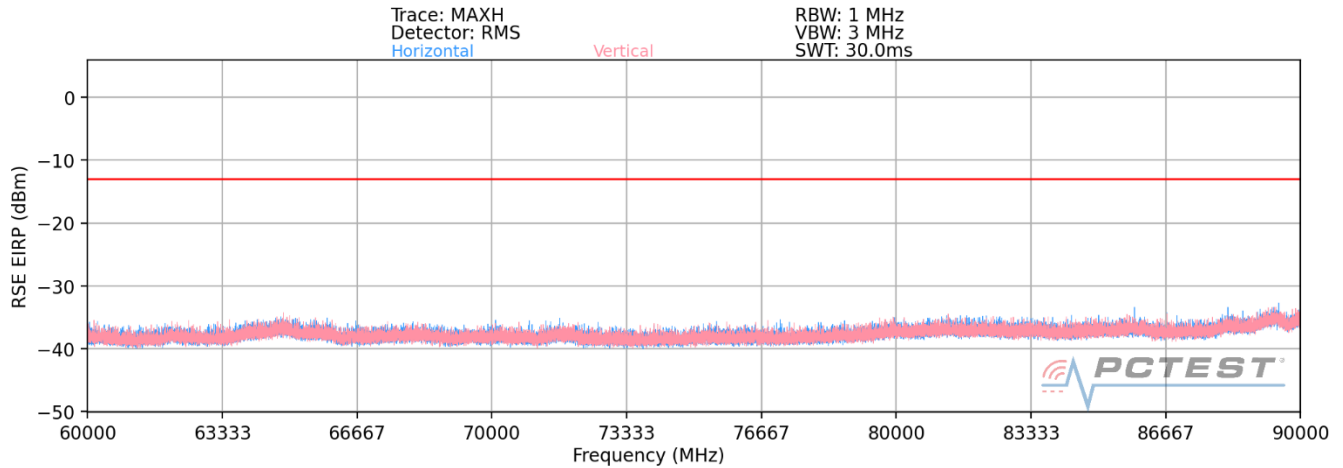

Plot 7-51. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74097.35	Low	50	V	QPSK	H	234	1	-30.06	-13.00	-17.06
76997.91	Mid	50	V	QPSK	H	235	1	-31.50	-13.00	-18.50
76543.00	High	50	V	QPSK	H	-	-	-44.01	-13.00	-31.01


Table 7-43. Ant 1 - SISO -Spurious Emissions Table (60GHz - 90GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2-PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 83 of 152

## 90GHz - 140GHz

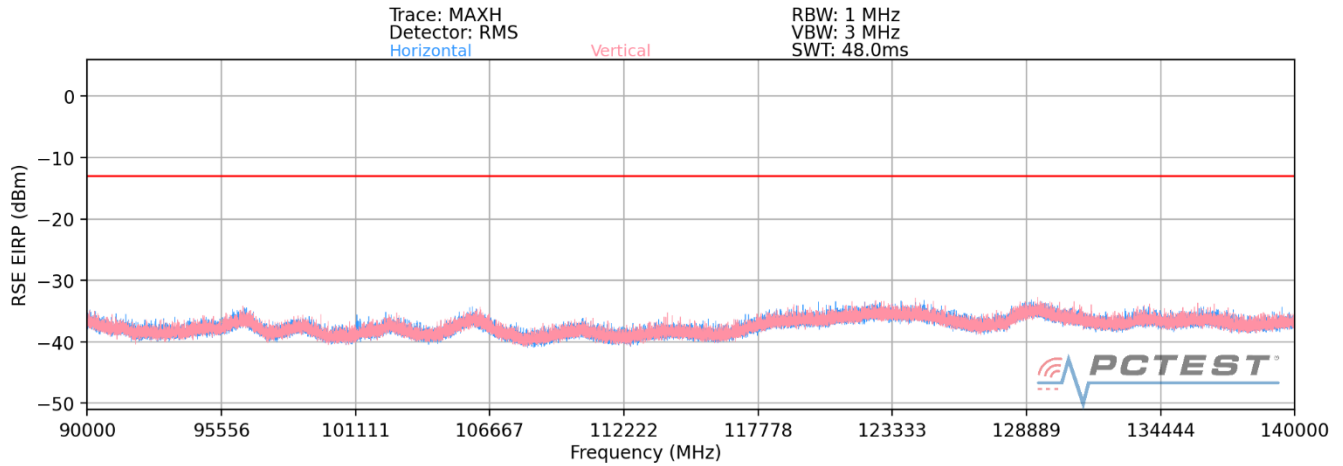

Plot 7-52. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111077.64	Low	50	V	QPSK	V	39	351	-38.82	-13.00	-25.82
115501.22	Mid	50	V	QPSK	V	61	9	-40.89	-13.00	-27.89
119926.53	High	50	V	QPSK	V	39	349	-37.13	-13.00	-24.13


Table 7-44. Ant 1 - SISO -Spurious Emissions Table (90GHz - 140GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 84 of 152

## 140GHz - 170GHz

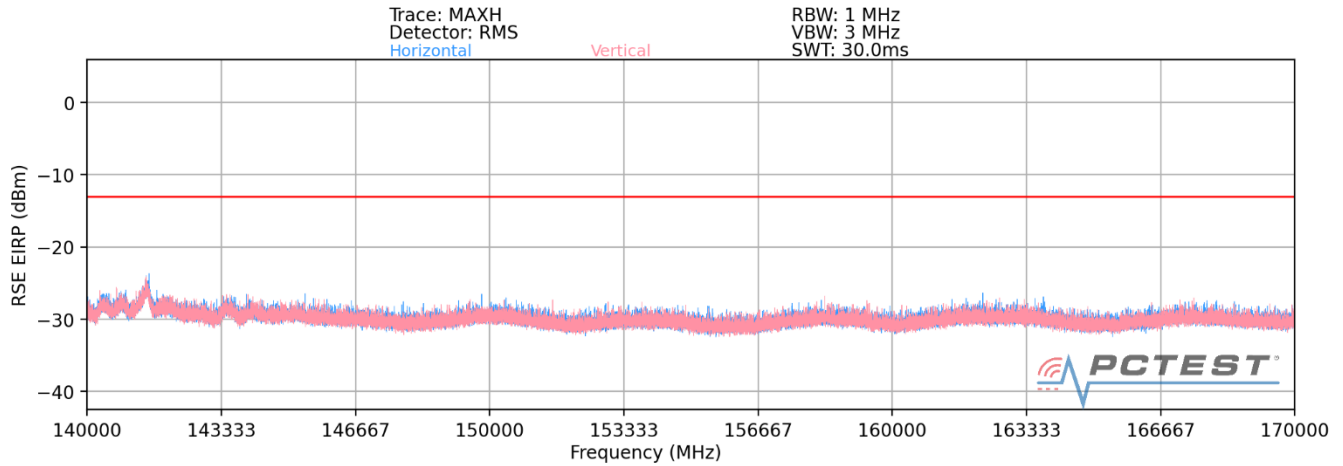

Plot 7-53. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
142122.35	Low	50	V	QPSK	V	-	-	-34.52	-13.00	-21.52
154001.28	Mid	50	V	QPSK	V	-	-	-33.65	-13.00	-20.65
159892.36	High	50	V	QPSK	V	-	-	-33.56	-13.00	-20.56


Table 7-45. Ant 1 - SISO -Spurious Emissions Table (140GHz - 170GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 85 of 152

## 170GHz - 200GHz

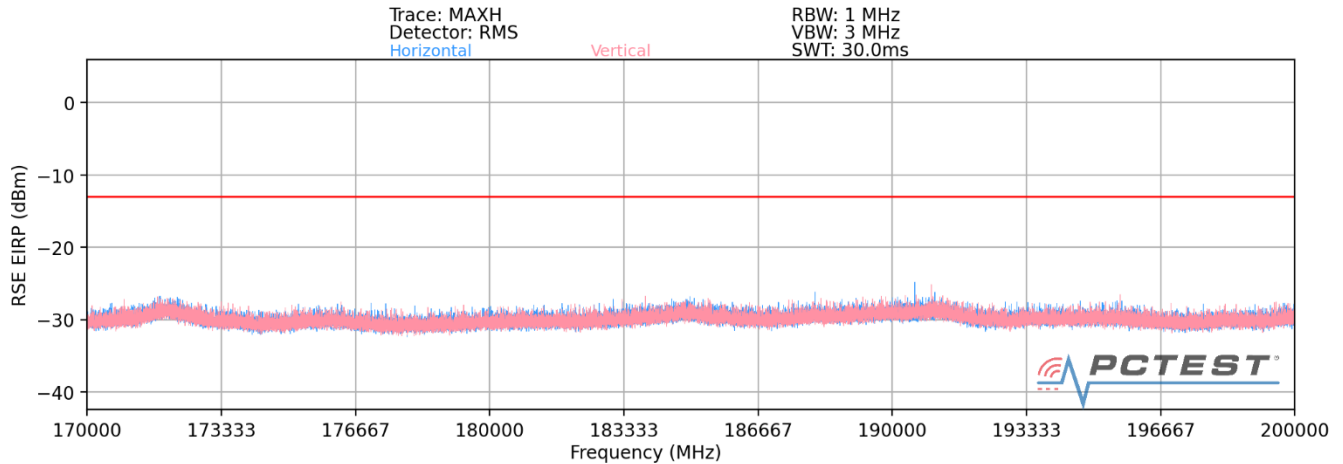

Plot 7-54. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
190872.30	Low	50	V	QPSK	V	-	-	-33.64	-13.00	-20.64
190873.41	Mid	50	V	QPSK	V	-	-	-32.47	-13.00	-19.47
184444.66	High	50	V	QPSK	V	-	-	-33.69	-13.00	-20.69

Table 7-46. Ant 1 - SISO -Spurious Emissions Table (170GHz - 200GHz)


### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 86 of 152

## Band n260- Ant 2

### 30MHz - 1GHz

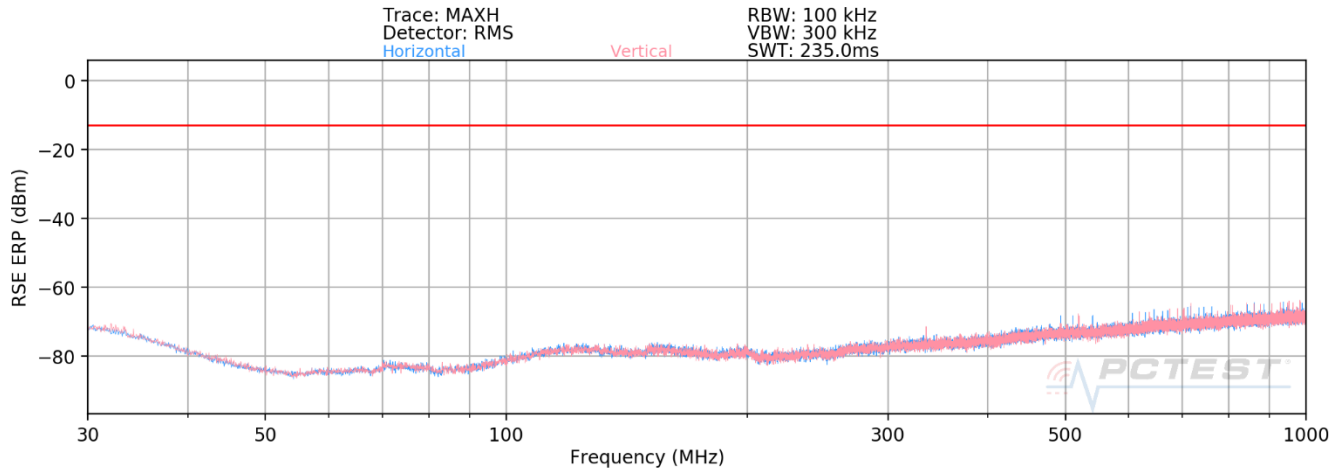

Plot 7-55. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
842.14	Low	50	H	QPSK	H	-	-	-70.42	-13.00	-57.42
556.24	Mid	50	H	QPSK	H	-	-	-72.01	-13.00	-59.01
891.67	High	50	H	QPSK	H	-	-	-70.41	-13.00	-57.41


Table 7-47. Ant 2 - SISO -Spurious Emissions Table (30MHz - 1GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 87 of 152

## 1GHz - 18GHz

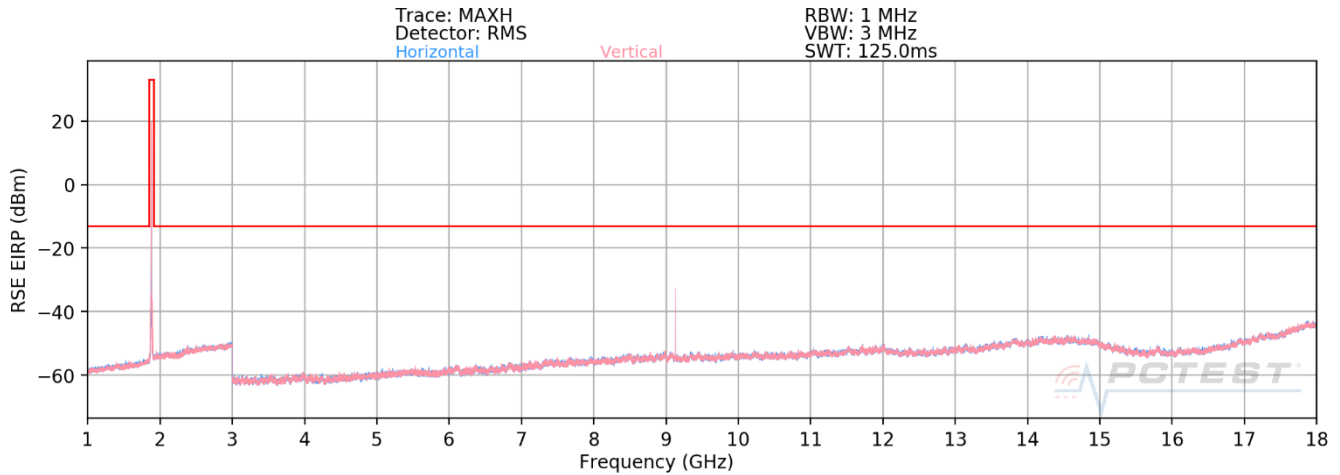

Plot 7-56. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8812.31	Low	50	H	QPSK	H	168	255	-45.40	-13.00	-32.40
9300.70	Mid	50	H	QPSK	H	196	222	-46.23	-13.00	-33.23
8971.76	High	50	H	QPSK	H	152	267	-45.27	-13.00	-32.27


Table 7-48. Ant 2 - SISO -Spurious Emissions Table (1GHz - 18GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 88 of 152

## 18GHz – 37GHz

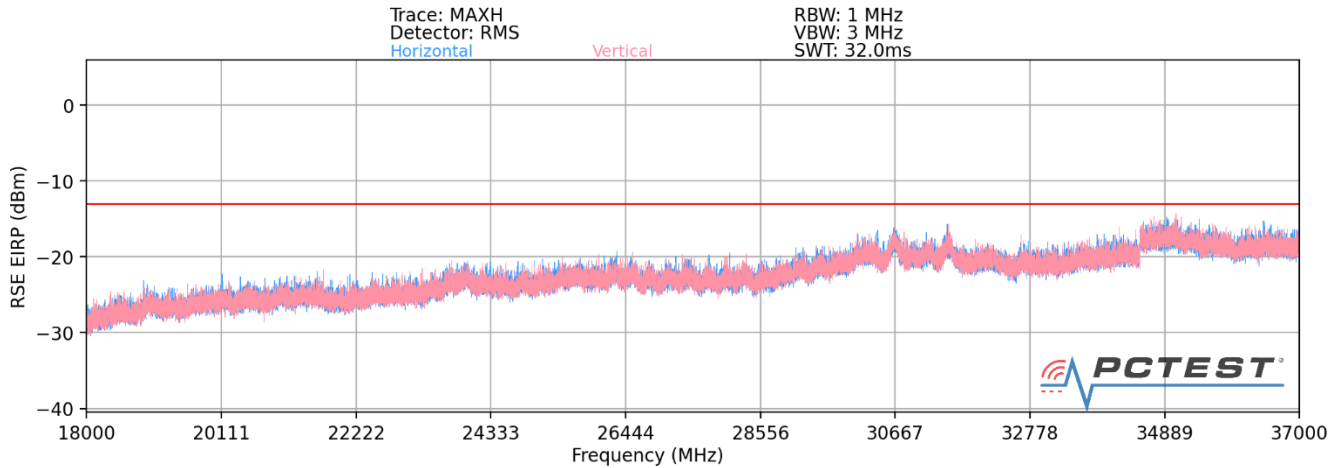

Plot 7-57. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36847.11	Low	50	H	QPSK	V	-	-	-32.11	-13.00	-19.11
36954.20	Mid	50	V	QPSK	V	-	-	-32.01	-13.00	-19.01
36870.60	High	50	V	QPSK	V	284	349	-30.16	-13.00	-17.16


Table 7-49. Ant 2 - SISO -Spurious Emissions Table (18GHz – 37GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 89 of 152

## 40GHz - 60GHz

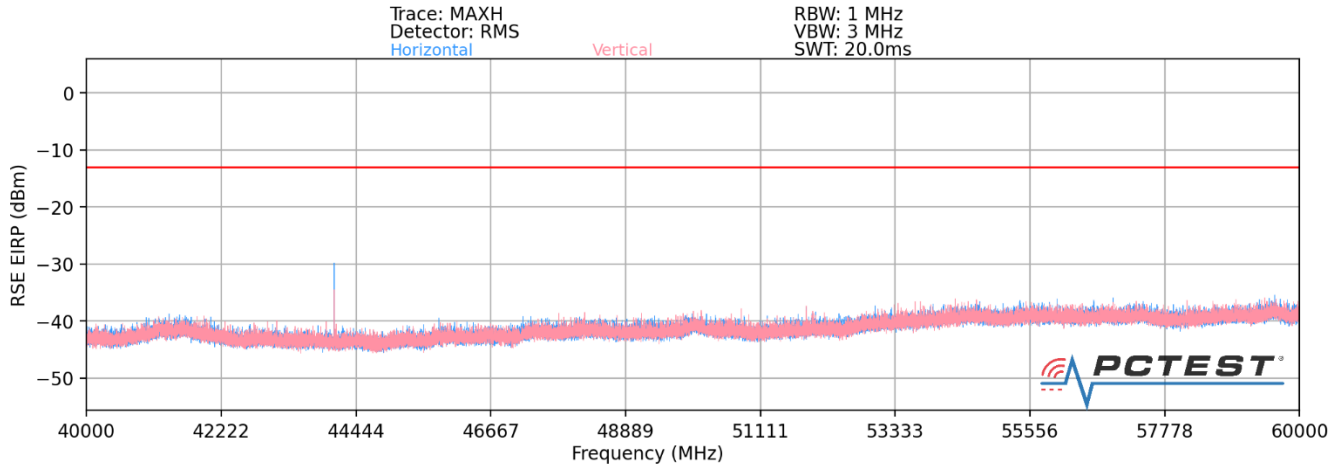

Plot 7-58. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42931.10	Low	50	V	QPSK	H	72	7	-33.67	-13.00	-20.67
44083.10	Mid	50	V	QPSK	H	72	356	-32.94	-13.00	-19.94
46233.45	High	50	V	QPSK	H	73	11	-36.27	-13.00	-23.27

Table 7-50. Ant 2 - SISO -Spurious Emissions Table (40GHz - 60GHz)


### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset	Page 90 of 152	



## 60GHz - 90GHz

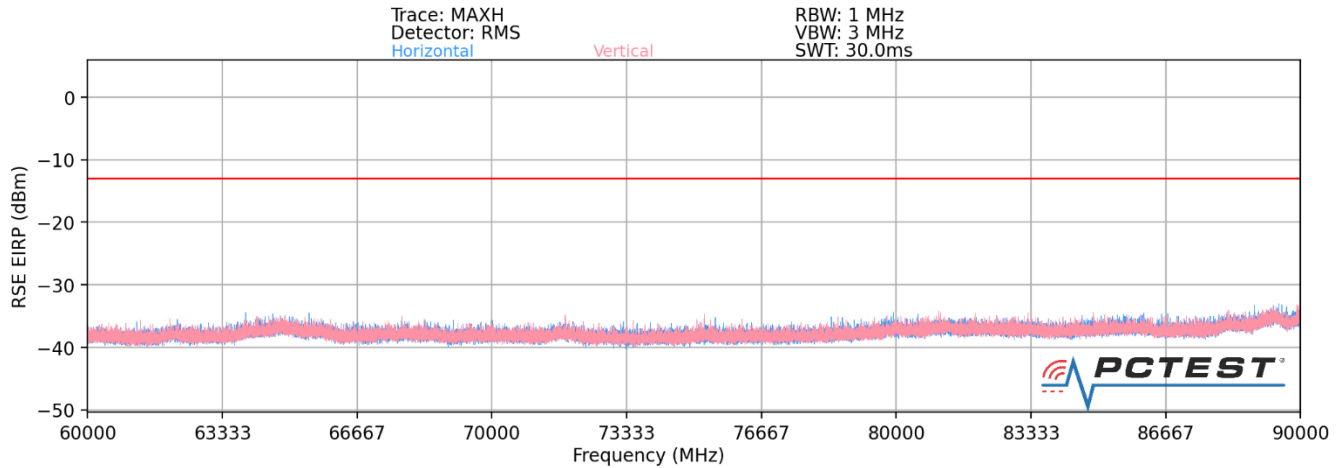

Plot 7-34. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
44082.92	Mid	50	V	QPSK	V	252	8	-37.20	-13.00	-24.20
46233.50	High	50	V	QPSK	V	253	11	-39.57	-13.00	-26.57


Table 7-51. Ant 2 - SISO -Spurious Emissions Table (60GHz - 90GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2-PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset	Page 91 of 152	

## 90GHz - 140GHz

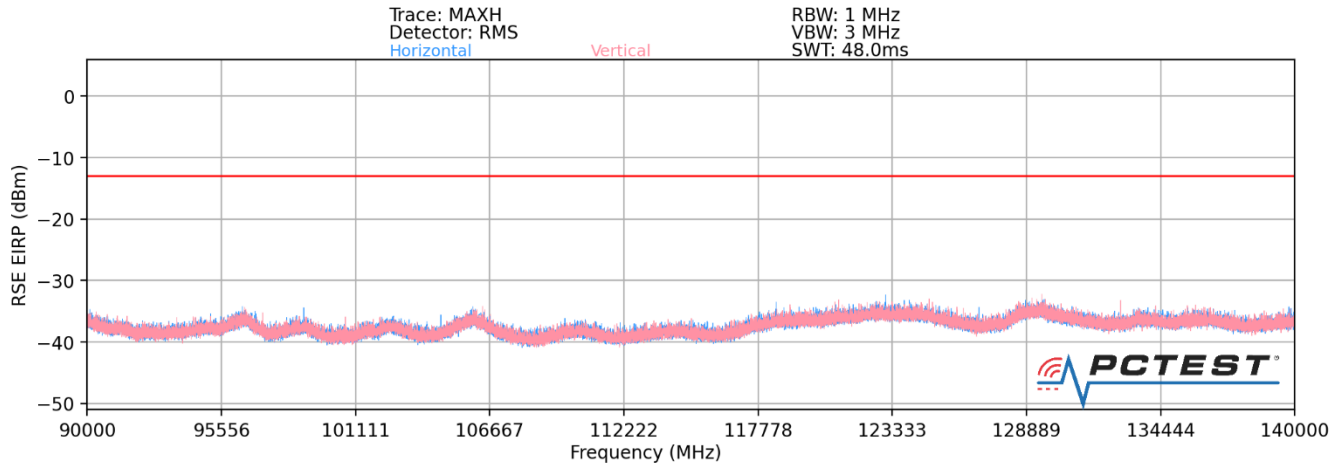

Plot 7-60. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111076.62	Low	50	V	QPSK	H	271	359	-37.64	-13.00	-24.64
115501.19	Mid	50	V	QPSK	H	277	1	-33.25	-13.00	-20.25
119926.89	High	50	V	QPSK	H	268	12	-38.08	-13.00	-25.08


Table 7-52. Ant2 - SISO -Spurious Emissions Table (90GHz - 140GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 92 of 152

## 140GHz - 170GHz

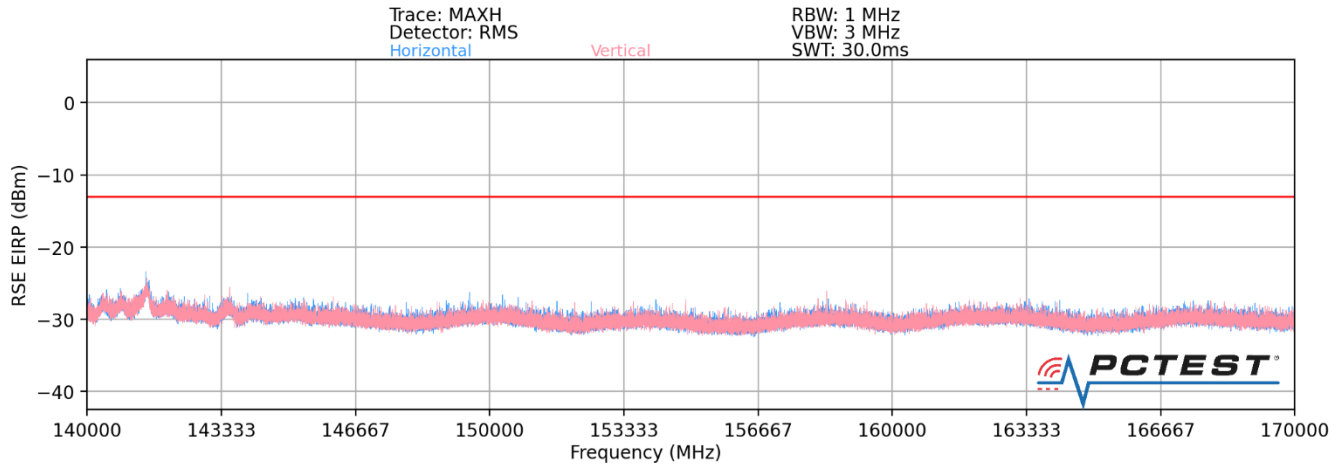

Plot 7-61. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
142052.60	Low	50	V	QPSK	H	-	-	-34.52	-13.00	-21.52
153998.24	Mid	50	V	QPSK	H	-	-	-34.65	-13.00	-21.65
159889.95	High	50	V	QPSK	H	-	-	-34.33	-13.00	-21.33


Table 7-53. Ant 2 - SISO -Spurious Emissions Table (140GHz - 170GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset	Page 93 of 152	

## 170GHz - 200GHz

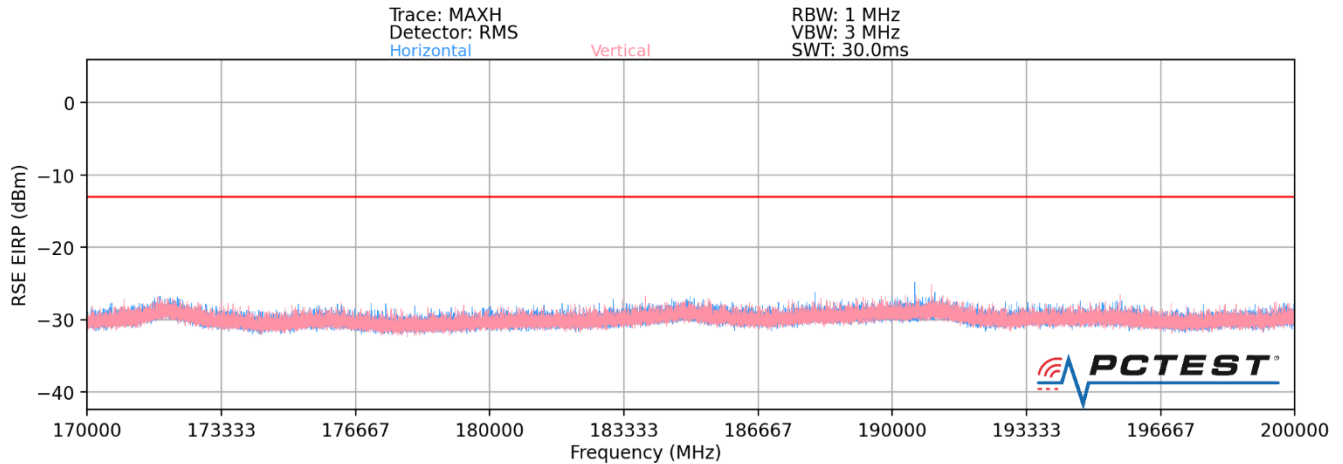

Plot 7-62. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
190873.10	Low	50	V	QPSK	H	-	-	-33.05	-13.00	-20.05
171829.57	Mid	50	V	QPSK	H	-	-	-33.14	-13.00	-20.14
184462.52	High	50	V	QPSK	H	-	-	-34.25	-13.00	-21.25

Table 7-54. Ant 2 - SISO -Spurious Emissions Table (170GHz - 200GHz)


### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 94 of 152

## Band n260- Ant 3

### 30MHz - 1GHz

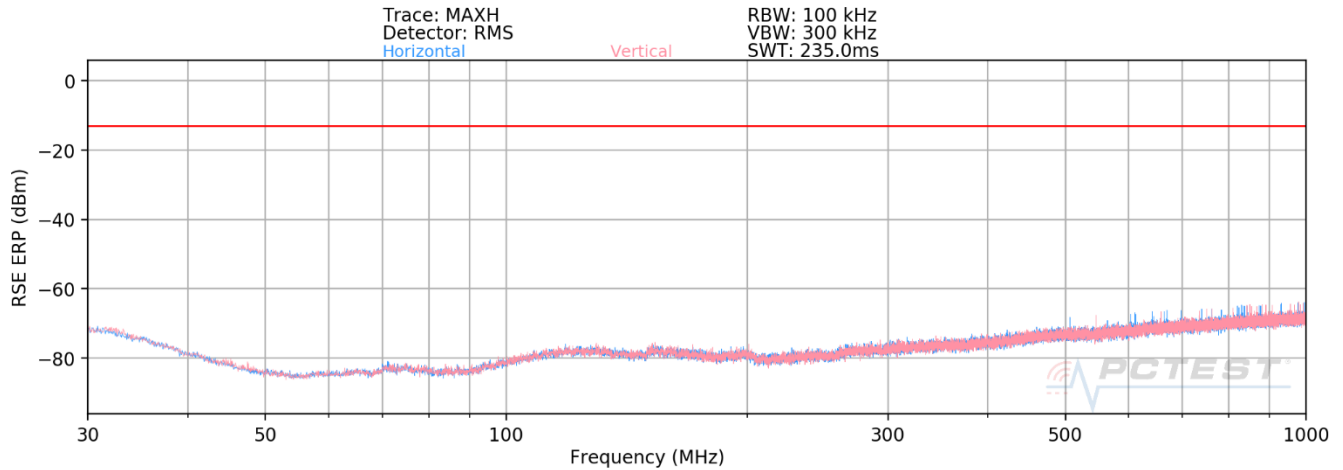

Plot 7-55. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
476.65	Low	50	H	QPSK	H	-	-	-71.42	-13.00	-58.42
657.22	Mid	50	H	QPSK	H	-	-	-71.68	-13.00	-58.68
928.34	High	50	H	QPSK	H	-	-	-71.14	-13.00	-58.14


Table 7-47. Ant 3 - SISO -Spurious Emissions Table (30MHz - 1GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 95 of 152

## 1GHz - 18GHz

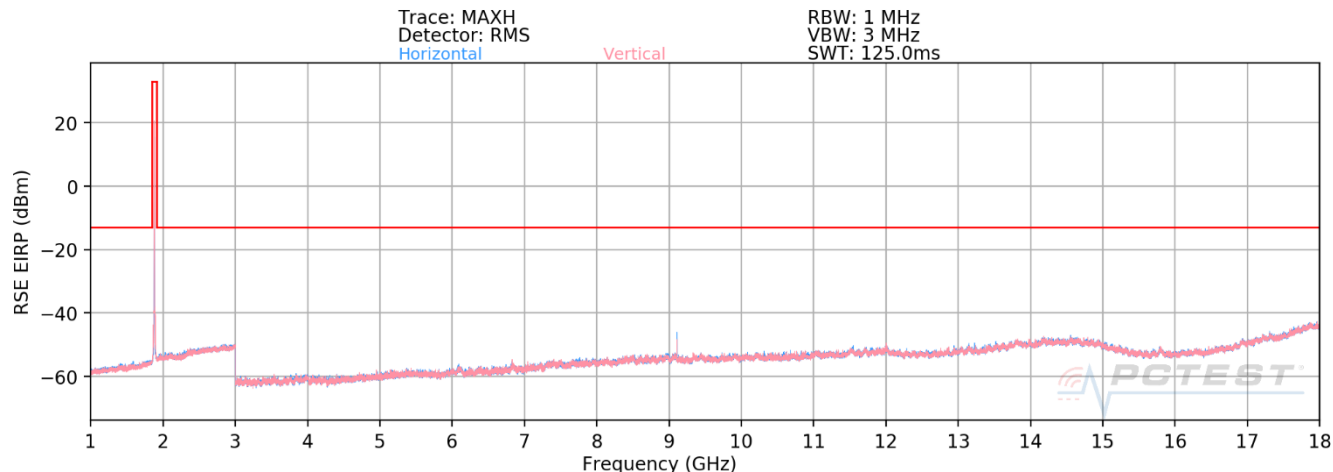

Plot 7-56. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8810.24	Low	50	H	QPSK	H	141	217	-44.24	-13.00	-31.24
9299.66	Mid	50	H	QPSK	H	174	226	-45.00	-13.00	-32.00
8970.45	High	50	H	QPSK	H	168	231	-46.20	-13.00	-33.20


Table 7-48. Ant 3 - SISO -Spurious Emissions Table (1GHz - 18GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset	Page 96 of 152	

## 18GHz – 37GHz

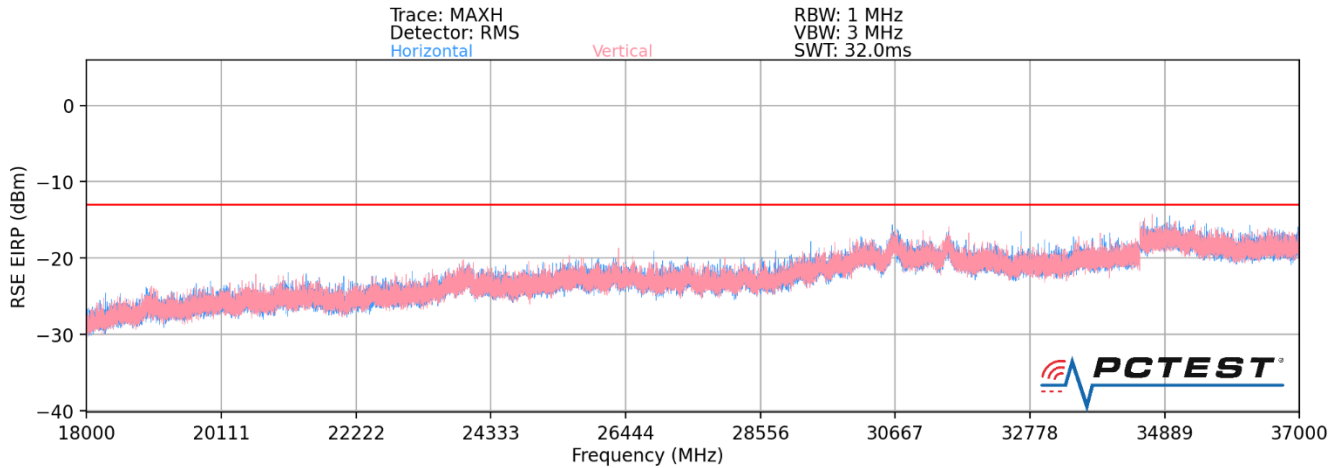

Plot 7-57. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36892.52	Low	50	V	QPSK	H	-	-	-32.82	-13.00	-19.82
36857.30	Mid	50	V	QPSK	H	-	-	-32.56	-13.00	-19.56
36469.33	High	50	V	QPSK	H	-	-	-33.01	-13.00	-20.01


Table 7-49. Ant 3 - SISO -Spurious Emissions Table (18GHz – 37GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 97 of 152

## 40GHz - 60GHz

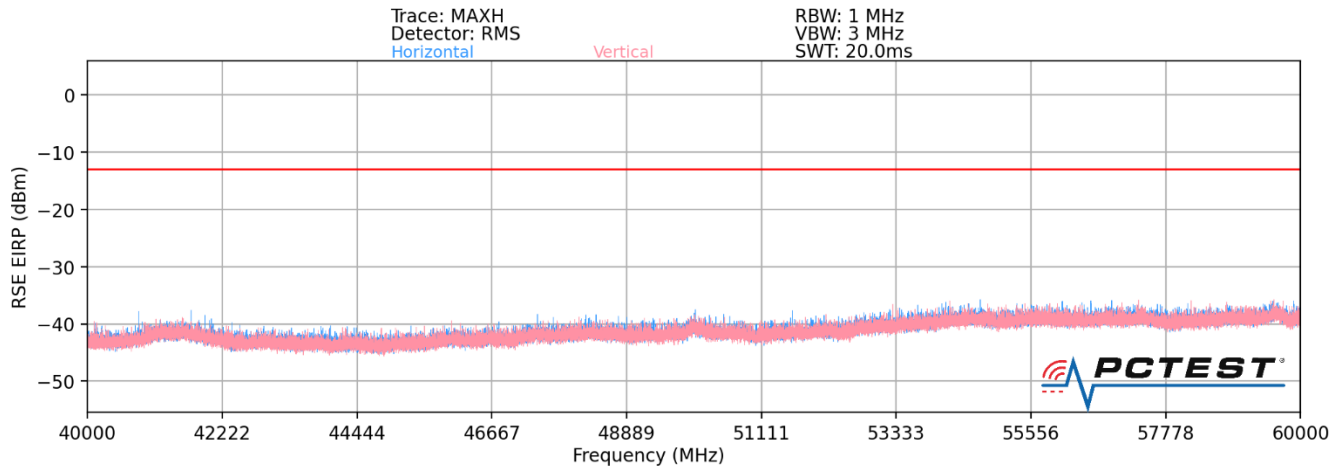

Plot 7-58. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42915.36	Low	50	V	QPSK	H	-	-	-43.72	-13.00	-30.72
44682.66	Mid	50	V	QPSK	H	-	-	-42.91	-13.00	-29.91
46148.54	High	50	V	QPSK	H	-	-	-43.25	-13.00	-30.25

Table 7-50. Ant 3 - SISO -Spurious Emissions Table (40GHz - 60GHz)


## Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset	Page 98 of 152	



## 60GHz - 90GHz

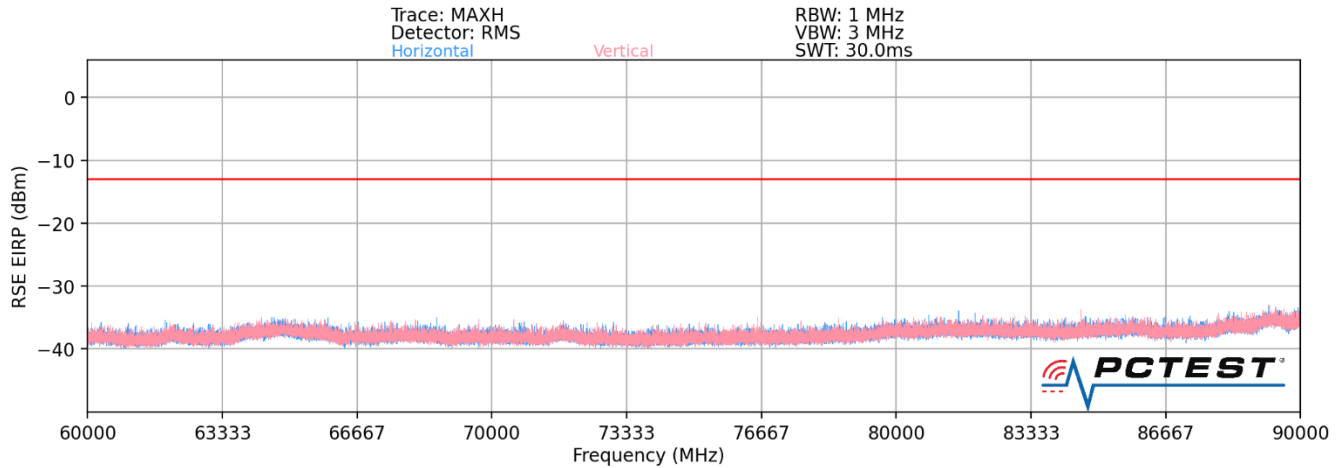

Plot 7-35. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74097.38	Low	50	V	QPSK	V	127	227	-33.53	-13.00	-20.53
76997.91	Mid	50	V	QPSK	V	172	358	-33.62	-13.00	-20.62
79899.98	High	50	V	QPSK	V	-	-	-40.68	-13.00	-27.68


Table 7-51. Ant 3 - SISO -Spurious Emissions Table (60GHz - 90GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 99 of 152

## 90GHz - 140GHz

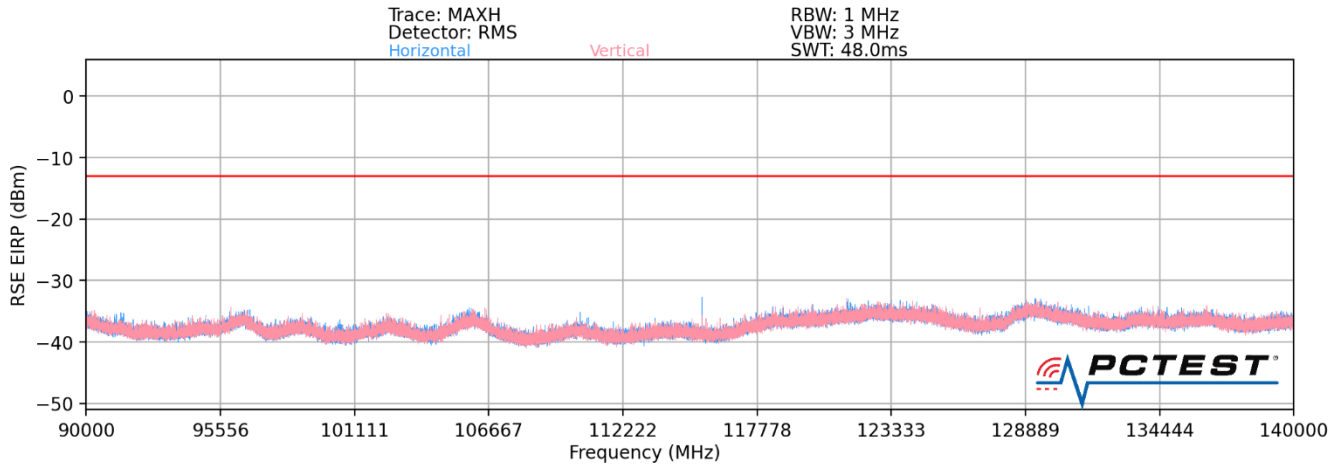

Plot 7-60. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111076.47	Low	50	V	QPSK	H	166	41	-34.29	-13.00	-21.29
115501.10	Mid	50	V	QPSK	H	158	55	-36.01	-13.00	-23.01
119926.20	High	50	V	QPSK	H	177	55	-37.81	-13.00	-24.81


Table 7-52. Ant3 - SISO -Spurious Emissions Table (90GHz - 140GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 100 of 152

## 140GHz - 170GHz

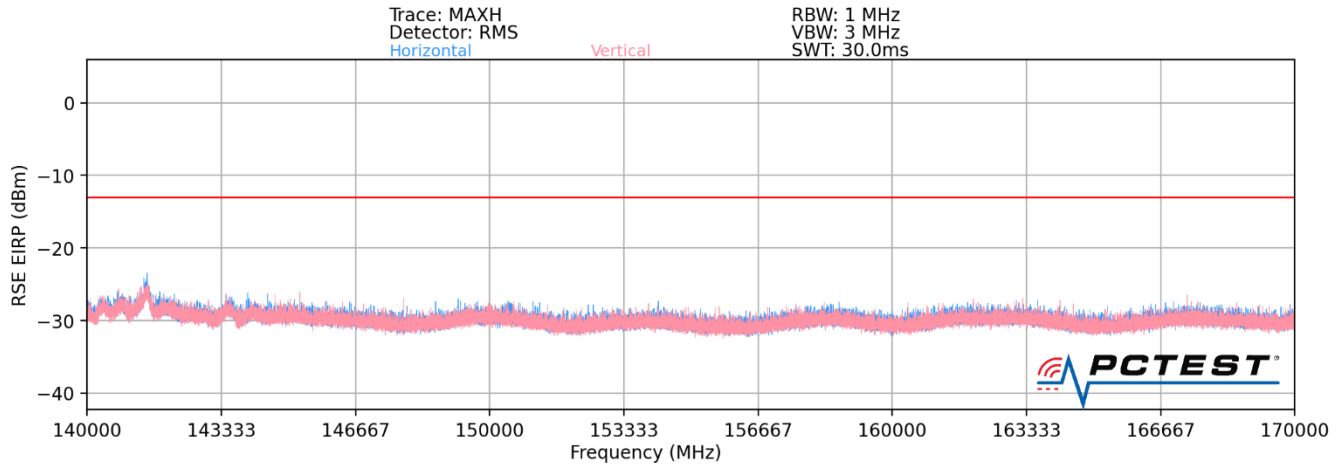

Plot 7-61. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
148102.56	Low	50	V	QPSK	H	-	-	-37.05	-13.00	-24.05
154003.78	Mid	50	V	QPSK	H	-	-	-36.62	-13.00	-23.62
159030.12	High	50	V	QPSK	H	-	-	-37.22	-13.00	-24.22


Table 7-53. Ant 3 - SISO -Spurious Emissions Table (140GHz - 170GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 101 of 152

## 170GHz - 200GHz

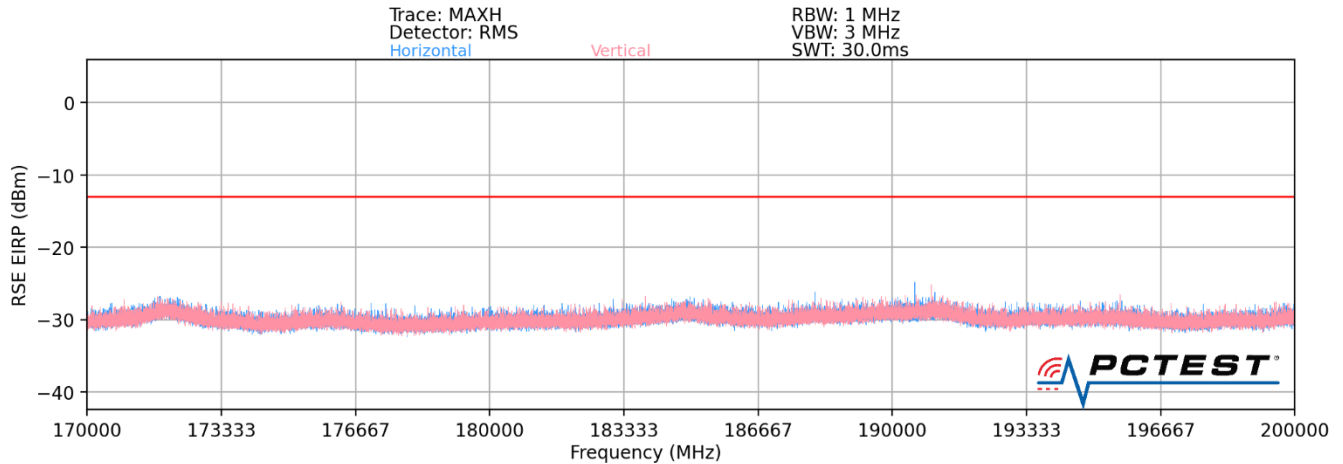

Plot 7-62. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
192515.24	Low	50	H	QPSK	H	-	-	-36.30	-13.00	-23.30
195512.33	Mid	50	V	QPSK	H	-	-	-36.01	-13.00	-23.01
199878.55	High	50	V	QPSK	H	-	-	-36.44	-13.00	-23.44

Table 7-54. Ant 3 - SISO -Spurious Emissions Table (170GHz - 200GHz)


### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 102 of 152

## Band n260- ANT 4

### 30MHz - 1GHz

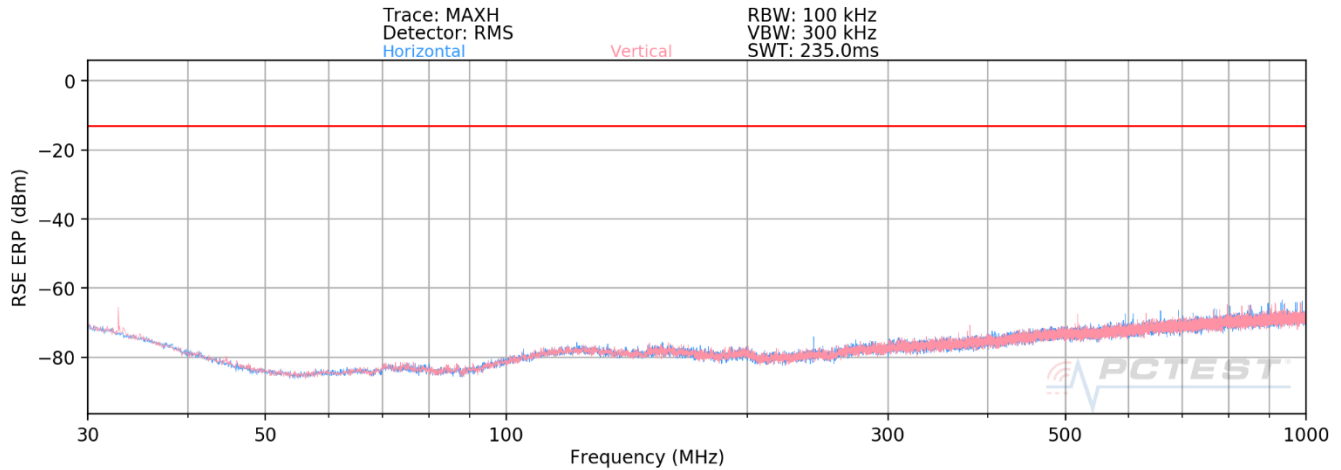

Plot 7-55. ANT 4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
476.65	Low	50	H	QPSK	H	-	-	-71.42	-13.00	-58.42
657.22	Mid	50	H	QPSK	H	-	-	-71.68	-13.00	-58.68
928.34	High	50	H	QPSK	H	-	-	-71.14	-13.00	-58.14


Table 7-55. ANT 4 - SISO -Spurious Emissions Table (30MHz - 1GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 103 of 152

## 1GHz - 18GHz

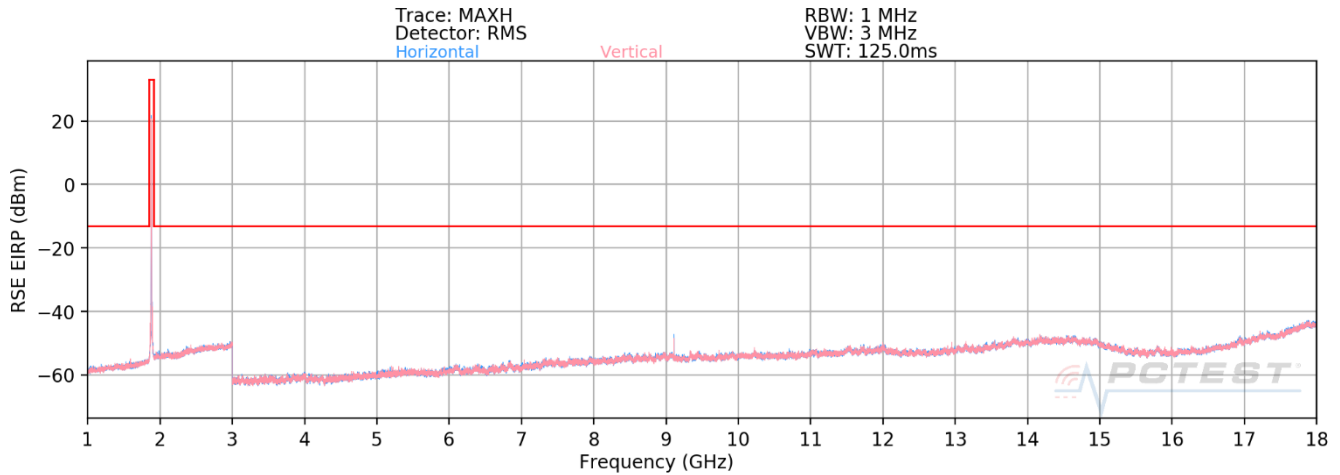

Plot 7-56. ANT 4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8810.24	Low	50	H	QPSK	H	320	217	-39.24	-13.00	-26.24
9299.66	Mid	50	H	QPSK	H	334	114	-40.03	-13.00	-27.03
8970.45	High	50	H	QPSK	H	325	100	-41.47	-13.00	-28.47


Table 7-56. ANT 4 - SISO -Spurious Emissions Table (1GHz - 18GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 104 of 152

## 18GHz – 37GHz

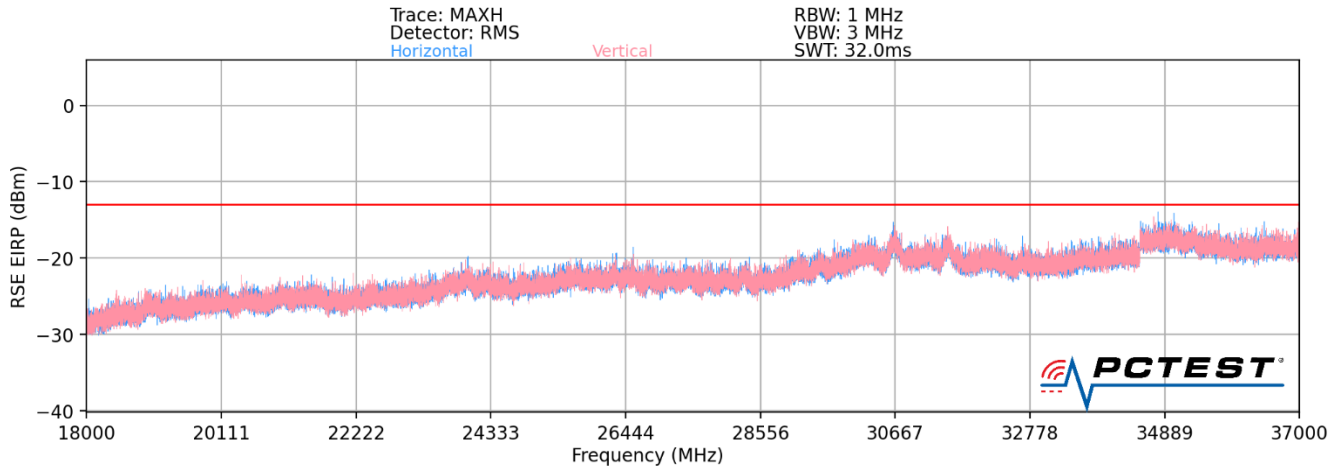

Plot 7-57. ANT 4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36930.74	Low	50	V	QPSK	V	-	-	-33.27	-13.00	-20.27
36901.36	Mid	50	V	QPSK	V	-	-	-33.13	-13.00	-20.13
36907.90	High	50	V	QPSK	V	-	-	-33.39	-13.00	-20.39

Table 7-57. ANT 4 - SISO -Spurious Emissions Table (18GHz – 37GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 105 of 152