



802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

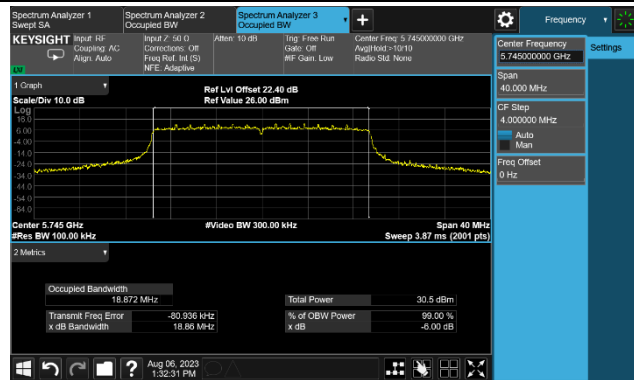

Channel 157 (5785MHz)

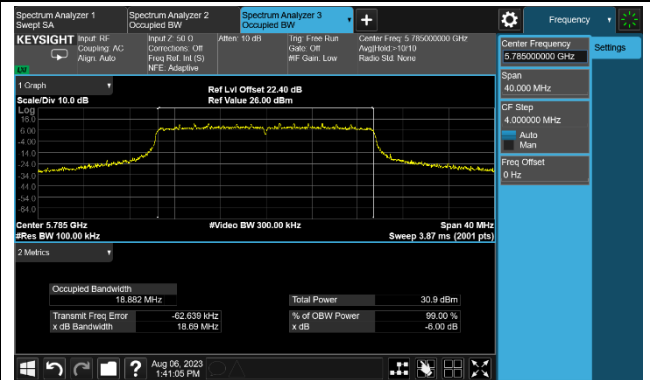


Channel 165 (5825MHz)

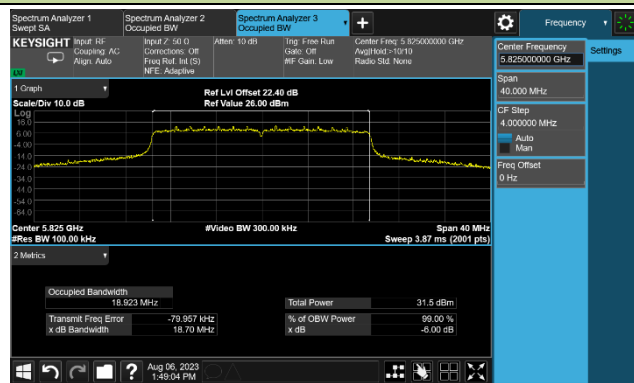


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

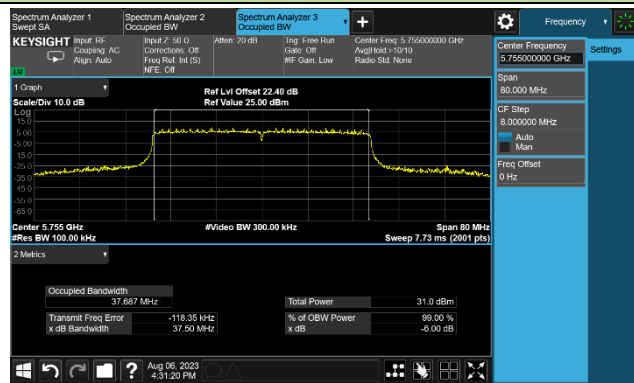


Channel 159 (5795MHz)

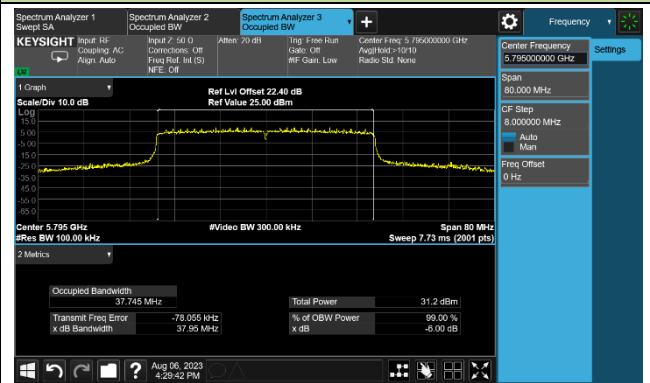



802.11ax-HE80 6dB Bandwidth

Channel 155 (5775MHz)

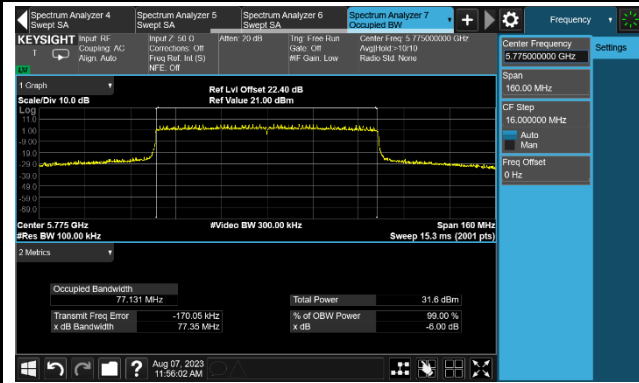

4. Output Power Measurement Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-08-06	Frequency Band	UNII-1

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Power (dBm)	Limit (dBm)	30 Degree EIRP (dBm)	Limit (dBm)	Result
11a	6Mbps	36	5180	19.83	19.93	22.89	≤ 30.00	20.73	≤ 21.00	Pass
11a	6Mbps	44	5220	19.94	20.06	23.01	≤ 30.00	20.85	≤ 21.00	Pass
11a	6Mbps	48	5240	19.73	19.99	22.87	≤ 30.00	20.71	≤ 21.00	Pass
11ac-VHT20	MCS0	36	5180	19.61	19.82	22.73	≤ 30.00	20.57	≤ 21.00	Pass
11ac-VHT20	MCS0	44	5220	19.88	20.04	22.97	≤ 30.00	20.81	≤ 21.00	Pass
11ac-VHT20	MCS0	48	5240	19.64	19.91	22.79	≤ 30.00	20.63	≤ 21.00	Pass
11ac-VHT40	MCS0	38	5190	19.71	19.68	22.71	≤ 30.00	20.55	≤ 21.00	Pass
11ac-VHT40	MCS0	46	5230	19.97	19.81	22.90	≤ 30.00	20.74	≤ 21.00	Pass
11ac-VHT80	MCS0	42	5210	20.05	20.03	23.05	≤ 30.00	20.89	≤ 21.00	Pass
11ax-HE20	MCS0	36	5180	20.14	19.92	23.04	≤ 30.00	20.88	≤ 21.00	Pass
11ax-HE20	MCS0	44	5220	19.92	19.89	22.92	≤ 30.00	20.76	≤ 21.00	Pass
11ax-HE20	MCS0	48	5240	19.74	19.81	22.79	≤ 30.00	20.63	≤ 21.00	Pass
11ax-HE40	MCS0	38	5190	19.70	19.54	22.63	≤ 30.00	20.47	≤ 21.00	Pass
11ax-HE40	MCS0	46	5230	20.06	19.87	22.98	≤ 30.00	20.82	≤ 21.00	Pass
11ax-HE80	MCS0	42	5210	19.70	19.51	22.62	≤ 30.00	20.46	≤ 21.00	Pass

Note 1: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: EIRP Above 30 Degree Angle (dBm) = Total Power (dBm) + 30 Degree Antenna Gain (dBi).



Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-12-06	Frequency Band	UNII-2A & UNII-2C & UNII-3

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
11a	6Mbps	52	5260	19.62	19.11	22.38	≤ 23.76	Pass
11a	6Mbps	60	5300	19.45	19.35	22.41	≤ 23.76	Pass
11a	6Mbps	64	5320	19.53	19.44	22.50	≤ 23.76	Pass
11a	6Mbps	100	5500	19.35	19.27	22.32	≤ 23.76	Pass
11a	6Mbps	116	5580	19.64	19.36	22.51	≤ 23.76	Pass
11a	6Mbps	140	5700	19.31	19.70	22.52	≤ 23.76	Pass
11a	6Mbps	144	5720	19.55	19.77	22.25	≤ 22.60	Pass
11a	6Mbps	149	5745	22.22	22.61	25.43	≤ 30.00	Pass
11a	6Mbps	157	5785	22.59	22.19	25.40	≤ 30.00	Pass
11a	6Mbps	165	5825	22.75	22.49	25.63	≤ 30.00	Pass
11ac-VHT20	MCS0	52	5260	19.94	19.69	22.83	≤ 23.98	Pass
11ac-VHT20	MCS0	60	5300	19.83	19.50	22.68	≤ 23.98	Pass
11ac-VHT20	MCS0	64	5320	19.82	19.56	22.70	≤ 23.98	Pass
11ac-VHT20	MCS0	100	5500	19.52	19.71	22.63	≤ 23.98	Pass
11ac-VHT20	MCS0	116	5580	19.64	19.87	22.77	≤ 23.98	Pass
11ac-VHT20	MCS0	140	5700	19.58	19.89	22.75	≤ 23.98	Pass
11ac-VHT20	MCS0	144	5720	18.55	18.99	21.79	≤ 22.78	Pass
11ac-VHT20	MCS0	149	5745	22.75	22.61	25.69	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	22.54	22.69	25.63	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	22.83	22.52	25.69	≤ 30.00	Pass
11ac-VHT40	MCS0	54	5270	20.60	20.26	23.44	≤ 23.98	Pass
11ac-VHT40	MCS0	62	5310	20.89	20.56	23.74	≤ 23.98	Pass
11ac-VHT40	MCS0	102	5510	20.91	20.53	23.73	≤ 23.98	Pass
11ac-VHT40	MCS0	110	5550	20.79	20.37	23.60	≤ 23.98	Pass
11ac-VHT40	MCS0	134	5670	20.86	20.78	23.83	≤ 23.98	Pass
11ac-VHT40	MCS0	142	5710	20.17	20.75	23.48	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	22.70	22.56	25.64	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	22.94	22.50	25.74	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
11ac-VHT80	MCS0	58	5290	20.64	20.73	23.70	≤ 23.98	Pass
11ac-VHT80	MCS0	106	5530	20.86	20.82	23.85	≤ 23.98	Pass
11ac-VHT80	MCS0	122	5610	20.47	20.54	23.52	≤ 23.98	Pass
11ac-VHT80	MCS0	138	5690	20.84	20.76	23.81	≤ 23.98	Pass
11ac-VHT80	MCS0	155	5775	22.85	22.65	25.76	≤ 30.00	Pass
11ax-HE20	MCS0	52	5260	20.10	20.27	23.20	≤ 23.98	Pass
11ax-HE20	MCS0	60	5300	20.37	19.92	23.16	≤ 23.98	Pass
11ax-HE20	MCS0	64	5320	20.41	19.69	23.08	≤ 23.98	Pass
11ax-HE20	MCS0	100	5500	20.16	19.81	23.00	≤ 23.98	Pass
11ax-HE20	MCS0	116	5580	20.60	19.58	23.13	≤ 23.98	Pass
11ax-HE20	MCS0	140	5700	20.23	20.17	23.21	≤ 23.98	Pass
11ax-HE20	MCS0	144	5720	19.55	19.65	22.61	≤ 22.89	Pass
11ax-HE20	MCS0	149	5745	22.68	22.82	25.76	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	22.78	22.53	25.67	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	22.86	22.51	25.70	≤ 30.00	Pass
11ax-HE40	MCS0	54	5270	20.91	20.78	23.86	≤ 23.98	Pass
11ax-HE40	MCS0	62	5310	20.59	20.16	23.39	≤ 23.98	Pass
11ax-HE40	MCS0	102	5510	20.89	20.53	23.72	≤ 23.98	Pass
11ax-HE40	MCS0	110	5550	20.94	20.65	23.81	≤ 23.98	Pass
11ax-HE40	MCS0	134	5670	20.68	20.58	23.64	≤ 23.98	Pass
11ax-HE40	MCS0	142	5710	20.05	20.79	23.45	≤ 23.98	Pass
11ax-HE40	MCS0	151	5755	22.62	22.21	25.43	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	22.58	22.36	25.48	≤ 30.00	Pass
11ax-HE80	MCS0	58	5290	20.64	20.47	23.57	≤ 23.98	Pass
11ax-HE80	MCS0	106	5530	20.98	20.33	23.68	≤ 23.98	Pass
11ax-HE80	MCS0	122	5610	20.59	20.83	23.72	≤ 23.98	Pass
11ax-HE80	MCS0	138	5690	20.71	20.45	23.59	≤ 23.98	Pass
11ax-HE80	MCS0	155	5775	22.78	22.56	25.68	≤ 30.00	Pass

Note 1: Total Average Power (dBm) = $10 \cdot \log_{10} \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: For 5250-5350MHz & 5470-5725MHz, the conducted power limit is as below.

802.11a: $11 + 10 \log_{10} (18.87) = 23.76 < 23.98\text{dBm}$

802.11ac-VHT20/ac-VHT40/ac-VHT80/ax-HE20/ax-HE40/ax-HE80: $11 + 10 \log_{10} (B) > 23.98\text{dBm}$.

For straddle channel 20MHz Bandwidth 5720MHz, the conducted power limit is as below:

802.11a CH144: $11 + 10 \log_{10} (B) = 22.60\text{dBm}$, $B = 18.91/2 + 5 = 14.455\text{MHz}$.

802.11ac-HT20 CH144: $11 + 10 \log_{10} (B) = 22.78\text{dBm}$, $B = 20.10/2 + 5 = 15.05\text{MHz}$.

802.11ax-HE20 CH144: $11 + 10 \log_{10} (B) = 22.89\text{dBm}$, $B = 20.91/2 + 5 = 15.455\text{MHz}$.



5. Power Spectral Density Measurement Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-25~2023-12-06	Frequency Band	UNII-1 & 2A & 2C

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	Limit (dBm/ MHz)	Result
				Ant 0	Ant 1				
11a	6Mbps	36	5180	7.649	7.773	92.01	11.083	≤ 17.00	Pass
11a	6Mbps	44	5220	7.693	7.765	92.01	11.101	≤ 17.00	Pass
11a	6Mbps	48	5240	7.735	7.887	92.01	11.184	≤ 17.00	Pass
11a	6Mbps	52	5260	7.526	7.215	92.01	10.745	≤ 11.00	Pass
11a	6Mbps	60	5300	7.614	7.327	92.01	10.845	≤ 11.00	Pass
11a	6Mbps	64	5320	7.463	7.238	92.01	10.724	≤ 11.00	Pass
11a	6Mbps	100	5500	7.559	7.338	92.01	10.822	≤ 11.00	Pass
11a	6Mbps	116	5580	7.572	7.364	92.01	10.841	≤ 11.00	Pass
11a	6Mbps	140	5700	7.099	7.709	92.01	10.787	≤ 11.00	Pass
11a	6Mbps	144	5720	7.047	7.800	92.01	10.812	≤ 11.00	Pass
11ac-VHT20	MCS0	36	5180	7.234	7.387	94.10	10.586	≤ 17.00	Pass
11ac-VHT20	MCS0	44	5220	7.075	7.313	94.10	10.470	≤ 17.00	Pass
11ac-VHT20	MCS0	48	5240	7.231	7.479	94.10	10.631	≤ 17.00	Pass
11ac-VHT20	MCS0	52	5260	7.282	7.303	94.10	10.567	≤ 11.00	Pass
11ac-VHT20	MCS0	60	5300	7.760	7.343	94.10	10.831	≤ 11.00	Pass
11ac-VHT20	MCS0	64	5320	7.601	7.126	94.10	10.644	≤ 11.00	Pass
11ac-VHT20	MCS0	100	5500	7.337	7.444	94.10	10.665	≤ 11.00	Pass
11ac-VHT20	MCS0	116	5580	7.291	7.681	94.10	10.765	≤ 11.00	Pass
11ac-VHT20	MCS0	140	5700	7.429	7.508	94.10	10.743	≤ 11.00	Pass
11ac-VHT20	MCS0	144	5720	7.313	7.776	94.10	10.825	≤ 11.00	Pass
11ac-VHT40	MCS0	38	5190	4.487	4.373	92.51	7.779	≤ 17.00	Pass
11ac-VHT40	MCS0	46	5230	4.895	4.533	92.51	8.066	≤ 17.00	Pass
11ac-VHT40	MCS0	54	5270	5.314	5.231	92.51	8.621	≤ 11.00	Pass
11ac-VHT40	MCS0	62	5310	5.849	5.640	92.51	9.094	≤ 11.00	Pass
11ac-VHT40	MCS0	102	5510	5.728	5.597	92.51	9.011	≤ 11.00	Pass
11ac-VHT40	MCS0	110	5550	5.550	5.402	92.51	8.825	≤ 11.00	Pass
11ac-VHT40	MCS0	134	5670	5.622	5.532	92.51	8.926	≤ 11.00	Pass
11ac-VHT40	MCS0	142	5710	5.926	6.247	92.51	9.438	≤ 11.00	Pass

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	Limit (dBm/ MHz)	Result
				Ant 0	Ant 1				
11ac-VHT80	MCS0	42	5210	1.490	1.362	91.65	4.815	≤ 17.00	Pass
11ac-VHT80	MCS0	58	5290	2.437	2.452	91.65	5.833	≤ 11.00	Pass
11ac-VHT80	MCS0	106	5530	2.724	2.495	91.65	6.000	≤ 11.00	Pass
11ac-VHT80	MCS0	122	5610	2.249	2.319	91.65	5.673	≤ 11.00	Pass
11ac-VHT80	MCS0	138	5690	2.727	2.676	91.65	6.091	≤ 11.00	Pass
11ax-HE20	MCS0	36	5180	7.537	7.423	93.95	10.762	≤ 17.00	Pass
11ax-HE20	MCS0	44	5220	7.097	6.915	93.95	10.288	≤ 17.00	Pass
11ax-HE20	MCS0	48	5240	7.023	7.054	93.95	10.320	≤ 17.00	Pass
11ax-HE20	MCS0	52	5260	7.448	7.689	93.95	10.852	≤ 11.00	Pass
11ax-HE20	MCS0	60	5300	7.534	7.400	93.95	10.749	≤ 11.00	Pass
11ax-HE20	MCS0	64	5320	7.604	7.347	93.95	10.759	≤ 11.00	Pass
11ax-HE20	MCS0	100	5500	7.801	7.253	93.95	10.817	≤ 11.00	Pass
11ax-HE20	MCS0	116	5580	7.561	7.171	93.95	10.652	≤ 11.00	Pass
11ax-HE20	MCS0	140	5700	7.601	7.475	93.95	10.820	≤ 11.00	Pass
11ax-HE20	MCS0	144	5720	7.461	7.709	93.95	10.868	≤ 11.00	Pass
11ax-HE40	MCS0	38	5190	4.304	4.079	94.76	7.437	≤ 17.00	Pass
11ax-HE40	MCS0	46	5230	4.612	4.220	94.76	7.664	≤ 17.00	Pass
11ax-HE40	MCS0	54	5270	5.769	5.473	94.76	8.868	≤ 11.00	Pass
11ax-HE40	MCS0	62	5310	5.088	4.879	94.76	8.229	≤ 11.00	Pass
11ax-HE40	MCS0	102	5510	5.433	5.426	94.76	8.674	≤ 11.00	Pass
11ax-HE40	MCS0	110	5550	5.917	5.891	94.76	9.148	≤ 11.00	Pass
11ax-HE40	MCS0	134	5670	5.381	5.262	94.76	8.566	≤ 11.00	Pass
11ax-HE40	MCS0	142	5710	5.146	5.612	94.76	8.629	≤ 11.00	Pass
11ax-HE80	MCS0	42	5210	1.159	0.923	94.78	4.286	≤ 17.00	Pass
11ax-HE80	MCS0	58	5290	2.769	2.676	94.78	5.966	≤ 11.00	Pass
11ax-HE80	MCS0	106	5530	2.914	2.855	94.78	6.128	≤ 11.00	Pass
11ax-HE80	MCS0	122	5610	2.860	2.930	94.78	6.138	≤ 11.00	Pass
11ax-HE80	MCS0	138	5690	2.983	2.901	94.78	6.185	≤ 11.00	Pass

Note: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle ≥ 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\}$.



Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-12-06	Frequency Band	UNII-3


Test Mode	Data Rate/MCS	Ch. No.	Freq. (MHz)	PSD (dBm/510kHz)		Duty Cycle (%)	Total PSD (dBm/510kHz)	Limit (dBm/500kHz)	Result
				Ant 0	Ant 1				
11a	6Mbps	149	5745	7.806	7.409	92.01	10.984	≤ 30.00	Pass
11a	6Mbps	157	5785	7.974	7.431	92.01	11.083	≤ 30.00	Pass
11a	6Mbps	165	5825	8.297	7.811	92.01	11.433	≤ 30.00	Pass
11ac-VHT20	MCS0	149	5745	7.749	7.517	94.10	10.909	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	7.702	7.384	94.10	10.820	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	8.055	7.690	94.10	11.151	≤ 30.00	Pass
11ac-VHT40	MCS0	151	5755	4.913	4.621	92.51	8.118	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	5.067	4.468	92.51	8.126	≤ 30.00	Pass
11ac-VHT80	MCS0	155	5775	1.750	1.337	91.65	4.937	≤ 30.00	Pass
11ax-HE20	MCS0	149	5745	7.486	7.272	93.95	10.662	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	7.523	7.059	93.95	10.579	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	7.822	7.342	93.95	10.870	≤ 30.00	Pass
11ax-HE40	MCS0	151	5755	4.601	4.406	94.76	7.749	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	4.820	4.333	94.76	7.827	≤ 30.00	Pass
11ax-HE80	MCS0	155	5775	1.875	1.563	94.78	4.965	≤ 30.00	Pass

Note 1: When EUT duty cycle ≥ 98%, Total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$
(dBm/500kHz)


When EUT duty cycle < 98%, Total PSD (dBm/500kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/510kHz)
+ $10 \cdot \log (1/\text{Duty Cycle})$.

802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

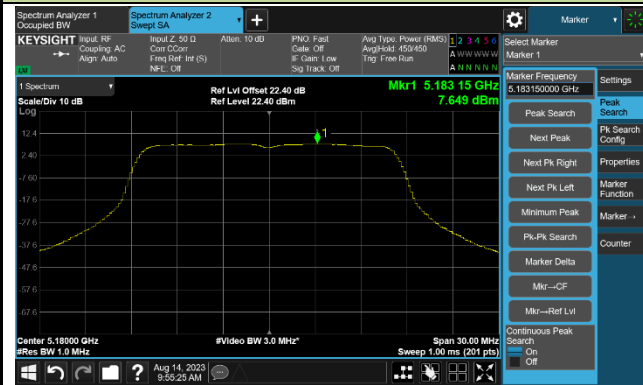


Channel 44 (5220MHz)

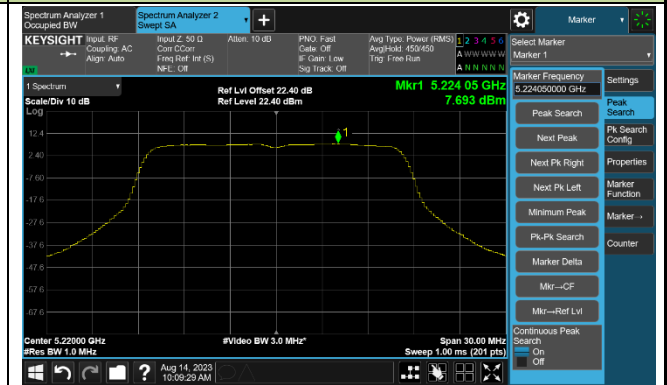


Channel 48 (5240MHz)

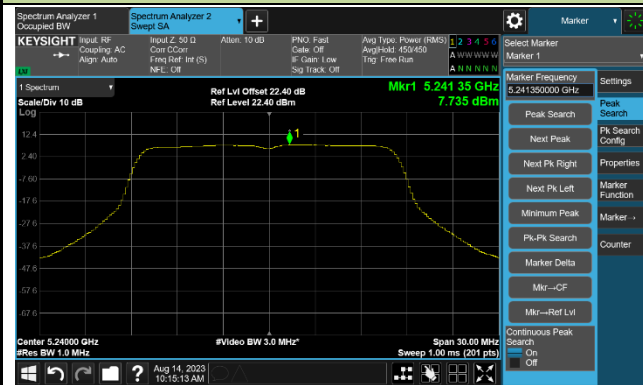


Channel 52 (5260MHz)

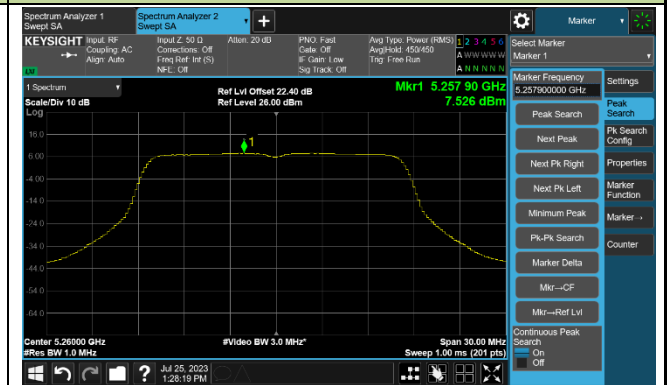

Channel 60 (5300MHz)

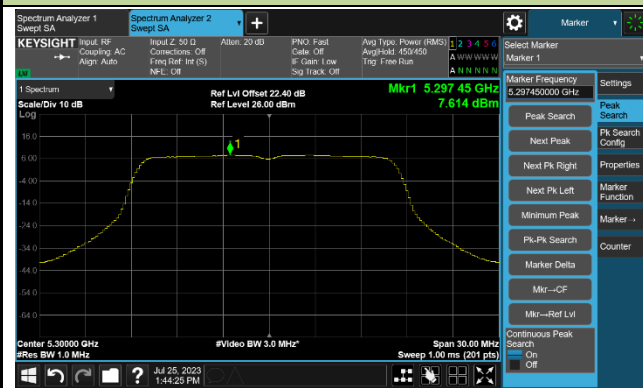


Channel 64 (5320MHz)

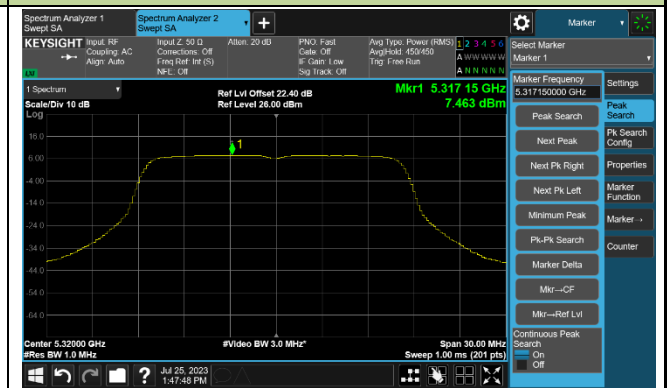


802.11a Power Spectral Density - Ant 0


Channel 100 (5500MHz)

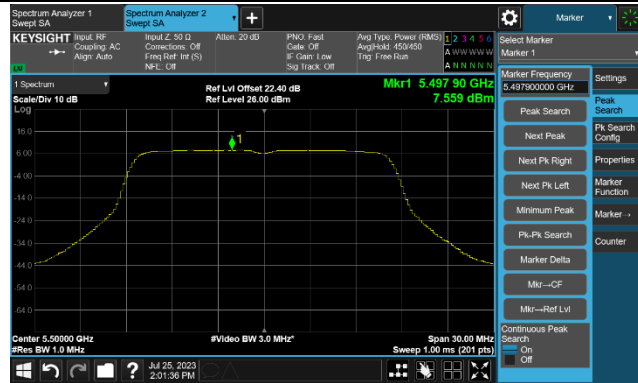


Channel 116 (5580MHz)

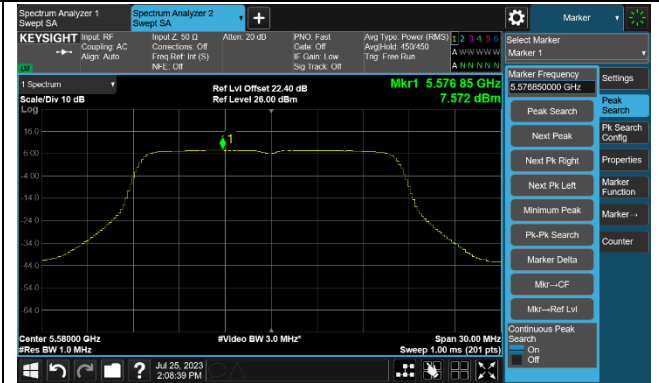


Channel 140 (5700MHz)

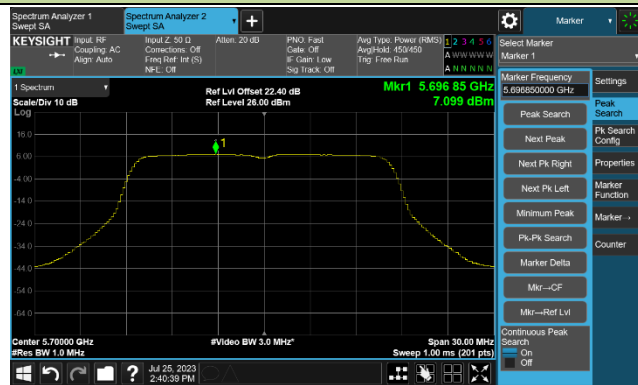

Channel 144 (5720MHz)

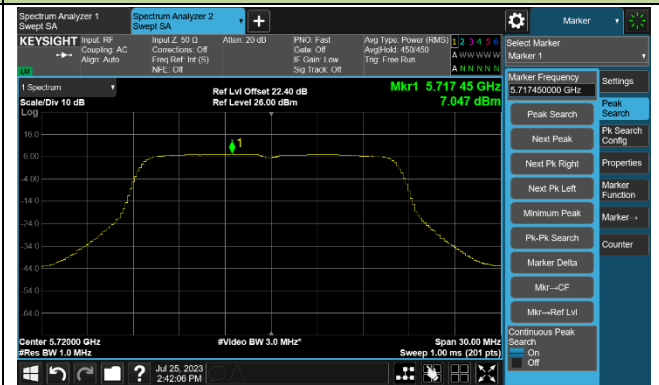


Channel 149 (5745MHz)

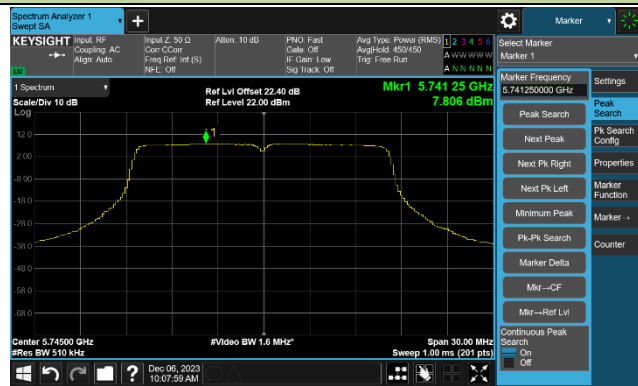

Channel 157 (5785MHz)




Channel 165 (5825MHz)

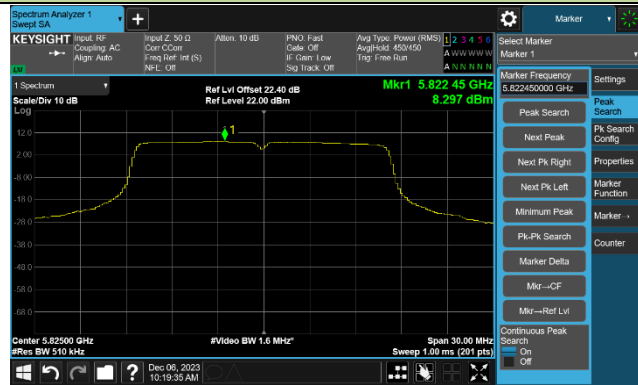


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

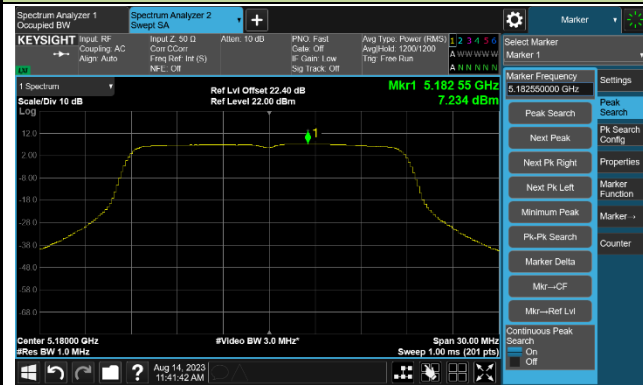


Channel 44 (5220MHz)

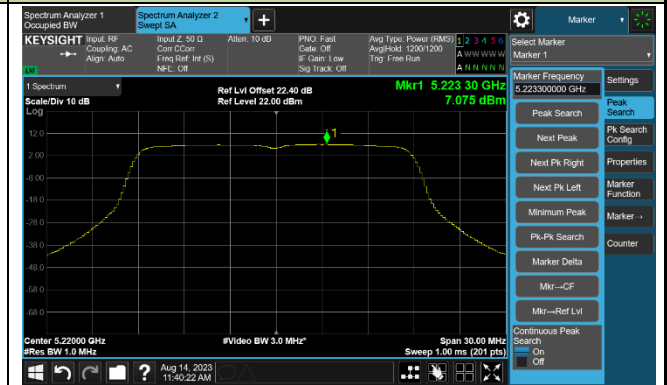


Channel 48 (5240MHz)

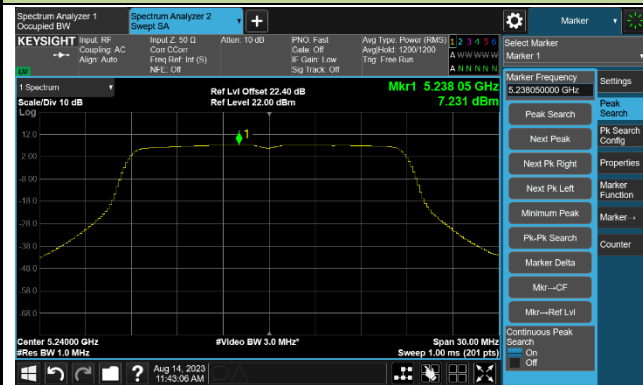


Channel 52 (5260MHz)

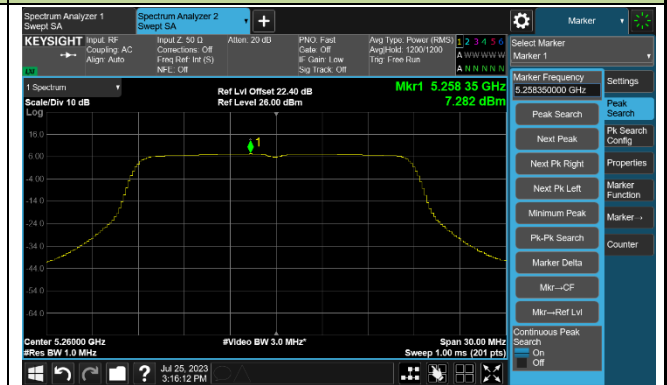

Channel 60 (5300MHz)

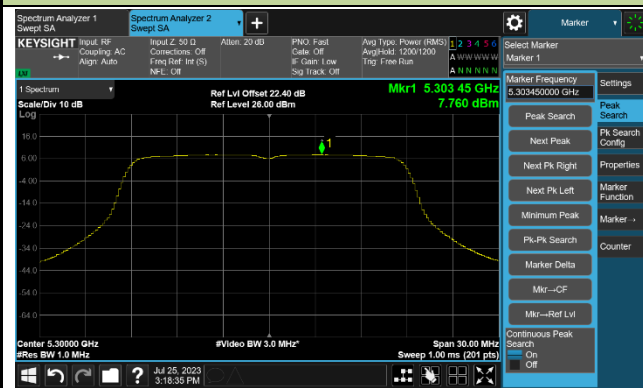


Channel 64 (5320MHz)

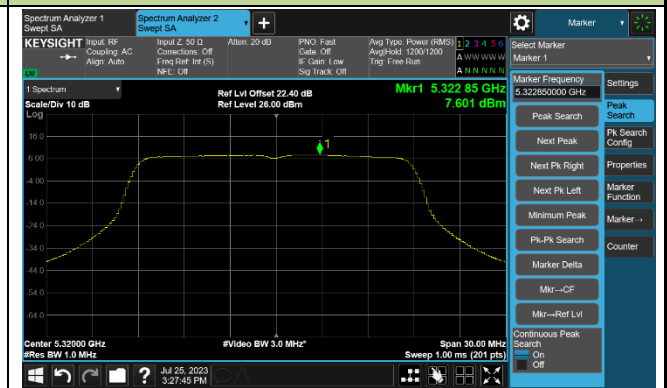


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 100 (5500MHz)

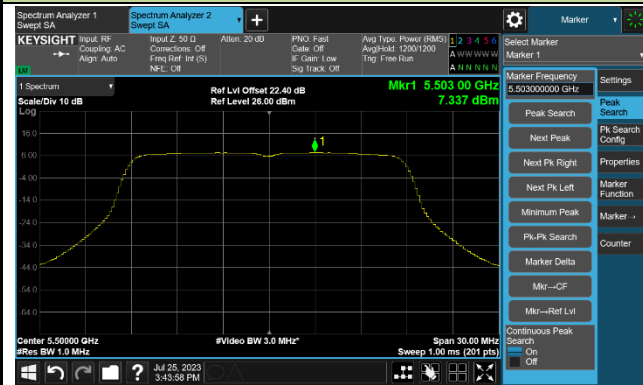


Channel 116 (5580MHz)

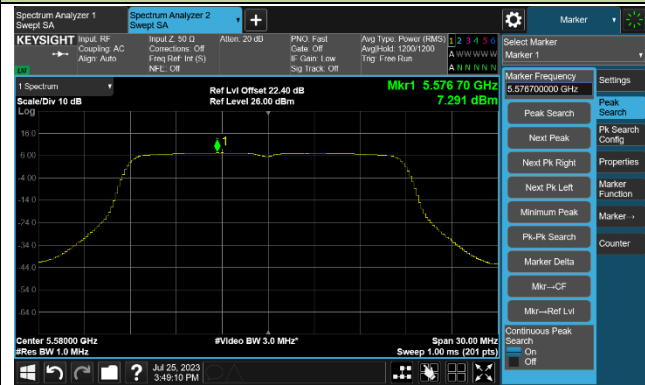


Channel 140 (5700MHz)

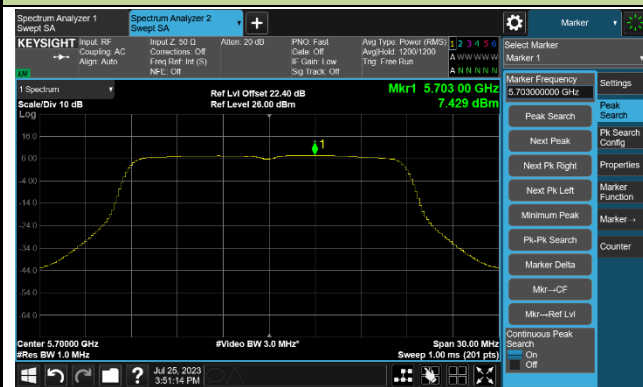


Channel 144 (5720MHz)

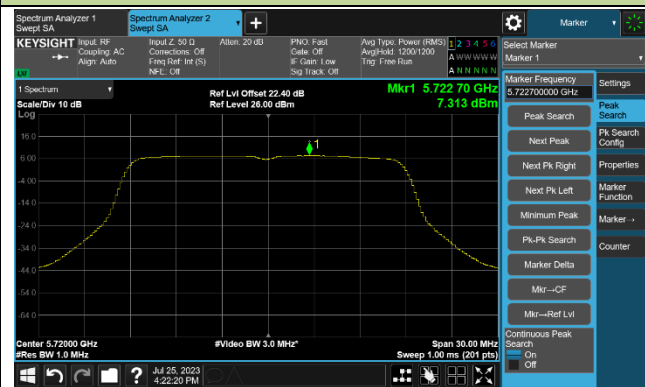


Channel 149 (5745MHz)

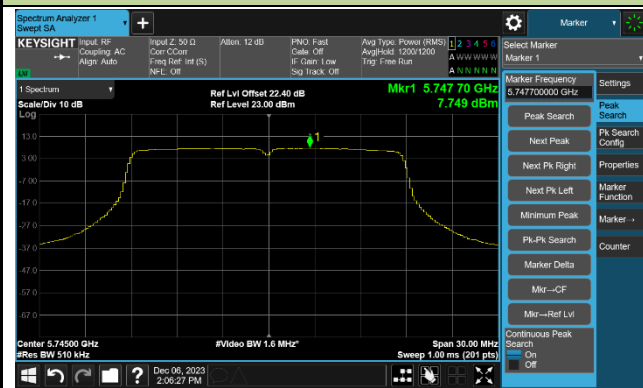

Channel 157 (5785MHz)

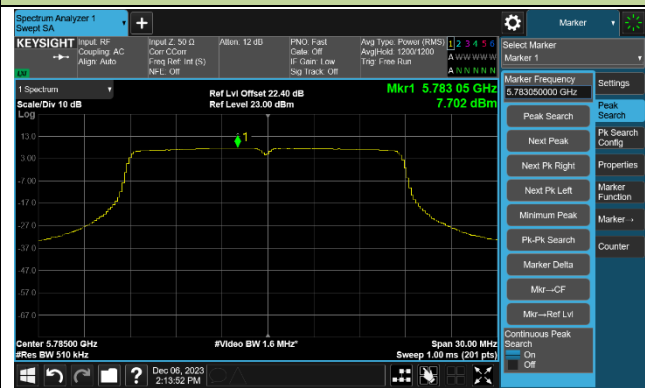


Channel 165 (5825MHz)

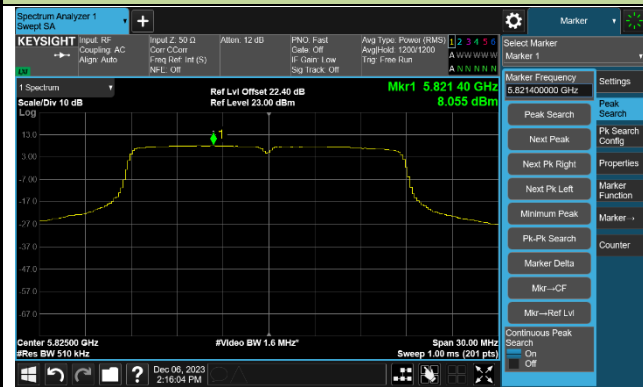


802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

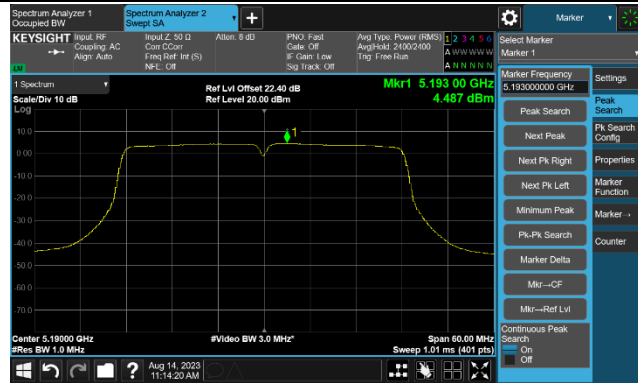


Channel 46 (5230MHz)

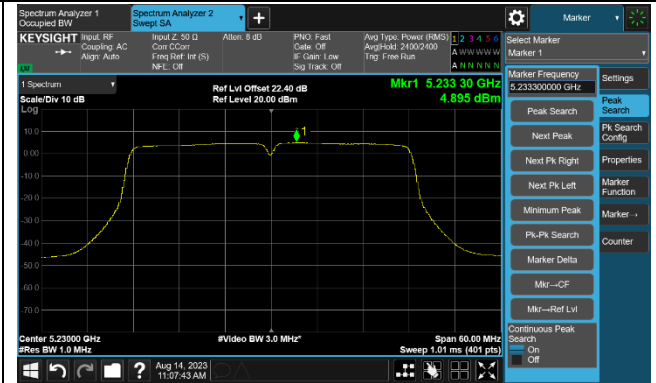


Channel 54 (5270MHz)

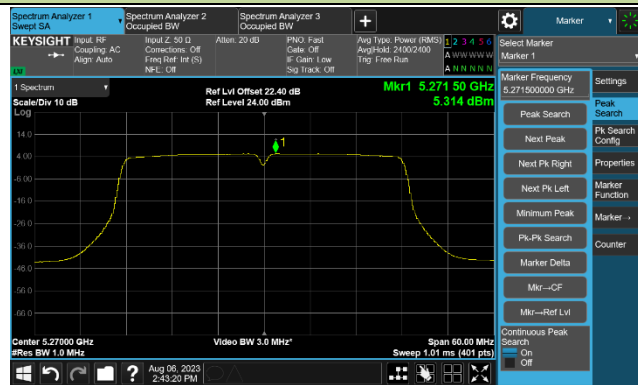


Channel 62 (5310MHz)

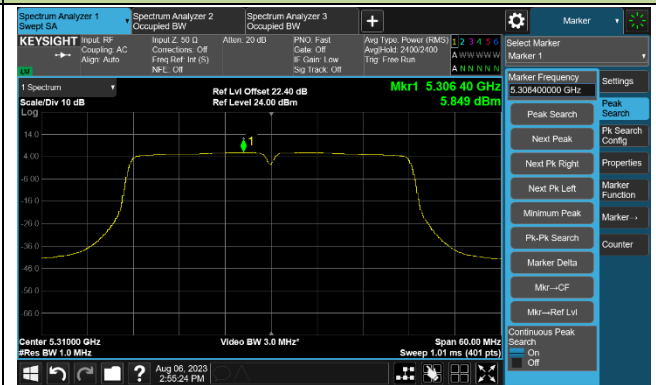

Channel 102 (5510MHz)

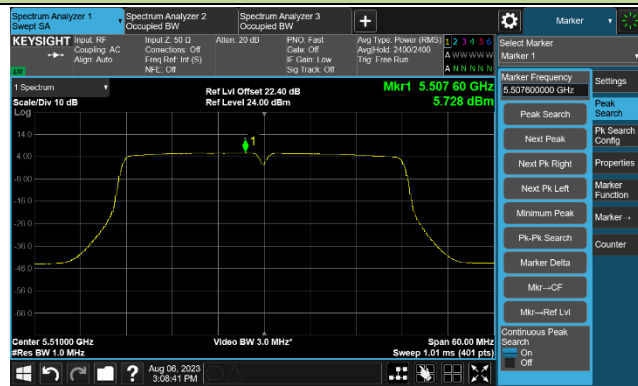


Channel 110 (5550MHz)

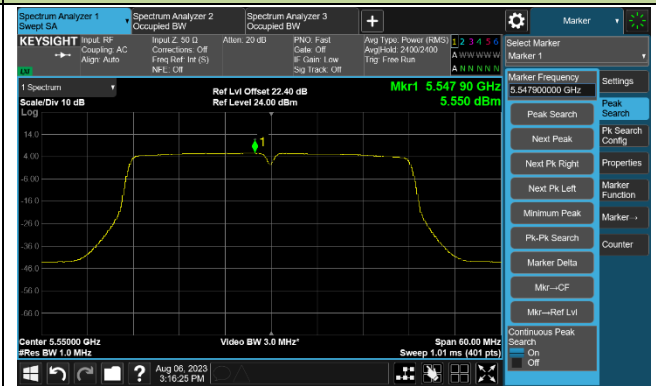


802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 134 (5670MHz)

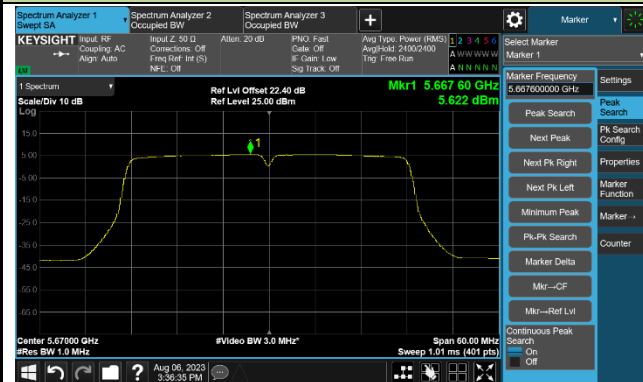


Channel 142 (5710MHz)

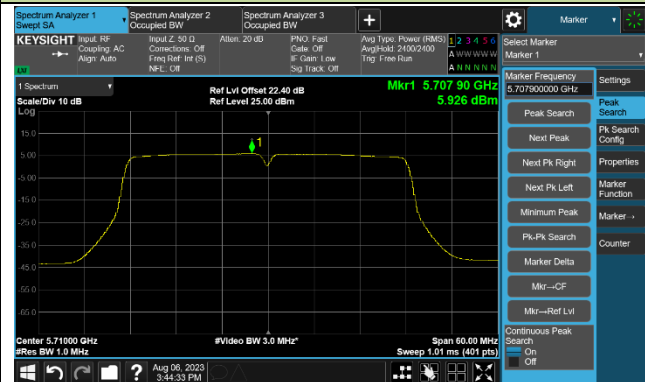

Channel 151 (5755MHz)

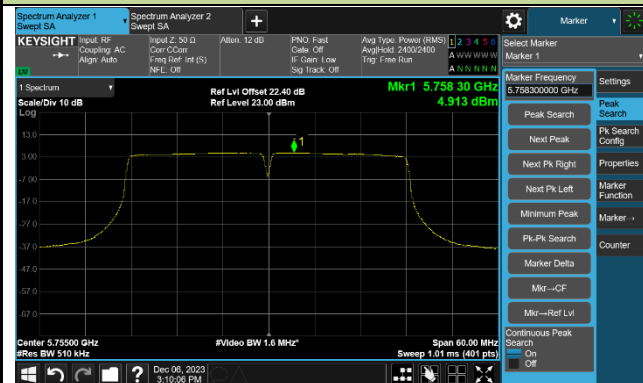


Channel 159 (5795MHz)

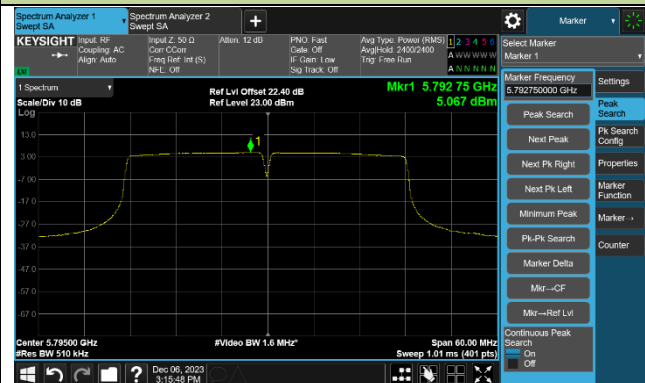




802.11ac-VHT80 Power Spectral Density - Ant 0


Channel 42 (5210MHz)

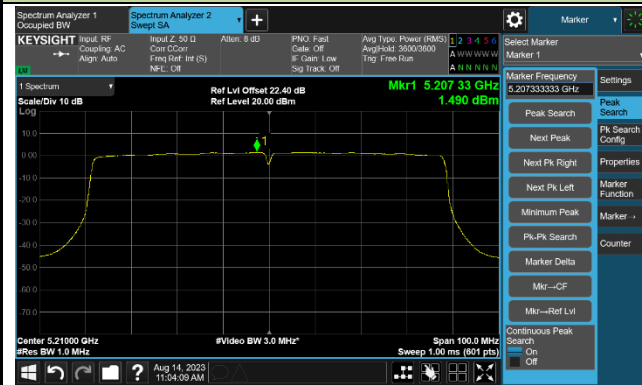


Channel 58 (5290MHz)

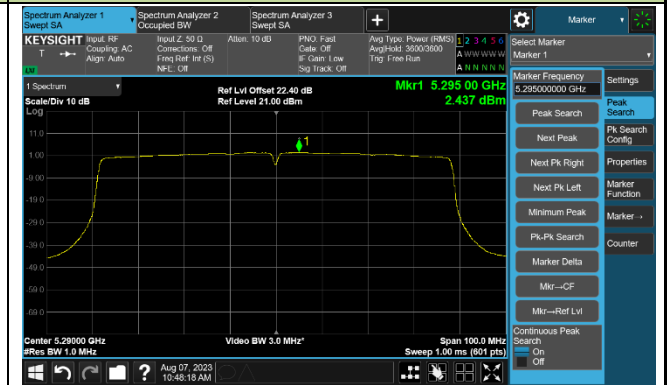


Channel 106 (5530MHz)

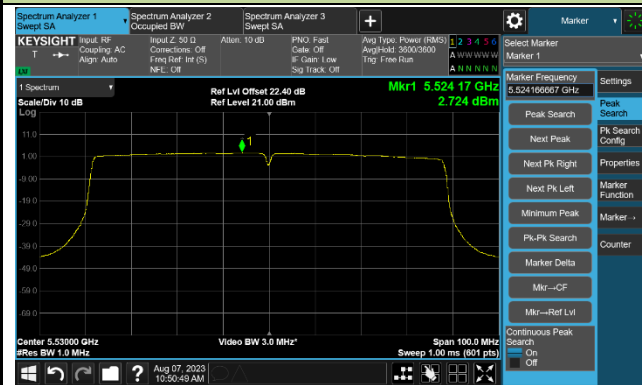


Channel 122 (5610MHz)

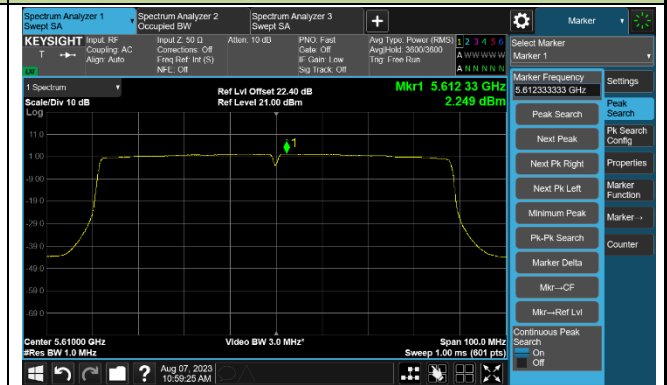

Channel 138 (5690MHz)

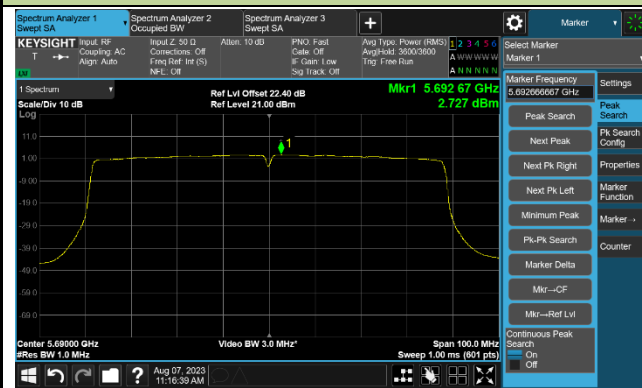


Channel 155 (5775MHz)

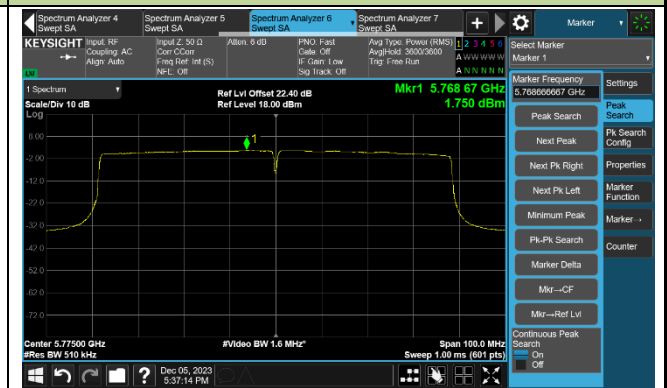


802.11ax-HE20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

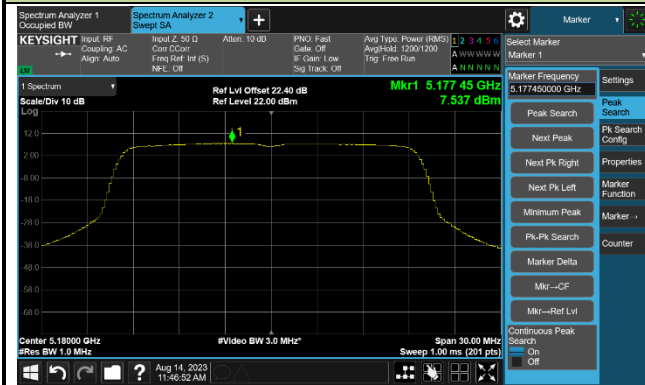


Channel 44 (5220MHz)

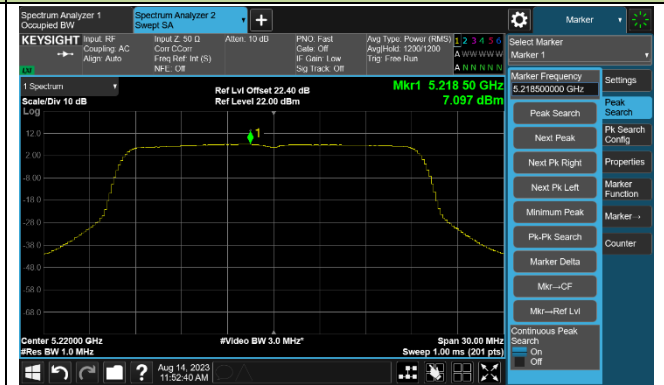


Channel 48 (5240MHz)

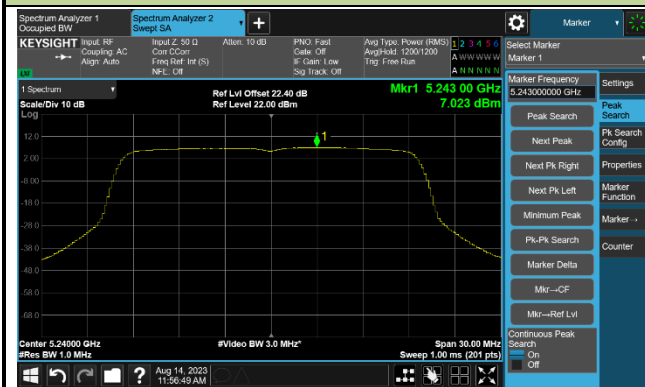


Channel 52 (5260MHz)

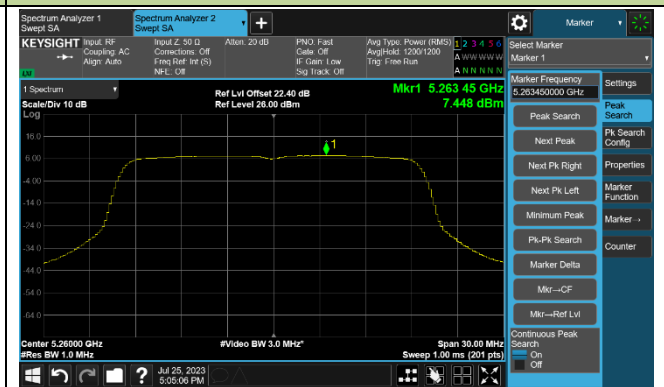

Channel 60 (5300MHz)

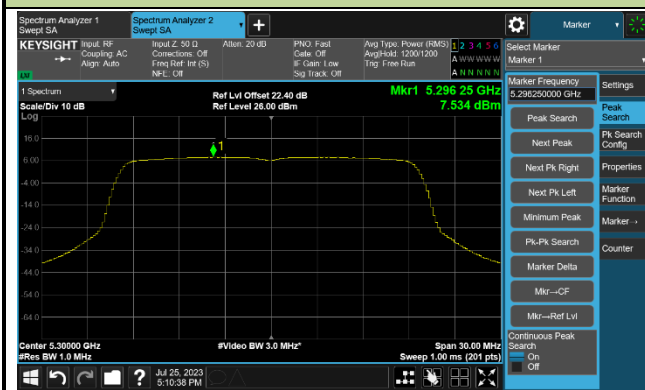


Channel 64 (5320MHz)

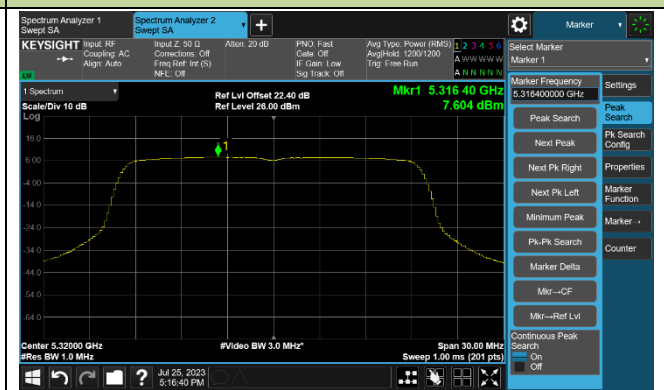

802.11ax-HE20 Power Spectral Density - Ant 0


Channel 100 (5500MHz)

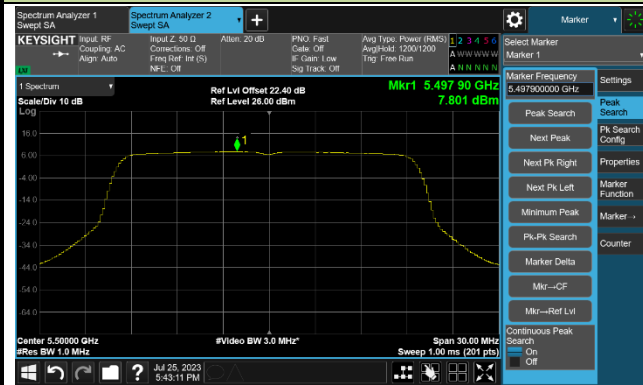


Channel 116 (5580MHz)




Channel 140 (5700MHz)

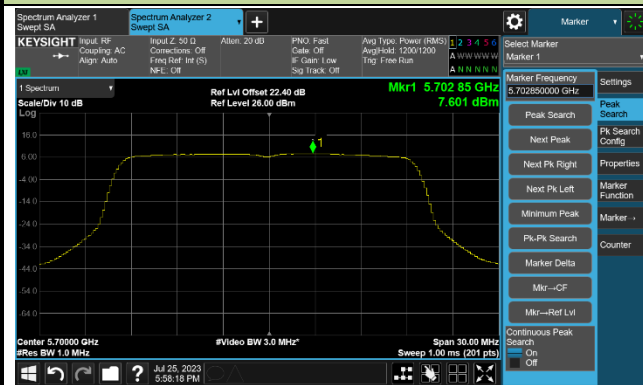

Channel 144 (5720MHz)

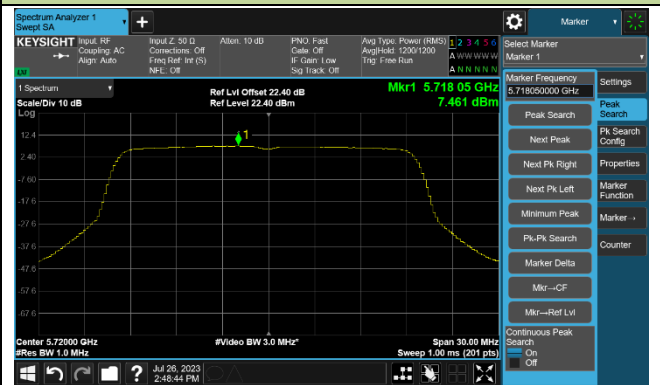


Channel 149 (5745MHz)

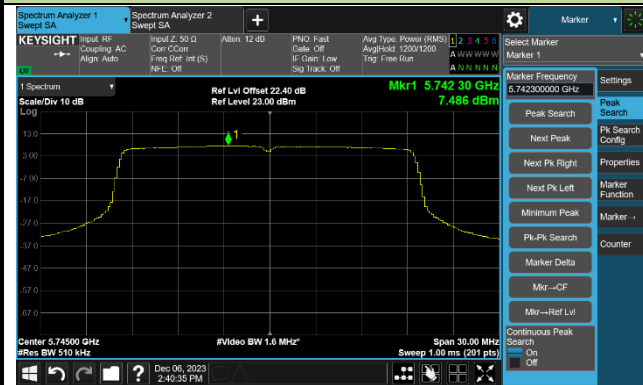

Channel 157 (5785MHz)




Channel 165 (5825MHz)

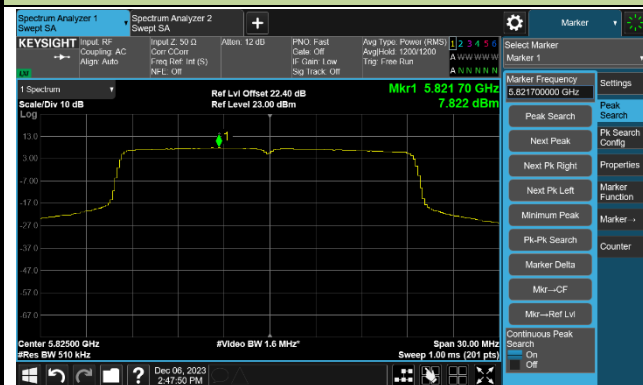


802.11ax-HE40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

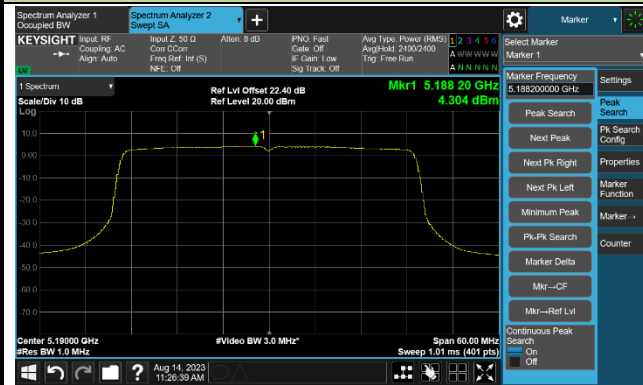


Channel 46 (5230MHz)

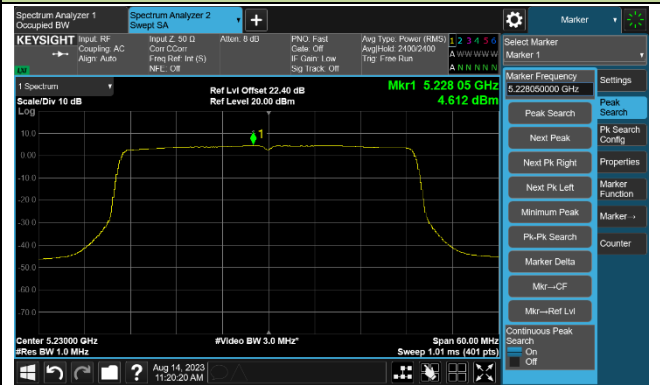


Channel 54 (5270MHz)

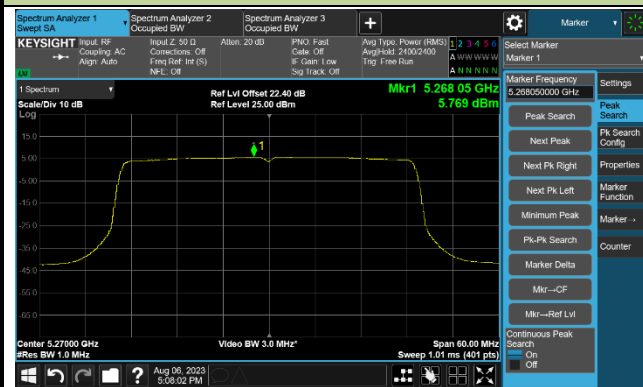


Channel 62 (5310MHz)

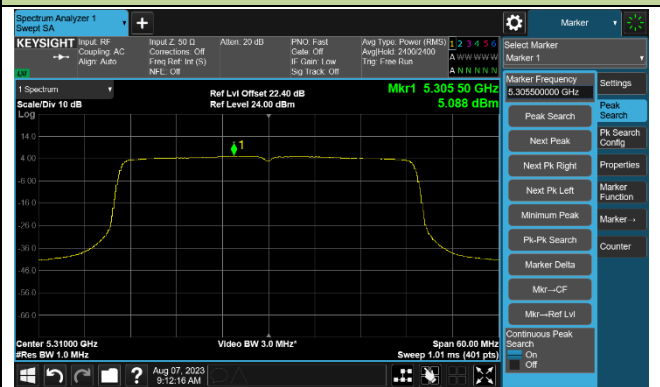

Channel 102 (5510MHz)

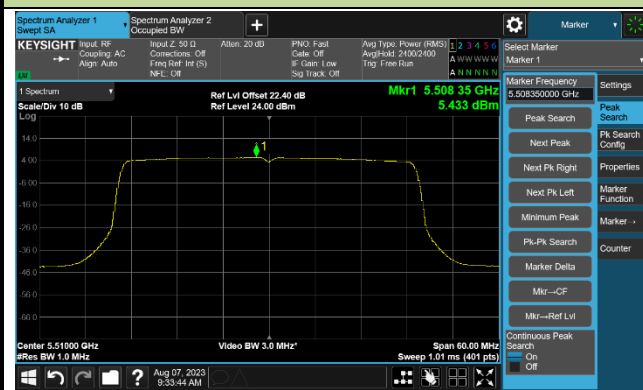


Channel 110 (5550MHz)

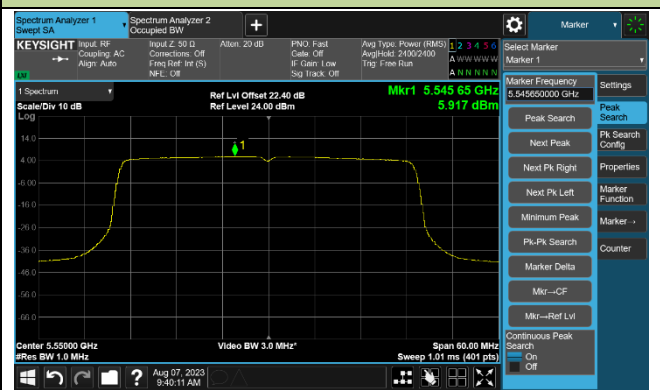


802.11ax-HE40 Power Spectral Density - Ant 0


Channel 134 (5670MHz)

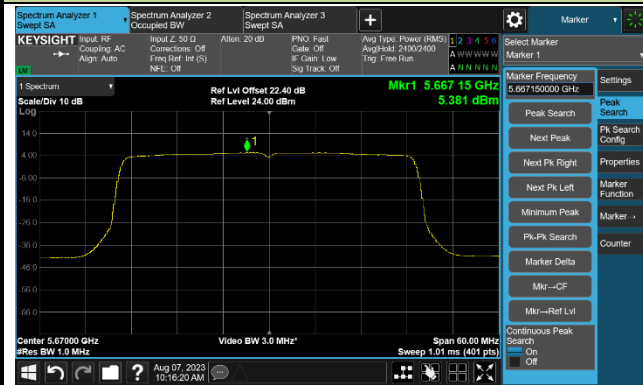


Channel 142 (5710MHz)

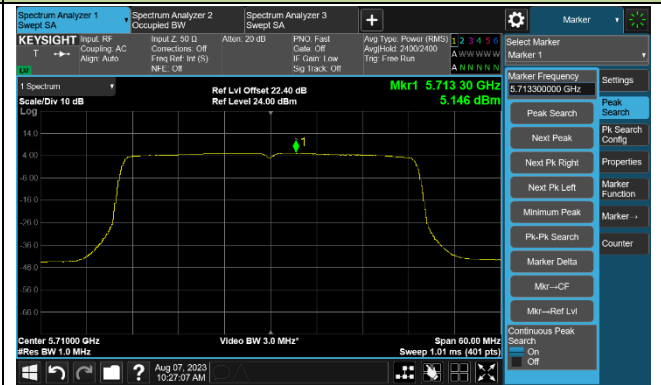

Channel 151 (5755MHz)

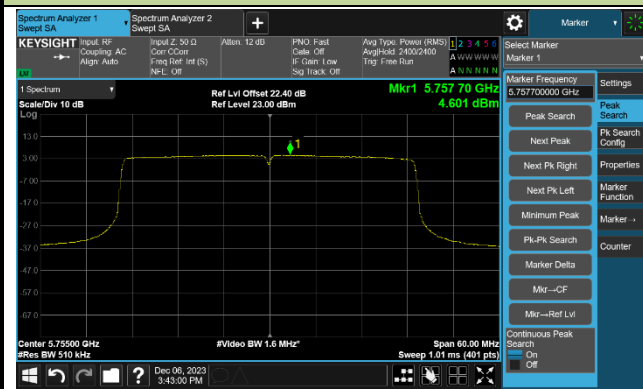


Channel 159 (5795MHz)

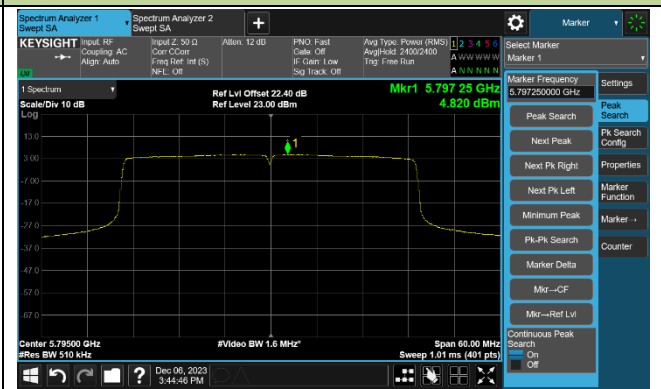


802.11ax-HE80 Power Spectral Density - Ant 0


Channel 42 (5210MHz)

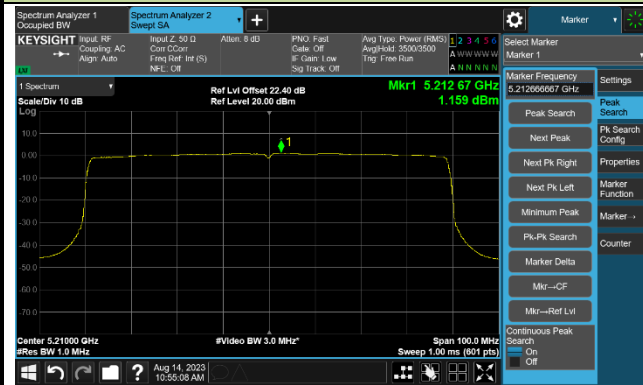


Channel 58 (5290MHz)

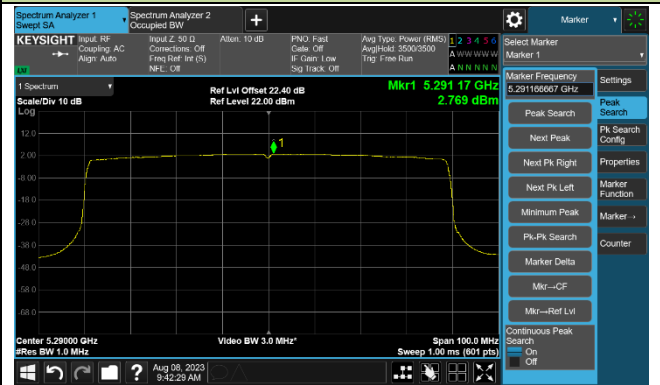


Channel 106 (5530MHz)

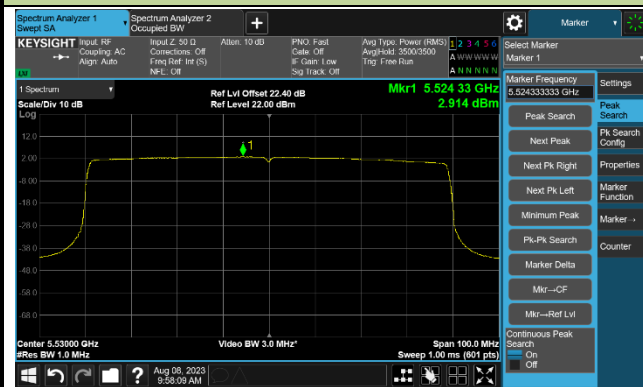

Channel 122 (5610MHz)

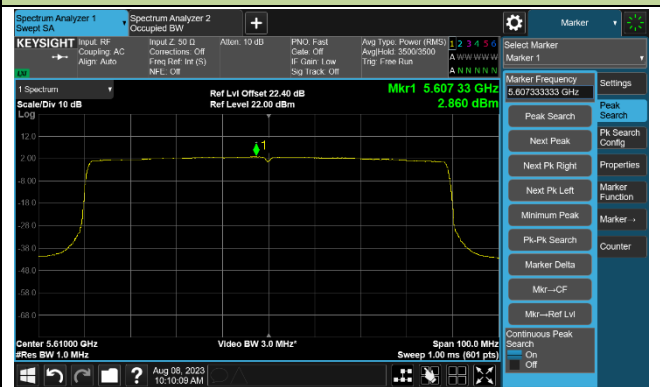

Channel 138 (5690MHz)

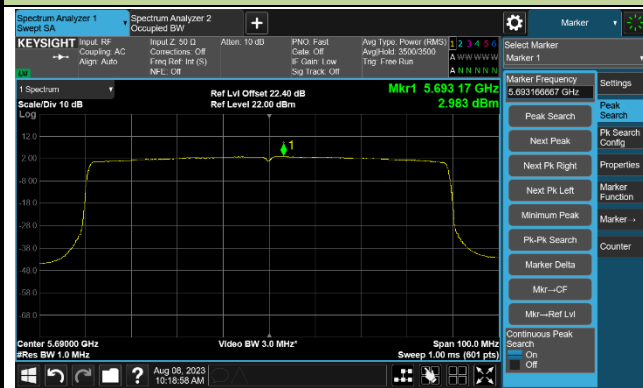


Channel 155 (5775MHz)




802.11a Power Spectral Density - Ant 1


Channel 36 (5180MHz)

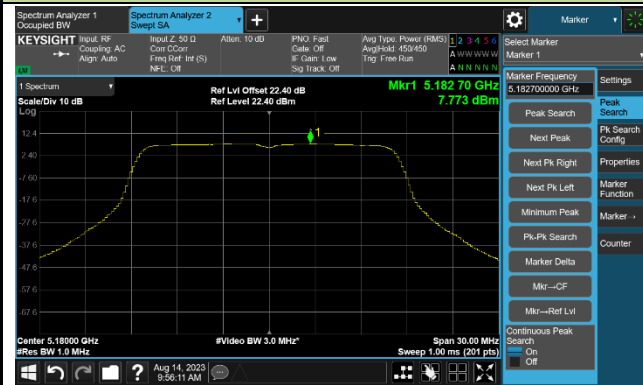


Channel 44 (5220MHz)

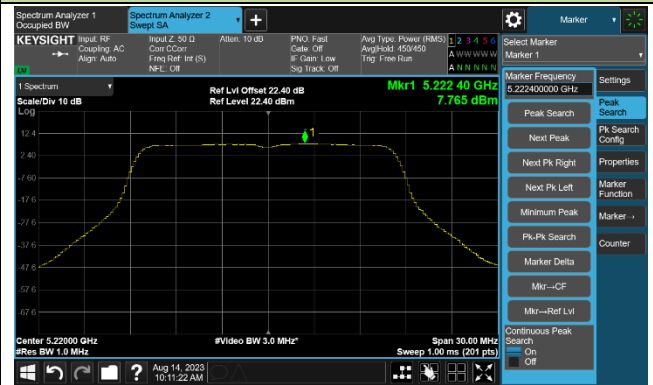


Channel 48 (5240MHz)

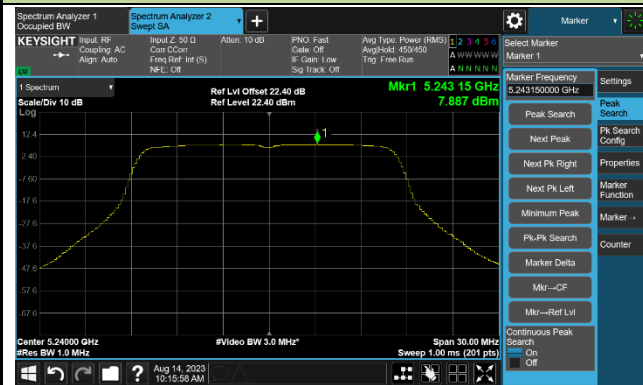

Channel 52 (5260MHz)

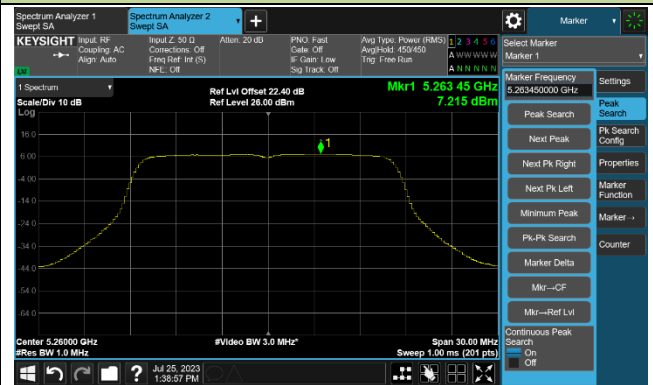

Channel 60 (5300MHz)

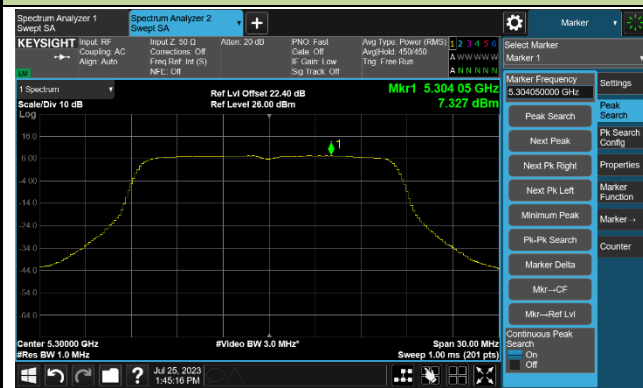

Channel 64 (5320MHz)

