



802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

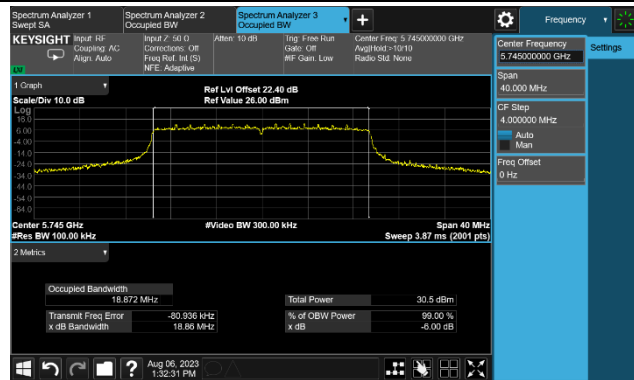

Channel 157 (5785MHz)

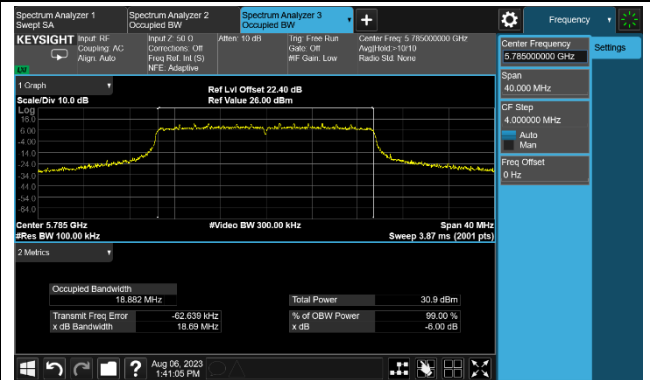


Channel 165 (5825MHz)

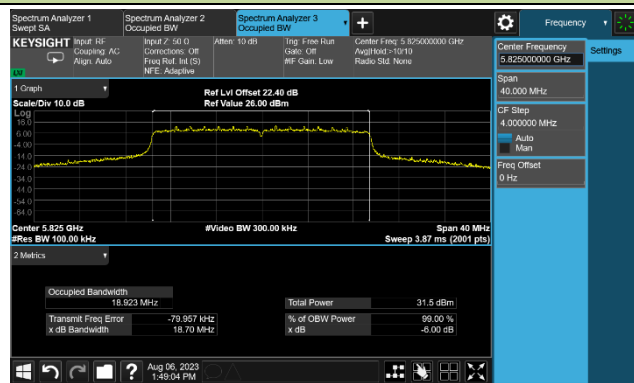


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

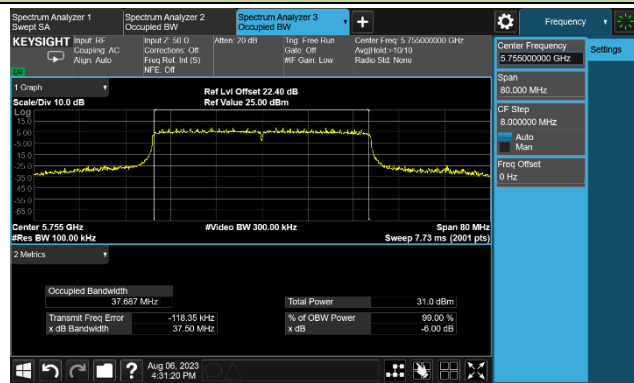


Channel 159 (5795MHz)

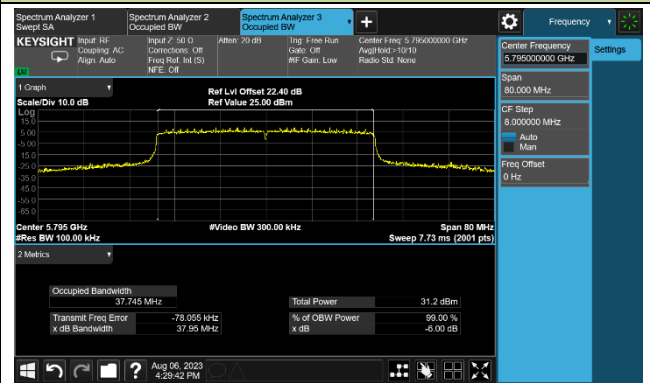



802.11ax-HE80 6dB Bandwidth

Channel 155 (5775MHz)

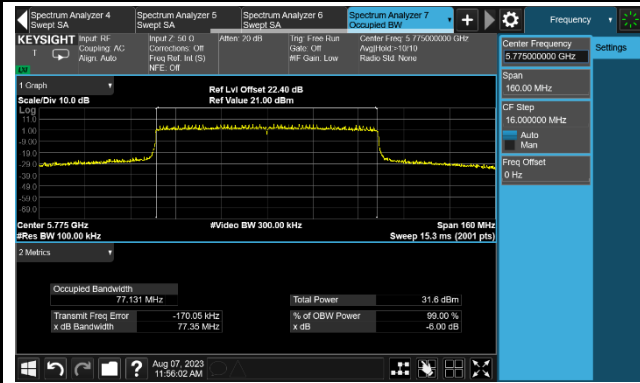

4. Output Power Measurement Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-09-11	Frequency Band	UNII-1

Frequency Band	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Power (dBm)	Limit (dBm)	30 Degree EIRP (dBm)	Limit (dBm)	Result
11a	6Mbps	36	5180	11.08	10.94	14.02	≤ 29.50	20.52	≤ 21.00	Pass
11a	6Mbps	44	5220	11.18	10.62	13.92	≤ 29.50	20.42	≤ 21.00	Pass
11a	6Mbps	48	5240	11.10	10.76	13.94	≤ 29.50	20.44	≤ 21.00	Pass
11ac-VHT20	MCS0	36	5180	11.00	10.73	13.88	≤ 29.50	20.38	≤ 21.00	Pass
11ac-VHT20	MCS0	44	5220	11.05	10.56	13.82	≤ 29.50	20.32	≤ 21.00	Pass
11ac-VHT20	MCS0	48	5240	10.96	10.66	13.82	≤ 29.50	20.32	≤ 21.00	Pass
11ac-VHT40	MCS0	38	5190	11.12	11.20	14.17	≤ 29.50	20.67	≤ 21.00	Pass
11ac-VHT40	MCS0	46	5230	11.28	10.96	14.13	≤ 29.50	20.63	≤ 21.00	Pass
11ac-VHT80	MCS0	42	5210	11.31	10.81	14.08	≤ 29.50	20.58	≤ 21.00	Pass
11ax-HE20	MCS0	36	5180	11.02	10.91	13.98	≤ 29.50	20.48	≤ 21.00	Pass
11ax-HE20	MCS0	44	5220	11.06	10.70	13.89	≤ 29.50	20.39	≤ 21.00	Pass
11ax-HE20	MCS0	48	5240	11.05	10.63	13.86	≤ 29.50	20.36	≤ 21.00	Pass
11ax-HE40	MCS0	38	5190	11.31	10.83	14.09	≤ 29.50	20.59	≤ 21.00	Pass
11ax-HE40	MCS0	46	5230	11.04	11.03	14.05	≤ 29.50	20.55	≤ 21.00	Pass
11ax-HE80	MCS0	42	5210	11.23	10.90	14.08	≤ 29.50	20.58	≤ 21.00	Pass

Note 1: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: EIRP Above 30 Degree Angle (dBm) = Total Power (dBm) + 30 Degree Antenna Gain (dBi).



Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-09-11	Frequency Band	UNII-2A & UNII-2C & UNII-3

Frequency Band	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Power (dBm)	Limit (dBm)	Result
11a	6Mbps	52	5260	18.22	18.19	21.22	≤ 23.26	Pass
11a	6Mbps	60	5300	18.54	18.26	21.41	≤ 23.26	Pass
11a	6Mbps	64	5320	18.72	18.54	21.64	≤ 23.26	Pass
11a	6Mbps	100	5500	18.77	18.51	21.65	≤ 23.26	Pass
11a	6Mbps	116	5580	18.85	18.55	21.71	≤ 23.26	Pass
11a	6Mbps	140	5700	18.41	18.65	21.54	≤ 23.26	Pass
11a	6Mbps	144	5720	18.20	18.48	21.35	≤ 22.10	Pass
11a	6Mbps	149	5745	22.22	22.61	25.43	≤ 29.50	Pass
11a	6Mbps	157	5785	22.59	22.19	25.40	≤ 29.50	Pass
11a	6Mbps	165	5825	22.75	22.49	25.63	≤ 29.50	Pass
11ac-VHT20	MCS0	52	5260	18.90	18.68	21.80	≤ 23.48	Pass
11ac-VHT20	MCS0	60	5300	18.88	18.61	21.76	≤ 23.48	Pass
11ac-VHT20	MCS0	64	5320	18.56	18.62	21.60	≤ 23.48	Pass
11ac-VHT20	MCS0	100	5500	19.17	19.02	22.11	≤ 23.48	Pass
11ac-VHT20	MCS0	116	5580	19.32	18.91	22.13	≤ 23.48	Pass
11ac-VHT20	MCS0	140	5700	18.95	19.10	22.04	≤ 23.48	Pass
11ac-VHT20	MCS0	144	5720	18.63	18.96	21.81	≤ 22.28	Pass
11ac-VHT20	MCS0	149	5745	22.75	22.61	25.69	≤ 29.50	Pass
11ac-VHT20	MCS0	157	5785	22.54	22.69	25.63	≤ 29.50	Pass
11ac-VHT20	MCS0	165	5825	22.83	22.52	25.69	≤ 29.50	Pass
11ac-VHT40	MCS0	54	5270	19.91	19.64	22.79	≤ 23.48	Pass
11ac-VHT40	MCS0	62	5310	20.13	20.18	23.17	≤ 23.48	Pass
11ac-VHT40	MCS0	102	5510	20.29	20.03	23.17	≤ 23.48	Pass
11ac-VHT40	MCS0	110	5550	20.20	19.75	22.99	≤ 23.48	Pass
11ac-VHT40	MCS0	134	5670	19.93	19.86	22.91	≤ 23.48	Pass
11ac-VHT40	MCS0	142	5710	19.59	19.90	22.76	≤ 23.48	Pass
11ac-VHT40	MCS0	151	5755	22.70	22.56	25.64	≤ 29.50	Pass
11ac-VHT40	MCS0	159	5795	22.94	22.50	25.74	≤ 29.50	Pass

Frequency Band	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Power (dBm)	Limit (dBm)	Result
11ac-VHT80	MCS0	58	5290	20.13	20.10	23.13	≤ 23.48	Pass
11ac-VHT80	MCS0	106	5530	20.23	19.89	23.07	≤ 23.48	Pass
11ac-VHT80	MCS0	122	5610	20.13	20.19	23.17	≤ 23.48	Pass
11ac-VHT80	MCS0	138	5690	20.17	20.05	23.12	≤ 23.48	Pass
11ac-VHT80	MCS0	155	5775	20.68	20.65	23.68	≤ 29.50	Pass
11ax-HE20	MCS0	52	5260	19.36	19.19	22.29	≤ 23.48	Pass
11ax-HE20	MCS0	60	5300	19.15	19.06	22.12	≤ 23.48	Pass
11ax-HE20	MCS0	64	5320	19.28	19.07	22.19	≤ 23.48	Pass
11ax-HE20	MCS0	100	5500	19.24	18.94	22.10	≤ 23.48	Pass
11ax-HE20	MCS0	116	5580	19.16	19.01	22.10	≤ 23.48	Pass
11ax-HE20	MCS0	140	5700	19.01	19.17	22.10	≤ 23.48	Pass
11ax-HE20	MCS0	144	5720	18.70	19.34	22.04	≤ 22.39	Pass
11ax-HE20	MCS0	149	5745	22.68	22.82	25.76	≤ 29.50	Pass
11ax-HE20	MCS0	157	5785	22.78	22.53	25.67	≤ 29.50	Pass
11ax-HE20	MCS0	165	5825	22.86	22.51	25.70	≤ 29.50	Pass
11ax-HE40	MCS0	54	5270	19.86	19.59	22.74	23.48	Pass
11ax-HE40	MCS0	62	5310	20.08	19.98	23.04	23.48	Pass
11ax-HE40	MCS0	102	5510	20.13	19.96	23.06	23.48	Pass
11ax-HE40	MCS0	110	5550	20.35	19.57	22.99	23.48	Pass
11ax-HE40	MCS0	134	5670	19.88	19.83	22.87	23.48	Pass
11ax-HE40	MCS0	142	5710	19.93	20.21	23.08	23.48	Pass
11ax-HE40	MCS0	151	5755	22.62	22.21	25.43	29.50	Pass
11ax-HE40	MCS0	159	5795	22.58	22.36	25.48	29.50	Pass
11ax-HE80	MCS0	58	5290	20.26	19.90	23.09	23.48	Pass
11ax-HE80	MCS0	106	5530	20.32	19.87	23.11	23.48	Pass
11ax-HE80	MCS0	122	5610	19.78	19.71	22.76	23.48	Pass
11ax-HE80	MCS0	138	5690	20.25	20.03	23.15	23.48	Pass
11ax-HE80	MCS0	155	5775	21.15	21.09	24.13	29.50	Pass

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power}/10)} + 10^{(\text{Ant 1 Average Power}/10)}\}$.

Note 2: For 5250-5350MHz & 5470-5725MHz, the conducted power limit is as below.

802.11a: $11 + 10 \log_{10}(18.87) - (6.5 - 6) = 23.26 < 23.98\text{dBm}$

802.11ac-VHT20/ac-VHT40/ac-VHT80/ax-HE20/ax-HE40/ax-HE80: $11 + 10 \log_{10}(B) - (6.5 - 6) > 23.98 - (6.5 - 6)$ dBm.

For straddle channel 20MHz Bandwidth 5720MHz, the conducted power limit is as below:

802.11a CH144: $11 + 10 \log_{10} (B) - (6.5 - 6) = 22.10\text{dBm}$, $B = 18.91/2 + 5 = 14.455\text{MHz}$.

802.11ac-HT20 CH144: $11 + 10 \log_{10} (B) - (6.5 - 6) = 22.28\text{dBm}$, $B = 20.10/2 + 5 = 15.05\text{MHz}$.

802.11ax-HE20 CH144: $11 + 10 \log_{10} (B) - (6.5 - 6) = 22.39\text{dBm}$, $B = 20.91/2 + 5 = 15.455\text{MHz}$.



5. Power Spectral Density Measurement Test Result

Test Site	SR5	Test Engineer	Lynn Yang
Test Date	2023-09-09~2023-12-06	Frequency Band	UNII-1 & 2A & 2C

Frequency Band	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	Limit (dBm/ MHz)	Result
				Ant 0	Ant 1				
11a	6Mbps	36	5180	-0.885	-0.988	92.01	2.436	≤ 16.50	Pass
11a	6Mbps	44	5220	-1.136	-1.694	92.01	1.966	≤ 16.50	Pass
11a	6Mbps	48	5240	-1.145	-1.295	92.01	2.153	≤ 16.50	Pass
11a	6Mbps	52	5260	6.455	6.415	92.01	9.807	≤ 10.50	Pass
11a	6Mbps	60	5300	6.640	6.441	92.01	9.914	≤ 10.50	Pass
11a	6Mbps	64	5320	6.891	6.731	92.01	10.184	≤ 10.50	Pass
11a	6Mbps	100	5500	6.723	6.686	92.01	10.076	≤ 10.50	Pass
11a	6Mbps	116	5580	6.701	6.566	92.01	10.006	≤ 10.50	Pass
11a	6Mbps	140	5700	6.495	6.798	92.01	10.021	≤ 10.50	Pass
11a	6Mbps	144	5720	6.421	6.880	92.01	10.029	≤ 10.50	Pass
11ac-VHT20	MCS0	36	5180	-1.199	-1.220	94.10	2.065	≤ 16.50	Pass
11ac-VHT20	MCS0	44	5220	-1.596	-1.764	94.10	1.595	≤ 16.50	Pass
11ac-VHT20	MCS0	48	5240	-1.381	-1.670	94.10	1.751	≤ 16.50	Pass
11ac-VHT20	MCS0	52	5260	6.578	6.555	94.10	9.841	≤ 10.50	Pass
11ac-VHT20	MCS0	60	5300	6.722	6.604	94.10	9.938	≤ 10.50	Pass
11ac-VHT20	MCS0	64	5320	6.675	6.728	94.10	9.976	≤ 10.50	Pass
11ac-VHT20	MCS0	100	5500	6.929	6.828	94.10	10.153	≤ 10.50	Pass
11ac-VHT20	MCS0	116	5580	6.903	6.829	94.10	10.141	≤ 10.50	Pass
11ac-VHT20	MCS0	140	5700	6.731	7.073	94.10	10.180	≤ 10.50	Pass
11ac-VHT20	MCS0	144	5720	6.423	6.951	94.10	9.969	≤ 10.50	Pass
11ac-VHT40	MCS0	38	5190	-3.684	-3.638	92.51	-0.313	≤ 16.50	Pass
11ac-VHT40	MCS0	46	5230	-3.766	-3.974	92.51	-0.520	≤ 16.50	Pass
11ac-VHT40	MCS0	54	5270	4.819	4.631	92.51	8.074	≤ 10.50	Pass
11ac-VHT40	MCS0	62	5310	4.981	5.152	92.51	8.416	≤ 10.50	Pass
11ac-VHT40	MCS0	102	5510	4.824	4.645	92.51	8.084	≤ 10.50	Pass
11ac-VHT40	MCS0	110	5550	4.322	4.407	92.51	7.713	≤ 10.50	Pass
11ac-VHT40	MCS0	134	5670	4.327	4.219	92.51	7.622	≤ 10.50	Pass
11ac-VHT40	MCS0	142	5710	4.631	4.922	92.51	8.127	≤ 10.50	Pass

Frequency Band	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	Limit (dBm/ MHz)	Result
				Ant 0	Ant 1				
11ac-VHT80	MCS0	42	5210	-7.353	-7.560	91.65	-4.066	≤ 16.50	Pass
11ac-VHT80	MCS0	58	5290	1.918	1.818	91.65	5.257	≤ 10.50	Pass
11ac-VHT80	MCS0	106	5530	2.011	1.655	91.65	5.226	≤ 10.50	Pass
11ac-VHT80	MCS0	122	5610	1.852	1.956	91.65	5.293	≤ 10.50	Pass
11ac-VHT80	MCS0	138	5690	1.936	1.980	91.65	5.347	≤ 10.50	Pass
11ax-HE20	MCS0	36	5180	-1.545	-1.615	93.95	1.701	≤ 16.50	Pass
11ax-HE20	MCS0	44	5220	-1.691	-2.252	93.95	1.319	≤ 16.50	Pass
11ax-HE20	MCS0	48	5240	-1.581	-1.892	93.95	1.548	≤ 16.50	Pass
11ax-HE20	MCS0	52	5260	6.829	6.648	93.95	10.021	≤ 10.50	Pass
11ax-HE20	MCS0	60	5300	6.615	6.862	93.95	10.022	≤ 10.50	Pass
11ax-HE20	MCS0	64	5320	6.979	6.854	93.95	10.198	≤ 10.50	Pass
11ax-HE20	MCS0	100	5500	6.776	6.693	93.95	10.016	≤ 10.50	Pass
11ax-HE20	MCS0	116	5580	6.672	6.473	93.95	9.855	≤ 10.50	Pass
11ax-HE20	MCS0	140	5700	6.872	6.899	93.95	10.167	≤ 10.50	Pass
11ax-HE20	MCS0	144	5720	6.529	6.977	93.95	10.040	≤ 10.50	Pass
11ax-HE40	MCS0	38	5190	-4.130	-4.435	94.76	-1.036	≤ 16.50	Pass
11ax-HE40	MCS0	46	5230	-4.055	-4.428	94.76	-0.993	≤ 16.50	Pass
11ax-HE40	MCS0	54	5270	4.622	4.607	94.76	7.859	≤ 10.50	Pass
11ax-HE40	MCS0	62	5310	5.102	5.110	94.76	8.350	≤ 10.50	Pass
11ax-HE40	MCS0	102	5510	4.871	4.649	94.76	8.005	≤ 10.50	Pass
11ax-HE40	MCS0	110	5550	5.022	4.756	94.76	8.135	≤ 10.50	Pass
11ax-HE40	MCS0	134	5670	4.469	4.466	94.76	7.712	≤ 10.50	Pass
11ax-HE40	MCS0	142	5710	4.686	5.067	94.76	8.125	≤ 10.50	Pass
11ax-HE80	MCS0	42	5210	-7.413	-7.620	94.78	-4.272	≤ 16.50	Pass
11ax-HE80	MCS0	58	5290	2.209	2.121	94.78	5.408	≤ 10.50	Pass
11ax-HE80	MCS0	106	5530	2.241	1.998	94.78	5.364	≤ 10.50	Pass
11ax-HE80	MCS0	122	5610	1.506	1.494	94.78	4.743	≤ 10.50	Pass
11ax-HE80	MCS0	138	5690	2.140	2.065	94.78	5.346	≤ 10.50	Pass

Note: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle ≥ 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\}$.



Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-12-06	Frequency Band	UNII-3

Frequency Band	Data Rate/MCS	Ch. No.	Freq. (MHz)	PSD (dBm/510kHz)		Duty Cycle (%)	Total PSD (dBm/510kHz)	Limit (dBm/500kHz)	Result
				Ant 0	Ant 1				
11a	6Mbps	149	5745	7.806	7.409	92.01	10.984	≤ 29.50	Pass
11a	6Mbps	157	5785	7.974	7.431	92.01	11.083	≤ 29.50	Pass
11a	6Mbps	165	5825	8.297	7.811	92.01	11.433	≤ 29.50	Pass
11ac-VHT20	MCS0	149	5745	7.749	7.517	94.10	10.909	≤ 29.50	Pass
11ac-VHT20	MCS0	157	5785	7.702	7.384	94.10	10.820	≤ 29.50	Pass
11ac-VHT20	MCS0	165	5825	8.055	7.690	94.10	11.151	≤ 29.50	Pass
11ac-VHT40	MCS0	151	5755	4.913	4.621	92.51	8.118	≤ 29.50	Pass
11ac-VHT40	MCS0	159	5795	5.067	4.468	92.51	8.126	≤ 29.50	Pass
11ac-VHT80	MCS0	155	5775	-0.624	-1.094	91.65	2.536	≤ 29.50	Pass
11ax-HE20	MCS0	149	5745	7.486	7.272	93.95	10.662	≤ 29.50	Pass
11ax-HE20	MCS0	157	5785	7.523	7.059	93.95	10.579	≤ 29.50	Pass
11ax-HE20	MCS0	165	5825	7.822	7.342	93.95	10.870	≤ 29.50	Pass
11ax-HE40	MCS0	151	5755	4.601	4.406	94.76	7.749	≤ 29.50	Pass
11ax-HE40	MCS0	159	5795	4.820	4.333	94.76	7.827	≤ 29.50	Pass
11ax-HE80	MCS0	155	5775	0.046	-0.014	94.78	3.259	≤ 29.50	Pass


Note 1: When EUT duty cycle ≥ 98%, Total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/510kHz)

When EUT duty cycle < 98%, Total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/510kHz) + $10 \cdot \log (1/\text{Duty Cycle})$.

Note 2: PSD Limit (dBm/500KHz) = 30 - (6.5 - 6) = 29.50dBm/MHz.

802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

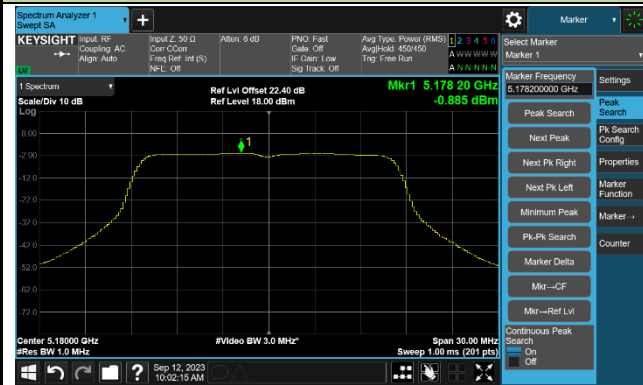

Channel 44 (5220MHz)




Channel 48 (5240MHz)

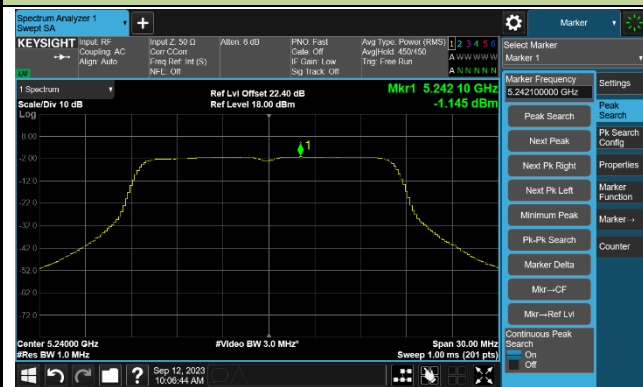


Channel 52 (5260MHz)



Channel 60 (5300MHz)

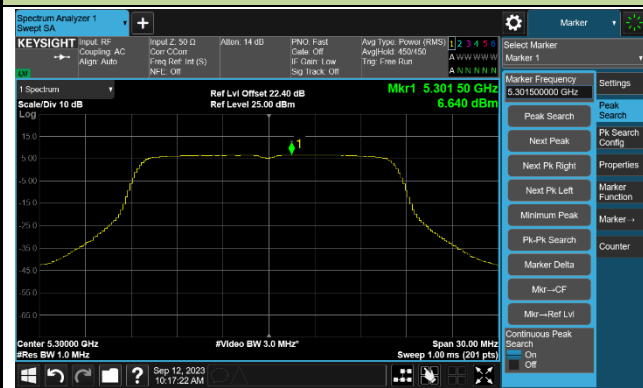


Channel 64 (5320MHz)

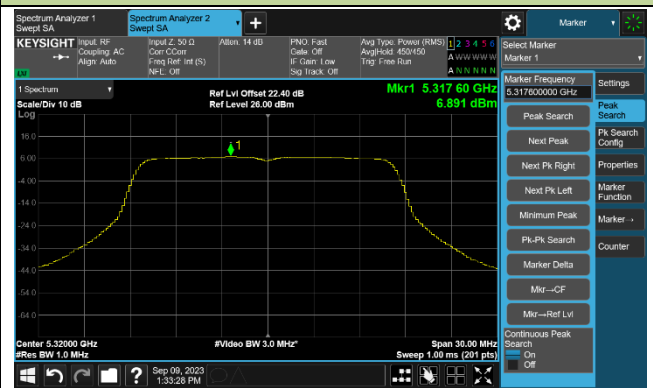

802.11a Power Spectral Density - Ant 0


Channel 100 (5500MHz)

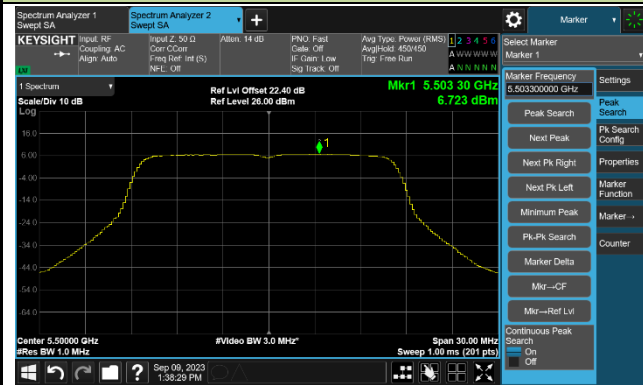

Channel 116 (5580MHz)



Channel 140 (5700MHz)

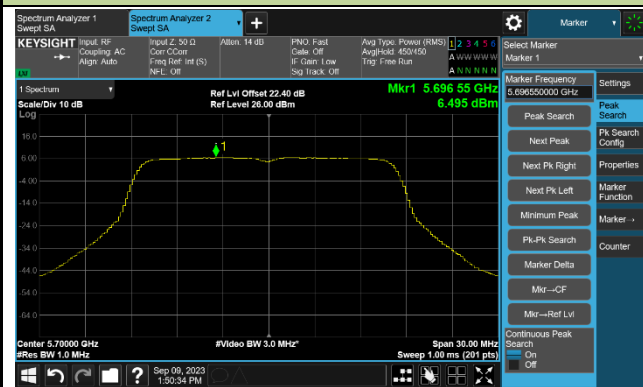

Channel 144 (5720MHz)




Channel 149 (5745MHz)



Channel 157 (5785MHz)



Channel 165 (5825MHz)

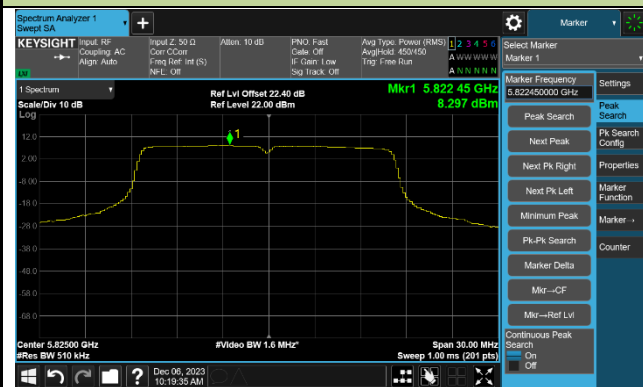

802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)

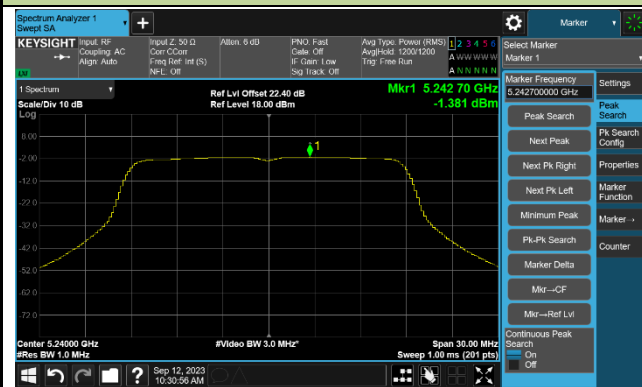

Channel 52 (5260MHz)



Channel 60 (5300MHz)




Channel 64 (5320MHz)




802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 100 (5500MHz)

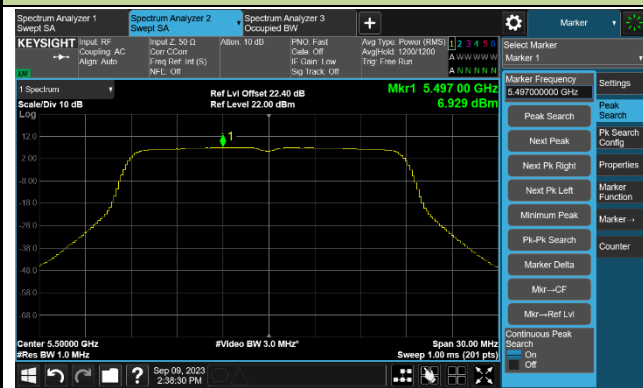


Channel 116 (5580MHz)

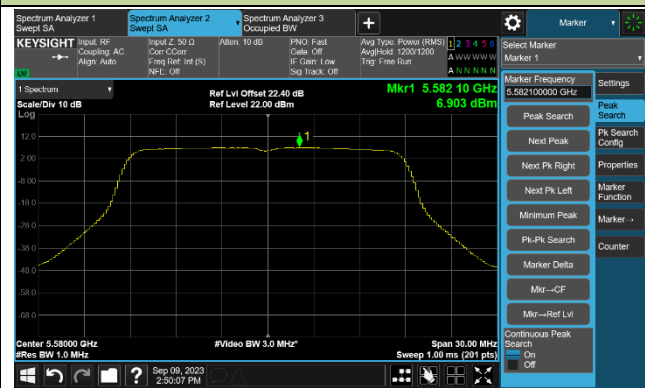

Channel 140 (5700MHz)

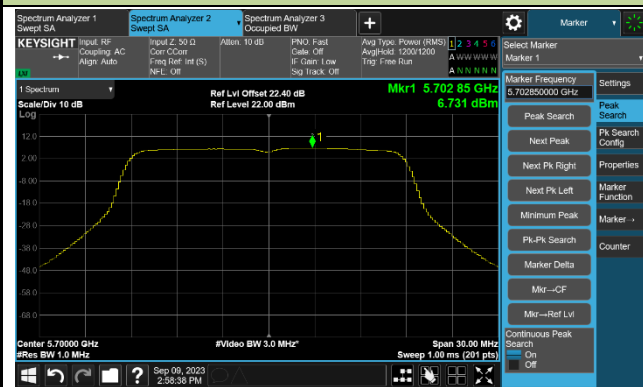


Channel 144 (5720MHz)

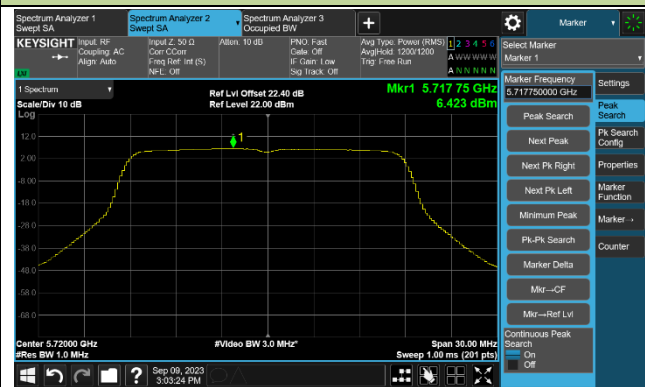


Channel 149 (5745MHz)



Channel 157 (5785MHz)

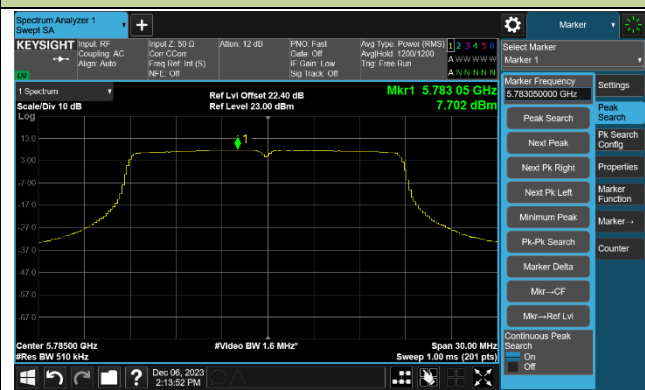

Channel 165 (5825MHz)

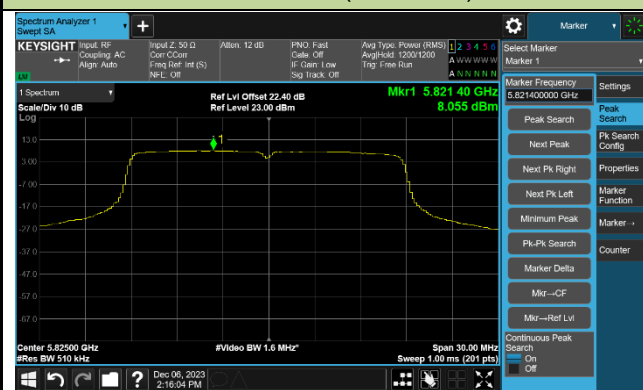


802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)




Channel 46 (5230MHz)

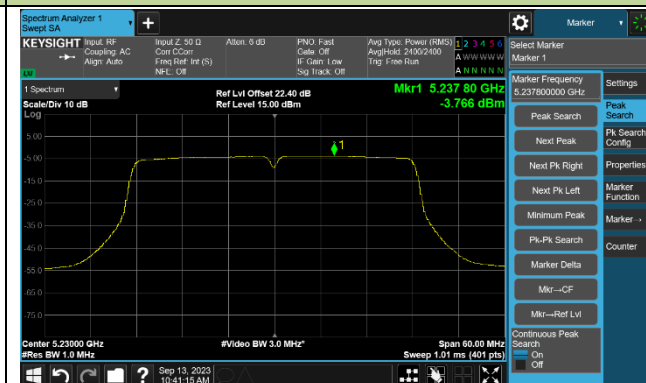

Channel 54 (5270MHz)

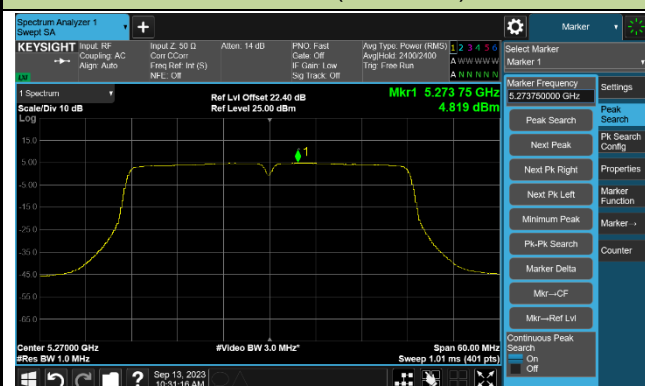


Channel 62 (5310MHz)

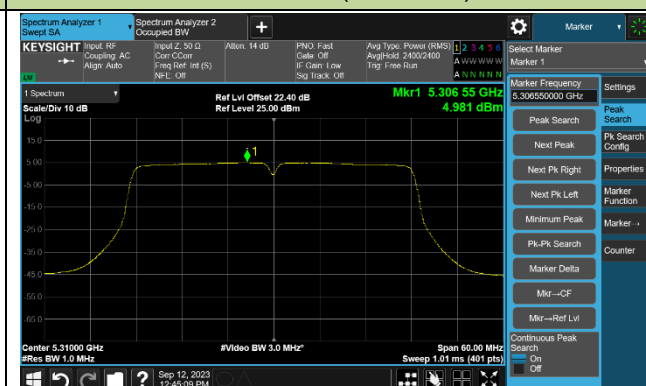

Channel 102 (5510MHz)




Channel 110 (5550MHz)

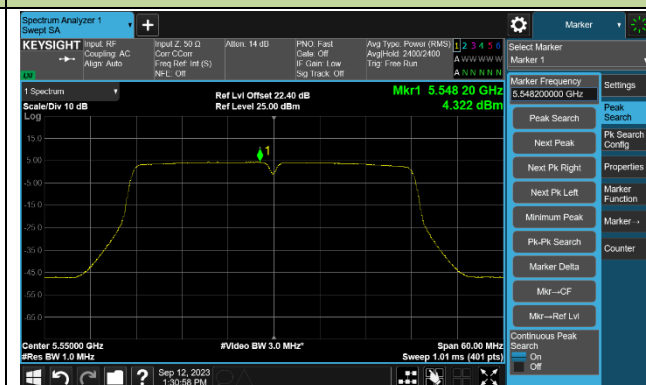

802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 134 (5670MHz)

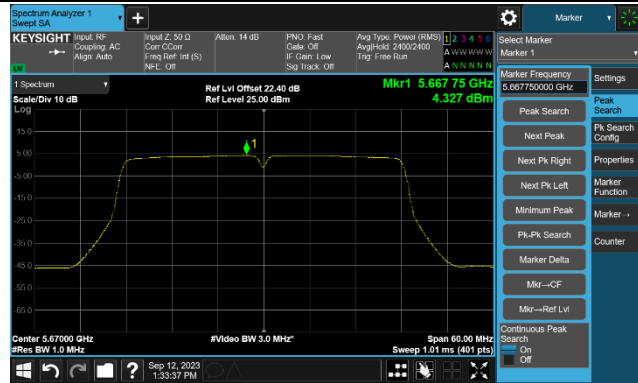


Channel 142 (5710MHz)



Channel 151 (5755MHz)

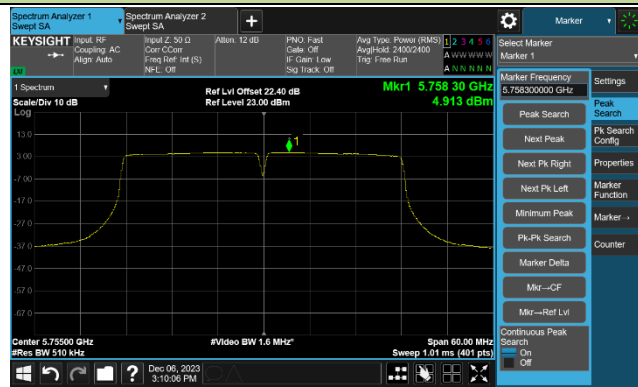


Channel 159 (5795MHz)

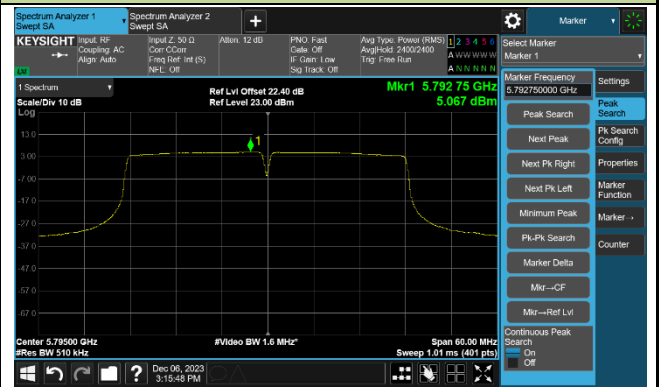

802.11ac-VHT80 Power Spectral Density - Ant 0

Channel 42 (5210MHz)

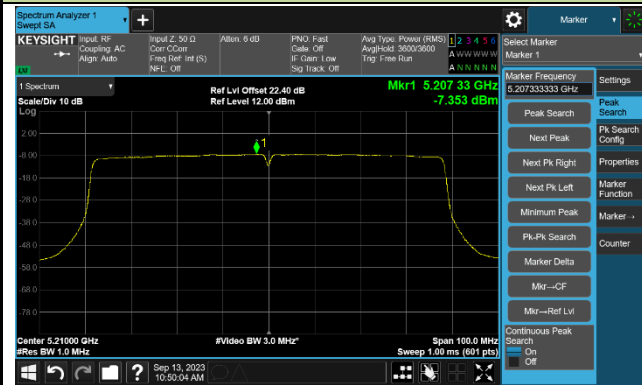

Channel 58 (5290MHz)




Channel 106 (5530MHz)




Channel 122 (5610MHz)



Channel 138 (5690MHz)

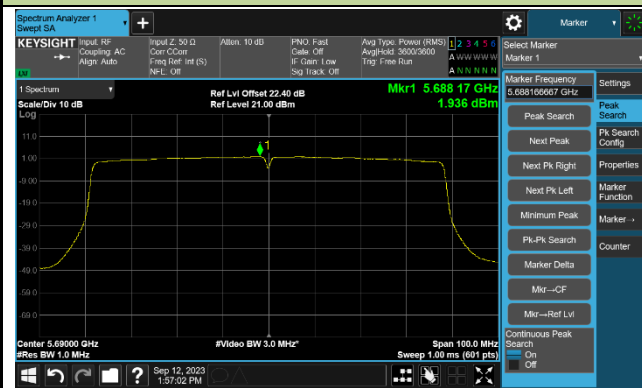


Channel 155 (5775MHz)

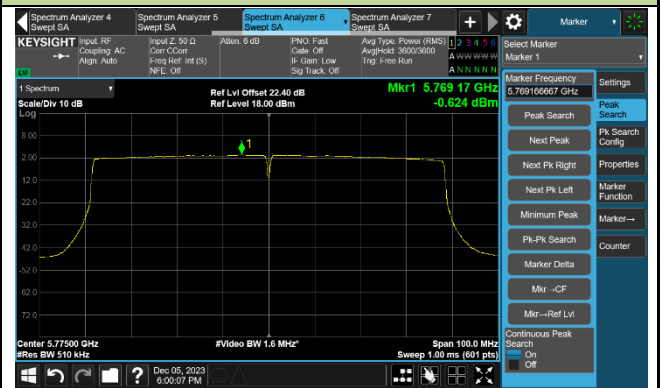

802.11ax-HE20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

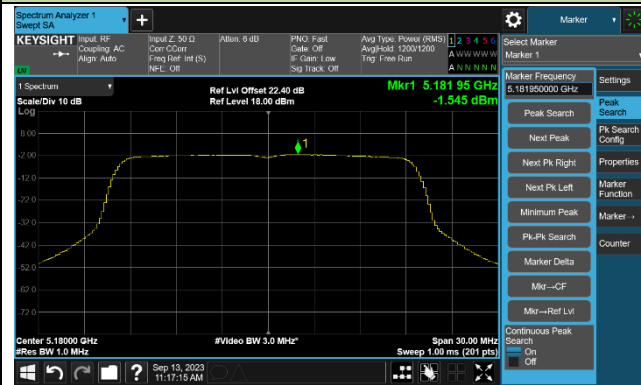

Channel 44 (5220MHz)




Channel 48 (5240MHz)

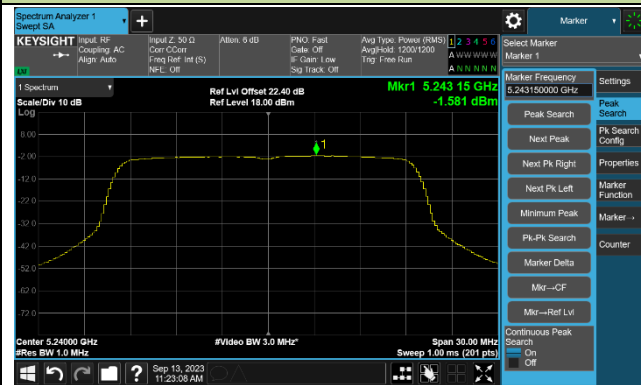

Channel 52 (5260MHz)



Channel 60 (5300MHz)

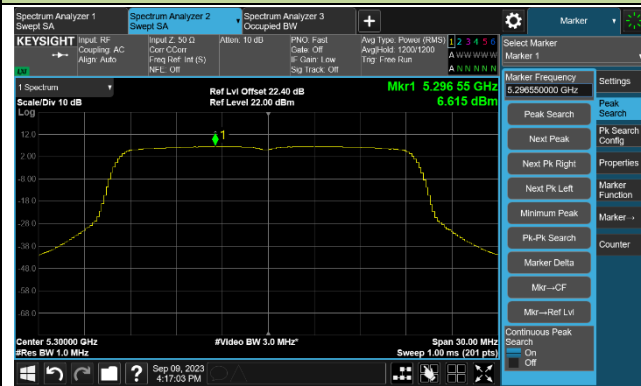

Channel 64 (5320MHz)





802.11ax-HE20 Power Spectral Density - Ant 0


Channel 100 (5500MHz)



Channel 116 (5580MHz)



Channel 140 (5700MHz)

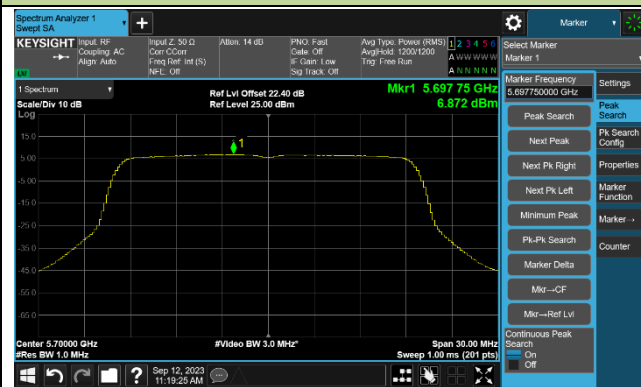

Channel 144 (5720MHz)



Channel 149 (5745MHz)



Channel 157 (5785MHz)




Channel 165 (5825MHz)





802.11ax-HE40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

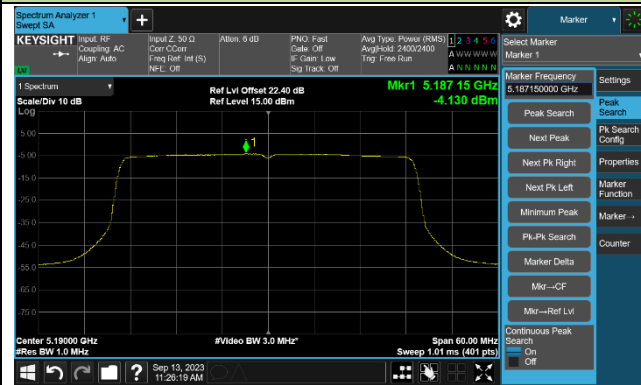


Channel 46 (5230MHz)




Channel 54 (5270MHz)

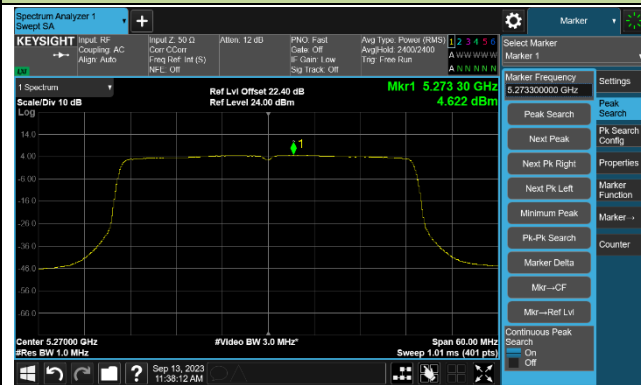


Channel 62 (5310MHz)

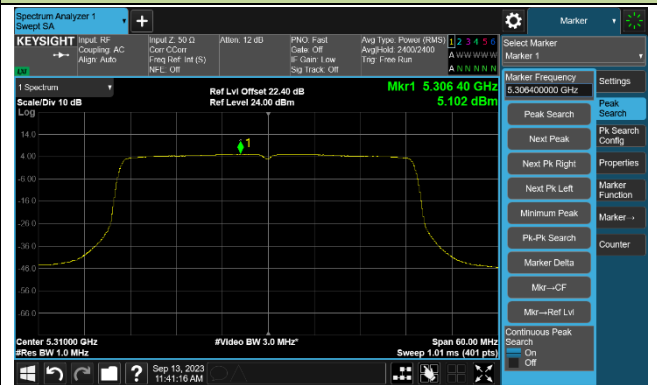

Channel 102 (5510MHz)

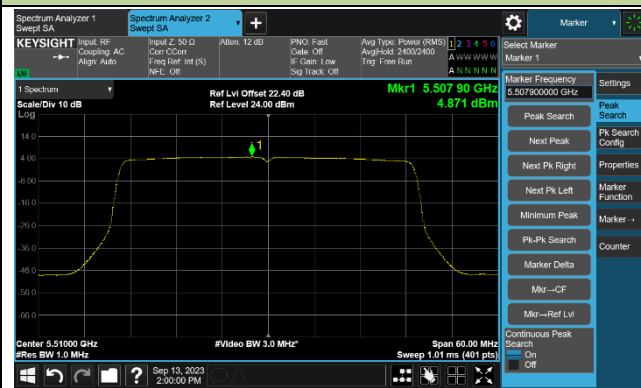


Channel 110 (5550MHz)

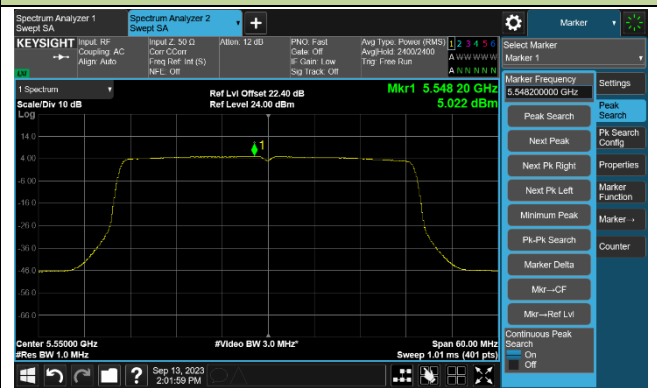


802.11ax-HE40 Power Spectral Density - Ant 0


Channel 134 (5670MHz)

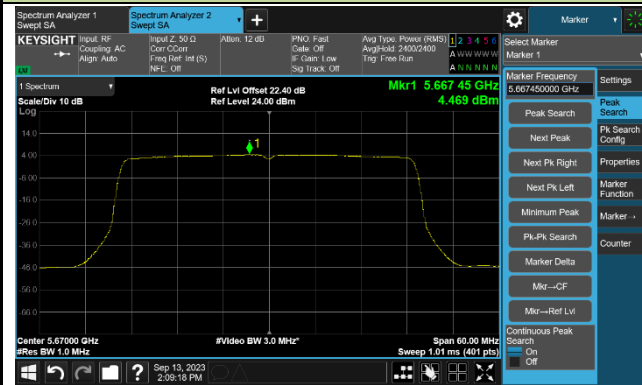

Channel 142 (5710MHz)

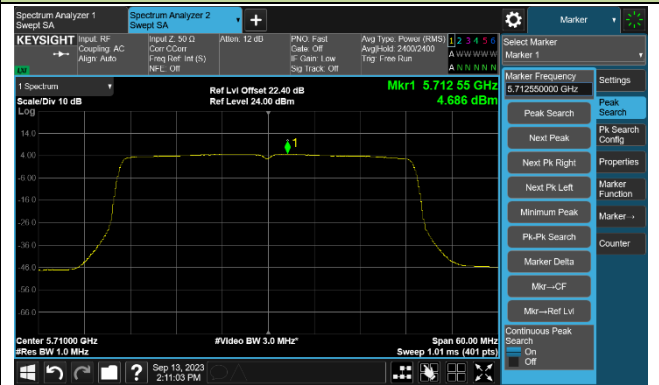

Channel 151 (5755MHz)

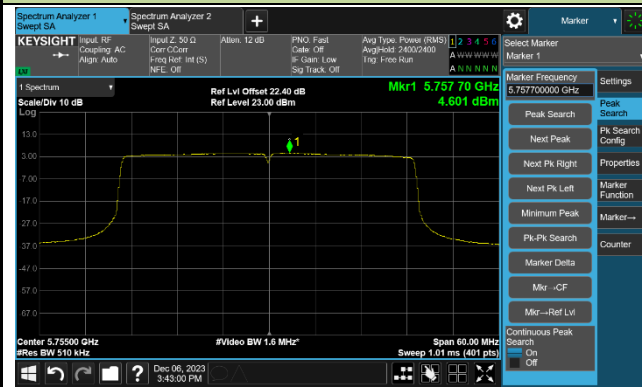

Channel 159 (5795MHz)




802.11ax-HE80 Power Spectral Density - Ant 0


Channel 42 (5210MHz)



Channel 58 (5290MHz)

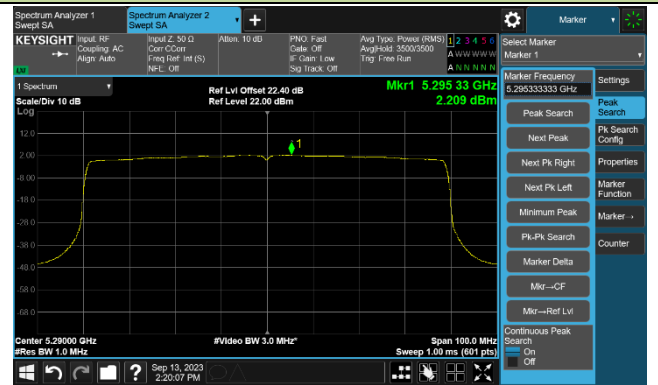


Channel 106 (5530MHz)

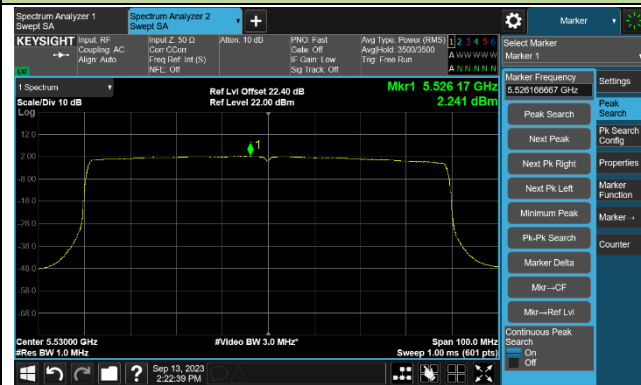


Channel 122 (5610MHz)



Channel 138 (5690MHz)

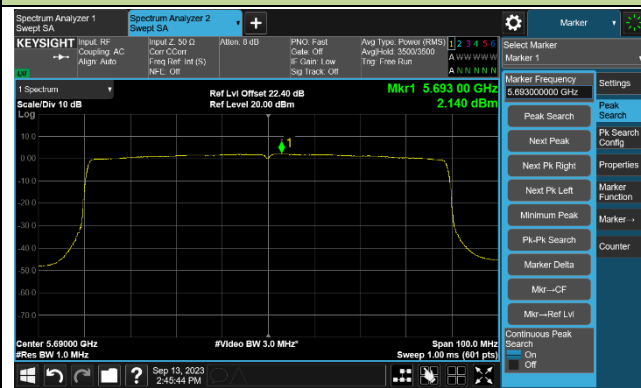

Channel 155 (5775MHz)

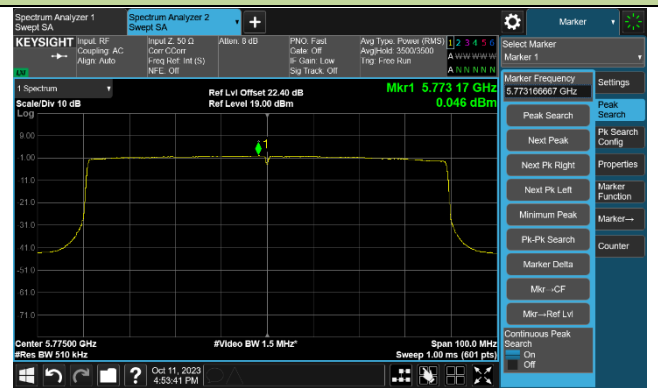

802.11a Power Spectral Density - Ant 1

Channel 36 (5180MHz)



Channel 44 (5220MHz)




Channel 48 (5240MHz)



Channel 52 (5260MHz)



Channel 60 (5300MHz)

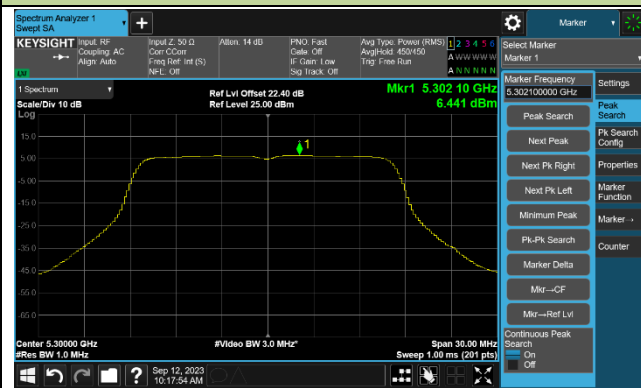

Channel 64 (5320MHz)

