



802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

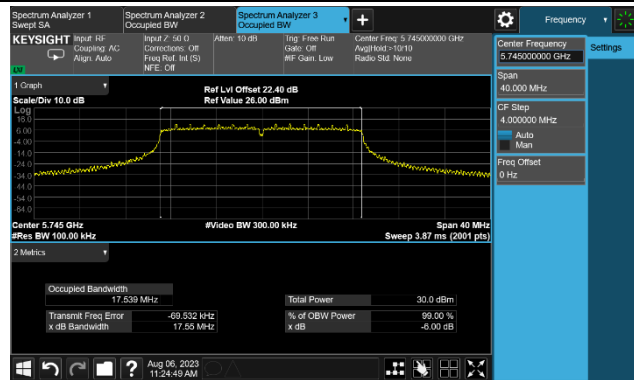

Channel 157 (5785MHz)

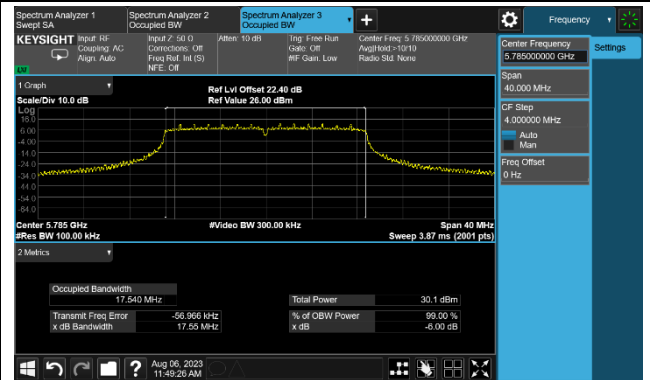


Channel 165 (5825MHz)

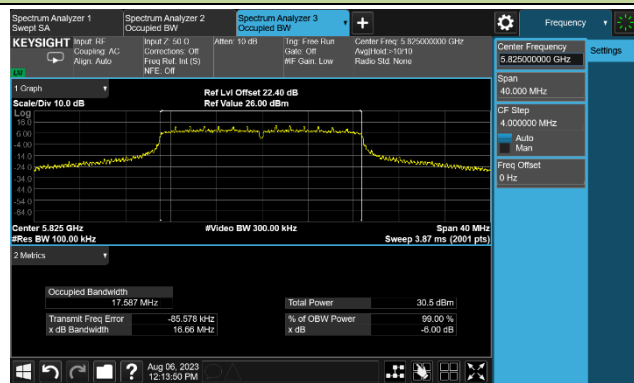


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

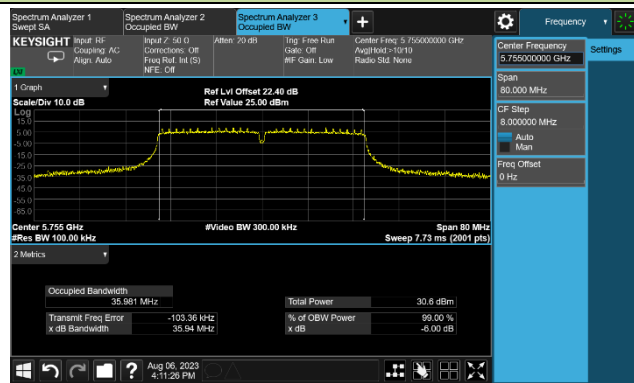


Channel 159 (5795MHz)

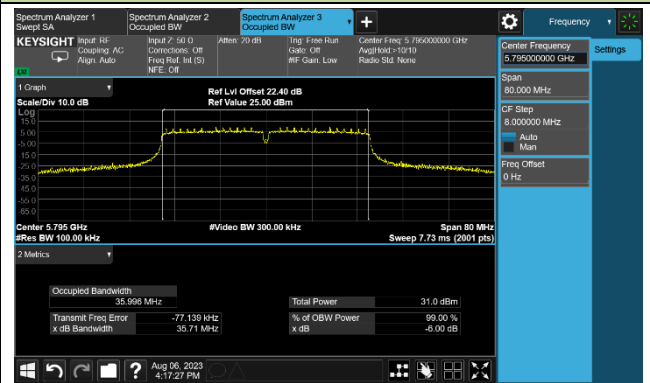




802.11ac-VHT80 6dB Bandwidth

Channel 155 (5775MHz)

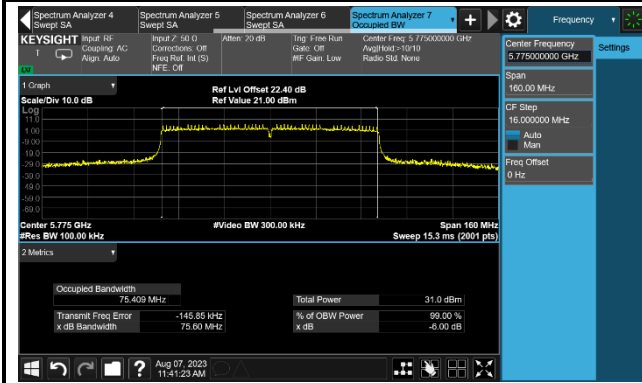


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

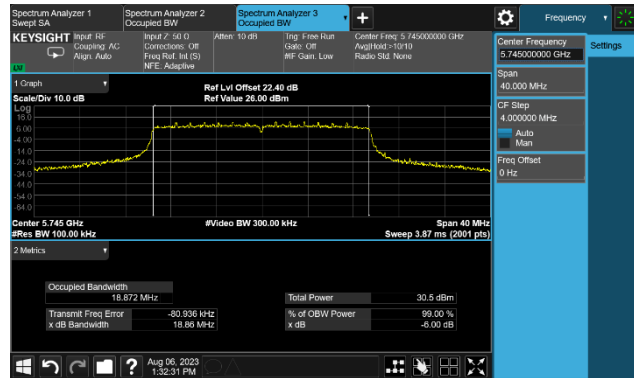

Channel 157 (5785MHz)

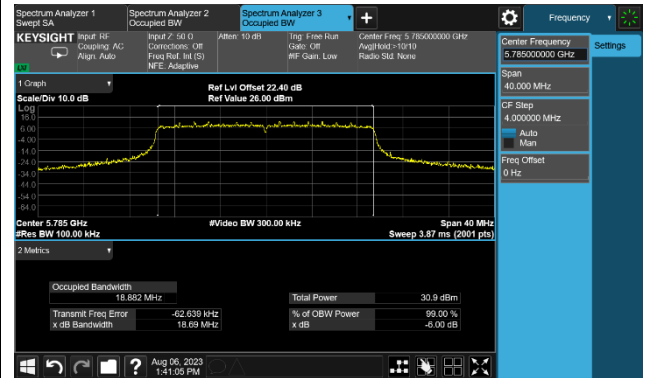


Channel 165 (5825MHz)

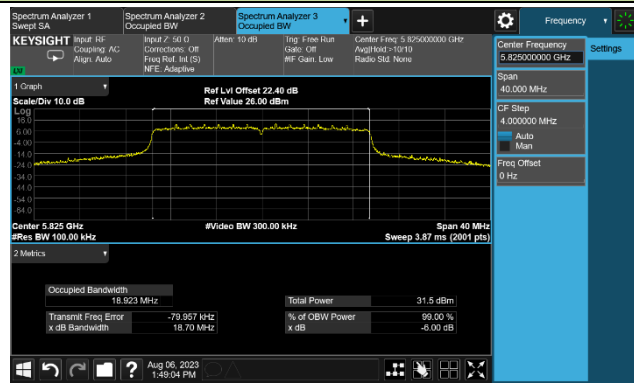


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

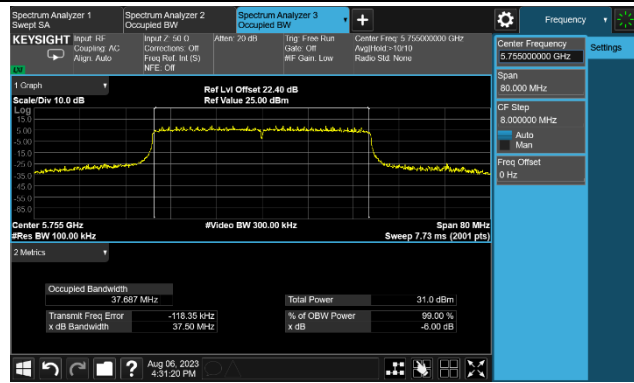


Channel 159 (5795MHz)

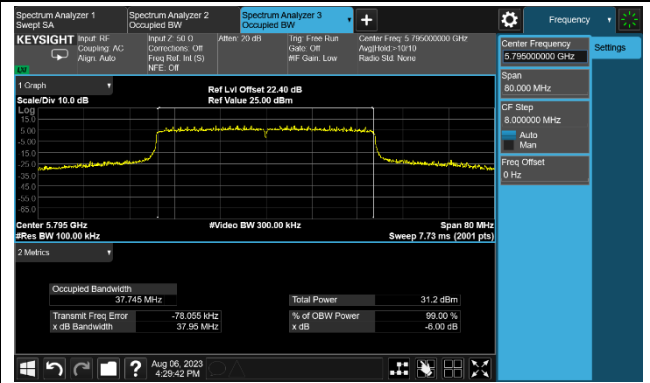

802.11ax-HE80 6dB Bandwidth

Channel 155 (5775MHz)

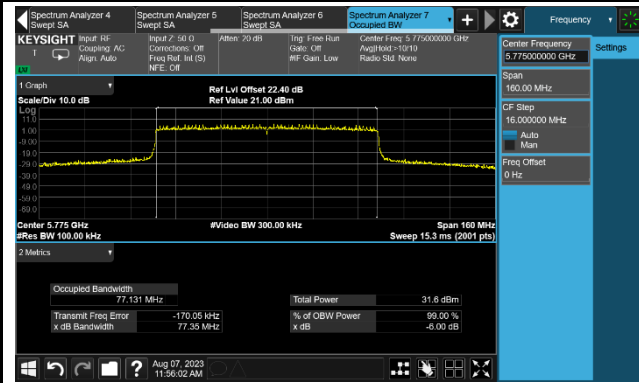



4. Output Power Measurement Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-12-06	Frequency Band	UNII-1

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	30 Degree EIRP (dBm)	Limit (dBm)	Result
11a	6Mbps	36	5180	17.71	17.65	20.69	30.00	20.69	21.00	Pass
11a	6Mbps	44	5220	17.46	17.52	20.50	30.00	20.50	21.00	Pass
11a	6Mbps	48	5240	17.56	17.44	20.51	30.00	20.51	21.00	Pass
11ac-VHT20	MCS0	36	5180	17.46	17.39	20.44	30.00	20.44	21.00	Pass
11ac-VHT20	MCS0	44	5220	17.43	17.41	20.43	30.00	20.43	21.00	Pass
11ac-VHT20	MCS0	48	5240	17.57	17.40	20.50	30.00	20.50	21.00	Pass
11ac-VHT40	MCS0	38	5190	17.46	17.43	20.46	30.00	20.46	21.00	Pass
11ac-VHT40	MCS0	46	5230	17.65	17.60	20.64	30.00	20.64	21.00	Pass
11ac-VHT80	MCS0	42	5210	17.73	17.84	20.80	30.00	20.80	21.00	Pass
11ax-HE20	MCS0	36	5180	17.50	17.41	20.47	30.00	20.47	21.00	Pass
11ax-HE20	MCS0	44	5220	17.46	17.39	20.44	30.00	20.44	21.00	Pass
11ax-HE20	MCS0	48	5240	17.51	17.36	20.45	30.00	20.45	21.00	Pass
11ax-HE40	MCS0	38	5190	17.45	17.40	20.44	30.00	20.44	21.00	Pass
11ax-HE40	MCS0	46	5230	17.43	17.41	20.43	30.00	20.43	21.00	Pass
11ax-HE80	MCS0	42	5210	17.34	17.48	20.42	30.00	20.42	21.00	Pass

Note 1: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: Max EIRP Above 30 Degree Angle (dBm) = Total Average Power (dBm) + 30 Degree Antenna Gain (dBi).



Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-12-06	Frequency Band	UNII-2A & UNII-2C & UNII-3

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
11a	6Mbps	52	5260	19.62	19.11	22.38	23.78	Pass
11a	6Mbps	60	5300	19.45	19.35	22.41	23.91	Pass
11a	6Mbps	64	5320	19.53	19.44	22.50	23.77	Pass
11a	6Mbps	100	5500	19.35	19.27	22.32	23.76	Pass
11a	6Mbps	116	5580	19.64	19.36	22.51	23.82	Pass
11a	6Mbps	140	5700	19.31	19.70	22.52	23.84	Pass
11a	6Mbps	144	5720	19.55	19.77	22.67	23.77	Pass
11a	6Mbps	149	5745	22.22	22.61	25.43	30.00	Pass
11a	6Mbps	157	5785	22.59	22.19	25.40	30.00	Pass
11a	6Mbps	165	5825	22.75	22.49	25.63	30.00	Pass
11ac-VHT20	MCS0	52	5260	19.94	19.69	22.83	23.98	Pass
11ac-VHT20	MCS0	60	5300	19.83	19.50	22.68	23.98	Pass
11ac-VHT20	MCS0	64	5320	19.82	19.56	22.70	23.98	Pass
11ac-VHT20	MCS0	100	5500	19.52	19.71	22.63	23.98	Pass
11ac-VHT20	MCS0	116	5580	19.64	19.87	22.77	23.98	Pass
11ac-VHT20	MCS0	140	5700	19.58	19.89	22.75	23.98	Pass
11ac-VHT20	MCS0	144	5720	19.05	19.49	22.29	23.98	Pass
11ac-VHT20	MCS0	149	5745	22.75	22.61	25.69	30.00	Pass
11ac-VHT20	MCS0	157	5785	22.54	22.69	25.63	30.00	Pass
11ac-VHT20	MCS0	165	5825	22.83	22.52	25.69	30.00	Pass
11ac-VHT40	MCS0	54	5270	20.60	20.26	23.44	23.98	Pass
11ac-VHT40	MCS0	62	5310	20.89	20.56	23.74	23.98	Pass
11ac-VHT40	MCS0	102	5510	20.91	20.53	23.73	23.98	Pass
11ac-VHT40	MCS0	110	5550	20.79	20.37	23.60	23.98	Pass
11ac-VHT40	MCS0	134	5670	20.86	20.78	23.83	23.98	Pass
11ac-VHT40	MCS0	142	5710	20.17	20.75	23.48	23.98	Pass
11ac-VHT40	MCS0	151	5755	22.70	22.56	25.64	30.00	Pass
11ac-VHT40	MCS0	159	5795	22.94	22.50	25.74	30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
11ac-VHT80	MCS0	58	5290	20.39	20.10	23.26	23.98	Pass
11ac-VHT80	MCS0	106	5530	19.70	19.52	22.62	23.98	Pass
11ac-VHT80	MCS0	122	5610	20.47	20.54	23.52	23.98	Pass
11ac-VHT80	MCS0	138	5690	20.84	20.76	23.81	23.98	Pass
11ac-VHT80	MCS0	155	5775	20.86	20.56	23.72	30.00	Pass
11ax-HE20	MCS0	52	5260	20.10	20.27	23.20	23.98	Pass
11ax-HE20	MCS0	60	5300	20.37	19.92	23.16	23.98	Pass
11ax-HE20	MCS0	64	5320	20.41	19.69	23.08	23.98	Pass
11ax-HE20	MCS0	100	5500	20.16	19.81	23.00	23.98	Pass
11ax-HE20	MCS0	116	5580	20.60	19.58	23.13	23.98	Pass
11ax-HE20	MCS0	140	5700	20.23	20.17	23.21	23.98	Pass
11ax-HE20	MCS0	144	5720	19.94	20.25	23.11	23.98	Pass
11ax-HE20	MCS0	149	5745	22.68	22.82	25.76	30.00	Pass
11ax-HE20	MCS0	157	5785	22.78	22.53	25.67	30.00	Pass
11ax-HE20	MCS0	165	5825	22.86	22.51	25.70	30.00	Pass
11ax-HE40	MCS0	54	5270	20.91	20.78	23.86	23.98	Pass
11ax-HE40	MCS0	62	5310	20.59	20.16	23.39	23.98	Pass
11ax-HE40	MCS0	102	5510	20.89	20.53	23.72	23.98	Pass
11ax-HE40	MCS0	110	5550	20.94	20.65	23.81	23.98	Pass
11ax-HE40	MCS0	134	5670	20.68	20.58	23.64	23.98	Pass
11ax-HE40	MCS0	142	5710	20.05	20.79	23.45	23.98	Pass
11ax-HE40	MCS0	151	5755	22.62	22.21	25.43	30.00	Pass
11ax-HE40	MCS0	159	5795	22.58	22.36	25.48	30.00	Pass
11ax-HE80	MCS0	58	5290	20.64	20.47	23.57	23.98	Pass
11ax-HE80	MCS0	106	5530	18.66	18.54	21.61	23.98	Pass
11ax-HE80	MCS0	122	5610	20.59	20.83	23.72	23.98	Pass
11ax-HE80	MCS0	138	5690	20.71	20.45	23.59	23.98	Pass
11ax-HE80	MCS0	155	5775	21.15	21.09	24.13	30.00	Pass

Note 1: Total Average Power (dBm) = $10 \cdot \log_{10} \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: For 5250-5350MHz & 5470-5725MHz, the conducted power limit is as below.

802.11a: $11 + 10 \log_{10} (18.87) = 23.76 < 23.98\text{dBm}$

802.11ac-VHT20/ac-VHT40/ac-VHT80/ax-HE20/ax-HE40/ax-HE80: $11 + 10 \log_{10} (B) > 23.98\text{dBm}$.

For straddle channel 20MHz Bandwidth 5720MHz, the conducted power limit is as below:

802.11a CH144: $11 + 10 \log_{10} (B) = 22.60\text{dBm}$, $B = 18.91/2 + 5 = 14.455\text{MHz}$.

802.11ac-HT20 CH144: $11 + 10 \log_{10} (B) = 22.78\text{dBm}$, $B = 20.10/2 + 5 = 15.05\text{MHz}$.

802.11ax-HE20 CH144: $11 + 10 \log_{10} (B) = 22.89\text{dBm}$, $B = 20.91/2 + 5 = 15.455\text{MHz}$.



5. Power Spectral Density Measurement Test Result

Test Site	SR5	Test Engineer	Lynn Yang
Test Date	2023-07-25~2023-12-06	Frequency Band	UNII-1 & 2A & 2C

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	Limit (dBm/ MHz)	Result
				Ant 0	Ant 1				
11a	6Mbps	36	5180	5.753	4.871	92.01	8.71	≤ 17.00	Pass
11a	6Mbps	44	5220	5.099	5.147	92.01	8.50	≤ 17.00	Pass
11a	6Mbps	48	5240	5.385	5.080	92.01	8.61	≤ 17.00	Pass
11a	6Mbps	52	5260	7.526	7.215	92.01	10.75	≤ 11.00	Pass
11a	6Mbps	60	5300	7.614	7.327	92.01	10.84	≤ 11.00	Pass
11a	6Mbps	64	5320	7.463	7.238	92.01	10.72	≤ 11.00	Pass
11a	6Mbps	100	5500	7.559	7.338	92.01	10.82	≤ 11.00	Pass
11a	6Mbps	116	5580	7.572	7.364	92.01	10.84	≤ 11.00	Pass
11a	6Mbps	140	5700	7.099	7.709	92.01	10.79	≤ 11.00	Pass
11a	6Mbps	144	5720	7.047	7.800	92.01	10.81	≤ 11.00	Pass
11ac-VHT20	MCS0	36	5180	4.680	4.500	94.10	7.87	≤ 17.00	Pass
11ac-VHT20	MCS0	44	5220	4.842	4.853	94.10	8.12	≤ 17.00	Pass
11ac-VHT20	MCS0	48	5240	5.020	4.792	94.10	8.18	≤ 17.00	Pass
11ac-VHT20	MCS0	52	5260	7.282	7.303	94.10	10.57	≤ 11.00	Pass
11ac-VHT20	MCS0	60	5300	7.760	7.343	94.10	10.83	≤ 11.00	Pass
11ac-VHT20	MCS0	64	5320	7.601	7.126	94.10	10.64	≤ 11.00	Pass
11ac-VHT20	MCS0	100	5500	7.337	7.444	94.10	10.67	≤ 11.00	Pass
11ac-VHT20	MCS0	116	5580	7.291	7.681	94.10	10.76	≤ 11.00	Pass
11ac-VHT20	MCS0	140	5700	7.429	7.508	94.10	10.74	≤ 11.00	Pass
11ac-VHT20	MCS0	144	5720	7.313	7.776	94.10	10.83	≤ 11.00	Pass
11ac-VHT40	MCS0	38	5190	2.112	2.239	92.51	5.52	≤ 17.00	Pass
11ac-VHT40	MCS0	46	5230	2.141	2.003	92.51	5.42	≤ 17.00	Pass
11ac-VHT40	MCS0	54	5270	5.314	5.231	92.51	8.62	≤ 11.00	Pass
11ac-VHT40	MCS0	62	5310	5.849	5.640	92.51	9.09	≤ 11.00	Pass
11ac-VHT40	MCS0	102	5510	5.728	5.597	92.51	9.01	≤ 11.00	Pass
11ac-VHT40	MCS0	110	5550	5.550	5.402	92.51	8.83	≤ 11.00	Pass
11ac-VHT40	MCS0	134	5670	5.622	5.532	92.51	8.93	≤ 11.00	Pass
11ac-VHT40	MCS0	142	5710	5.926	6.247	92.51	9.44	≤ 11.00	Pass

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	Limit (dBm/ MHz)	Result
				Ant 0	Ant 1				
11ac-VHT80	MCS0	42	5210	-0.929	-0.857	91.65	2.50	≤ 17.00	Pass
11ac-VHT80	MCS0	58	5290	2.242	1.979	91.65	5.50	≤ 11.00	Pass
11ac-VHT80	MCS0	106	5530	1.269	1.075	91.65	4.56	≤ 11.00	Pass
11ac-VHT80	MCS0	122	5610	2.249	2.319	91.65	5.67	≤ 11.00	Pass
11ac-VHT80	MCS0	138	5690	2.727	2.676	91.65	6.09	≤ 11.00	Pass
11ax-HE20	MCS0	36	5180	4.690	4.685	93.95	7.97	≤ 17.00	Pass
11ax-HE20	MCS0	44	5220	4.533	4.571	93.95	7.83	≤ 17.00	Pass
11ax-HE20	MCS0	48	5240	4.754	4.624	93.95	7.97	≤ 17.00	Pass
11ax-HE20	MCS0	52	5260	7.448	7.689	93.95	10.85	≤ 11.00	Pass
11ax-HE20	MCS0	60	5300	7.534	7.400	93.95	10.75	≤ 11.00	Pass
11ax-HE20	MCS0	64	5320	7.604	7.347	93.95	10.76	≤ 11.00	Pass
11ax-HE20	MCS0	100	5500	7.801	7.253	93.95	10.82	≤ 11.00	Pass
11ax-HE20	MCS0	116	5580	7.561	7.171	93.95	10.65	≤ 11.00	Pass
11ax-HE20	MCS0	140	5700	7.601	7.475	93.95	10.82	≤ 11.00	Pass
11ax-HE20	MCS0	144	5720	7.461	7.709	93.95	10.87	≤ 11.00	Pass
11ax-HE40	MCS0	38	5190	1.974	1.796	94.76	5.13	≤ 17.00	Pass
11ax-HE40	MCS0	46	5230	1.830	1.823	94.76	5.07	≤ 17.00	Pass
11ax-HE40	MCS0	54	5270	5.769	5.473	94.76	8.87	≤ 11.00	Pass
11ax-HE40	MCS0	62	5310	5.088	4.879	94.76	8.23	≤ 11.00	Pass
11ax-HE40	MCS0	102	5510	5.433	5.426	94.76	8.67	≤ 11.00	Pass
11ax-HE40	MCS0	110	5550	5.917	5.891	94.76	9.15	≤ 11.00	Pass
11ax-HE40	MCS0	134	5670	5.381	5.262	94.76	8.57	≤ 11.00	Pass
11ax-HE40	MCS0	142	5710	5.146	5.612	94.76	8.63	≤ 11.00	Pass
11ax-HE80	MCS0	42	5210	-1.239	-1.110	94.78	2.07	≤ 17.00	Pass
11ax-HE80	MCS0	58	5290	2.769	2.676	94.78	5.97	≤ 11.00	Pass
11ax-HE80	MCS0	106	5530	1.105	0.883	94.78	4.24	≤ 11.00	Pass
11ax-HE80	MCS0	122	5610	2.860	2.930	94.78	6.14	≤ 11.00	Pass
11ax-HE80	MCS0	138	5690	2.983	2.901	94.78	6.19	≤ 11.00	Pass

Note 1: When EUT duty cycle ≥ 98%, Total PSD (dBm/500kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/500kHz)

When EUT duty cycle < 98%, Total PSD (dBm/500kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/500kHz) + $10 \cdot \log (1/\text{Duty Cycle})$.



Test Site	SR5	Test Engineer	Lynn Yang
Test Date	2023-07-25~2023-12-06	Frequency Band	UNII-3

Test Mode	Data Rate/ MCS	Ch. No.	Freq. (MHz)	PSD (dBm/510kHz)		Duty Cycle (%)	Total PSD (dBm/510kHz)	Limit (dBm/500kHz)	Result
				Ant 0	Ant 1				
11a	6Mbps	149	5745	7.806	7.409	92.01	10.98	≤ 30.00	Pass
11a	6Mbps	157	5785	7.974	7.431	92.01	11.08	≤ 30.00	Pass
11a	6Mbps	165	5825	8.297	7.811	92.01	11.43	≤ 30.00	Pass
11ac-VHT20	MCS0	149	5745	7.749	7.517	94.10	10.91	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	7.702	7.384	94.10	10.82	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	8.055	7.690	94.10	11.15	≤ 30.00	Pass
11ac-VHT40	MCS0	151	5755	4.913	4.621	92.51	8.12	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	5.067	4.468	92.51	8.13	≤ 30.00	Pass
11ac-VHT80	MCS0	155	5775	-0.149	-0.417	91.65	3.11	≤ 30.00	Pass
11ax-HE20	MCS0	149	5745	7.486	7.272	93.95	10.66	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	7.523	7.059	93.95	10.58	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	7.822	7.342	93.95	10.87	≤ 30.00	Pass
11ax-HE40	MCS0	151	5755	4.601	4.406	94.76	7.75	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	4.820	4.333	94.76	7.83	≤ 30.00	Pass
11ax-HE80	MCS0	155	5775	0.073	-0.296	94.78	3.14	≤ 30.00	Pass

Note 1: When EUT duty cycle ≥ 98%, Total PSD (dBm/500kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/500kHz)

When EUT duty cycle < 98%, Total PSD (dBm/500kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/500kHz) + $10 \cdot \log (1/\text{Duty Cycle})$.

802.11a Power Spectral Density - Ant 0

Channel 36 (5180MHz)




Channel 44 (5220MHz)




Channel 48 (5240MHz)




Channel 52 (5260MHz)

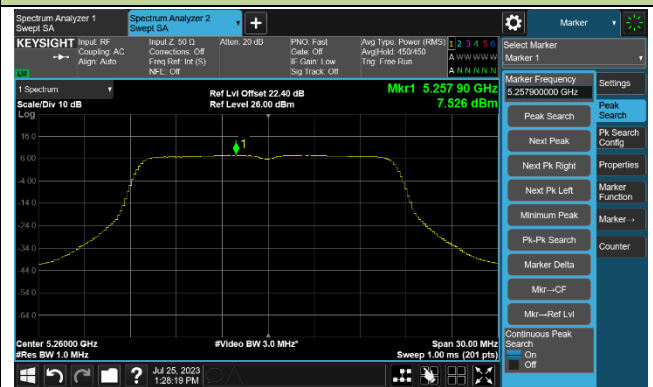

Channel 60 (5300MHz)

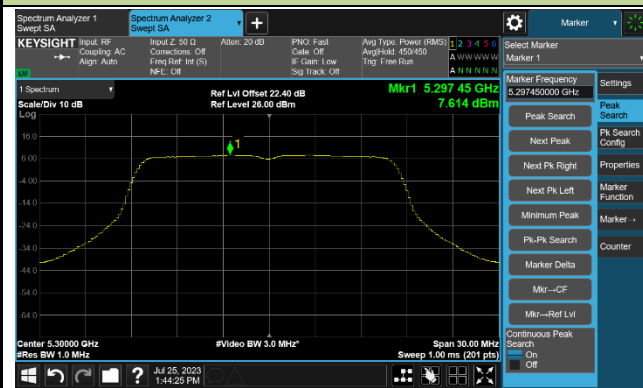


Channel 64 (5320MHz)

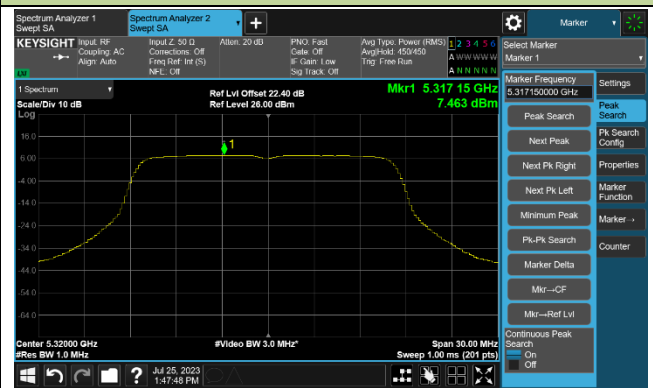


802.11a Power Spectral Density - Ant 0


Channel 100 (5500MHz)

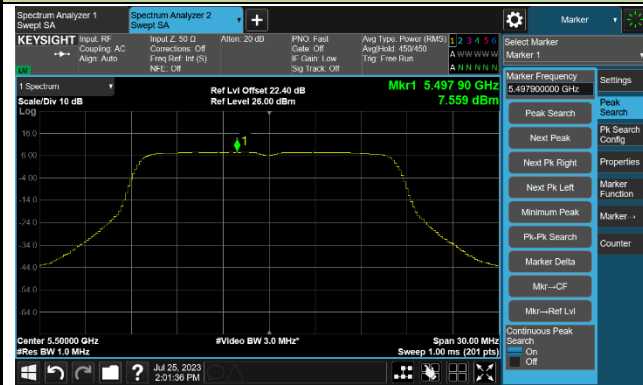

Channel 116 (5580MHz)

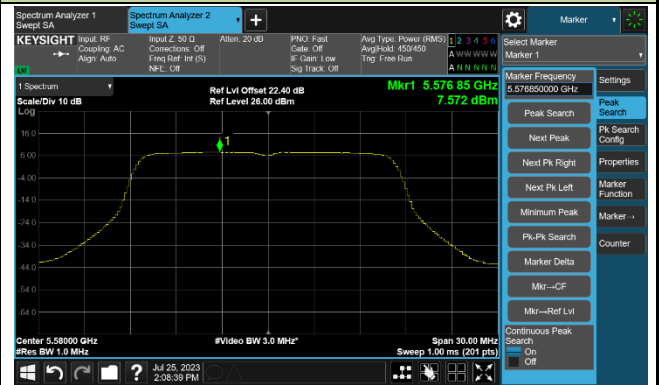

Channel 140 (5700MHz)

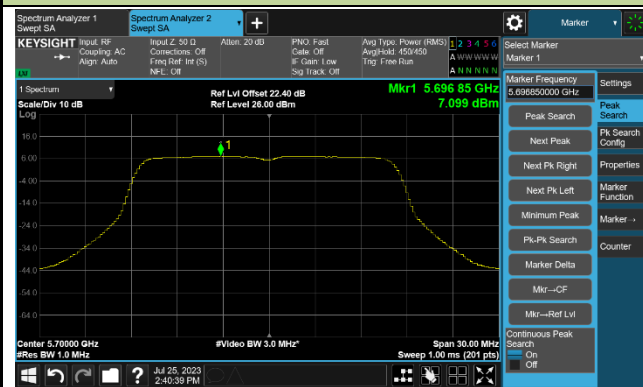

Channel 144 (5720MHz)



Channel 149 (5745MHz)



Channel 157 (5785MHz)



Channel 165 (5825MHz)



802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)




Channel 44 (5220MHz)




Channel 48 (5240MHz)

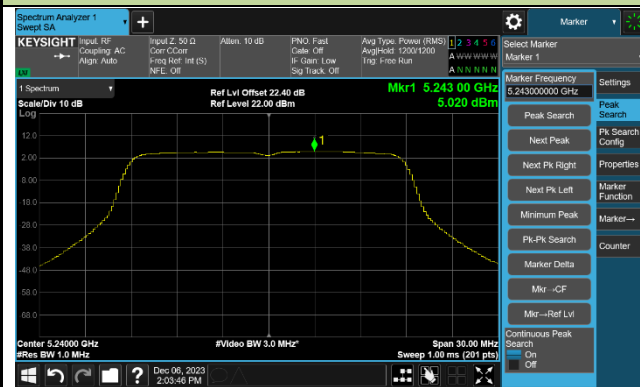


Channel 52 (5260MHz)

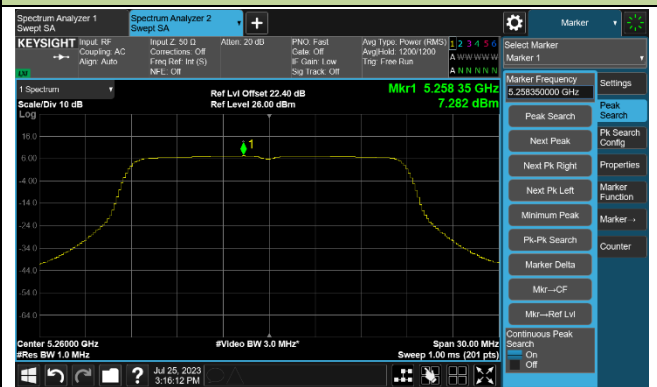

Channel 60 (5300MHz)

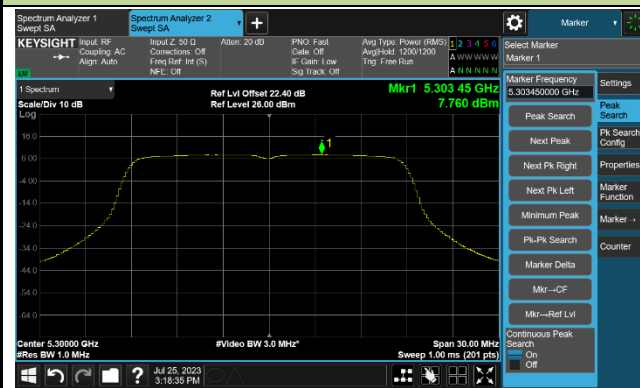


Channel 64 (5320MHz)

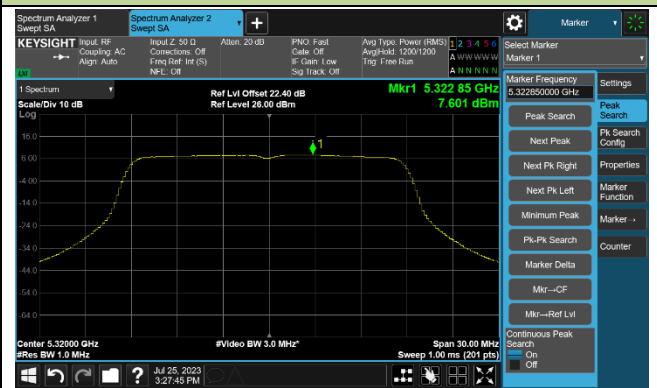


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 100 (5500MHz)

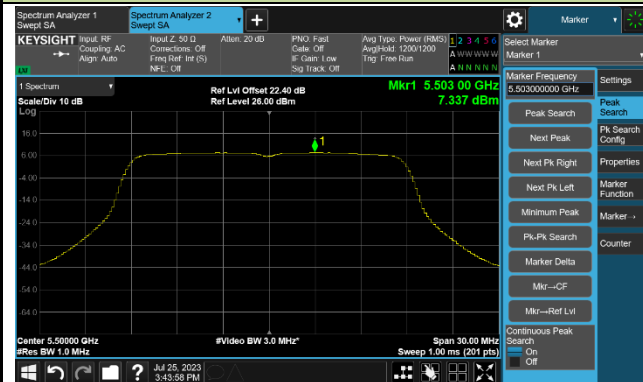


Channel 116 (5580MHz)

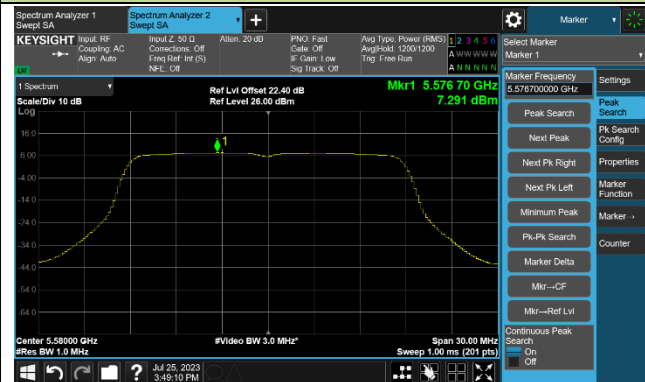


Channel 140 (5700MHz)

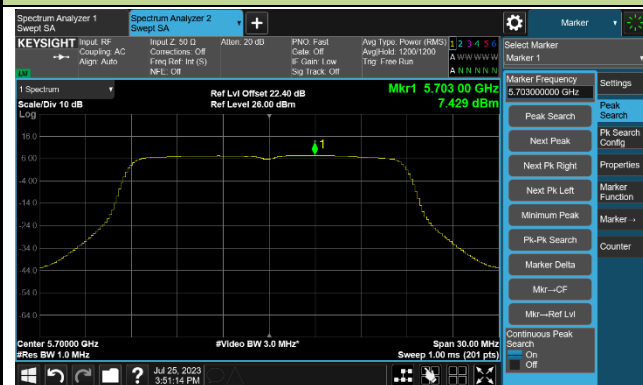


Channel 144 (5720MHz)

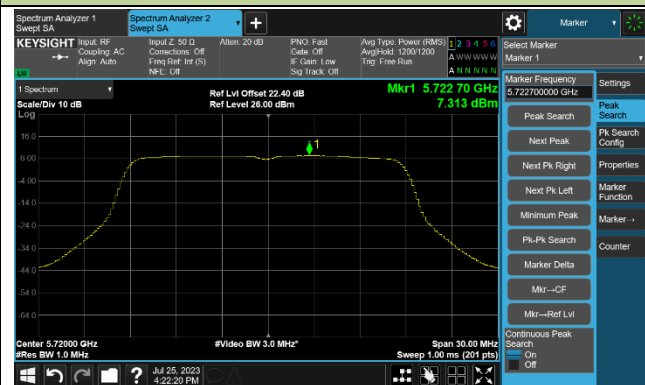

Channel 149 (5745MHz)

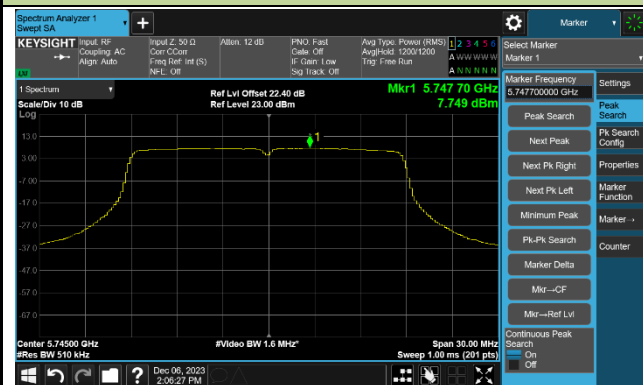

Channel 157 (5785MHz)

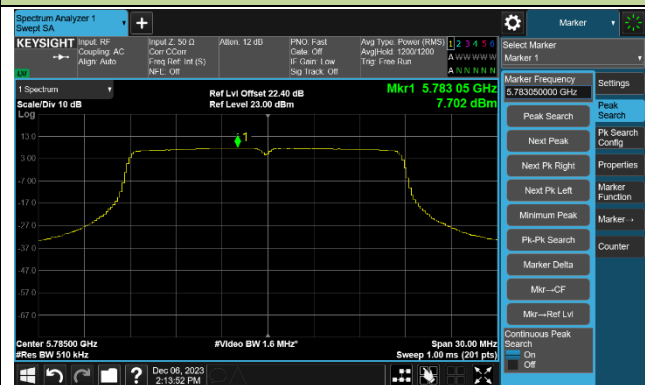


Channel 165 (5825MHz)




802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

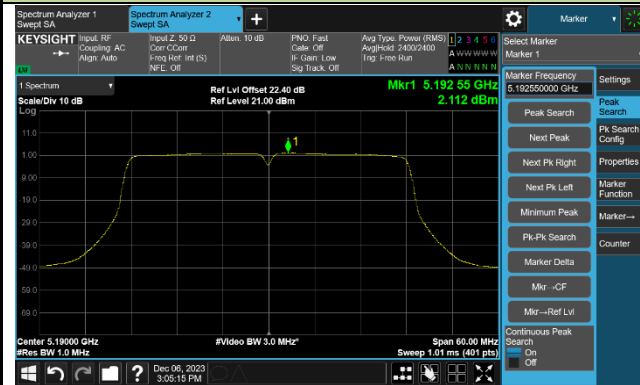


Channel 46 (5230MHz)

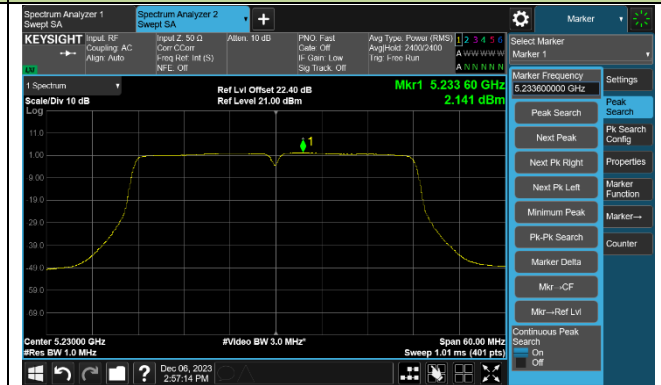


Channel 54 (5270MHz)

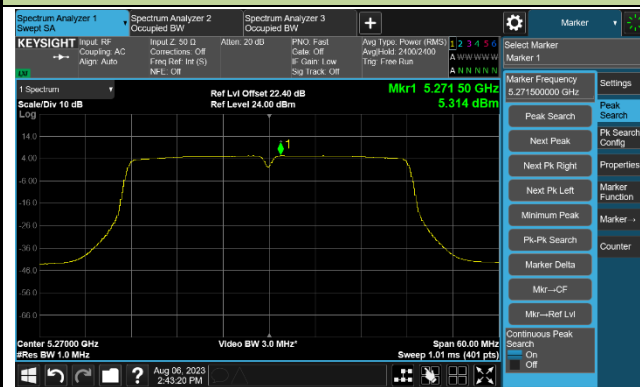


Channel 62 (5310MHz)

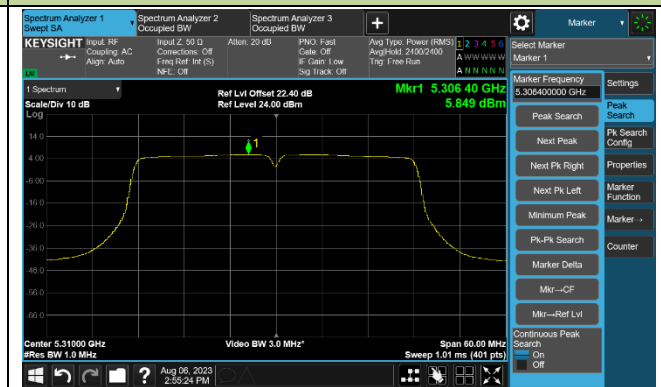

Channel 102 (5510MHz)

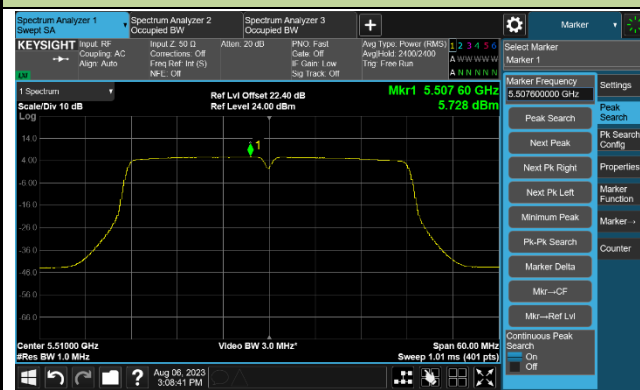


Channel 110 (5550MHz)

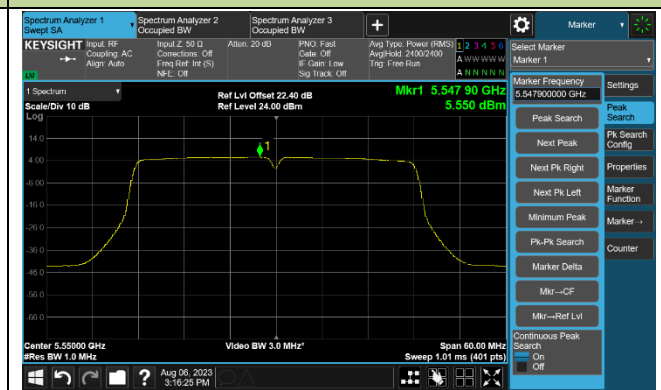


802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 134 (5670MHz)

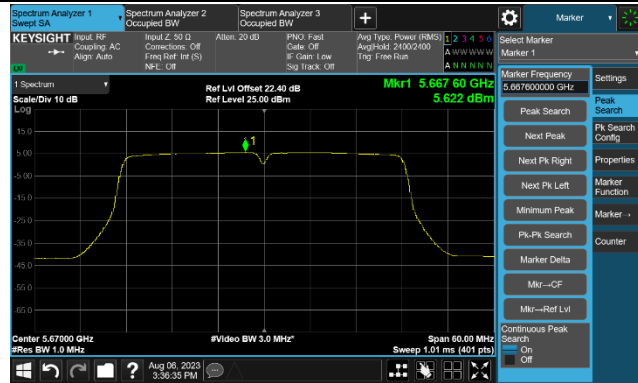


Channel 142 (5710MHz)

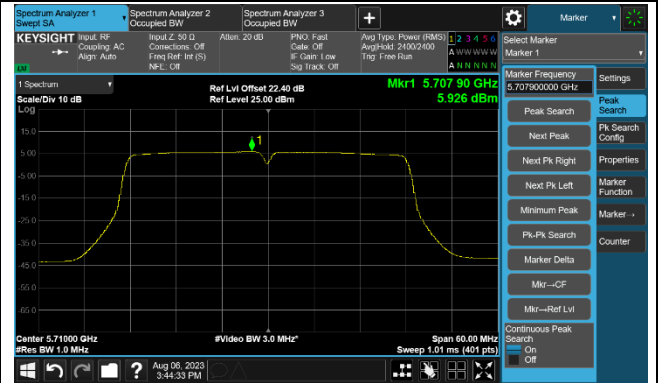

Channel 151 (5755MHz)

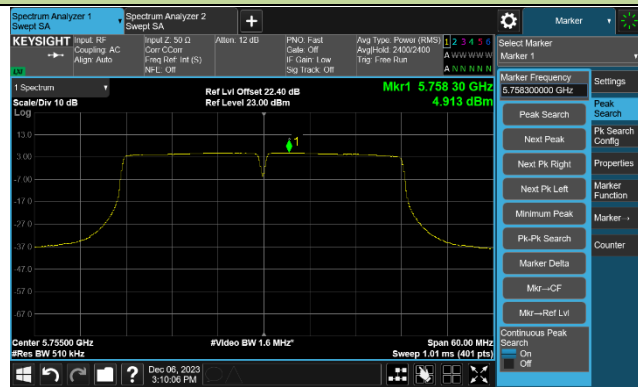

Channel 159 (5795MHz)

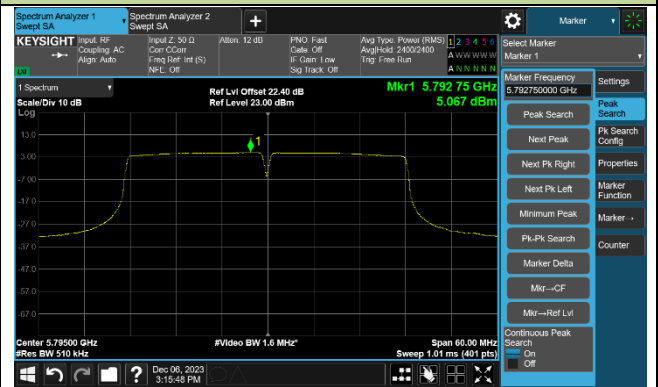


802.11ac-VHT80 Power Spectral Density - Ant 0


Channel 42 (5210MHz)




Channel 58 (5290MHz)

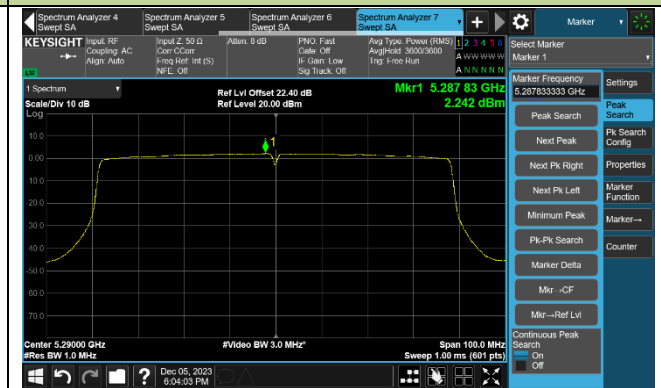


Channel 106 (5530MHz)

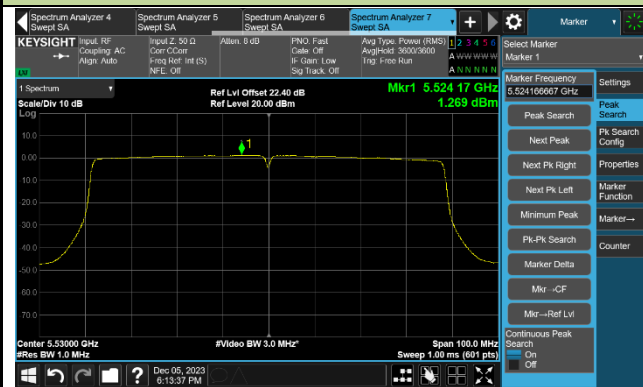


Channel 122 (5610MHz)

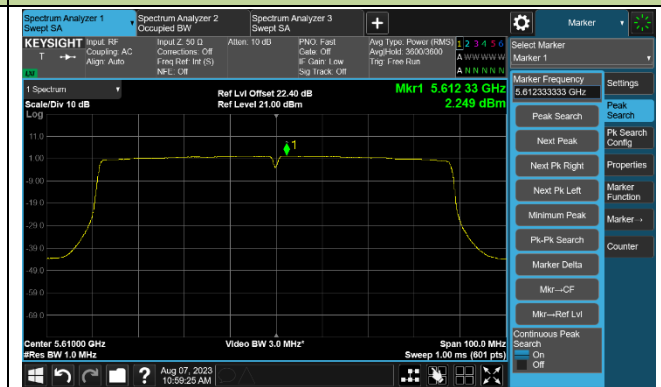

Channel 138 (5690MHz)

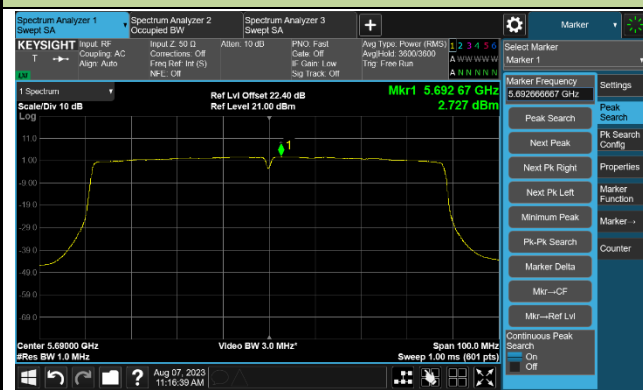


Channel 155 (5775MHz)

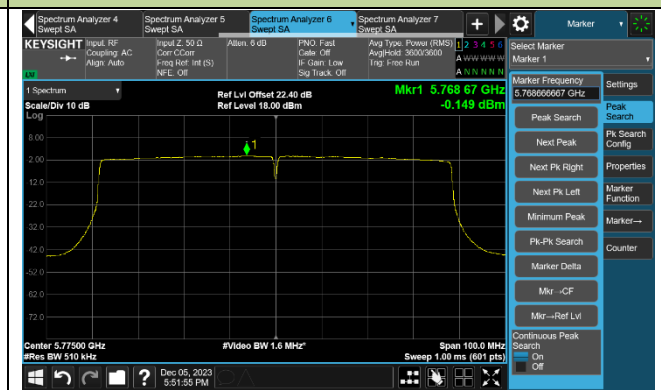


802.11ax-HE20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

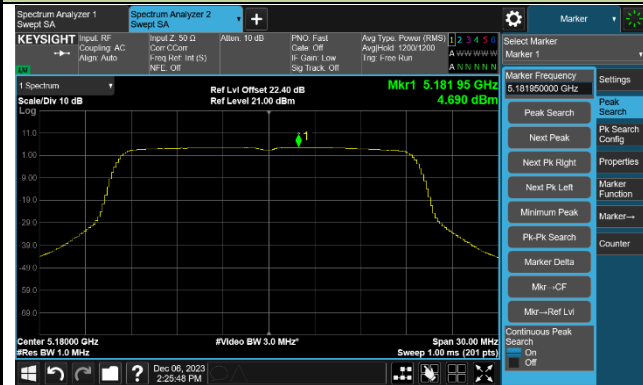


Channel 44 (5220MHz)

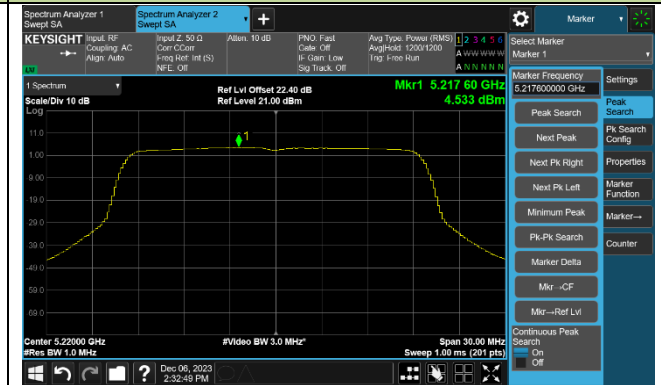


Channel 48 (5240MHz)

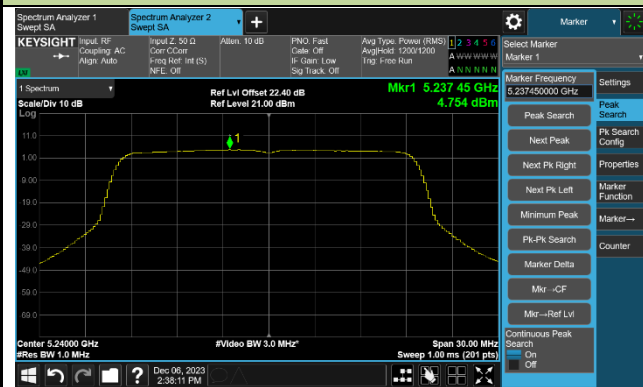

Channel 52 (5260MHz)

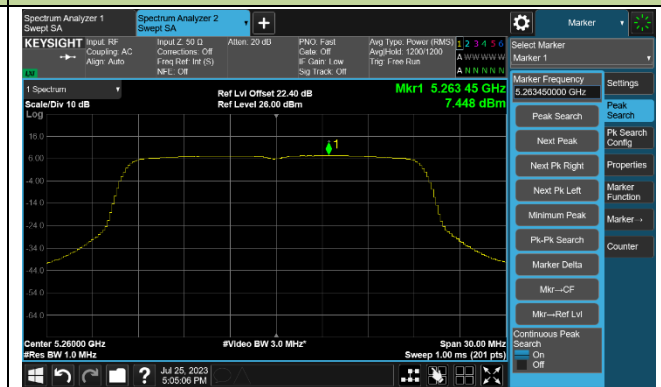

Channel 60 (5300MHz)

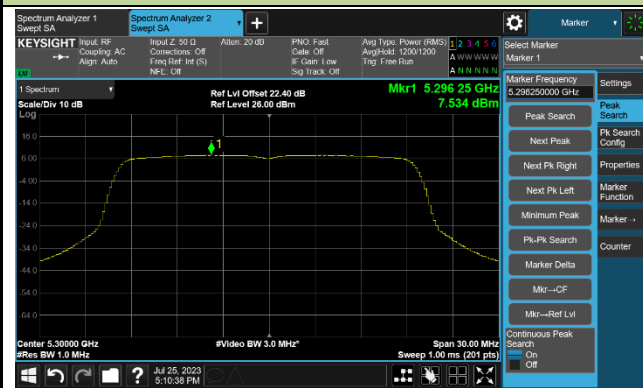


Channel 64 (5320MHz)




802.11ax-HE20 Power Spectral Density - Ant 0


Channel 100 (5500MHz)

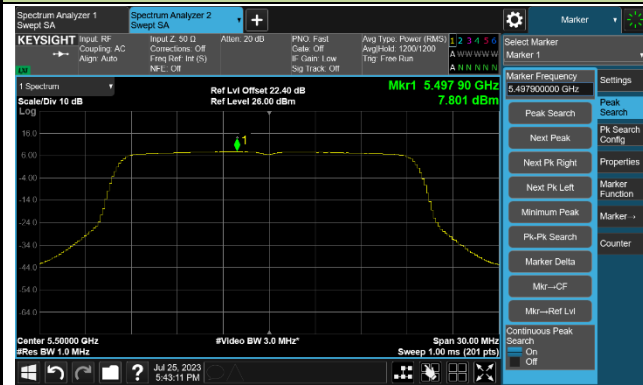


Channel 116 (5580MHz)

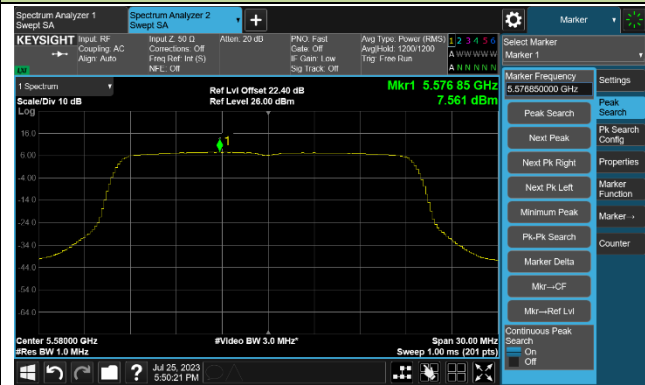


Channel 140 (5700MHz)

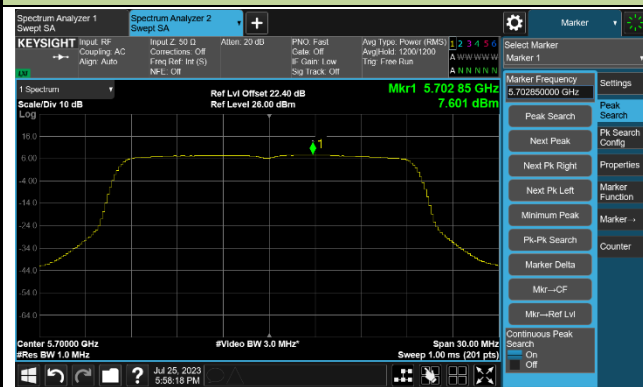


Channel 144 (5720MHz)

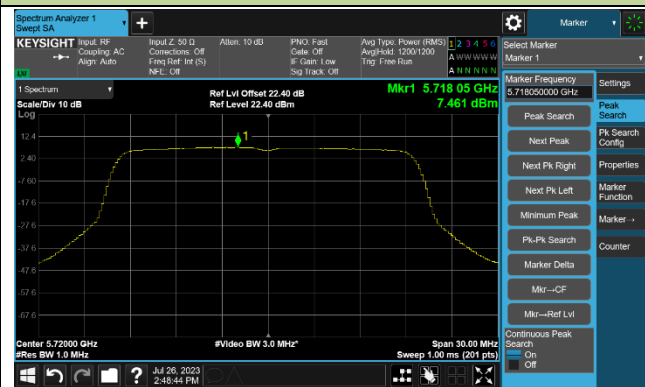


Channel 149 (5745MHz)

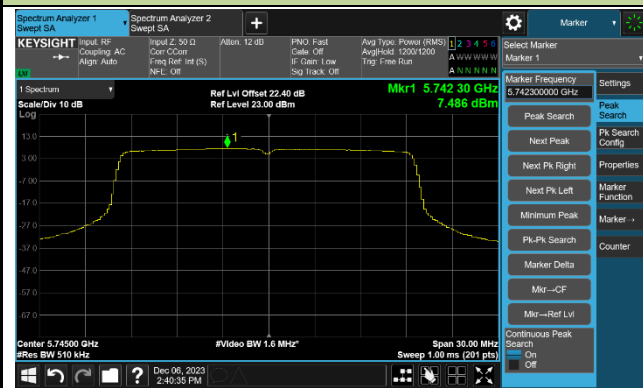

Channel 157 (5785MHz)

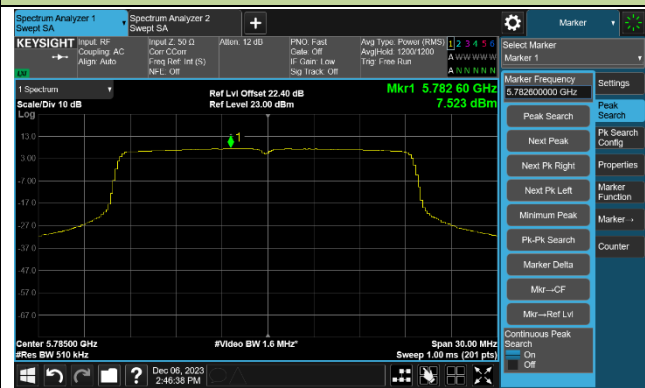


Channel 165 (5825MHz)

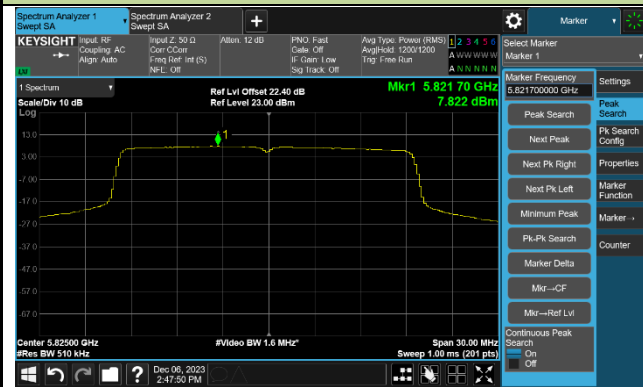


802.11ax-HE40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

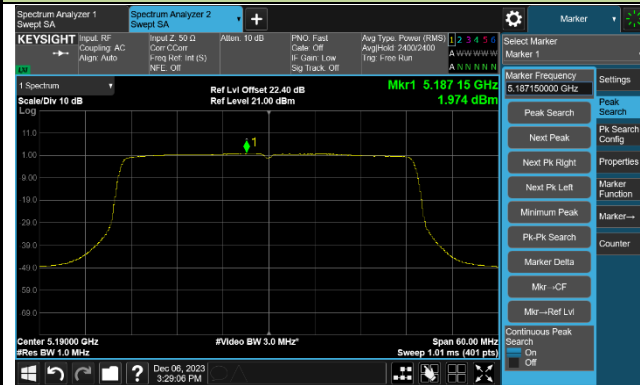


Channel 46 (5230MHz)

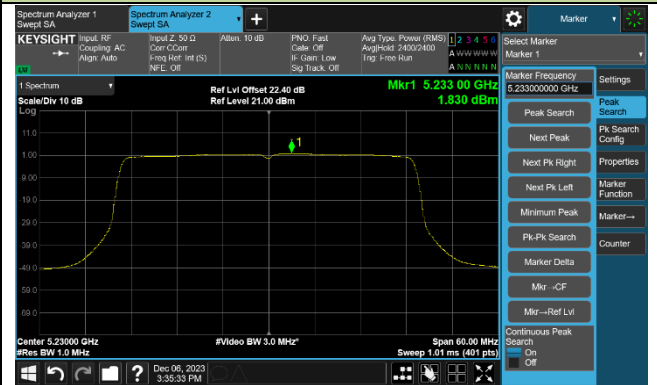


Channel 54 (5270MHz)

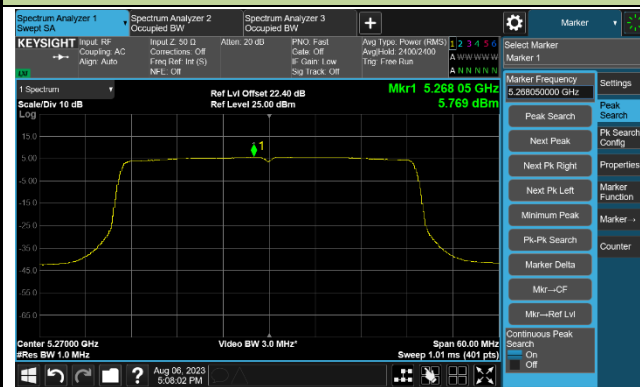


Channel 62 (5310MHz)

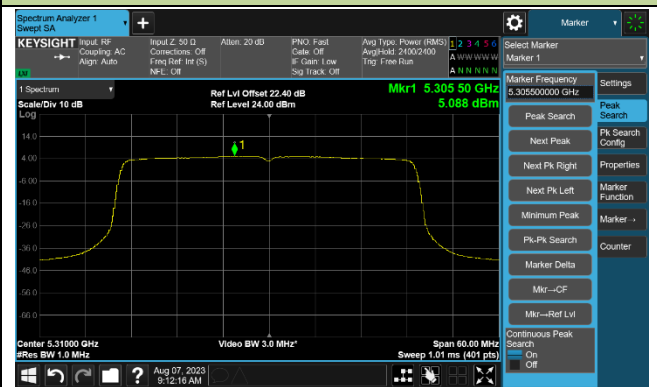

Channel 102 (5510MHz)

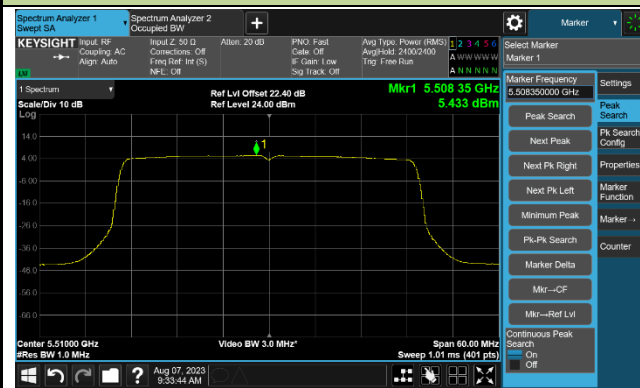


Channel 110 (5550MHz)

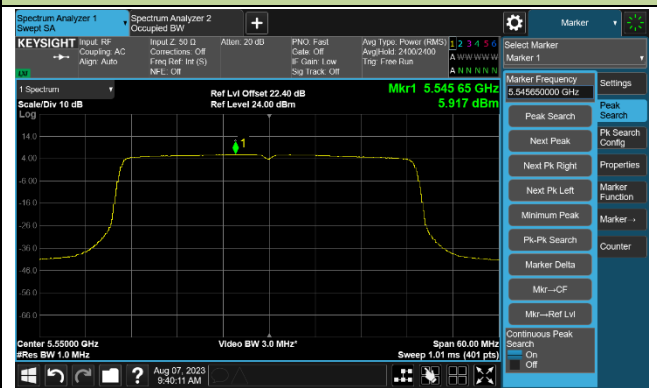


802.11ax-HE40 Power Spectral Density - Ant 0


Channel 134 (5670MHz)

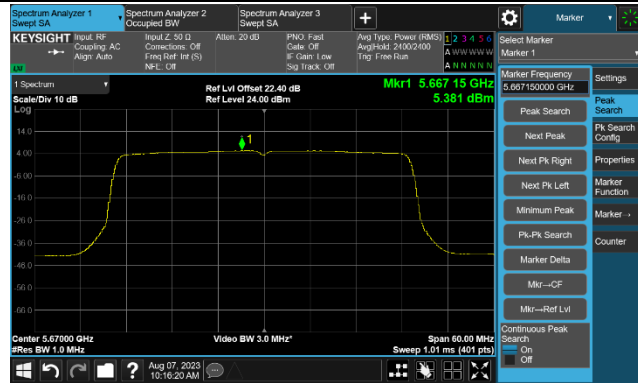

Channel 142 (5710MHz)

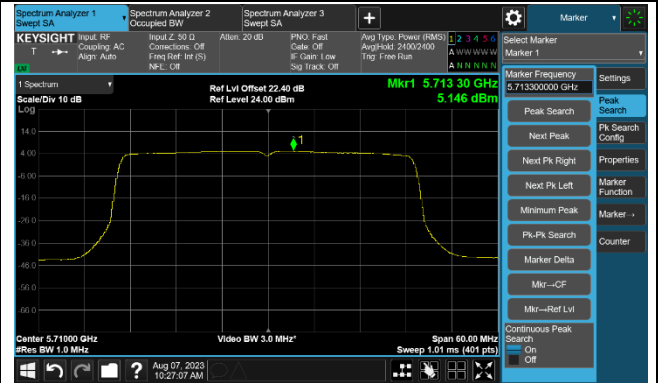

Channel 151 (5755MHz)

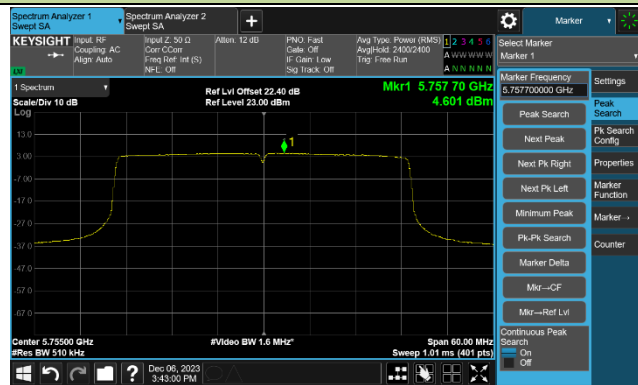

Channel 159 (5795MHz)

