

Report No.: KSEM210900013301 Page: 1 of 45

FCC SAR TEST REPORT

Application No.:	KSEM2109000133AT(SZCR2108022889ET)	
Applicant:	HUGE Play TTV, Inc.	
Address of Applicant:	18 Maple Avenue #109 Barrington, Rhode Island, United States	
Manufacturer:	QM(Hong Kong) Limited	
Address of Manufacturer:	19C,TML Tower No.3 Hoi Shing Road Tsuen Wan,New Territories Hong Kong	
Factory:	Foshan City Nanhai Xinhe Xinmei Toys Limited Company	
Address of Factory:	Yong An Industrial Zone, Guan Yao , Nan Hai District ,Fo Shan City,Guangdong Province,China	
Product Name:	Talking Tom	
Model No.(EUT):	TT001	
	© 2021 Outfit7 Limited	
Trade mark:	2021 HUGE Play Inc.	
FCC ID:	2A228A-TT001	
Standard(s) :	FCC 47CFR §2.1093	
Date of Receipt:	2021-10-08	
Date of Test:	2021-10-20 to 2021-10-20	
Date of Issue:	2021-10-28	
Test Result:	Pass*	
* In the configuration tested, the EUT complied with the standards specified above.		

Eni fri

Eric Lin

Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limitation clients is old the total this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sas.com

No.10,Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 2 of 45

REVISION HISTORY

Revision Record			
Version	Description	Date	Remark
00	Original	2021-10-28	1

Authorized for issue by:		
	Richard. Kong	
	Richard.Kong/ Project Engineer	
	Enie fri	
	Eric.Lin/Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, idemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN_Doccheck@ags.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5730818 www.sgsgroup.com.cn (86-512)5730818 sgs.china@gsgs.com



Report No.: KSEM210900013301 Page: 3 of 45

TEST SUMMARY

Ereguenov Band	Maximum Reported SAR(W/kg)	SAR Limited(W/kg)
Frequency Band	Body	1-g
WI-FI (2.4GHz)	0.08	1.6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are relained for 30 days only. Attention: To check the authenticity of testing /inspection report & certainticate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN_Doccheck@sag.com</u> No.10, Weige Road, Innovation Park, Kunshan, Jiangsu, China 215300 t@s-512]5730888 f@s-512]5730818 www.sggsroup.com.cn t@s-512]5730818 sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 4 of 45

CONTENTS

1.1 GENERAL DESCRIPTION OF EUT 1.1.1 DUT Antenna Locations(Back View) 1.2 TEST SPECIFICATION 1.3 RF EXPOSURE LIMITS 1.4 TEST LOCATION 1.5 TEST FACILITY 2 LABORATORY ENVIRONMENT 3 SAR MEASUREMENTS SYSTEM CONFIGURATION 3.1 THE SAR MEASUREMENT SYSTEM 3.2 Isotropic E-FIELD PROBE EX3DV4 3.3 Data Acquisition ELECTRONICS (DAE) 3.4 SAM TWIN PHANTOM 3.5 ELI PHANTOM 3.6 DEVICE HOLDER FOR TRANSMITTERS 3.7.1 MEASUREMENT PROCEDURE 3.7.2 Data Storage 3.7.3 Data Storage 3.7.4 Scanning procedure 3.7.5 Data Storage 3.7.6 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY 4.1 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY 4.2 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 4.1 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VERIPICIATION </th <th>1</th> <th>GENERAL INFORMATION</th> <th>6</th>	1	GENERAL INFORMATION	6
1.2 TEST SPECIFICATION 1.3 RF EXPOSURE LIMITS 1.4 TEST LOCATION 1.5 TEST FACILITY 2 LABORATORY ENVIRONMENT 3 SAR MEASUREMENTS SYSTEM CONFIGURATION 3.1 THE SAR MEASUREMENT SYSTEM 3.2 Isotropic E-field Proge EX3DV4. 3.3 Data Acquisition Electronics (DAE). 3.4 SAM Twin Phantom 3.5 ELI Phantom. 3.6 Device Holdber For Transmitters 3.7 Measurement Procedure. 3.7.2 Data Storage. 3.7.3 Data Evaluation by SEMCAD 4 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY. 4.1 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 4.1 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 5.1 THE BODY TEST POSITION 5.1.1 Extremity exposure conditions. 5.1.2 Test Distance for SAR Evalu		1.1 GENERAL DESCRIPTION OF EUT	6
1.3 RF EXPOSURE LIMITS 1.4 TEST LOCATION 1.5 TEST FACILITY 2 LABORATORY ENVIRONMENT 3 SAR MEASUREMENTS SYSTEM CONFIGURATION 3.1 THE SAR MEASUREMENT SYSTEM 3.2 ISOTROPIC E-FIELD PROBE EX3DV4 3.3 DATA ACQUISITION ELECTRONICS (DAE) 3.4 SAM TWIN PHANTOM 3.5 ELI PHANTOM 3.6 DEVICE HOLDER FOR TRANSMITTERS 3.7 MEASUREMENT PROCEDURE 3.7.1 Scanning procedure 3.7.2 Data Storage 3.7.3 Data Evaluation by SEMCAD 4 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY 4.1 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY 4.2 SAR MEASUREMENT VARIABILITY 5.1 THE BORY TEST POSITION 5.1.1 TEST POSITION 6.1 TISSUE SIMULATE LIQUID <td></td> <td>1.1.1 DUT Antenna Locations(Back View)</td> <td>7</td>		1.1.1 DUT Antenna Locations(Back View)	7
1.4 TEST EACLITY 2 LABORATORY ENVIRONMENT		1.2 TEST SPECIFICATION	8
1.5 TEST FACILITY 2 LABORATORY ENVIRONMENT 3 SAR MEASUREMENTS SYSTEM CONFIGURATION 3.1 THE SAR MEASUREMENT SYSTEM 3.2 Isotropic E-field Probe EX3DV4. 3.3 Data Acquisition Electronics (DAE). 3.4 SAM Twin Phantom 3.5 ELI Phantom 3.6 Device Holder For Transmitters 3.7 Measurement Procedure. 3.7.1 Scanning procedure. 3.7.2 Data Storage. 3.7.3 Data Storage. 3.7.4 SAR MEASUREMENT PROCEDURE. 3.7.5 Data Storage. 3.7.6 Data Storage. 3.7.7 Data Storage. 3.7.8 Data Storage. 3.7.9 Data Evaluation by SEMCAD 4 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY. 4.1 SAR MEASUREMENT UNCERTAINTY 5 DESCRIPTION OF TEST POSITION 5.1.1 THE BODY TEST POSITION 5.1.1 Extremity exposure conditions 5.1.2 Test Distance for SAR Evaluation 6.1.1 Tiscue Simulate Liquid <t< td=""><td></td><td>1.3 RF EXPOSURE LIMITS</td><td>9</td></t<>		1.3 RF EXPOSURE LIMITS	9
2 LABORATORY ENVIRONMENT		1.4 TEST LOCATION	10
3 SAR MEASUREMENTS SYSTEM CONFIGURATION 3.1 THE SAR MEASUREMENT SYSTEM 3.2 ISOTROPIC E-FIELD PROBE EX3DV4. 3.3 DATA ACQUISITION ELECTRONICS (DAE). 3.4 SAM TWIN PHANTOM 3.5 ELI PHANTOM 3.6 DEVICE HOLDER FOR TRANSMITTERS 3.7 MEASUREMENT PROCEDURE 3.7.1 Scanning procedure. 3.7.2 Data Storage. 3.7.3 Data Evaluation by SEMCAD 4 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY. 4.1 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT UNCERTAINTY 5 DESCRIPTION OF TEST POSITION. 5.1.1 Extremity exposure conditions. 5.1.2 Test Dostrion 5.1.1 Extremity exposure conditions. 5.1.2 Test Distance for SAR Evaluation 6 SAR SYSTEM VERIFICATION PROCEDURE 6.1 TISSUE Simulate Liquid 6.1.2 Test Liquids Confirmation 6.1.3 Measurement for Tissue Simulate Liquid 6.2.4 SAR SYSTEM CHECK		1.5 TEST FACILITY	
3.1 THE SAR MEASUREMENT SYSTEM 3.2 ISOTROPIC E-FIELD PROBE EX3DV4 3.3 DATA ACQUISITION ELECTRONICS (DAE) 3.4 SAM TWIN PHANTOM 3.5 ELI PHANTOM 3.6 DEVICE HOLDER FOR TRANSMITTERS 3.7 MEASUREMENT PROCEDURE 3.7.1 Scanning procedure 3.7.2 Data Storage 3.7.3 Data Evaluation by SEMCAD 4 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY 4.1 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 5 DESCRIPTION OF TEST POSITION 5.1.1 Extremity exposure conditions 5.1.2 Test DIStance for SAR Evaluation 6 SAR SYSTEM VERIFICATION PROCEDURE 6.1 TISSUE SIMULATE LIQUID 6.1.1 Recipes for Tissue Simulate Liquid 6.1.2 Test Liquids Confirmation <td< td=""><td>2</td><td>LABORATORY ENVIRONMENT</td><td>11</td></td<>	2	LABORATORY ENVIRONMENT	11
3.2 ISOTROPIC E-FIELD PROBE EX3DV4	3	SAR MEASUREMENTS SYSTEM CONFIGURATION	
3.2 ISOTROPIC E-FIELD PROBE EX3DV4		3.1 THE SAR MEASUREMENT SYSTEM	12
3.3 DATA ACQUISITION ELECTRONICS (DAE)			
3.4 SAM TWIN PHANTOM 3.5 ELI PHANTOM 3.6 DEVICE HOLDER FOR TRANSMITTERS 3.7 MEASUREMENT PROCEDURE 3.7.1 Scanning procedure 3.7.2 Data Storage 3.7.3 Data Evaluation by SEMCAD 4 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY 4.1 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 5 DESCRIPTION OF TEST POSITION. 5.1 THE BODY TEST POSITION. 5.1.1 Extremity exposure conditions. 5.1.2 Test Distance for SAR Evaluation 6 SAR SYSTEM VERIFICATION PROCEDURE. 6.1 TISSUE SIMULATE LIQUID. 6.1.1 Recipes for Tissue Simulate Liquid 6.1.2 Test Liquids Confirmation 6.1.3 Measurement for Tissue Simulate Liquid 6.2 SAR SYSTEM CHECK. 6.2.1 Justification for Extended SAR Dipole Calibrations. 6.2.2 Summary System Check Result(s). 6.2.3 Detailed System Check Results. 7 TEST CONFIGURATION 7.1 OPERATION CONFIGURATIONS.			
3.5 ELI PHANTOM 3.6 DEVICE HOLDER FOR TRANSMITTERS 3.7 MEASUREMENT PROCEDURE 3.7.1 Scanning procedure 3.7.2 Data Storage 3.7.3 Data Evaluation by SEMCAD 4 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY 4.1 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT UNCERTAINTY 5 DESCRIPTION OF TEST POSITION 5.1 THE BODY TEST POSITION 5.1.1 Extremity exposure conditions. 5.1.2 Test Distance for SAR Evaluation 6 SAR SYSTEM VERIFICATION PROCEDURE 6.1 TISSUE SIMULATE LIQUID. 6.1.1 Recipes for Tissue Simulate Liquid 6.1.2 Test Liquids Confirmation 6.1.3 Measurement for Tissue Simulate Liquid 6.2 SAR SYSTEM CHECK 6.2.1 Justification for Extended SAR Dipole Calibrations. 6.2.2 Summary System Check Result(s). 6.2.3 Detailed System Check Result(s). 6.2.3 Detailed System Check Results. 7 TEST CONFIGURATION			
3.6 DEVICE HOLDER FOR TRANSMITTERS 3.7 MEASUREMENT PROCEDURE 3.7.1 Scanning procedure 3.7.2 Data Storage 3.7.3 Data Evaluation by SEMCAD 4 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY 4.1 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT UNCERTAINTY 5 DESCRIPTION OF TEST POSITION 5.1.1 Extremity exposure conditions 5.1.2 Test Distance for SAR Evaluation 6 SAR SYSTEM VERIFICATION PROCEDURE 6.1 TISSUE SIMULATE LIQUID 6.1.1 Recipes for Tissue Simulate Liquid 6.1.2 Test Liquids Confirmation 6.1.3 Measurement for Tissue Simulate Liquid 6.1.4 SAR SYSTEM CHECK 6.2.1 Justification for Extended SAR Dipole Calibrations. 6.2.2 Summary System Check Result(s) 6.2.3 Detailed System Check Result(s) 6.2.3 Detailed System Check Results. 7 TEST CONFIGURATION 7.1 OPERATION CONFIGURATIONS 7.1.1 Wi-Fi Tes			
3.7.1 Scanning procedure			
3.7.2 Data Storage		3.7 MEASUREMENT PROCEDURE	
3.7.3 Data Evaluation by SEMCAD 4 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY 4.1 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT UNCERTAINTY 5 DESCRIPTION OF TEST POSITION 5.1 THE BODY TEST POSITION 5.1.1 Extremity exposure conditions 5.1.2 Test Distance for SAR Evaluation 6 SAR SYSTEM VERIFICATION PROCEDURE 6.1 TISSUE SIMULATE LIQUID 6.1.1 Recipes for Tissue Simulate Liquid 6.1.2 Test Liquids Confirmation 6.1.3 Measurement for Tissue Simulate Liquid 6.2 SAR SYSTEM CHECK 6.2.1 Justification for Extended SAR Dipole Calibrations 6.2.2 Summary System Check Result(s) 6.2.3 Detailed System Check Result(s) 6.2.4 OPERATION CONFIGURATIONS 7.1 OPERATION CONFIGURATIONS 7.1.1 WI-FI TEST CONFIGURATIONS 7.1.1 WI-FI Test Configuration		3.7.1 Scanning procedure	
4 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY 4.1 SAR MEASUREMENT VARIABILITY 4.2 SAR MEASUREMENT UNCERTAINTY 5 DESCRIPTION OF TEST POSITION 5.1 THE BODY TEST POSITION 5.1.1 Extremity exposure conditions 5.1.2 Test Distance for SAR Evaluation 6 SAR SYSTEM VERIFICATION PROCEDURE 6.1 TISSUE SIMULATE LIQUID 6.1.1 Recipes for Tissue Simulate Liquid 6.1.2 Test Liquids Confirmation 6.1.3 Measurement for Tissue Simulate Liquid 6.2 SAR SYSTEM CHECK 6.2.1 Justification for Extended SAR Dipole Calibrations 6.2.2 Summary System Check Result(s) 6.2.3 Detailed System Check Results 7 TEST CONFIGURATION 7.1 OPERATION CONFIGURATIONS 7.1.1 Wi-Fi Test Configuration 7.1.2 BluetoothTest Configuration		3.7.2 Data Storage	
 4.1 SAR MEASUREMENT VARIABILITY		3.7.3 Data Evaluation by SEMCAD	
 4.2 SAR MEASUREMENT UNCERTAINTY DESCRIPTION OF TEST POSITION 5.1 THE BODY TEST POSITION 5.1.1 Extremity exposure conditions 5.1.2 Test Distance for SAR Evaluation 6 SAR SYSTEM VERIFICATION PROCEDURE 6.1 TISSUE SIMULATE LIQUID 6.1.1 Recipes for Tissue Simulate Liquid 6.1.2 Test Liquids Confirmation 6.1.3 Measurement for Tissue Simulate Liquid 6.2 SAR SYSTEM CHECK 6.2.1 Justification for Extended SAR Dipole Calibrations 6.2.3 Detailed System Check Result(s) 6.3 Detailed System Check Results 7 TEST CONFIGURATION 7.1 OPERATION CONFIGURATIONS 7.1.1 Wi-Fi Test Configuration 	4	SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	22
 4.2 SAR MEASUREMENT UNCERTAINTY DESCRIPTION OF TEST POSITION 5.1 THE BODY TEST POSITION 5.1.1 Extremity exposure conditions 5.1.2 Test Distance for SAR Evaluation 6 SAR SYSTEM VERIFICATION PROCEDURE 6.1 TISSUE SIMULATE LIQUID 6.1.1 Recipes for Tissue Simulate Liquid 6.1.2 Test Liquids Confirmation 6.1.3 Measurement for Tissue Simulate Liquid 6.2 SAR SYSTEM CHECK 6.2.1 Justification for Extended SAR Dipole Calibrations 6.2.3 Detailed System Check Result(s) 6.3 Detailed System Check Results 7 TEST CONFIGURATION 7.1 OPERATION CONFIGURATIONS 7.1.1 Wi-Fi Test Configuration 		4.1 SAR MEASUREMENT VARIABILITY	22
5 DESCRIPTION OF TEST POSITION 5.1 THE BODY TEST POSITION 5.1.1 Extremity exposure conditions. 5.1.2 Test Distance for SAR Evaluation 6 SAR SYSTEM VERIFICATION PROCEDURE 6.1 TISSUE SIMULATE LIQUID. 6.1.1 Recipes for Tissue Simulate Liquid 6.1.2 Test Liquids Confirmation 6.1.3 Measurement for Tissue Simulate Liquid 6.2 SAR SYSTEM CHECK 6.2.1 Justification for Extended SAR Dipole Calibrations 6.2.2 Summary System Check Result(s) 6.2.3 Detailed System Check Results 7 TEST CONFIGURATION 7.1 OPERATION CONFIGURATIONS 7.1.1 Wi-Fi Test Configuration 7.1.2 Bluetooth Test Configuration			
5.1.1 Extremity exposure conditions	5		
5.1.1 Extremity exposure conditions			24
5.1.2 Test Distance for SAR Evaluation 6 SAR SYSTEM VERIFICATION PROCEDURE 6.1 TISSUE SIMULATE LIQUID 6.1.1 Recipes for Tissue Simulate Liquid 6.1.2 Test Liquids Confirmation 6.1.3 Measurement for Tissue Simulate Liquid 6.2 SAR SYSTEM CHECK 6.2.1 Justification for Extended SAR Dipole Calibrations 6.2.2 Summary System Check Result(s) 6.2.3 Detailed System Check Results 7 TEST CONFIGURATION 7.1 OPERATION CONFIGURATIONS 7.1.1 Wi-Fi Test Configuration 7.1.2 Bluetooth Test Configuration			
 6 SAR SYSTEM VERIFICATION PROCEDURE 6.1 TISSUE SIMULATE LIQUID. 6.1.1 Recipes for Tissue Simulate Liquid 6.1.2 Test Liquids Confirmation			
 6.1 TISSUE SIMULATE LIQUID	_		
 6.1.1 Recipes for Tissue Simulate Liquid	6	SAR SYSTEM VERIFICATION PROCEDURE	
 6.1.2 Test Liquids Confirmation		6.1 TISSUE SIMULATE LIQUID	
 6.1.3 Measurement for Tissue Simulate Liquid		6.1.1 Recipes for Tissue Simulate Liquid	
 6.2 SAR SYSTEM CHECK 6.2.1 Justification for Extended SAR Dipole Calibrations 6.2.2 Summary System Check Result(s) 6.2.3 Detailed System Check Results 7 TEST CONFIGURATION 7.1 OPERATION CONFIGURATIONS 7.1.1 Wi-Fi Test Configuration 7.1.2 BluetoothTest Configuration 		6.1.2 Test Liquids Confirmation	
 6.2.1 Justification for Extended SAR Dipole Calibrations 6.2.2 Summary System Check Result(s) 6.2.3 Detailed System Check Results 7 TEST CONFIGURATION 7.1 OPERATION CONFIGURATIONS 7.1.1 Wi-Fi Test Configuration 7.1.2 BluetoothTest Configuration 		6.1.3 Measurement for Tissue Simulate Liquid	
 6.2.2 Summary System Check Result(s)			
 6.2.3 Detailed System Check Results 7 TEST CONFIGURATION 7.1 OPERATION CONFIGURATIONS 7.1.1 Wi-Fi Test Configuration 7.1.2 BluetoothTest Configuration 			
7 TEST CONFIGURATION 7.1 OPERATION CONFIGURATIONS 7.1.1 Wi-Fi Test Configuration 7.1.2 BluetoothTest Configuration			
7.1 OPERATION CONFIGURATIONS 7.1.1 Wi-Fi Test Configuration 7.1.2 BluetoothTest Configuration		6.2.3 Detailed System Check Results	
7.1.1 Wi-Fi Test Configuration 7.1.2 BluetoothTest Configuration	7	TEST CONFIGURATION	31
7.1.2 BluetoothTest Configuration		7.1 OPERATION CONFIGURATIONS	
-		7.1.1 Wi-Fi Test Configuration	
8 TEST RESULT		7.1.2 BluetoothTest Configuration	
	8	TEST RESULT	35



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57355888 f(186-512)5735088 f(186-



Report No.: KSEM210900013301 Page: 5 of 45

	ASUREMENT OF RF CONDUCTED POWER	
	Conducted Power Of Wi-Fi and BT	
8.2 ST.	AND-ALONE SAR TEST EVALUATION	
8.3 Me	ASUREMENT OF SAR DATA	
8.3.1	SAR Result Of WiFi 2.4G	
8.4 Mu	JLTIPLE TRANSMITTER EVALUATION	
8.4.1	Simultaneous SAR SAR test evaluation	
9 EQUIPN	IENT LIST	
10 CALIBR	ATION CERTIFICATE	40
11 РНОТО	GRAPHS	
APPENDIX A	: DETAILED SYSTEM CHECK RESULTS	41
APPENDIX A 11.1.1	: DETAILED SYSTEM CHECK RESULTS SystemPerformanceCheck-Head 2450MHz	
11.1.1 APPENDIX B	SystemPerformanceCheck-Head 2450MHz	42
11.1.1 APPENDIX B	SystemPerformanceCheck-Head 2450MHz	42
11.1.1 APPENDIX B 11.1.2	SystemPerformanceCheck-Head 2450MHz	





Report No.: KSEM210900013301 Page: 6 of 45

1 General Information

1.1 General Description of EUT

Device Type :	portable device			
Exposure Category:	uncontrolled enviror	uncontrolled environment / general population		
Product Phase:	production unit			
SN:	00002-2821			
Hardware Version:	R27			
Software Version:	ESP32_RFTest_17	9_20210114.bin		
Antenna Type:	PCB antenna			
Device Operating Configuratio				
Modulation Mode:	WI-FI: CCK, DSSS,	WI-FI: CCK, DSSS, OFDM; BT: GFSK, π/4DQPSK,8DPSK		
Antenna Gain:	3.4 dBi			
	Band	Tx (MHz)	Rx (MHz)	
Frequency Bands:	WI-FI2.4G	2412~2462	2412~2462	
	Bluetooth	2402~2480	2402~2480	
	Model:	PL683086P		
Detten (Information)	Normal Voltage :	3.7V		
Battery Information:	Rated capacity :	2000mAh		
	Manufacturer	Shenzhen Power Tech International Battery CO. LTD.		




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN.Doccheck@ags.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5730818 www.sgsgroup.com.cn no.11 %68-512)5730818 sys.china@gss.com



Report No.: KSEM210900013301 Page: 7 of 45

1.1.1 DUT Antenna Locations(Back View)







Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN_Doccheck@sas.com</u>

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 8 of 45

1.2 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radio frequency Radiation Exposure Evaluation: Portable Devices
IEEE Std C95.1 – 2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 248227 D01 802.11 Wi-Fi SAR v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB447498 D01 General RF Exposure Guidance v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting v01r02	RF Exposure Compliance Reporting and Documentation Considerations





1.3 RF exposure limits

Human Exposure	Uncontrolled Environment	Controlled Environment	
	General Population	Occupational	
Spatial Peak SAR*	1.60 W/kg	8.00 W/kg	
(Brain*Trunk)	1.60 W/kg	8.00 W/kg	
Spatial Average SAR**		0.40 \\///kg	
(Whole Body)	0.08 W/kg	0.40 W/kg	
Spatial Peak SAR***	4.00 W/ka	20.00 \\//kg	
(Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg	

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSEM210900013301 Page: 10 of 45

1.4 Test Location

Company:	Compliance Certification Services (Kunshan) Inc.
Address:	No.10 Weiye Rd., Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China
Post code:	215300
Telephone:	86-512-57355888
Fax:	86-512-57370818

1.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L4354)

CNAS has accredited Compliance Certification Services (Kunshan) Inc. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 2541.01)

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• FCC –Designation Number: CN1172

Compliance Certification Services Inc. has been recognized as an accredited testing laboratory.

Designation Number: CN1172.

• ISED (CAB identifier: CN0072)

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory

CAB Identifier: CN0072.

• VCCI (Member No.: 1938)

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: : R-20134, R-11600,C-11707, T-11499, G-10216 respectively.





Report No.: KSEM210900013301 Page: 11 of 45

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C	
Relative humidity	Min. = 30%, Max. = 70%	
Ground system resistance	< 0.5 Ω	
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.		

Table 1: The Ambient Conditions



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-575) 8307 1443, or email: <u>CN.Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5737081 www.sgsgroup.com.cn net is '江苏 · 昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)5737081 sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 12 of 45

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|2)/ ρ where σ and ρ are the conductivity and mass density of the tissue-Simulate.

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconserate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are related for 30 days only. Artention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307 1443, or email: CN.Doccheck@ags.com (86-512)57355888 (186-512)57370818 www.sgsgroup.com.on

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300


Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 13 of 45

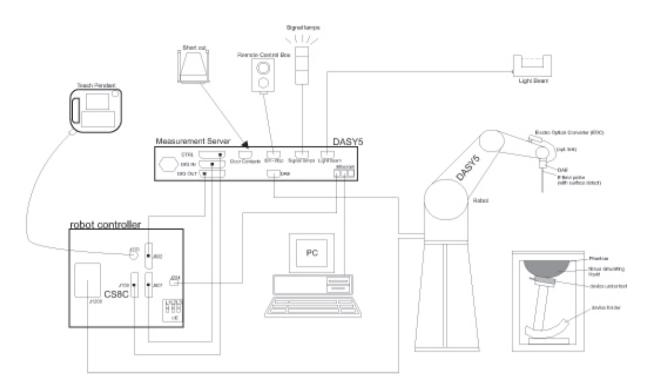

F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validat the proper functioning of the system.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention To check the authenticity of testing /inspector reports and such sample(s) are retained for 30 days only. (86-572)5737081 www.sggroup.com.cn No.10, Weig Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5737081 syst.china@sgs.com



Report No.: KSEM210900013301 Page: 14 of 45

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI





Report No.: KSEM210900013301 Page: 15 of 45

3.3 Data Acquisition Electronics (DAE)

Model	DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5µV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm	
(incl. Wooden Support)	Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	-
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing linspection report & certificate, please contact us at telephone: (86-512)5730818 www.sgsgroup.com.cn was vegroup.com.cn (10%-912)6730818 www.sgsgroup.com.cn (10%-512)5730818 sys.china@sgs.com



Report No.: KSEM210900013301 Page: 16 of 45

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-575) 8307 1443, or email: CN_Doccheck@ags.com

 No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
 t(86-512)5730818
 www.sgsgroup.com.cn.

 中国 · 江苏 · 昆山市留学生创业园伟业路10号
 邮编 215300
 t(86-512)5730818
 sgs.china@gsg.com



Report No.: KSEM210900013301 Page: 17 of 45

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity ε =3 and loss tangent δ =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconsrate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only inspection report & certificate, please contact us at telephone: (86-755)8307 1443, or email: CN.Doccheck@gs.com (86-512)5730888 (86-512)5730888 Www.sgsgroup.com.or

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

f(86-512)57370818 sgs.china@sgs.com

t(86-512)57355888



Report No.: KSEM210900013301 Page: 18 of 45

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm.Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of $30mm^*30mm^*30mm$ (fine resolution volume scan, zoom scan) was assessed by measuring 5x5x7 points ($\leq 2GHz$) and 7x7x7 points ($\geq 2GHz$). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN.Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5737081 www.sgsgroup.com.cn (86-512)5737081 www.sgsgroup.com.cn + si .2153700 time set .215373081 sys.china@sgs.com



Report No.: KSEM210900013301 Page: 19 of 45

			\leq 3 GHz	> 3 GHz			
Maximum distance fro (geometric center of pr			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$			
Maximum probe angle surface normal at the n			30°±1°	20°±1°			
			\leq 2 GHz: \leq 15 mm 2 - 3 GHz: \leq 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm			
Maximum area scan sp	atial resolu	ition: Δx_{Area} , Δy_{Area}	When the x or y dimension or measurement plane orientation the measurement resolution m x or y dimension of the test d measurement point on the test	on, is smaller than the above, must be \leq the corresponding evice with at least one			
Maximum zoom scan s	spatial reso	lution: Δx _{Zoom} , Δy _{Zoom}	$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ 2 - 3 GHz: $\leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz} \le 5 \text{ mm}^*$ $4 - 6 \text{ GHz} \le 4 \text{ mm}^*$			
	uniform	grid: ∆z _{Zoom} (n)	\leq 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm			
Maximum zoom scan spatial resolution, normal to phantom surface		$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	\leq 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm			
surface	grid Δz _{Zoom} (n>1) between sub points		$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$				
Minimum zoom scan volume	x, y, z	·	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm			
 Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 							

Step 4: Power reference measurement (drift)

2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %



Unless otherwise agreed in writing, this document is issued by the Company s overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-</u> subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction iss advised that information contained hereon reflects the Company's findings at the Client's instructions, if any. The Company's sole responsibility is to its Client a transaction from exercising all their rights and obligations under the transaction except in full, without prior written approval of the Company. Any unauthorized appearance of this document is unlawful and offenders may be prosecuted to the results shown in this test report refer only to the sample(s) tested and such sample(Attention: To check the authenticity of testing linspection report & certificate, or email: CN_Doccheck@ess.com	<u>Conditions.aspx</u> <u>in/en/Terms-and-(</u> sues defined the a time of its inter and this docume n documents. The alteration, forge fullest extent of s) are retained for	and, for electronic Conditions/Terms rein. Any holder vention only and nt does not exc is document can ery or falsification the law. Unless of r 30 days only.	c format documents, <u>s-e-Document.aspx</u> . of this document is I within the limits of nerate parties to a not be reproduced n of the content or therwise stated the
	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300	t(86-512)57355888	f(86-512)57370818	sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 20 of 45

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE3". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Se	Normi, ai0, ai1, ai2	
- Conversion factor	ConvFi	
- Diode compression poi	int Dcpi	
Device parameters: - Fr	requency	f
- Crest factor	cf	
Media parameters: - Co	onductivity	3
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$V_i = U_i + U_i^2 \cdot c f / d c p_i$

With Vi = compensated signal of channel i (i = x, y, z)

Ui = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp i = diode compression point (DASY parameter)



Unless otherwise agreed in writing, this document is issued by the Compan overleaf, available on request or accessible at http://www.sgs.com/en/Terms-au subject to Terms and Conditions for Electronic Documents at http://www.sgs. Attention is drawn to the limitation of liability, indemnification and jurisdiction advised that information contained hereon reflects the Company's findings at Client's instructions, if any. The Company's sole responsibility is to its Clie transaction from exercising all their rights and obligations under the transac except in full, without prior written approval of the Company. Any unauthoriz appearance of this document is unlawful and offenders may be prosecuted to t results shown in this test report refer only to the sample(s) tested and such samp Attention: To check the authenticity of testing /inspection report & certifica or email: CN_Doccheck@sgs.com	nd-Conditions.aspx com/en/Terms-and- issues defined the the time of its inter nt and this docume tion documents. Ti zed alteration, forg the fullest extent of fole(s) are retained fr	and, for electroni Conditions/Term rein. Any holder rvention only an ent does not ex- nis document ca ery or falsificati the law. Unless or 30 days only.	ic format documents, <u>s-e-Document.aspx</u> . of this document is d within the limits of onerate parties to a nnot be reproduced on of the content or otherwise stated the
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300	t(86-512)57355888	f(86-512)57370818	sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 21 of 45

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_{i} = (V_{i} / Norm_{i} \cdot ConvF)^{1/2}$$

H-field probes:

$$H_{i} = (V_{i})^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^{2})/f$$

With Vi = compensated signal of channel i (i = x, y, z)Normi = sensor sensitivity of channel I (i = x, y, z)[mV/(V/m)2] for E-field Probes ConvF = sensitivity enhancement in solution aij = sensor sensitivity factors for H-field probes f = carrier frequency [GHz] Ei = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$SAR = (Etot^2 \cdot \sigma) / (\varepsilon \cdot 1000)$

With SAR = local specific absorption rate in mW/g Etot = total field strength in V/m σ = conductivity in [mho/m] or [Siemens/m] ϵ = equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 2 / 3770$$
 or $P_{pwe} = H_{tot}^2 \cdot 37.7$

with Ppwe = equivalent power density of a plane wave in mW/cm2

Etot = total electric field strength in V/m

Htot = total magnetic field strength in A/m



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a papearance of this document in advised to the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document inatwrite approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document inatwrite approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is anyle to the false to the false the authenticity of testing /inspectual ad such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, piease contact us at telephone: (86-512)5730818 www.sgsgroup.com.cn No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 tested out (86-512)5730818 sys.china@sgs.com



Report No.: KSEM210900013301 Page: 22 of 45

SAR measurement variability and uncertainty 4

4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is remounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is \geq 1.45 W/kg (~ 10% from the 1-a SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.



中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888



Report No.: KSEM210900013301 Page: 23 of 45

4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format document, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-575) 8307 1443, or email: <u>CN.poecheck@ags.com</u>. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5730818 www.sgsgroup.com.cn (86-512)5730818 sys.china@gss.com



Report No.: KSEM210900013301 Page: 24 of 45

5 Description of Test Position

5.1 The Body Test Position

The SAR evaluation shall be performed for all surfaces of the DUT that are accessible during intended use, as indicated in Figure. The separation distance in testing shall correspond to the intended use distance as specified in the user instructions provided by the manufacturer. If the intended use is not specified, all surfaces of the DUT shall be tested directly against the flat phantom.

The surface of the generic device (or the surface of the carry accessory holding the DUT) pointing towards the flat phantom shall be parallel to the surface of the phantom.




Figure-Test positions for a generic device

5.1.1 Extremity exposure conditions

Devices that are designed or intended for use on extremities, or mainly operated in extremity only exposure conditions, i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Test Exclusion Thresholds in 8.2 should be applied to determine SAR test requirements. When extremity SAR testing is required, a flat phantom must be used if the exposure condition is more conservative than the actual use conditions; otherwise, a KDB inquiry is required to determine the phantom and test requirements. Body SAR compliance is also tested with a flat phantom. For devices with irregular shapes or form factors that do not conform to a flat phantom, and/or unusual operating configurations and exposure conditions, a KDB inquiry is also required to determine the appropriate SAR measurement procedures. Unless it is specified differently in the published RF exposure KDB procedures, when simultaneous transmission applies to extremity exposure, the simultaneous transmission SAR test exclusion provisions should be applied. When simultaneous transmission SAR measurement is required, the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01 should be applied.

SAR can test the sides near the antenna, the surface of the device should be tested for SAR compliance with the device touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent device surface is used to determine if SAR testing is required for the adjacent surfaces, with the



Unless otherwise agreed in writing, this document is issued by the Company s overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms.and-</u> subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction iss advised that information contained hereon reflects the Company's findings at the Client's instructions, if any. The Company's sole responsibility is to its Client a transaction from exercising all their rights and obligations under the transactior except in full, without prior written approval of the Company. Any unauthorized appearance of this document is unlawful and offenders may be prosecuted to the results shown in this test report refer only to the sample(s) tested and such sample(Attention: To check the authenticity of testing /inspection report & certificate, or email: CN.Doccheck@sgs.com	<u>Conditions.aspx</u> and, for electronic format documents, <u>men/Terms-and-Conditions/Terms-e-Document aspx</u> . sues defined therein. Any holder of this document is e time of its intervention only and within the limits of and this document does not exonerate parties to a n documents. This document cannot be reproduced l alteration, forgery or falsification of the content or fullest extent of the law. Unless otherwise stated the (s) are retained for 30 days only.
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300	t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300	t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 25 of 45

adjacent surface positioned against the phantom and the surface containing the antenna positioned perpendicular to the phantom.

5.1.2 Test Distance for SAR Evaluation

For 1g Body SAR the EUT is set 0mm away from the phantom and the test distance is 0mm.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-575) 8307 1443, or email: <u>CN_Doccheck@sgs.com</u>

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 26 of 45

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The bellowing tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients						iency Hz)			-	
(% by weight)	450		83	835		915		1900		50
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78
HSL5GHz is compos	ed of the	following	ingredier	nts:						
Water: 50-65%										
Mineral oil: 10-30%										
Emulsifiers: 8-25%										
Sodium salt: 0-1.5%)									
MSL5GHz is compos	ed of the	following	ingredie	nts:						
Water: 64-78%										
Mineral oil: 11-18%										
Emulsifiers: 9-15%										
Sodium salt: 2-3%										

Table 2: Recipe of Tissue Simulate Liquid



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are related for 30 days only. Attention: To check the authenticity of testing /inspection report & certuing /inspection report & ceruing /inspection report & ceruing /inspectio



Report No.: KSEM210900013301 Page: 27 of 45

6.1.2 Test Liquids Confirmation

Simulated tissue liquid parameter confirmation

The dielectric parameters were checked prior to assessment using the SPEAG DAK3.5 dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

IEEE SCC-34/SC-2 P1528 recommended tissue dielectric parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency	Не	ad	Bo	dy
(MHz)	ε _r	σ (S/m)	ε _r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ε_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client to the limitaties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer rouly to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing linspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>Ch.Doccheck@sgs.com</u> No.10, Weige Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5737081 www.sgsgroup.com.cn mail: <u>ch.Doccheck@sgs.com</u> **h** is 1, 5, b the there there there there there such the such states the system of the solution system.



Report No.: KSEM210900013301 Page: 28 of 45


6.1.3 Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was 22±2°C.

Tissue Type	Measured Frequency (MHz)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Liquid Temp. (℃)	Date	
2450 Head	2450	1.809	38.744	1.80	39.20	0.50	-1.16	±5	22.1	2021/10/20	

6.2 SAR System Check

The microwave circuit arrangement for system check is sketched in bellow figure. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table. During the tests, the ambient temperature of the laboratory was in the range 22±2°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

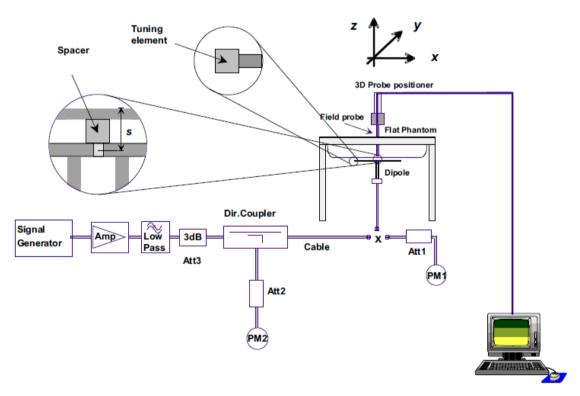

F-3. the microwave circuit arrangement used for SAR system verification



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document heir or any be prosecuted to the fullest extend of the labor. Notes otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (66-755) 8307 1443, or email: Ch.Doccheck@gs.com

 No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
 (86-512)57355888
 (86-512)57370818
 www.sgsgroup.com.on sgs.china@gss.com



Report No.: KSEM210900013301 Page: 29 of 45

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN Doccheck@oss.com No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSEM210900013301 Page: 30 of 45

6.2.2 Summary System Check Result(s)

Validatio	n Kit	Measured SAR 250mW 1g (W/kg)	Measured SAR 250mW 10g (W/kg)	Measured SAR (normalized to 1w) 1g (W/kg)	Measured SAR (normalized to 1w) 10g (W/kg)	Target SAR (normalized to 1w) (±10%) 1-g(W/kg)	Target SAR (normalized to 1w) (±10%) 10-g(W/kg)	Liquid Temp. (℃)	Measured Date
					U/	53	24.6		
D2450V2	Head	13.6	6.06	54.4	24.24	(47.70~58.30)	(22.14~27.60)	22.1	2021/10/20

6.2.3 Detailed System Check Results

Please see the Appendix A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemrification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-575) 8307 1443, or email: Ch.Doccheck@sgs.com No.10, Weige Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5737081 www.sgsgroup.com.cn (86-512)5737081 www.sgsgroup.com.cn (86-512)5737081 sys.china@sgs.com



Report No.: KSEM210900013301 Page: 31 of 45

7 Test Configuration

7.1 Operation Configurations

7.1.1 Wi-Fi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.1.1.1 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.1.1.2 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.





Report No.: KSEM210900013301 Page: 32 of 45

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is \leq 1.2 W/kg or all required channels are tested.

7.1.1.3 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- 2) When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace "initial test configuration" with "all tested higher output power configurations"

7.1.1.4 2.4 GHz Wi-Fi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are



Unless otherwise agreed in writing, this document is issued by the Compar	v subject to its Ge	eneral Condition	s of Service printed	
overleaf, available on request or accessible at http://www.sgs.com/en/Terms-a	nd-Conditions.aspx	and, for electroni	ic format documents.	
subject to Terms and Conditions for Electronic Documents at http://www.sgs.				
Attention is drawn to the limitation of liability, indemnification and jurisdiction	issues defined the	rein. Any holder	of this document is	
advised that information contained hereon reflects the Company's findings at	the time of its inter	rvention only an	d within the limits of	
Client's instructions, if any. The Company's sole responsibility is to its Clie				
transaction from exercising all their rights and obligations under the transact				
except in full, without prior written approval of the Company. Any unauthorize	zed alteration, forg	ery or falsification	on of the content or	
appearance of this document is unlawful and offenders may be prosecuted to			otherwise stated the	
results shown in this test report refer only to the sample(s) tested and such sample	ole(s) are retained f	or 30 days only.		
Attention: To check the authenticity of testing /inspection report & certification	ate, please contact	us at telephone	e: (86-755) 8307 1443,	
or email: <u>CN.Doccheck@sgs.com</u>				
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn	
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300	100 540)57055000	400 F40)F7070040	sgs.china@sgs.com	
电声•江办•昆山市黄子生则亚风伟亚路10号 邮编 215300	t(86-512)57355888	f(86-512)57370818	sys.ciiiia@sys.coiii	



Report No.: KSEM210900013301 Page: 33 of 45

described in following.

802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1). When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
 - 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.



中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSEM210900013301 Page: 34 of 45

7.1.2 BluetoothTest Configuration

For the Bluetooth SAR tests, a communication link is set up with the test mode software for BT mode test. Bluetooth USES frequency hopping technology to divide the transmitted data into packets and transmit the packets respectively through 79 designated Bluetooth channels, 1MHz Bandwidth, frequency hops at 1600 hops/second per the Bluetooth standard. The Radio Frequency Channel Number (RFCN) is allocated to 0, 39 and 78 respectively in the case of 2402~2480 MHz during the test at each test frequency channel, the EUT is operated at the RF continuous emission mode.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN_Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5737081 www.sgsgroup.com.cn net is '江苏 · 昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)5737081 sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 35 of 45

8 Test Result

8.1 Measurement of RF Conducted Power

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up
	1	2412		12.52	13
802.11b	6	2437	1	17.02	18
	11	2462		17.18	18
	1	2412		12.32	13
802.11g	6	2437	MCS0	15.68	16
	11	2462		13.54	14
000.44	1	2412		11.81	12
802.11n HT20 SISO	6	2437	MCS0	15.41	16
11120 0100	11	2462		13.41	14
000.44	3	2422		14.26	15
802.11n HT40 SISO	6	2437	MCS0	14.84	15
1140 0100	9	2452		12.81	13

8.1.1 Conducted Power Of Wi-Fi and BT

Note:

a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

	BLE		Average Conducted	Tuno un (dPm)	
Modulation	Nodulation Channel Frequency (MHz)		Power(dBm)	Tune up (dBm)	
	0	2402	8.898	9	
GFSK	19	2440	8.703	9	
	39	2480	8.359	9	

8.2 Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion





Report No.: KSEM210900013301 Page: 36 of 45

conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freg. Band	Frequency	Position	Average Power		Test Separation	Calculate	Exclusion	Exclusion
Treq. Dana	(GHz)	1 Oblight	dBm	mW	(mm)	Value	Threshold	(Y/N)
Wi-Fi	2.462	Body	18	63.1	28	3.53	3.0	N
Bluetooth	2.48	Body	9	7.9	28	0.44	3.0	Y

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and \leq 7.5 for 10-g extremity SAR, where

• f(GHz) is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

· The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is \leq 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Cond No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn f(86-512)57370818 sgs.china@sgs.com t(86-512)57355888

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSEM210900013301 Page: 37 of 45

8.3 Measurement of SAR Data

8.3.1 SAR Result Of WiFi 2.4G

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)		up	Scaled factor	Scaled SAR (W/kg) 1-g	SAR Limit (W/kg) 1-g	Liquid Temp.
					Test Dat	a (Separa	te 0mm)						
Back side	802.11b	2412	100.00	1	0.044	0.018	0.02	12.52	13	1.117	0.049	1.6	22
Front side	802.11b	2462	100.00	1	0.015	0.009	0.13	17.18	18	1.208	0.018	1.6	22
Back side	802.11b	2462	100.00	1	0.062	0.034	-0.07	17.18	18	1.208	0.075	1.6	22
Top side	802.11b	2462	100.00	1	0.030	0.016	0.04	17.18	18	1.208	0.036	1.6	22
Left side	802.11b	2462	100.00	1	0.040	0.021	-0.02	17.18	18	1.208	0.048	1.6	22
Right side	802.11b	2462	100.00	1	0.018	0.008	-0.05	17.18	18	1.208	0.022	1.6	22
Back side	802.11b	2437	100.00	1	0.056	0.030	-0.01	17.02	18	1.253	0.07	1.6	22

Note:

1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B

2) Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for

each test configuration is ≤ 0.8 W/kg (2.0W/kg for 10g) then testing at the other channels is not required for such test configuration(s).





38 of 45

8.4 Multiple Transmitter Evaluation

8.4.1 Simultaneous SAR SAR test evaluation

Simultaneous Transmission

NO.	Simultaneous Transmission Configuration	Body
1	WiFi + BT	No

Page:



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemrification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report accentificate, please contact us at telephone: (86-575) 8307 1443, or email: <u>CN_Doccheck@sgs.com</u> No.10, Weige Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5737081 www.sgsgroup.com.cn mail: <u>CN_Doccheck@sgs.com</u> plat.ixfs · Ruln Elephone: (86-512)573081 sys.china@sgs.com



Report No.: KSEM210900013301 Page: 39 of 45

9 Equipment list

	Test Platform	SPEAG DASY5 Professional								
	Location	Compliance Certification Services (Kunshan) Inc.								
S	oftware Reference	DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)								
	Hardware Reference									
	Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration				
\square	PC	HP	Core(rm)3.16G	CZCO48171H	N/A	N/A				
\square	Signal Generator	Agilent	N5182A	MY50142015	2021/09/24	2022/09/23				
	S-Parameter Network Analyzer	Agilent	E5071B	MY42301382	2021/02/01	2022/01/31				
\square	DAK-3.5 probe	SPEAG	DAK-3.5	1102	N/A	N/A				
\square	Power meter	Anritsu	ML2495A	1445010	2021/04/15	2022/04/14				
\square	Power sensor	Anritsu	MA2411B	1339220	2021/04/15	2022/04/14				
\square	DAE	SPEAG	DAE4	1245	2021/05/19	2022/05/18				
	E-field PROBE	SPEAG	EX3DV4	3798	2021/05/31	2022/05/30				
\square	Dipole	SPEAG	D2450V2	817	2019/06/10	2022/06/09				
\square	Electro Thermometer	DTM	DTM3000	3030	2021/10/17	2022/10/16				
\square	Amplifier	Mini-circuits	ZVE-8G	110405	N/A	N/A				
\square	Amplifier	Mini-circuits	ZHL-42	QA1331003	N/A	N/A				
\boxtimes	3db ATTENUATOR	MINI	MCL BW-S3W5	0533	N/A	N/A				
	DUMMY PROBE	SPEAG	DP_2	SPDP2001AA	N/A	N/A				
	Dual Directional Couple	er Woken	20W couple	DOM2BHW1A1	N/A	N/A				
	SAM PHANTOM (ELI4 v4.0)	SPEAG	QDOVA001BB	1102	N/A	N/A				
	Twin SAM Phantom	SPEAG	QD000P40CD	1609	N/A	N/A				
	ROBOT	SPEAG	TX60	F10/5E6AA1/A101	N/A	N/A				
	ROBOT KRC	SPEAG	CS8C	F10/5E6AA1/C101	N/A	N/A				
	LIQUID CALIBRATION KIT	ANTENNESSA	41/05 OCP9	00425167	N/A	N/A				

Note: All the equipments are within the valid period when the tests are performed.

All measurement facilities used to collect the measurement data are located at

No.10, Weiye Rd., Innovation Park, Eco & Tec. Development Part, Kunshan City, Jiangsu Province, China.





Report No.: KSEM210900013301 Page: 40 of 45

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the authenticity of testing /inspection report & certificate, jiested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, jiested and such sample(s) are retained for 30 days only. Not 00, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57370818 www.sggroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 41 of 45

Appendix A: Detailed System Check Results

The plots are showing as followings.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN_Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5730818 www.sgsgroup.com.cn test-structures in the set of t



Report No.: KSEM210900013301 Page: 42 of 45

Date: 2021/10/20

Test Laboratory: Compliance Certification Services Inc.

11.1.1 SystemPerformanceCheck-Head 2450MHz

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: 817

Communication System: UID 0, CW; Frequency: 2450 MHz;Duty Cycle: 1:1 Medium parameters used: f = 2450 MHz; σ = 1.809 S/m; ϵ_r = 38.744; ρ = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:


- Probe: EX3DV4 SN3798; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/05/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2021/05/19
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequencies above 1 GHz/Pin=250 mW, dist=10mm (EX-Probe)/Area Scan (9x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 17.4 W/kg

System Performance Check at Frequencies above 1 GHz/Pin=250 mW, dist=10mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.8 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 26.1 W/kg SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.06 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

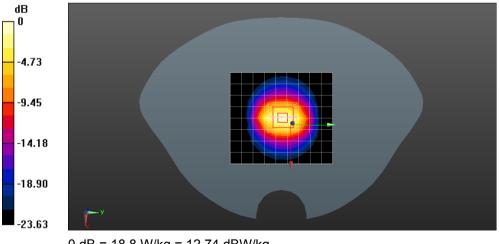

0 dB = 18.8 W/kg = 12.74 dBW/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing Jinspection report accentificate, please contact us at telephone: (86-512)5730818 www.sgsgroup.com.cn was vegroup.com.cn (186-512)5730818 sys.china@sgs.com of the Site. Si



Report No.: KSEM210900013301 Page: 43 of 45

Appendix B: Detailed Test Results

The plots of worse case are showing as followings.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN_Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5730818 www.sgsgroup.com.cn test-structures in the set of t



Report No.: KSEM210900013301 Page: 44 of 45

Date: 2021/10/20

Test Laboratory: Compliance Certification Services Inc.

11.1.2 WLAN 2.4GHz 802.11b Back Side 0mm Ch6

DUT: Wireless Bluetooth Earphones: Type: T0010


Communication System: UID 0, WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2437 MHz; σ = 1.792 S/m; ϵ_r = 38.791; ρ = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 SN3798; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/05/31; •
- Sensor-Surface: 1.4mm (Mechanical Surface Detection) .
- Electronics: DAE4 Sn1245: Calibrated: 2021/05/19 .
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609 .
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331) •

Configuration/Body/Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.0830 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.255 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 0.109 W/kg SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.034 W/kg Maximum value of SAR (measured) = 0.0905 W/kg

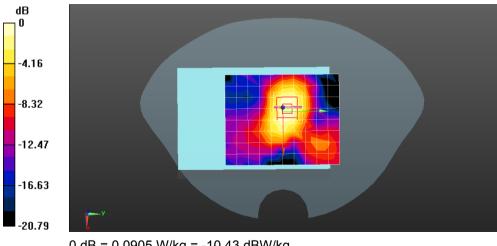

0 dB = 0.0905 W/kg = -10.43 dBW/kg



Unless otherwise agreed in writing, this document is issued by the C overleaf, available on request or accessible at http://www.sgs.com/en/T subject to Terms and Conditions for Electronic Documents at http://ww Attention is drawn to the limitation of liability, indemnification and juris advised that information contained hereon reflects the Company's find Client's instructions, if any. The Company's sole responsibility is to i transaction from exercising all their rights and obligations under the except in full, without prior written approval of the Company. Any una appearance of this document is unlawful and offenders may be prosecu exsults shown in this test report refer only to the sample(s) tested and suc Attention: To check the authenticity of testing /inspection report & c or email: CN.Doccheck@cas.com	erms-and-Conditions.aspx ww.sgs.com/en/Terms-and- diction issues defined the ings at the time of its intei ts Client and this docume transaction documents. Tf authorized alteration, forg ted to the fullest extent of h sample(s) are retained fr	and, for electroni Conditions/Term rein. Any holder vention only an. nt does not exc is document ca ery or falsification the law. Unless or 30 days only.	c format documents, <u>s-e-Document.aspx</u> . of this document is d within the limits of onerate parties to a noto be reproduced on of the content or otherwise stated the
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300	t(86-512)57355888	f(86-512)57370818	sgs.china@sgs.com



Report No.: KSEM210900013301 Page: 45 of 45

Appendix C: Calibration certificate

Appendix D: Photographs

---END----



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t@6-512]5730818 www.sggroup.com.cn Part is $\sqrt{166-512}$ www.sggroup.com.cn test. This 42126370818 spgs.com