



Fangguang Inspection & Testing Co., Ltd.



MEASUREMENT REPORT

FCC PART 15.247 Bluetooth-LE

Report No.: S20210816107801E02

Issue Date: 11-16-2021

Applicant: DONGGUAN MENTECH OPTICAL & MAGNETIC CO LTD

Address: Building 1, No.157 Dongyuan Av, Shipai Town, Dongguan City, Guangdong Province

FCC ID: 2A22B-65P3

Product: GaN Fast Charger(Bluetooth version)

Model No.: MCUS-20032565P3

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15 Subpart C (15.247)

Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v05r02

Result: Pass

Test Date: Sept 07~ Oct 20, 2021

Compiled By

(Amos Xia)

Senior Test Engineer

Approved By

(Kerry Zhou)

Engineer Manager

The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s). The test report shall not be reproduced except in full without the written approval of Fangguang Inspection & Testing Co., Ltd. Wuxi Branch.

The test report must not be used by the client to claim product certifications, approval, or endorsement by NVLAP, NIST or any agency of U.S. Government.





Revision History

Report No.	Version	Description	Issue Date
S20210816107801E02	Rev. 01	/	11-16-2021

CONTENTS

Description	Page
§2.1033 General Information.....	5
1. INTRODUCTION.....	6
1.1. Scope.....	6
1.2. Fangguang Test Location.....	6
2. PRODUCT INFORMATION.....	7
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Operation Frequency / Channel List.....	8
2.4. Device Capabilities.....	8
2.5. Description of Test Software.....	8
2.6. Test Mode.....	8
2.7. Test Configuration.....	9
2.8. EMI Suppression Device(s)/Modifications.....	9
2.9. Labeling Requirements.....	9
2.10. Calculation with all conversion and correction factors used.....	10
3. DESCRIPTION OF TEST.....	11
3.1. Evaluation Procedure.....	11
3.2. AC Line Conducted Emissions.....	11
3.3. Radiated Emissions.....	12
4. ANTENNA REQUIREMENTS.....	13
5. TEST EQUIPMENT CALIBRATION DATE.....	14
6. MEASUREMENT UNCERTAINTY.....	15
7. TEST RESULT.....	16
7.1. Summary.....	16
7.2. 6dB Bandwidth Measurement.....	17
7.2.1. Test Limit.....	17
7.2.2. Test Procedure used.....	17
7.2.3. Test Setting.....	17
7.2.4. Test Setup.....	17
7.2.5. Test Result.....	18
7.3. Output Power Measurement.....	21
7.3.1. Test Limit.....	21

7.3.2. Test Procedure Used.....	21
7.3.3. Test Setting.....	21
7.3.4. Test Setup.....	21
7.3.5. Test Result of Output Power.....	22
7.4. Power Spectral Density Measurement.....	25
7.4.1. Test Limit.....	25
7.4.2. Test Procedure Used.....	25
7.4.3. Test Setting.....	25
7.4.4. Test Setup.....	25
7.4.5. Test Result.....	26
7.5. Conducted Band Edge and Out-of-Band Emissions.....	30
7.5.1. Test Limit.....	30
7.5.2. Test Procedure Used.....	30
7.5.3. Test Setting.....	30
7.5.4. Test Setup.....	30
7.5.5. Test Result.....	31
7.6. Radiated Spurious Emission Measurement.....	43
7.6.1. Test Limit.....	43
7.6.2. Test Procedure Used.....	43
7.6.3. Test Setting.....	43
7.6.4. Test Setup.....	45
7.6.5. Test Result.....	47
7.7. Radiated Restricted Band Edge Measurement.....	55
7.7.1. Test Limit.....	55
7.7.2. Test Procedure Used.....	58
7.7.3. Test Setting.....	58
7.7.4. Test Setup.....	59
7.7.5. Test Result.....	60
7.8. AC Conducted Emissions Measurement.....	76
7.8.1. Test Limit.....	76
7.8.2. Test Setup.....	76
7.8.3. Test Result.....	77
8. CONCLUSION.....	81

§2.1033 General Information

Applicant:	DONGGUAN MENTECH OPTICAL & MAGNETIC CO LTD
Applicant Address:	Building 1, No.157 Dongyuan Av, Shipai Town, Dongguan City, Guangdong Province
Manufacturer:	DONGGUAN MENTECH OPTICAL & MAGNETIC CO LTD
Manufacturer Address:	Building 1, No.157 Dongyuan Av, Shipai Town, Dongguan City, Guangdong Province
Factory1:	DONGGUAN MENTECH OPTICAL & MAGNETIC CO LTD
Factory1 Address:	No.157 Dongyuan Av, Shipai Town, Dongguan City, Guangdong Province
Factory2:	Jiangxi Mentech Electronics Co. Ltd
Factory2 Address:	Zhongguang Innovation Building 1, Guangchang County Industrial Park, Fuzhou City, Jiangxi Province, 344900 China
Test Site:	Fangguang Inspection & Testing Co., Ltd.
Test Site Address:	200 Linghu Avenue, Xinwu District, Wuxi City, China
FCC Rule Part(s):	Part 15 Subpart C (15.247)
FCC ID:	2A22B-65P3
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	Digital Transmission System (DTS)

1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2. Fangguang Test Location

These measurement tests were performed at the Fangguang Inspection and testing Co.,LTD located at 200 Linghu Avenue, Xinwu District, Wuxi City. The detailed description of the measurement facility was found to be in compliance with the requirements of ANSI C63.10-2013.

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	GaN Fast Charger(Bluetooth version)
Model Name:	MCUS-20032565P3
Rated value:	INPUT:100-240V~,50/60Hz,1.5A Type-C1 OUTPUT:3.3V-21V---3A or 5V---3A or 9V---3A or 12V---3A or 15V---3A or 20V---3.25A(65W Max) Type-C2 OUTPUT:3.3V-21V---3A or 5V---3A or 9V---3A or 12V---3A or 15V---3A or 20V---3.25A(65W Max) Type-C1+ Type-C1 OUTPUT: 63W Max
Bluetooth Version:	4.2(1Mbps), 5.0(2Mbps)

2.2. Product Specification Subjective to this Report

Bluetooth Frequency	2402~2480MHz
Bluetooth Version	4.2(1Mbps), 5.0(2Mbps)
Type of modulation	GFSK
Data Rate	1Mbps/2Mbps
Antenna Type:	PCB Antenna
Antenna Gain:	0.89dBi

2.3. Operation Frequency / Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

2.4. Device Capabilities

This device contains the following capabilities:Bluetooth (4.2)

Note: The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW =8MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are 46.67%.

2.5. Description of Test Software

The test utility software used during testing was “EMI_Tool”, the version was v 1.4, and the emission setting value is 10.5.

2.6. Test Mode

Test Mode	Mode 1: Transmit by BLE_1M Mode 2: Transmit by BLE_2M
-----------	--

2.7. Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

2.10. Calculation with all conversion and correction factors used

For AC Line Conducted Emissions Test:

Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

For Radiated Emissions Below 1GHz Test:

Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

For Radiated Emissions Above 1GHz Test:

Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. The turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	FWXGJC-2016-181	1 year	2022/02/25
Two-Line V-Network	R&S	ENV 216	FWXGJC-2016-182	1 year	2022/01/17
AMN	AFJ	LT32C/10	FWXGJC-2016-179	1 year	2022/05/30
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-387	1 year	2022/01/17

Radiated Emission

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Loop Antenna	Schwarzbeck	FMZB 1519B	FWXGJC-2018-015	1 year	2024/08/13
Bi-Log Antenna	R&S	HL562E	FWXGJC-2016-267-06	3 year	2022/03/30
Broadband Horn Antenna	R&S	HF907	FWXGJC-2016-267-07	1 year	2022/03/30
Broadband Horn Antenna	Schwarzbeck	BBHA9170	FWXGJC-2018-016	1 year	2022/06/04
EMI Receiver	R&S	ESR26	FWXGJC-2016-267-01	1 year	2022/04/16
Pre-Amplifier	R&S	SCU-18D	FWXGJC-2016-267-05	1 year	2022/01/17
Pre-Amplifier	R&S	EMC184055 SE	/	/	2022/05/30
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-386	1 year	2022/01/17
Anechoic Chamber	Aimuke	EMCCT-3	FWXGJC-2016-270	1 year	2023/04/07

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Keysight	N9010B	FWXGJC-2018-010	1 year	2022/05/30
RF Control Unit	Toncend	JS0806-2	FWXGJC-2018-013	1 year	2022/07/27
Signal Generator	Keysight	N5182B	FWXGJC-2018-011	1 year	2022/05/30
Signal Generator	Keysight	N5171B	FWXGJC-2018-012	1 year	2022/05/30
Comprehensive measuring instrument	R&S	CMW270	FWXGJC-2018-023	1 year	2022/04/16
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-387	1 year	2022/01/17

Test Software	Manufacturer	Version	Asset No.	Function
EMI Test Software	toncend	/	/	/

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 1.28dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 2.72dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 30MHz-1GHz: 1.00 dB 1GHz-26.5GHz: 1.30 dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 0.60dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 0.80dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 0.20MHz

7. TEST RESULT

7.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge	$\geq 20\text{dBc}$		Pass	Section 7.5
15.247(d)	Out-of-Band Emissions	$\geq 20\text{dBc}$		Pass	Section 7.6
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS GEN [8.9])	Radiated	Pass	Section 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits (RSS GEN [8.8])	Line Conducted	Pass	Section 7.8

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.2.2. Test Procedure used


ANSI C63.10-2013 Section 11.8.2 Option 1

KDB 558074 D01 v05r02 – Section 8.2

7.2.3. Test Setting


1. Set RBW = 100 kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = peak
4. Trace mode = max hold
5. Sweep = auto couple
6. Allow the trace was allowed to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


7.2.4. Test Setup

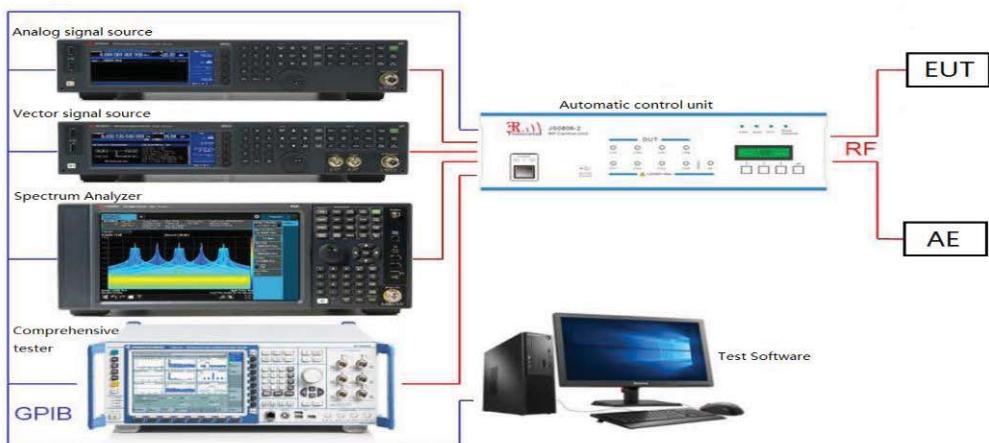

7.2.5. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	99% BW[MHz]	Verdict
BLE_1M	Ant1	2402	0.688	2401.640	2402.328	0.5	1.0378	PASS
		2440	0.700	2439.636	2440.336	0.5	1.0364	PASS
		2480	0.684	2479.644	2480.328	0.5	1.0354	PASS
BLE_2M	Ant1	2402	1.156	2401.416	2402.572	0.5	2.0666	PASS
		2440	1.148	2439.420	2440.568	0.5	2.0667	PASS
		2480	1.144	2479.424	2480.568	0.5	2.0572	PASS

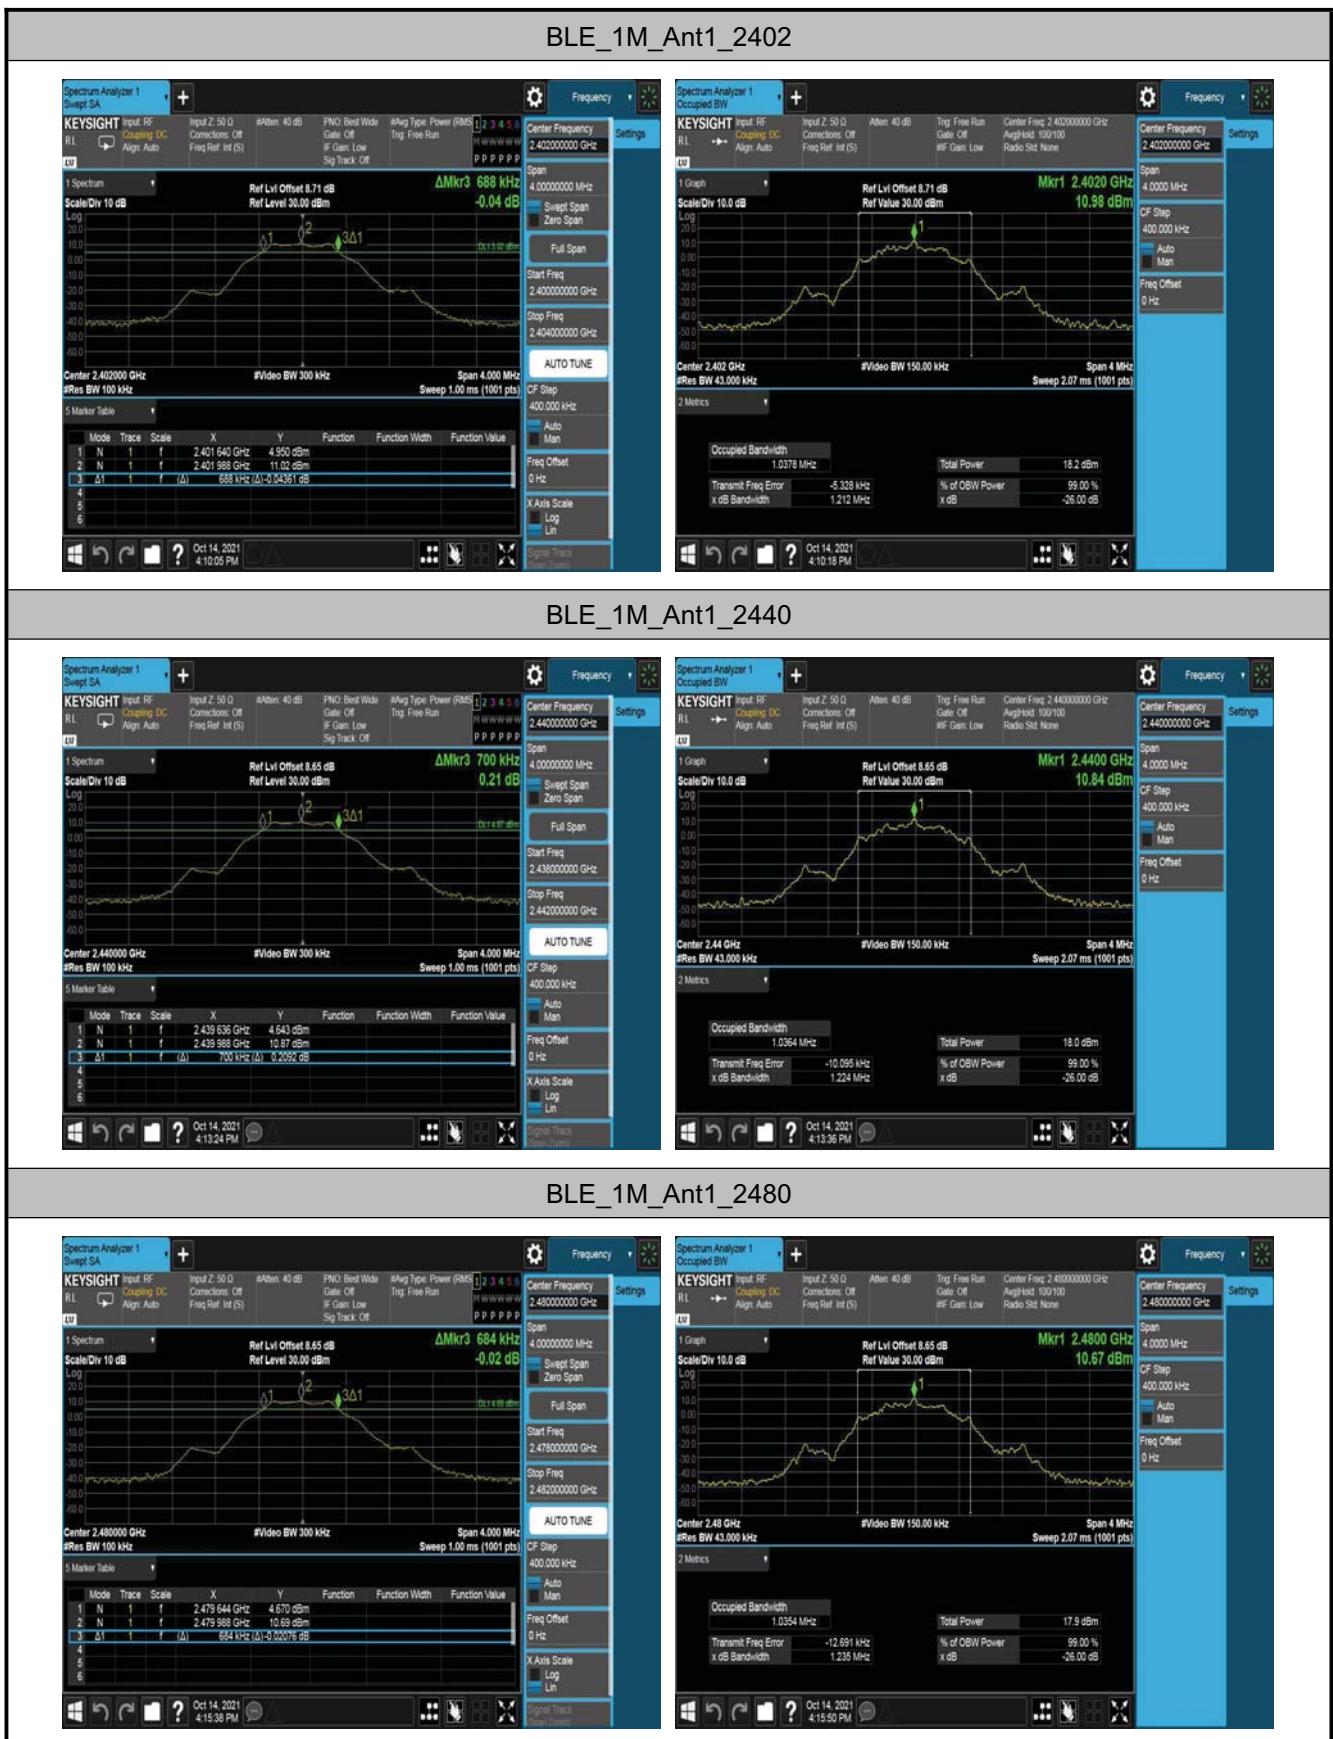

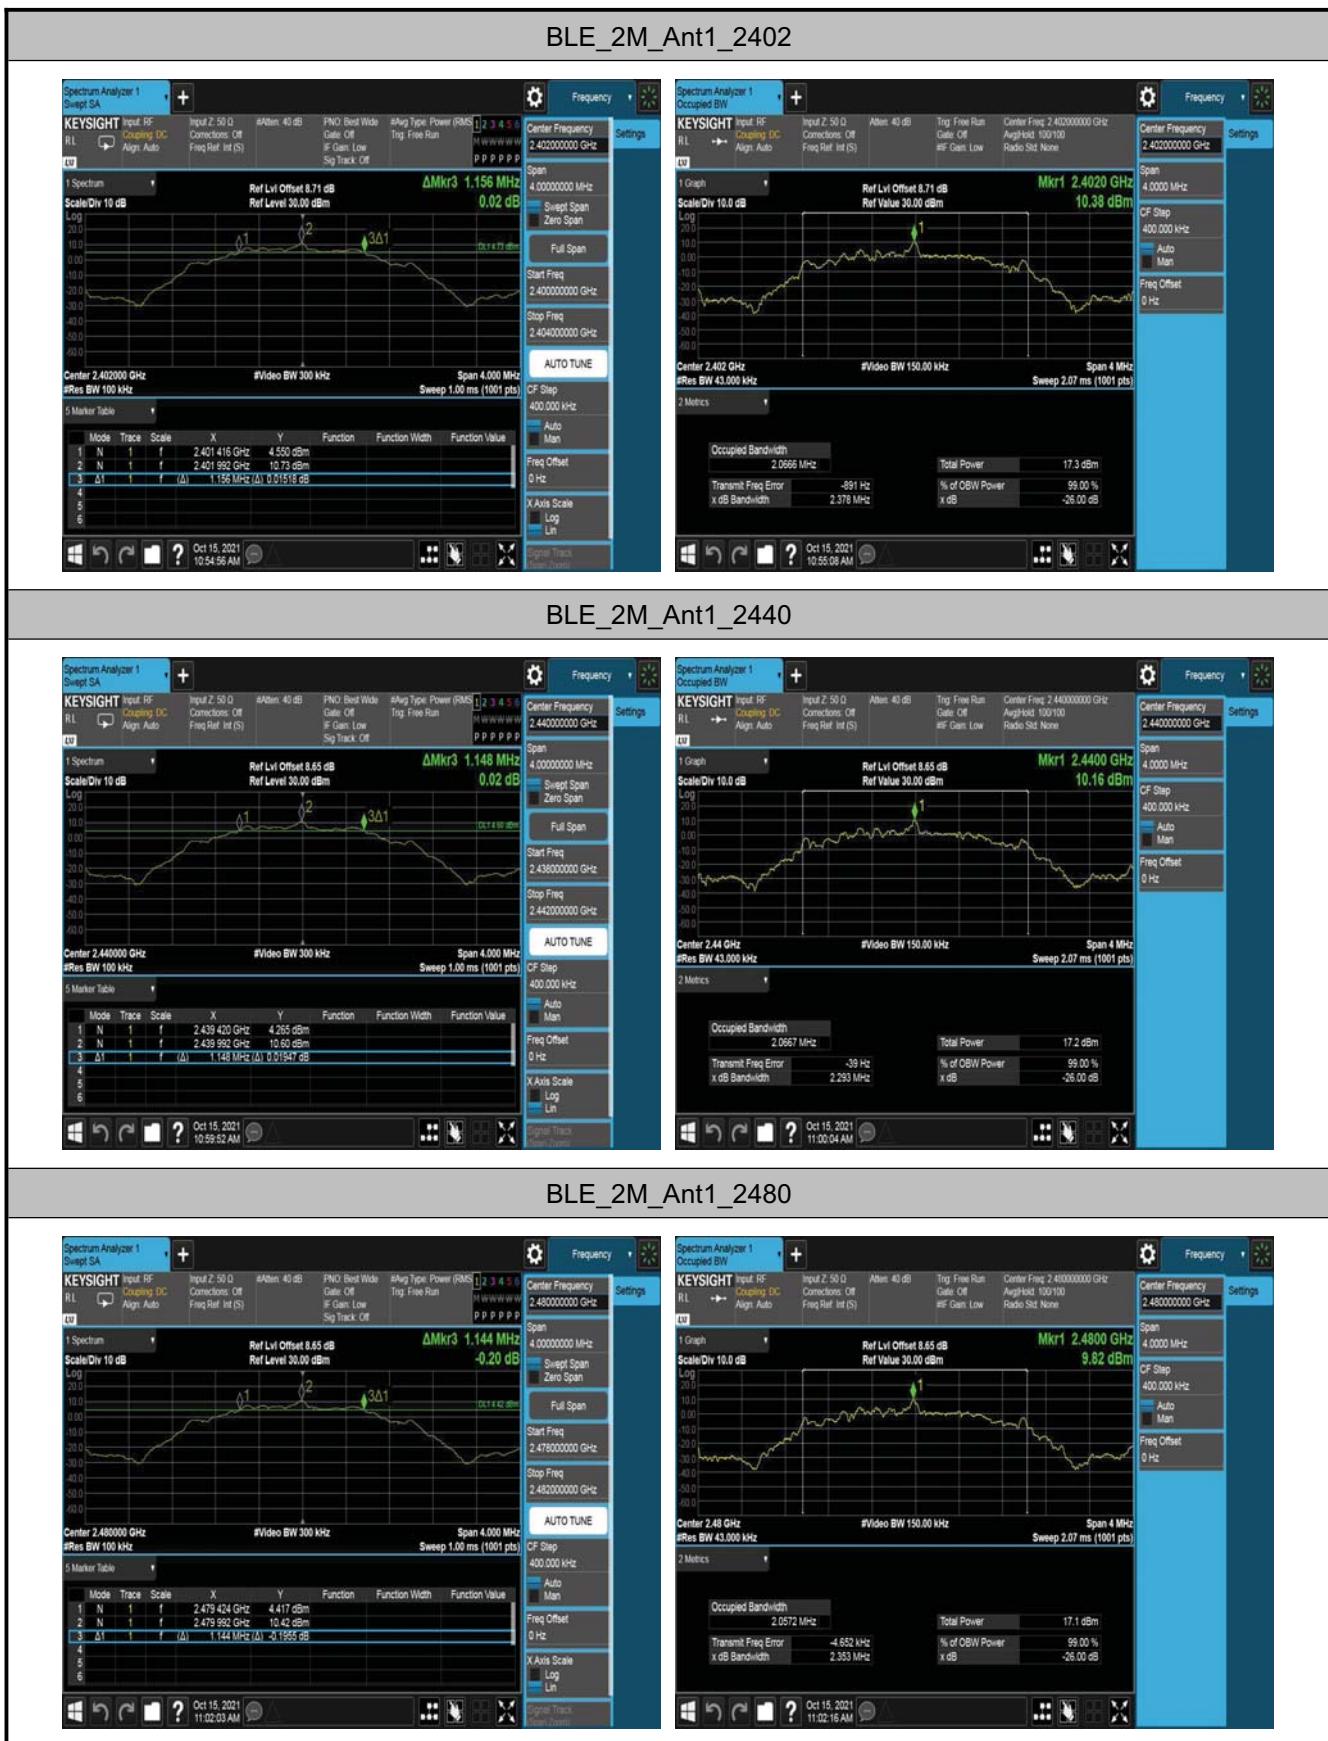

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum permissible conducted output power is 1 Watt (30dBm).

7.3.2. Test Procedure Used


ANSI C63.10-2013 – Section 11.9.1.1

KDB 558074 D01 v05r02 – Section 8.3.1.2

7.3.3. Test Setting

1. Set the RBW \geq DTS bandwidth.
2. Set the VBW $\geq [3 \times \text{RBW}]$.
3. Set the span $\geq [3 \times \text{RBW}]$.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

7.3.4. Test Setup

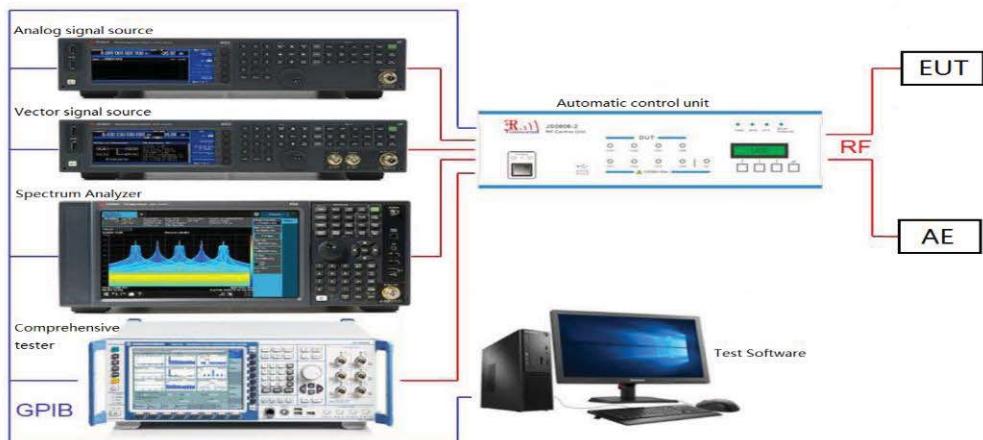

7.3.5. Test Result of Output Power


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	9.53	≤30	PASS
		2440	9.46	≤30	PASS
		2480	9.18	≤30	PASS
BLE_2M	Ant1	2402	11.33	≤30	PASS
		2440	11.16	≤30	PASS
		2480	10.98	≤30	PASS





BLE_2M_Ant1_2402



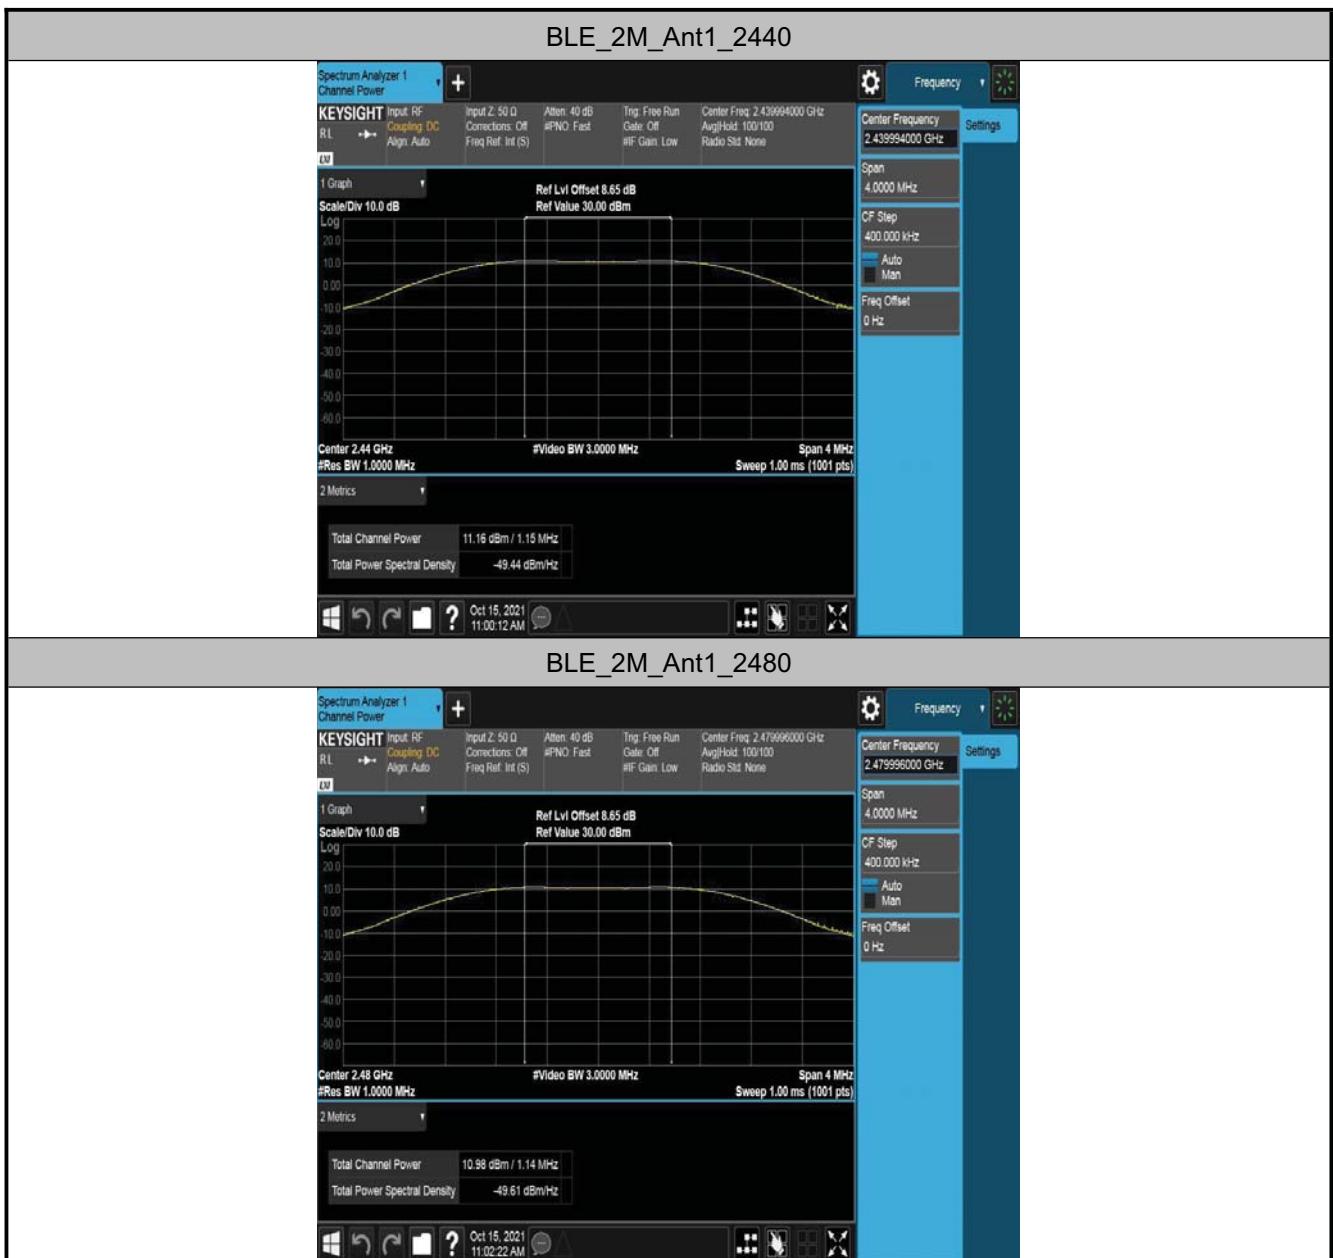

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

7.4.2. Test Procedure Used


KDB 558074 D01 v05r02 - Section 8.4

ANSI C63.10 – Section 11.10.2

7.4.3. Test Setting


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.


7.4.4. Test Setup

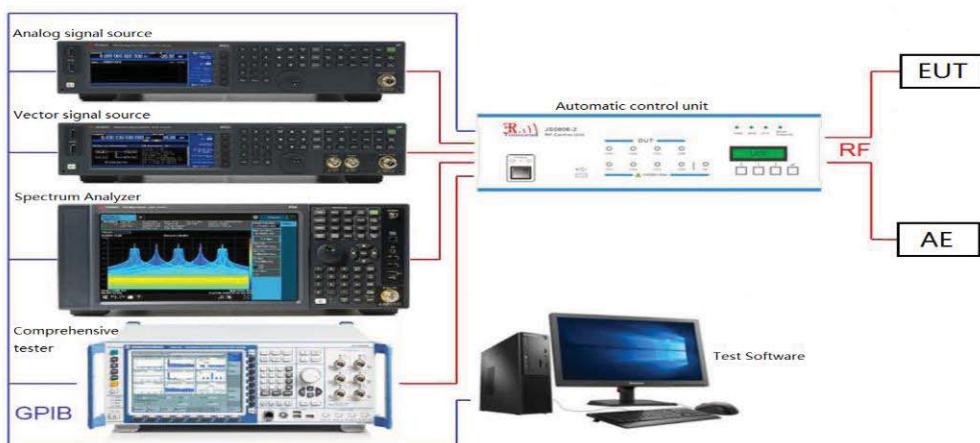


7.4.5. Test Result

Test Mode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	7.02	≤8	PASS
		2440	6.90	≤8	PASS
		2480	6.62	≤8	PASS
BLE_2M	Ant1	2402	2.01	≤8	PASS
		2440	1.97	≤8	PASS
		2480	1.74	≤8	PASS

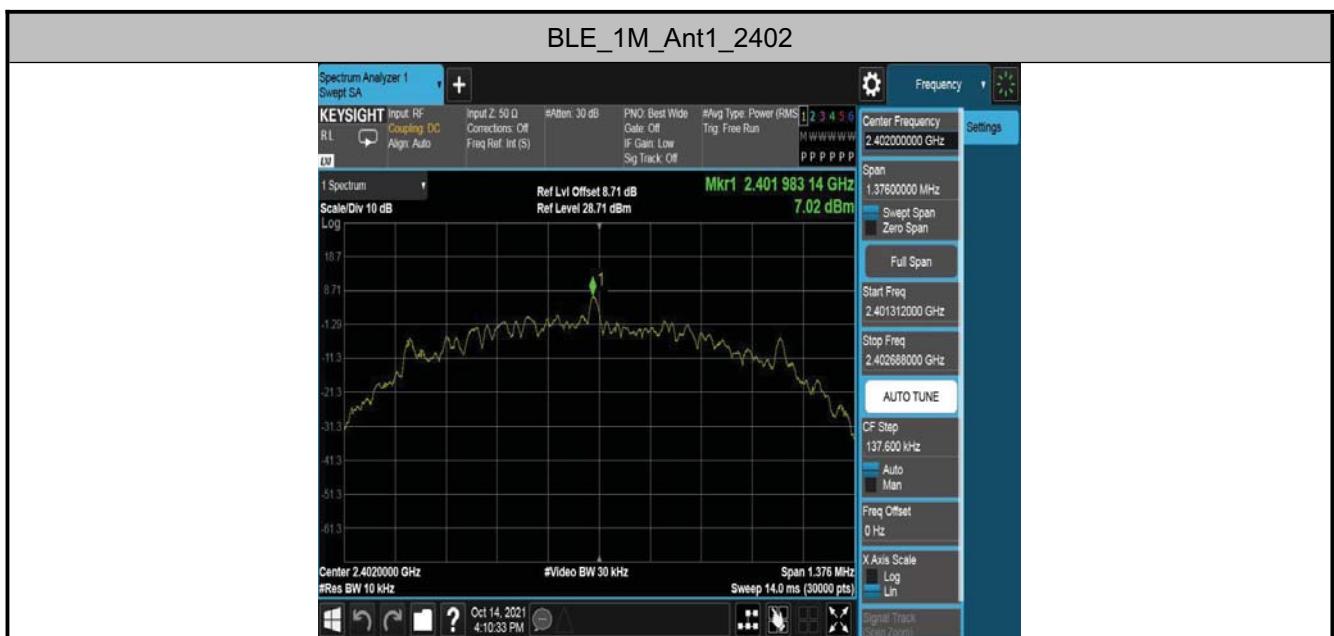

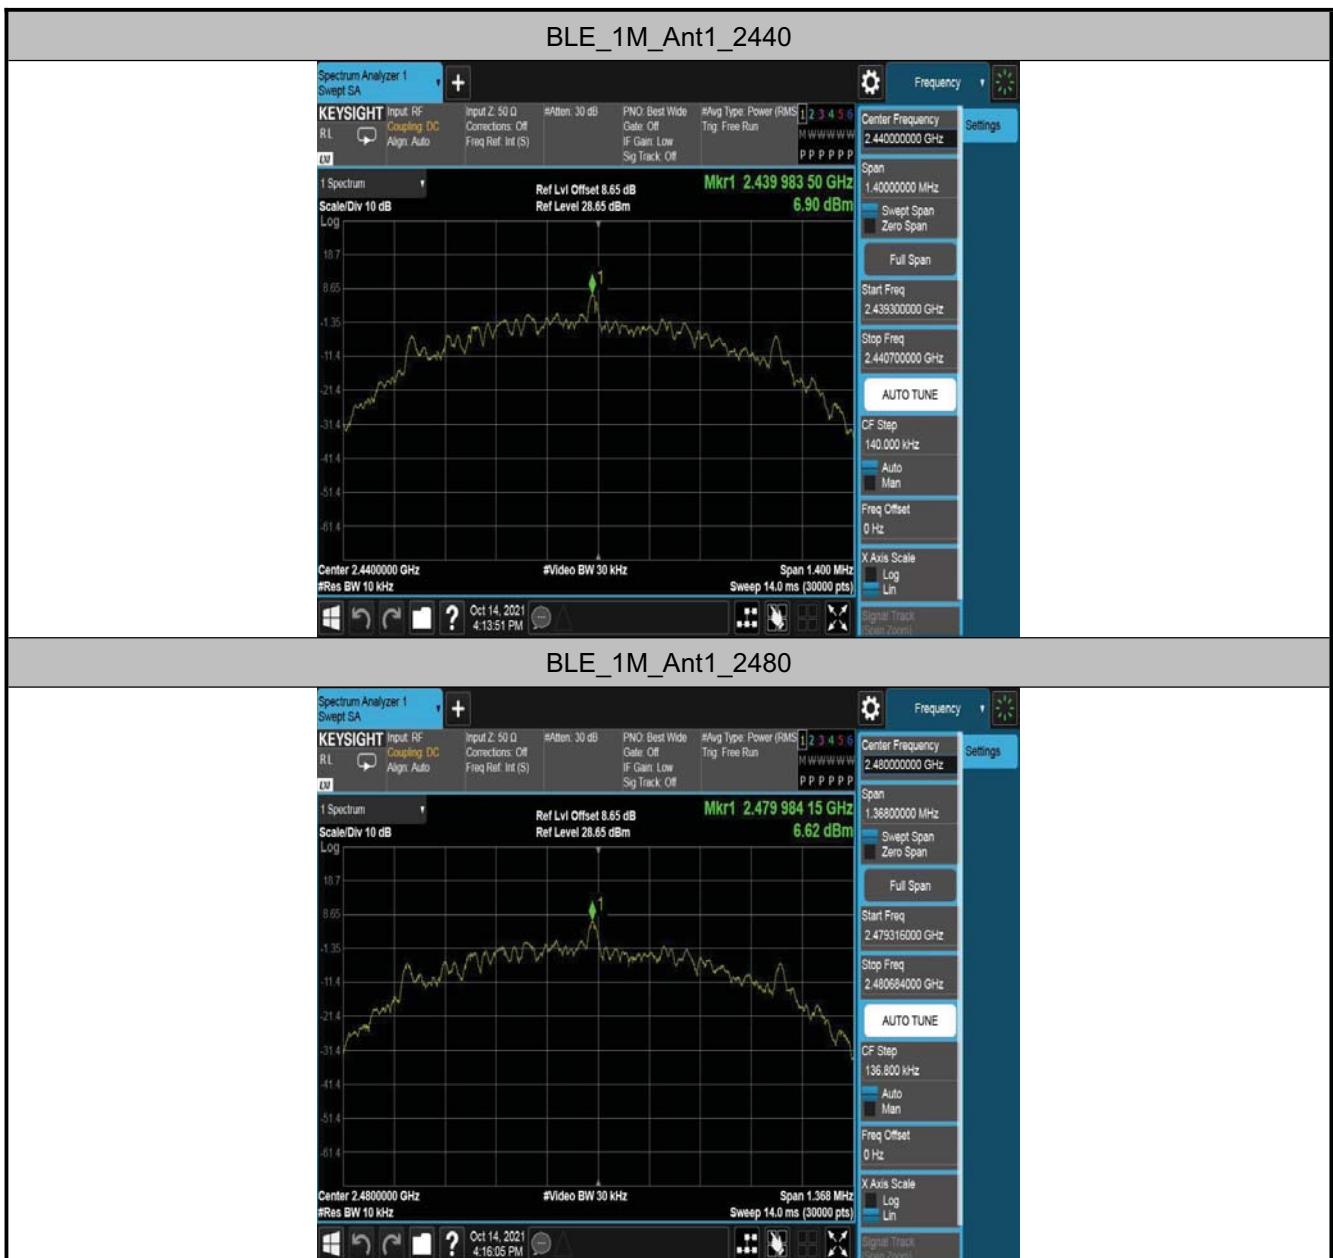

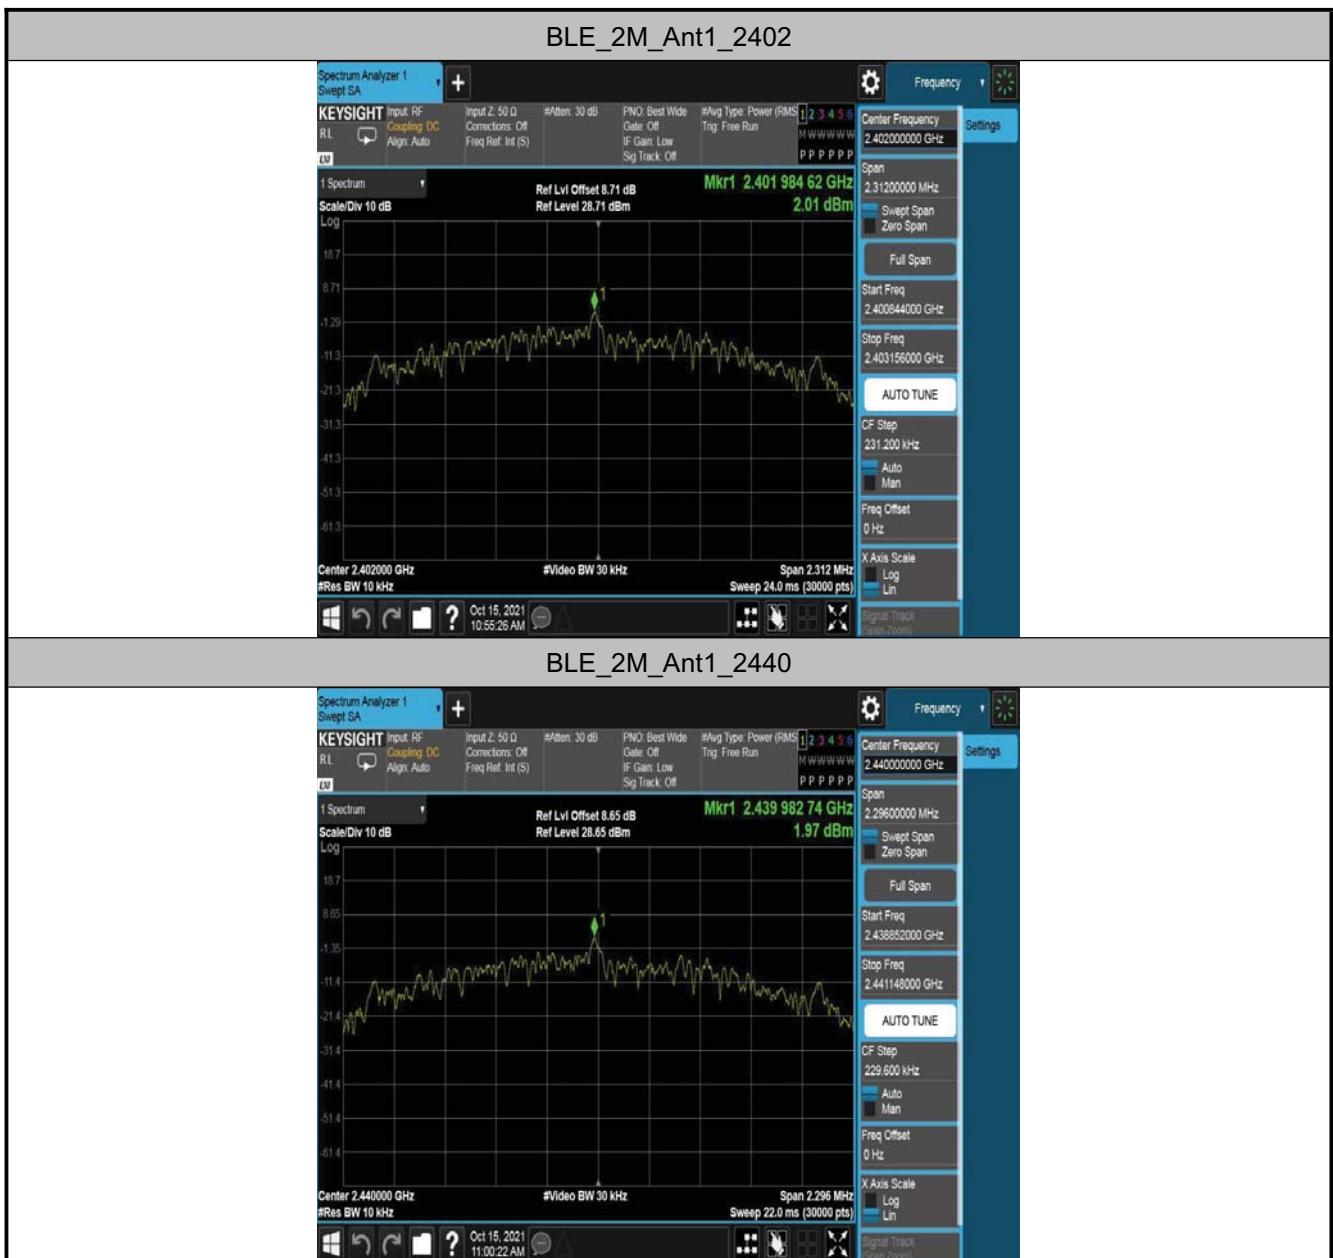



7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used


KDB 558074 D01 v05r02 - Section 8.5 & Section 8.6

ANSI C63.10 – Section 11.11&11.12

7.5.3. Test Setting


- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize

7.5.4. Test Setup

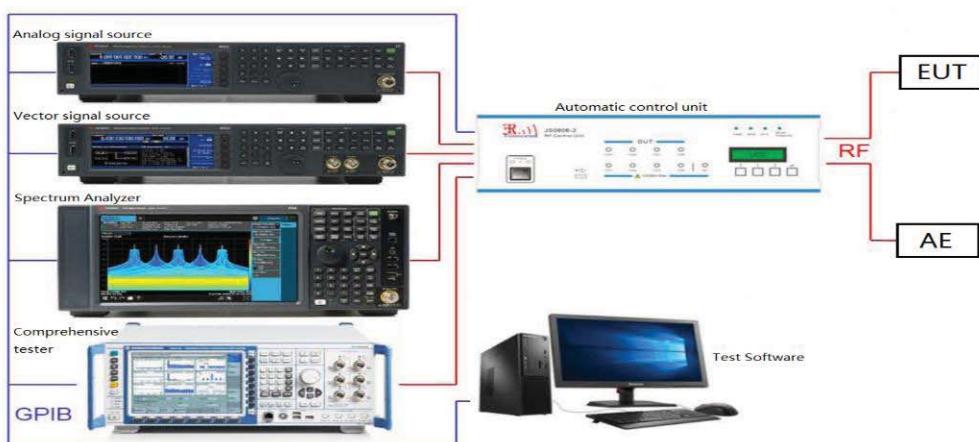



7.5.5. Test Result

Test Mode	Antenna	Channel	Freq Range [MHz]	Ref Level [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	11.00	11.00	---	PASS
			30~1000	11.00	-60.02	≤-9	PASS
			1000~26500	11.00	-48.28	≤-9	PASS
		2440	Reference	10.92	10.92	---	PASS
			30~1000	10.92	-60.99	≤-9.08	PASS
			1000~26500	10.92	-44.17	≤-9.08	PASS
		2480	Reference	10.70	10.70	---	PASS
			30~1000	10.70	-61.34	≤-9.3	PASS
			1000~26500	10.70	-42.2	≤-9.3	PASS
BLE_2M	Ant1	2402	Reference	10.74	10.74	---	PASS
			30~1000	10.74	-60.72	≤-9.26	PASS
			1000~26500	10.74	-46.79	≤-9.26	PASS
		2440	Reference	10.62	10.62	---	PASS
			30~1000	10.62	-60.35	≤-9.38	PASS
			1000~26500	10.62	-44.38	≤-9.38	PASS
		2480	Reference	10.41	10.41	---	PASS
			30~1000	10.41	-60.45	≤-9.59	PASS
			1000~26500	10.41	-43.49	≤-9.59	PASS

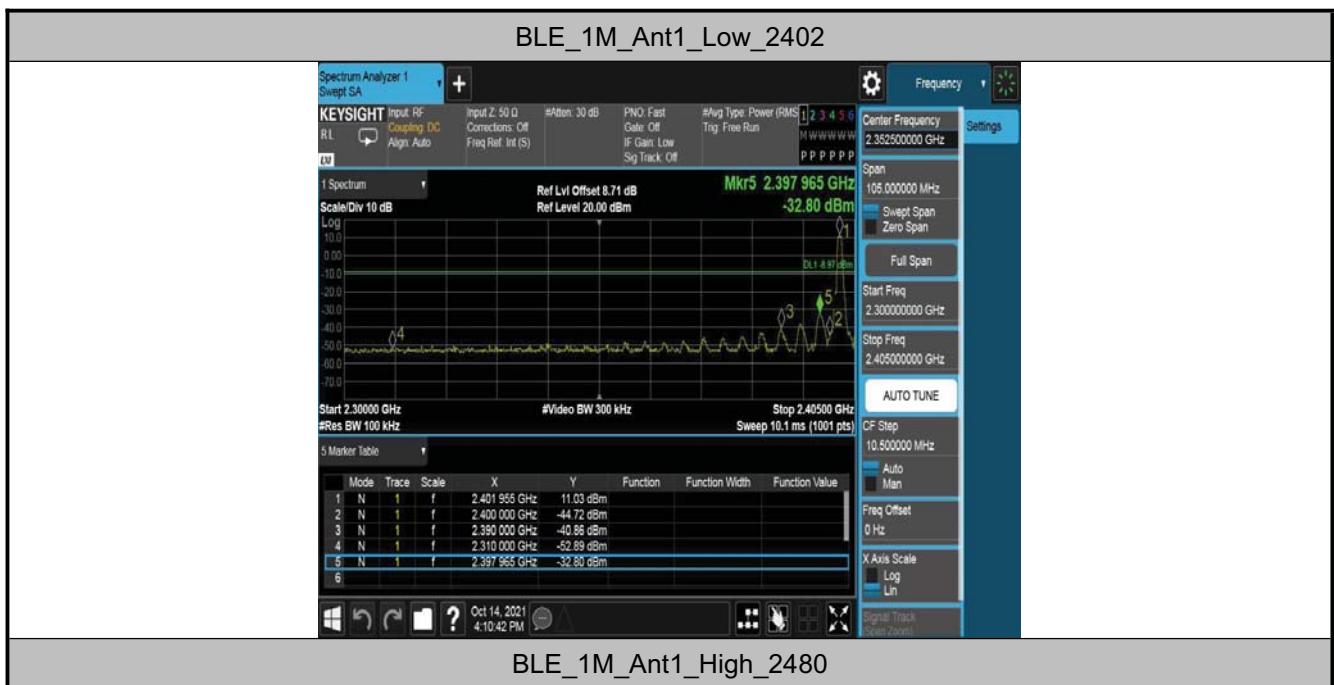



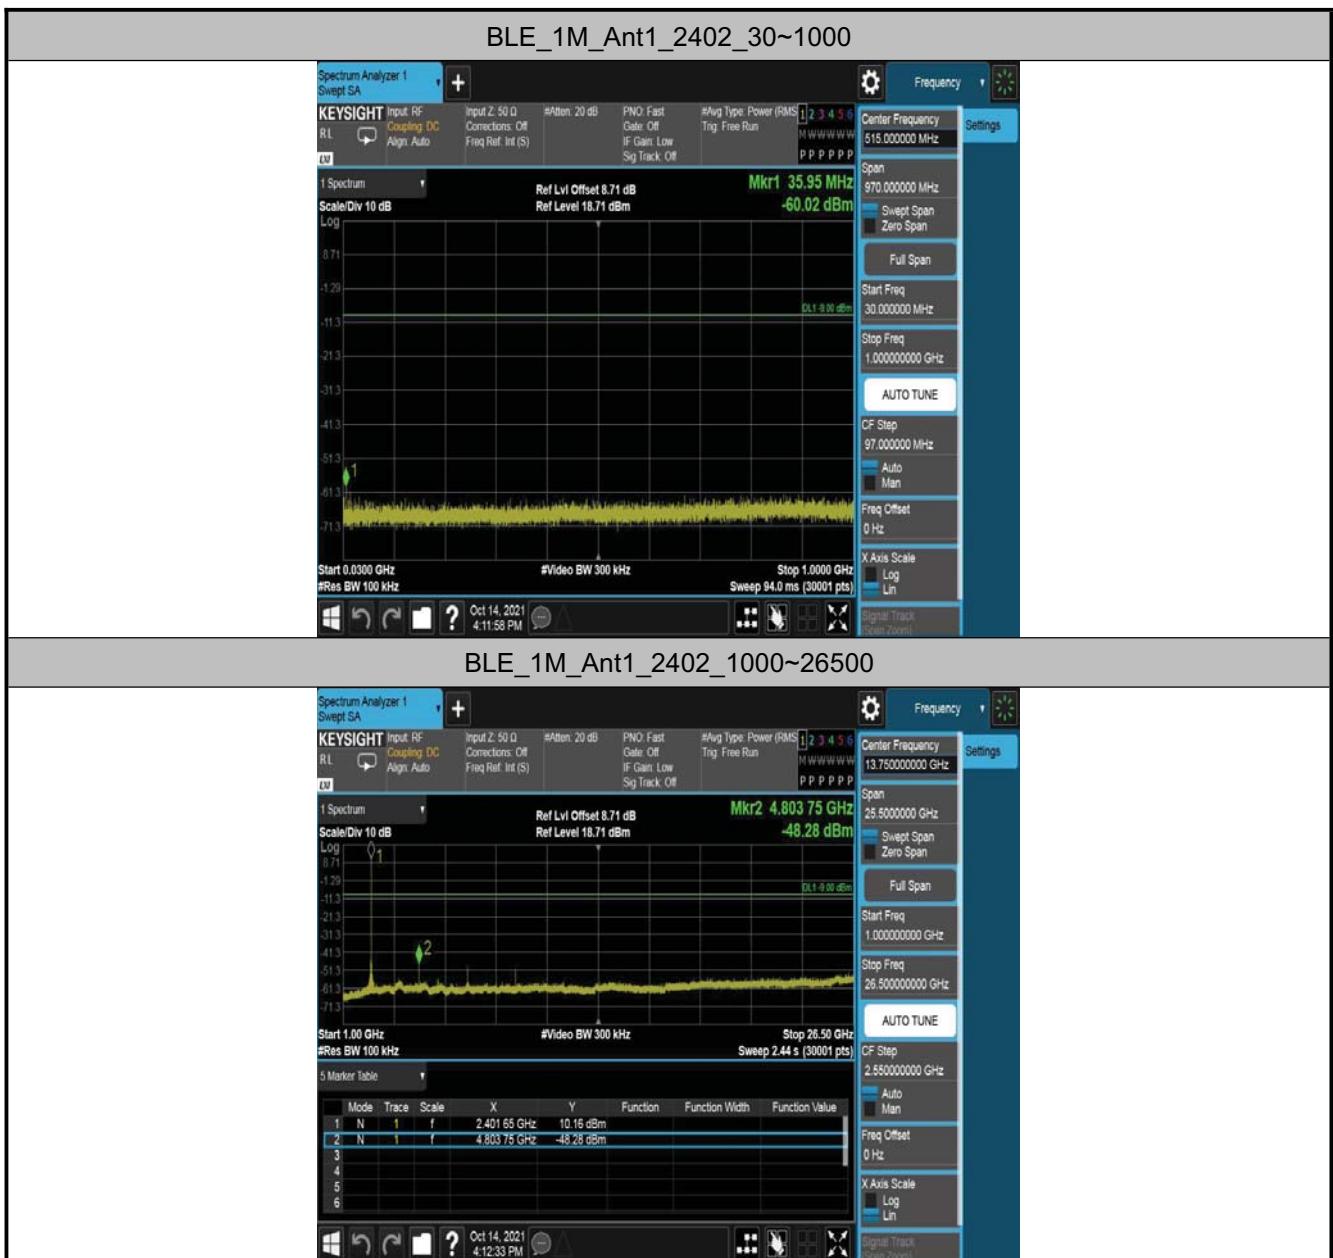


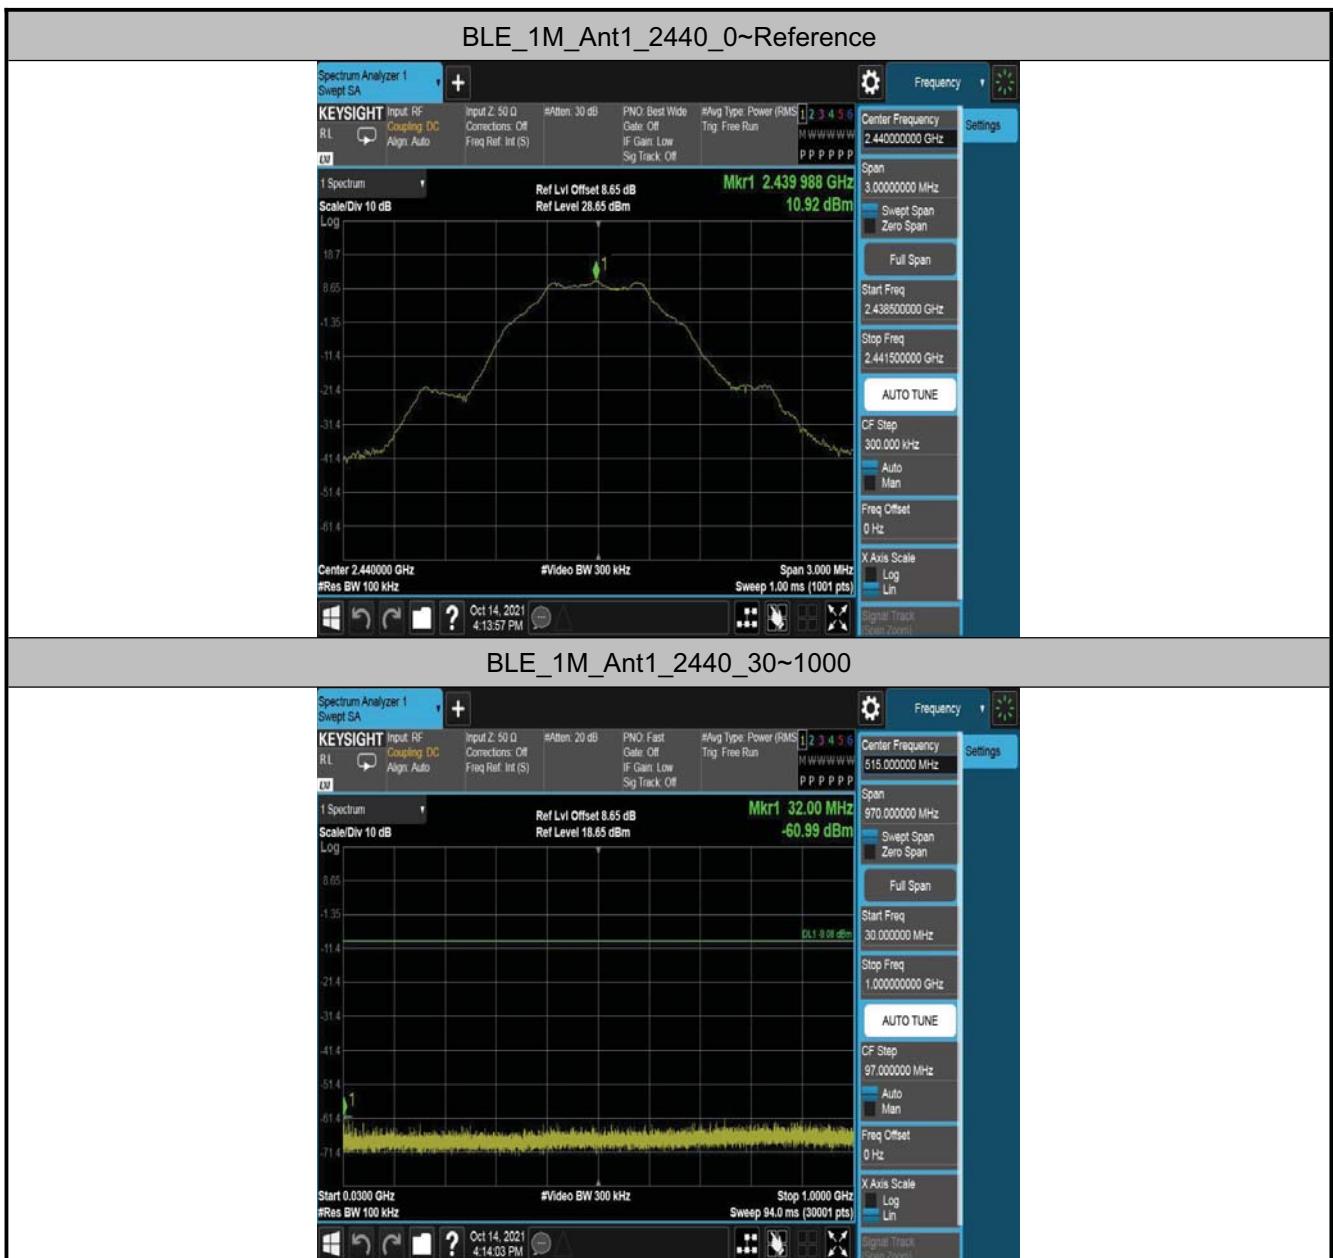







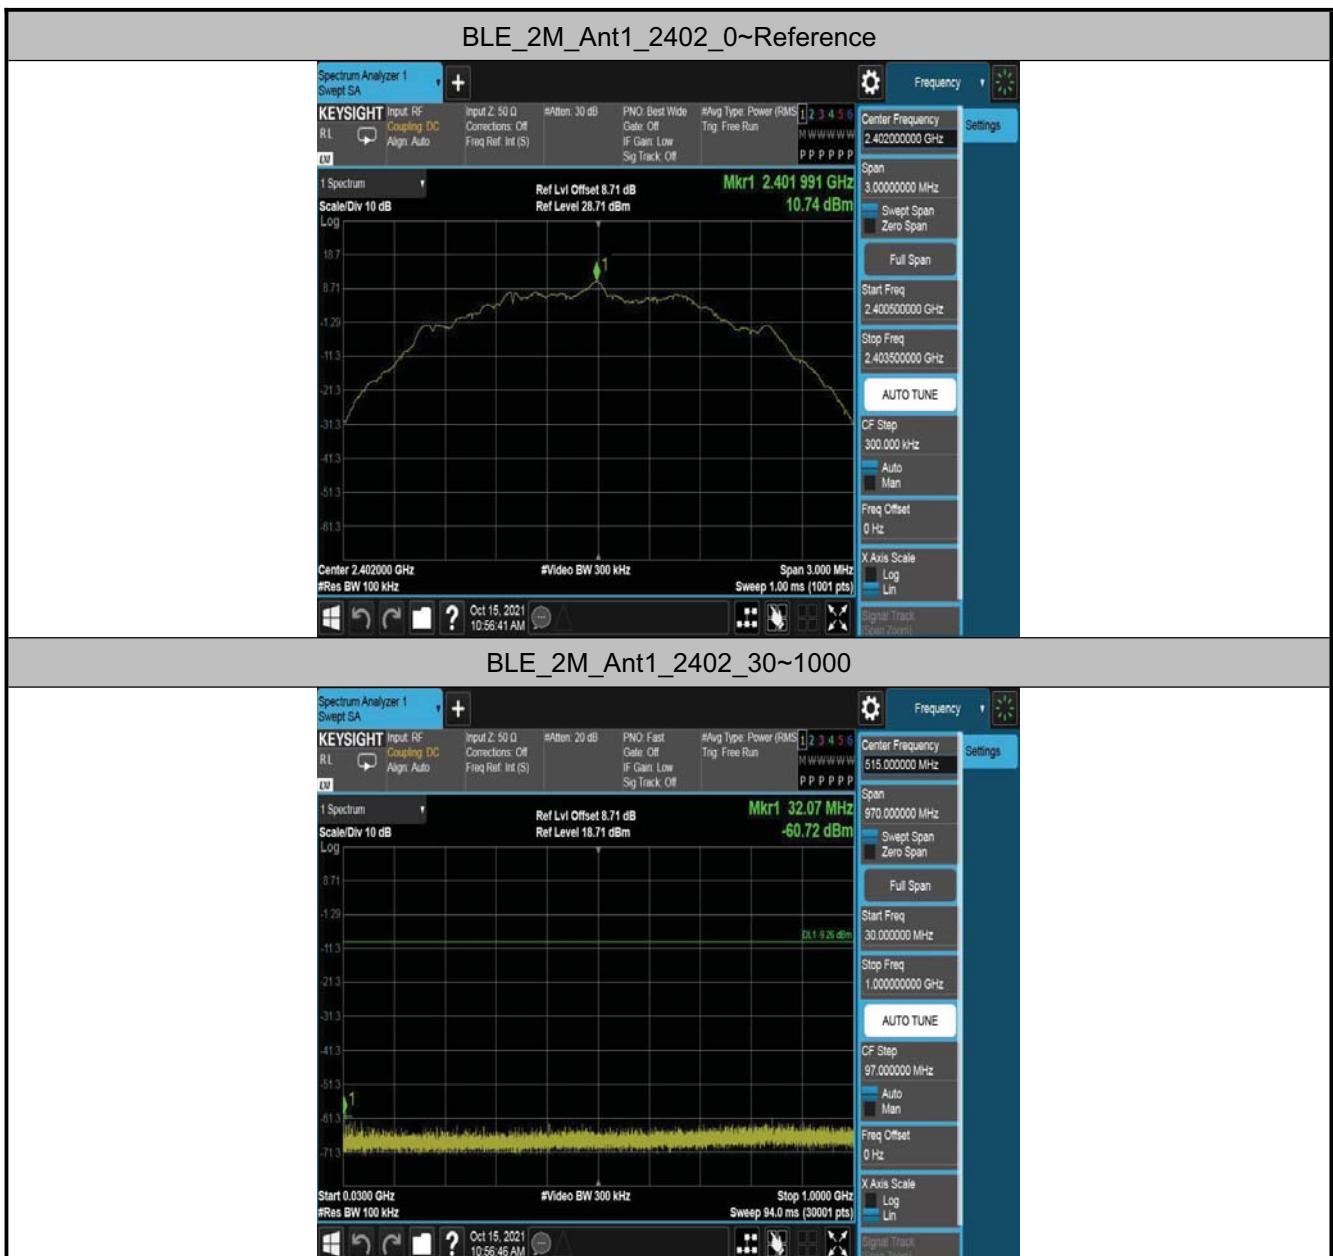




BLE_2M_Ant1_2440_0~Reference





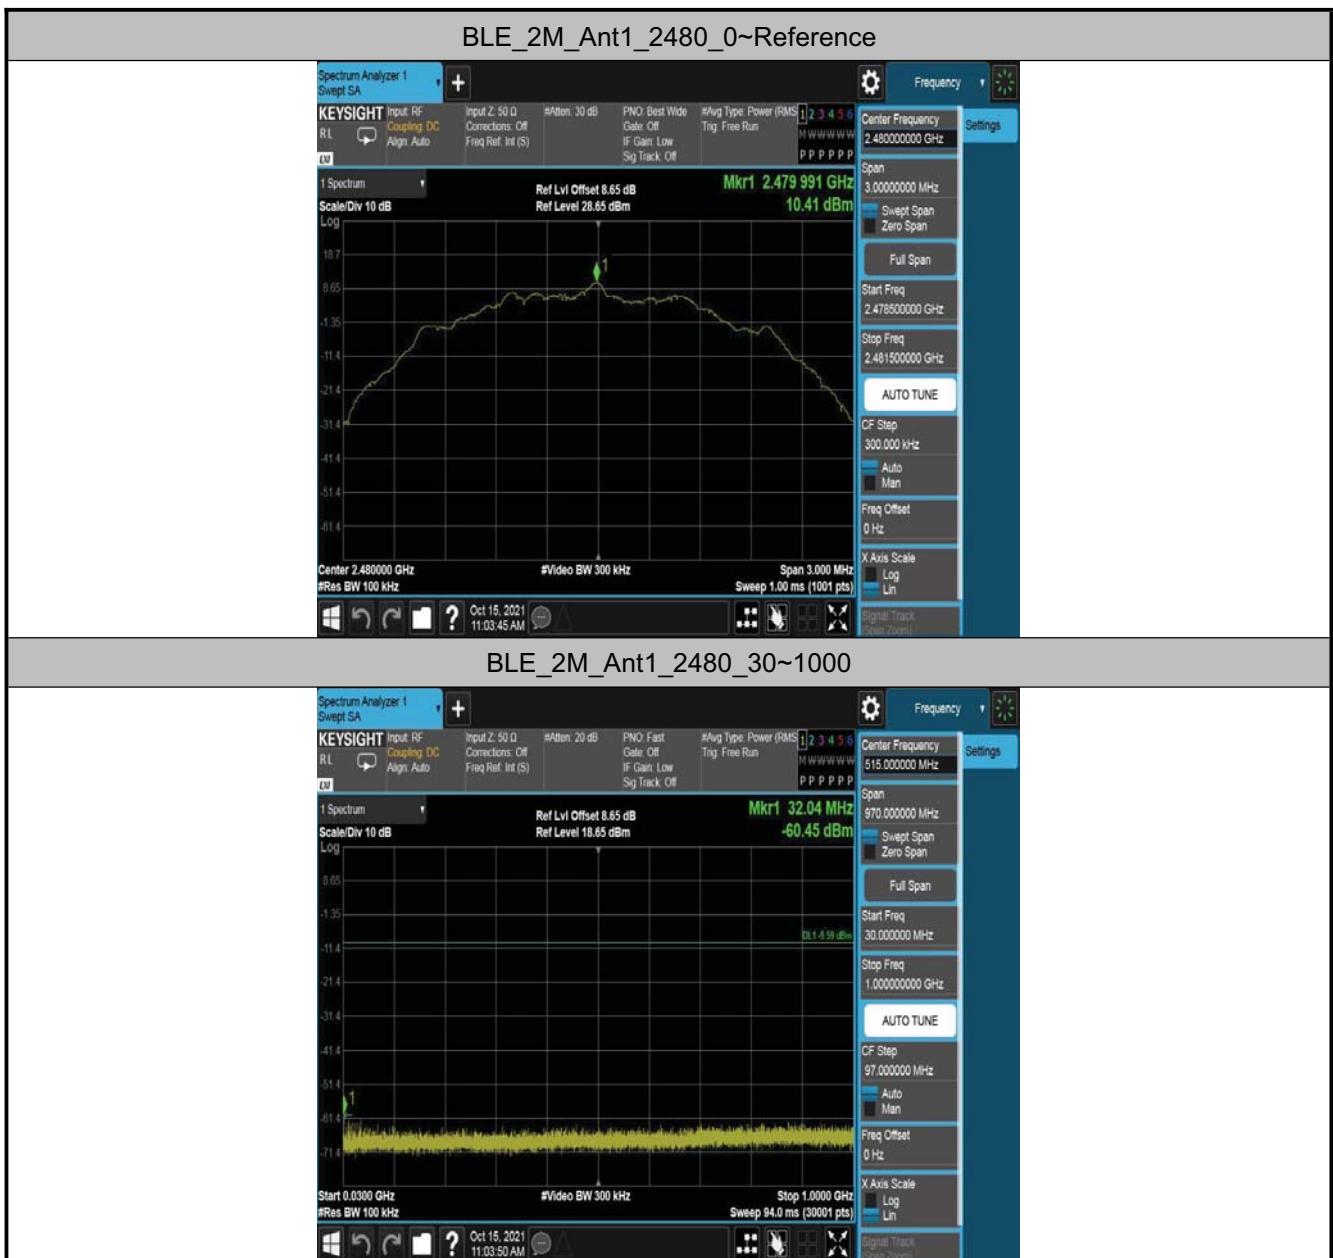



7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Power Average (RMS)
5. Number of sweep point = 2001 (Number of sweep points must be $\geq 2 \times \text{span} / \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.



7.6.4. Test Setup

9kHz ~ 30MHz Test Setup:

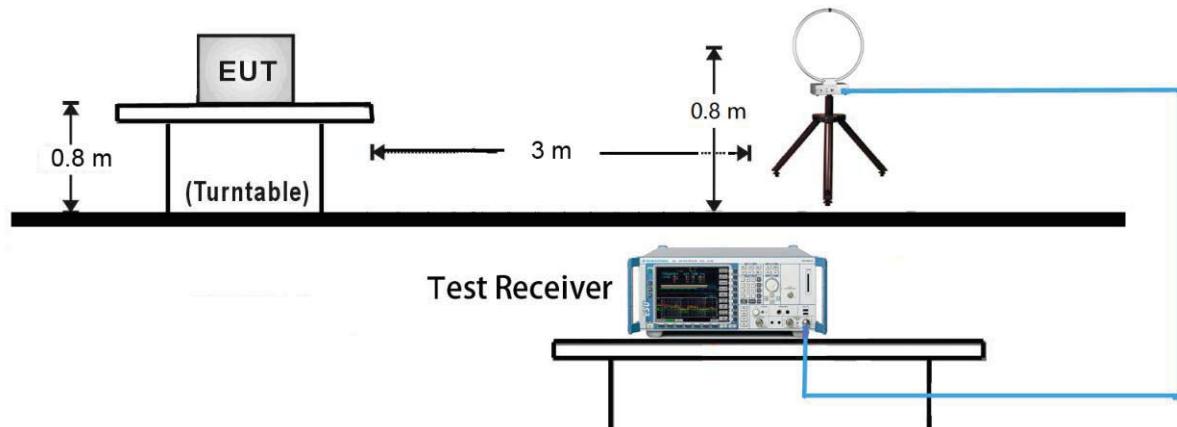

30MHz ~ 1GHz Test Setup:

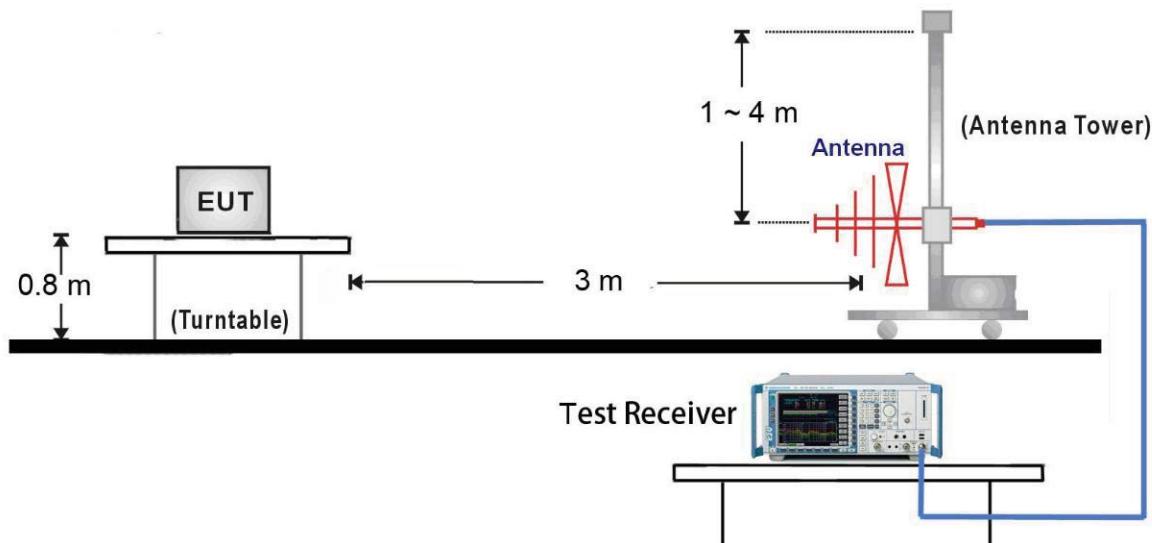

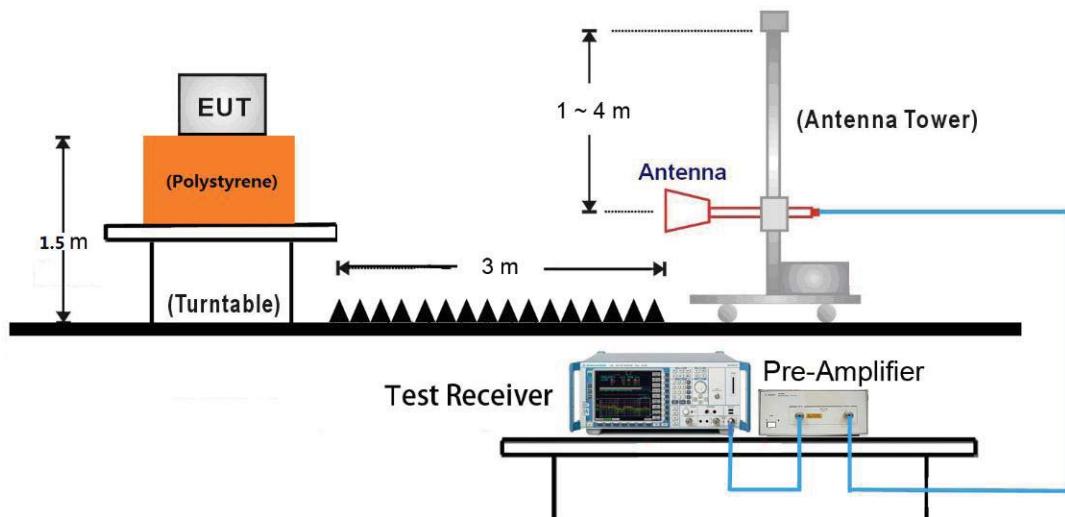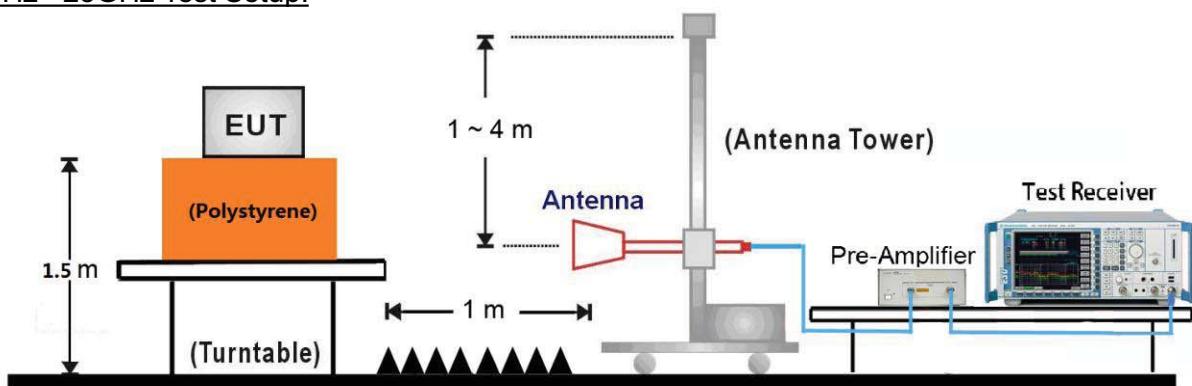1GHz ~ 18GHz Test Setup:

18GHz ~25GHz Test Setup:


7.6.5. Test Result

Test Mode:	BLE_1M	Test Date:	2021-10-18
Test Channel:	00	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Level (dB μ V)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4800.0000	50.97	7.53	74.00	23.03	Peak	Horizontal
	5132.0000	43.96	8.14	74.00	30.04	Peak	Horizontal
*	6782.0000	47.98	13.83	83.46	35.48	Peak	Horizontal
*	7200.0000	49.71	14.95	83.46	33.75	Peak	Horizontal
	4800.0000	47.17	7.53	74.00	26.83	Peak	Vertical
	5423.0000	44.09	9.71	74.00	29.91	Peak	Vertical
*	6750.0000	48.60	13.64	83.46	34.86	Peak	Vertical
*	9872.0000	54.40	17.43	83.46	29.06	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (103.46dB μ V/m) or 15.209 which is higher.

Test Mode:	BLE_1M	Test Date:	2021-10-18
Test Channel:	19	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Level (dB μ V)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4783.0000	44.24	7.50	74.00	29.76	Peak	Horizontal
	7620.0000	49.02	14.75	74.00	24.98	Peak	Horizontal
*	9578.0000	51.14	17.27	81.62	30.48	Peak	Horizontal
*	10253.0000	53.77	18.14	81.62	27.85	Peak	Horizontal
	4200.0000	42.75	6.25	74.00	31.25	Peak	Vertical
	4800.0000	44.64	7.53	74.00	29.36	Peak	Vertical
*	7120.0000	49.31	14.71	81.62	32.31	Peak	Vertical
*	8871.0000	50.06	15.76	81.62	31.56	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (101.62dB μ V/m) or 15.209 which is higher.

Test Mode:	BLE_1M	Test Date:	2021-10-18
Test Channel:	39	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Level (dB μ V)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4800.0000	43.42	7.53	74.00	30.58	Peak	Horizontal
	5132.0000	43.82	8.14	74.00	30.18	Peak	Horizontal
*	6782.0000	47.14	13.83	79.09	31.95	Peak	Horizontal
*	7200.0000	49.09	14.95	79.09	30.00	Peak	Horizontal
	4800.0000	42.89	7.53	74.00	31.11	Peak	Vertical
	5423.0000	44.81	9.71	74.00	29.19	Peak	Vertical
*	6750.0000	47.90	13.64	79.09	31.19	Peak	Vertical
*	9872.0000	55.53	17.43	79.09	23.56	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (99.09dB μ V/m) or 15.209 which is higher.

Test Mode:	BLE_2M	Test Date:	2021-10-18
Test Channel:	00	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Level (dB μ V)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4783.0000	42.53	7.50	74.00	31.47	Peak	Horizontal
	7620.0000	49.36	14.75	74.00	24.64	Peak	Horizontal
*	9578.0000	52.32	17.27	81.54	29.22	Peak	Horizontal
*	10253.0000	54.21	18.14	81.54	27.33	Peak	Horizontal
	4200.0000	41.56	6.25	74.00	32.44	Peak	Vertical
	4800.0000	42.94	7.53	74.00	31.06	Peak	Vertical
*	7120.0000	48.93	14.71	81.54	32.61	Peak	Vertical
*	8871.0000	50.42	15.76	81.54	31.12	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (101.54dB μ V/m) or 15.209 which is higher.

Test Mode:	BLE_2M	Test Date:	2021-10-18
Test Channel:	19	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Level (dB μ V)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4800.0000	44.50	7.53	74.00	29.50	Peak	Horizontal
	5132.0000	43.74	8.14	74.00	30.26	Peak	Horizontal
*	6782.0000	48.44	13.83	80.39	31.95	Peak	Horizontal
*	7200.0000	51.15	14.95	80.39	29.24	Peak	Horizontal
	4800.0000	43.87	7.53	74.00	30.13	Peak	Vertical
	5423.0000	45.31	9.71	74.00	28.69	Peak	Vertical
*	6750.0000	47.80	13.64	80.39	32.59	Peak	Vertical
*	9872.0000	53.40	17.43	80.39	26.99	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (100.39dB μ V/m) or 15.209 which is higher.

Test Mode:	BLE_2M	Test Date:	2021-10-18
Test Channel:	39	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Level (dB μ V)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4783.0000	42.66	7.50	74.00	31.34	Peak	Horizontal
	7620.0000	50.18	14.75	74.00	23.82	Peak	Horizontal
*	9578.0000	51.96	17.27	79.20	27.24	Peak	Horizontal
*	10253.0000	53.03	18.14	79.20	26.17	Peak	Horizontal
	4200.0000	42.10	6.25	74.00	31.90	Peak	Vertical
	4800.0000	48.25	7.53	74.00	25.75	Peak	Vertical
*	7120.0000	49.79	14.71	79.20	29.41	Peak	Vertical
*	8871.0000	50.81	15.76	79.20	28.39	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (99.20dB μ V/m) or 15.209 which is higher.

The worst case of Radiated Emission below 1GHz:

30MHz – 1GHz Test Data

EUT:	GaN Fast Charger(Bluetooth version)	Polarity:	Horizontal
Model:	MCUS-20032565P3	SN:	N/A
Mode:	Mode 2:Transmit at Channel 00	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia

Test Graph

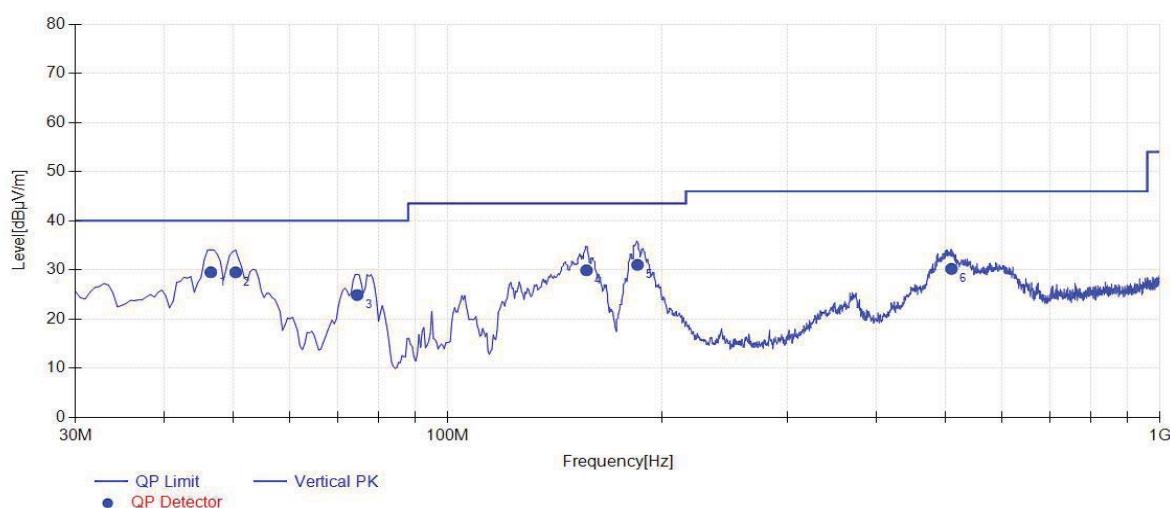


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	46.4900	11.32	29.52	40.00	10.48	100	76	Horizontal
2	50.3700	9.42	29.51	40.00	10.49	100	342	Horizontal
3	74.6200	9.09	24.91	40.00	15.09	100	33	Horizontal
4	156.585	10.51	29.93	43.50	13.57	100	83	Horizontal
5	184.715	10.49	31.04	43.50	12.46	100	61	Horizontal
6	509.665	19.06	30.22	46.00	15.78	100	162	Horizontal

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	GaN Fast Charger(Bluetooth version)	Polarity:	Vertical
Model:	MCUS-20032565P3	SN:	N/A
Mode:	Mode 2:Transmit at Channel 00	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia

Test Graph

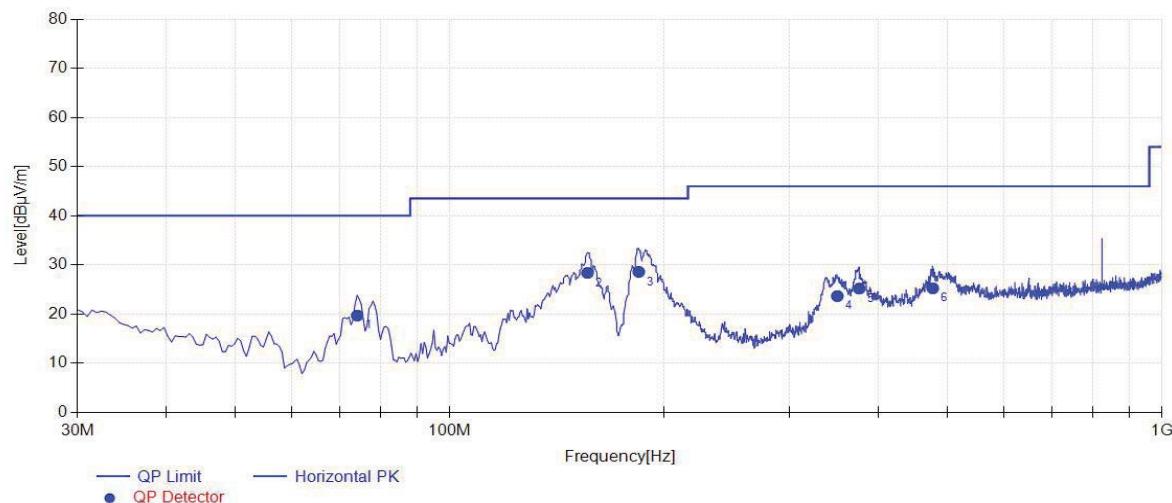

Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	74.1350	9.03	19.71	40.00	20.29	200	190	Vertical
2	156.100	10.53	28.38	43.50	15.12	100	170	Vertical
3	184.230	10.51	28.59	43.50	14.91	100	155	Vertical
4	350.100	14.90	23.67	46.00	22.33	100	3	Vertical
5	375.805	15.35	25.19	46.00	20.81	200	198	Vertical
6	476.685	18.30	25.25	46.00	20.75	200	258	Vertical

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	240 - 285	9.0 - 9.2
2.1735 - 2.1905	322 - 335.4	9.3 - 9.5
3.020 - 3.026	399.9 - 410	10.6 - 12.7
4.125 - 4.128	608 - 614	13.25 - 13.4
4.17725 - 4.17775	960 - 1427	14.47 - 14.5
4.20725 - 4.20775	1435 - 1626.5	15.35 - 16.2
5.677 - 5.683	1645.5 - 1646.5	17.7 - 21.4
6.215 - 6.218	1660 - 1710	22.01 - 23.12
6.26775 - 6.26825	1718.8 - 1722.2	23.6 - 24.0
6.31175 - 6.31225	2200 - 2300	31.2 - 31.8
8.291 - 8.294	2310 - 2390	36.43 - 36.5
8.362 - 8.366	2655 - 2900	Above 38.6
8.37625 - 8.38675	3260 - 3267	--
8.41425 - 8.41475	3332 - 3339	
12.29 - 12.293	334.5 - 3358	
12.51975 - 12.52025	3500 - 4400	
12.57675 - 12.57725	4500 - 5150	
13.36 - 13.41	5350 - 5460	
16.42 - 16.423	7250 - 7750	
16.69475 - 16.69525	8025 - 8500	
16.80425 - 16.80475	--	
25.5 - 25.67		
37.5 - 38.25		
73 - 74.6		
74.8 - 75.2		
108 - 138		
156.52475 - 156.525225		
156.7 - 156.9		

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen

must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Power Average (RMS)
5. Number of sweep point = 2001 (Number of sweep points must be $\geq 2 \times \text{span} / \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

7.7.4. Test Setup

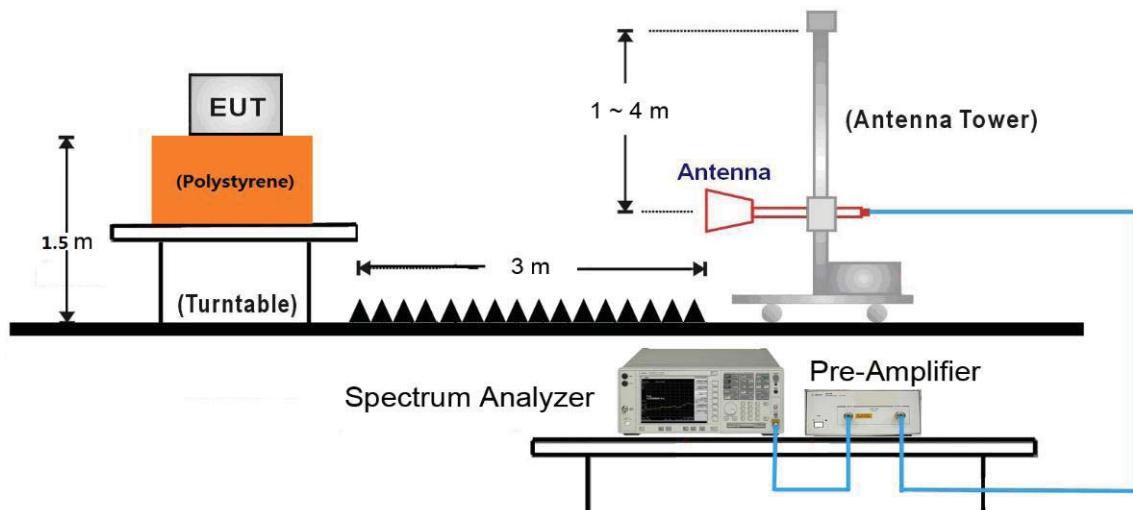


Note: This item was performed with the WIFI antenna connected.

7.7.5. Test Result

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 1: Transmit at Channel 00		


Test Graph

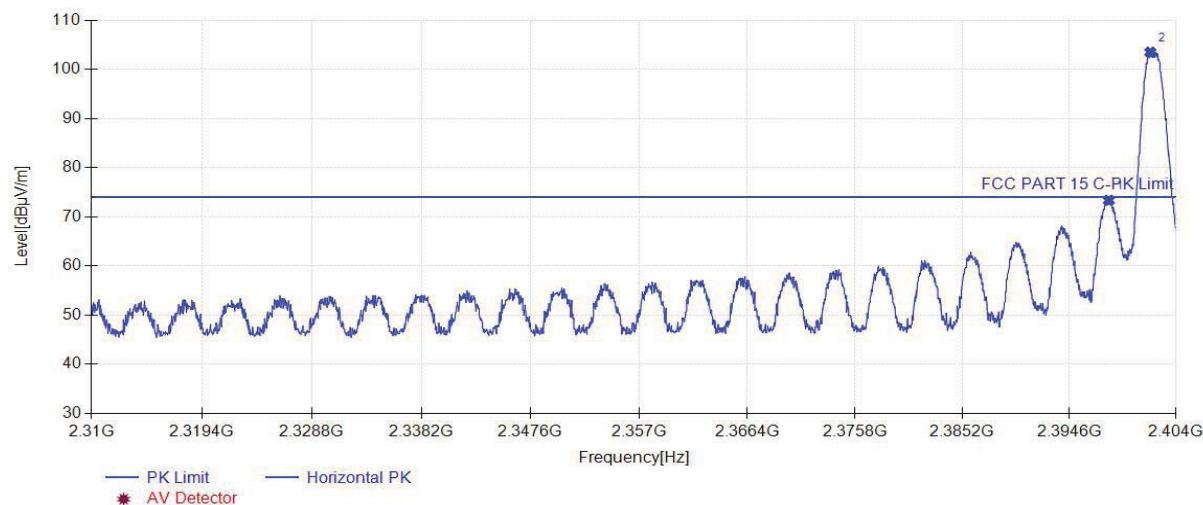

Suspected Data List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2398.07	73.34	34.29	74.00	0.66	160	77	Horizontal
2	2401.74	103.46	34.31	N/A	N/A	160	77	Horizontal

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 1: Transmit at Channel 00		


Test Graph

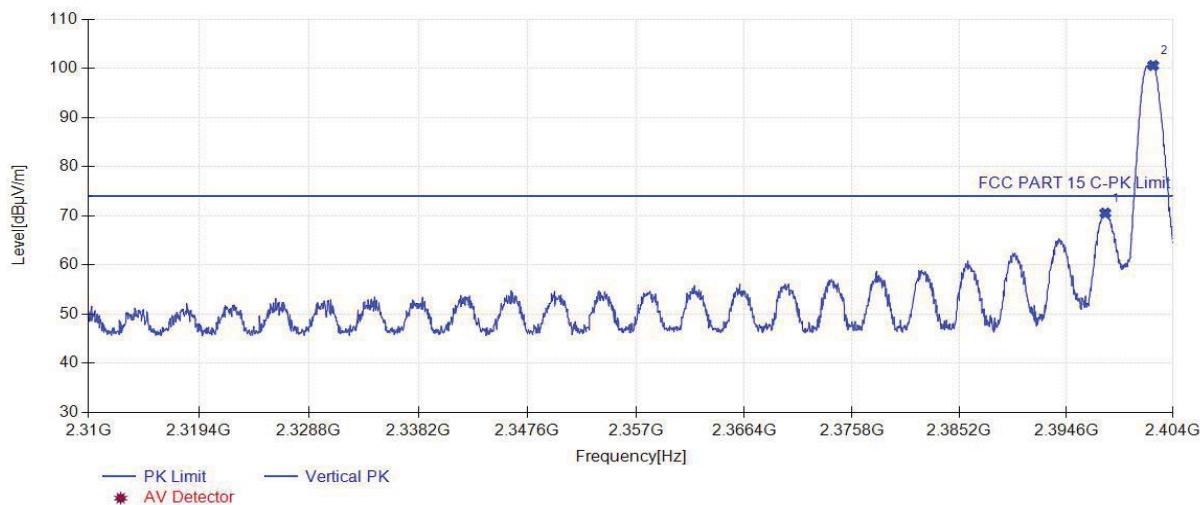

Suspected Data List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2398.03	70.54	34.29	74.00	3.46	160	146	Vertical
2	2402.26	100.57	34.31	N/A	N/A	160	146	Vertical

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 1: Transmit at Channel 00		


Test Graph

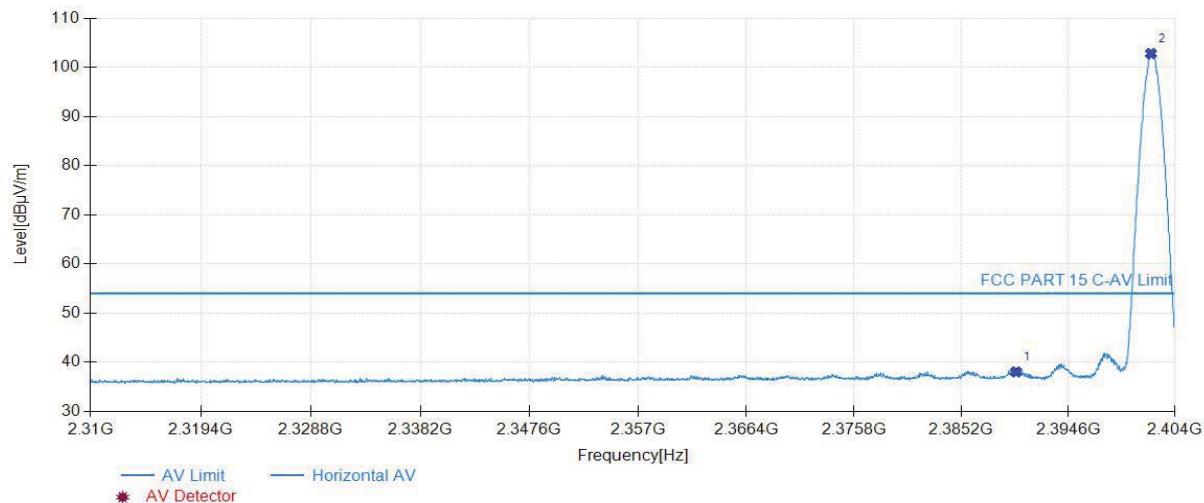

Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	38.04	34.25	54.00	15.96	160	98	Horizontal
2	2401.88	102.80	34.31	N/A	N/A	160	84	Horizontal


Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 1: Transmit at Channel 00		

Test Graph

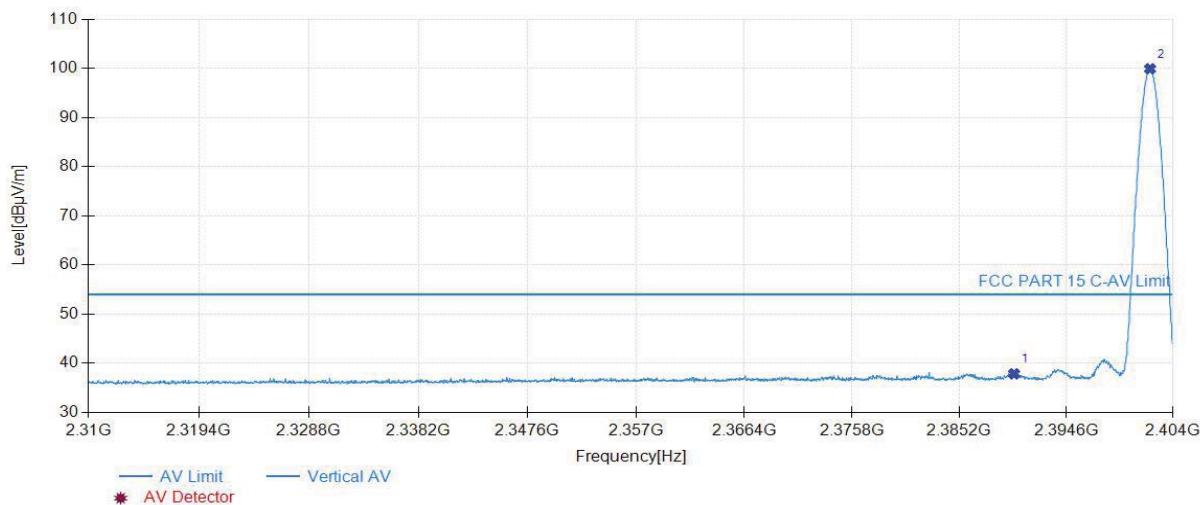


Suspected Data List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	37.85	34.25	54.00	16.15	160	169	Vertical
2	2401.97	99.89	34.31	N/A	N/A	160	146	Vertical

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 1: Transmit at Channel 39		

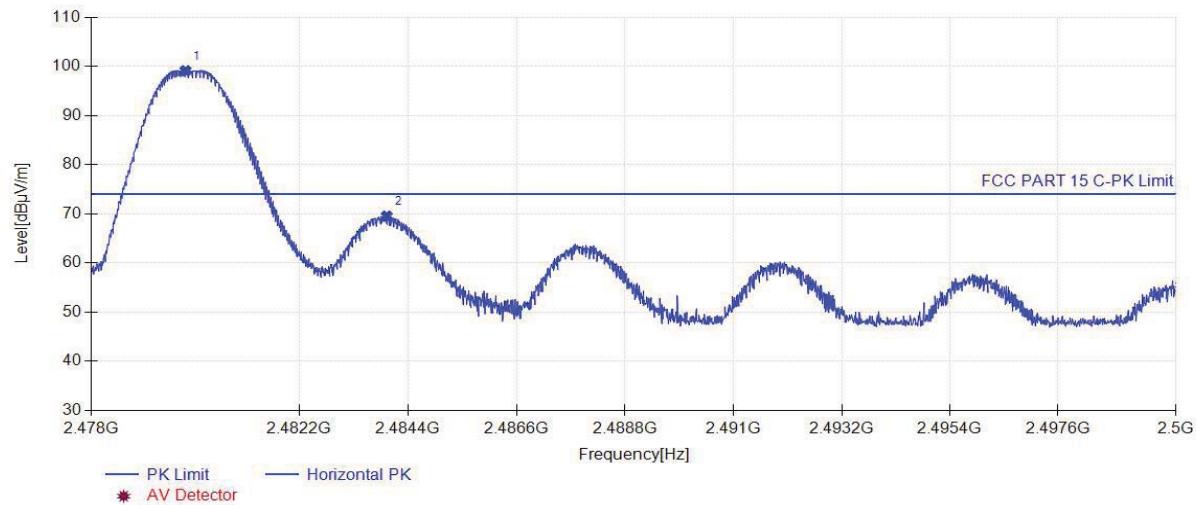Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2479.90	99.09	34.64	N/A	N/A	160	134	Horizontal
2	2483.97	69.53	34.65	74.00	4.47	160	134	Horizontal


Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 1: Transmit at Channel 39		

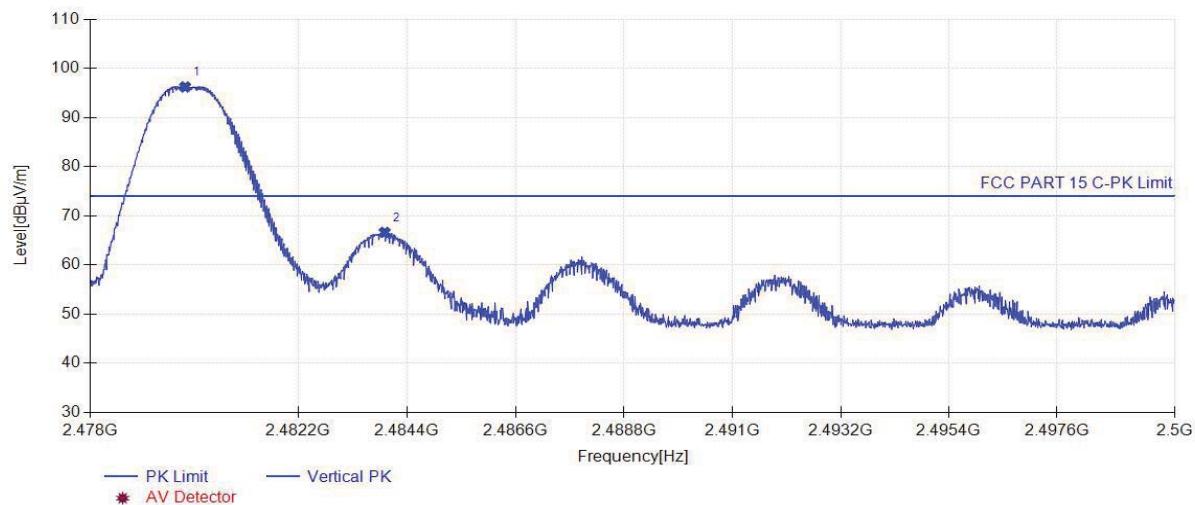Test Graph

Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2479.91	96.20	34.64	N/A	N/A	160	124	Vertical
2	2483.95	66.62	34.65	74.00	7.38	160	88	Vertical

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 1: Transmit at Channel 39		


Test Graph

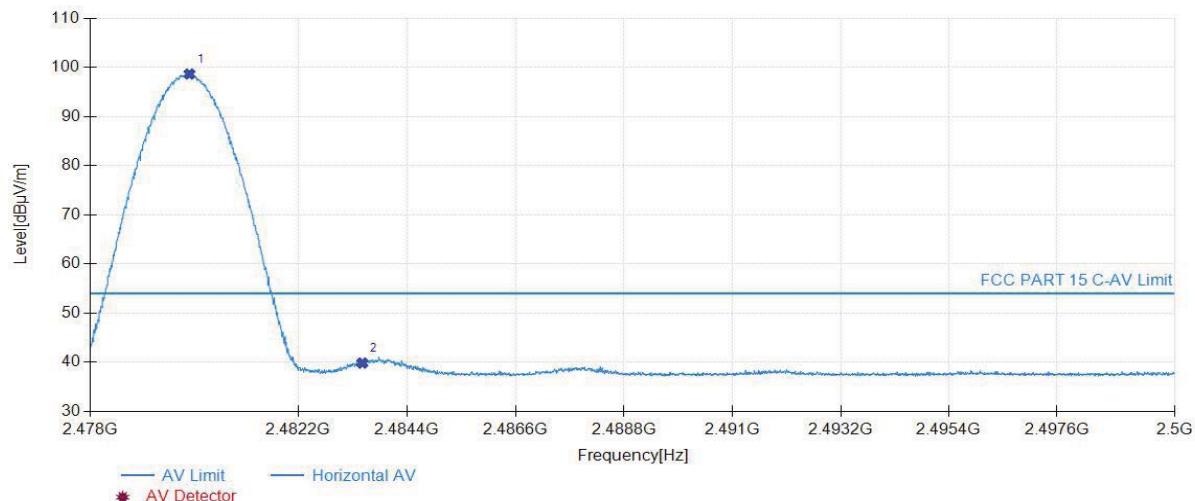

Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2480.00	98.62	34.64	N/A	N/A	160	128	Horizontal
2	2483.50	39.84	34.65	54.00	14.16	160	128	Horizontal

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 1: Transmit at Channel 39		


Test Graph

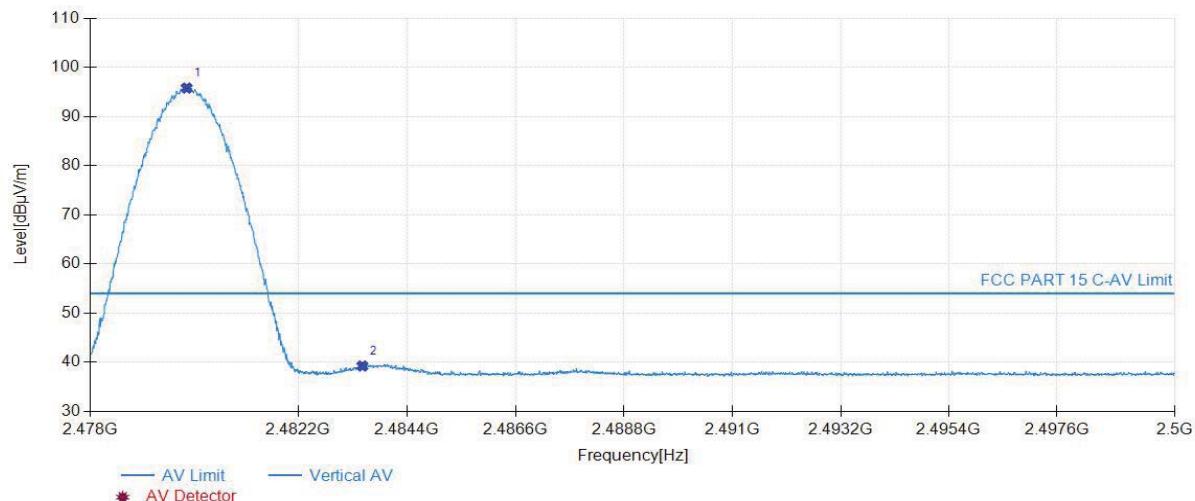

Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2479.94	95.77	34.64	N/A	N/A	160	188	Vertical
2	2483.50	39.24	34.65	54.00	14.76	160	152	Vertical

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 2: Transmit at Channel 00		


Test Graph

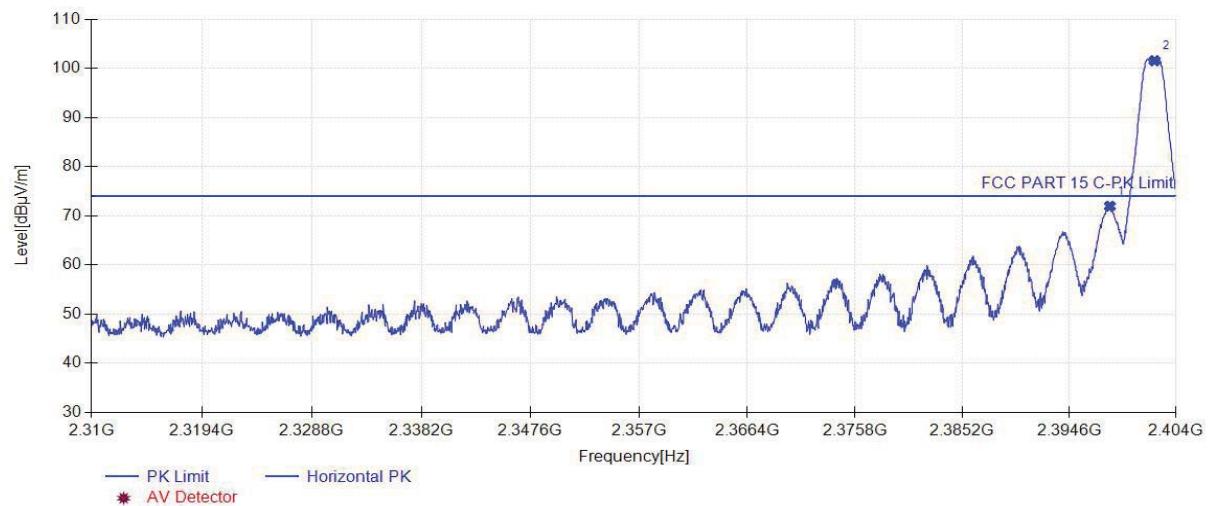

Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2398.17	71.95	34.29	74.00	2.05	160	135	Horizontal
2	2402.12	101.54	34.31	N/A	N/A	160	135	Horizontal

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 2: Transmit at Channel 00		


Test Graph

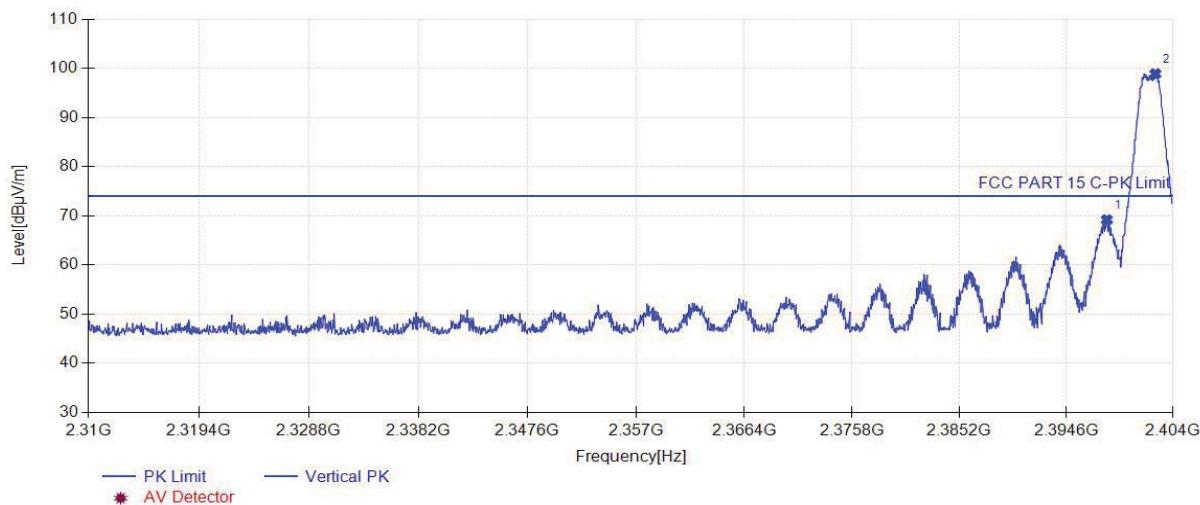

Suspected Data List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2398.17	69.17	34.29	74.00	4.83	160	173	Vertical
2	2402.44	98.87	34.32	N/A	N/A	160	173	Vertical

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 2: Transmit at Channel 00		


Test Graph

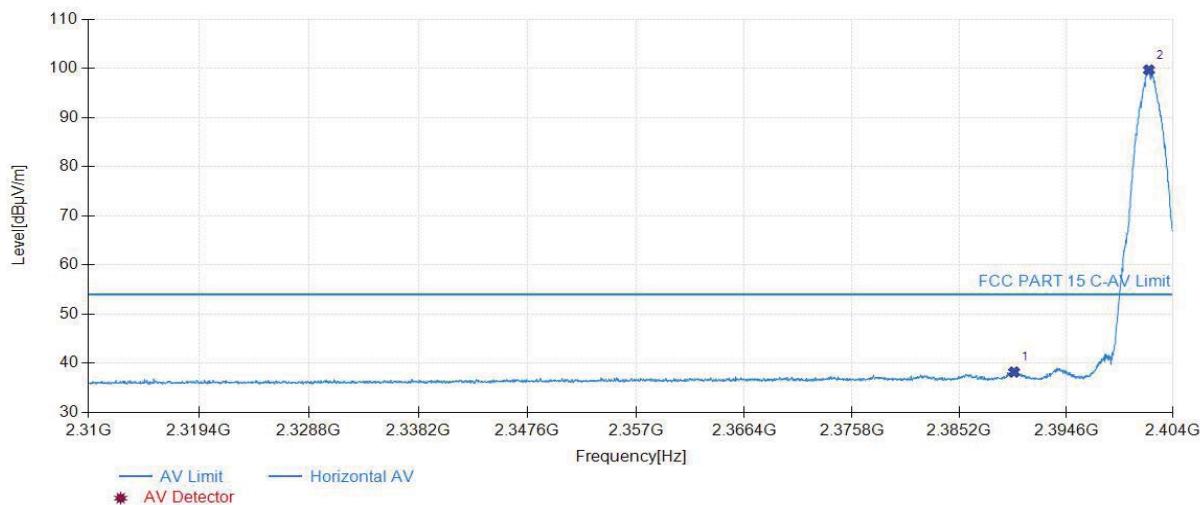

Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	38.21	34.25	54.00	15.79	160	141	Horizontal
2	2401.88	99.65	34.31	N/A	N/A	160	141	Horizontal


Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 2: Transmit at Channel 00		

Test Graph

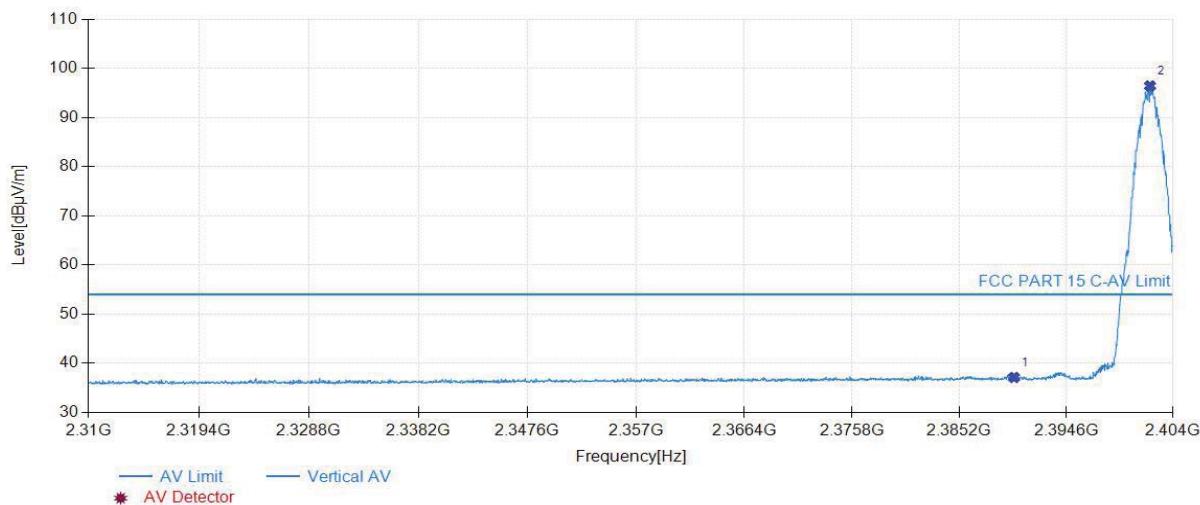

Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	37.12	34.25	54.00	16.88	160	151	Vertical
2	2401.97	96.42	34.31	N/A	N/A	160	174	Vertical


Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 2: Transmit at Channel 39		

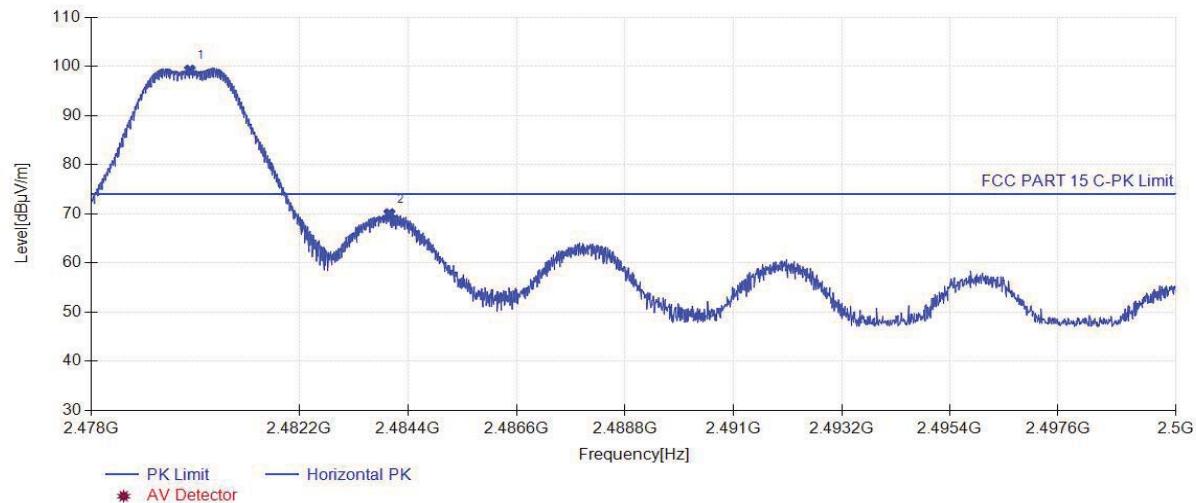Test Graph

Suspected Data List

NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2479.99	99.20	34.64	N/A	N/A	160	135	Horizontal
2	2484.02	69.98	34.65	74.00	4.02	160	135	Horizontal

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 2: Transmit at Channel 39		

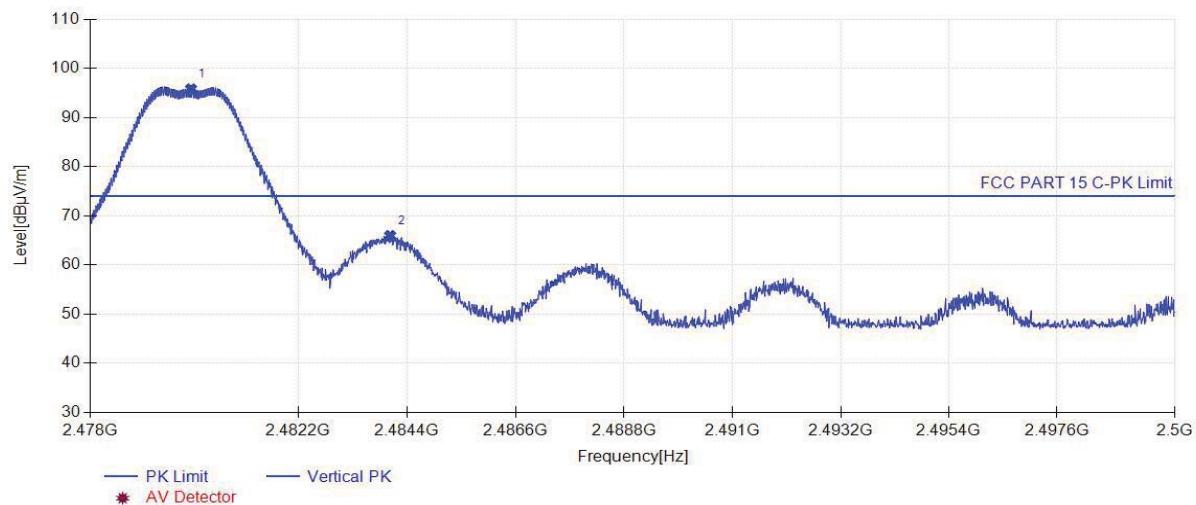
Test Graph



Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2480.03	95.78	34.64	N/A	N/A	160	165	Vertical
2	2484.06	65.96	34.65	74.00	8.04	160	165	Vertical

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 2: Transmit at Channel 39		


Test Graph

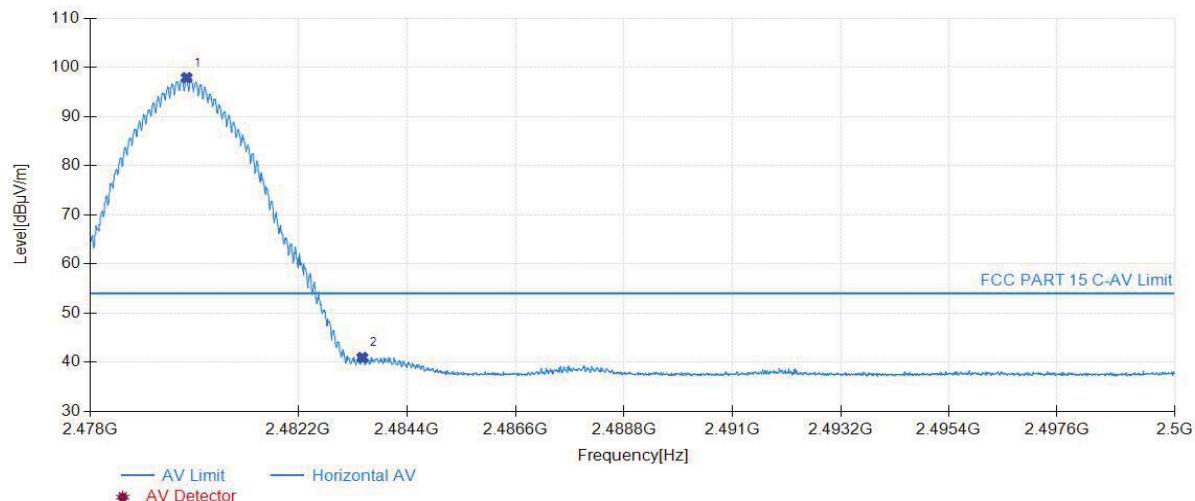

Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2479.94	97.87	34.64	N/A	N/A	160	141	Horizontal
2	2483.50	40.96	34.65	54.00	13.04	160	135	Horizontal

Project Information			
EUT:	GaN Fast Charger(Bluetooth version)	Model:	MCUS-20032565P3
SN:	N/A	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 2: Transmit at Channel 39		

Test Graph

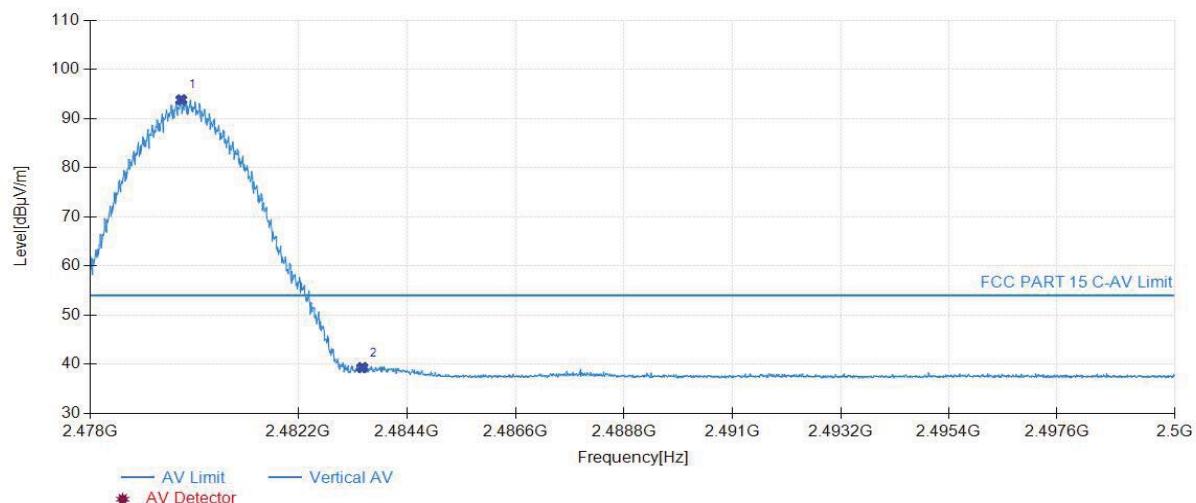

Suspected Data List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2479.83	93.79	34.64	N/A	N/A	160	166	Vertical
2	2483.50	39.32	34.65	54.00	14.68	160	166	Vertical

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

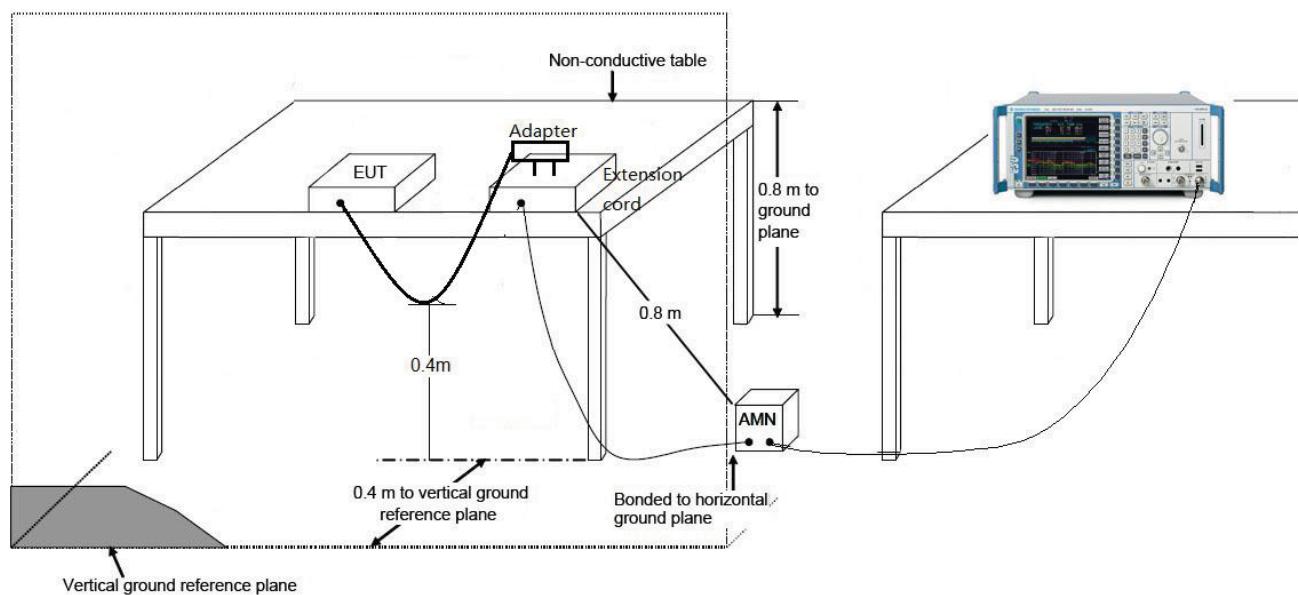


7.8.3. Test Result

EUT:	GaN Fast Charger(Bluetooth version)	Polarity:	LINE
Model:	MCUS-20032565P3	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 1		

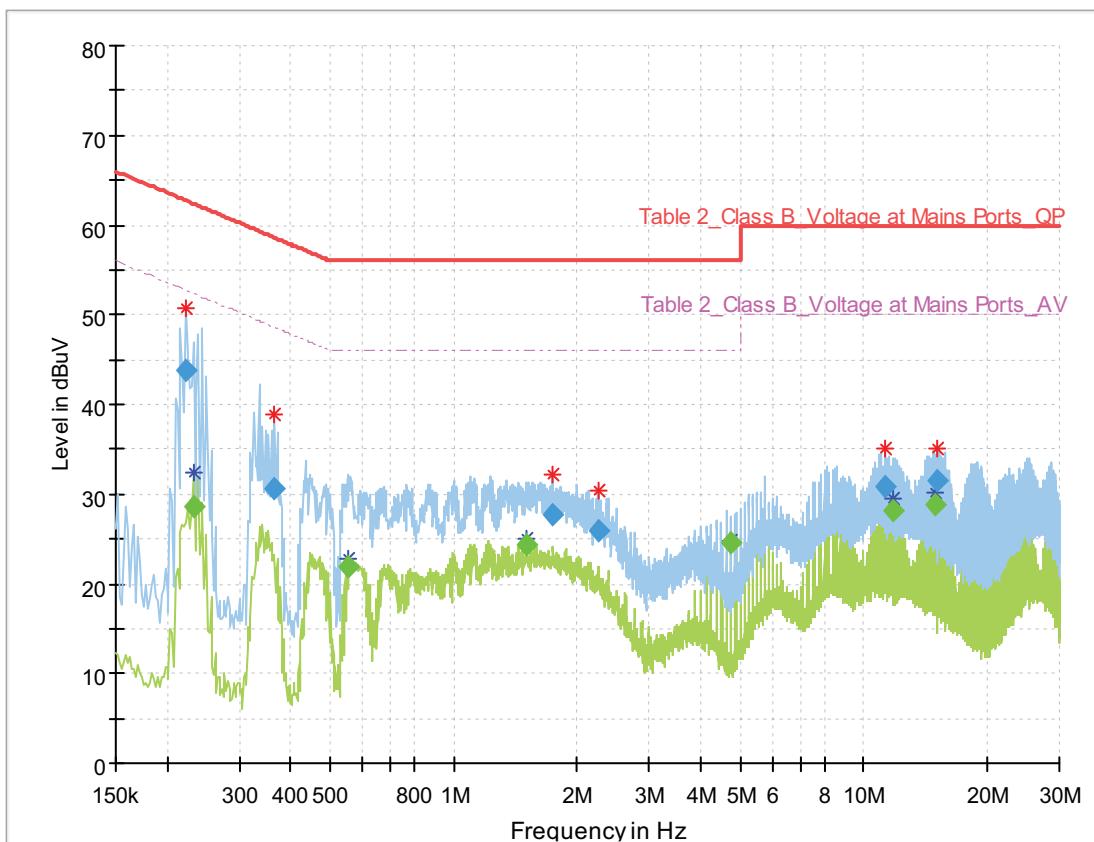


Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.222000	43.81	---	62.74	18.93	1000.0	9.000	L1	ON	9.5
0.232000	---	28.49	52.38	23.88	1000.0	9.000	L1	ON	9.5
0.366000	30.72	---	58.59	27.87	1000.0	9.000	L1	ON	9.5
0.550000	---	21.82	46.00	24.18	1000.0	9.000	L1	ON	9.5
1.500000	---	24.39	46.00	21.61	1000.0	9.000	L1	ON	9.5
1.750000	27.65	---	56.00	28.35	1000.0	9.000	L1	ON	9.5
2.250000	25.92	---	56.00	30.08	1000.0	9.000	L1	ON	9.6
4.752000	---	24.50	46.00	21.50	1000.0	9.000	L1	ON	9.6
11.262000	30.85	---	60.00	29.15	1000.0	9.000	L1	ON	9.8
11.760000	---	28.15	50.00	21.85	1000.0	9.000	L1	ON	9.8
14.888000	---	28.86	50.00	21.14	1000.0	9.000	L1	ON	9.8
15.136000	31.58	---	60.00	28.42	1000.0	9.000	L1	ON	9.8

EUT:	GaN Fast Charger(Bluetooth version)	Polarity:	NEUTRAL
Model:	MCUS-20032565P3	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 1		

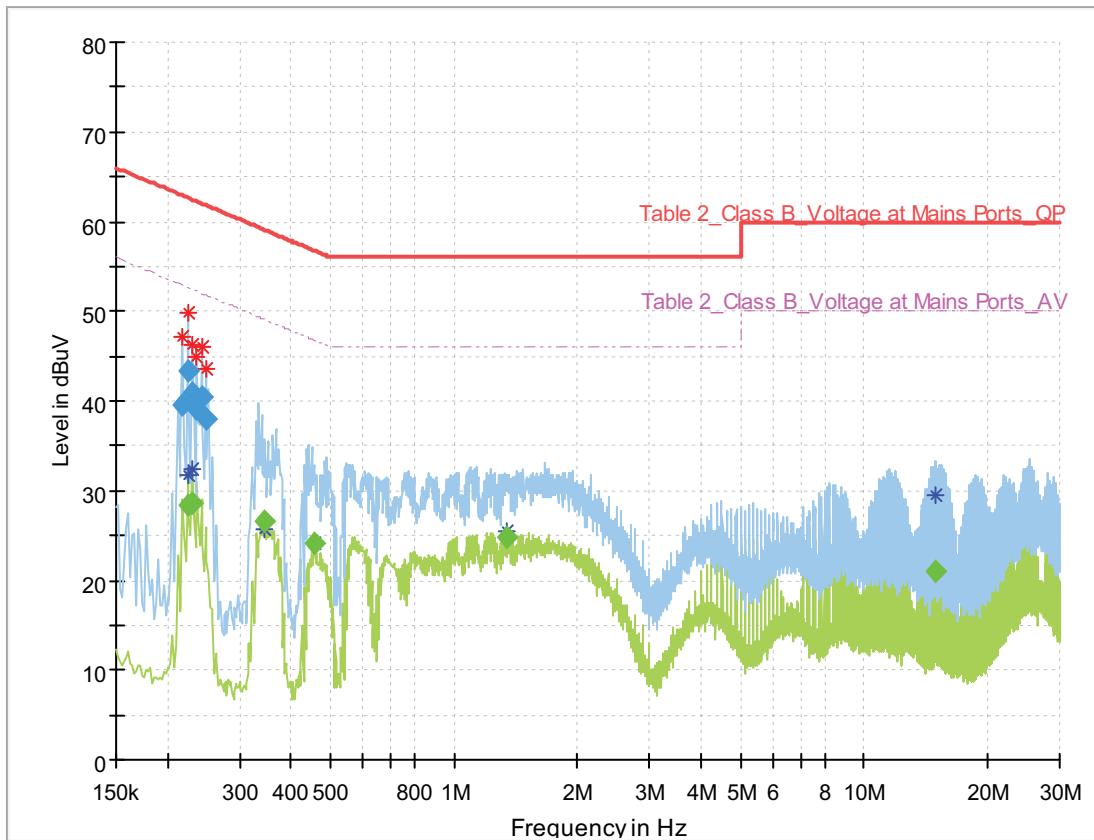


Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.218000	39.53	---	62.90	23.37	1000.0	9.000	N	ON	9.5
0.224000	---	28.28	52.67	24.39	1000.0	9.000	N	ON	9.5
0.224000	43.30	---	62.67	19.37	1000.0	9.000	N	ON	9.5
0.230000	---	28.51	52.45	23.94	1000.0	9.000	N	ON	9.5
0.230000	40.98	---	62.45	21.47	1000.0	9.000	N	ON	9.5
0.236000	39.00	---	62.24	23.24	1000.0	9.000	N	ON	9.5
0.242000	40.34	---	62.03	21.69	1000.0	9.000	N	ON	9.5
0.248000	38.07	---	61.82	23.75	1000.0	9.000	N	ON	9.5
0.344000	---	26.55	49.11	22.56	1000.0	9.000	N	ON	9.5
0.456000	---	24.03	46.77	22.73	1000.0	9.000	N	ON	9.5
1.348000	---	24.81	46.00	21.19	1000.0	9.000	N	ON	9.5
14.884000	---	20.91	50.00	29.09	1000.0	9.000	N	ON	9.8

EUT:	GaN Fast Charger(Bluetooth version)	Polarity:	LINE
Model:	MCUS-20032565P3	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 2		

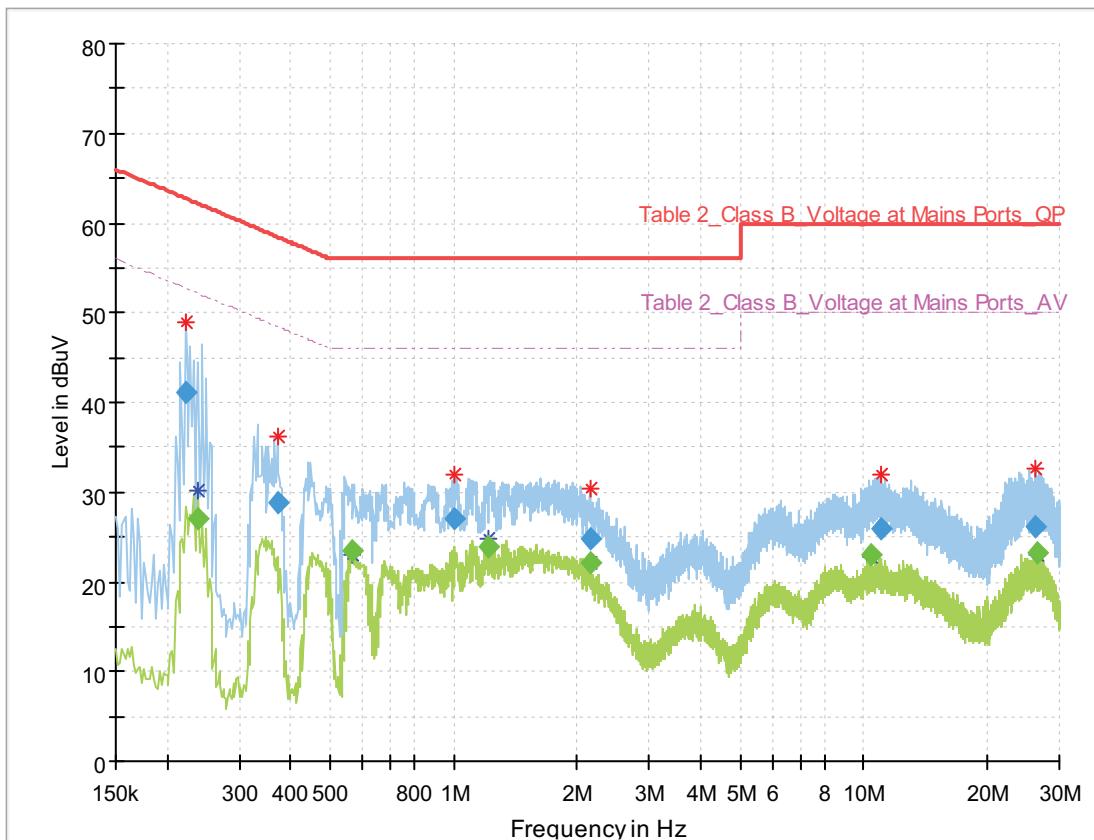

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.222000	41.13	---	62.74	21.61	1000.0	9.000	L1	ON	9.5
0.238000	---	27.00	52.17	25.17	1000.0	9.000	L1	ON	9.5
0.372000	28.78	---	58.46	29.68	1000.0	9.000	L1	ON	9.5
0.566000	---	23.51	46.00	22.49	1000.0	9.000	L1	ON	9.5
1.004000	27.13	---	56.00	28.87	1000.0	9.000	L1	ON	9.5
1.216000	---	23.82	46.00	22.18	1000.0	9.000	L1	ON	9.5
2.146000	24.82	---	56.00	31.18	1000.0	9.000	L1	ON	9.6
2.146000	---	22.18	46.00	23.82	1000.0	9.000	L1	ON	9.6
10.444000	---	23.07	50.00	26.93	1000.0	9.000	L1	ON	9.7
10.994000	26.00	---	60.00	34.00	1000.0	9.000	L1	ON	9.7
26.342000	26.10	---	60.00	33.90	1000.0	9.000	L1	ON	9.7
26.580000	---	23.30	50.00	26.70	1000.0	9.000	L1	ON	9.7

EUT:	GaN Fast Charger(Bluetooth version)	Polarity:	NEUTRAL
Model:	MCUS-20032565P3	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Mode 2		

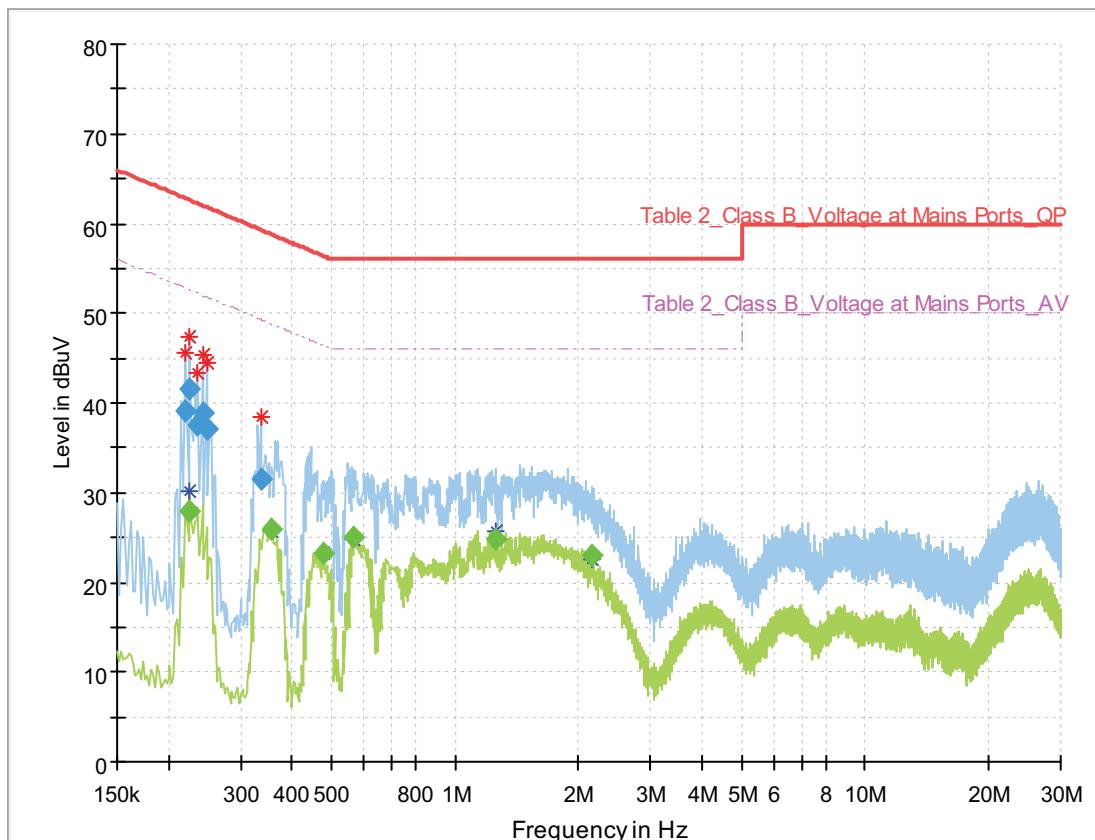

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.220000	39.05	---	62.82	23.77	1000.0	9.000	N	ON	9.5
0.226000	---	27.96	52.60	24.64	1000.0	9.000	N	ON	9.5
0.226000	41.49	---	62.60	21.10	1000.0	9.000	N	ON	9.5
0.236000	37.49	---	62.24	24.74	1000.0	9.000	N	ON	9.5
0.242000	38.92	---	62.03	23.11	1000.0	9.000	N	ON	9.5
0.248000	37.17	---	61.82	24.66	1000.0	9.000	N	ON	9.5
0.336000	31.56	---	59.30	27.74	1000.0	9.000	N	ON	9.5
0.358000	---	26.02	48.78	22.76	1000.0	9.000	N	ON	9.5
0.480000	---	23.27	46.34	23.07	1000.0	9.000	N	ON	9.5
0.568000	---	25.02	46.00	20.98	1000.0	9.000	N	ON	9.5
1.256000	---	24.76	46.00	21.24	1000.0	9.000	N	ON	9.5
2.162000	---	23.00	46.00	23.00	1000.0	9.000	N	ON	9.6

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **GaN Fast Charger(Bluetooth version)** is in compliance with Part 15C of the FCC Rules.

The End
