



DFS MEASUREMENT REPORT

FCC ID: Q9DAPIN0734
Applicant: Hewlett Packard Enterprise Company
Product: ACCESS POINT
Model No.: APIN0734
Trademark:  , 
FCC Classification: Unlicensed National Information Infrastructure (NII)
FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
Type of Device: Master
Result: Complies
Received Date: 2023-11-09
Test Date: 2024-03-26 ~ 2024-04-21

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 905462. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2311RSU031-U15	V01	Initial Report	2024-04-29	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
1.7. Description of Antenna RF Port	8
1.8. Antenna Details.....	9
2. Test Configuration	11
2.1. Test Mode.....	11
2.2. Test Channel	11
2.3. Applied Standards.....	11
2.4. Test Environment Condition	11
3. DFS Detection Thresholds and Radar Test Waveforms	12
3.1. Applicability	12
3.2. DFS Devices Requirements.....	13
3.3. DFS Detection Threshold Values.....	15
3.4. Parameters of DFS Test Signals.....	16
3.5. Conducted Test Setup.....	19
4. Measuring Instrument	20
5. Test Result.....	21
5.1. Summary.....	21
5.2. Radar Waveform Calibration Measurement.....	22
5.2.1. Calibration Setup	22
5.2.2. Calibration Procedure	22
5.2.3. Calibration & Channel Loading Result.....	22
5.3. NII Detection Bandwidth Measurement	23
5.3.1. Test Limit	23
5.3.2. Test Procedure.....	23
5.3.3. Test Result	24
5.4. Initial Channel Availability Check Time Measurement	25
5.4.1. Test Limit	25
5.4.2. Test Procedure.....	25
5.4.3. Test Result	25

5.5.	Radar Burst at the Beginning of the Channel Availability Check Time Measurement	26
5.5.1.	Test Limit	26
5.5.2.	Test Procedure	26
5.5.3.	Test Result	26
5.6.	Radar Burst at the End of the Channel Availability Check Time Measurement	27
5.6.1.	Test Limit	27
5.6.2.	Test Procedure	27
5.6.3.	Test Result	27
5.7.	In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement	28
5.7.1.	Test Limit	28
5.7.2.	Test Procedure	28
5.7.3.	Test Result	28
5.8.	Statistical Performance Check Measurement	29
5.8.1.	Test Limit	29
5.8.2.	Test Procedure	29
5.8.3.	Test Result	29
Appendix A – Test Result		30
A.1	Calibration Test Result	30
A.2	Channel Loading Test Result	32
A.3	NII Detection Bandwidth Test Result	35
A.4	Initial Channel Availability Check Time Test Result	41
A.5	Radar Burst at the Beginning of the Channel Availability Check Time Test Result	42
A.6	Radar Burst at the End of the Channel Availability Check Time Test Result	43
A.7	In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Test Result	44
A.8	Statistical Performance Check	48
Appendix B – Test Setup Photograph		208
Appendix C – EUT Photograph		209

1. General Information

1.1. Applicant

Hewlett Packard Enterprise
6280 America Center Drive, San Jose CA 95002, United States

1.2. Manufacturer

Hewlett Packard Enterprise
6280 America Center Drive, San Jose CA 95002, United States

1.3. Testing Facility

<input checked="" type="checkbox"/>	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: <input type="checkbox"/> R-20025 <input type="checkbox"/> G-20034 <input type="checkbox"/> C-20020 <input type="checkbox"/> T-20020 <input type="checkbox"/> R-20141 <input type="checkbox"/> G-20134 <input type="checkbox"/> C-20103 <input type="checkbox"/> T-20104
<input type="checkbox"/>	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
<input type="checkbox"/>	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	ACCESS POINT
Model No.	APIN0734
Serial No.	CNRLM5102H
Software Version	ArubaOS_Aquila_10.7.0_8.0_cshen_c2c_89503
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	BLE only
ZigBee Specification	802.15.4
GNSS Specification	GPS, Galileo
Antenna Information	Refer to Section 1.8
Power Type	AC Adapter Input or PoE Input
Operating Environment	Indoor Use
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20: 5260~5320MHz, 5500~5720MHz For 802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40: 5270~5310MHz, 5510~5710MHz For 802.11ac-VHT80/ax-HE80/be-EHT80: 5290MHz, 5530MHz, 5610 MHz, 5690MHz For 802.11ac-VHT160/ax-HE160/be-EHT160: 5250MHz, 5570MHz
Type of Modulation	802.11a/n/ac: OFDM 802.11ax/be: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 1732Mbps 802.11ax: up to 2402Mbps 802.11be: up to 2882Mbps
Power-on cycle	Requires 84.3 seconds to complete its power-on cycle
Uniform Spreading (For DFS Frequency Band)	For the 5250-5350MHz, 5470-5725 MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
52	5260 MHz	56	5280 MHz	60	5300 MHz
64	5320 MHz	100	5500 MHz	104	5520 MHz
108	5540 MHz	112	5560 MHz	116	5580 MHz
120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz
144	5720 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz	102	5510 MHz
110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	142	5710 MHz	--	--


802.11ac-VHT80/ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
58	5290 MHz	106	5530 MHz	122	5610 MHz
138	5690 MHz	--	--	--	--

802.11ac-VHT160/ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250 MHz	114	5570 MHz	--	--

1.7. Description of Antenna RF Port

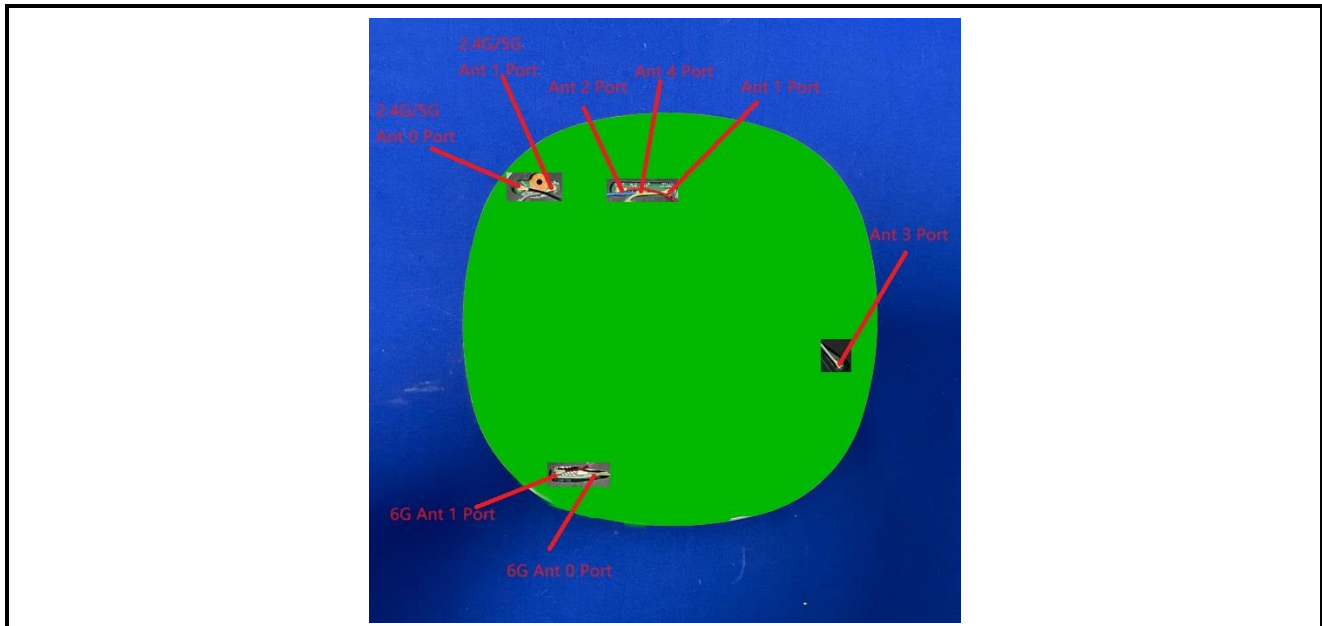

Antenna Port	RF Spec.			
	Wi-Fi 2.4G	Wi-Fi 5G	Wi-Fi 6G	BLE/ZigBee
6G Ant 0	--	--	● (Radio 2)	--
6G Ant 1	--	--	● (Radio 2)	--
2.4G/5G Ant 0	● (Radio 0)	● (Radio 1)	--	--
2.4G/5G Ant 1	● (Radio 0)	● (Radio 1)	--	--
Ant 4	--	--	--	● (Core 1)
Ant 2	--	--	--	● (Core 0)
Ant 1	--	--	--	● (Core 1)
Ant 3	GNSS			

Note: Radio 2 6GHz will be disabled for application.

1.8. Antenna Details

Polarization	Antenna Name	Frequency Band (GHz)	Max Peak Gain (dBi)	CDD Dir Gain (dBi)		BF Dir Gain (dBi)
				For Power	For PSD	
Wi-Fi External Antenna List (2*2 MIMO)						
Omni	AP-ANT-311	2.4 ~ 2.5	3.0	3.0	6.01	6.01
		5.15 ~ 5.9	6.0	6.0	9.01	9.01
		5.9 ~ 7.2	6.0	6.0	9.01	9.01
Omni	AP-ANT-312	2.4 ~ 2.5	3.3	3.3	6.31	6.31
		5.15 ~ 5.9	3.3	3.3	6.31	6.31
		5.9 ~ 7.2	4.1	4.1	7.11	7.11
Omni	AP-ANT-313	2.4 ~ 2.5	3.0	3.0	6.01	6.01
		5.15 ~ 5.9	6.0	6.0	9.01	9.01
		5.9 ~ 7.2	6.0	6.0	9.01	9.01
Omni	AP-ANT-320 AP-ANT-340	2.4 ~ 2.5	4.0	4.0	7.01	7.01
		5.15 ~ 5.9	5.0	5.0	8.01	8.01
		5.9 ~ 7.2	5.0	5.0	8.01	8.01
Directional (Note 4, 5)	AP-ANT-325 AP-ANT-345	2.4 ~ 2.5	6.1	6.1	6.1	6.1
		5.15 ~ 5.9	6.1	6.1	6.1	6.1
		5.9 ~ 7.2	5.4	5.4	5.4	5.4
Directional (Note 4, 5)	AP-ANT-328 AP-ANT-348	2.4 ~ 2.5	7.5	7.5	7.5	7.5
		5.15 ~ 5.9	8.0	8.0	8.0	8.0
		5.9 ~ 7.2	8.0	8.0	8.0	8.0

Note:

1, The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices, Array Gain = $10 \log (N_{ANT}/ N_{SS})$ dB = 3.01;
- For power measurements on IEEE 802.11 devices, Array Gain = 0 dB for $N_{ANT} \leq 4$;

2, The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax/be, not include 802.11a/b/g.

3, The antenna specification is provided by the applicant.

4, These antennas are cross polarized design and the detail refers to antenna specification.

5, AP-ANT-325 is a tri-band and 2-element antenna and AP-ANT-345 is a tri-band and 4-element antenna.

AP-ANT-328 is a tri-band and 2-element antenna and AP-ANT-348 is a tri-band and 4-element antenna.

6. Low gain antenna (AP-ANT-312) was selected to perform all RF testing that can get maximum power

setting, high gain different type antenna (AP-ANT-340 & AP-ANT-348) was selected to perform radiated spurious emission and band edge testing. High gain antenna power setting will be reduced according to difference value of antenna gain declared by applicant.

2. Test Configuration

2.1. Test Mode

Mode 1: Operating under AP mode
Mode 2: Operating under Mesh mode

2.2. Test Channel

Test Mode	Test Channel	Test Frequency
802.11be-EHT20	100	5500 MHz
802.11be-EHT40	102	5510 MHz
802.11be-EHT80	106	5530 MHz
802.11be-EHT160	50	5250 MHz
802.11be-EHT160	114	5570 MHz

2.3. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407 Section (h)(2)
- KDB 905462 D02v02
- KDB 905462 D04v01

2.4. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. DFS Detection Thresholds and Radar Test Waveforms

3.1. Applicability

The following table from FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 lists the applicable requirements for the DFS testing.

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 3-1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Table 3-2: Applicability of DFS Requirements during normal operation

3.2. DFS Devices Requirements

Per FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 the following are the requirements for Master Devices:

- (a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 ~ 5350 MHz and 5470 ~ 5725 MHz bands. DFS is not required in the 5150 ~ 5250 MHz or 5725 ~ 5825 MHz bands.
- (b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- (c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- (d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- (e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- (f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- (g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

Channel Move Time and Channel Closing Transmission Time requirements are listed in the following table.

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
<p>Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p>Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p>Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p>	

Table 3-3: DFS Response Requirements

3.3. DFS Detection Threshold Values

The DFS detection thresholds are defined for Master devices and Client Devices with In-service monitoring.

These detection thresholds are listed in the following table.

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP \geq 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
<p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p>	

Table 3-4: Detection Thresholds for Master Devices and Client Devices with Radar Detection

3.4. Parameters of DFS Test Signals

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 3-6	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 3-5: Parameters for Short Pulse Radar Waveforms

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 3-6: Pulse Repetition Intervals Values for Test A

Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50 - 100	5 - 20	1000 - 2000	1 - 3	8 - 20	80%	30

Table 3-7: Parameters for Long Pulse Radar Waveforms

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses Per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

Table 3-8: Parameters for Frequency Hopping Radar Waveforms

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

3.5. Conducted Test Setup

The FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 describes a radiated test setup and a conducted test setup. The conducted test setup was used for this testing. Figure 3-1 shows the typical test setup.

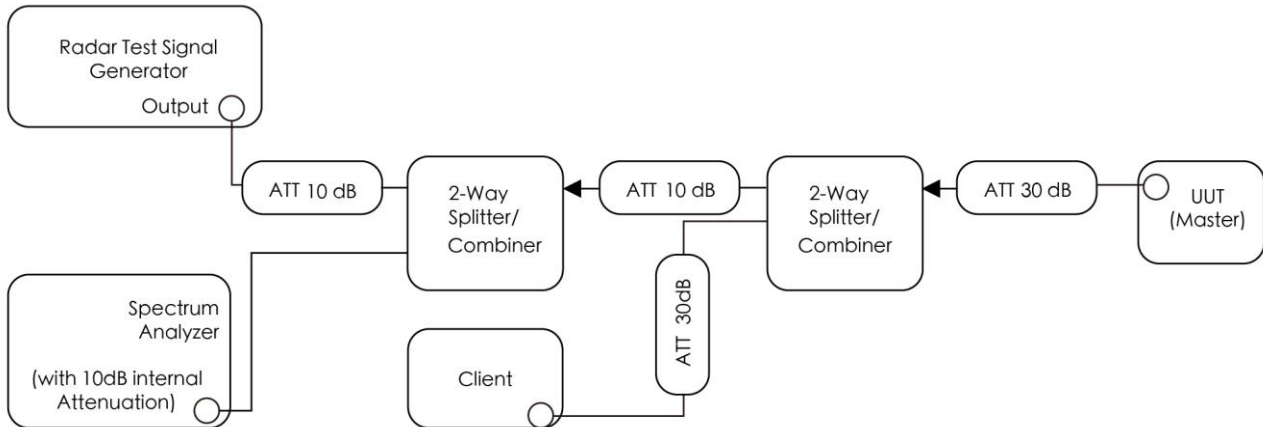


Figure 3-1: Conducted Test Setup where UUT is a Master and Radar Test Waveforms are injected into the Masters

4. Measuring Instrument

Instrument Name	Manufacturer	Model No.	Asset No.	Cali. Interval	Cal. Due Date	Test Site
Shielding Room	HUAMING	WZ-SR4	MRTSUE06441	N/A	N/A	WZ-SR4
Signal Generator	Keysight	N5182B	MRTSUE06451	1 year	2024-06-29	WZ-SR4
Signal Analyzer	Keysight	N9010B	MRTSUE07027	1 year	2024-10-23	WZ-SR4
Thermohygrometer	testo	608-H1	MRTSUE11256	1 year	2024-10-19	WZ-SR4
Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2025-02-03	WZ-SR4

Client Information

Instrument	Manufacturer	Type No.	Certification Number
Wi-Fi Module	Intel	BE200NGW	FCC ID: PD9BE200NG

Software	Version	Manufacturer	Function
DFS Tool	V 6.9.2	Agilent	DFS Test Software
Pulse Sequencer	V 2.0	R&S	DFS Test Software
Signal Studio	V2.2.0.0	Keysight	DFS Test Software

5. Test Result

5.1. Summary

Parameter	Verdict	Reference
NII Detection Bandwidth Measurement	Pass	Section 5.3
Initial Channel Availability Check Time	Pass	Section 5.4
Radar Burst at the Beginning of the Channel Availability Check Time	Pass	Section 5.5
Radar Burst at the End of the Channel Availability Check Time	Pass	Section 5.6
In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time	Pass	Section 5.7
Non-Occupancy Period	Pass	Section 5.7
Statistical Performance Check	Pass	Section 5.8

Note 1: For mesh mode, we just test the In-service monitoring item declared by the applicant.

Note 2: We used the worst-case level -64dBm as DFS detection thresholds for all DFS testing.

Note 3: The conducted test method was used for all items.

5.2. Radar Waveform Calibration Measurement

5.2.1. Calibration Setup

The conducted test setup was used for this calibration testing. Figure 3-2 shows the typical test setup.

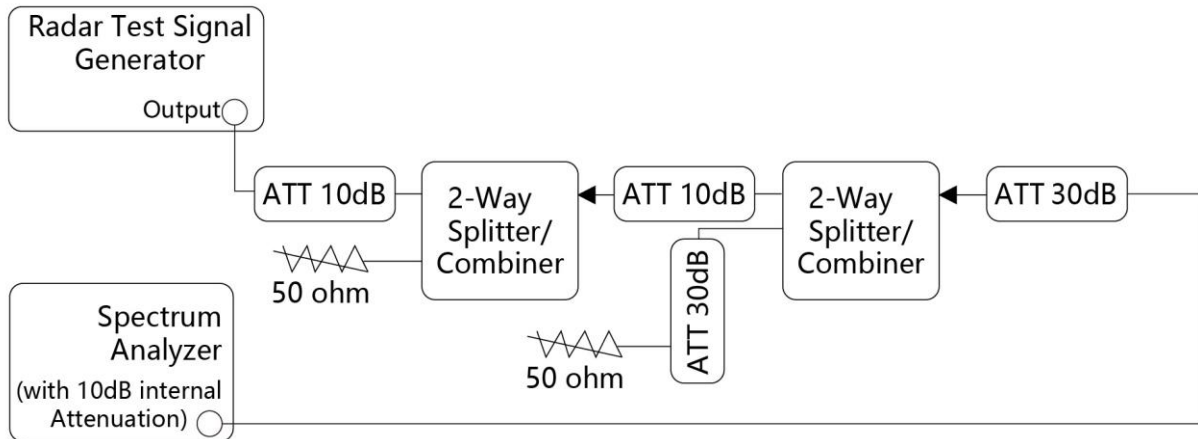


Figure 3-2: Conducted Test Setup

5.2.2. Calibration Procedure

The Interference Radar Detection Threshold Level is $(-64\text{dBm}) + (0) [\text{dBi}] + 1 \text{ dB} = -63 \text{ dBm}$ that had been taken into account the output power range and antenna gain. The above equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to at least 3MHz. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $(-64\text{dBm}) + (0) [\text{dBi}] + 1 \text{ dB} = -63\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

5.2.3. Calibration & Channel Loading Result

Refer to Appendix A.1&A.2.

5.3. NII Detection Bandwidth Measurement

5.3.1. Test Limit

Minimum 100% of the NII 99% transmission power bandwidth. During the U-NII Detection Bandwidth detection test, each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

5.3.2. Test Procedure

1. Adjust the equipment to produce a single Burst of any one of the Short Pulse Radar Types 0-4 in Table 3-5 at the center frequency of the EUT Operating Channel at the specified DFS Detection Threshold level.
2. The generating equipment is configured as shown in the Conducted Test Setup above section 3.5.
3. The EUT is set up as a stand-alone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio reflecting the worst case (maximum) that is user configurable during this test.
4. Generate a single radar Burst, and note the response of the EUT. Repeat for a minimum of 10 trials. The EUT must detect the Radar Waveform using the specified U-NII Detection Bandwidth criterion shown in Table 3-5. In cases where the channel bandwidth may exceed past the DFS band edge on specific channels (i.e., 802.11ac or wideband frame based systems) select a channel that has the entire emission bandwidth within the DFS band. If this is not possible, test the detection BW to the DFS band edge.
5. Starting at the center frequency of the UUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in Table 3-3. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as F_H) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies above F_H is not required to demonstrate compliance.
6. Starting at the center frequency of the EUT operating Channel, decrease the radar frequency in 1 MHz steps, repeating the above item 4 test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion. Record the lowest frequency (denote as F_L) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies below F_L is not required to demonstrate compliance.
7. The U-NII Detection Bandwidth is calculated as follows: $\text{U-NII Detection Bandwidth} = F_H - F_L$
8. The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the

EUT does not comply with DFS requirements.

5.3.3. Test Result

Refer to Appendix A.3.

5.4. Initial Channel Availability Check Time Measurement

5.4.1. Test Limit

The EUT shall perform a Channel Availability Check to ensure that there is no radar operating on the channel. After power-up sequence, receive at least 1 minute on the intended operating frequency.

5.4.2. Test Procedure

1. The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the EUT is powered on, the spectrum analyzer will be set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the Channel occupied by the radar (Chr) with a 2.5 minutes sweep time. The spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.
2. The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.
3. Confirm that the EUT initiates transmission on the channel. Measurement system showing its nominal noise floor is marker1.

5.4.3. Test Result

Refer to Appendix A.4.

5.5. Radar Burst at the Beginning of the Channel Availability Check Time Measurement

5.5.1. Test Limit

In beginning of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC on that channel.

5.5.2. Test Procedure

1. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.
2. The EUT is in completion power-up cycle (from T0 to T1). T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at T1.
3. Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 2.5 minutes after the radar Burst has been generated. Verify that during the 2.5 minutes measurement window no EUT transmissions occurred.

5.5.3. Test Result

Refer to Appendix A.5.

5.6. Radar Burst at the End of the Channel Availability Check Time Measurement

5.6.1. Test Limit

In the end of Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC on that channel.

5.6.2. Test Procedure

1. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.
2. The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at T1+ 54 seconds.
3. Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 2.5 minutes after the radar Burst has been generated. Verify that during the 2.5 minutes measurement window no EUT transmissions occurred.

5.6.3. Test Result

Refer to Appendix A.6.

5.7. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement

5.7.1. Test Limit

The EUT has In-Service Monitoring function to continuously monitor the radar signals. If the radar is detected, must leave the channel (Shutdown). The Channel Move Time to cease all transmissions on the current channel upon detection of a Radar Waveform above the DFS Detection Threshold within 10 sec. The total duration of Channel Closing Transmission Time is 260ms, consisting of data signals and the aggregate of control signals, by a U-NII device during the Channel Move Time. The Non-Occupancy Period time is 30 minutes during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.7.2. Test Procedure

1. The test should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0.
2. When the radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device. A U-NII device operating as a Master Device will associate with the Client Device at Channel. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test. At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at Detection Threshold + 1dB.
3. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the EUT during the observation time (Channel Move Time).
4. Measurement of the aggregate duration of the Channel Closing Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (1.5ms) = S (12 \text{ sec}) / B (8000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is the sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C = N \times Dwell$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins showing a U-NII transmission and Dwell is the dwell time per bin.
5. Measure the EUT for more than 30 minutes following the channel close/move time to verify that the EUT does not resume any transmissions on this Channel.

5.7.3. Test Result

Refer to Appendix A.7.

5.8. Statistical Performance Check Measurement

5.8.1. Test Limit

The minimum percentage of successful detection requirements found in below table when a radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device (In- Service Monitoring).

Radar Type	Minimum Number of Trails	Detection Probability
0	30	$P_d \geq 60\%$
1	30(15 of test A and 15 of test B)	$P_d \geq 60\%$
2	30	$P_d \geq 60\%$
3	30	$P_d \geq 60\%$
4	30	$P_d \geq 60\%$
Aggregate (Radar Types 1-4)	120	$P_d \geq 80\%$
5	30	$P_d \geq 80\%$
6	30	$P_d \geq 70\%$

Note: The percentage of successful detection is calculated by:
 $(\text{Total Waveform Detections} / \text{Total Waveform Trails}) * 100 = \text{Probability of Detection Radar Waveform}$
 In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows: $(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4$.

5.8.2. Test Procedure

1. Stream the MPEG test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
2. At time T0 the Radar Waveform generator sends the individual waveform for each of the Radar Types 1-6, at levels equal to the DFS Detection Threshold + 1dB, on the Operating Channel.
3. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 0 to ensure detection occurs.
4. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.
5. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.
6. The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in below table


5.8.3. Test Result


Refer to Appendix A.8.

Appendix A – Test Result

A.1 Calibration Test Result

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-03-26 ~ 2024-04-12	Test Item	Radar Waveform Calibration
Test Mode	Mode 1		

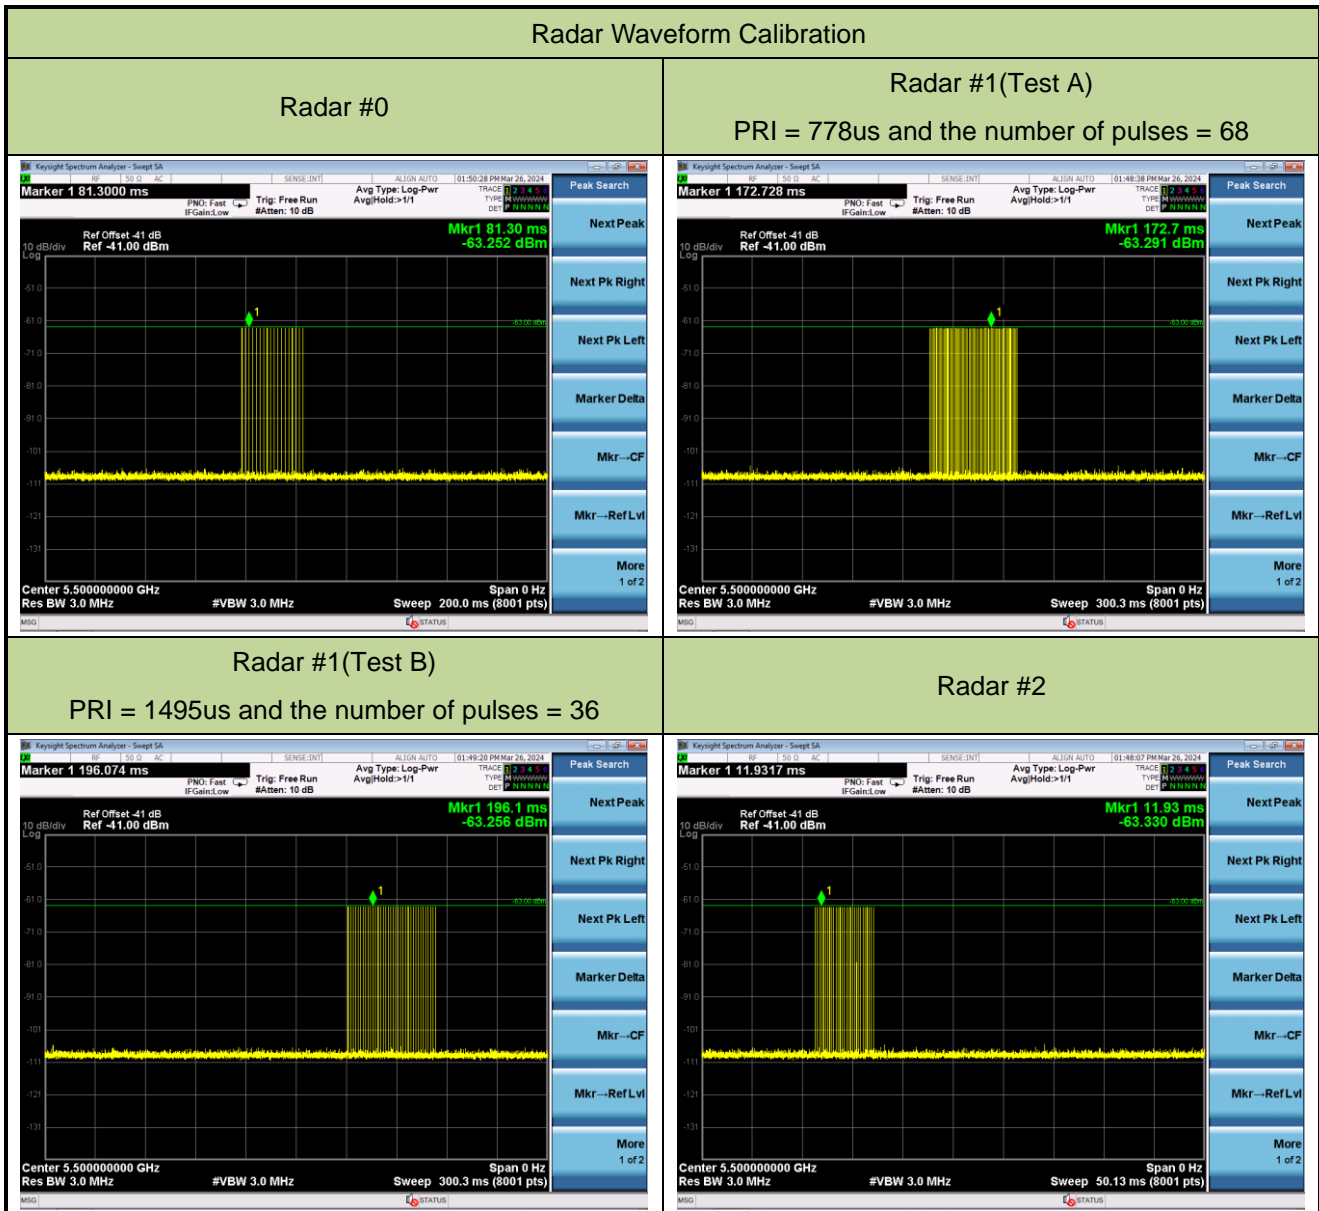

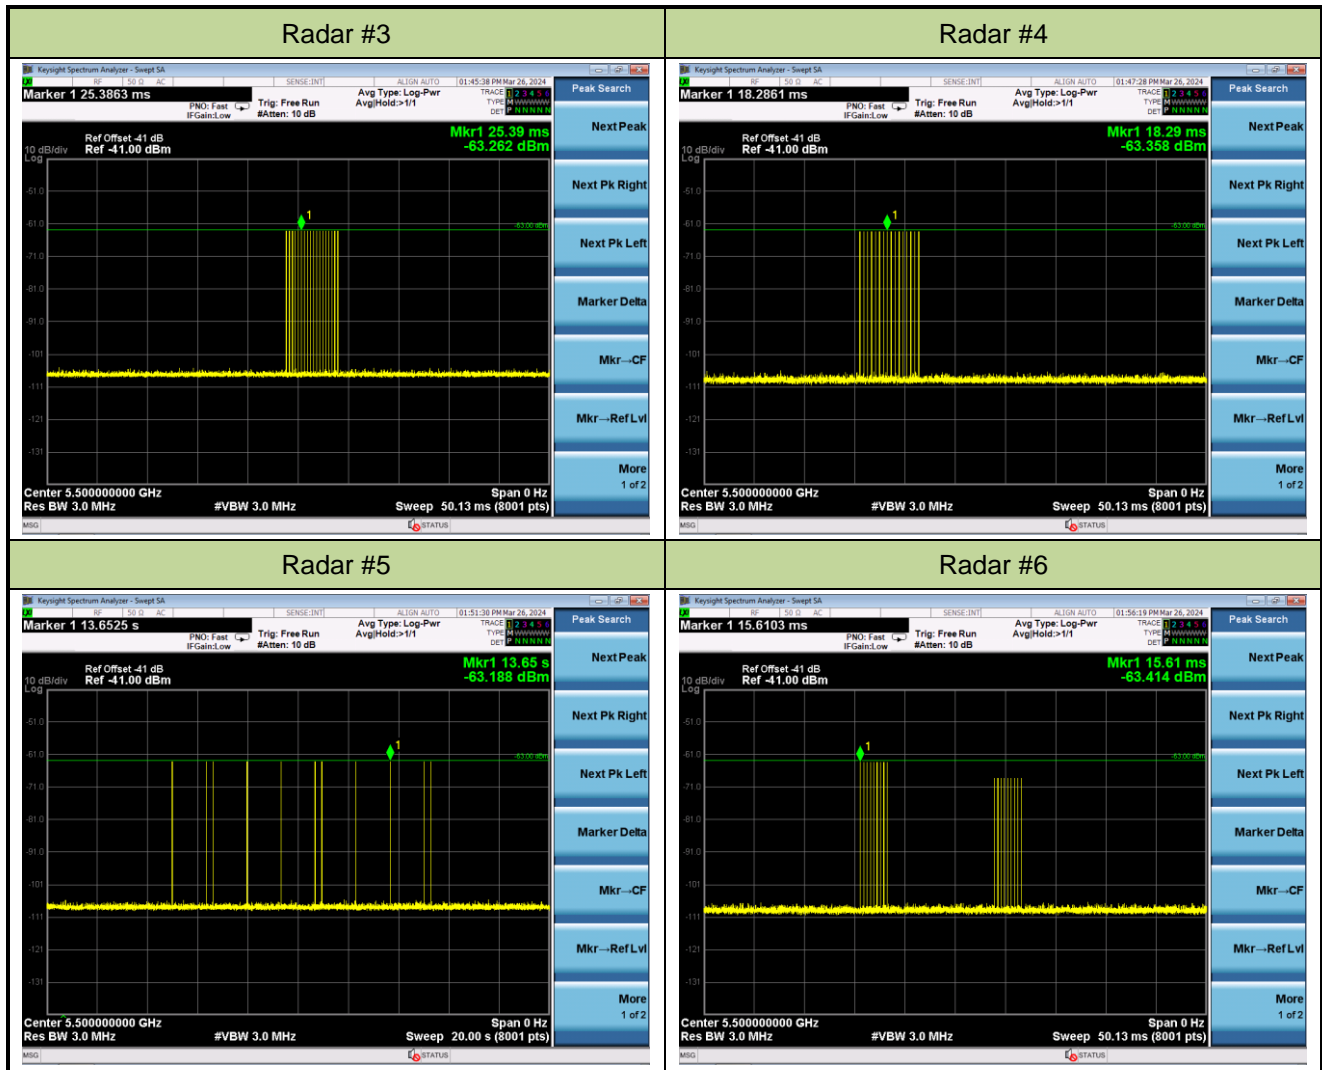

A.2 Channel Loading Test Result


Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-03-28 ~ 2024-04-01	Test Item	Channel Loading
Test Mode	Mode 1		



Test Mode	Test Frequency	Packet ratio	Requirement ratio	Test Result
802.11be-EHT20	5500 MHz	17.55%	≥ 17%	Pass
802.11be-EHT40	5510 MHz	19.95%	≥ 17%	Pass
802.11be-EHT80	5530 MHz	17.64%	≥ 17%	Pass
802.11be-EHT160	5250 MHz	17.46%	≥ 17%	Pass
802.11be-EHT160	5570 MHz	19.20%	≥ 17%	Pass

Note: System testing was performed with the designated iperf test file. This file is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device.
Packet ratio = Time On / (Time On + Off Time).

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-04-21	Test Item	Channel Loading
Test Mode	Mode 2		

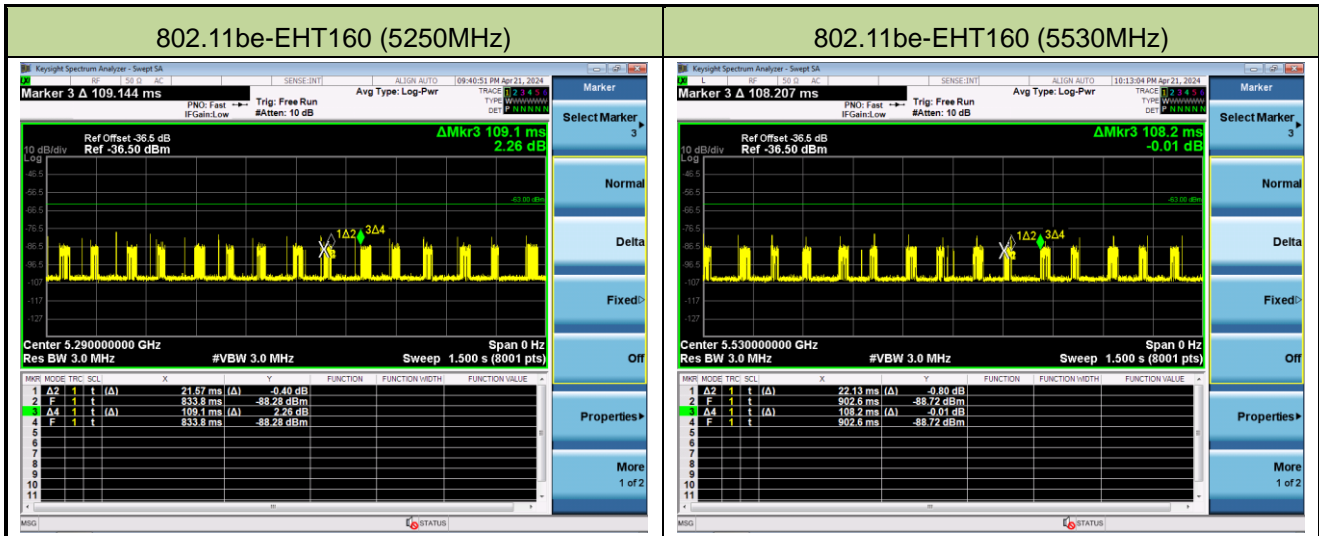

Test Mode	Test Frequency	Packet ratio	Requirement ratio	Test Result
802.11be-EHT160	5290 MHz	19.77%	≥ 17%	Pass
802.11be-EHT160	5530 MHz	20.45%	≥ 17%	Pass

Note: System testing was performed with the designated iperf test file. This file is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device.

Packet ratio = Time On / (Time On + Off Time).

A.3 NII Detection Bandwidth Test Result

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-03-27		
Test Item	Detection Bandwidth (802.11be-EHT20 mode - 5500MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490 FL	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5500	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5510 FH	1	1	1	1	1	1	1	1	1	1	100

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5500MHz. The 99% channel bandwidth is 19.099MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5510\text{MHz} - 5490\text{MHz} = 20\text{MHz}$

Note 3: NII Detection Bandwidth Min. Limit (MHz): 19.099MHz.

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-03-27		
Test Item	Detection Bandwidth (802.11be-EHT40 mode - 5510MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490 FL	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5500	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5510	1	1	1	1	1	1	1	1	1	1	100
5515	1	1	1	1	1	1	1	1	1	1	100
5520	1	1	1	1	1	1	1	1	1	1	100
5525	1	1	1	1	1	1	1	1	1	1	100
5530 FH	1	1	1	1	1	1	1	1	1	1	100

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5510MHz. The 99% channel bandwidth is 37.687MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5530\text{MHz} - 5490\text{MHz} = 40\text{MHz}$.

Note 3: NII Detection Bandwidth Min. Limit (MHz): 37.687MHz.

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-03-27		
Test Item	Detection Bandwidth (802.11be-EHT80 mode - 5530MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490 FL	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5500	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5510	1	1	1	1	1	1	1	1	1	1	100
5515	1	1	1	1	1	1	1	1	1	1	100
5520	1	1	1	1	1	1	1	1	1	1	100
5525	1	1	1	1	1	1	1	1	1	1	100
5530	1	1	1	1	1	1	1	1	1	1	100
5535	1	1	1	1	1	1	1	1	1	1	100
5540	1	1	1	1	1	1	1	1	1	1	100
5545	1	1	1	1	1	1	1	1	1	1	100
5550	1	1	1	1	1	1	1	1	1	1	100
5555	1	1	1	1	1	1	1	1	1	1	100
5560	1	1	1	1	1	1	1	1	1	1	100
5565	1	1	1	1	1	1	1	1	1	1	100
5570 FH	1	1	1	1	1	1	1	1	1	1	100

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5530MHz. The 99% channel bandwidth is 76.979MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5570\text{MHz} - 5490\text{MHz} = 80\text{MHz}$.

Note 3: NII Detection Bandwidth Min. Limit (MHz): 76.979MHz.

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-03-27		
Test Item	Detection Bandwidth (802.11be-EHT160 mode - 5250MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5250 FL	1	1	1	1	1	1	1	1	1	1	100
5255	1	1	1	1	1	1	1	1	1	1	100
5260	1	1	1	1	1	1	1	1	1	1	100
5265	1	1	1	1	1	1	1	1	1	1	100
5270	1	1	1	1	1	1	1	1	1	1	100
5275	1	1	1	1	1	1	1	1	1	1	100
5280	1	1	1	1	1	1	1	1	1	1	100
5285	1	1	1	1	1	1	1	1	1	1	100
5290	1	1	1	1	1	1	1	1	1	1	100
5295	1	1	1	1	1	1	1	1	1	1	100
5300	1	1	1	1	1	1	1	1	1	1	100
5305	1	1	1	1	1	1	1	1	1	1	100
5310	1	1	1	1	1	1	1	1	1	1	100
5315	1	1	1	1	1	1	1	1	1	1	100
5320	1	1	1	1	1	1	1	1	1	1	100
5325	1	1	1	1	1	1	1	1	1	1	100
5330 FH	1	1	1	1	1	1	1	1	1	1	100

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5250MHz. The 99% channel bandwidth within U-NII Band-2A is 78.225MHz (99% BW / 2 = 156.45MHz / 2 = 78.225MHz). (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5330\text{MHz} - 5250\text{MHz} = 80\text{MHz}$.

Note 3: NII Detection Bandwidth Min. Limit (MHz): 78.225MHz.

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-03-27		
Test Item	Detection Bandwidth (802.11be-EHT160 mode - 5570MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	0	0	0	0	0	0	0	0	0	0	0
5491 FL	1	1	1	1	1	1	1	1	1	1	1
5492	1	1	1	1	1	1	1	1	1	1	1
5493	1	1	1	1	1	1	1	1	1	1	1
5494	1	1	1	1	1	1	1	1	1	1	1
5495	1	1	1	1	1	1	1	1	1	1	1
5505	1	1	1	1	1	1	1	1	1	1	1
5510	1	1	1	1	1	1	1	1	1	1	1
5515	1	1	1	1	1	1	1	1	1	1	1
5520	1	1	1	1	1	1	1	1	1	1	1
5525	1	1	1	1	1	1	1	1	1	1	1
5530	1	1	1	1	1	1	1	1	1	1	1
5535	1	1	1	1	1	1	1	1	1	1	1
5540	1	1	1	1	1	1	1	1	1	1	1
5545	1	1	1	1	1	1	1	1	1	1	1
5550	1	1	1	1	1	1	1	1	1	1	1
5555	1	1	1	1	1	1	1	1	1	1	1
5560	1	1	1	1	1	1	1	1	1	1	1
5565	1	1	1	1	1	1	1	1	1	1	1
5570	1	1	1	1	1	1	1	1	1	1	1
5575	1	1	1	1	1	1	1	1	1	1	1
5580	1	1	1	1	1	1	1	1	1	1	1
5585	1	1	1	1	1	1	1	1	1	1	1
5590	1	1	1	1	1	1	1	1	1	1	1
5595	1	1	1	1	1	1	1	1	1	1	1
5600	1	1	1	1	1	1	1	1	1	1	1
5605	1	1	1	1	1	1	1	1	1	1	1
5610	1	1	1	1	1	1	1	1	1	1	1
5615	1	1	1	1	1	1	1	1	1	1	1
5620	1	1	1	1	1	1	1	1	1	1	1
5625	1	1	1	1	1	1	1	1	1	1	1
5630	1	1	1	1	1	1	1	1	1	1	1

5635	1	1	1	1	1	1	1	1	1	1	100
5640	1	1	1	1	1	1	1	1	1	1	100
5645	1	1	1	1	1	1	1	1	1	1	100
5646	1	1	1	1	1	1	1	1	1	1	100
5647	1	1	1	1	1	1	1	1	1	1	100
5648	1	1	1	1	1	1	1	1	1	1	100
5649 FH	1	1	1	1	1	1	1	1	1	1	100
5650	0	0	0	0	0	0	0	0	0	0	0


Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5570MHz. The 99% channel bandwidth is 155.92MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5649\text{MHz} - 5491\text{MHz} = 158\text{MHz}$

Note 3: NII Detection Bandwidth Min. Limit (MHz): 156.92MHz.

A.4 Initial Channel Availability Check Time Test Result


Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-04-12		
Test Item	Initial Channel Availability Check Time (802.11be-EHT20 mode - 5500MHz)		

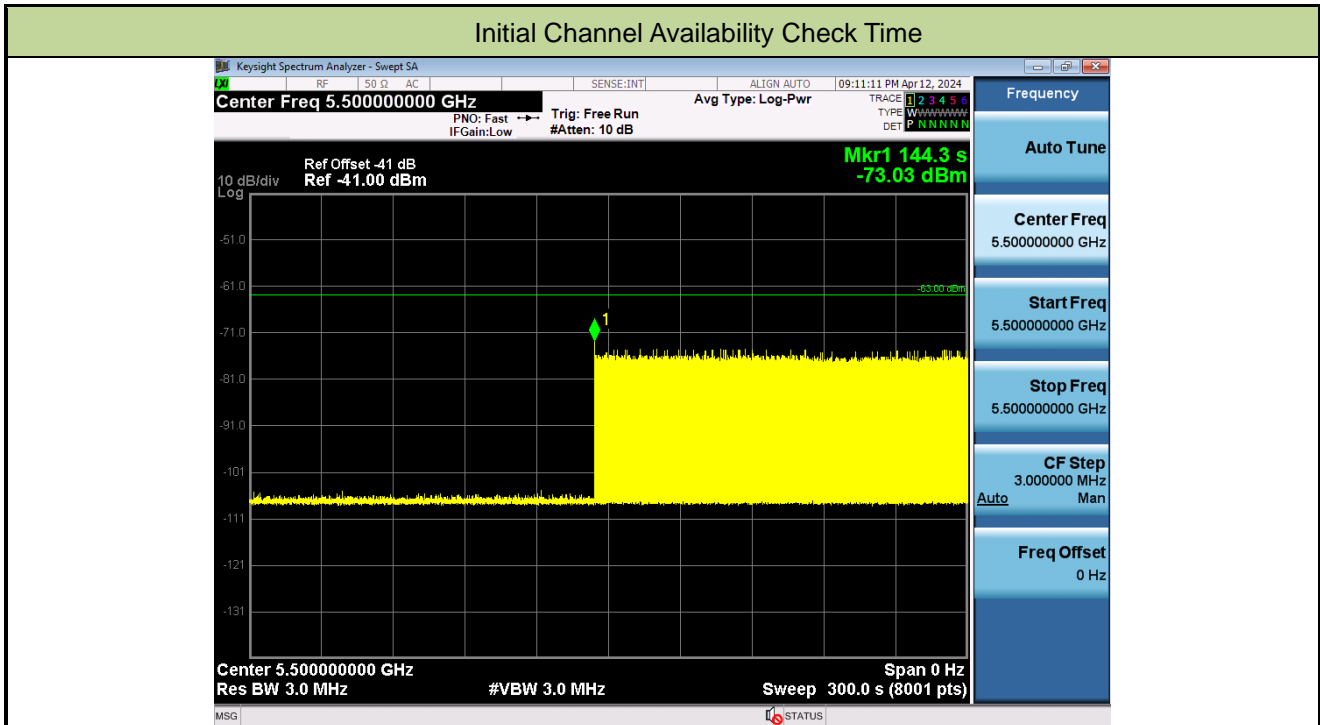

Note: The EUT does not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle (84.3 sec). Initial beacons/data transmissions are indicated by marker 1 (144.3 sec).


A.5 Radar Burst at the Beginning of the Channel Availability Check Time Test Result

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-04-12		
Test Item	Beginning of the Channel Availability Check Time (802.11be-EHT20 mode - 5500MHz)		

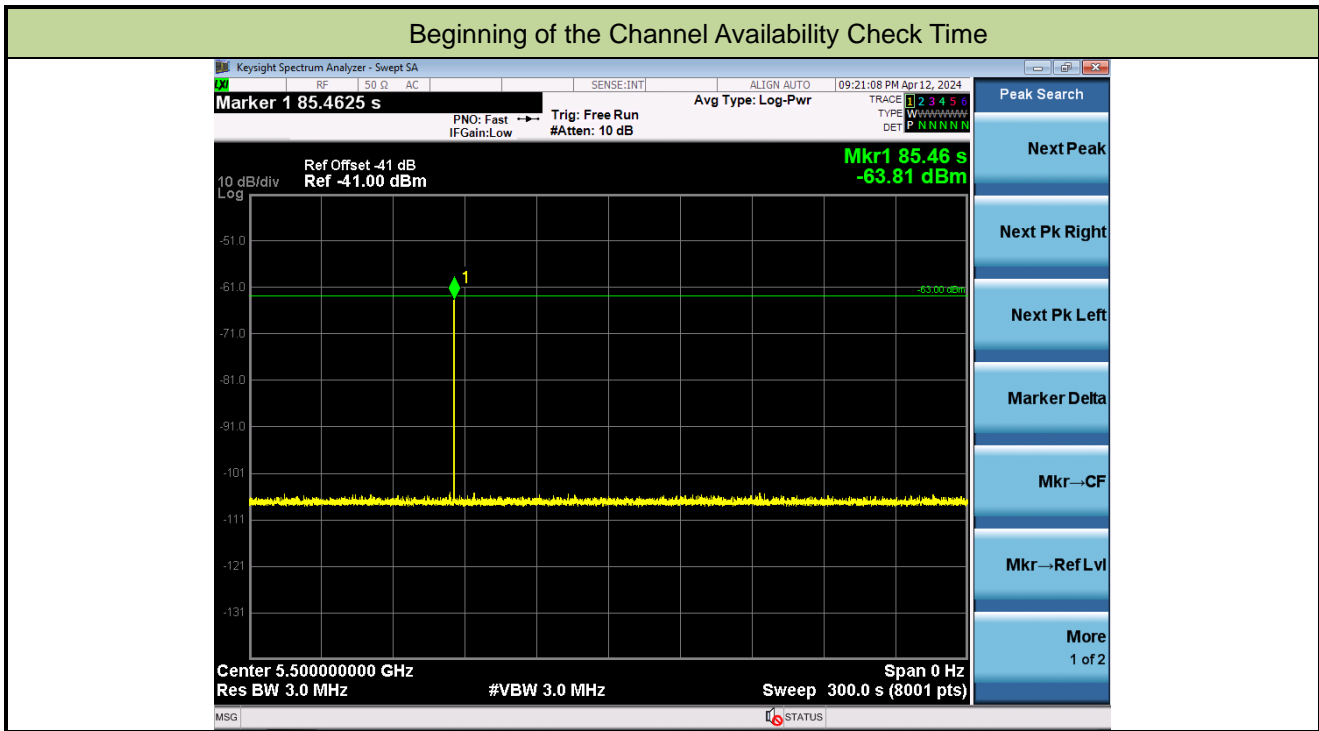



A.6 Radar Burst at the End of the Channel Availability Check Time Test Result

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-04-12		
Test Item	End of the Channel Availability Check Time (802.11be-EHT20 mode - 5500MHz)		

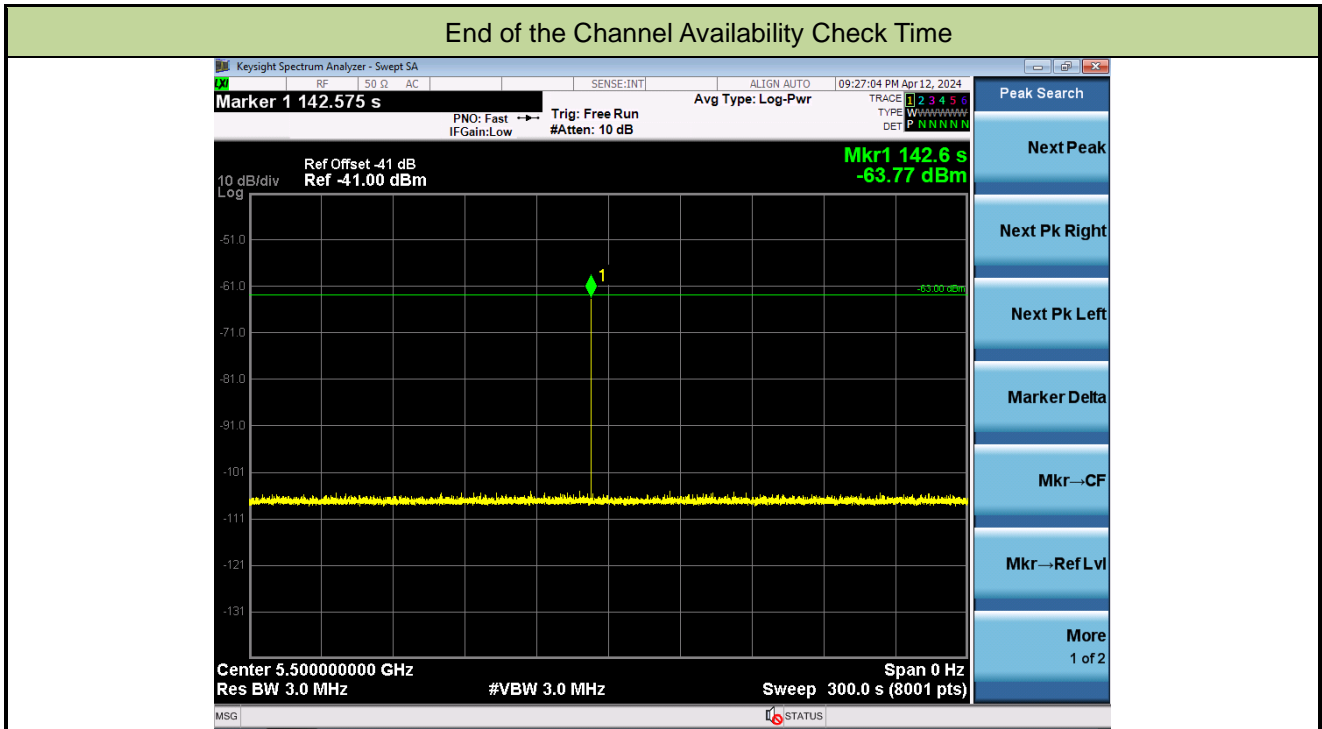

A.7 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Test Result


Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-03-30 ~ 2024-04-12	Test Mode	Mode 1
Test Item	Channel Move Time and Channel Closing Transmission Time (802.11be-EHT160 mode - 5250MHz)		

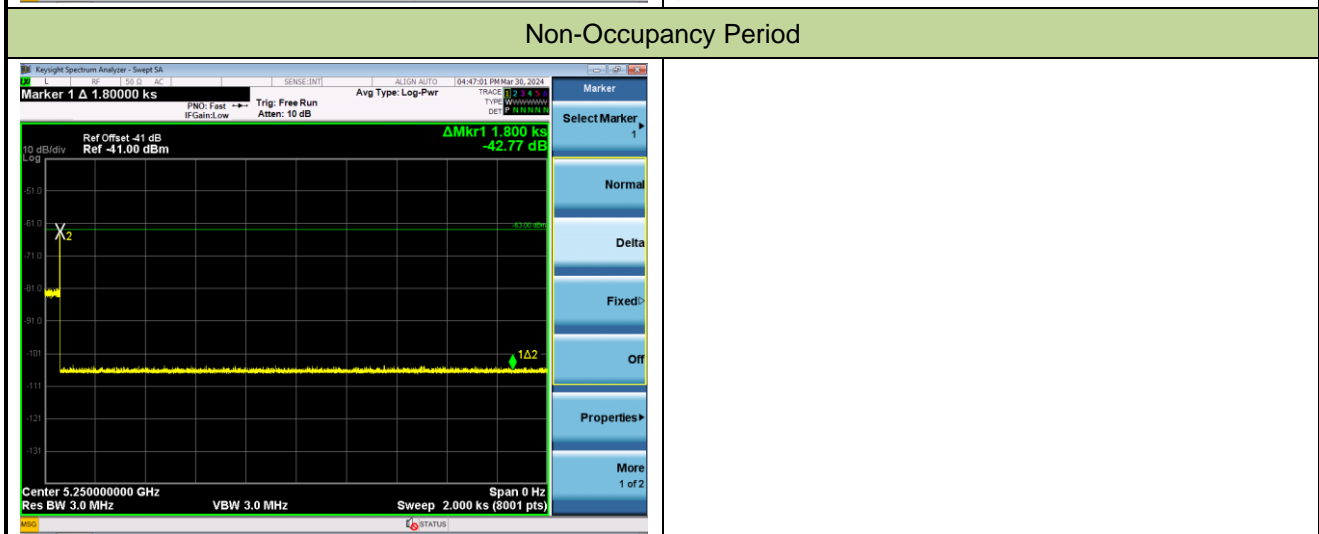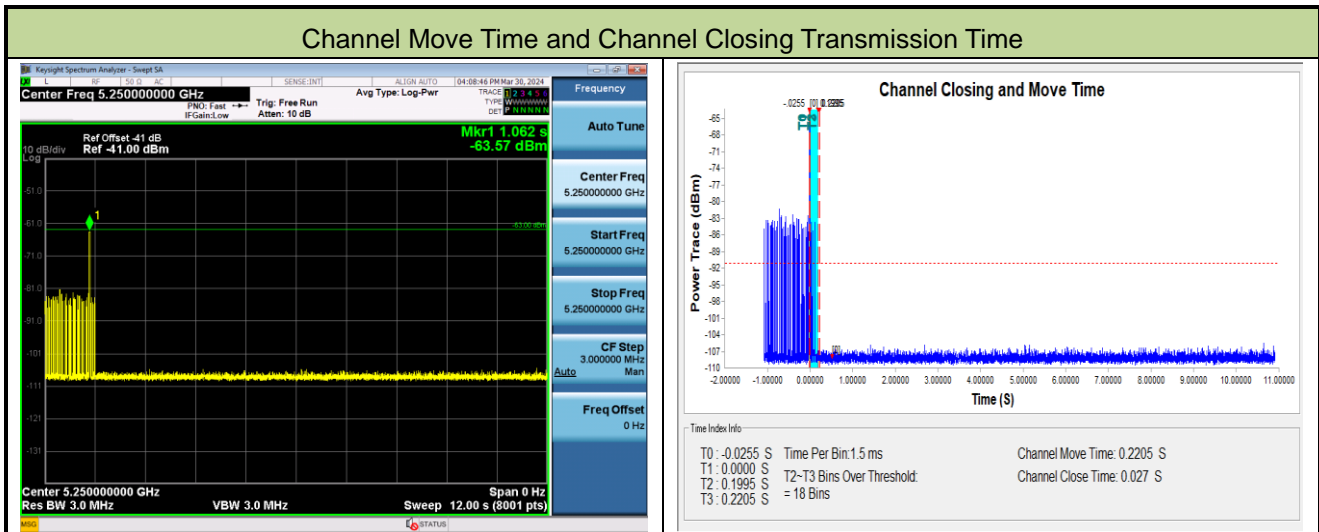

Parameter	Test Result	Limit
Channel Move Time (s)	0.2205s	<10s
Channel Closing Transmission Time (ms) (Note)	27.0 ms	< 60ms
Non-Occupancy Period (min)	≥ 30min	≥ 30 min

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-03-30 ~ 2024-04-12	Test Mode	Mode 1
Test Item	Channel Move Time and Channel Closing Transmission Time (802.11be-EHT160 mode - 5570MHz)		

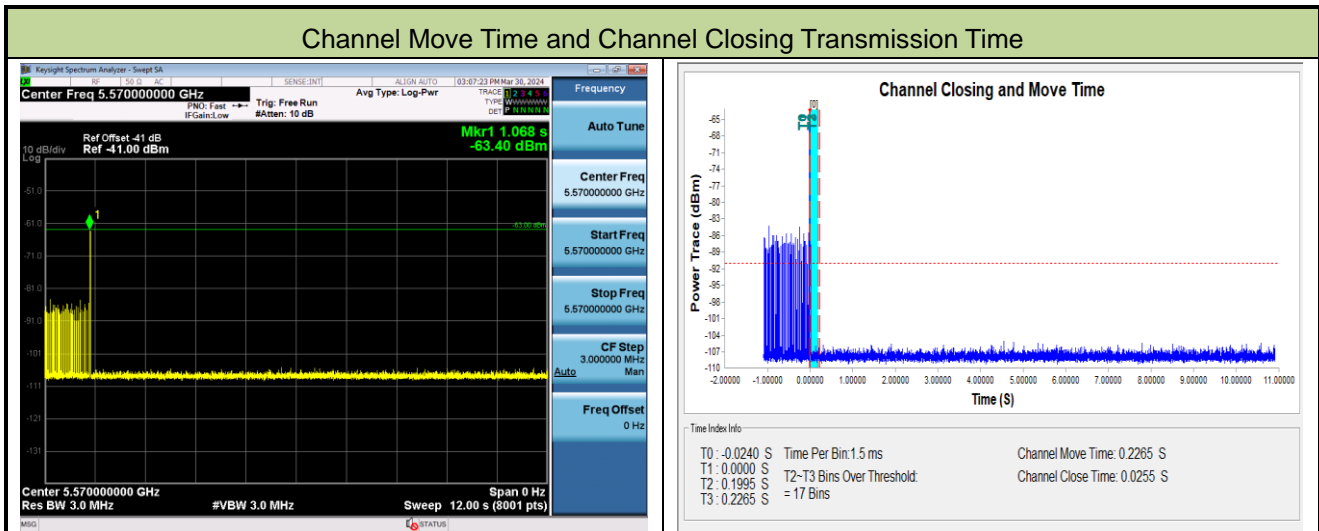


Non-Occupancy Period



Parameter	Test Result	Limit
Channel Move Time (s)	0.2265s	<10s
Channel Closing Transmission Time (ms) (Note)	25.5ms	< 60ms
Non-Occupancy Period (min)	≥ 30min	≥ 30 min

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.


Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-04-21	Test Mode	Mode 2
Test Item	Channel Move Time and Channel Closing Transmission Time (802.11be-EHT160 mode - 5250MHz)		

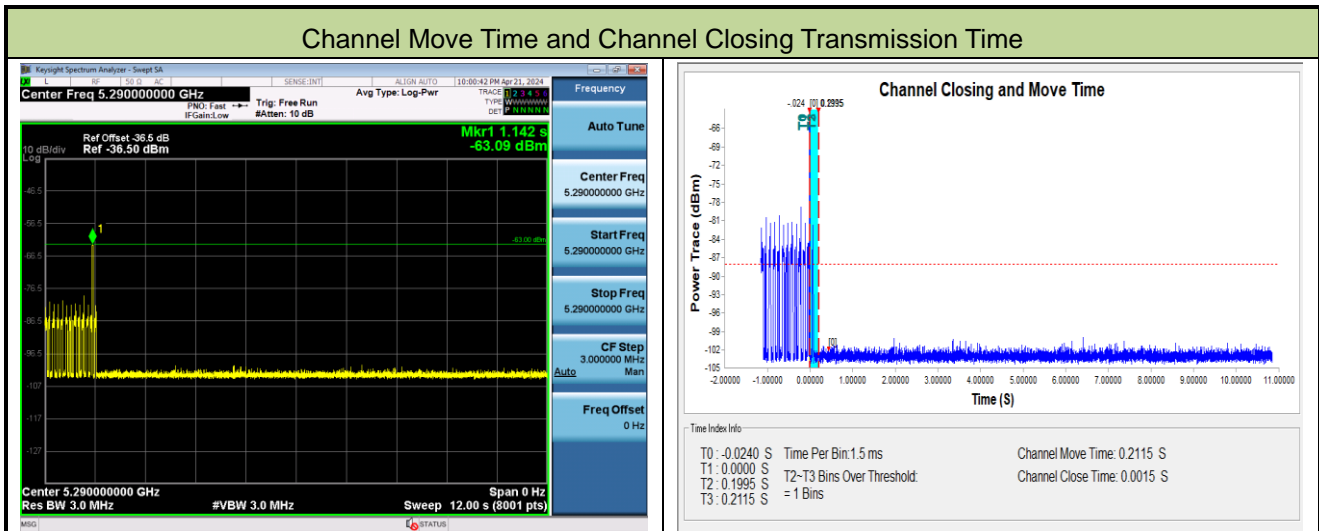

Parameter	Test Result	Limit
Channel Move Time (s)	0.2115s	<10s
Channel Closing Transmission Time (ms) (Note)	1.5 ms	< 60ms
Non-Occupancy Period (min)	≥ 30min	≥ 30 min

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-04-21	Test Mode	Mode 2
Test Item	Channel Move Time and Channel Closing Transmission Time (802.11be-EHT160 mode - 5570MHz)		

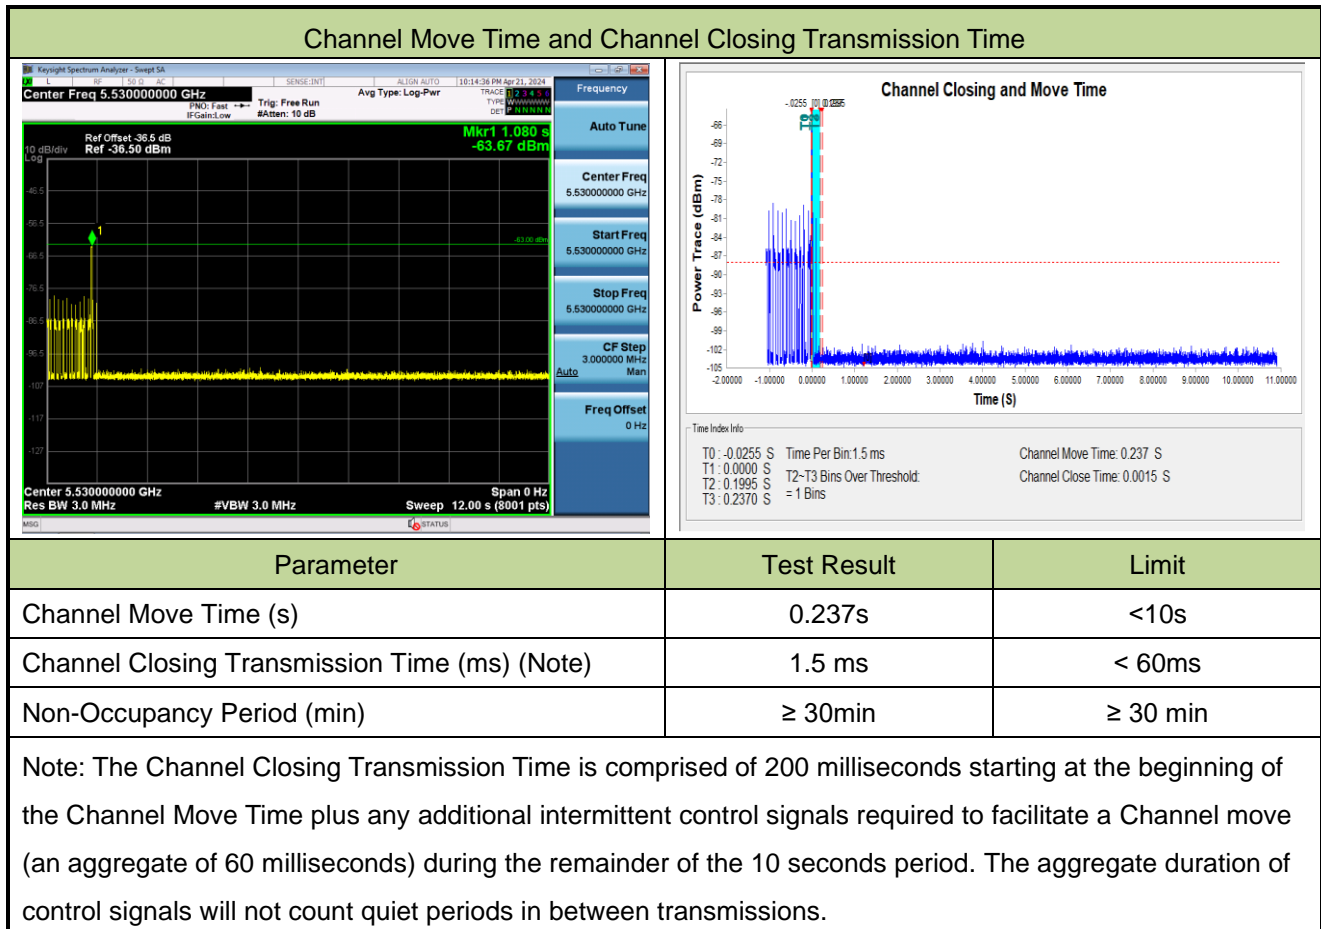

A.8 Statistical Performance Check

Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-04-02		
Test Item	Radar Statistical Performance Check (802.11be-EHT20 – 5500MHz)		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5500	1	5492	1	5500	1	5493	1
1	5505	1	5494	1	5510	1	5491	1
2	5506	1	5505	1	5497	0	5508	1
3	5502	1	5507	1	5491	1	5492	1
4	5493	1	5496	1	5495	1	5504	1
5	5507	1	5503	1	5504	1	5502	0
6	5492	1	5491	1	5503	1	5497	0
7	5495	1	5500	1	5508	0	5499	1
8	5503	1	5506	1	5501	1	5495	0
9	5498	1	5497	1	5505	1	5509	1
10	5501	1	5498	1	5494	0	5500	1
11	5497	1	5499	1	5506	1	5494	0
12	5509	1	5502	1	5507	1	5496	1
13	5494	1	5493	1	5492	1	5503	0
14	5491	1	5509	1	5498	1	5501	1
15	5510	1	5510	1	5499	0	5510	1
16	5499	1	5504	0	5493	1	5505	1
17	5504	1	5508	1	5509	1	5507	1
18	5508	1	5495	1	5496	0	5506	1
19	5496	1	5501	1	5502	1	5498	1
20	5490	1	5498	1	5491	1	5490	0
21	5509	1	5501	1	5496	1	5497	1
22	5500	1	5499	1	5496	1	5496	1
23	5491	1	5506	1	5510	1	5495	1
24	5506	1	5494	1	5495	1	5492	1
25	5494	1	5495	1	5496	1	5494	1
26	5506	1	5499	1	5492	1	5497	1
27	5495	1	5494	1	5490	0	5503	1



Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
28	5496	1	28	5504	28	5504	5500	0
29	5490	1	29	5490	29	5490	5490	0
Probability:	100.0%		93.3%		76.7%		73.3%	
Aggregate:	85.8% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	758.0	70	53060.0	Download	0	Type 2	4.9	201.0	29	5829.0
Download	1	Type 1	1.0	878.0	61	53558.0	Download	1	Type 2	3.9	162.0	28	4536.0
Download	2	Type 1	1.0	518.0	102	52836.0	Download	2	Type 2	2.5	206.0	25	5150.0
Download	3	Type 1	1.0	698.0	76	53048.0	Download	3	Type 2	1.7	170.0	24	4080.0
Download	4	Type 1	1.0	3066.0	18	55188.0	Download	4	Type 2	4.6	230.0	29	6670.0
Download	5	Type 1	1.0	778.0	68	52904.0	Download	5	Type 2	4.2	179.0	28	5012.0
Download	6	Type 1	1.0	678.0	78	52884.0	Download	6	Type 2	4.7	224.0	29	6496.0
Download	7	Type 1	1.0	858.0	62	53196.0	Download	7	Type 2	1.1	171.0	23	3933.0
Download	8	Type 1	1.0	598.0	89	53222.0	Download	8	Type 2	1.0	156.0	23	3588.0
Download	9	Type 1	1.0	798.0	67	53466.0	Download	9	Type 2	2.3	200.0	25	5000.0
Download	10	Type 1	1.0	658.0	81	53298.0	Download	10	Type 2	2.8	174.0	26	4524.0
Download	11	Type 1	1.0	718.0	74	53132.0	Download	11	Type 2	3.7	222.0	27	5994.0
Download	12	Type 1	1.0	838.0	63	52794.0	Download	12	Type 2	4.0	169.0	28	4732.0
Download	13	Type 1	1.0	918.0	58	53244.0	Download	13	Type 2	3.2	197.0	26	5122.0
Download	14	Type 1	1.0	818.0	65	53170.0	Download	14	Type 2	1.2	194.0	23	4462.0
Download	15	Type 1	1.0	2210.0	24	53040.0	Download	15	Type 2	4.6	151.0	29	4379.0
Download	16	Type 1	1.0	1977.0	27	53379.0	Download	16	Type 2	1.9	166.0	24	3984.0
Download	17	Type 1	1.0	651.0	82	53382.0	Download	17	Type 2	4.5	202.0	29	5858.0
Download	18	Type 1	1.0	1847.0	29	53563.0	Download	18	Type 2	1.3	191.0	23	4393.0
Download	19	Type 1	1.0	2097.0	26	54522.0	Download	19	Type 2	4.5	150.0	28	4200.0
Download	20	Type 1	1.0	3062.0	18	55116.0	Download	20	Type 2	3.9	213.0	27	5751.0
Download	21	Type 1	1.0	561.0	95	53295.0	Download	21	Type 2	3.8	210.0	27	5670.0
Download	22	Type 1	1.0	1207.0	44	53108.0	Download	22	Type 2	4.3	176.0	28	4928.0
Download	23	Type 1	1.0	1678.0	32	53696.0	Download	23	Type 2	1.0	218.0	23	5014.0
Download	24	Type 1	1.0	1996.0	27	53892.0	Download	24	Type 2	3.0	189.0	26	4914.0
Download	25	Type 1	1.0	2148.0	25	53700.0	Download	25	Type 2	1.9	163.0	24	3912.0
Download	26	Type 1	1.0	1720.0	31	53320.0	Download	26	Type 2	3.0	209.0	26	5434.0
Download	27	Type 1	1.0	902.0	59	53218.0	Download	27	Type 2	2.7	177.0	25	4425.0
Download	28	Type 1	1.0	2185.0	25	54125.0	Download	28	Type 2	2.1	225.0	24	5400.0
Download	29	Type 1	1.0	2580.0	21	54180.0	Download	29	Type 2	4.9	158.0	29	4582.0



Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	9.9	423.0	18	7614.0	Download	0	Type 4	19.7	423.0	16	6768.0
Download	1	Type 3	8.9	230.0	18	4140.0	Download	1	Type 4	17.6	230.0	15	3450.0
Download	2	Type 3	7.5	342.0	17	5814.0	Download	2	Type 4	14.4	342.0	13	4446.0
Download	3	Type 3	6.7	478.0	16	7648.0	Download	3	Type 4	12.6	478.0	12	5736.0
Download	4	Type 3	9.8	382.0	18	6876.0	Download	4	Type 4	19.6	382.0	16	6112.0
Download	5	Type 3	9.2	336.0	18	6048.0	Download	5	Type 4	18.1	336.0	15	5040.0
Download	6	Type 3	9.7	225.0	18	4050.0	Download	6	Type 4	19.4	225.0	16	3600.0
Download	7	Type 3	6.1	277.0	16	4432.0	Download	7	Type 4	11.2	277.0	12	3324.0
Download	8	Type 3	6.0	361.0	16	5776.0	Download	8	Type 4	11.2	361.0	12	4332.0
Download	9	Type 3	7.3	496.0	17	8432.0	Download	9	Type 4	14.0	496.0	13	6448.0
Download	10	Type 3	7.8	399.0	17	6783.0	Download	10	Type 4	15.1	399.0	14	5598.0
Download	11	Type 3	8.7	499.0	18	8982.0	Download	11	Type 4	17.1	499.0	15	7485.0
Download	12	Type 3	9.0	268.0	18	4824.0	Download	12	Type 4	17.7	268.0	15	4020.0
Download	13	Type 3	8.2	250.0	17	4250.0	Download	13	Type 4	16.0	250.0	14	3500.0
Download	14	Type 3	6.2	393.0	16	6288.0	Download	14	Type 4	11.4	393.0	12	4716.0
Download	15	Type 3	9.6	420.0	18	7660.0	Download	15	Type 4	19.0	420.0	16	6720.0
Download	16	Type 3	6.9	260.0	16	4160.0	Download	16	Type 4	13.1	260.0	13	3380.0
Download	17	Type 3	9.5	454.0	18	8172.0	Download	17	Type 4	18.8	454.0	16	7264.0
Download	18	Type 3	6.3	213.0	16	3408.0	Download	18	Type 4	11.8	213.0	12	2556.0
Download	19	Type 3	9.5	231.0	18	4158.0	Download	19	Type 4	18.7	231.0	16	3696.0
Download	20	Type 3	8.9	434.0	18	7812.0	Download	20	Type 4	17.4	434.0	15	6510.0
Download	21	Type 3	8.8	410.0	18	7380.0	Download	21	Type 4	17.2	410.0	15	6150.0
Download	22	Type 3	9.3	461.0	18	8298.0	Download	22	Type 4	18.5	461.0	16	7376.0
Download	23	Type 3	6.0	294.0	16	4704.0	Download	23	Type 4	11.0	294.0	12	3528.0
Download	24	Type 3	8.0	344.0	17	5848.0	Download	24	Type 4	15.5	344.0	14	4816.0
Download	25	Type 3	6.9	298.0	16	4768.0	Download	25	Type 4	13.2	298.0	13	3874.0
Download	26	Type 3	8.0	236.0	17	4012.0	Download	26	Type 4	15.4	236.0	14	3304.0
Download	27	Type 3	7.7	464.0	17	7888.0	Download	27	Type 4	14.8	464.0	14	6496.0
Download	28	Type 3	7.1	486.0	16	7776.0	Download	28	Type 4	13.5	486.0	13	6318.0
Download	29	Type 3	9.9	467.0	18	8406.0	Download	29	Type 4	19.6	467.0	16	7472.0

Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5500	1	15	5497.6	1
1	5500	1	16	5493.2	0
2	5500	1	17	5497.2	1
3	5500	1	18	5492.4	0
4	5500	1	19	5497.2	1
5	5500	1	20	5503.6	1
6	5500	1	21	5503.6	1
7	5500	1	22	5502.8	1
8	5500	1	23	5508	0
9	5500	1	24	5505.2	1
10	5494.8	1	25	5506.8	0
11	5496	1	26	5505.2	1
12	5496.4	1	27	5505.6	0
13	5495.2	1	28	5506.4	1
14	5492	0	29	5502	1
Detection Percentage (%)			80.0%		

Type 5 Radar Waveform_0

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
119731.0	98.0	20	3	1963.0	1966.0	1446.0
264169.0	86.6	20	3	1176.0	1830.0	1866.0
409973.0	69.2	20	2	1329.0	1407.0	-
556266.0	59.0	20	1	1188.0	-	-
102036.0	97.4	20	3	1579.0	1591.0	1800.0
246468.0	89.6	20	3	1600.0	1939.0	1144.0
391490.0	96.3	20	3	1010.0	1542.0	1159.0
538158.0	51.2	20	1	1431.0	-	-
84792.0	51.1	20	1	1211.0	-	-
229140.0	67.0	20	2	1784.0	1712.0	-
374167.0	72.9	20	2	1017.0	1910.0	-
517472.0	83.7	20	3	1872.0	1564.0	1222.0
66568.0	87.1	20	3	1480.0	1134.0	1605.0
211509.0	77.7	20	2	1440.0	1522.0	-
357139.0	52.7	20	1	1571.0	-	-
499931.0	94.2	20	3	1500.0	1735.0	1131.0
49000.0	61.6	20	1	1399.0	-	-
193070.0	92.9	20	3	1359.0	1981.0	1479.0
339129.0	54.8	20	1	1805.0	-	-
481765.0	92.7	20	3	1133.0	1948.0	1744.0

Type 5 Radar Waveform_1

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
36499.0	85.5	16	3	1012.0	1060.0	1688.0
206464.0	84.5	16	3	2000.0	1634.0	1218.0
376721.0	91.4	16	3	1350.0	1886.0	1179.0
549116.0	50.3	16	1	1507.0	-	-
15541.0	75.0	16	2	1429.0	1521.0	-
186286.0	62.1	16	1	1960.0	-	-
356782.0	74.6	16	2	1302.0	1107.0	-
526757.0	71.2	16	2	1736.0	1526.0	-
698829.0	64.1	16	1	1585.0	-	-
164792.0	97.8	16	3	1392.0	1322.0	1229.0
336391.0	64.6	16	1	1100.0	-	-
505485.0	92.1	16	3	1457.0	1013.0	1183.0
674962.0	92.7	16	3	1433.0	1205.0	1884.0
144106.0	83.3	16	2	1232.0	1324.0	-
315307.0	64.5	16	1	1166.0	-	-
485744.0	54.5	16	1	1860.0	-	-
653302.0	87.0	16	3	1757.0	1789.0	1734.0

Type 5 Radar Waveform_2

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
174511.0	74.1	11	2	1502.0	1387.0	-
417026.0	65.7	11	1	1252.0	-	-
659307.0	64.7	11	1	1172.0	-	-
898331.0	93.5	11	3	1940.0	1321.0	1481.0
144895.0	56.5	11	1	1704.0	-	-
385752.0	92.2	11	3	1654.0	1932.0	1372.0
629041.0	63.9	11	1	1848.0	-	-
870268.0	80.6	11	2	1279.0	1550.0	-
114867.0	73.6	11	2	1809.0	1675.0	-
357161.0	61.2	11	1	1785.0	-	-
597069.0	89.9	11	3	1962.0	1484.0	1988.0
840067.0	93.7	11	3	1021.0	1288.0	1008.0

Type 5 Radar Waveform_3

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
102165.0	98.6	7	3	1398.0	1002.0	1200.0
392433.0	71.7	7	2	1930.0	1358.0	-
683775.0	57.1	7	1	1355.0	-	-
972089.0	87.2	7	3	1573.0	1277.0	1451.0
66411.0	85.9	7	3	1140.0	1150.0	1544.0
356018.0	96.9	7	3	1781.0	1978.0	1756.0
647707.0	63.4	7	1	1835.0	-	-
936589.0	95.2	7	3	1036.0	1955.0	1029.0
30684.0	68.8	7	2	1770.0	1746.0	-
320556.0	84.1	7	3	1328.0	1797.0	1558.0

Type 5 Radar Waveform_4

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
304446.0	85.2	20	3	1352.0	1497.0	1027.0
450484.0	64.9	20	1	1938.0	-	-
594296.0	75.1	20	2	1374.0	1806.0	-
141746.0	87.2	20	3	1599.0	1778.0	1807.0
287956.0	53.4	20	1	1132.0	-	-
433258.0	52.3	20	1	1052.0	-	-
576867.0	80.8	20	2	1097.0	1669.0	-
124185.0	91.0	20	3	1494.0	1181.0	1508.0
269934.0	53.7	20	1	1424.0	-	-
414875.0	63.2	20	1	1759.0	-	-
557133.0	98.2	20	3	1254.0	1565.0	1968.0
106910.0	57.1	20	1	1247.0	-	-
250503.0	87.6	20	3	1901.0	1590.0	1611.0
396824.0	77.1	20	2	1025.0	1003.0	-
540002.0	90.1	20	3	1015.0	1256.0	1798.0
88633.0	99.2	20	3	1099.0	1645.0	1123.0
233349.0	79.0	20	2	1861.0	1660.0	-
377329.0	92.4	20	3	1425.0	1967.0	1210.0
522607.0	77.4	20	2	1979.0	1624.0	-
70930.0	69.8	20	2	1783.0	1192.0	-

Type 5 Radar Waveform_5

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
240456.0	51.3	17	1	1204.0	-	-
401761.0	50.9	17	1	1354.0	-	-
560097.0	84.8	17	3	1221.0	1836.0	1869.0
59054.0	77.5	17	2	1050.0	1577.0	-
220563.0	65.5	17	1	1243.0	-	-
380691.0	76.0	17	2	1464.0	1972.0	-
543430.0	57.5	17	1	1127.0	-	-
39259.0	54.8	17	1	1907.0	-	-
200678.0	56.7	17	1	1262.0	-	-
360252.0	86.5	17	3	1420.0	1782.0	1382.0
523619.0	51.0	17	1	1037.0	-	-
19401.0	59.4	17	1	1843.0	-	-
180337.0	68.2	17	2	1459.0	1506.0	-
340482.0	90.1	17	3	1024.0	1655.0	1888.0
502163.0	80.5	17	2	1776.0	1336.0	-
661958.0	99.9	17	3	1331.0	1885.0	1035.0
160553.0	68.4	17	2	1296.0	1489.0	-
321541.0	69.4	17	2	1643.0	1191.0	-

Type 5 Radar Waveform_6

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
432891.0	88.7	19	3	1389.0	1681.0	1402.0
580050.0	61.5	19	1	1661.0	-	-
126131.0	99.8	19	3	1891.0	1533.0	1520.0
271334.0	82.6	19	2	1958.0	1043.0	-
417206.0	57.4	19	1	1450.0	-	-
561062.0	76.6	19	2	1495.0	1351.0	-
108389.0	95.6	19	3	1747.0	1679.0	1330.0
253026.0	91.4	19	3	1821.0	1201.0	1093.0
397489.0	84.2	19	3	1716.0	1118.0	1368.0
543374.0	80.0	19	2	1066.0	1613.0	-
90727.0	97.1	19	3	1682.0	1196.0	1084.0
235076.0	86.7	19	3	1685.0	1775.0	1030.0
379921.0	67.9	19	2	1844.0	1995.0	-
525698.0	71.1	19	2	1072.0	1415.0	-
73117.0	67.7	19	2	1360.0	1000.0	-
216782.0	99.0	19	3	1877.0	1996.0	1999.0
362403.0	82.7	19	2	1818.0	1541.0	-
506257.0	84.3	19	3	1390.0	1291.0	1678.0
55207.0	80.1	19	2	1551.0	1412.0	-
199217.0	97.6	19	3	1824.0	1992.0	1504.0

Type 5 Radar Waveform_7

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
864100.0	71.6	5	2	1816.0	1986.0	-
1227234.0	77.4	5	2	1791.0	1695.0	-
93636.0	94.9	5	3	1702.0	1088.0	1266.0
456608.0	75.9	5	2	1608.0	1927.0	-
819138.0	84.3	5	3	1189.0	1640.0	1455.0
1182966.0	67.3	5	2	1827.0	1103.0	-
49016.0	82.1	5	1	1900.0	-	-
411866.0	88.8	5	3	1364.0	1080.0	1223.0

Type 5 Radar Waveform_8

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
774109.0	89.0	5	3	1644.0	1773.0	1535.0
1136887.0	97.6	5	3	1889.0	1616.0	1208.0
4254.0	96.7	5	3	1105.0	1699.0	1823.0
366888.0	90.3	5	3	1854.0	1376.0	1562.0
730471.0	80.7	5	2	1086.0	1764.0	-
1094522.0	59.6	5	1	1557.0	-	-
1457709.0	53.6	5	1	1796.0	-	-
322825.0	65.9	5	1	1983.0	-	-

Type 5 Radar Waveform_9

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
456613.0	70.1	10	2	1826.0	1275.0	-
698284.0	68.7	10	2	1890.0	1366.0	-
938508.0	93.6	10	3	1742.0	1164.0	1959.0
185296.0	58.1	10	1	1788.0	-	-
426850.0	82.0	10	2	1606.0	1452.0	-
668360.0	74.1	10	2	1906.0	1568.0	-
909755.0	91.9	10	3	1175.0	1167.0	1454.0
155344.0	77.5	10	2	1569.0	1058.0	-
397744.0	57.7	10	1	1357.0	-	-
639128.0	70.0	10	2	1517.0	1117.0	-
880976.0	68.5	10	2	1622.0	1063.0	-
125475.0	80.0	10	2	1902.0	1309.0	-

Type 5 Radar Waveform_10

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
338488.0	91.7	12	3	1170.0	1540.0	1588.0
562381.0	69.3	12	2	1278.0	1284.0	-
786190.0	57.3	12	1	1912.0	-	-
88235.0	96.3	12	3	1319.0	1217.0	1472.0
311383.0	69.7	12	2	1858.0	1427.0	-
534473.0	70.9	12	2	1635.0	1629.0	-
756784.0	97.8	12	3	1257.0	1470.0	1476.0
60972.0	61.3	12	1	1085.0	-	-
284097.0	66.7	12	2	1405.0	1255.0	-
506990.0	73.8	12	2	1337.0	1936.0	-
729522.0	98.4	12	3	1139.0	1137.0	1689.0
33311.0	90.1	12	3	1165.0	1233.0	1893.0
256942.0	64.5	12	1	1437.0	-	-

Type 5 Radar Waveform_11

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
390180.0	56.7	15	1	1552.0	-	-
572089.0	52.4	15	1	1045.0	-	-
4754.0	86.7	15	3	1514.0	1935.0	1536.0
185629.0	83.4	15	3	1503.0	1016.0	1724.0
367839.0	56.8	15	1	1515.0	-	-
549326.0	55.9	15	1	1575.0	-	-
731044.0	58.3	15	1	1369.0	-	-
163652.0	67.4	15	2	1490.0	1373.0	-
345296.0	51.8	15	1	1911.0	-	-
525858.0	78.8	15	2	1287.0	1864.0	-
708240.0	63.9	15	1	1833.0	-	-
141010.0	90.7	15	3	1845.0	1347.0	1370.0
322730.0	71.9	15	2	1039.0	1375.0	-
504418.0	65.5	15	1	1857.0	-	-
683529.0	97.5	15	3	1235.0	1298.0	1874.0
118695.0	85.6	15	3	1299.0	1631.0	1919.0

Type 5 Radar Waveform_12

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
282219.0	67.4	16	2	1985.0	1549.0	-
453065.0	68.2	16	2	1074.0	1677.0	-
625082.0	64.2	16	1	1076.0	-	-
90705.0	98.9	16	3	1436.0	1612.0	1953.0
261531.0	82.2	16	2	1674.0	1068.0	-
431381.0	97.2	16	3	1280.0	1102.0	1473.0
601636.0	69.6	16	2	1970.0	1896.0	-
69878.0	90.2	16	3	1168.0	1120.0	1593.0
240930.0	50.3	16	1	1561.0	-	-
410378.0	70.6	16	2	1914.0	1994.0	-
582773.0	59.8	16	1	1315.0	-	-
49078.0	61.8	16	1	1421.0	-	-
219026.0	92.4	16	3	1263.0	1294.0	1765.0
389630.0	99.3	16	3	1391.0	1018.0	1096.0
559293.0	96.4	16	3	1501.0	1442.0	1422.0
27963.0	70.4	16	2	1268.0	1908.0	-
198947.0	53.4	16	1	1207.0	-	-

Type 5 Radar Waveform_13

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
417587.0	93.7	13	3	1156.0	1698.0	1524.0
612206.0	75.2	13	2	1128.0	1092.0	-
7899.0	71.7	13	2	1812.0	1766.0	-
201696.0	55.2	13	1	1046.0	-	-
393711.0	94.2	13	3	1345.0	1632.0	1618.0
588606.0	50.9	13	1	1904.0	-	-
782384.0	64.0	13	1	1686.0	-	-
177753.0	60.2	13	1	1383.0	-	-
371521.0	62.5	13	1	1214.0	-	-
563096.0	89.9	13	3	1465.0	1559.0	1236.0
755829.0	90.6	13	3	1419.0	1825.0	1289.0
153256.0	93.5	13	3	1662.0	1518.0	1519.0
347369.0	55.5	13	1	1879.0	-	-
539340.0	97.8	13	3	1527.0	1403.0	1306.0
735037.0	55.3	13	1	1303.0	-	-

Type 5 Radar Waveform_14

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
244057.0	50.2	5	1	1122.0	-	-
606972.0	75.7	5	2	1516.0	1112.0	-
968991.0	99.3	5	3	1709.0	1652.0	1028.0
1334343.0	55.6	5	1	1448.0	-	-
198903.0	84.1	5	3	1320.0	1486.0	1145.0
561815.0	91.3	5	3	1239.0	1041.0	1477.0
925500.0	82.4	5	2	1305.0	1160.0	-
1289276.0	59.6	5	1	1795.0	-	-

Type 5 Radar Waveform_15

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
64809.0	82.9	19	2	1114.0	1731.0	-
216494.0	96.5	19	3	1882.0	1790.0	1496.0
370055.0	83.0	19	2	1109.0	1276.0	-
520952.0	86.3	19	3	1162.0	1367.0	1905.0
45832.0	96.2	19	3	1714.0	1892.0	1887.0
197672.0	96.5	19	3	1693.0	1998.0	1820.0
350513.0	75.1	19	2	1855.0	1865.0	-
504363.0	52.6	19	1	1754.0	-	-
27207.0	82.5	19	2	1739.0	1928.0	-
179366.0	93.5	19	3	1001.0	1396.0	1723.0
331302.0	87.3	19	3	1636.0	1829.0	1115.0
484196.0	78.3	19	2	1534.0	1973.0	-
8444.0	90.4	19	3	1044.0	1228.0	1780.0
160751.0	75.8	19	2	1772.0	1840.0	-
313287.0	80.4	19	2	1673.0	1469.0	-
465931.0	73.2	19	2	1371.0	1463.0	-
618326.0	67.2	19	2	1178.0	1753.0	-
142445.0	50.2	19	1	1603.0	-	-
293757.0	86.6	19	3	1909.0	1019.0	1828.0

Type 5 Radar Waveform_16

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
774120.0	69.6	8	2	1049.0	1353.0	-
1038524.0	57.3	8	1	1975.0	-	-
213590.0	79.1	8	2	1079.0	1408.0	-
476579.0	96.8	8	3	1690.0	1984.0	1065.0
740442.0	94.8	8	3	1341.0	1583.0	1180.0
1004549.0	72.8	8	2	1639.0	1899.0	-
181313.0	54.5	8	1	1053.0	-	-
445645.0	61.6	8	1	1034.0	-	-
709835.0	66.6	8	1	1248.0	-	-
970896.0	100.0	8	3	1547.0	1696.0	1602.0
148241.0	90.8	8	3	1976.0	1449.0	1385.0

Type 5 Radar Waveform_17

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
237829.0	86.4	18	3	1749.0	1292.0	1055.0
391581.0	62.2	18	1	1574.0	-	-
544443.0	61.3	18	1	1498.0	-	-
67170.0	65.6	18	1	1560.0	-	-
218616.0	88.8	18	3	1841.0	1871.0	1722.0
373046.0	58.7	18	1	1091.0	-	-
525558.0	61.1	18	1	1572.0	-	-
48335.0	64.7	18	1	1727.0	-	-
200582.0	67.9	18	2	1787.0	1546.0	-
354115.0	63.7	18	1	1261.0	-	-
504203.0	87.4	18	3	1761.0	1151.0	1810.0
29370.0	87.2	18	3	1491.0	1989.0	1434.0
182200.0	58.1	18	1	1997.0	-	-
333080.0	100.0	18	3	1719.0	1733.0	1954.0
486715.0	68.3	18	2	1898.0	1225.0	-
10690.0	69.5	18	2	1022.0	1430.0	-
163453.0	65.0	18	1	1760.0	-	-
315836.0	74.4	18	2	1343.0	1149.0	-
467440.0	95.4	18	3	1242.0	1237.0	1316.0

Type 5 Radar Waveform_18

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1313269.0	76.1	6	2	1363.0	1563.0	-
305112.0	88.4	6	3	1934.0	1071.0	1726.0
627565.0	83.8	6	3	1051.0	1610.0	1594.0
951740.0	52.7	6	1	1692.0	-	-
1274732.0	62.7	6	1	1664.0	-	-
266146.0	52.3	6	1	1101.0	-	-
589055.0	53.8	6	1	1553.0	-	-
910246.0	99.7	6	3	1259.0	1311.0	1623.0
1231717.0	88.2	6	3	1832.0	1523.0	1794.0

Type 5 Radar Waveform_19

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
107025.0	63.4	18	1	1650.0	-	-
259031.0	91.7	18	3	1184.0	1307.0	1032.0
410067.0	84.9	18	3	1811.0	1862.0	1814.0
565094.0	58.5	18	1	1944.0	-	-
88164.0	52.7	18	1	1957.0	-	-
240165.0	91.8	18	3	1073.0	1332.0	1386.0
394046.0	57.1	18	1	1195.0	-	-
545277.0	75.0	18	2	1478.0	1627.0	-
69237.0	66.9	18	2	1314.0	1705.0	-
221683.0	74.7	18	2	1273.0	1745.0	-
373360.0	87.1	18	3	1169.0	1867.0	1274.0
526079.0	71.6	18	2	1977.0	1633.0	-
50573.0	62.0	18	1	1601.0	-	-
203466.0	52.5	18	1	1282.0	-	-
355400.0	82.4	18	2	1203.0	1729.0	-
507833.0	74.8	18	2	1903.0	1070.0	-
31671.0	82.3	18	2	1720.0	1505.0	-
184132.0	70.1	18	2	1982.0	1020.0	-
336400.0	71.0	18	2	1621.0	1721.0	-

Type 5 Radar Waveform_20

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
545420.0	96.9	16	3	1743.0	1683.0	1401.0
14428.0	76.4	16	2	1089.0	1993.0	-
185318.0	53.2	16	1	1413.0	-	-
354802.0	89.5	16	3	1313.0	1406.0	1409.0
525069.0	87.2	16	3	1014.0	1148.0	1873.0
696299.0	71.2	16	2	1638.0	1378.0	-
164056.0	73.8	16	2	1227.0	1116.0	-
335257.0	52.3	16	1	1143.0	-	-
505785.0	52.5	16	1	1691.0	-	-
676711.0	59.5	16	1	1548.0	-	-
142519.0	98.7	16	3	1061.0	1974.0	1863.0
313991.0	63.3	16	1	1620.0	-	-
483059.0	85.0	16	3	1943.0	1194.0	1007.0
655403.0	59.0	16	1	1834.0	-	-
121992.0	73.0	16	2	1141.0	1365.0	-
292855.0	51.2	16	1	1851.0	-	-
462594.0	76.2	16	2	1418.0	1969.0	-

Type 5 Radar Waveform_21

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
673048.0	78.9	16	2	1580.0	1445.0	-
107162.0	78.9	16	2	1694.0	1859.0	-
287861.0	84.5	16	3	1799.0	1212.0	1417.0
470617.0	66.3	16	1	1356.0	-	-
649797.0	92.8	16	3	1108.0	1710.0	1281.0
84734.0	93.4	16	3	1578.0	1177.0	1926.0
266696.0	52.6	16	1	1317.0	-	-
445719.0	90.4	16	3	1755.0	1875.0	1956.0
627347.0	87.4	16	3	1529.0	1728.0	1040.0
62584.0	73.8	16	2	1587.0	1711.0	-
244372.0	64.0	16	1	1186.0	-	-
424402.0	85.9	16	3	1253.0	1173.0	1539.0
606991.0	51.4	16	1	1929.0	-	-
40318.0	77.9	16	2	1327.0	1209.0	-
221411.0	80.4	16	2	1649.0	1530.0	-
402927.0	82.2	16	2	1312.0	1147.0	-

Type 5 Radar Waveform_22

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
518610.0	82.9	18	2	1658.0	1174.0	-
15997.0	52.8	18	1	1946.0	-	-
177294.0	61.8	18	1	1641.0	-	-
338669.0	60.2	18	1	1474.0	-	-
499993.0	52.1	18	1	1482.0	-	-
658390.0	97.8	18	3	1671.0	1499.0	1260.0
156584.0	87.3	18	3	1741.0	1713.0	1748.0
317663.0	78.9	18	2	1850.0	1990.0	-
477438.0	89.4	18	3	1980.0	1804.0	1416.0
641483.0	54.6	18	1	1447.0	-	-
137558.0	65.5	18	1	1651.0	-	-
298354.0	68.3	18	2	1362.0	1381.0	-
460500.0	61.4	18	1	1119.0	-	-
621268.0	52.0	18	1	1813.0	-	-
117739.0	62.5	18	1	1380.0	-	-
277542.0	89.1	18	3	1625.0	1918.0	1531.0
440571.0	51.2	18	1	1190.0	-	-
601873.0	56.1	18	1	1297.0	-	-

Type 5 Radar Waveform_23

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
219944.0	96.0	5	3	1945.0	1656.0	1199.0
583898.0	53.4	5	1	1410.0	-	-
945702.0	85.6	5	3	1706.0	1006.0	1310.0
1310955.0	54.6	5	1	1241.0	-	-
175671.0	54.0	5	1	1423.0	-	-
538736.0	83.1	5	2	1067.0	1432.0	-
902273.0	50.5	5	1	1925.0	-	-
1263722.0	99.2	5	3	1234.0	1913.0	1005.0

Type 5 Radar Waveform_24

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
74492.0	99.8	12	3	1793.0	1224.0	1334.0
281307.0	97.5	12	3	1510.0	1595.0	1290.0
490041.0	59.7	12	1	1048.0	-	-
697608.0	66.5	12	1	1125.0	-	-
49175.0	51.0	12	1	1589.0	-	-
256372.0	81.6	12	2	1231.0	1361.0	-
463699.0	68.2	12	2	1325.0	1136.0	-
670218.0	81.1	12	2	1703.0	1737.0	-
23630.0	52.1	12	1	1062.0	-	-
231207.0	56.2	12	1	1245.0	-	-
438870.0	61.1	12	1	1087.0	-	-
643070.0	91.0	12	3	1861.0	1819.0	1917.0
852389.0	74.0	12	2	1467.0	1346.0	-
205167.0	81.2	12	2	1488.0	1718.0	-

Type 5 Radar Waveform_25

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
524385.0	91.6	8	3	1842.0	1570.0	1344.0
790248.0	55.5	8	1	1397.0	-	-
1053580.0	77.0	8	2	1226.0	1111.0	-
228723.0	88.2	8	3	1121.0	1163.0	1461.0
492526.0	77.8	8	2	1509.0	1947.0	-
755873.0	84.4	8	3	1270.0	1659.0	1094.0
1020050.0	78.9	8	2	1598.0	1815.0	-
196108.0	85.3	8	3	1556.0	1304.0	1646.0
460891.0	61.2	8	1	1443.0	-	-
723918.0	75.0	8	2	1525.0	1725.0	-
987749.0	84.6	8	3	1142.0	1011.0	1054.0

Type 5 Radar Waveform_26

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
128418.0	95.3	12	3	1554.0	1931.0	1154.0
336109.0	82.0	12	2	1023.0	1246.0	-
543389.0	77.0	12	2	1082.0	1272.0	-
748673.0	96.6	12	3	1411.0	1581.0	1672.0
103120.0	78.2	12	2	1596.0	1642.0	-
309609.0	98.9	12	3	1283.0	1779.0	1853.0
517234.0	78.7	12	2	1708.0	1667.0	-
725793.0	59.6	12	1	1615.0	-	-
77727.0	53.0	12	1	1949.0	-	-
284308.0	98.0	12	3	2000.0	1219.0	1220.0
491651.0	89.9	12	3	1250.0	1057.0	1202.0
699115.0	69.1	12	2	1251.0	1732.0	-
52124.0	72.9	12	2	1069.0	1771.0	-
259700.0	53.5	12	1	1586.0	-	-

Type 5 Radar Waveform_27

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
502040.0	83.9	11	3	1475.0	1161.0	1083.0
726987.0	50.0	11	1	1216.0	-	-
28650.0	80.3	11	2	1249.0	1763.0	-
251664.0	99.9	11	3	1126.0	1338.0	1026.0
475536.0	56.3	11	1	1856.0	-	-
698421.0	77.9	11	2	1444.0	1124.0	-
1165.0	60.3	11	1	1883.0	-	-
224344.0	82.1	11	2	1607.0	1258.0	-
448247.0	64.8	11	1	1379.0	-	-
671345.0	61.8	11	1	1987.0	-	-
894147.0	80.1	11	2	1004.0	1592.0	-
196950.0	77.6	11	2	1153.0	1264.0	-
420503.0	65.9	11	1	1838.0	-	-

Type 5 Radar Waveform_28

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
761350.0	55.3	9	1	1687.0	-	-
1025428.0	66.2	9	1	1786.0	-	-
200274.0	70.2	9	2	1668.0	1078.0	-
464738.0	64.4	9	1	1456.0	-	-
727237.0	86.3	9	3	1158.0	1817.0	1064.0
989851.0	84.8	9	3	1483.0	1717.0	1921.0
167690.0	81.9	9	2	1566.0	1670.0	-
432318.0	55.7	9	1	1138.0	-	-
694117.0	99.7	9	3	1701.0	1394.0	1961.0
957887.0	91.2	9	3	1730.0	1104.0	1750.0
135054.0	84.5	9	3	1244.0	1878.0	1267.0

Type 5 Radar Waveform_29

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
218974.0	73.9	20	2	1628.0	1438.0	-
364862.0	57.3	20	1	1240.0	-	-
508325.0	82.5	20	2	1916.0	1384.0	-
56320.0	81.4	20	2	1609.0	1942.0	-
201075.0	71.0	20	2	1768.0	1492.0	-
346250.0	83.2	20	2	1182.0	1308.0	-
491858.0	51.6	20	1	1647.0	-	-
38376.0	86.5	20	3	1933.0	1676.0	1880.0
183732.0	54.0	20	1	1684.0	-	-
327478.0	84.6	20	3	1238.0	1528.0	1400.0
472174.0	93.9	20	3	1047.0	1081.0	1802.0
20686.0	84.3	20	3	1130.0	1271.0	1059.0
164813.0	98.6	20	3	1657.0	1922.0	1876.0
309423.0	85.5	20	3	1897.0	1752.0	1009.0
455897.0	54.8	20	1	1923.0	-	-
2856.0	97.1	20	3	1441.0	1895.0	1941.0
147627.0	74.3	20	2	1187.0	1937.0	-
293018.0	63.2	20	1	1839.0	-	-
437310.0	67.1	20	2	1471.0	1435.0	-
583758.0	65.1	20	1	1230.0	-	-

Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	1	15	1
1	1	16	1
2	1	17	1
3	1	18	1
4	1	19	1
5	1	20	1
6	1	21	1
7	1	22	0
8	1	23	1
9	1	24	1
10	1	25	1
11	1	26	1
12	1	27	1
13	1	28	1
14	1	29	1
Detection Percentage (%)		96.7%	

Type 6 Radar Waveform_0

Frequency List (MHz)	0	1	2	3	4
0	5453	5562	5445	5722	5679
5	5666	5431	5519	5349	5593
10	5598	5373	5367	5506	5556
15	5478	5655	5265	5285	5532
20	5631	5534	5699	5334	5380
25	5669	5384	5597	5377	5451
30	5281	5369	5667	5643	5563
35	5279	5430	5344	5361	5474
40	5356	5483	5657	5675	5537
45	5697	5632	5311	5715	5326
50	5627	5489	5644	5685	5689
55	5260	5559	5720	5576	5528
60	5449	5340	5572	5646	5271
65	5405	5525	5398	5292	5481
70	5568	5574	5633	5721	5461
75	5680	5467	5428	5484	5615
80	5700	5651	5640	5488	5345
85	5446	5498	5660	5318	5490
90	5502	5703	5706	5702	5371
95	5288	5305	5273	5493	5606

Type 6 Radar Waveform_1

Frequency List (MHz)	0	1	2	3	4
0	5611	5326	5381	5408	5424
5	5708	5356	5594	5512	5325
10	5529	5637	5701	5577	5469
15	5307	5271	5330	5724	5542
20	5603	5640	5423	5353	5557
25	5711	5481	5388	5420	5258
30	5624	5383	5308	5321	5521
35	5615	5292	5566	5595	5440
40	5534	5626	5612	5394	5439
45	5293	5688	5406	5665	5411
50	5305	5402	5689	5722	5378
55	5460	5374	5252	5360	5372
60	5265	5541	5398	5511	5586
65	5597	5384	5295	5544	5656
70	5446	5278	5389	5442	5457
75	5684	5648	5300	5697	5363
80	5466	5273	5614	5357	5654
85	5593	5644	5601	5694	5578
90	5291	5507	5687	5329	5685
95	5696	5366	5700	5583	5283

Type 6 Radar Waveform_2

Frequency List (MHz)	0	1	2	3	4
0	5391	5565	5317	5569	5266
5	5275	5378	5669	5675	5629
10	5363	5426	5449	5421	5598
15	5557	5434	5374	5375	5441
20	5550	5294	5581	5512	5326
25	5348	5660	5528	5682	5422
30	5462	5622	5501	5460	5678
35	5612	5508	5289	5302	5606
40	5649	5533	5583	5531	5458
45	5495	5477	5497	5346	5478
50	5282	5366	5608	5444	5709
55	5627	5590	5643	5437	5575
60	5334	5503	5417	5466	5667
65	5673	5686	5267	5347	5547
70	5688	5433	5389	5291	5370
75	5395	5654	5520	5615	5415
80	5398	5435	5423	5687	5465
85	5715	5694	5655	5369	5577
90	5452	5522	5493	5367	5607
95	5631	5400	5524	5671	5702

Type 6 Radar Waveform_3

Frequency List (MHz)	0	1	2	3	4
0	5646	5329	5253	5255	5486
5	5317	5303	5269	5363	5361
10	5294	5690	5490	5519	5619
15	5645	5561	5477	5420	5633
20	5558	5504	5299	5711	5512
25	5634	5311	5456	5608	5538
30	5716	5709	5401	5599	5325
35	5304	5442	5313	5445	5257
40	5471	5348	5625	5387	5475
45	5560	5555	5399	5365	5542
50	5659	5533	5532	5571	5681
55	5597	5627	5394	5305	5632
60	5582	5508	5499	5596	5565
65	5296	5583	5423	5703	5667
70	5356	5398	5406	5496	5574
75	5287	5421	5578	5404	5700
80	5721	5426	5691	5375	5369
85	5529	5637	5644	5487	5447
90	5614	5662	5376	5613	5665
95	5720	5509	5541	5277	5600

Type 6 Radar Waveform_4

Frequency List (MHz)	0	1	2	3	4
0	5426	5568	5664	5416	5706
5	5456	5325	5344	5526	5700
10	5576	5531	5714	5640	5258
15	5591	5580	5368	5350	5469
20	5529	5560	5593	5272	5599
25	5461	5362	5415	5490	5546
30	5497	5495	5386	5696	5263
35	5575	5595	5702	5284	5437
40	5409	5588	5622	5316	5455
45	5643	5516	5355	5630	5509
50	5718	5710	5418	5394	5454
55	5342	5688	5276	5286	5453
60	5428	5422	5578	5291	5522
65	5255	5498	5470	5532	5439
70	5472	5533	5256	5541	5624
75	5385	5335	5502	5586	5570
80	5371	5600	5361	5387	5619
85	5602	5521	5655	5722	5261
90	5530	5582	5413	5269	5268
95	5336	5397	5377	5626	5356

Type 6 Radar Waveform_5

Frequency List (MHz)	0	1	2	3	4
0	5584	5332	5600	5577	5548
5	5498	5250	5419	5592	5397
10	5534	5365	5572	5434	5661
15	5724	5718	5683	5413	5542
20	5477	5695	5501	5585	5720
25	5390	5313	5565	5519	5524
30	5685	5386	5452	5671	5635
35	5305	5507	5468	5370	5616
40	5598	5520	5347	5353	5619
45	5623	5435	5251	5574	5408
50	5517	5288	5286	5711	5556
55	5362	5582	5625	5415	5437
60	5398	5260	5723	5621	5589
65	5291	5558	5562	5273	5604
70	5425	5579	5448	5492	5700
75	5292	5463	5418	5445	5283
80	5257	5649	5588	5290	5650
85	5310	5660	5456	5698	5680
90	5706	5636	5484	5630	5672
95	5302	5493	5407	5633	5402

Type 6 Radar Waveform_6

Frequency List (MHz)	0	1	2	3	4
0	5364	5571	5536	5263	5293
5	5540	5272	5494	5280	5604
10	5465	5629	5710	5682	5337
15	5370	5689	5458	5259	5485
20	5289	5539	5674	5693	5278
25	5640	5720	5558	5252	5372
30	5409	5314	5312	5714	5444
35	5598	5264	5523	5627	5534
40	5603	5663	5496	5616	5552
45	5415	5334	5632	5461	5307
50	5639	5595	5422	5379	5684
55	5295	5362	5625	5704	5596
60	5447	5602	5343	5567	5646
65	5315	5715	5497	5297	5660
70	5454	5298	5411	5601	5428
75	5327	5451	5572	5306	5435
80	5670	5324	5712	5585	5650
85	5623	5648	5406	5311	5403
90	5396	5253	5573	5269	5357
95	5326	5391	5261	5600	5636

Type 6 Radar Waveform_7

Frequency List (MHz)	0	1	2	3	4
0	5619	5335	5472	5327	5610
5	5679	5672	5569	5443	5336
10	5299	5418	5276	5349	5703
15	5425	5497	5317	5503	5548
20	5396	5455	5480	5666	5544
25	5589	5496	5592	5294	5261
30	5269	5529	5561	5437	5583
35	5689	5535	5676	5541	5373
40	5308	5601	5613	5384	5395
45	5417	5593	5514	5669	5515
50	5296	5388	5511	5677	5628
55	5483	5316	5340	5523	5567
60	5576	5292	5385	5399	5513
65	5664	5533	5604	5552	5257
70	5370	5494	5277	5303	5410
75	5329	5481	5447	5568	5320
80	5488	5300	5582	5302	5553
85	5469	5683	5268	5531	5457
90	5559	5698	5259	5607	5626
95	5706	5412	5310	5289	5364

Type 6 Radar Waveform_8

Frequency List (MHz)	0	1	2	3	4
0	5399	5574	5408	5488	5355
5	5721	5694	5644	5606	5640
10	5705	5682	5317	5447	5724
15	5513	5624	5420	5451	5265
20	5404	5524	5421	5280	5639
25	5432	5441	5699	5453	5626
30	5433	5722	5701	5269	5713
35	5257	5625	5305	5331	5455
40	5687	5391	5539	5501	5707
45	5313	5278	5500	5651	5567
50	5459	5375	5439	5600	5475
55	5671	5270	5530	5342	5538
60	5457	5330	5706	5298	5556
65	5339	5613	5569	5347	5535
70	5480	5607	5504	5279	5369
75	5413	5449	5406	5581	5576
80	5652	5460	5579	5497	5456
85	5646	5496	5411	5332	5251
90	5544	5385	5345	5467	5294
95	5662	5618	5696	5642	5367

Type 6 Radar Waveform_9

Frequency List (MHz)	0	1	2	3	4
0	5654	5338	5344	5649	5672
5	5288	5619	5719	5372	5636
10	5568	5358	5642	5270	5504
15	5523	5496	5457	5412	5690
20	5362	5272	5612	5698	5390
25	5330	5557	5660	5475	5611
30	5658	5484	5487	5552	5289
35	5493	5699	5604	5466	5526
40	5474	5477	5644	5704	5717
45	5258	5583	5709	5620	5346
50	5645	5551	5490	5689	5701
55	5419	5287	5720	5539	5359
60	5622	5275	5635	5696	5502
65	5540	5562	5508	5646	5617
70	5707	5353	5255	5328	5382
75	5569	5670	5387	5476	5691
80	5454	5341	5576	5692	5456
85	5250	5706	5652	5364	5462
90	5580	5716	5416	5271	5578
95	5293	5397	5522	5278	5560

Type 6 Radar Waveform_10

Frequency List (MHz)	0	1	2	3	4
0	5337	5577	5280	5335	5417
5	5330	5641	5319	5360	5579
10	5470	5357	5399	5362	5291
15	5592	5306	5626	5541	5649
20	5420	5284	5400	5361	5585
25	5586	5717	5533	5283	5694
30	5517	5500	5615	5602	5639
35	5275	5428	5584	5495	5282
40	5380	5462	5557	5415	5409
45	5701	5549	5713	5666	5670
50	5576	5611	5521	5252	5524
55	5266	5475	5653	5435	5358
60	5383	5488	5312	5317	5467
65	5522	5448	5363	5511	5544
70	5381	5509	5616	5683	5452
75	5710	5677	5706	5287	5254
80	5689	5338	5368	5253	5326
85	5408	5476	5412	5359	5664
90	5669	5272	5329	5416	5353
95	5439	5581	5374	5612	5553

Type 6 Radar Waveform_11

Frequency List (MHz)	0	1	2	3	4
0	5592	5341	5691	5496	5259
5	5469	5566	5394	5523	5408
10	5401	5621	5440	5557	5312
15	5680	5433	5632	5489	5366
20	5331	5450	5353	5558	5474
25	5569	5261	5387	5253	5656
30	5486	5572	5342	5413	5570
35	5567	5675	5291	5532	5294
40	5301	5262	5649	5698	5478
45	5693	5274	5629	5498	5397
50	5428	5347	5685	5663	5607
55	5625	5652	5354	5520	5477
60	5299	5445	5564	5460	5483
65	5688	5304	5322	5377	5535
70	5335	5526	5682	5721	5334
75	5384	5349	5339	5491	5271
80	5473	5506	5254	5464	5672
85	5467	5601	5380	5549	5435
90	5615	5396	5343	5453	5465
95	5359	5409	5328	5611	5665

Type 6 Radar Waveform_12

Frequency List (MHz)	0	1	2	3	4
0	5372	5677	5627	5657	5479
5	5511	5588	5469	5686	5615
10	5332	5410	5481	5277	5333
15	5293	5560	5260	5534	5558
20	5339	5519	5282	5442	5531
25	5265	5518	5464	5491	5287
30	5698	5375	5529	5557	5565
35	5609	5291	5659	5685	5305
40	5345	5414	5695	5310	5673
45	5357	5311	5682	5288	5273
50	5604	5643	5578	5645	5532
55	5376	5561	5340	5471	5325
60	5649	5264	5606	5271	5437
65	5387	5409	5423	5671	5600
70	5449	5521	5338	5278	5680
75	5667	5527	5330	5660	5272
80	5261	5334	5470	5424	5262
85	5348	5692	5559	5637	5421
90	5374	5457	5436	5386	5583
95	5317	5510	5687	5327	5351

Type 6 Radar Waveform_13

Frequency List (MHz)	0	1	2	3	4
0	5627	5441	5563	5343	5321
5	5553	5513	5544	5277	5347
10	5641	5674	5522	5375	5354
15	5284	5687	5363	5579	5275
20	5685	5320	5434	5504	5628
25	5370	5667	5595	5265	5264
30	5486	5297	5339	5588	5273
35	5382	5455	5694	5454	5428
40	5704	5557	5314	5714	5653
45	5440	5272	5260	5650	5527
50	5305	5371	5476	5564	5515
55	5433	5668	5303	5429	5438
60	5572	5383	5358	5555	5255
65	5466	5403	5618	5507	5602
70	5537	5639	5539	5477	5573
75	5311	5437	5559	5528	5425
80	5397	5467	5619	5640	5287
85	5276	5505	5472	5622	5655
90	5601	5392	5520	5577	5261
95	5267	5408	5724	5326	5280

Type 6 Radar Waveform_14

Frequency List (MHz)	0	1	2	3	4
0	5310	5680	5499	5407	5541
5	5595	5535	5619	5440	5651
10	5572	5560	5660	5570	5375
15	5372	5717	5466	5624	5467
20	5258	5279	5261	5523	5477
25	5419	5319	5298	5321	5355
30	5404	5250	5443	5415	5491
35	5311	5412	5251	5613	5608
40	5293	5545	5322	5643	5633
45	5330	5313	5403	5481	5270
50	5281	5669	5323	5277	5469
55	5623	5487	5645	5432	5594
60	5367	5495	5329	5411	5307
65	5494	5465	5681	5690	5493
70	5441	5451	5513	5598	5508
75	5597	5716	5292	5689	5309
80	5492	5460	5464	5339	5543
85	5604	5715	5468	5470	5426
90	5475	5291	5398	5554	5459
95	5370	5544	5392	5622	5305

Type 6 Radar Waveform_15

Frequency List (MHz)	0	1	2	3	4
0	5565	5444	5435	5568	5383
5	5259	5460	5694	5603	5503
10	5349	5701	5290	5396	5369
15	5569	5572	5281	5266	5445
20	5677	5515	5450	5307	5646
25	5501	5425	5389	5446	5614
30	5400	5630	5265	5606	5551
35	5661	5522	5291	5704	5691
40	5483	5562	5308	5475	5516
45	5388	5366	5327	5279	5657
50	5321	5467	5492	5267	5465
55	5423	5338	5306	5616	5561
60	5284	5674	5372	5612	5256
65	5530	5297	5628	5484	5384
70	5576	5541	5300	5489	5557
75	5380	5717	5370	5466	5682
80	5656	5620	5364	5534	5543
85	5678	5563	5477	5546	5673
90	5456	5491	5719	5382	5377
95	5376	5520	5662	5298	5692

Type 6 Radar Waveform_16

Frequency List (MHz)	0	1	2	3	4
0	5345	5683	5371	5254	5603
5	5301	5482	5294	5291	5590
10	5337	5613	5267	5485	5417
15	5548	5496	5575	5617	5473
20	5274	5611	5715	5604	5423
25	5573	5498	5704	5529	5488
30	5600	5357	5370	5329	5593
35	5277	5415	5444	5533	5543
40	5299	5421	5327	5305	5404
45	5689	5349	5322	5592	5358
50	5372	5556	5315	5589	5280
55	5528	5503	5587	5449	5559
60	5506	5622	5318	5338	5680
65	5566	5507	5665	5456	5562
70	5544	5624	5465	5516	5265
75	5430	5351	5621	5317	5346
80	5361	5446	5385	5263	5303
85	5431	5319	5493	5525	5601
90	5491	5578	5432	5457	5418
95	5641	5719	5312	5438	5586

Type 6 Radar Waveform_17

Frequency List (MHz)	0	1	2	3	4
0	5600	5447	5307	5415	5445
5	5343	5407	5369	5357	5322
10	5268	5402	5308	5680	5438
15	5539	5623	5678	5662	5665
20	5660	5656	5596	5396	5461
25	5432	5633	5457	5530	5489
30	5314	5585	5666	5624	5257
35	5368	5686	5694	5382	5359
40	5470	5302	5711	5476	5297
45	5375	5479	5409	5534	5423
50	5645	5516	5533	5269	5709
55	5718	5722	5614	5504	5338
60	5545	5264	5636	5629	5505
65	5339	5315	5468	5625	5548
70	5547	5376	5441	5475	5696
75	5385	5573	5332	5398	5330
80	5602	5509	5271	5358	5546
85	5349	5702	5701	5646	5482
90	5567	5691	5689	5513	5462
95	5483	5692	5487	5316	5523

Type 6 Radar Waveform_18

Frequency List (MHz)	0	1	2	3	4
0	5380	5686	5718	5576	5665
5	5385	5429	5444	5520	5626
10	5577	5666	5349	5303	5459
15	5627	5275	5306	5707	5382
20	5668	5371	5597	5685	5369
25	5252	5299	5635	5262	5491
30	5669	5378	5271	5703	5343
35	5396	5482	5372	5361	5696
40	5562	5297	5710	5640	5456
45	5465	5428	5269	5285	5474
50	5259	5339	5457	5663	5433
55	5616	5432	5376	5304	5546
60	5267	5362	5578	5541	5549
65	5585	5697	5534	5647	5700
70	5320	5434	5505	5619	5313
75	5650	5440	5383	5431	5355
80	5266	5641	5286	5567	5611
85	5436	5340	5511	5379	5519
90	5496	5268	5612	5709	5542
95	5425	5311	5502	5450	5514

Type 6 Radar Waveform_19

Frequency List (MHz)	0	1	2	3	4
0	5538	5450	5654	5262	5507
5	5524	5354	5519	5683	5358
10	5508	5455	5390	5498	5480
15	5715	5305	5409	5655	5574
20	5676	5440	5635	5677	5342
25	5615	5723	5266	5463	5525
30	5711	5364	5703	5443	5592
35	5642	5438	5647	5375	5372
40	5632	5645	5710	5475	5393
45	5569	5436	5426	5481	5631
50	5636	5411	5445	5637	5324
55	5617	5623	5435	5403	5505
60	5469	5491	5294	5253	5660
65	5527	5381	5380	5549	5650
70	5296	5537	5625	5287	5427
75	5453	5639	5265	5494	5352
80	5461	5252	5483	5724	5284
85	5479	5487	5588	5709	5544
90	5622	5433	5721	5251	5597
95	5506	5684	5553	5712	5500

Type 6 Radar Waveform_20

Frequency List (MHz)	0	1	2	3	4
0	5318	5689	5590	5423	5252
5	5566	5376	5594	5371	5565
10	5439	5341	5431	5693	5501
15	5328	5432	5512	5700	5291
20	5587	5606	5576	5315	5503
25	5575	5469	5567	5462	5278
30	5253	5660	5658	5269	5577
35	5263	5646	5300	5286	5471
40	5648	5618	5390	5401	5416
45	5546	5484	5534	5421	5415
50	5460	5358	5571	5716	5632
55	5374	5634	5436	5406	5595
60	5674	5386	5476	5516	5591
65	5272	5352	5463	5603	5275
70	5398	5506	5270	5333	5679
75	5563	5420	5429	5557	5349
80	5656	5630	5325	5309	5379
85	5444	5441	5361	5529	5709
90	5628	5467	5410	5258	5268
95	5652	5490	5582	5363	5435

Type 6 Radar Waveform_21

Frequency List (MHz)	0	1	2	3	4
0	5573	5453	5526	5487	5569
5	5608	5301	5669	5437	5394
10	5273	5605	5472	5413	5522
15	5319	5559	5518	5270	5483
20	5595	5675	5517	5283	5288
25	5294	5427	5672	5671	5496
30	5417	5617	5398	5660	5716
35	5354	5442	5310	5433	5489
40	5383	5387	5330	5299	5629
45	5542	5587	5308	5291	5627
50	5623	5661	5590	5546	5525
55	5431	5451	5723	5324	5381
60	5713	5421	5620	5684	5425
65	5552	5423	5533	5535	5589
70	5278	5625	5311	5475	5293
75	5476	5256	5359	5673	5676
80	5593	5724	5473	5630	5264
85	5272	5571	5312	5395	5512
90	5252	5399	5634	5501	5292
95	5367	5382	5610	5474	5480

Type 6 Radar Waveform_22

Frequency List (MHz)	0	1	2	3	4
0	5353	5692	5462	5648	5314
5	5650	5323	5269	5600	5601
10	5679	5394	5610	5511	5543
15	5407	5686	5621	5693	5675
20	5603	5366	5458	5372	5261
25	5657	5376	5400	5300	5530
30	5459	5574	5516	5670	5480
35	5380	5445	5335	5606	5624
40	5427	5623	5384	5637	5279
45	5712	5503	5640	5573	5642
50	5464	5678	5484	5437	5479
55	5270	5694	5320	5489	5423
60	5545	5344	5663	5410	5374
65	5491	5633	5434	5336	5704
70	5672	5378	5474	5699	5347
75	5413	5619	5611	5457	5660
80	5305	5721	5668	5533	5581
85	5332	5666	5277	5446	5285
90	5547	5564	5438	5649	5476
95	5399	5665	5555	5387	5453

Type 6 Radar Waveform_23

Frequency List (MHz)	0	1	2	3	4
0	5511	5456	5398	5334	5631
5	5314	5345	5344	5288	5333
10	5610	5658	5651	5706	5564
15	5495	5338	5724	5263	5489
20	5514	5435	5496	5364	5709
25	5448	5703	5603	5501	5492
30	5531	5256	5444	5678	5422
35	5536	5606	5381	5600	5463
40	5599	5365	5388	5566	5259
45	5320	5561	5596	5460	5518
50	5640	5254	5423	5307	5350
55	5433	5336	5467	5665	5449
60	5654	5368	5474	5645	5609
65	5708	5323	5527	5465	5704
70	5614	5301	5578	5316	5533
75	5693	5321	5713	5349	5718
80	5295	5383	5620	5400	5270
85	5646	5472	5434	5488	5416
90	5720	5539	5276	5490	5308
95	5497	5551	5367	5281	5250

Type 6 Radar Waveform_24

Frequency List (MHz)	0	1	2	3	4
0	5291	5695	5334	5495	5376
5	5356	5270	5419	5451	5637
10	5444	5447	5692	5426	5585
15	5583	5368	5352	5308	5681
20	5522	5601	5437	5453	5682
25	5336	5652	5709	5605	5598
30	5640	5381	5488	5471	5596
35	5498	5561	5627	5402	5534
40	5514	5399	5303	5531	5475
45	5714	5403	5619	5649	5250
50	5297	5341	5305	5512	5703
55	5538	5387	5526	5286	5636
60	5578	5344	5313	5306	5555
65	5434	5272	5466	5675	5499
70	5417	5470	5644	5481	5647
75	5554	5663	5653	5333	5296
80	5431	5494	5513	5715	5436
85	5362	5355	5575	5565	5274
90	5409	5316	5597	5433	5300
95	5523	5271	5560	5593	5546

Type 6 Radar Waveform_25

Frequency List (MHz)	0	1	2	3	4
0	5546	5459	5270	5656	5693
5	5398	5292	5494	5614	5369
10	5375	5333	5258	5621	5606
15	5574	5495	5455	5353	5530
20	5670	5378	5445	5655	5602
25	5504	5437	5709	5632	5682
30	5367	5686	5370	5318	5700
35	5340	5673	5687	5525	5713
40	5387	5716	5296	5472	5327
45	5694	5486	5580	5702	5612
50	5648	5517	5356	5601	5331
55	5647	5251	5341	5510	5707
60	5509	5355	5613	5394	5501
65	5635	5696	5502	5507	5391
70	5695	5542	5630	5484	5496
75	5622	5676	5379	5277	5417
80	5444	5275	5677	5712	5303
85	5339	5679	5453	5405	5554
90	5288	5584	5280	5443	5576
95	5706	5450	5604	5644	5539

Type 6 Radar Waveform_26

Frequency List (MHz)	0	1	2	3	4
0	5326	5698	5681	5342	5438
5	5440	5692	5569	5680	5576
10	5684	5597	5299	5341	5627
15	5662	5622	5461	5301	5590
20	5441	5361	5416	5534	5250
25	5490	5356	5640	5338	5666
30	5724	5256	5402	5329	5522
35	5516	5267	5431	5566	5462
40	5439	5552	5470	5654	5536
45	5469	5674	5638	5280	5524
50	5693	5407	5690	5629	5494
55	5295	5399	5481	5300	5445
60	5695	5544	5458	5645	5538
65	5717	5661	5401	5711	5713
70	5487	5723	5506	5581	5504
75	5321	5258	5669	5554	5531
80	5269	5612	5595	5339	5618
85	5378	5387	5418	5456	5327
90	5486	5274	5286	5380	5718
95	5564	5410	5588	5542	5421

Type 6 Radar Waveform_27

Frequency List (MHz)	0	1	2	3	4
0	5484	5559	5617	5503	5280
5	5579	5714	5644	5368	5405
10	5615	5386	5340	5439	5648
15	5275	5274	5564	5346	5307
20	5449	5527	5357	5526	5698
25	5378	5305	5539	5700	5388
30	5717	5359	5544	5296	5336
35	5406	5522	5362	5353	5391
40	5553	5592	5301	5466	5563
45	5557	5652	5696	5333	5289
50	5400	5394	5458	5304	5452
55	5438	5627	5724	5524	5596
60	5393	5364	5720	5277	5618
65	5490	5659	5594	5477	5549
70	5679	5308	5699	5587	5572
75	5482	5540	5473	5441	5568
80	5349	5664	5312	5433	5609
85	5315	5460	5341	5286	5410
90	5575	5306	5292	5414	5352
95	5581	5465	5440	5427	5687

Type 6 Radar Waveform_28

Frequency List (MHz)	0	1	2	3	4
0	5264	5323	5553	5664	5500
5	5621	5639	5719	5531	5612
10	5546	5650	5381	5634	5669
15	5363	5401	5667	5391	5499
20	5457	5596	5298	5615	5671
25	5644	5632	5571	5643	5259
30	5430	5606	5316	5284	5448
35	5534	5545	5613	5633	5293
40	5364	5327	5636	5530	5444
45	5463	5492	5537	5260	5279
50	5386	5554	5654	5570	5412
55	5490	5275	5285	5718	5581
60	5714	5415	5423	5522	5529
65	5665	5681	5436	5482	5543
70	5513	5348	5477	5685	5590
75	5421	5458	5345	5561	5711
80	5695	5601	5677	5568	5597
85	5305	5510	5620	5302	5304
90	5674	5629	5461	5251	5504
95	5604	5395	5351	5600	5598

Type 6 Radar Waveform_29

Frequency List (MHz)	0	1	2	3	4
0	5519	5562	5489	5253	5342
5	5663	5661	5319	5694	5344
10	5380	5439	5422	5354	5690
15	5451	5431	5295	5436	5691
20	5368	5287	5336	5607	5644
25	5532	5581	5677	5272	5293
30	5472	5495	5273	5499	5697
35	5684	5704	5526	5543	5278
40	5641	5341	5371	5557	5421
45	5517	5343	5715	5441	5530
50	5271	5463	5579	5573	5535
55	5429	5709	5297	5651	5707
60	5513	5270	5479	5683	5492
65	5452	5591	5285	5549	5671
70	5337	5458	5314	5681	5282
75	5676	5378	5312	5349	5286
80	5465	5603	5705	5620	5716
85	5364	5391	5594	5415	5324
90	5294	5401	5385	5482	5473
95	5615	5575	5637	5711	5261



Test Site	WZ-SR4	Test Engineer	Jake Lan
Test Date	2024-04-03 ~ 2024-04-04		
Test Item	Radar Statistical Performance Check (802.11be-EHT40 – 5510MHz)		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5497	1	5510	1	5495	0	5500	1
1	5511	1	5521	1	5523	1	5508	0
2	5494	1	5507	1	5492	1	5528	1
3	5503	1	5495	1	5515	0	5497	1
4	5522	1	5511	0	5491	1	5499	1
5	5505	1	5516	1	5496	0	5493	1
6	5491	1	5500	1	5524	1	5519	1
7	5529	1	5501	1	5499	1	5526	1
8	5499	1	5517	0	5510	1	5498	1
9	5509	1	5499	1	5506	0	5518	0
10	5507	1	5509	1	5522	1	5524	1
11	5493	1	5498	1	5500	1	5510	1
12	5498	1	5527	0	5525	1	5503	1
13	5501	1	5496	1	5519	1	5495	1
14	5520	1	5494	1	5507	1	5491	0
15	5504	1	5497	0	5494	1	5521	1
16	5506	1	5492	1	5504	1	5525	1
17	5512	1	5503	1	5527	1	5494	1
18	5502	1	5493	1	5518	1	5523	0
19	5527	1	5525	1	5508	0	5501	1
20	5492	1	5519	1	5528	1	5511	0
21	5519	1	5528	0	5526	0	5512	1
22	5495	1	5518	1	5505	1	5517	0
23	5496	1	5515	1	5503	1	5492	1
24	5513	1	5526	0	5512	1	5506	1
25	5510	1	5520	1	5493	1	5496	1
26	5521	1	5491	1	5529	1	5527	1
27	5500	1	5505	1	5520	1	5516	1



Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
5500	1	5500	5524	1	5517	1	5529	1
5508	0	5508	5529	1	5521	1	5502	1
Probability:	100.0%		80.0%		80.0%		80.0%	
Aggregate:	85.0% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	718.0	74	53132.0	Download	0	Type 2	2.4	205.0	25	5125.0
Download	1	Type 1	1.0	3066.0	18	55188.0	Download	1	Type 2	2.1	222.0	25	5550.0
Download	2	Type 1	1.0	898.0	59	52982.0	Download	2	Type 2	1.3	176.0	23	4048.0
Download	3	Type 1	1.0	618.0	96	53148.0	Download	3	Type 2	5.0	201.0	29	5829.0
Download	4	Type 1	1.0	818.0	65	53170.0	Download	4	Type 2	2.5	179.0	25	4475.0
Download	5	Type 1	1.0	578.0	92	53176.0	Download	5	Type 2	4.2	211.0	28	5908.0
Download	6	Type 1	1.0	598.0	89	53222.0	Download	6	Type 2	1.5	150.0	23	3450.0
Download	7	Type 1	1.0	778.0	68	52904.0	Download	7	Type 2	3.3	163.0	26	4238.0
Download	8	Type 1	1.0	878.0	61	53558.0	Download	8	Type 2	3.6	215.0	27	5805.0
Download	9	Type 1	1.0	918.0	58	53244.0	Download	9	Type 2	1.3	184.0	23	4232.0
Download	10	Type 1	1.0	698.0	76	53048.0	Download	10	Type 2	1.5	206.0	23	4738.0
Download	11	Type 1	1.0	558.0	95	53010.0	Download	11	Type 2	3.8	171.0	27	4617.0
Download	12	Type 1	1.0	538.0	99	53282.0	Download	12	Type 2	4.9	173.0	29	5017.0
Download	13	Type 1	1.0	838.0	63	52794.0	Download	13	Type 2	2.8	216.0	26	5616.0
Download	14	Type 1	1.0	658.0	81	53298.0	Download	14	Type 2	2.8	214.0	26	5564.0
Download	15	Type 1	1.0	1676.0	32	53632.0	Download	15	Type 2	4.4	174.0	28	4872.0
Download	16	Type 1	1.0	855.0	62	53010.0	Download	16	Type 2	3.5	209.0	27	5643.0
Download	17	Type 1	1.0	2043.0	26	53118.0	Download	17	Type 2	2.9	154.0	26	4004.0
Download	18	Type 1	1.0	2757.0	20	55140.0	Download	18	Type 2	1.1	212.0	23	4876.0
Download	19	Type 1	1.0	1730.0	31	53630.0	Download	19	Type 2	3.6	224.0	27	6048.0
Download	20	Type 1	1.0	3056.0	18	55008.0	Download	20	Type 2	2.7	155.0	26	4030.0
Download	21	Type 1	1.0	2453.0	22	53966.0	Download	21	Type 2	2.6	230.0	25	5750.0
Download	22	Type 1	1.0	2553.0	21	53613.0	Download	22	Type 2	4.5	202.0	29	5888.0
Download	23	Type 1	1.0	1737.0	31	53847.0	Download	23	Type 2	3.0	213.0	26	5538.0
Download	24	Type 1	1.0	797.0	67	53399.0	Download	24	Type 2	2.8	225.0	26	5850.0
Download	25	Type 1	1.0	1922.0	28	53816.0	Download	25	Type 2	1.9	196.0	24	4704.0
Download	26	Type 1	1.0	2152.0	25	53800.0	Download	26	Type 2	3.8	182.0	27	4914.0
Download	27	Type 1	1.0	3049.0	18	54882.0	Download	27	Type 2	3.9	220.0	28	6160.0
Download	28	Type 1	1.0	2597.0	21	54537.0	Download	28	Type 2	3.7	183.0	27	4941.0
Download	29	Type 1	1.0	1135.0	47	53345.0	Download	29	Type 2	1.5	170.0	23	3910.0

Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	7.4	304.0	17	5168.0	Download	0	Type 4	14.1	304.0	13	3952.0
Download	1	Type 3	7.1	372.0	16	5952.0	Download	1	Type 4	13.6	372.0	13	4836.0
Download	2	Type 3	6.3	239.0	16	3824.0	Download	2	Type 4	11.7	239.0	12	2868.0
Download	3	Type 3	10.0	332.0	18	5976.0	Download	3	Type 4	20.0	332.0	16	5312.0
Download	4	Type 3	7.5	233.0	17	3961.0	Download	4	Type 4	14.4	233.0	13	3029.0
Download	5	Type 3	9.2	429.0	18	7722.0	Download	5	Type 4	18.2	429.0	15	6435.0
Download	6	Type 3	6.5	208.0	16	3328.0	Download	6	Type 4	12.2	208.0	12	2496.0
Download	7	Type 3	8.3	366.0	17	6222.0	Download	7	Type 4	16.1	366.0	14	5124.0
Download	8	Type 3	8.6	382.0	17	6494.0	Download	8	Type 4	16.9	382.0	15	5730.0
Download	9	Type 3	6.3	292.0	16	4672.0	Download	9	Type 4	11.6	292.0	12	3504.0
Download	10	Type 3	6.5	428.0	16	6848.0	Download	10	Type 4	12.1	428.0	12	5136.0
Download	11	Type 3	8.8	203.0	18	3654.0	Download	11	Type 4	17.3	203.0	15	3045.0
Download	12	Type 3	9.9	220.0	18	3960.0	Download	12	Type 4	19.6	220.0	16	3520.0
Download	13	Type 3	7.8	279.0	17	4743.0	Download	13	Type 4	15.0	279.0	14	3906.0
Download	14	Type 3	7.8	200.0	17	3400.0	Download	14	Type 4	15.2	200.0	14	2800.0
Download	15	Type 3	9.4	286.0	18	5148.0	Download	15	Type 4	18.6	286.0	16	4576.0
Download	16	Type 3	8.5	262.0	17	4454.0	Download	16	Type 4	16.6	262.0	15	3930.0
Download	17	Type 3	7.9	453.0	17	7701.0	Download	17	Type 4	15.2	453.0	14	6342.0
Download	18	Type 3	6.1	256.0	16	4096.0	Download	18	Type 4	11.3	256.0	12	3072.0
Download	19	Type 3	8.6	456.0	17	7752.0	Download	19	Type 4	16.8	456.0	15	6840.0
Download	20	Type 3	7.7	288.0	17	4896.0	Download	20	Type 4	14.9	288.0	14	4032.0
Download	21	Type 3	7.6	397.0	17	6749.0	Download	21	Type 4	14.6	397.0	14	5558.0
Download	22	Type 3	9.5	343.0	18	6174.0	Download	22	Type 4	18.9	343.0	16	5488.0
Download	23	Type 3	8.0	314.0	17	5338.0	Download	23	Type 4	15.6	314.0	14	4396.0
Download	24	Type 3	7.8	379.0	17	6443.0	Download	24	Type 4	15.1	379.0	14	5306.0
Download	25	Type 3	6.9	285.0	16	4560.0	Download	25	Type 4	13.0	285.0	13	3705.0
Download	26	Type 3	8.8	245.0	18	4410.0	Download	26	Type 4	17.4	245.0	15	3675.0
Download	27	Type 3	8.9	430.0	18	7740.0	Download	27	Type 4	17.5	430.0	15	6450.0
Download	28	Type 3	8.7	498.0	18	8964.0	Download	28	Type 4	17.0	498.0	15	7470.0
Download	29	Type 3	6.5	360.0	16	5760.0	Download	29	Type 4	12.2	360.0	12	4320.0

Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5510	1	15	5498.2	1
1	5510	1	16	5496.6	1
2	5510	1	17	5495.8	1
3	5510	1	18	5493	0
4	5510	1	19	5497	1
5	5510	1	20	5524.6	0
6	5510	1	21	5524.6	1
7	5510	1	22	5521.8	1
8	5510	1	23	5523.8	1
9	5510	0	24	5524.2	1
10	5493.8	0	25	5525.8	1
11	5497.4	1	26	5522.6	1
12	5499	1	27	5522.6	1
13	5495.8	1	28	5523	1
14	5495.8	1	29	5526.2	1
Detection Percentage (%)			86.7%		

Type 5 Radar Waveform_0

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
584042.0	67.1	10	2	1118.0	1870.0	-
826845.0	64.6	10	1	1785.0	-	-
70775.0	53.8	10	1	1132.0	-	-
312025.0	99.5	10	3	1407.0	1679.0	1258.0
554326.0	68.7	10	2	1592.0	1272.0	-
795202.0	89.8	10	3	1100.0	1608.0	1359.0
40912.0	57.1	10	1	1690.0	-	-
282596.0	78.4	10	2	1420.0	1813.0	-
524271.0	82.9	10	2	1992.0	1378.0	-
767661.0	53.6	10	1	1190.0	-	-
11085.0	56.5	10	1	1990.0	-	-
252562.0	85.0	10	3	1419.0	1226.0	1596.0

Type 5 Radar Waveform_1

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
538559.0	97.6	9	3	2000.0	1584.0	1893.0
803007.0	72.4	9	2	1971.0	1886.0	-
1067732.0	73.1	9	2	1111.0	1645.0	-
243229.0	92.1	9	3	1217.0	1224.0	1478.0
507516.0	81.0	9	2	1408.0	1101.0	-
771339.0	73.4	9	2	1650.0	1069.0	-
1036893.0	51.7	9	1	1002.0	-	-
210801.0	82.0	9	2	1902.0	1784.0	-
474972.0	71.4	9	2	1112.0	1463.0	-
738411.0	70.0	9	2	1874.0	1462.0	-
1002025.0	93.8	9	3	1083.0	1223.0	1200.0

Type 5 Radar Waveform_2

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
218190.0	75.3	6	2	1803.0	1228.0	-
540997.0	72.8	6	2	1334.0	1287.0	-
864741.0	61.3	6	1	1073.0	-	-
1184910.0	85.3	6	3	1162.0	1854.0	1361.0
178270.0	85.8	6	3	1777.0	1123.0	1454.0
500544.0	83.5	6	3	1241.0	1438.0	1795.0
824738.0	56.7	6	1	1400.0	-	-
1145907.0	91.6	6	3	1055.0	1129.0	1383.0
138818.0	58.7	6	1	1953.0	-	-

Type 5 Radar Waveform_3

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
207528.0	50.6	20	1	1589.0	-	-
351377.0	82.0	20	2	1772.0	1997.0	-
497874.0	60.8	20	1	1494.0	-	-
44296.0	91.2	20	3	1543.0	1459.0	1560.0
189595.0	55.4	20	1	1765.0	-	-
334709.0	55.9	20	1	1724.0	-	-
477213.0	86.9	20	3	1538.0	1501.0	1923.0
26479.0	89.7	20	3	1771.0	1885.0	1564.0
171037.0	96.3	20	3	1183.0	1404.0	1569.0
316791.0	56.4	20	1	1809.0	-	-
461922.0	63.6	20	1	1742.0	-	-
8770.0	56.8	20	1	1126.0	-	-
153804.0	57.2	20	1	1948.0	-	-
298144.0	79.0	20	2	1898.0	1464.0	-
443865.0	60.5	20	1	1991.0	-	-
589174.0	66.4	20	1	1714.0	-	-
135793.0	68.0	20	2	1516.0	1070.0	-
279519.0	93.7	20	3	1586.0	1955.0	1525.0
425355.0	75.5	20	2	1866.0	1031.0	-
568770.0	98.6	20	3	1486.0	1346.0	1532.0

Type 5 Radar Waveform_4

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
197040.0	61.2	11	1	1958.0	-	-
438574.0	80.2	11	2	1547.0	1598.0	-
680515.0	80.1	11	2	1053.0	1840.0	-
920204.0	97.2	11	3	1573.0	1669.0	1965.0
167023.0	70.9	11	2	1517.0	1638.0	-
408810.0	78.6	11	2	1125.0	1980.0	-
650683.0	76.6	11	2	1816.0	1144.0	-
893491.0	57.4	11	1	1849.0	-	-
137416.0	54.4	11	1	1899.0	-	-
379359.0	71.3	11	2	1049.0	1187.0	-
619843.0	94.9	11	3	1851.0	1079.0	1723.0
862592.0	76.2	11	2	1848.0	1249.0	-

Type 5 Radar Waveform_5

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
71663.0	62.1	17	1	1907.0	-	-
232014.0	97.8	17	3	1205.0	1548.0	1651.0
392955.0	84.3	17	3	1158.0	1052.0	1652.0
555915.0	65.6	17	1	1218.0	-	-
51845.0	61.5	17	1	1390.0	-	-
212707.0	82.0	17	2	1515.0	1397.0	-
372652.0	86.6	17	3	1326.0	1850.0	1578.0
534538.0	75.0	17	2	1797.0	1279.0	-
31831.0	86.5	17	3	1197.0	1880.0	1198.0
193393.0	62.0	17	1	1139.0	-	-
353394.0	85.7	17	3	1381.0	1017.0	1387.0
515985.0	65.0	17	1	1437.0	-	-
12095.0	56.4	17	1	1412.0	-	-
172664.0	86.9	17	3	1453.0	1235.0	1701.0
334239.0	68.1	17	2	1349.0	1148.0	-
493772.0	93.8	17	3	1888.0	1175.0	1511.0
656981.0	50.8	17	1	1913.0	-	-
153105.0	68.9	17	2	1673.0	1737.0	-

Type 5 Radar Waveform_6

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
629697.0	67.7	7	2	1203.0	1884.0	-
950830.0	89.9	7	3	1705.0	1943.0	1526.0
1274810.0	81.2	7	2	1537.0	1697.0	-
266847.0	93.0	7	3	1904.0	1624.0	1962.0
589317.0	97.5	7	3	1599.0	1662.0	1270.0
912602.0	70.5	7	2	1394.0	1667.0	-
1236949.0	51.8	7	1	1215.0	-	-
227937.0	63.7	7	1	1059.0	-	-
550412.0	70.3	7	2	1193.0	1421.0	-

Type 5 Radar Waveform_7

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
523152.0	76.8	14	2	1631.0	1067.0	-
716947.0	79.3	14	2	1048.0	1178.0	-
112524.0	79.4	14	2	1728.0	1443.0	-
305440.0	85.2	14	3	1403.0	1286.0	1368.0
499273.0	75.0	14	2	1332.0	1460.0	-
693742.0	61.5	14	1	1502.0	-	-
88515.0	87.5	14	3	1938.0	1752.0	1314.0
281152.0	94.8	14	3	1749.0	1822.0	1926.0
476426.0	59.4	14	1	1169.0	-	-
667554.0	94.7	14	3	1793.0	1050.0	1441.0
64855.0	95.0	14	3	1289.0	1370.0	1246.0
258581.0	54.8	14	1	1905.0	-	-
450031.0	86.1	14	3	1867.0	1940.0	1827.0
646385.0	57.0	14	1	1068.0	-	-
41188.0	50.4	14	1	1657.0	-	-

Type 5 Radar Waveform_8

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
220182.0	62.0	15	1	1395.0	-	-
400415.0	99.3	15	3	1468.0	1149.0	1251.0
580828.0	94.5	15	3	1582.0	1825.0	1164.0
16259.0	65.0	15	1	1350.0	-	-
196977.0	90.7	15	3	1726.0	1773.0	1080.0
377646.0	84.0	15	3	1853.0	1721.0	1239.0
561033.0	60.5	15	1	1269.0	-	-
741558.0	82.8	15	2	1252.0	1091.0	-
175444.0	56.6	15	1	1439.0	-	-
355620.0	85.6	15	3	1445.0	1751.0	1122.0
538550.0	53.5	15	1	1429.0	-	-
719629.0	55.0	15	1	1921.0	-	-
152361.0	95.0	15	3	1364.0	1937.0	1659.0
333953.0	69.1	15	2	1674.0	1281.0	-
516445.0	50.3	15	1	1054.0	-	-
697281.0	63.8	15	1	1920.0	-	-

Type 5 Radar Waveform_9

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
261724.0	63.7	6	1	1227.0	-	-
623790.0	97.9	6	3	1944.0	1192.0	1527.0
988682.0	61.7	6	1	1290.0	-	-
1351843.0	59.8	6	1	1648.0	-	-
216499.0	95.8	6	3	1184.0	1628.0	1528.0
580270.0	57.1	6	1	1688.0	-	-
942607.0	76.8	6	2	1989.0	1051.0	-
1307292.0	60.7	6	1	1405.0	-	-

Type 5 Radar Waveform_10

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
153051.0	53.5	7	1	1029.0	-	-
475353.0	68.9	7	2	1706.0	1627.0	-
797339.0	92.1	7	3	1335.0	1396.0	1571.0
1121751.0	58.6	7	1	1833.0	-	-
112976.0	99.2	7	3	1788.0	1362.0	1089.0
436246.0	55.8	7	1	1423.0	-	-
759415.0	64.0	7	1	1179.0	-	-
1081019.0	81.7	7	2	1693.0	1315.0	-
73313.0	82.8	7	2	1587.0	1882.0	-

Type 5 Radar Waveform_11

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
209429.0	80.7	16	2	1043.0	1256.0	-
379799.0	80.9	16	2	1301.0	1500.0	-
548711.0	98.3	16	3	1881.0	1729.0	1245.0
17761.0	76.0	16	2	1220.0	1393.0	-
187781.0	86.9	16	3	1878.0	1630.0	1137.0
358900.0	73.0	16	2	1072.0	1522.0	-
528017.0	86.3	16	3	1682.0	1838.0	1004.0
701131.0	66.3	16	1	1498.0	-	-
166957.0	96.5	16	3	1406.0	1418.0	1298.0
337892.0	72.8	16	2	1120.0	1469.0	-
506991.0	99.7	16	3	1746.0	1566.0	1313.0
679158.0	71.5	16	2	1354.0	1107.0	-
146640.0	56.4	16	1	1008.0	-	-
316212.0	92.5	16	3	1104.0	1263.0	1709.0
486934.0	75.6	16	2	1733.0	1604.0	-
659358.0	59.1	16	1	1163.0	-	-
125167.0	80.9	16	2	1987.0	1351.0	-

Type 5 Radar Waveform_12

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
251045.0	81.3	20	2	1912.0	1348.0	-
397132.0	57.0	20	1	1212.0	-	-
541318.0	74.3	20	2	1011.0	1347.0	-
88256.0	97.3	20	3	1755.0	1319.0	1761.0
233999.0	54.7	20	1	1260.0	-	-
378802.0	54.9	20	1	1909.0	-	-
522861.0	72.4	20	2	1524.0	1523.0	-
70444.0	83.8	20	3	1743.0	1687.0	1672.0
215883.0	61.5	20	1	1896.0	-	-
360471.0	71.8	20	2	1243.0	1433.0	-
503509.0	91.9	20	3	1812.0	1558.0	1471.0
52966.0	51.8	20	1	1780.0	-	-
196986.0	83.7	20	3	1605.0	1484.0	1916.0
343569.0	50.7	20	1	1033.0	-	-
486887.0	71.5	20	2	1950.0	1473.0	-
35008.0	71.8	20	2	1613.0	1641.0	-
179757.0	72.2	20	2	1329.0	1863.0	-
325287.0	64.3	20	1	1747.0	-	-
468020.0	86.3	20	3	1720.0	1663.0	1369.0
17221.0	52.0	20	1	1875.0	-	-

Type 5 Radar Waveform_13

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
249443.0	87.9	12	3	1117.0	1023.0	1575.0
472437.0	76.9	12	2	1975.0	1703.0	-
696018.0	74.8	12	2	1196.0	1691.0	-
919233.0	75.5	12	2	1555.0	1292.0	-
221769.0	93.5	12	3	1170.0	1757.0	1654.0
444481.0	99.3	12	3	1475.0	1434.0	1779.0
667635.0	84.3	12	3	1199.0	1060.0	1857.0
891618.0	77.2	12	2	1910.0	1065.0	-
194197.0	89.3	12	3	1810.0	1411.0	1985.0
416934.0	97.1	12	3	1713.0	1707.0	1512.0
641112.0	76.5	12	2	1058.0	1722.0	-
865586.0	66.5	12	1	1425.0	-	-
166857.0	99.6	12	3	1262.0	1694.0	1805.0

Type 5 Radar Waveform_14

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
362614.0	68.2	12	2	1171.0	1216.0	-
569179.0	74.6	12	2	1606.0	1891.0	-
778160.0	57.0	12	1	1358.0	-	-
129850.0	57.3	12	1	1883.0	-	-
336377.0	85.6	12	3	1189.0	1413.0	1563.0
543853.0	75.9	12	2	1716.0	1504.0	-
751174.0	75.9	12	2	1283.0	1689.0	-
104238.0	75.9	12	2	1255.0	1135.0	-
311086.0	92.3	12	3	1546.0	1021.0	1075.0
518189.0	75.3	12	2	1544.0	1930.0	-
727046.0	51.2	12	1	1337.0	-	-
78552.0	94.4	12	3	1268.0	1625.0	1134.0
286209.0	64.4	12	1	1786.0	-	-
493961.0	62.8	12	1	1265.0	-	-

Type 5 Radar Waveform_15

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
543848.0	72.0	18	2	1941.0	1230.0	-
41275.0	78.1	18	2	1379.0	1734.0	-
201556.0	99.7	18	3	1321.0	1967.0	1963.0
362376.0	84.3	18	3	1367.0	1188.0	1954.0
523976.0	78.2	18	2	1588.0	1647.0	-
21387.0	87.4	18	3	1799.0	1431.0	1871.0
182941.0	57.0	18	1	1087.0	-	-
342907.0	93.0	18	3	1236.0	1357.0	1311.0
505596.0	54.3	18	1	1341.0	-	-
1629.0	82.2	18	2	1534.0	1082.0	-
162070.0	98.9	18	3	1240.0	1951.0	1927.0
324290.0	53.7	18	1	1480.0	-	-
485361.0	55.5	18	1	1832.0	-	-
645420.0	70.6	18	2	1081.0	1969.0	-
142579.0	95.3	18	3	1047.0	1507.0	1296.0
303228.0	94.5	18	3	1034.0	1181.0	1865.0
465741.0	64.4	18	1	1487.0	-	-
624265.0	95.3	18	3	1409.0	1626.0	1426.0

Type 5 Radar Waveform_16

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
138388.0	75.4	14	2	1781.0	1131.0	-
320386.0	52.3	14	1	1027.0	-	-
501699.0	65.4	14	1	1530.0	-	-
681798.0	76.2	14	2	1718.0	1377.0	-
116332.0	64.5	14	1	1222.0	-	-
297664.0	64.4	14	1	1901.0	-	-
478206.0	86.6	14	3	1040.0	1156.0	1103.0
658322.0	88.5	14	3	1831.0	1565.0	1015.0
93932.0	62.3	14	1	1465.0	-	-
275068.0	76.2	14	2	1508.0	1062.0	-
454889.0	95.6	14	3	1995.0	1436.0	1521.0
638126.0	51.5	14	1	1976.0	-	-
71415.0	73.5	14	2	1376.0	1708.0	-
252602.0	81.1	14	2	1324.0	1653.0	-
433677.0	79.1	14	2	1677.0	1474.0	-
613684.0	86.4	14	3	1447.0	1506.0	1568.0

Type 5 Radar Waveform_17

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
56262.0	62.3	12	1	1300.0	-	-
262796.0	99.1	12	3	1945.0	1612.0	1099.0
469222.0	89.6	12	3	1877.0	1435.0	1942.0
679199.0	62.8	12	1	1010.0	-	-
30574.0	98.3	12	3	1766.0	1098.0	1801.0
237883.0	79.1	12	2	1211.0	1455.0	-
444601.0	92.5	12	3	1472.0	1032.0	1160.0
652111.0	75.3	12	2	1304.0	1686.0	-
5118.0	70.2	12	2	1225.0	1559.0	-
212186.0	74.8	12	2	1574.0	1778.0	-
419956.0	58.5	12	1	1928.0	-	-
627059.0	81.9	12	2	1071.0	1284.0	-
834240.0	70.3	12	2	1331.0	1159.0	-
187099.0	55.3	12	1	1432.0	-	-

Type 5 Radar Waveform_18

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
690630.0	80.7	5	2	1325.0	1141.0	-
1052891.0	97.8	5	3	1277.0	1096.0	1428.0
1417682.0	60.9	5	1	1776.0	-	-
282915.0	55.9	5	1	1294.0	-	-
645632.0	68.9	5	2	1422.0	1649.0	-
1009686.0	62.0	5	1	1585.0	-	-
1371125.0	97.4	5	3	1322.0	1180.0	1237.0
237684.0	95.9	5	3	1254.0	1897.0	1024.0

Type 5 Radar Waveform_19

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
300654.0	63.6	15	1	1044.0	-	-
480343.0	85.2	15	3	1253.0	1671.0	1157.0
660432.0	97.7	15	3	1756.0	1497.0	1753.0
96177.0	89.8	15	3	1151.0	1695.0	1739.0
277285.0	75.1	15	2	1828.0	1890.0	-
458263.0	80.9	15	2	1800.0	1949.0	-
639354.0	97.4	15	3	1214.0	1136.0	1280.0
74215.0	52.8	15	1	1489.0	-	-
255905.0	58.6	15	1	1042.0	-	-
436985.0	67.7	15	2	1003.0	1007.0	-
617675.0	74.7	15	2	1085.0	1798.0	-
51785.0	69.1	15	2	1273.0	1201.0	-
233308.0	58.3	15	1	1754.0	-	-
413204.0	96.2	15	3	1551.0	1660.0	1389.0
596276.0	54.9	15	1	1727.0	-	-
29478.0	51.5	15	1	1861.0	-	-

Type 5 Radar Waveform_20

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
258992.0	97.1	11	3	1274.0	1470.0	1702.0
481462.0	96.3	11	3	1959.0	1401.0	1710.0
706986.0	59.8	11	1	1317.0	-	-
8761.0	90.2	11	3	1365.0	1022.0	1066.0
232203.0	55.9	11	1	1852.0	-	-
453911.0	89.7	11	3	1818.0	1637.0	1869.0
679136.0	55.9	11	1	1741.0	-	-
902371.0	54.7	11	1	1964.0	-	-
204290.0	68.1	11	2	1939.0	1675.0	-
428310.0	56.9	11	1	1417.0	-	-
650305.0	95.5	11	3	1006.0	1375.0	1208.0
871625.0	97.9	11	3	1960.0	1787.0	1616.0
176643.0	90.7	11	3	1430.0	1267.0	1845.0

Type 5 Radar Waveform_21

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
400047.0	67.6	11	2	1610.0	1482.0	-
624319.0	62.1	11	1	1399.0	-	-
846346.0	67.0	11	2	1356.0	1684.0	-
149151.0	89.1	11	3	1392.0	1922.0	1545.0
373099.0	66.5	11	1	1769.0	-	-
595419.0	85.5	11	3	1250.0	1092.0	1166.0
820228.0	54.4	11	1	1503.0	-	-
122161.0	65.2	11	1	1536.0	-	-
345549.0	58.5	11	1	1841.0	-	-
569323.0	54.0	11	1	1282.0	-	-
792534.0	61.5	11	1	1692.0	-	-
94472.0	77.9	11	2	1932.0	1140.0	-
317634.0	67.4	11	2	1600.0	1382.0	-

Type 5 Radar Waveform_22

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
370605.0	66.2	18	1	1030.0	-	-
520102.0	90.8	18	3	1982.0	1895.0	1285.0
45889.0	57.2	18	1	1340.0	-	-
198750.0	51.2	18	1	1316.0	-	-
349883.0	97.1	18	3	1266.0	1807.0	1336.0
502019.0	84.5	18	3	1077.0	1934.0	1363.0
26939.0	92.9	18	3	1231.0	1038.0	1915.0
179968.0	59.3	18	1	1150.0	-	-
332848.0	58.9	18	1	1186.0	-	-
484874.0	72.7	18	2	1005.0	1303.0	-
8235.0	52.2	18	1	1219.0	-	-
161075.0	57.1	18	1	1384.0	-	-
312042.0	89.9	18	3	1666.0	1557.0	1925.0
465839.0	74.0	18	2	1037.0	1590.0	-
617882.0	79.3	18	2	1307.0	1826.0	-
141617.0	93.0	18	3	1328.0	1556.0	1297.0
294601.0	71.7	18	2	1028.0	1402.0	-
446687.0	68.1	18	2	1670.0	1467.0	-
597266.0	85.4	18	3	1764.0	1302.0	1998.0

Type 5 Radar Waveform_23

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
167081.0	99.6	13	3	1452.0	1446.0	1121.0
374963.0	62.2	13	1	1802.0	-	-
580454.0	91.1	13	3	1016.0	1843.0	1815.0
789825.0	55.5	13	1	1837.0	-	-
142053.0	57.6	13	1	1257.0	-	-
348814.0	80.0	13	2	1620.0	1642.0	-
554996.0	91.8	13	3	1580.0	1342.0	1738.0
764311.0	60.7	13	1	1794.0	-	-
116467.0	50.4	13	1	1385.0	-	-
322659.0	86.4	13	3	1481.0	1550.0	1935.0
529778.0	88.5	13	3	1602.0	1172.0	1485.0
736093.0	92.2	13	3	1078.0	1968.0	1834.0
90548.0	98.3	13	3	1177.0	1796.0	1740.0
298398.0	62.3	13	1	1533.0	-	-

Type 5 Radar Waveform_24

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
543006.0	88.6	12	3	1448.0	1768.0	1514.0
767427.0	73.5	12	2	1182.0	1518.0	-
70388.0	65.1	12	1	1155.0	-	-
292791.0	97.5	12	3	1391.0	1696.0	1806.0
516867.0	66.8	12	2	1306.0	1115.0	-
740579.0	59.9	12	1	1894.0	-	-
42844.0	61.0	12	1	1213.0	-	-
266468.0	55.0	12	1	1064.0	-	-
489232.0	81.3	12	2	1535.0	1133.0	-
713721.0	58.6	12	1	1039.0	-	-
15240.0	89.5	12	3	1416.0	1839.0	1808.0
238812.0	64.8	12	1	1491.0	-	-
461425.0	82.0	12	2	1996.0	1291.0	-

Type 5 Radar Waveform_25

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
891344.0	76.6	8	2	1128.0	1143.0	-
1182794.0	61.4	8	1	1295.0	-	-
274428.0	75.1	8	2	1142.0	1829.0	-
564589.0	72.3	8	2	1748.0	1553.0	-
853620.0	86.9	8	3	1617.0	1450.0	1924.0
1144086.0	86.0	8	3	1513.0	1248.0	1562.0
238684.0	76.2	8	2	1775.0	1114.0	-
529156.0	78.3	8	2	1410.0	1174.0	-
820342.0	55.1	8	1	1451.0	-	-
1109563.0	75.1	8	2	1643.0	1388.0	-

Type 5 Radar Waveform_26

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
119030.0	85.3	16	3	1210.0	1338.0	1130.0
288578.0	99.6	16	3	1999.0	1678.0	1844.0
459995.0	71.2	16	2	1374.0	1767.0	-
632168.0	55.2	16	1	1206.0	-	-
98105.0	73.8	16	2	1619.0	1685.0	-
268102.0	92.4	16	3	1026.0	1581.0	1744.0
438825.0	72.9	16	2	1957.0	1466.0	-
609313.0	70.5	16	2	1862.0	1424.0	-
77167.0	80.5	16	2	1493.0	1343.0	-
248152.0	53.9	16	1	1490.0	-	-
417243.0	94.8	16	3	1293.0	1310.0	1823.0
589599.0	51.3	16	1	1762.0	-	-
56295.0	50.5	16	1	1194.0	-	-
227047.0	64.1	16	1	1681.0	-	-
396445.0	95.5	16	3	1372.0	1045.0	1731.0
568686.0	54.8	16	1	1611.0	-	-
35218.0	58.1	16	1	1699.0	-	-

Type 5 Radar Waveform_27

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
205455.0	74.4	16	2	1983.0	1594.0	-
375017.0	94.6	16	3	1966.0	1509.0	1540.0
546458.0	80.9	16	2	1495.0	1644.0	-
14146.0	82.4	16	2	1593.0	1824.0	-
185120.0	66.1	16	1	1116.0	-	-
354232.0	92.9	16	3	1414.0	1977.0	1320.0
523909.0	98.1	16	3	1715.0	1745.0	1759.0
697264.0	65.2	16	1	1763.0	-	-
163205.0	99.3	16	3	1113.0	1847.0	1856.0
334035.0	75.4	16	2	1873.0	1261.0	-
505369.0	64.1	16	1	1887.0	-	-
676232.0	51.5	16	1	1760.0	-	-
142909.0	56.2	16	1	1621.0	-	-
313204.0	72.1	16	2	1561.0	1207.0	-
482926.0	84.0	16	3	1380.0	1496.0	1063.0
652194.0	83.4	16	3	1339.0	1789.0	1859.0
121449.0	98.4	16	3	1345.0	1074.0	1633.0

Type 5 Radar Waveform_28

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
310378.0	79.9	15	2	1817.0	1323.0	-
490680.0	98.0	15	3	1020.0	1750.0	1639.0
670901.0	95.7	15	3	1936.0	1656.0	1492.0
107095.0	54.7	15	1	1984.0	-	-
287133.0	87.3	15	3	1931.0	1676.0	1952.0
470261.0	62.6	15	1	1456.0	-	-
652172.0	58.4	15	1	1036.0	-	-
84380.0	88.2	15	3	1908.0	1597.0	1730.0
266418.0	59.0	15	1	1275.0	-	-
447633.0	60.9	15	1	1900.0	-	-
626711.0	87.2	15	3	1860.0	1076.0	1770.0
62339.0	75.2	15	2	1366.0	1373.0	-
243929.0	60.9	15	1	1646.0	-	-
425615.0	61.0	15	1	1318.0	-	-
606473.0	76.8	15	2	1088.0	1119.0	-
40031.0	82.1	15	2	1195.0	1234.0	-

Type 5 Radar Waveform_29

Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
393757.0	77.8	7	2	1505.0	1929.0	-
717313.0	51.7	7	1	1552.0	-	-
1037532.0	83.8	7	3	1879.0	1972.0	1259.0
31495.0	74.3	7	2	1520.0	1477.0	-
353750.0	92.7	7	3	1986.0	1153.0	1333.0
677091.0	69.1	7	2	1242.0	1167.0	-
1000444.0	56.7	7	1	1661.0	-	-
1322829.0	73.1	7	2	1105.0	1147.0	-
313959.0	90.0	7	3	1352.0	1577.0	1933.0

Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	1	15	1
1	1	16	1
2	1	17	1
3	1	18	1
4	1	19	1
5	1	20	1
6	1	21	1
7	1	22	1
8	1	23	1
9	1	24	1
10	1	25	0
11	1	26	1
12	1	27	1
13	1	28	1
14	1	29	1
Detection Percentage (%)		96.7%	

Type 6 Radar Waveform_0

Frequency List (MHz)	0	1	2	3	4
0	5393	5472	5718	5662	5454
5	5294	5471	5444	5438	5366
10	5487	5285	5606	5484	5464
15	5334	5288	5439	5616	5581
20	5609	5503	5442	5505	5671
25	5387	5457	5436	5679	5352
30	5687	5463	5696	5369	5508
35	5293	5380	5553	5331	5528
40	5544	5282	5433	5685	5362
45	5391	5511	5704	5291	5286
50	5500	5370	5712	5377	5560
55	5716	5317	5562	5382	5587
60	5336	5275	5622	5547	5635
65	5365	5303	5633	5708	5632
70	5400	5315	5259	5545	5582
75	5316	5689	5515	5470	5494
80	5273	5310	5576	5479	5381
85	5555	5486	5396	5304	5410
90	5711	5549	5276	5516	5321
95	5308	5476	5447	5305	5491

Type 6 Radar Waveform_1

Frequency List (MHz)	0	1	2	3	4
0	5648	5711	5654	5251	5296
5	5336	5493	5519	5601	5670
10	5418	5549	5647	5679	5485
15	5325	5415	5542	5661	5298
20	5617	5669	5383	5594	5644
25	5275	5309	5639	5308	5386
30	5480	5673	5420	5436	5618
35	5706	5432	5568	5349	5484
40	5442	5462	5371	5450	5433
45	5291	5555	5472	5282	5556
50	5637	5676	5421	5326	5675
55	5407	5429	5271	5277	5461
60	5465	5440	5567	5379	5558
65	5408	5504	5715	5443	5524
70	5678	5554	5262	5394	5709
75	5285	5334	5561	5451	5649
80	5286	5566	5265	5378	5389
85	5328	5457	5588	5269	5722
90	5656	5705	5401	5310	5301
95	5579	5435	5363	5460	5345

Type 6 Radar Waveform_2

Frequency List (MHz)	0	1	2	3	4
0	5428	5475	5590	5412	5516
5	5378	5418	5594	5667	5402
10	5349	5338	5688	5399	5506
15	5413	5445	5645	5706	5490
20	5528	5263	5324	5586	5617
25	5541	5258	5270	5420	5522
30	5562	5377	5554	5295	5526
35	5571	5659	5620	5637	5356
40	5319	5545	5309	5690	5430
45	5598	5351	5638	5530	5335
50	5443	5513	5472	5415	5498
55	5700	5467	5495	5432	5605
60	5512	5686	5384	5354	5327
65	5664	5608	5275	5556	5540
70	5362	5718	5437	5668	5632
75	5454	5704	5426	5396	5347
80	5429	5702	5375	5470	5389
85	5267	5517	5683	5612	5298
90	5566	5561	5344	5658	5452
95	5444	5641	5697	5386	5455

Type 6 Radar Waveform_3

Frequency List (MHz)	0	1	2	3	4
0	5586	5714	5526	5573	5358
5	5420	5440	5669	5355	5609
10	5658	5602	5254	5497	5527
15	5501	5572	5651	5276	5682
20	5536	5429	5362	5675	5590
25	5585	5473	5613	5454	5661
30	5451	5334	5294	5544	5724
35	5710	5275	5513	5412	5367
40	5633	5628	5722	5455	5524
45	5331	5721	5588	5388	5708
50	5292	5553	5523	5504	5699
55	5673	5330	5654	5657	5692
60	5403	5626	5295	5457	5518
65	5685	5300	5528	5644	5485
70	5589	5662	5250	5365	5470
75	5413	5627	5601	5477	5678
80	5409	5603	5593	5290	5372
85	5287	5584	5480	5400	5577
90	5252	5677	5723	5256	5567
95	5281	5540	5700	5469	5428

Type 6 Radar Waveform_4

Frequency List (MHz)	0	1	2	3	4
0	5366	5478	5462	5259	5578
5	5559	5365	5269	5518	5438
10	5589	5488	5295	5692	5548
15	5699	5279	5399	5544	5498
20	5303	5667	5563	5317	5437
25	5676	5717	5703	5291	5509
30	5696	5277	5309	5565	5281
35	5472	5711	5660	5598	5521
40	5456	5311	5329	5549	5344
45	5595	5643	5254	5574	5593
50	5522	5617	5421	5608	5372
55	5511	5374	5280	5460	5499
60	5447	5721	5351	5562	5583
65	5481	5465	5322	5512	5319
70	5389	5586	5473	5597	5418
75	5394	5455	5519	5384	5353
80	5272	5482	5670	5426	5540
85	5495	5445	5450	5446	5573
90	5315	5325	5334	5486	5528
95	5514	5502	5428	5404	5379

Type 6 Radar Waveform_5

Frequency List (MHz)	0	1	2	3	4
0	5621	5339	5398	5420	5601
5	5387	5344	5681	5645	5520
10	5277	5336	5412	5569	5580
15	5351	5382	5269	5688	5455
20	5664	5719	5281	5536	5583
25	5386	5404	5346	5522	5270
30	5326	5723	5724	5470	5364
35	5416	5457	5718	5670	5311
40	5598	5363	5518	5288	5669
45	5607	5397	5385	5519	5430
50	5625	5304	5345	5464	5609
55	5562	5330	5409	5444	5279
60	5434	5289	5552	5511	5619
65	5527	5276	5268	5394	5595
70	5468	5643	5365	5545	5442
75	5717	5561	5375	5707	5629
80	5640	5349	5513	5677	5503
85	5687	5410	5257	5698	5266
90	5586	5676	5252	5682	5443
95	5600	5493	5481	5602	5591

Type 6 Radar Waveform_6

Frequency List (MHz)	0	1	2	3	4
0	5401	5578	5334	5581	5640
5	5643	5312	5419	5272	5377
10	5354	5541	5607	5590	5668
15	5478	5485	5314	5405	5463
20	5258	5660	5273	5509	5471
25	5713	5450	5556	5409	5680
30	5367	5622	5562	5555	5548
35	5376	5493	5681	5722	5499
40	5536	5603	5515	5692	5649
45	5495	5665	5650	5395	5606
50	5676	5393	5408	5322	5516
55	5277	5527	5694	5538	5315
60	5389	5586	5260	5710	5278
65	5460	5655	5359	5546	5563
70	5492	5341	5504	5362	5453
75	5484	5642	5421	5513	5576
80	5266	5397	5573	5682	5404
85	5308	5464	5654	5286	5467
90	5455	5617	5638	5477	5407
95	5363	5537	5422	5263	5328

Type 6 Radar Waveform_7

Frequency List (MHz)	0	1	2	3	4
0	5656	5342	5270	5267	5482
5	5307	5334	5494	5435	5681
10	5285	5330	5418	5327	5611
15	5281	5508	5588	5359	5597
20	5471	5424	5698	5362	5262
25	5662	5713	5554	5590	5451
30	5676	5637	5582	5396	5382
35	5261	5269	5646	5595	5561
40	5377	5271	5512	5524	5629
45	5578	5626	5503	5537	5649
50	5252	5369	5255	5510	5470
55	5370	5346	5665	5667	5480
60	5658	5576	5409	5594	5569
65	5438	5635	5567	5571	5341
70	5695	5463	5283	5275	5434
75	5639	5277	5677	5263	5592
80	5476	5621	5526	5499	5718
85	5719	5284	5344	5688	5349
90	5564	5634	5693	5558	5305
95	5640	5620	5540	5257	5686

Type 6 Radar Waveform_8

Frequency List (MHz)	0	1	2	3	4
0	5339	5581	5303	5331	5702
5	5349	5356	5569	5598	5413
10	5594	5556	5425	5632	5369
15	5635	5307	5314	5382	5493
20	5639	5354	5455	5625	5514
25	5441	5280	5624	5565	5322
30	5548	5580	5261	5352	5540
35	5324	5509	5400	5665	5315
40	5511	5453	5609	5661	5684
45	5327	5525	5483	5571	5667
50	5674	5698	5424	5560	5640
55	5636	5321	5645	5376	5347
60	5484	5699	5302	5358	5630
65	5401	5330	5530	5329	5650
70	5574	5568	5671	5422	5252
75	5505	5415	5416	5387	5458
80	5269	5260	5409	5476	5463
85	5586	5691	5492	5482	5694
90	5257	5576	5651	5273	5542
95	5678	5268	5343	5277	5655

Type 6 Radar Waveform_9

Frequency List (MHz)	0	1	2	3	4
0	5594	5345	5714	5492	5447
5	5391	5281	5644	5286	5620
10	5525	5480	5597	5653	5360
15	5287	5697	5352	5506	5390
20	5659	5580	5443	5428	5416
25	5366	5384	5658	5535	5551
30	5537	5322	5400	5336	5574
35	5423	5370	5253	5276	5603
40	5382	5589	5269	5267	5609
45	5689	5401	5354	5282	5490
50	5521	5411	5378	5275	5459
55	5510	5353	5335	5321	5654
60	5407	5645	5600	5307	5666
65	5611	5333	5636	5674	5417
70	5647	5381	5599	5625	5464
75	5396	5668	5433	5387	5635
80	5604	5379	5305	5549	5311
85	5643	5680	5669	5491	5685
90	5290	5328	5526	5576	5678
95	5371	5638	5451	5489	5722

Type 6 Radar Waveform_10

Frequency List (MHz)	0	1	2	3	4
0	5374	5584	5650	5653	5289
5	5433	5303	5719	5352	5449
10	5456	5269	5638	5340	5674
15	5448	5414	5325	5397	5698
20	5398	5350	5618	5435	5401
25	5304	5315	5372	5488	5692
30	5440	5508	5655	5474	5598
35	5539	5534	5704	5252	5434
40	5453	5666	5516	5600	5689
45	5569	5703	5565	5479	5277
50	5360	5405	5371	5313	5465
55	5502	5332	5656	5481	5482
60	5500	5266	5486	5708	5591
65	5326	5256	5605	5443	5395
70	5611	5570	5622	5677	5623
75	5568	5270	5510	5377	5445
80	5495	5597	5450	5632	5324
85	5282	5512	5503	5419	5696
90	5416	5364	5328	5373	5319
95	5307	5383	5607	5657	5361

Type 6 Radar Waveform_11

Frequency List (MHz)	0	1	2	3	4
0	5629	5348	5586	5339	5509
5	5572	5703	5319	5515	5656
10	5290	5533	5679	5535	5695
15	5536	5541	5428	5345	5415
20	5309	5419	5559	5524	5374
25	5667	5642	5575	5592	5251
30	5716	5329	5465	5395	5723
35	5418	5581	5625	5500	5405
40	5489	5604	5659	5597	5618
45	5452	5435	5286	5366	5531
50	5439	5456	5460	5514	5312
55	5690	5664	5655	5475	5611
60	5665	5686	5318	5534	5537
65	5624	5680	5641	5653	5287
70	5414	5608	5302	5590	5599
75	5299	5440	5390	5358	5697
80	5620	5276	5513	5519	5282
85	5561	5384	5272	5698	5529
90	5334	5640	5633	5331	5324
95	5438	5591	5372	5539	5577

Type 6 Radar Waveform_12

Frequency List (MHz)	0	1	2	3	4
0	5312	5587	5522	5500	5351
5	5614	5250	5394	5678	5388
10	5696	5322	5720	5255	5716
15	5624	5571	5531	5390	5607
20	5317	5585	5516	5347	5458
25	5591	5681	5318	5285	5283
30	5315	5422	5610	5400	5616
35	5338	5296	5655	5262	5328
40	5542	5424	5594	5450	5432
45	5518	5344	5671	5631	5407
50	5615	5507	5549	5337	5256
55	5403	5618	5370	5294	5423
60	5265	5355	5253	5625	5457
65	5580	5350	5629	5485	5557
70	5595	5336	5691	5305	5342
75	5575	5258	5409	5510	5699
80	5339	5377	5633	5532	5353
85	5673	5626	5660	5535	5252
90	5701	5437	5694	5340	5674
95	5515	5440	5341	5493	5367

Type 6 Radar Waveform_13

Frequency List (MHz)	0	1	2	3	4
0	5567	5351	5458	5661	5571
5	5656	5650	5469	5366	5595
10	5627	5586	5286	5353	5262
15	5615	5698	5537	5435	5421
20	5325	5654	5538	5605	5320
25	5346	5443	5409	5422	5319
30	5679	5379	5350	5649	5436
35	5384	5429	5333	5273	5642
40	5324	5480	5664	5591	5412
45	5601	5305	5724	5518	5283
50	5316	5558	5260	5635	5578
55	5572	5560	5491	5297	5394
60	5520	5673	5554	5526	5551
65	5616	5695	5449	5398	5408
70	5677	5405	5666	5454	5692
75	5281	5533	5367	5629	5268
80	5313	5517	5261	5623	5531
85	5563	5342	5507	5277	5685
90	5716	5708	5300	5549	5358
95	5548	5265	5400	5308	5577

Type 6 Radar Waveform_14

Frequency List (MHz)	0	1	2	3	4
0	5347	5590	5394	5413	5698
5	5672	5544	5529	5424	5461
10	5472	5327	5548	5283	5703
15	5350	5640	5480	5613	5711
20	5345	5479	5597	5293	5612
25	5295	5526	5353	5464	5568
30	5336	5468	5326	5256	5426
35	5520	5460	5486	5662	5481
40	5407	5418	5429	5685	5308
45	5392	5684	5363	5302	5634
50	5492	5609	5349	5458	5522
55	5304	5653	5310	5268	5618
60	5386	5584	5374	5527	5652
65	5719	5676	5663	5408	5515
70	5430	5651	5250	5510	5301
75	5406	5281	5569	5681	5324
80	5523	5251	5563	5659	5558
85	5699	5560	5706	5536	5549
90	5449	5645	5657	5561	5603
95	5638	5379	5411	5300	5257

Type 6 Radar Waveform_15

Frequency List (MHz)	0	1	2	3	4
0	5602	5354	5330	5411	5633
5	5362	5597	5619	5595	5631
10	5392	5261	5368	5268	5304
15	5316	5477	5428	5719	5414
20	5420	5686	5266	5500	5340
25	5630	5387	5506	5554	5293
30	5683	5575	5454	5565	5611
35	5256	5576	5417	5490	5259
40	5572	5682	5615	5372	5292
45	5421	5355	5670	5413	5668
50	5660	5438	5659	5369	5492
55	5480	5604	5714	5555	5375
60	5693	5507	5515	5476	5591
65	5262	5514	5479	5649	5364
70	5406	5610	5694	5298	5556
75	5282	5658	5391	5350	5370
80	5520	5446	5466	5501	5618
85	5319	5706	5455	5679	5539
90	5489	5624	5536	5352	5336
95	5692	5496	5408	5523	5519