

FCC TEST REPORT

Client Name : Micronet Union Technology(Chengdu) Co., Ltd
Address : Room 502, Building 5, N.O. 528, Yuefei Road, Shibantan Street, Xindu District, Chengdu, Sichuan, China
Product Name : AC1200 Gigabit Dual Band Wi-Fi Router
Date : Dec. 14, 2021

Shenzhen Anbotek Compliance Laboratory Limited



Contents

| | |
|---|----|
| 1. General Information..... | 5 |
| 1.1. Client Information..... | 5 |
| 1.2. Description of Device (EUT)..... | 5 |
| 1.3. Auxiliary Equipment Used During Test..... | 7 |
| 1.4. Description of Test Modes..... | 7 |
| 1.5. List of channels..... | 8 |
| 1.6. Description Of Test Setup..... | 9 |
| 1.7. Test Equipment List..... | 10 |
| 1.8. Measurement Uncertainty..... | 11 |
| 1.9. Description of Test Facility..... | 11 |
| 2. Summary of Test Results..... | 12 |
| 3. Conducted Emission Test..... | 13 |
| 3.1. Test Standard and Limit..... | 13 |
| 3.2. Test Setup..... | 13 |
| 3.3. Test Procedure..... | 13 |
| 3.4. Test Data..... | 13 |
| 4. Radiation Spurious Emission and Band Edge..... | 18 |
| 4.1. Test Standard and Limit..... | 18 |
| 4.2. Test Setup..... | 18 |
| 4.3. Test Procedure..... | 19 |
| 4.4. Test Data..... | 20 |
| 5. Maximum Output Power Test..... | 42 |
| 5.1. Test Standard and Limit..... | 42 |
| 5.2. Test Setup..... | 42 |
| 5.3. Test Procedure..... | 42 |
| 5.4. Test Data..... | 42 |
| 6. 6DB Occupy Bandwidth Test..... | 43 |
| 6.1. Test Standard and Limit..... | 43 |
| 6.2. Test Setup..... | 43 |
| 6.3. Test Procedure..... | 43 |
| 6.4. Test Data..... | 43 |
| 7. Power Spectral Density Test..... | 44 |
| 7.1. Test Standard and Limit..... | 44 |
| 7.2. Test Setup..... | 44 |
| 7.3. Test Procedure..... | 44 |
| 7.4. Test Data..... | 44 |
| 8. 100kHz Bandwidth of Frequency Band Edge Requirement..... | 45 |
| 8.1. Test Standard and Limit..... | 45 |

8.2. Test Setup.....45

8.3. Test Procedure.....45

8.4. Test Data.....45

9. Antenna Requirement.....46

9.1. Test Standard and Requirement.....46

9.2. Antenna Connected Construction.....46

APPENDIX I -- TEST SETUP PHOTOGRAPH.....47

APPENDIX II -- EXTERNAL PHOTOGRAPH.....49

APPENDIX III -- INTERNAL PHOTOGRAPH.....55

APPENDIX IV – Appendix Test Data.....59

TEST REPORT

Applicant : Micronet Union Technology(Chengdu) Co., Ltd
Manufacturer : Micronet Union Technology(Chengdu) Co., Ltd
Product Name : AC1200 Gigabit Dual Band Wi-Fi Router
Model No. : T18-21X (X=A-Z or a-z), T18-PQX (X=A-Z or a-z), T18-BXX (X=A-Z or a-z)
(the last X=A-Z or a-z, which indicates for different appearance, dimension and color.)
Trade Mark : N.A.
Rating(s) : Input: DC 12V, 1A
Test Standard(s) : **FCC Part15 Subpart C, Section 15.247**
Test Method(s) : **ANSI C63.10: 2020, KDB 558074 D01 15.247 Meas Guidance v05r02**
KDB 662911 D01 Multiple Transmitter Output v02r01

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Oct. 22, 2021

Date of Test

Oct. 25~Dec. 01, 2021

Prepared by



(Ella Liang)

Approved & Authorized Signer



(Kingkong Jin)

1. General Information

1.1. Client Information

| | | |
|--------------|---|--|
| Applicant | : | Micronet Union Technology(Chengdu) Co., Ltd |
| Address | : | Room 502, Building 5, N.O. 528, Yuefei Road, Shibantan Street, Xindu District, Chengdu, Sichuan, China |
| Manufacturer | : | Micronet Union Technology(Chengdu) Co., Ltd |
| Address | : | Room 502, Building 5, N.O. 528, Yuefei Road, Shibantan Street, Xindu District, Chengdu, Sichuan, China |
| Factory | : | Micronet Union Technology(Chengdu) Co., Ltd |
| Address | : | Room 502, Building 5, N.O. 528, Yuefei Road, Shibantan Street, Xindu District, Chengdu, Sichuan, China |

1.2. Description of Device (EUT)

| | | |
|---------------------|----------------------|--|
| Product Name | : | AC1200 Gigabit Dual Band Wi-Fi Router |
| Model No. | : | T18-21X (X=A-Z or a-z), T18-PQX (X=A-Z or a-z), T18-BXX (X=A-Z or a-z) (the last X=A-Z or a-z, which indicates for different appearance, dimension and color.) (Note: All samples are the same except the antenna of each series model is different, the antenna structure is different, and the color, shape, size are different, so we prepare T18-21A & T18-PQA & T18-BXA model for above 1GHz radiated emission test. Other items are test for T18-21A only.) |
| Trade Mark | : | N.A. |
| Test Power Supply | : | AC 120V, 60Hz for Adapter/ AC 240V, 60Hz for Adapter |
| Test Sample No. | : | 1-2-1(Normal Sample), 1-2-2(Engineering Sample) |
| Product Description | Operation Frequency: | 802.11b/ g/ n(HT20): 2412-2462MHz 802.11n (HT40): 2422-2452MHz WiFi 5.2G: 5180MHz~5240MHz WiFi 5.3G: 5260MHz~5320MHz WiFi 5.6G: 5500MHz~5580MHz, 5660MHz~5700MHz WiFi 5.8G: 5745MHz~5825MHz |
| | Number of Channel: | 802.11b/ g/ n(HT20): 11 Channels 802.11n (HT40): 7 Channels WiFi 5.2G: 4 Channels for 802.11a/n(HT20)/ac(HT20) 2 Channels for 802.11n(HT40)/ac(HT40) 1 Channels for 802.11ac(HT80) WiFi 5.3G: 4 Channels for 802.11a/n(HT20)/ac(HT20) 2 Channels for 802.11n(HT40)/ac(HT40) |

| | |
|---------------------|--|
| | <p>1 Channels for 802.11ac(HT80) WiFi 5.6G: 8 Channels for 802.11a/n(HT20)/ac(HT20) 3 Channels for 802.11n(HT40)/ac(HT40) 1 Channels for 802.11ac(HT80) WiFi 5.8G: 5 Channels for 802.11a/n(HT20)/ac(HT20) 2 Channels for 802.11n(HT40)/ac(HT40) 1 Channels for 802.11ac(HT80)</p> |
| Modulation Type: | <p>WiFi 2.4G: CCK, DQPSK, DBPSK for DSSS; 64QAM, 16QAM, QPSK, BPSK for OFDM WiFi 5G: OFDM with BPSK, QPSK, 16QAM, 64QAM, 256QAM</p> |
| Antenna Type: | <p>For T18-21A: WiFi 2.4G: External Antenna WiFi 5G: External Antenna For T18-PQA & T18-BXA: WiFi 2.4G: PCB Antenna WiFi 5G: PCB Antenna</p> |
| Antenna Gain(Peak): | <p>For T18-21A: WiFi 2.4G ANT1/ ANT2: 5dBi (Provided by customer) WiFi 5G ANT1/ ANT2: 5dBi (Provided by customer) For T18-PQA & T18-BXA: WiFi 2.4G ANT1/ ANT2: 4dBi (Provided by customer) WiFi 5G ANT1/ ANT2: 4dBi (Provided by customer)</p> |
| Directional Gain: | <p>For T18-21A: WiFi 2.4G: 8.01dBi WiFi 5.2G/5.3G/5.6G/5.8G: 8.01dBi For T18-PQA /T18-BXA: WiFi 2.4G: 7.01dBi WiFi 5.2G/5.3G/5.6G/5.8G: 7.01dBi</p> |
| Adapter : | <p>Model No: MAUS-1201101202 Input: 100-240V~50/ 60Hz 0.35A Output: 12V=1.0A PN: MAUS-120100200026</p> |

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for WIFI 2.4G module. 3) Only 802.11n(HT20), 802.11n(HT40) support MIMO.

1.3. Auxiliary Equipment Used During Test

| | | |
|-----|---|--|
| N/A | : | |
|-----|---|--|

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

RADIATED EMISSION TEST (BELOW 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| Mode | Available Channel | Test Channel | Modulation Tech. | Data Rate (Mbps) |
|----------------|-------------------|--------------|------------------|------------------|
| 802.11n (HT20) | 1 to 11 | 1, 6, 11 | OFDM | 6.5 |

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| Mode | Available Channel | Test Channel | Modulation Tech. | Data Rate (Mbps) |
|----------------|-------------------|--------------|------------------|------------------|
| 802.11n (HT20) | 1 to 11 | 1, 6, 11 | OFDM | 6.5 |

POWER LINE CONDUCTED EMISSION TEST:

The EUT was tested with the following mode

| Mode | Available Channel | Test Channel | Modulation Tech. | Data Rate (Mbps) |
|----------------|-------------------|--------------|------------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | 1.0 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | 6.0 |
| 802.11n (HT20) | 1 to 11 | 1, 6, 11 | OFDM | 6.5 |
| 802.11n (HT40) | 3 to 9 | 3, 6, 9 | OFDM | 13.5 |

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| Mode | Available Channel | Test Channel | Modulation Tech. | Data Rate (Mbps) |
|----------------|-------------------|--------------|------------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | 1.0 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | 6.0 |
| 802.11n (HT20) | 1 to 11 | 1, 6, 11 | OFDM | 6.5 |
| 802.11n (HT40) | 3 to 9 | 3, 6, 9 | OFDM | 13.5 |

ANTENNA PORT CONDUCTED MEASUREMENT:

This item includes all value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).



Following channel(s) was (were) selected for the final test as listed below.

| Mode | Available Channel | Test Channel | Modulation Tech. | Data Rate (Mbps) |
|----------------|-------------------|--------------|------------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | 1.0 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | 6.0 |
| 802.11n (HT20) | 1 to 11 | 1, 6, 11 | OFDM | 6.5 |
| 802.11n (HT40) | 3 to 9 | 3, 6, 9 | OFDM | 13.5 |

1.5. List of channels

| Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 01 | 2412 | 04 | 2427 | 07 | 2442 | 10 | 2457 |
| 02 | 2417 | 05 | 2432 | 08 | 2447 | 11 | 2462 |
| 03 | 2422 | 06 | 2437 | 09 | 2452 | | |

1.6. Description Of Test Setup

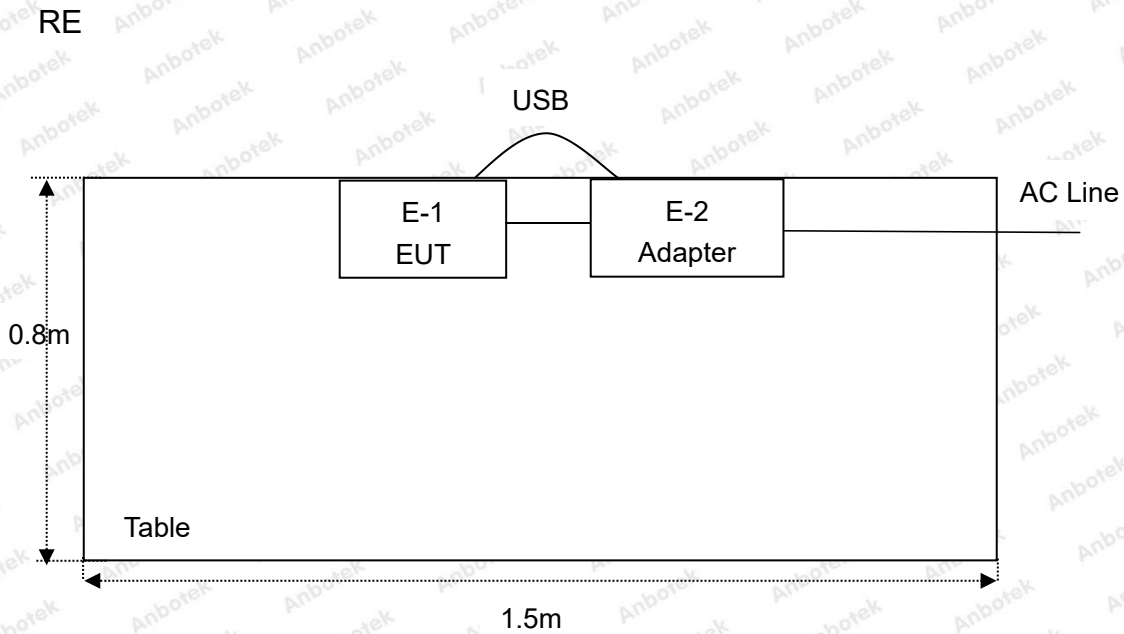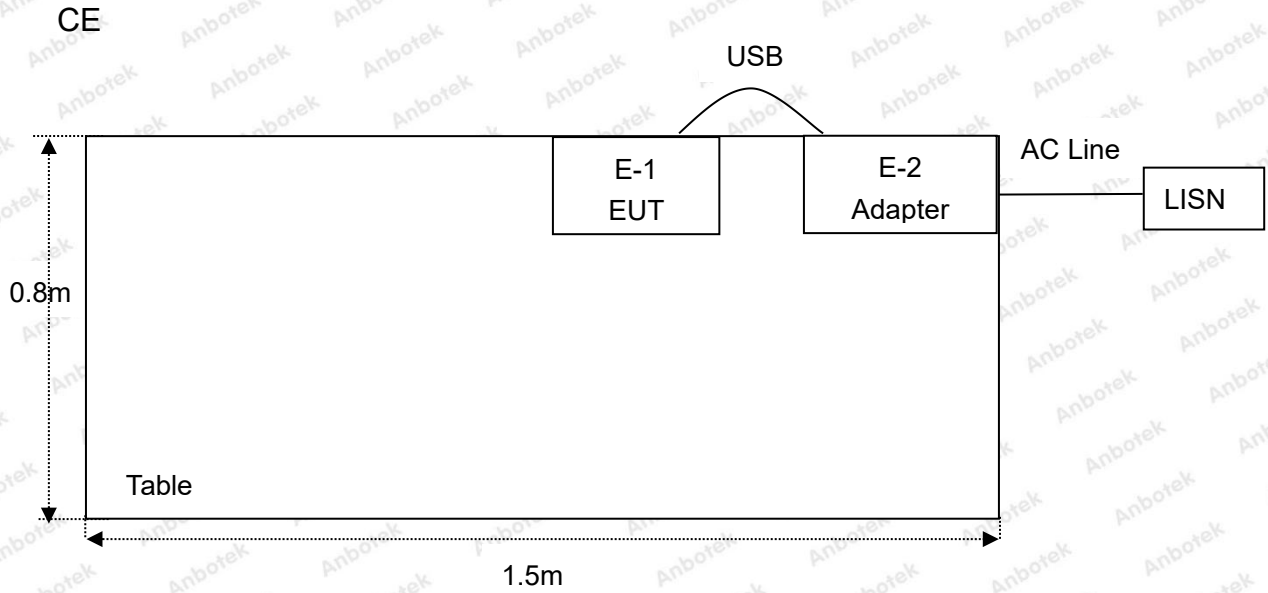

1.7. Test Equipment List

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|---|-------------------------|---------------|---------------|---------------|---------------|
| 1. | Three Phase V-type Artificial Power Network | CYBERTEK | EM5040DT | E215040DT001 | Jul 05, 2021 | 1 Year |
| 2. | EMI Test Receiver | Rohde & Schwarz | ESCI | 100627 | Oct. 22, 2021 | 1 Year |
| 3. | EMI Test Receiver | Rohde & Schwarz | ESR26 | 101481 | Oct. 22, 2021 | 1 Year |
| 4. | RF Switching Unit | Compliance Direction | RSU-M2 | 38303 | Oct. 22, 2021 | 1 Year |
| 5. | MAX Spectrum Analysis | Agilent | N9020A | MY51170037 | Oct. 22, 2021 | 1 Year |
| 6. | Preamplifier | SKET Electronic | BK1G18G30 D | KD17503 | Oct. 22, 2021 | 1 Year |
| 7. | Double Ridged Horn Antenna | Instruments corporation | GTH-0118 | 351600 | Oct. 22, 2021 | 2 Year |
| 8. | Bilog Broadband Antenna | Schwarzbeck | VULB9163 | VULB 9163-289 | Oct. 22, 2021 | 2 Year |
| 9. | Loop Antenna | Schwarzbeck | FMZB1519B | 00053 | Oct. 22, 2021 | 2 Year |
| 10. | Horn Antenna | A-INFO | LB-180400-K F | J211060628 | Oct. 22, 2021 | 2 Year |
| 11. | Pre-amplifier | SONOMA | 310N | 186860 | Oct. 22, 2021 | 1 Year |
| 12. | EMI Test Software EZ-EMC | SHURPLE | N/A | N/A | N/A | N/A |
| 13. | RF Test Control System | YIHENG | YH3000 | 2017430 | Oct. 22, 2021 | 1 Year |
| 14. | Power Sensor | DAER | RPR3006W | 15100041SN045 | Oct. 22, 2021 | 1 Year |
| 15. | Power Sensor | DAER | RPR3006W | 15100041SN046 | Oct. 22, 2021 | 1 Year |
| 16. | MXA Spectrum Analysis | KEYSIGHT | N9020A | MY53280032 | Oct. 22, 2021 | 1 Year |
| 17. | MXG RF Vector Signal Generator | Agilent | N5182A | MY48180656 | Oct. 22, 2021 | 1 Year |
| 18. | Signal Generator | Agilent | E4421B | MY41000743 | Oct. 22, 2021 | 1 Year |
| 19. | DC Power Supply | IVYTECH | IV3605 | 1804D360510 | Oct. 22, 2021 | 1 Year |
| 20. | Constant Temperature Humidity Chamber | ZHONGJIAN | ZJ-KHWS80 B | N/A | Oct. 22, 2021 | 1 Year |

1.8. Measurement Uncertainty

| | | |
|------------------------|---|--------------------------|
| Radiation Uncertainty | : | Ur = 3.9 dB (Horizontal) |
| | | Ur = 3.8 dB (Vertical) |
| Conduction Uncertainty | : | Uc = 3.4 dB |

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

| Standard Section | Test Item | Result |
|---|-----------------------------|--------|
| 15.203/15.247(c) | Antenna Requirement | PASS |
| 15.207 | Conducted Emission | PASS |
| 15.205/15.209 | Spurious Emission | PASS |
| 15.247(b)(3) | Conducted Peak Output Power | PASS |
| 15.247(a)(2) | 6dB Occupied Bandwidth | PASS |
| 15.247(e) | Power Spectral Density | PASS |
| 15.247(d) | Band Edge | PASS |
| Remark: "N/A" is an abbreviation for Not Applicable. | | |


3. Conducted Emission Test

3.1. Test Standard and Limit

| Test Standard | FCC Part15 Section 15.207 | | |
|---------------|---------------------------|--------------------------------|---------------|
| Test Limit | Frequency | Maximum RF Line Voltage (dBuV) | |
| | | Quasi-peak Level | Average Level |
| | 150kHz~500kHz | 66 ~ 56 * | 56 ~ 46 * |
| | 500kHz~5MHz | 56 | 46 |
| 5MHz~30MHz | 60 | 50 | |

Remark: (1) *Decreasing linearly with logarithm of the frequency.
 (2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

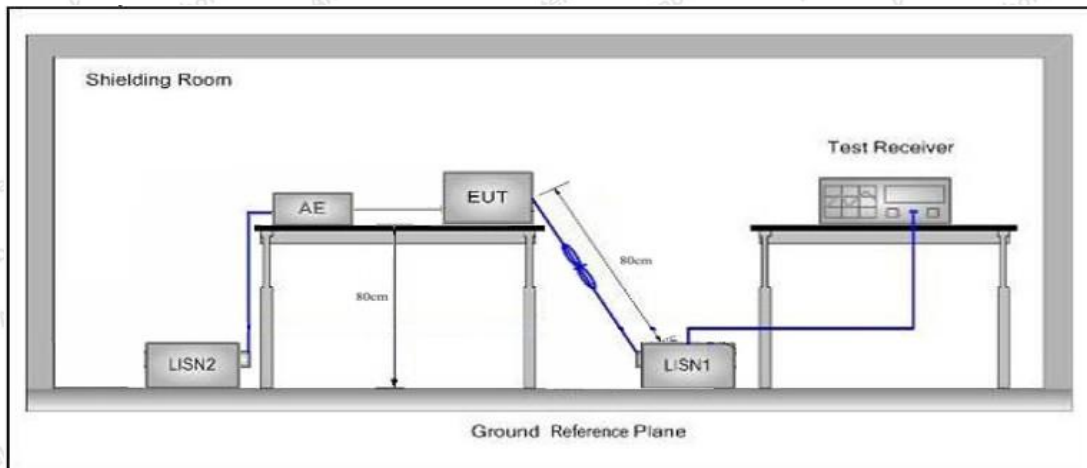

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes and all the Antenna Gain(5dBi and 4dBi), and found the 802.11n (HT20) CH11 ANT1+ANT2(5dBi) of which is the worst case, only the worst case is recorded in the report.

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Test Model: T18-21A
 Operating Condition: 802.11n (HT20) CH11 ANT1+ANT2
 Test Specification: AC 120V, 60Hz for Adapter
 Comment: Live Line
 Tem.: 23.7°C Hum.: 48%

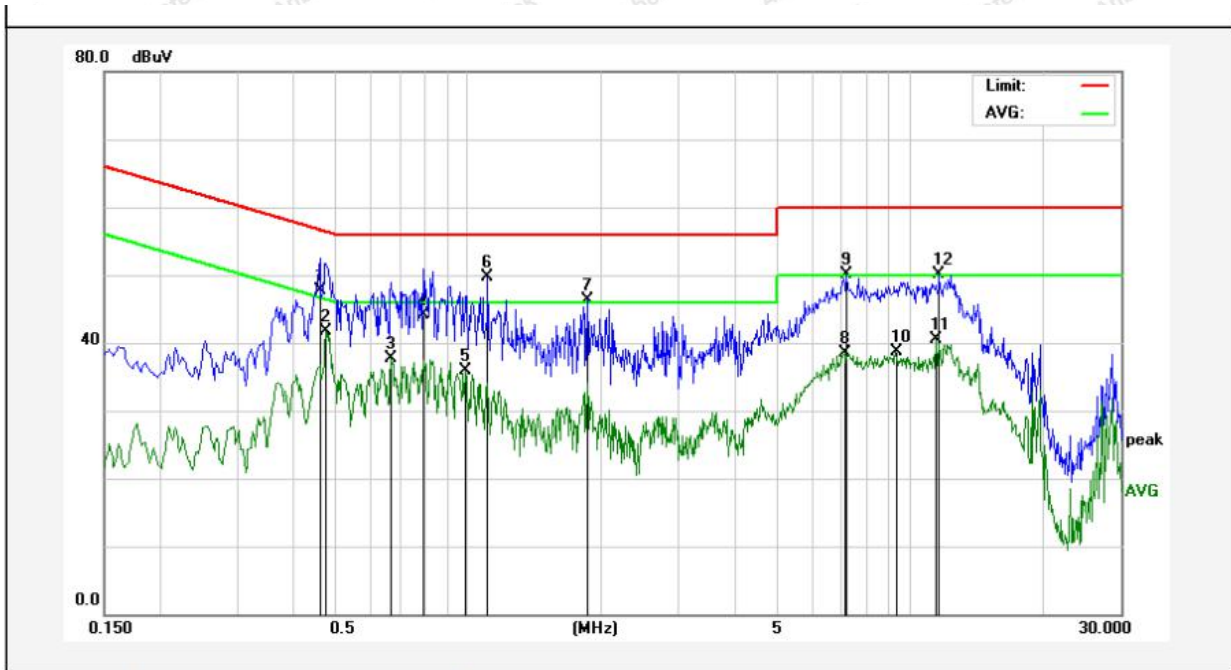

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-----------------|----------|--------|
| 1 | 0.4620 | 47.59 | 0.13 | 47.72 | 56.66 | -8.94 | QP | |
| 2 | 0.4780 | 41.52 | 0.14 | 41.66 | 46.37 | -4.71 | AVG | |
| 3 | 0.6700 | 37.63 | 0.15 | 37.78 | 46.00 | -8.22 | AVG | |
| 4 | 0.7940 | 43.95 | 0.15 | 44.10 | 56.00 | -11.90 | QP | |
| 5 | 0.9860 | 35.83 | 0.15 | 35.98 | 46.00 | -10.02 | AVG | |
| 6 | 1.1060 | 49.61 | 0.15 | 49.76 | 56.00 | -6.24 | QP | |
| 7 | 1.8620 | 46.20 | 0.12 | 46.32 | 56.00 | -9.68 | QP | |
| 8 | 7.1180 | 38.36 | 0.11 | 38.47 | 50.00 | -11.53 | AVG | |
| 9 | 7.2020 | 50.07 | 0.11 | 50.18 | 60.00 | -9.82 | QP | |
| 10 | 9.3020 | 38.50 | 0.12 | 38.62 | 50.00 | -11.38 | AVG | |
| 11 | 11.4660 | 40.32 | 0.13 | 40.45 | 50.00 | -9.55 | AVG | |
| 12 | 11.6500 | 49.87 | 0.14 | 50.01 | 60.00 | -9.99 | QP | |

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Test Model: T18-21A
 Operating Condition: 802.11n (HT20) CH11 ANT1+ANT2
 Test Specification: AC 120V, 60Hz for Adapter
 Comment: Neutral Line
 Tem.: 23.7°C Hum.: 48%

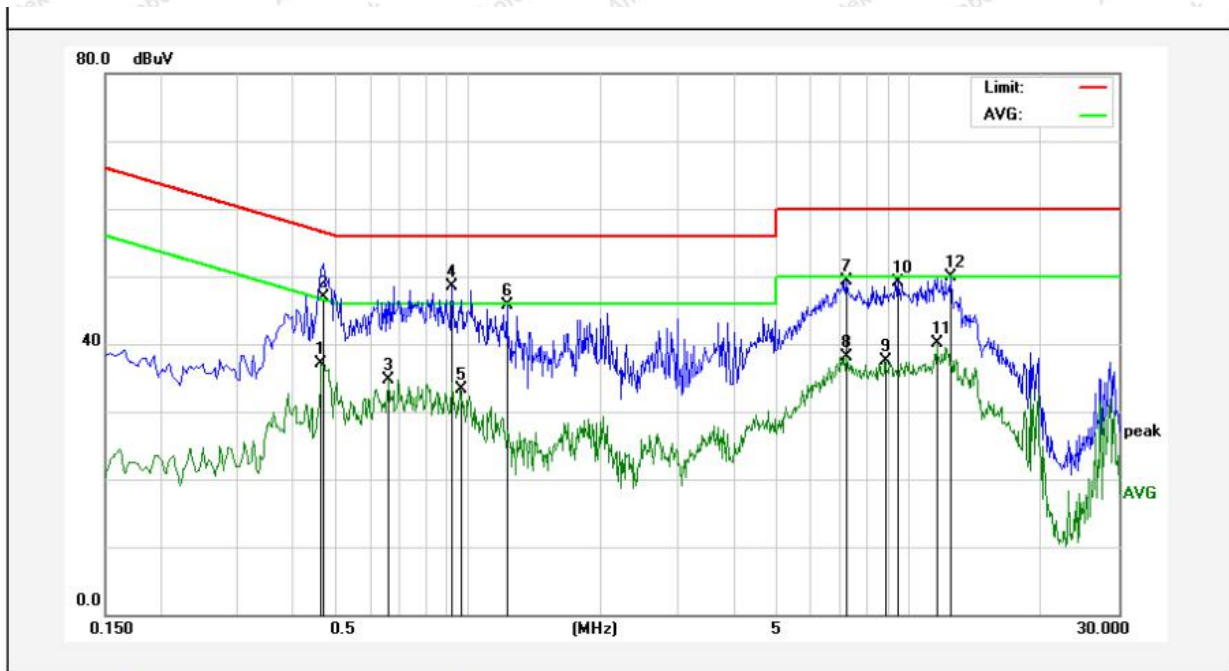

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-----------------|----------|--------|
| 1 | 0.4660 | 37.05 | 0.14 | 37.19 | 46.58 | -9.39 | AVG | |
| 2 | 0.4700 | 46.76 | 0.14 | 46.90 | 56.51 | -9.61 | QP | |
| 3 | 0.6580 | 34.55 | 0.15 | 34.70 | 46.00 | -11.30 | AVG | |
| 4 | 0.9220 | 48.39 | 0.15 | 48.54 | 56.00 | -7.46 | QP | |
| 5 | 0.9620 | 33.18 | 0.15 | 33.33 | 46.00 | -12.67 | AVG | |
| 6 | 1.2260 | 45.51 | 0.14 | 45.65 | 56.00 | -10.35 | QP | |
| 7 | 7.2300 | 49.17 | 0.11 | 49.28 | 60.00 | -10.72 | QP | |
| 8 | 7.2300 | 38.01 | 0.11 | 38.12 | 50.00 | -11.88 | AVG | |
| 9 | 8.8260 | 37.36 | 0.12 | 37.48 | 50.00 | -12.52 | AVG | |
| 10 | 9.4819 | 49.08 | 0.12 | 49.20 | 60.00 | -10.80 | QP | |
| 11 | 11.5860 | 40.00 | 0.14 | 40.14 | 50.00 | -9.86 | AVG | |
| 12 | 12.5060 | 49.68 | 0.15 | 49.83 | 60.00 | -10.17 | QP | |

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Test Model: T18-21A
 Operating Condition: 802.11n (HT20) CH11 ANT1+ANT2
 Test Specification: AC 240V, 60Hz for Adapter
 Comment: Live Line
 Tem.: 23.7°C Hum.: 48%

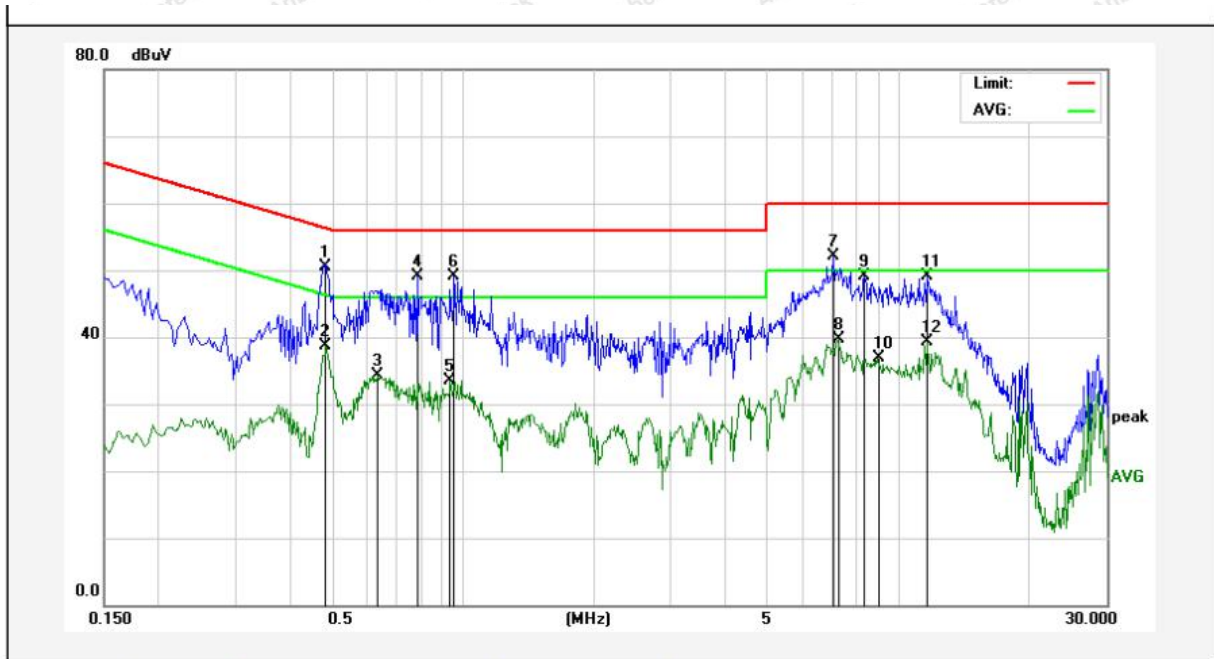

| No. | Freq. (MHz) | Reading (dBUV) | Factor (dB) | Result (dBUV) | Limit (dBUV) | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-----------------|----------|--------|
| 1 | 0.4860 | 50.36 | 0.14 | 50.50 | 56.24 | -5.74 | QP | |
| 2 | 0.4860 | 38.54 | 0.14 | 38.68 | 46.24 | -7.56 | AVG | |
| 3 | 0.6380 | 34.10 | 0.15 | 34.25 | 46.00 | -11.75 | AVG | |
| 4 | 0.7860 | 48.89 | 0.15 | 49.04 | 56.00 | -6.96 | QP | |
| 5 | 0.9380 | 33.45 | 0.15 | 33.60 | 46.00 | -12.40 | AVG | |
| 6 | 0.9540 | 48.94 | 0.15 | 49.09 | 56.00 | -6.91 | QP | |
| 7 | 7.0980 | 52.04 | 0.11 | 52.15 | 60.00 | -7.85 | QP | |
| 8 | 7.2620 | 39.52 | 0.11 | 39.63 | 50.00 | -10.37 | AVG | |
| 9 | 8.3540 | 49.03 | 0.12 | 49.15 | 60.00 | -10.85 | QP | |
| 10 | 8.9220 | 36.76 | 0.12 | 36.88 | 50.00 | -13.12 | AVG | |
| 11 | 11.5860 | 48.97 | 0.14 | 49.11 | 60.00 | -10.89 | QP | |
| 12 | 11.5860 | 39.23 | 0.14 | 39.37 | 50.00 | -10.63 | AVG | |

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Test Model: T18-21A
 Operating Condition: 802.11n (HT20) CH11 ANT1+ANT2
 Test Specification: AC 240V, 60Hz for Adapter
 Comment: Neutral Line
 Tem.: 23.7°C Hum.: 48%

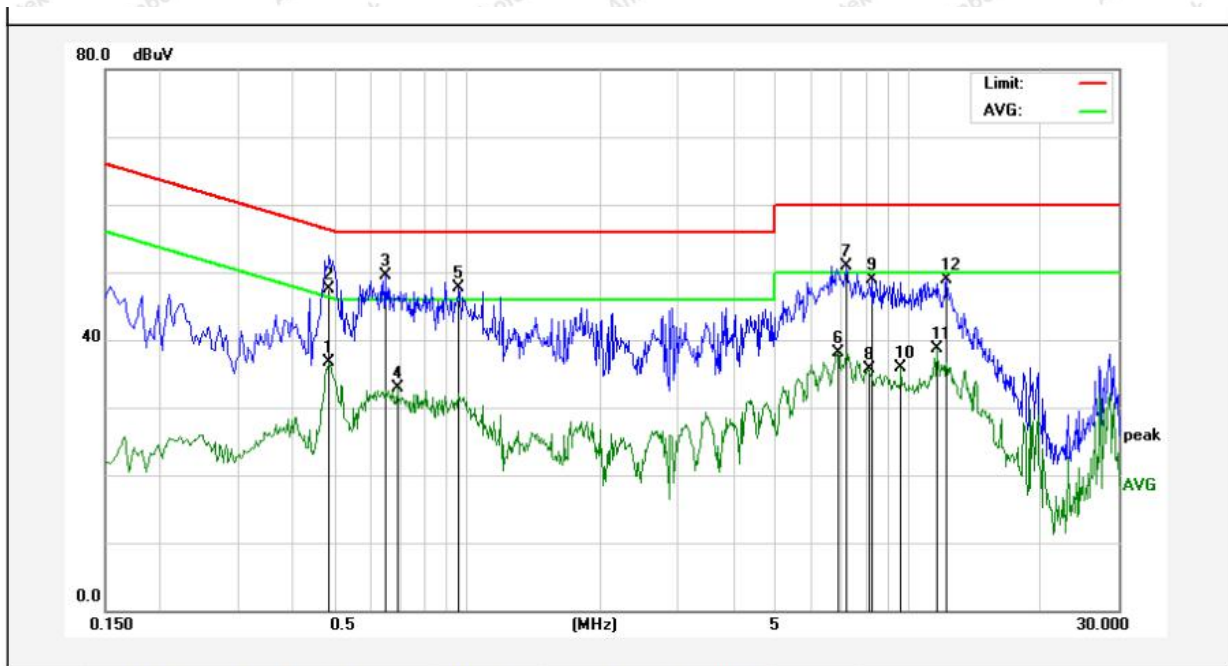

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-----------------|----------|--------|
| 1 | 0.4820 | 36.48 | 0.14 | 36.62 | 46.30 | -9.68 | AVG | |
| 2 | 0.4860 | 47.45 | 0.14 | 47.59 | 56.24 | -8.65 | QP | |
| 3 | 0.6500 | 49.26 | 0.15 | 49.41 | 56.00 | -6.59 | QP | |
| 4 | 0.6900 | 32.70 | 0.15 | 32.85 | 46.00 | -13.15 | AVG | |
| 5 | 0.9580 | 47.54 | 0.15 | 47.69 | 56.00 | -8.31 | QP | |
| 6 | 6.9339 | 38.01 | 0.11 | 38.12 | 50.00 | -11.88 | AVG | |
| 7 | 7.2459 | 50.87 | 0.11 | 50.98 | 60.00 | -9.02 | QP | |
| 8 | 8.1259 | 35.49 | 0.12 | 35.61 | 50.00 | -14.39 | AVG | |
| 9 | 8.2858 | 48.82 | 0.12 | 48.94 | 60.00 | -11.06 | QP | |
| 10 | 9.6139 | 35.77 | 0.12 | 35.89 | 50.00 | -14.11 | AVG | |
| 11 | 11.5859 | 38.59 | 0.14 | 38.73 | 50.00 | -11.27 | AVG | |
| 12 | 12.2018 | 48.78 | 0.14 | 48.92 | 60.00 | -11.08 | QP | |

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

| Test Standard | FCC Part15 C Section 15.209 and 15.205 | | | | |
|---------------|--|----------------------------------|----------------|------------|--------------------------|
| Test Limit | Frequency (MHz) | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark | Measurement distance (m) |
| | 0.009MHz~0.490MHz | 2400/F(kHz) | - | - | 300 |
| | 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 |
| | 1.705MHz-30MHz | 30 | - | - | 30 |
| | 30MHz~88MHz | 100 | 40.0 | Quasi-peak | 3 |
| | 88MHz~216MHz | 150 | 43.5 | Quasi-peak | 3 |
| | 216MHz~960MHz | 200 | 46.0 | Quasi-peak | 3 |
| | 960MHz~1000MHz | 500 | 54.0 | Quasi-peak | 3 |
| | | | 54.0 | Average | 3 |
| Above 1000MHz | - | 74.0 | Peak | 3 | |

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

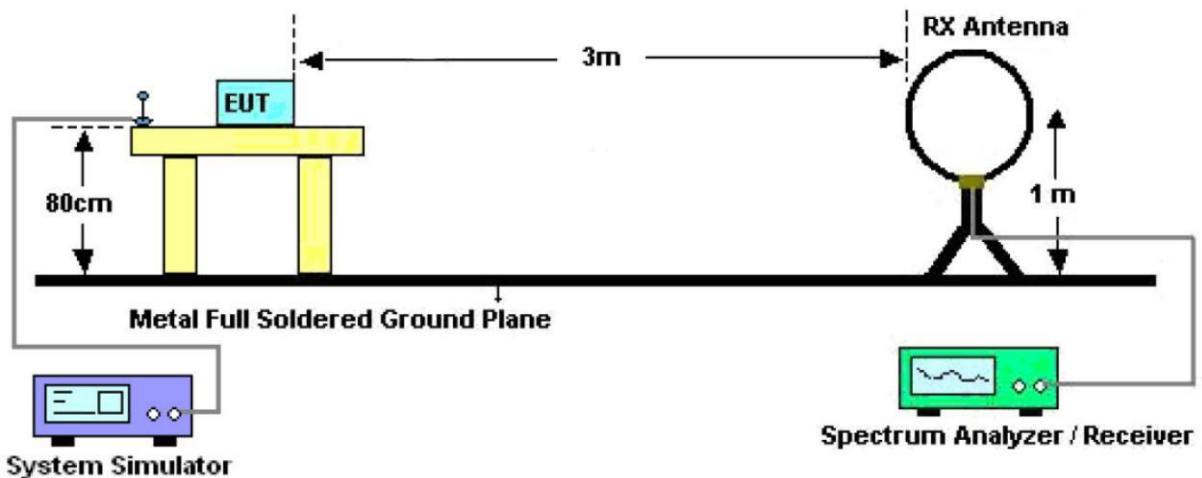


Figure 1. Below 30MHz

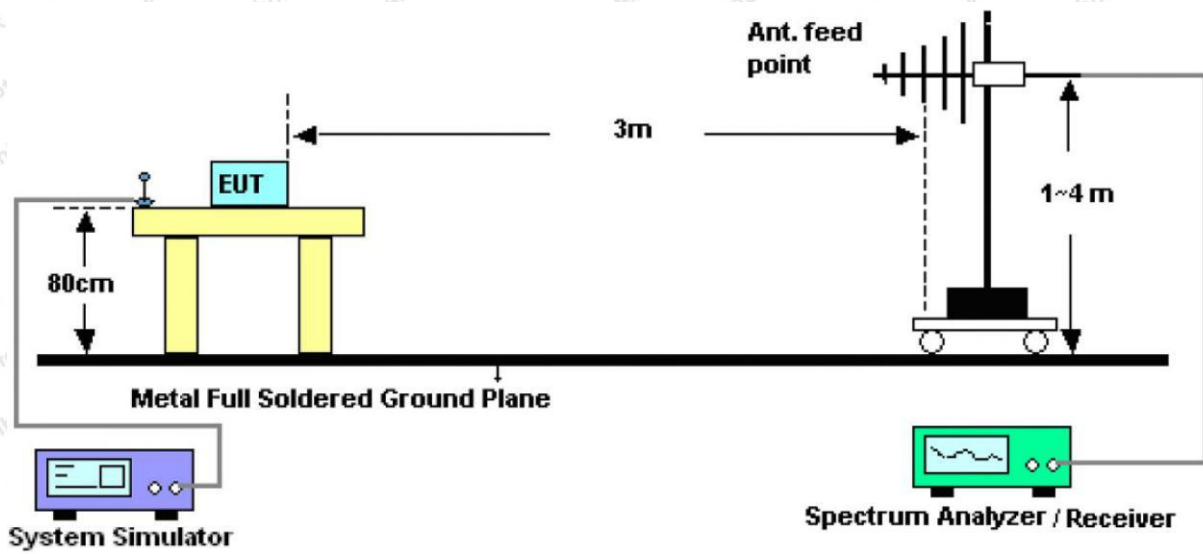


Figure 2. 30MHz to 1GHz

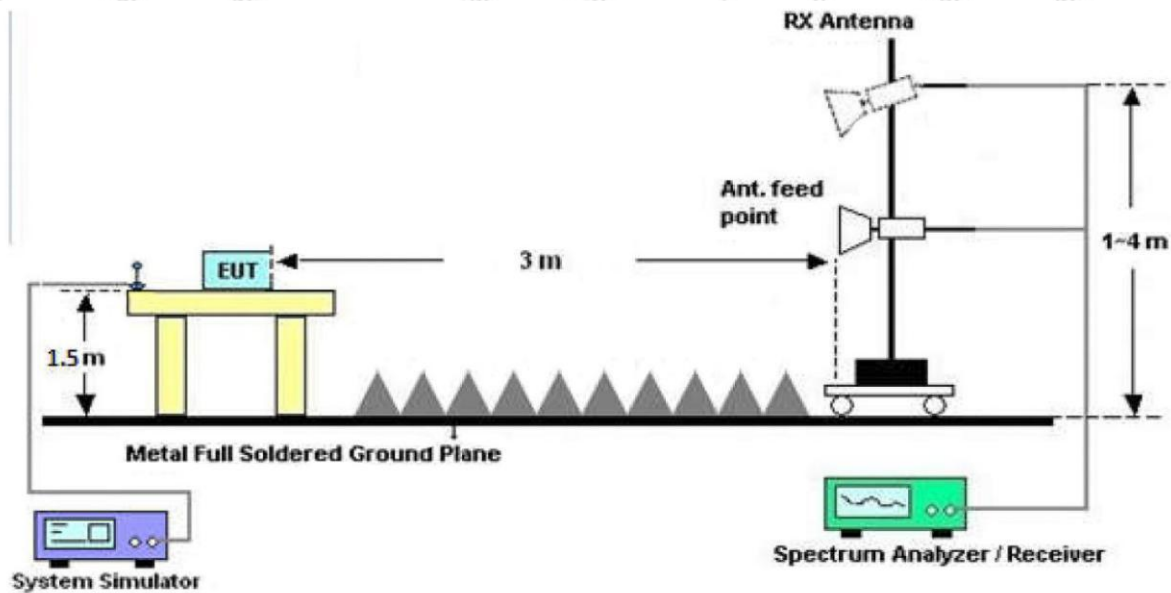


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

For average measurement:

-VBW=10Hz, When duty cycle is no less than 98 percent

- $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.4 duty cycle.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes and all the Antenna Gain(5dBi and 4dBi), and found the 802.11n (HT20) CH11 ANT1+ANT2(5dBi) which is the worst case, only the worst case is recorded in the report.



Test Results (30~1000MHz)


Test Model: T18-21A
 Test Mode: 802.11n (HT20) CH11 ANT1+ANT2
 Temp.(°C)/Hum.(%RH): 23.2°C/48%RH
 Polarization: Horizontal
 Power Source: AC 120V, 60Hz for Adapter

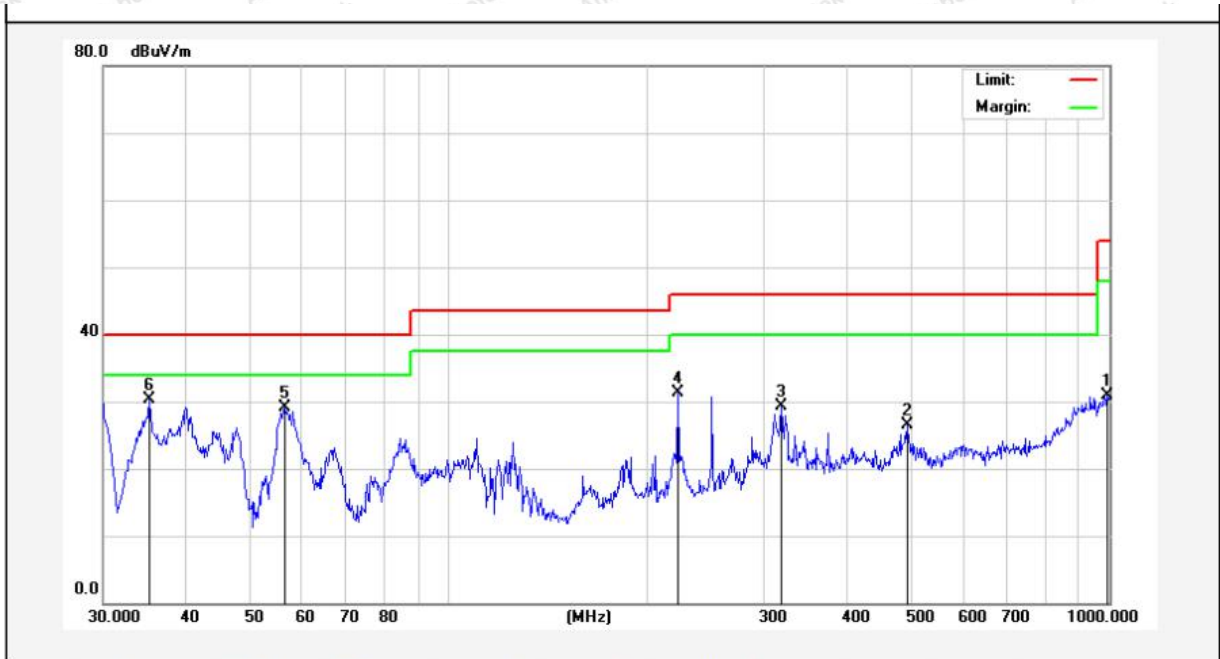

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 993.0113 | 30.83 | 0.15 | 30.98 | 54.00 | -23.02 | QP | | | |
| 2 | 494.1983 | 36.86 | -10.30 | 26.56 | 46.00 | -19.44 | QP | | | |
| 3 | 318.8170 | 43.16 | -13.80 | 29.36 | 46.00 | -16.64 | QP | | | |
| 4 | 222.1698 | 50.79 | -19.41 | 31.38 | 46.00 | -14.62 | QP | | | |
| 5 | 56.3947 | 45.55 | -16.44 | 29.11 | 40.00 | -10.89 | QP | | | |
| 6 | 35.2511 | 47.67 | -17.45 | 30.22 | 40.00 | -9.78 | QP | | | |

Test Results (30~1000MHz)


Test Model: T18-21A
 Test Mode: 802.11n (HT20) CH11 ANT1+ANT2
 Temp.(°C)/Hum.(%RH): 23.2°C/48%RH
 Polarization: Vertical
 Power Source: AC 120V, 60Hz for Adapter

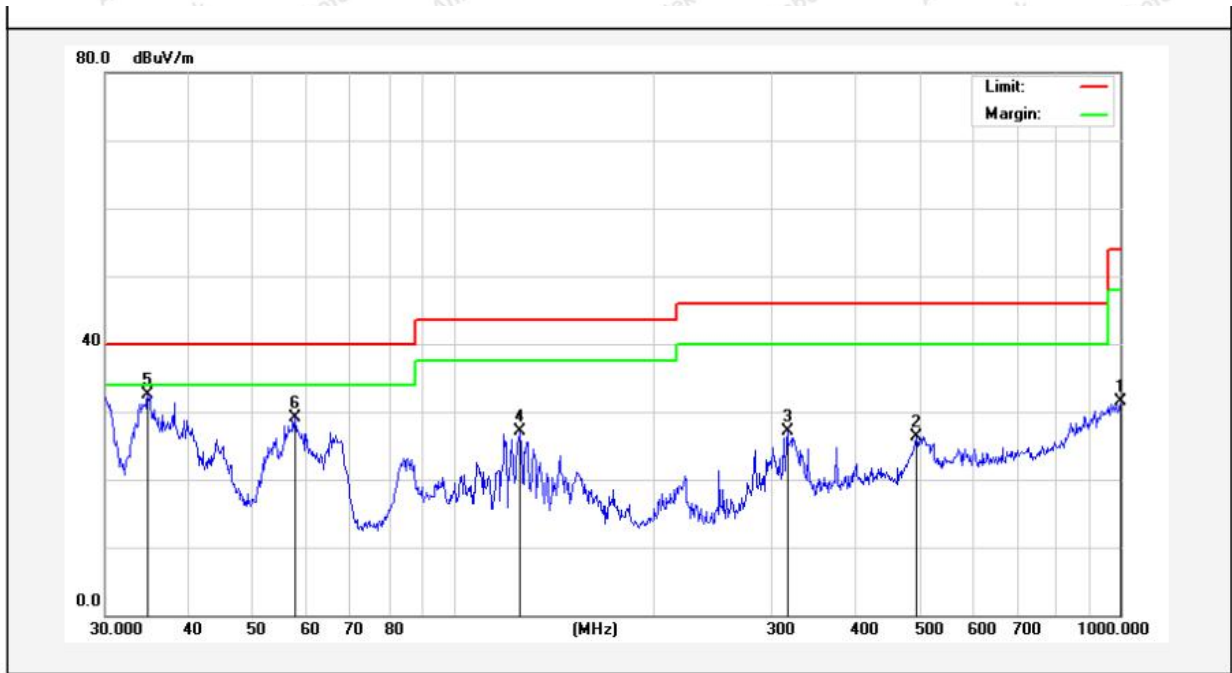

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 1000.0000 | 31.13 | 0.32 | 31.45 | 54.00 | -22.55 | QP | | | |
| 2 | 494.1983 | 35.11 | -8.73 | 26.38 | 46.00 | -19.62 | QP | | | |
| 3 | 316.5889 | 40.12 | -12.93 | 27.19 | 46.00 | -18.81 | QP | | | |
| 4 | 125.8863 | 45.84 | -18.79 | 27.05 | 43.50 | -16.45 | QP | | | |
| 5 | 34.7601 | 48.84 | -16.32 | 32.52 | 40.00 | -7.48 | QP | | | |
| 6 | 57.7961 | 45.36 | -16.35 | 29.01 | 40.00 | -10.99 | QP | | | |

Test Results (30~1000MHz)


Test Model: T18-PQA
 Test Mode: 802.11n (HT20) CH11 ANT1+ANT2
 Temp.(°C)/Hum.(%RH): 23.2°C/48%RH
 Polarization: Horizontal
 Power Source: AC 120V, 60Hz for Adapter

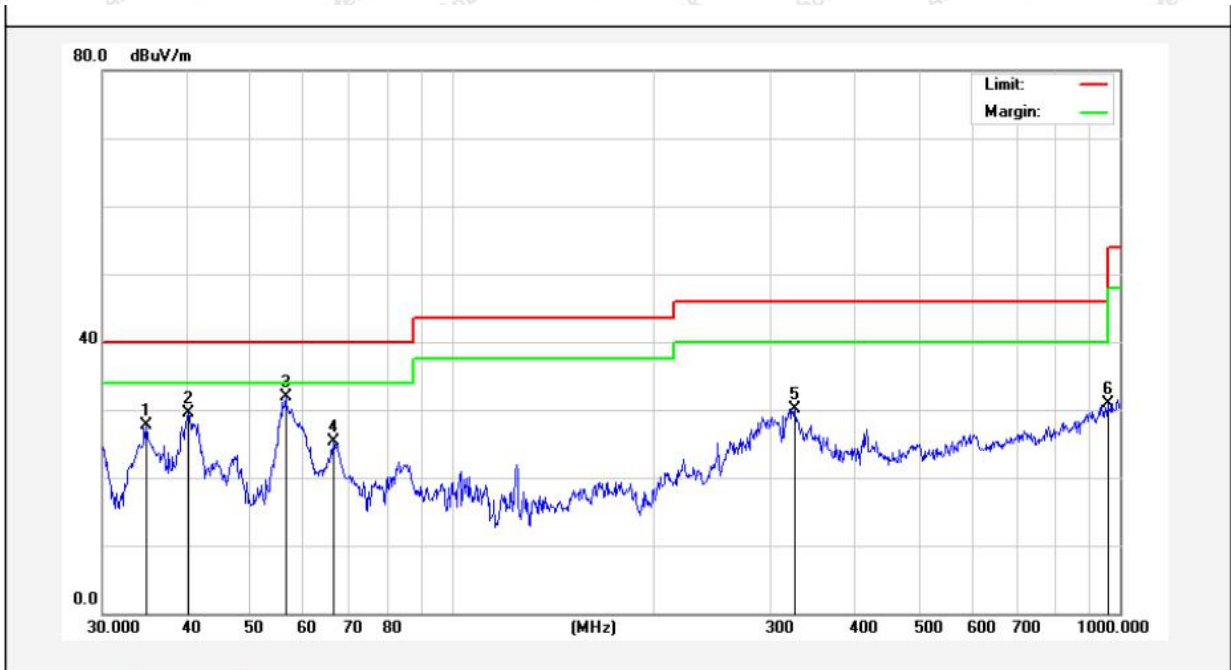

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 34.8823 | 45.40 | -17.63 | 27.77 | 40.00 | -12.23 | QP | | | |
| 2 | 40.4172 | 44.42 | -14.98 | 29.44 | 40.00 | -10.56 | QP | | | |
| 3 | 56.3947 | 48.44 | -16.44 | 32.00 | 40.00 | -8.00 | QP | | | |
| 4 | 66.4989 | 44.22 | -18.84 | 25.38 | 40.00 | -14.62 | QP | | | |
| 5 | 325.5957 | 43.83 | -13.63 | 30.20 | 46.00 | -15.80 | QP | | | |
| 6 | 958.7943 | 31.49 | -0.64 | 30.85 | 46.00 | -15.15 | QP | | | |

Test Results (30~1000MHz)


Test Model: T18-PQA
 Test Mode: 802.11n (HT20) CH11 ANT1+ANT2
 Temp.(°C)/Hum.(%RH): 23.2°C/48%RH
 Polarization: Vertical
 Power Source: AC 120V, 60Hz for Adapter

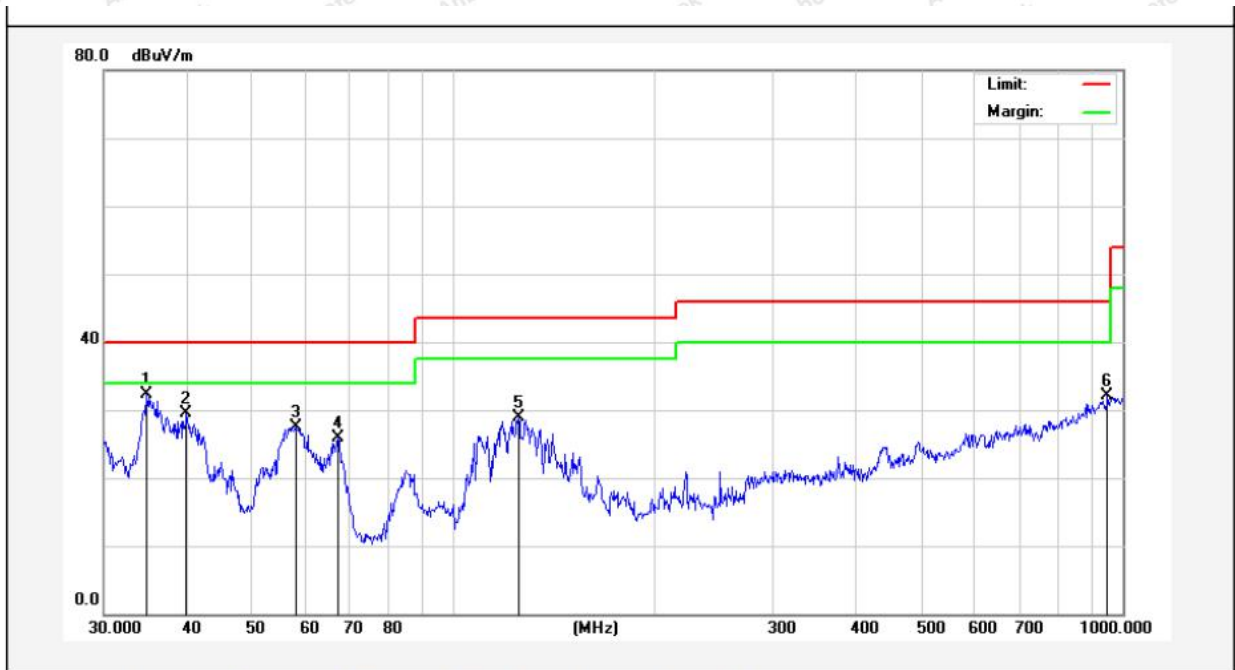

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 34.7601 | 48.63 | -16.32 | 32.31 | 40.00 | -7.69 | QP | | | |
| 2 | 39.8541 | 43.13 | -13.65 | 29.48 | 40.00 | -10.52 | QP | | | |
| 3 | 57.9992 | 43.76 | -16.33 | 27.43 | 40.00 | -12.57 | QP | | | |
| 4 | 67.2022 | 44.15 | -18.23 | 25.92 | 40.00 | -14.08 | QP | | | |
| 5 | 125.0066 | 47.52 | -18.66 | 28.86 | 43.50 | -14.64 | QP | | | |
| 6 | 948.7608 | 32.90 | -0.85 | 32.05 | 46.00 | -13.95 | QP | | | |

Test Results (30~1000MHz)


Test Model: T18-BXA
 Test Mode: 802.11n (HT20) CH11 ANT1+ANT2
 Temp.(°C)/Hum.(%RH): 23.2°C/48%RH
 Polarization: Horizontal
 Power Source: AC 120V, 60Hz for Adapter

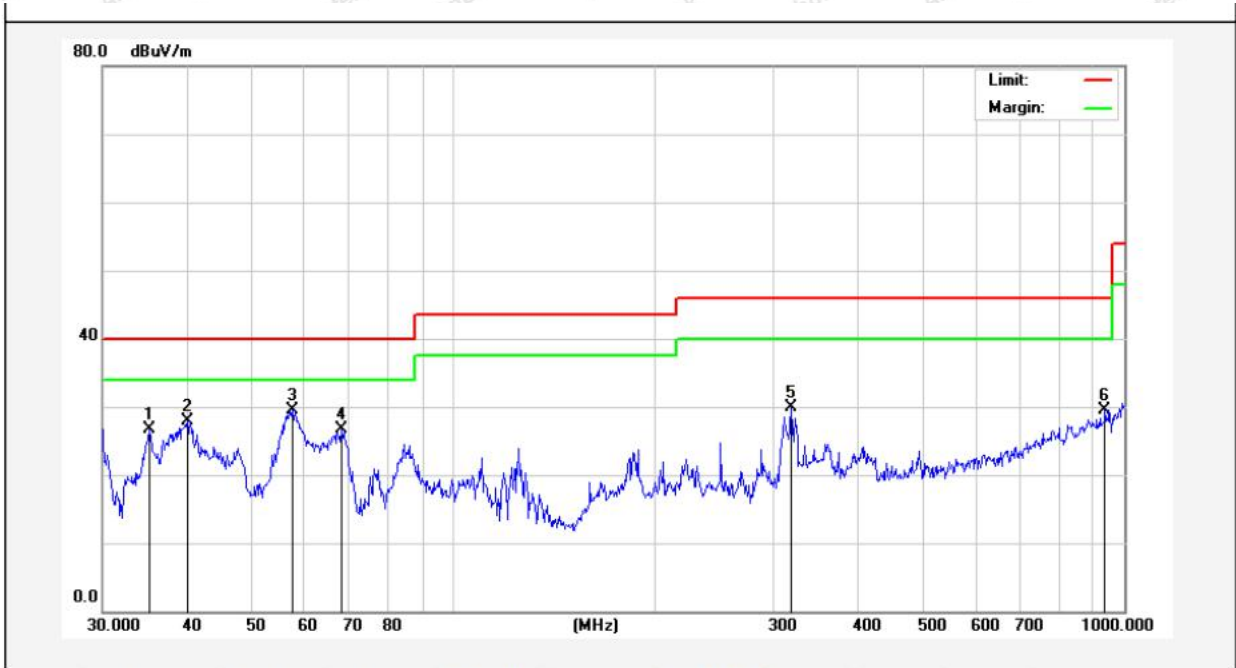

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 35.2511 | 44.17 | -17.45 | 26.72 | 40.00 | -13.28 | QP | | | |
| 2 | 40.1347 | 42.90 | -15.03 | 27.87 | 40.00 | -12.13 | QP | | | |
| 3 | 57.5938 | 45.95 | -16.36 | 29.59 | 40.00 | -10.41 | QP | | | |
| 4 | 68.1512 | 46.45 | -19.78 | 26.67 | 40.00 | -13.33 | QP | | | |
| 5 | 318.8170 | 43.66 | -13.80 | 29.86 | 46.00 | -16.14 | QP | | | |
| 6 | 935.5461 | 30.69 | -1.09 | 29.60 | 46.00 | -16.40 | QP | | | |

Test Results (30~1000MHz)

Test Model: T18-BXA
 Test Mode: 802.11n (HT20) CH11 ANT1+ANT2
 Temp.(°C)/Hum.(%RH): 23.2°C/48%RH
 Polarization: Vertical
 Power Source: AC 120V, 60Hz for Adapter

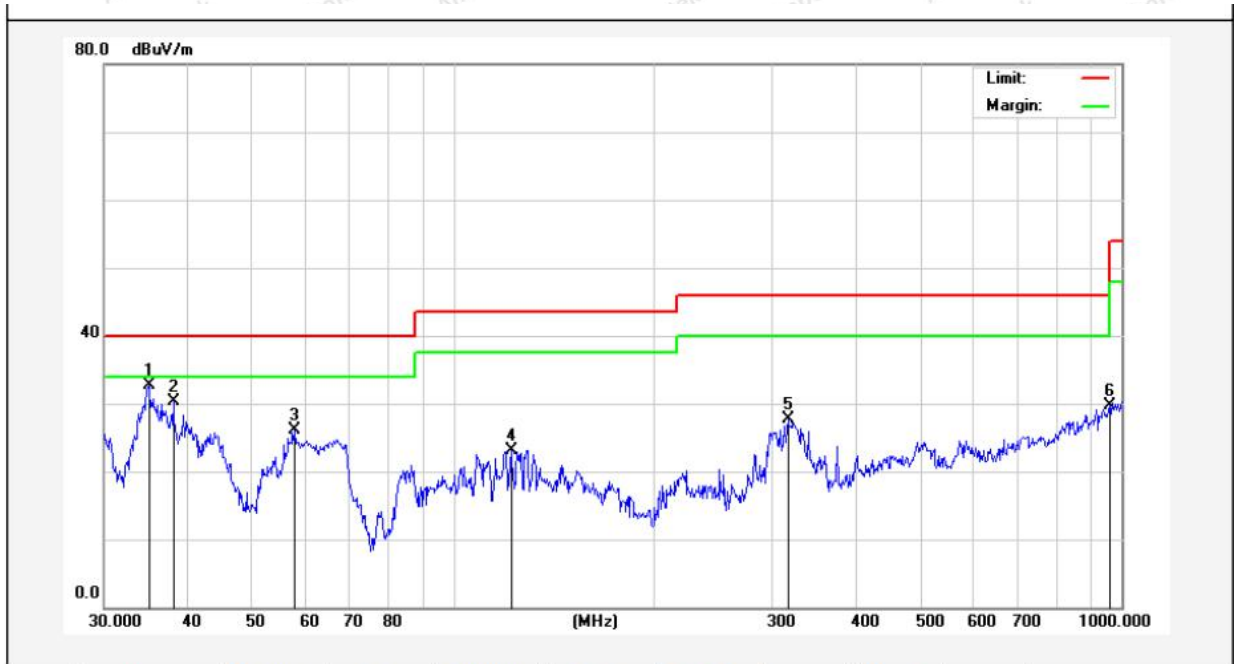

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 35.0048 | 49.00 | -16.27 | 32.73 | 40.00 | -7.27 | QP | | | |
| 2 | 38.0782 | 44.98 | -14.62 | 30.36 | 40.00 | -9.64 | QP | | | |
| 3 | 57.7961 | 42.36 | -16.35 | 26.01 | 40.00 | -13.99 | QP | | | |
| 4 | 121.9753 | 41.28 | -18.21 | 23.07 | 43.50 | -20.43 | QP | | | |
| 5 | 316.5889 | 40.62 | -12.93 | 27.69 | 46.00 | -18.31 | QP | | | |
| 6 | 958.7943 | 30.33 | -0.64 | 29.69 | 46.00 | -16.31 | QP | | | |

For Model T18-21A:

Test Results (Above 1000MHz)

| Test Mode: 802.11n (HT20) Mode | | | | Test channel: Lowest | | |
|--------------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4824.00 | 28.13 | 15.31 | 43.44 | 74.00 | -30.56 | Vertical |
| 7236.00 | 28.93 | 18.06 | 46.99 | 74.00 | -27.01 | Vertical |
| 9648.00 | 29.77 | 23.77 | 53.54 | 74.00 | -20.46 | Vertical |
| 12060.00 | * | | | 74.00 | | Vertical |
| 14472.00 | * | | | 74.00 | | Vertical |
| 4824.00 | 28.73 | 15.31 | 44.04 | 74.00 | -29.96 | Horizontal |
| 7236.00 | 28.04 | 18.06 | 46.10 | 74.00 | -27.90 | Horizontal |
| 9648.00 | 27.65 | 23.77 | 51.42 | 74.00 | -22.58 | Horizontal |
| 12060.00 | * | | | 74.00 | | Horizontal |
| 14472.00 | * | | | 74.00 | | Horizontal |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4824.00 | 19.22 | 15.31 | 34.53 | 54.00 | -19.47 | Vertical |
| 7236.00 | 19.80 | 18.06 | 37.86 | 54.00 | -16.14 | Vertical |
| 9648.00 | 20.02 | 23.77 | 43.79 | 54.00 | -10.21 | Vertical |
| 12060.00 | * | | | 54.00 | | Vertical |
| 14472.00 | * | | | 54.00 | | Vertical |
| 4824.00 | 19.28 | 15.31 | 34.59 | 54.00 | -19.41 | Horizontal |
| 7236.00 | 18.62 | 18.06 | 36.68 | 54.00 | -17.32 | Horizontal |
| 9648.00 | 18.62 | 23.77 | 42.39 | 54.00 | -11.61 | Horizontal |
| 12060.00 | * | | | 54.00 | | Horizontal |
| 14472.00 | * | | | 54.00 | | Horizontal |

Test Results (Above 1000MHz)

| Test Mode: 802.11n (HT20) Mode | | | | Test channel: Middle | | |
|--------------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4874.00 | 29.50 | 15.41 | 44.91 | 74.00 | -29.09 | Vertical |
| 7311.00 | 29.12 | 18.01 | 47.13 | 74.00 | -26.87 | Vertical |
| 9748.00 | 30.09 | 23.79 | 53.88 | 74.00 | -20.12 | Vertical |
| 12185.00 | * | | | 74.00 | | Vertical |
| 14622.00 | * | | | 74.00 | | Vertical |
| 4874.00 | 29.72 | 15.41 | 45.13 | 74.00 | -28.87 | Horizontal |
| 7311.00 | 30.61 | 18.01 | 48.62 | 74.00 | -25.38 | Horizontal |
| 9748.00 | 31.09 | 23.79 | 54.88 | 74.00 | -19.12 | Horizontal |
| 12185.00 | * | | | 74.00 | | Horizontal |
| 14622.00 | * | | | 74.00 | | Horizontal |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4874.00 | 20.20 | 15.41 | 35.61 | 54.00 | -18.39 | Vertical |
| 7311.00 | 19.02 | 18.01 | 37.03 | 54.00 | -16.97 | Vertical |
| 9748.00 | 20.79 | 23.79 | 44.58 | 54.00 | -9.42 | Vertical |
| 12185.00 | * | | | 54.00 | | Vertical |
| 14622.00 | * | | | 54.00 | | Vertical |
| 4874.00 | 19.62 | 15.41 | 35.03 | 54.00 | -18.97 | Horizontal |
| 7311.00 | 20.01 | 18.01 | 38.02 | 54.00 | -15.98 | Horizontal |
| 9748.00 | 20.99 | 23.79 | 44.78 | 54.00 | -9.22 | Horizontal |
| 12185.00 | * | | | 54.00 | | Horizontal |
| 14622.00 | * | | | 54.00 | | Horizontal |

Test Results (Above 1000MHz)

| Test Mode: 802.11n (HT20) Mode | | | | Test channel: Highest | | |
|--------------------------------|----------------|---------------|-----------------|-----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4924.00 | 27.67 | 15.51 | 43.18 | 74.00 | -30.82 | Vertical |
| 7386.00 | 28.65 | 17.97 | 46.62 | 74.00 | -27.38 | Vertical |
| 9848.00 | 30.06 | 23.82 | 53.88 | 74.00 | -20.12 | Vertical |
| 12310.00 | * | | | 74.00 | | Vertical |
| 14772.00 | * | | | 74.00 | | Vertical |
| 4924.00 | 26.92 | 15.51 | 42.43 | 74.00 | -31.57 | Horizontal |
| 7386.00 | 27.91 | 17.97 | 45.88 | 74.00 | -28.12 | Horizontal |
| 9848.00 | 27.54 | 23.82 | 51.36 | 74.00 | -22.64 | Horizontal |
| 12310.00 | * | | | 74.00 | | Horizontal |
| 14772.00 | * | | | 74.00 | | Horizontal |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4924.00 | 18.60 | 15.51 | 34.11 | 54.00 | -19.89 | Vertical |
| 7386.00 | 19.57 | 17.97 | 37.54 | 54.00 | -16.46 | Vertical |
| 9848.00 | 20.57 | 23.82 | 44.39 | 54.00 | -9.61 | Vertical |
| 12310.00 | * | | | 54.00 | | Vertical |
| 14772.00 | * | | | 54.00 | | Vertical |
| 4924.00 | 18.29 | 15.51 | 33.80 | 54.00 | -20.20 | Horizontal |
| 7386.00 | 18.31 | 17.97 | 36.28 | 54.00 | -17.72 | Horizontal |
| 9848.00 | 18.81 | 23.82 | 42.63 | 54.00 | -11.37 | Horizontal |
| 12310.00 | * | | | 54.00 | | Horizontal |
| 14772.00 | * | | | 54.00 | | Horizontal |

Remark:

1. During the test, pre-scan All antenna chains of the 802.11b,g,n(HT20),n(HT40) mode, and found the 802.11n (HT20) ANT1+ANT2 mode is worse case , the report only record this mode.
2. Result=Reading + Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.

For Model T18-PQA:

Test Results (Above 1000MHz)

| Test Mode: 802.11n (HT20) Mode | | | | Test channel: Lowest | | |
|--------------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4824.00 | 28.01 | 15.31 | 43.32 | 74.00 | -30.68 | Vertical |
| 7236.00 | 28.83 | 18.06 | 46.89 | 74.00 | -27.11 | Vertical |
| 9648.00 | 29.63 | 23.77 | 53.40 | 74.00 | -20.60 | Vertical |
| 12060.00 | * | | | 74.00 | | Vertical |
| 14472.00 | * | | | 74.00 | | Vertical |
| 4824.00 | 28.62 | 15.31 | 43.93 | 74.00 | -30.07 | Horizontal |
| 7236.00 | 27.89 | 18.06 | 45.95 | 74.00 | -28.05 | Horizontal |
| 9648.00 | 27.60 | 23.77 | 51.37 | 74.00 | -22.63 | Horizontal |
| 12060.00 | * | | | 74.00 | | Horizontal |
| 14472.00 | * | | | 74.00 | | Horizontal |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4824.00 | 19.10 | 15.31 | 34.41 | 54.00 | -19.59 | Vertical |
| 7236.00 | 19.70 | 18.06 | 37.76 | 54.00 | -16.24 | Vertical |
| 9648.00 | 19.88 | 23.77 | 43.65 | 54.00 | -10.35 | Vertical |
| 12060.00 | * | | | 54.00 | | Vertical |
| 14472.00 | * | | | 54.00 | | Vertical |
| 4824.00 | 19.17 | 15.31 | 34.48 | 54.00 | -19.52 | Horizontal |
| 7236.00 | 18.47 | 18.06 | 36.53 | 54.00 | -17.47 | Horizontal |
| 9648.00 | 18.57 | 23.77 | 42.34 | 54.00 | -11.66 | Horizontal |
| 12060.00 | * | | | 54.00 | | Horizontal |
| 14472.00 | * | | | 54.00 | | Horizontal |

Test Results (Above 1000MHz)

| Test Mode: 802.11n (HT20) Mode | | | | Test channel: Middle | | |
|--------------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4874.00 | 29.38 | 15.41 | 44.79 | 74.00 | -29.21 | Vertical |
| 7311.00 | 29.02 | 18.01 | 47.03 | 74.00 | -26.97 | Vertical |
| 9748.00 | 29.95 | 23.79 | 53.74 | 74.00 | -20.26 | Vertical |
| 12185.00 | * | | | 74.00 | | Vertical |
| 14622.00 | * | | | 74.00 | | Vertical |
| 4874.00 | 29.61 | 15.41 | 45.02 | 74.00 | -28.98 | Horizontal |
| 7311.00 | 30.46 | 18.01 | 48.47 | 74.00 | -25.53 | Horizontal |
| 9748.00 | 31.04 | 23.79 | 54.83 | 74.00 | -19.17 | Horizontal |
| 12185.00 | * | | | 74.00 | | Horizontal |
| 14622.00 | * | | | 74.00 | | Horizontal |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4874.00 | 20.08 | 15.41 | 35.49 | 54.00 | -18.51 | Vertical |
| 7311.00 | 18.92 | 18.01 | 36.93 | 54.00 | -17.07 | Vertical |
| 9748.00 | 20.65 | 23.79 | 44.44 | 54.00 | -9.56 | Vertical |
| 12185.00 | * | | | 54.00 | | Vertical |
| 14622.00 | * | | | 54.00 | | Vertical |
| 4874.00 | 19.51 | 15.41 | 34.92 | 54.00 | -19.08 | Horizontal |
| 7311.00 | 19.86 | 18.01 | 37.87 | 54.00 | -16.13 | Horizontal |
| 9748.00 | 20.94 | 23.79 | 44.73 | 54.00 | -9.27 | Horizontal |
| 12185.00 | * | | | 54.00 | | Horizontal |
| 14622.00 | * | | | 54.00 | | Horizontal |

Test Results (Above 1000MHz)

| Test Mode: 802.11n (HT20) Mode | | | | Test channel: Highest | | |
|--------------------------------|----------------|---------------|-----------------|-----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4924.00 | 27.55 | 15.51 | 43.06 | 74.00 | -30.94 | Vertical |
| 7386.00 | 28.55 | 17.97 | 46.52 | 74.00 | -27.48 | Vertical |
| 9848.00 | 29.92 | 23.82 | 53.74 | 74.00 | -20.26 | Vertical |
| 12310.00 | * | | | 74.00 | | Vertical |
| 14772.00 | * | | | 74.00 | | Vertical |
| 4924.00 | 26.81 | 15.51 | 42.32 | 74.00 | -31.68 | Horizontal |
| 7386.00 | 27.76 | 17.97 | 45.73 | 74.00 | -28.27 | Horizontal |
| 9848.00 | 27.49 | 23.82 | 51.31 | 74.00 | -22.69 | Horizontal |
| 12310.00 | * | | | 74.00 | | Horizontal |
| 14772.00 | * | | | 74.00 | | Horizontal |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4924.00 | 18.48 | 15.51 | 33.99 | 54.00 | -20.01 | Vertical |
| 7386.00 | 19.47 | 17.97 | 37.44 | 54.00 | -16.56 | Vertical |
| 9848.00 | 20.43 | 23.82 | 44.25 | 54.00 | -9.75 | Vertical |
| 12310.00 | * | | | 54.00 | | Vertical |
| 14772.00 | * | | | 54.00 | | Vertical |
| 4924.00 | 18.18 | 15.51 | 33.69 | 54.00 | -20.31 | Horizontal |
| 7386.00 | 18.16 | 17.97 | 36.13 | 54.00 | -17.87 | Horizontal |
| 9848.00 | 18.76 | 23.82 | 42.58 | 54.00 | -11.42 | Horizontal |
| 12310.00 | * | | | 54.00 | | Horizontal |
| 14772.00 | * | | | 54.00 | | Horizontal |

Remark:

1. During the test, pre-scan All antenna chains of the 802.11b,g,n(HT20),n(HT40) modes, and found the 802.11n (HT20) ANT1+ANT2 mode is worse case , the report only record this mode.
2. Result=Reading + Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.

For Model T18-BXA:

Test Results (Above 1000MHz)

| Test Mode: 802.11n (HT20) Mode | | | | Test channel: Lowest | | |
|--------------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4824.00 | 28.08 | 15.31 | 43.39 | 74.00 | -30.61 | Vertical |
| 7236.00 | 28.88 | 18.06 | 46.94 | 74.00 | -27.06 | Vertical |
| 9648.00 | 29.71 | 23.77 | 53.48 | 74.00 | -20.52 | Vertical |
| 12060.00 | * | | | 74.00 | | Vertical |
| 14472.00 | * | | | 74.00 | | Vertical |
| 4824.00 | 28.68 | 15.31 | 43.99 | 74.00 | -30.01 | Horizontal |
| 7236.00 | 27.97 | 18.06 | 46.03 | 74.00 | -27.97 | Horizontal |
| 9648.00 | 27.63 | 23.77 | 51.40 | 74.00 | -22.60 | Horizontal |
| 12060.00 | * | | | 74.00 | | Horizontal |
| 14472.00 | * | | | 74.00 | | Horizontal |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4824.00 | 19.17 | 15.31 | 34.48 | 54.00 | -19.52 | Vertical |
| 7236.00 | 19.75 | 18.06 | 37.81 | 54.00 | -16.19 | Vertical |
| 9648.00 | 19.96 | 23.77 | 43.73 | 54.00 | -10.27 | Vertical |
| 12060.00 | * | | | 54.00 | | Vertical |
| 14472.00 | * | | | 54.00 | | Vertical |
| 4824.00 | 19.23 | 15.31 | 34.54 | 54.00 | -19.46 | Horizontal |
| 7236.00 | 18.55 | 18.06 | 36.61 | 54.00 | -17.39 | Horizontal |
| 9648.00 | 18.60 | 23.77 | 42.37 | 54.00 | -11.63 | Horizontal |
| 12060.00 | * | | | 54.00 | | Horizontal |
| 14472.00 | * | | | 54.00 | | Horizontal |

Test Results (Above 1000MHz)

| Test Mode: 802.11n (HT20) Mode | | | | Test channel: Middle | | |
|--------------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4874.00 | 29.45 | 15.41 | 44.86 | 74.00 | -29.14 | Vertical |
| 7311.00 | 29.07 | 18.01 | 47.08 | 74.00 | -26.92 | Vertical |
| 9748.00 | 30.03 | 23.79 | 53.82 | 74.00 | -20.18 | Vertical |
| 12185.00 | * | | | 74.00 | | Vertical |
| 14622.00 | * | | | 74.00 | | Vertical |
| 4874.00 | 29.67 | 15.41 | 45.08 | 74.00 | -28.92 | Horizontal |
| 7311.00 | 30.54 | 18.01 | 48.55 | 74.00 | -25.45 | Horizontal |
| 9748.00 | 31.07 | 23.79 | 54.86 | 74.00 | -19.14 | Horizontal |
| 12185.00 | * | | | 74.00 | | Horizontal |
| 14622.00 | * | | | 74.00 | | Horizontal |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4874.00 | 20.15 | 15.41 | 35.56 | 54.00 | -18.44 | Vertical |
| 7311.00 | 18.97 | 18.01 | 36.98 | 54.00 | -17.02 | Vertical |
| 9748.00 | 20.73 | 23.79 | 44.52 | 54.00 | -9.48 | Vertical |
| 12185.00 | * | | | 54.00 | | Vertical |
| 14622.00 | * | | | 54.00 | | Vertical |
| 4874.00 | 19.57 | 15.41 | 34.98 | 54.00 | -19.02 | Horizontal |
| 7311.00 | 19.94 | 18.01 | 37.95 | 54.00 | -16.05 | Horizontal |
| 9748.00 | 20.97 | 23.79 | 44.76 | 54.00 | -9.24 | Horizontal |
| 12185.00 | * | | | 54.00 | | Horizontal |
| 14622.00 | * | | | 54.00 | | Horizontal |

Test Results (Above 1000MHz)

| Test Mode: 802.11n (HT20) Mode | | | | Test channel: Highest | | |
|--------------------------------|----------------|---------------|-----------------|-----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4924.00 | 27.62 | 15.51 | 43.13 | 74.00 | -30.87 | Vertical |
| 7386.00 | 28.60 | 17.97 | 46.57 | 74.00 | -27.43 | Vertical |
| 9848.00 | 30.00 | 23.82 | 53.82 | 74.00 | -20.18 | Vertical |
| 12310.00 | * | | | 74.00 | | Vertical |
| 14772.00 | * | | | 74.00 | | Vertical |
| 4924.00 | 26.87 | 15.51 | 42.38 | 74.00 | -31.62 | Horizontal |
| 7386.00 | 27.84 | 17.97 | 45.81 | 74.00 | -28.19 | Horizontal |
| 9848.00 | 27.52 | 23.82 | 51.34 | 74.00 | -22.66 | Horizontal |
| 12310.00 | * | | | 74.00 | | Horizontal |
| 14772.00 | * | | | 74.00 | | Horizontal |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4924.00 | 18.55 | 15.51 | 34.06 | 54.00 | -19.94 | Vertical |
| 7386.00 | 19.52 | 17.97 | 37.49 | 54.00 | -16.51 | Vertical |
| 9848.00 | 20.51 | 23.82 | 44.33 | 54.00 | -9.67 | Vertical |
| 12310.00 | * | | | 54.00 | | Vertical |
| 14772.00 | * | | | 54.00 | | Vertical |
| 4924.00 | 18.24 | 15.51 | 33.75 | 54.00 | -20.25 | Horizontal |
| 7386.00 | 18.24 | 17.97 | 36.21 | 54.00 | -17.79 | Horizontal |
| 9848.00 | 18.79 | 23.82 | 42.61 | 54.00 | -11.39 | Horizontal |
| 12310.00 | * | | | 54.00 | | Horizontal |
| 14772.00 | * | | | 54.00 | | Horizontal |

Remark:

1. During the test, pre-scan All antenna chains of the 802.11b,g,n(HT20),n(HT40) modes, and found the 802.11n (HT20) ANT1+ANT2 mode is worse case , the report only record this mode.
2. Result=Reading + Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.

For Model T18-21A(ANT1):

Radiated Band Edge:

| Test Mode: 802.11b Mode | | | | Test channel: Lowest | | |
|-------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 38.24 | 9.58 | 47.82 | 74.00 | -26.18 | Horizontal |
| 2390.00 | 40.64 | 9.73 | 50.37 | 74.00 | -23.63 | Horizontal |
| 2310.00 | 39.54 | 9.58 | 49.12 | 74.00 | -24.88 | Vertical |
| 2390.00 | 46.25 | 9.73 | 55.98 | 74.00 | -18.02 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 28.87 | 9.58 | 38.45 | 54.00 | -15.55 | Horizontal |
| 2390.00 | 36.08 | 9.73 | 45.81 | 54.00 | -8.19 | Horizontal |
| 2310.00 | 30.16 | 9.58 | 39.74 | 54.00 | -14.26 | Vertical |
| 2390.00 | 38.42 | 9.73 | 48.15 | 54.00 | -5.85 | Vertical |

| Test Mode: 802.11b Mode | | | | Test channel: Highest | | |
|-------------------------|----------------|---------------|-----------------|-----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 46.33 | 9.91 | 56.24 | 74.00 | -17.76 | Horizontal |
| 2500.00 | 40.35 | 9.94 | 50.29 | 74.00 | -23.71 | Horizontal |
| 2483.50 | 46.69 | 9.91 | 56.60 | 74.00 | -17.40 | Vertical |
| 2500.00 | 40.01 | 9.94 | 49.95 | 74.00 | -24.06 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 37.55 | 9.91 | 47.46 | 54.00 | -6.54 | Horizontal |
| 2500.00 | 29.38 | 9.94 | 39.32 | 54.00 | -14.68 | Horizontal |
| 2483.50 | 39.13 | 9.91 | 49.04 | 54.00 | -4.96 | Vertical |
| 2500.00 | 29.79 | 9.94 | 39.73 | 54.00 | -14.27 | Vertical |

Remark: 1. Result=Reading + Factor

2. During the test, pre-scan models T18-21A & T18-PQA & T18-BXA, only the worst case (T18-21A) is recorded in the report.

Radiated Band Edge:

| Test Mode: 802.11g Mode | | | | Test channel: Lowest | | |
|-------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 37.00 | 9.58 | 46.58 | 74.00 | -27.42 | Horizontal |
| 2390.00 | 40.70 | 9.73 | 50.43 | 74.00 | -23.57 | Horizontal |
| 2310.00 | 39.09 | 9.58 | 48.67 | 74.00 | -25.33 | Vertical |
| 2390.00 | 42.80 | 9.73 | 52.53 | 74.00 | -21.47 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 29.37 | 9.58 | 38.95 | 54.00 | -15.05 | Horizontal |
| 2390.00 | 35.71 | 9.73 | 45.44 | 54.00 | -8.56 | Horizontal |
| 2310.00 | 30.26 | 9.58 | 39.84 | 54.00 | -14.17 | Vertical |
| 2390.00 | 35.97 | 9.73 | 45.70 | 54.00 | -8.30 | Vertical |

| Test Mode: 802.11g Mode | | | | Test channel: Highest | | |
|-------------------------|----------------|---------------|-----------------|-----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 46.34 | 9.91 | 56.25 | 74.00 | -17.75 | Horizontal |
| 2500.00 | 40.32 | 9.94 | 50.26 | 74.00 | -23.74 | Horizontal |
| 2483.50 | 46.46 | 9.91 | 56.37 | 74.00 | -17.63 | Vertical |
| 2500.00 | 39.93 | 9.94 | 49.87 | 74.00 | -24.13 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 35.72 | 9.91 | 45.63 | 54.00 | -8.37 | Horizontal |
| 2500.00 | 28.48 | 9.94 | 38.42 | 54.00 | -15.58 | Horizontal |
| 2483.50 | 38.08 | 9.91 | 47.99 | 54.00 | -6.01 | Vertical |
| 2500.00 | 29.32 | 9.94 | 39.26 | 54.00 | -14.74 | Vertical |

Remark: 1. Result=Reading + Factor

2. During the test, pre-scan models T18-21A & T18-PQA & T18-BXA, only the worst case (T18-21A) is recorded in the report.

For Model T18-21A(ANT2):

Radiated Band Edge:

| Test Mode: 802.11b Mode | | | | Test channel: Lowest | | |
|-------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 38.36 | 9.58 | 47.94 | 74.00 | -26.06 | Horizontal |
| 2390.00 | 40.70 | 9.73 | 50.43 | 74.00 | -23.57 | Horizontal |
| 2310.00 | 39.68 | 9.58 | 49.26 | 74.00 | -24.74 | Vertical |
| 2390.00 | 46.33 | 9.73 | 56.06 | 74.00 | -17.94 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 29.00 | 9.58 | 38.58 | 54.00 | -15.42 | Horizontal |
| 2390.00 | 36.21 | 9.73 | 45.94 | 54.00 | -8.06 | Horizontal |
| 2310.00 | 30.24 | 9.58 | 39.82 | 54.00 | -14.18 | Vertical |
| 2390.00 | 38.56 | 9.73 | 48.29 | 54.00 | -5.71 | Vertical |

| Test Mode: 802.11b Mode | | | | Test channel: Highest | | |
|-------------------------|----------------|---------------|-----------------|-----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 46.39 | 9.91 | 56.30 | 74.00 | -17.70 | Horizontal |
| 2500.00 | 40.47 | 9.94 | 50.41 | 74.00 | -23.59 | Horizontal |
| 2483.50 | 46.75 | 9.91 | 56.66 | 74.00 | -17.34 | Vertical |
| 2500.00 | 40.13 | 9.94 | 50.07 | 74.00 | -23.93 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 37.64 | 9.91 | 47.55 | 54.00 | -6.45 | Horizontal |
| 2500.00 | 29.51 | 9.94 | 39.45 | 54.00 | -14.55 | Horizontal |
| 2483.50 | 39.26 | 9.91 | 49.17 | 54.00 | -4.83 | Vertical |
| 2500.00 | 29.88 | 9.94 | 39.82 | 54.00 | -14.18 | Vertical |

Remark: 1. Result=Reading + Factor

2. During the test, pre-scan models T18-21A & T18-PQA & T18-BXA, only the worst case (T18-21A) is recorded in the report.

Radiated Band Edge:

| Test Mode: 802.11g Mode | | | | Test channel: Lowest | | |
|-------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 37.09 | 9.58 | 46.67 | 74.00 | -27.33 | Horizontal |
| 2390.00 | 40.83 | 9.73 | 50.56 | 74.00 | -23.44 | Horizontal |
| 2310.00 | 39.27 | 9.58 | 48.85 | 74.00 | -25.15 | Vertical |
| 2390.00 | 43.01 | 9.73 | 52.74 | 74.00 | -21.26 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 29.53 | 9.58 | 39.11 | 54.00 | -14.89 | Horizontal |
| 2390.00 | 35.95 | 9.73 | 45.68 | 54.00 | -8.32 | Horizontal |
| 2310.00 | 30.38 | 9.58 | 39.96 | 54.00 | -14.04 | Vertical |
| 2390.00 | 36.06 | 9.73 | 45.79 | 54.00 | -8.21 | Vertical |

| Test Mode: 802.11g Mode | | | | Test channel: Highest | | |
|-------------------------|----------------|---------------|-----------------|-----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 46.40 | 9.91 | 56.31 | 74.00 | -17.69 | Horizontal |
| 2500.00 | 40.46 | 9.94 | 50.40 | 74.00 | -23.60 | Horizontal |
| 2483.50 | 46.53 | 9.91 | 56.44 | 74.00 | -17.56 | Vertical |
| 2500.00 | 40.06 | 9.94 | 50.00 | 74.00 | -24.00 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 35.81 | 9.91 | 45.72 | 54.00 | -8.28 | Horizontal |
| 2500.00 | 28.61 | 9.94 | 38.55 | 54.00 | -15.45 | Horizontal |
| 2483.50 | 38.21 | 9.91 | 48.12 | 54.00 | -5.88 | Vertical |
| 2500.00 | 29.41 | 9.94 | 39.35 | 54.00 | -14.65 | Vertical |

Remark: 1. Result=Reading + Factor

2. During the test, pre-scan models T18-21A & T18-PQA & T18-BXA, only the worst case (T18-21A) is recorded in the report.

For Model T18-21A(ANT1+ANT2):

Radiated Band Edge:

| Test Mode: 802.11n (HT20) Mode | | | | Test channel: Lowest | | |
|--------------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 35.09 | 9.58 | 44.67 | 74.00 | -29.33 | Horizontal |
| 2390.00 | 38.83 | 9.73 | 48.56 | 74.00 | -25.44 | Horizontal |
| 2310.00 | 38.27 | 9.58 | 47.85 | 74.00 | -26.15 | Vertical |
| 2390.00 | 41.01 | 9.73 | 50.74 | 74.00 | -23.26 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 28.21 | 9.58 | 37.79 | 54.00 | -16.21 | Horizontal |
| 2390.00 | 33.58 | 9.73 | 43.31 | 54.00 | -10.69 | Horizontal |
| 2310.00 | 27.99 | 9.58 | 37.57 | 54.00 | -16.43 | Vertical |
| 2390.00 | 34.06 | 9.73 | 43.79 | 54.00 | -10.21 | Vertical |

| Test Mode: 802.11n (HT20) Mode | | | | Test channel: Highest | | |
|--------------------------------|----------------|---------------|-----------------|-----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 44.16 | 9.91 | 54.07 | 74.00 | -19.93 | Horizontal |
| 2500.00 | 38.47 | 9.94 | 48.41 | 74.00 | -25.59 | Horizontal |
| 2483.50 | 45.75 | 9.91 | 55.66 | 74.00 | -18.34 | Vertical |
| 2500.00 | 40.13 | 9.94 | 50.07 | 74.00 | -23.93 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 33.79 | 9.91 | 43.70 | 54.00 | -10.30 | Horizontal |
| 2500.00 | 28.76 | 9.94 | 38.70 | 54.00 | -15.30 | Horizontal |
| 2483.50 | 35.03 | 9.91 | 44.94 | 54.00 | -9.06 | Vertical |
| 2500.00 | 29.55 | 9.94 | 39.49 | 54.00 | -14.51 | Vertical |

Remark: 1. Result=Reading + Factor

2. During the test, pre-scan all antenna chains of models T18-21A & T18-PQA & T18-BXA, and only the worst case (T18-21A) is recorded in the report.

3. During the test, pre-scan n20 all the models(SISO and MIMO), and only the worst case (MIMO) is recorded in the report.

For Model T18-21A(ANT1+ANT2):

Radiated Band Edge:

| Test Mode: 802.11n (HT40) Mode | | | | Test channel: Lowest | | |
|--------------------------------|----------------|---------------|-----------------|----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 37.56 | 9.58 | 47.14 | 74.00 | -26.86 | Horizontal |
| 2390.00 | 41.83 | 9.73 | 51.56 | 74.00 | -22.44 | Horizontal |
| 2310.00 | 40.27 | 9.58 | 49.85 | 74.00 | -24.15 | Vertical |
| 2390.00 | 43.22 | 9.73 | 52.95 | 74.00 | -21.05 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 29.13 | 9.58 | 38.71 | 54.00 | -15.29 | Horizontal |
| 2390.00 | 34.52 | 9.73 | 44.25 | 54.00 | -9.75 | Horizontal |
| 2310.00 | 29.19 | 9.58 | 38.77 | 54.00 | -15.23 | Vertical |
| 2390.00 | 33.46 | 9.73 | 43.19 | 54.00 | -10.81 | Vertical |

| Test Mode: 802.11n (HT40) Mode | | | | Test channel: Highest | | |
|--------------------------------|----------------|---------------|-----------------|-----------------------|-----------------|--------------|
| Peak value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 44.07 | 9.91 | 53.98 | 74.00 | -20.02 | Horizontal |
| 2500.00 | 39.15 | 9.94 | 49.09 | 74.00 | -24.91 | Horizontal |
| 2483.50 | 45.88 | 9.91 | 55.79 | 74.00 | -18.21 | Vertical |
| 2500.00 | 40.63 | 9.94 | 50.57 | 74.00 | -23.43 | Vertical |
| Average value: | | | | | | |
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 33.49 | 9.91 | 43.40 | 54.00 | -10.60 | Horizontal |
| 2500.00 | 30.76 | 9.94 | 40.70 | 54.00 | -13.30 | Horizontal |
| 2483.50 | 35.03 | 9.91 | 44.94 | 54.00 | -9.06 | Vertical |
| 2500.00 | 30.55 | 9.94 | 40.49 | 54.00 | -13.51 | Vertical |

Remark: 1. Result=Reading + Factor

2. During the test, pre-scan all antenna chains of models T18-21A & T18-PQA & T18-BXA, and only the worst case (T18-21A) is recorded in the report.


3. During the test, pre-scan n40, all the models(SISO and MIMO), and only the worst case (MIMO) is recorded in the report.

5. Maximum Output Power Test

5.1. Test Standard and Limit

| | |
|---------------|------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (b)(3) |
| Test Limit | 30dBm |

5.2. Test Setup

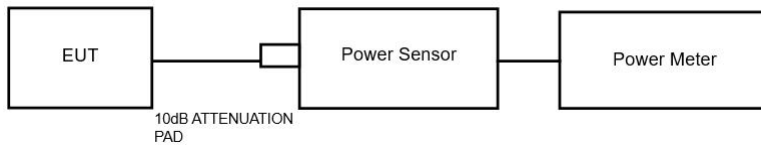

5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.

Remark: per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

Additional test for duty cycle.


Please refer to Appendix G of the Appendix Test Data.

6. 6DB Occupy Bandwidth Test

6.1. Test Standard and Limit

| | |
|---------------|------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (a)(2) |
| Test Limit | >500kHz |

6.2. Test Setup

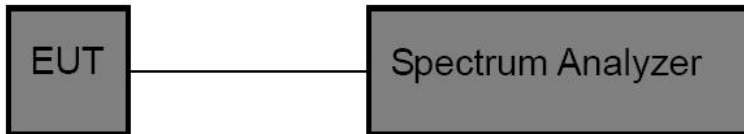

6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW= 100kHz, VBW \geq 3*RBW =300kHz
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

6.4. Test Data

Pass


Please refer to Appendix A of the Appendix Test Data.

7. Power Spectral Density Test

7.1. Test Standard and Limit

| | |
|---------------|----------------------|
| Test Standard | FCC Part15 C Section |
| Test Limit | 8dBm/3KHz |

7.2. Test Setup

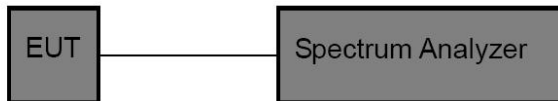

7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.

Remark: The PSD limits of IEEE 802.11n(HT20) and IEEE 802.11n(HT40) for MIMO with CDD technology should be reduce $10 \cdot \log(2) = 3.01\text{dB}$ according to KDB662911 D01 Multiple Transmitter Output v02r01;

For MIMO with CCD technology device, The Directional Gain= $G_{\text{ANT}} + \text{Array gain}$;


Array gain = $10 \log(N_{\text{ANT}}/N_{\text{SS}})$ dB, where N_{ANT} is the number of transmit antennas and N_{SS} is 1.

8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

| | |
|---------------|---|
| Test Standard | FCC Part15 C Section 15.247 (d) |
| Test Limit | in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a). |

8.2. Test Setup

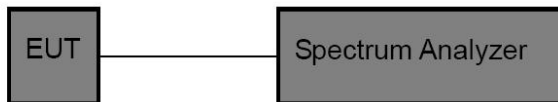

8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

8.4. Test Data

Pass

Please refer to Appendix E & Appendix F of the Appendix Test Data.

9. Antenna Requirement

9.1. Test Standard and Requirement

| | |
|---------------|---|
| Test Standard | FCC Part15 Section 15.203 /247(c) |
| Requirement | <p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p> |

9.2. Antenna Connected Construction

The antenna is ANT1/ ANT2: External Antenna(T18-21A); ANT1/ ANT2: PCB Antenna (T18-PQA&T18-BXA), which permanently attached, and the best case gain of the antenna is ANT1/ ANT2: 5dBi (T18-21A); ANT1/ ANT2: 4dBi (T18-PQA&T18-BXA) It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Power Line Conducted Emission Test


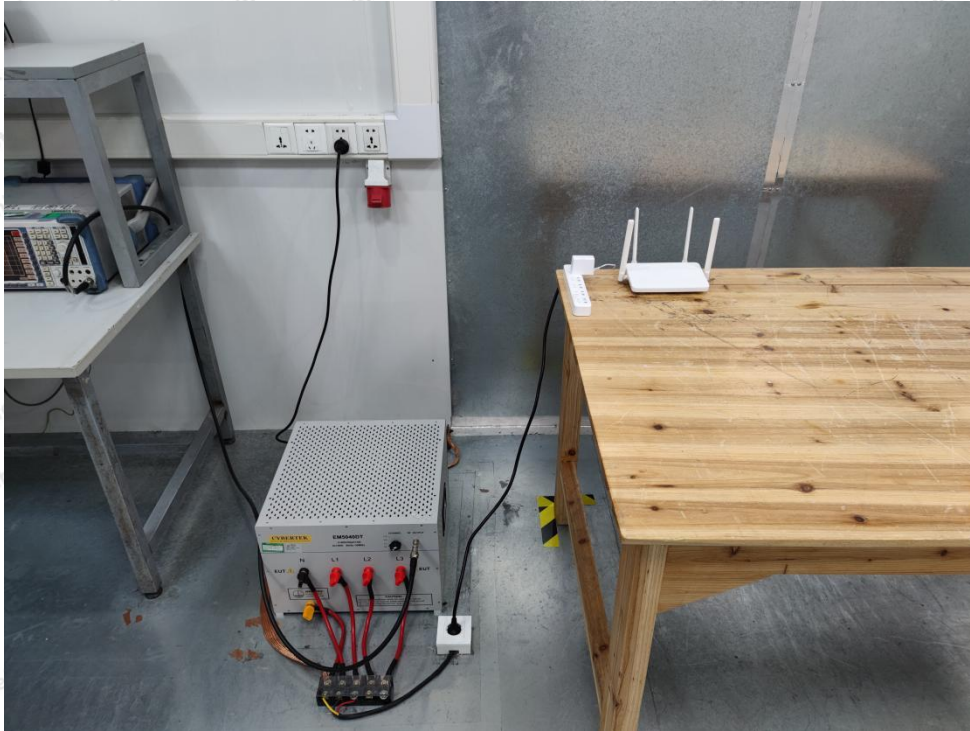


Photo of Radiation Emission Test








APPENDIX II -- EXTERNAL PHOTOGRAPH

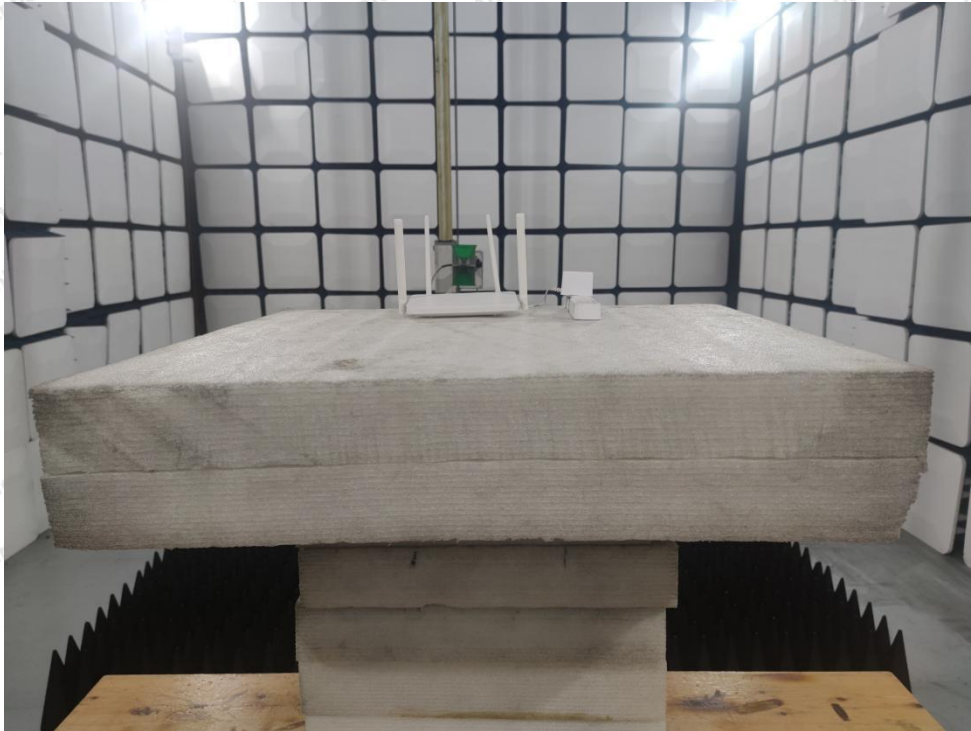







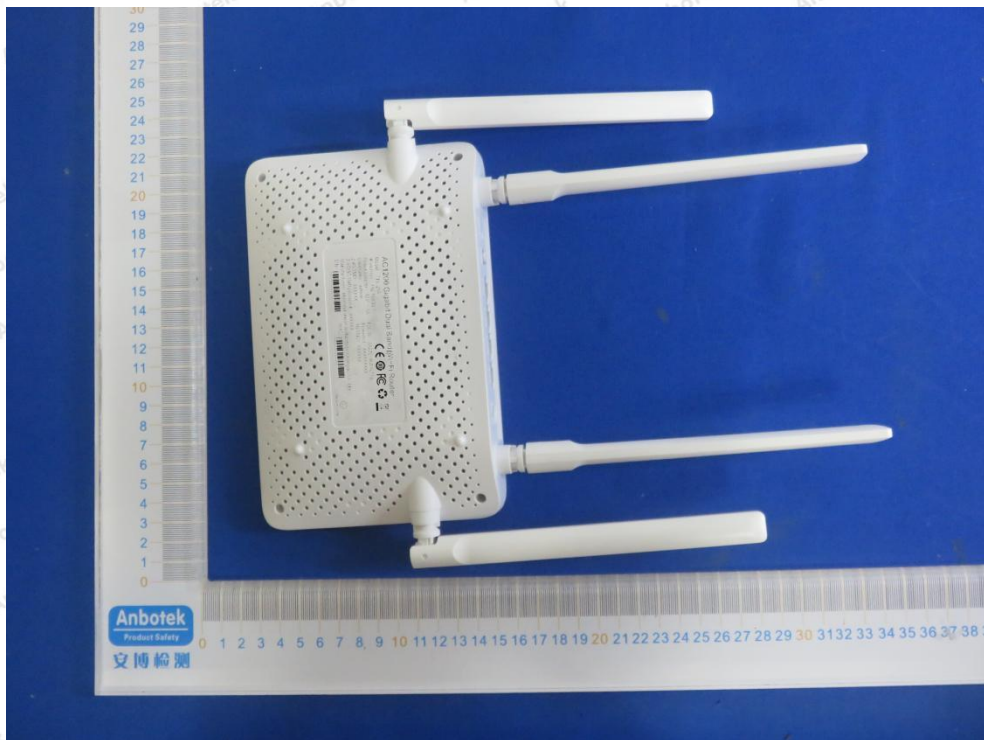

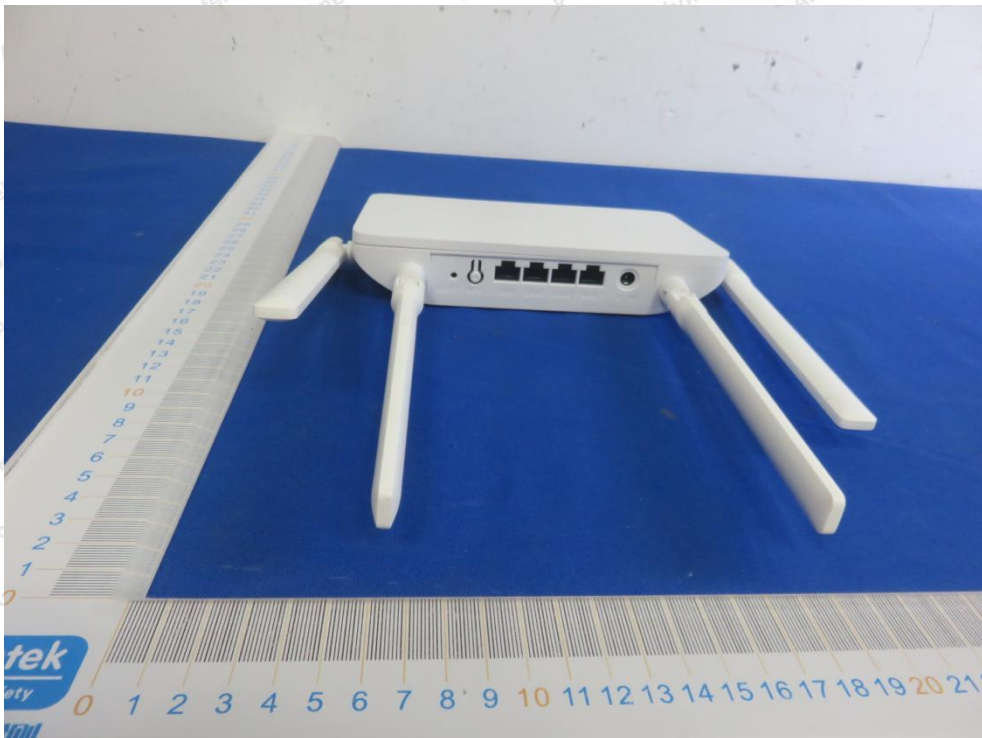
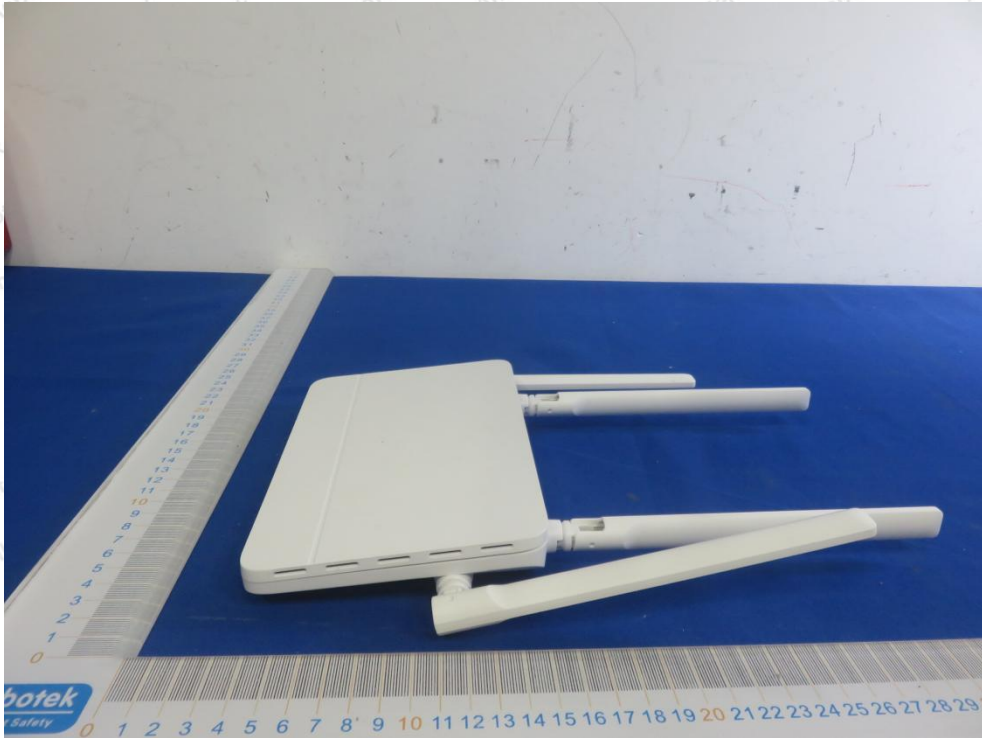


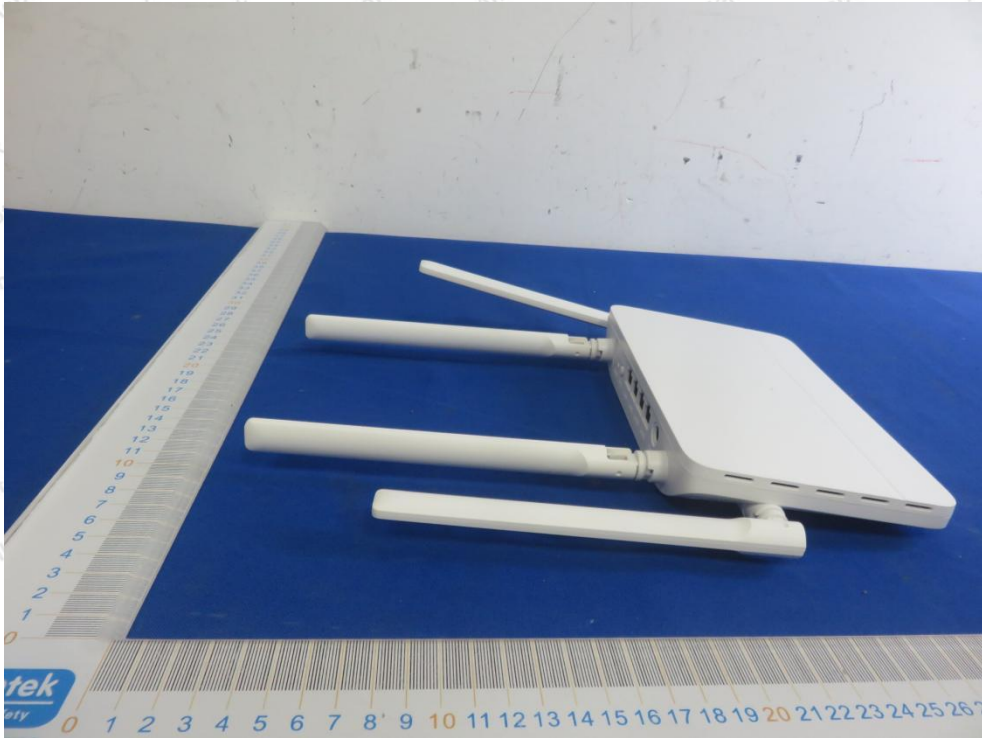


APPENDIX III -- INTERNAL PHOTOGRAPH

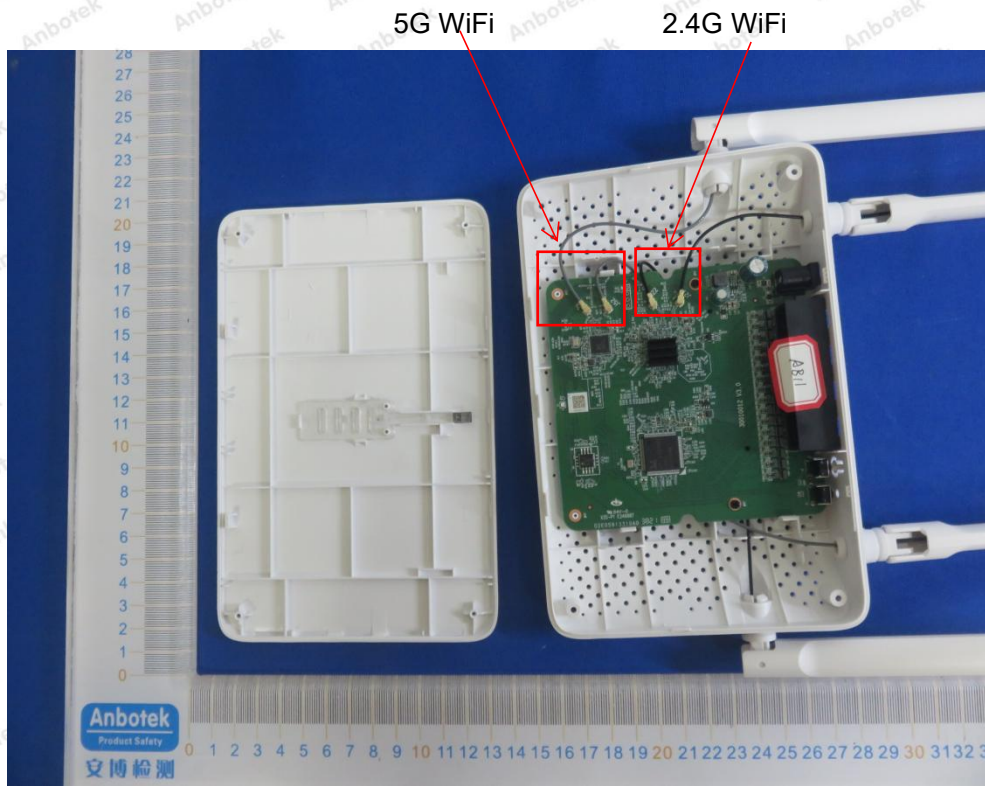



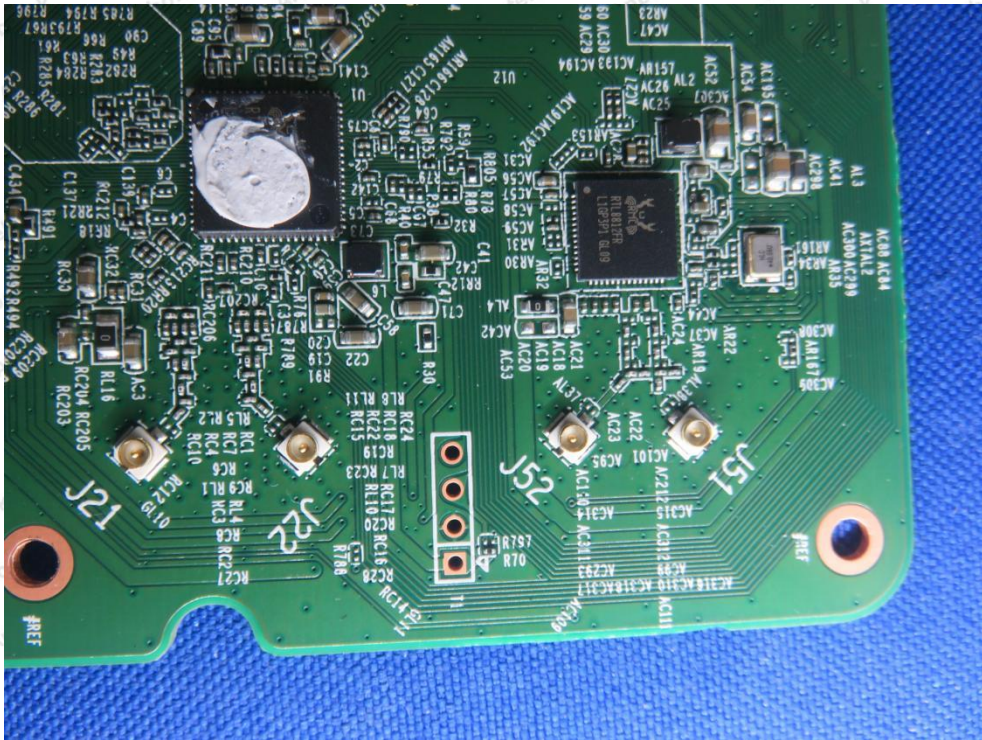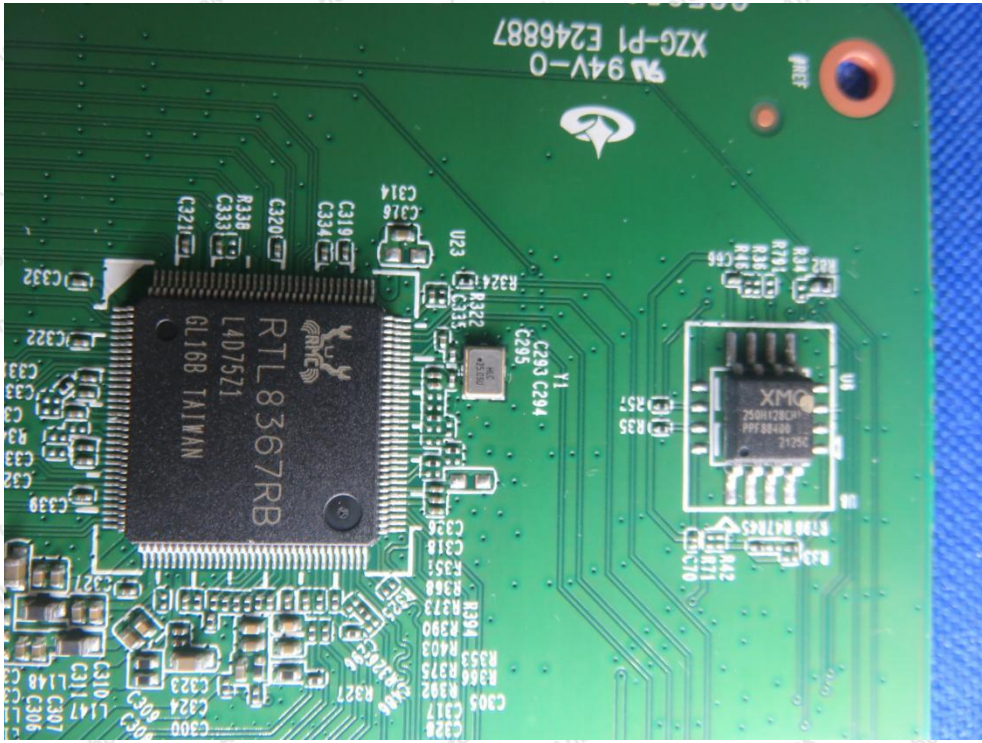

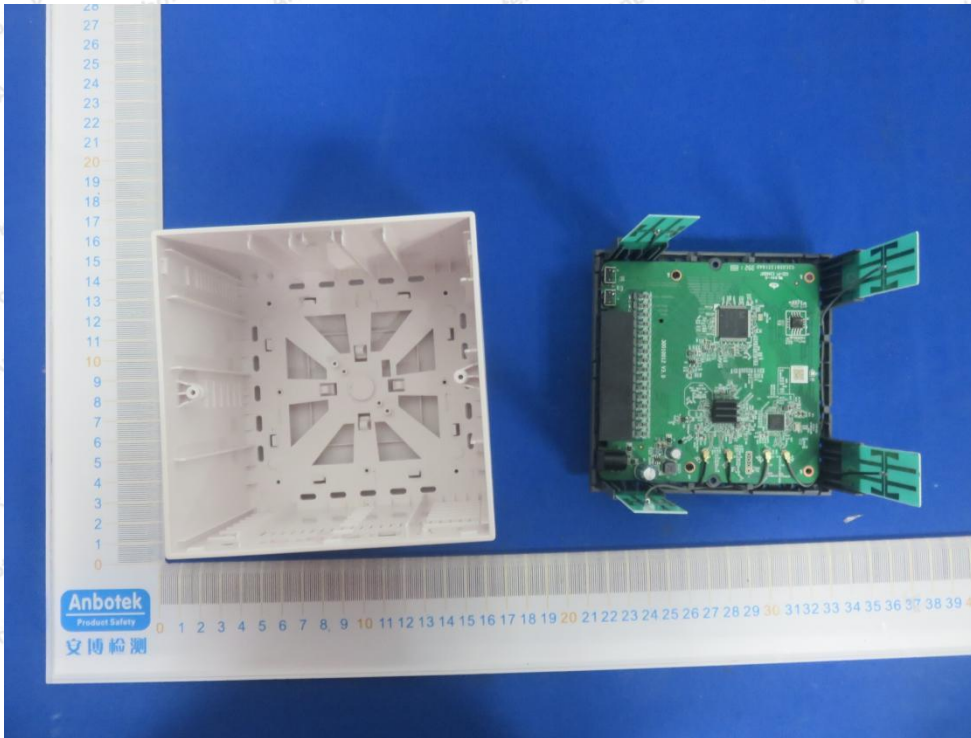

APPENDIX IV – Appendix Test Data