



Neutron Engineering Inc.

FCC&IC Radio Test Report

FCC ID: QISAP505130DN

IC: 6369A-AP505130DN

This report concerns (check one): ☒ Original Grant ☐ Class II Change

Project No. : 1403C080A
Equipment : Wireless LAN Access Point
Model Name : AP5130DN
Applicant : Huawei Technologies Co.,Ltd.
Address for FCC : Administration Building, Headquarters of
Huawei Technologies Co., Ltd., Bantian,
Longgang District Shenzhen China
Address for IC : Administration Building, Headquarters of
Huawei Technologies Co., Ltd., Bantian,
Longgang District, Shenzhen 518129
China

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Mar. 13, 2014

Date of Test: Mar. 13, 2014 ~ May. 14, 2014

Issued Date: May. 15, 2014

Testing Engineer :

David Mao

(David Mao)

Technical Manager :

Leo Hung

(Leo Hung)

Authorized Signatory :

Steven Lu

(Steven Lu)

Neutron Engineering Inc.

No.3, Jinshagang 1st Road, Shixia,
Dalang Town, Dongguan, China.

TEL: 0769-8318-3000 FAX: 0769-8319-6000



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	5
2 . EUT INFORMATION	6
2.1 EUT SPECIFICATION TABLE	6
2.4 EUT MAXIMUM AND MINIMUM E.I.R.P. POWER	10
3 . U-NII DFS RULE REQUIREMENTS	13
3.1 WORKING MODES AND REQUIRED TEST ITEMS	13
3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS	14
4 . TEST INSTRUMENTS	16
5 . EMC EMISSION TEST	17
5.1 DFS MEASUREMENT SYSTEM:	17
5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL:	19
5.3 DEVIATION FROM TEST STANDARD	19
6 . TEST RESULTS	20
6.1 SUMMARY OF TEST RESULT	20
6.2 DETELED TEST RESULTS	21
6.2.1 TEST MODE: DEVICE OPERATING IN MASTER MODE.	21
6.2.2 DFS DETECTION THRESHOLD	21
6.2.3 CHANNEL AVAILABILITY CHECK TIME	25
6.2.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC	34
6.2.5 NON- OCCUPANCY PERIOD	73
6.2.6 UNIFORM SPREADING	75
6.2.7 U-NII DETECTION BANDWIDTH	76



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FICP-3-1403C080A	Original Issue.	May. 15, 2014



1. CERTIFICATION

Equipment : Wireless LAN Access Point
Trade Name : HUAWEI
Model Name. : AP5130DN
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen 518129, P.R.China
Factory : Huawei Technologies Co.,Ltd.
Address : Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R.China
Date of Test: : Mar. 13, 2014 ~ May. 14, 2014
Test Item : ENGINEERING SAMPLE
Standard(s) : FCC Part05, Subpart E(15.407) / ANSI C63.4 : 2009;
Canada RSS-210:2010
RSS-GEN Issue 3, Dec 2010

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

This test report consists of 57 pages in total.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FICP-3-1403C080A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the DFS Mode part of the product.



2. EUT INFORMATION

2.1 EUT SPECIFICATION TABLE

Table 1: Specification of EUT

Product name	Wireless LAN Access Point
Brand Name	HUAWEI
Model	AP5130DN
FCC ID	QISAP505130DN
IC ID	6369A-AP505130DN
Software Version	V200R005
Firmware Version	Ver.A
Operational Mode	Master
Operating Frequency Range	5250MHz~5350MHz&5470MHz~5725MHz
Modulation	OFDM

Note: This device was functioned as a ☒ Master ☐ Slave device during the DFS

2.2 DESCRIPTION OF AVAILABLE ANTENNAS TO THE EUT

Table 2: Antenna list.

Group 1

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
A	TONGYU COMMUNICATION	TT-245804-6W1	External Antenna	R-SMA	4.82	TX/RX
B	TONGYU COMMUNICATION	TT-245804-6W1	External Antenna	R-SMA	4.82	TX/RX
C	TONGYU COMMUNICATION	TT-245804-6W1	External Antenna	R-SMA	4.82	TX/RX

Group 2

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
A	Shenglu	SL10301A	External Antenna	R-SMA	5.7	TX/RX
B	Shenglu	SL10301A	External Antenna	R-SMA	5.7	TX/RX
C	Shenglu	SL10301A	External Antenna	R-SMA	5.7	TX/RX

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides three completed three transmitters and three receivers (3T3R).
2. ANT B for 1TX was found to be the worst case and recorded.
3. Two groups of antenna used with the same type, only differ in manufacturer and model name, group 1 is tested and recorded as the worst case in this report.



2.3 CONDUCTED OUTPUT POWER AND EIRP POWER

TABLE 3: THE CONDUCTED OUTPUT POWER LIST

TX (11a)

FREQUENCY BAND (MHz)	MAX. POWER for 1TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	14.87	30.69
5250~5350	15.67	36.90
5470~5725	16.79	47.75

TX (11n 40 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 1TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	14.82	30.34
5250~5350	14.79	30.13
5470~5725	14.79	30.13

TX (11ac 80 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 1TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	3.56	2.27
5250~5350	3.59	2.29
5470~5725	8.42	6.95



TX (11a)

FREQUENCY BAND (MHz)	MAX. POWER for 2TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	14.59	28.77
5250~5350	15.54	35.81
5470~5725	16.65	46.24

TX (11n 40 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 2TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	14.53	28.38
5250~5350	14.41	27.61
5470~5725	14.55	28.51

TX (11ac 80 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 2TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	3.65	2.32
5250~5350	3.60	2.29
5470~5725	8.39	6.90



TX (11a)

FREQUENCY BAND (MHz)	MAX. POWER for 3TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	14.22	26.42
5250~5350	15.16	32.81
5470~5725	16.20	41.69

TX (11n 40 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 3TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	13.93	24.72
5250~5350	14.18	26.18
5470~5725	14.06	25.47

TX (11ac 80 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 3TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	4.23	2.65
5250~5350	4.09	2.56
5470~5725	7.90	6.17

2.4 EUT MAXIMUM AND MINIMUM E.I.R.P. POWER

TABLE 4: THE MAX EIRP LIST

TX (11a)

FREQUENCY BAND (MHz)	MAX. POWER for 1TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	19.27	84.53
5250~5350	20.07	101.62
5470~5725	21.19	131.52

TX (11n 40 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 1TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	19.22	83.56
5250~5350	19.19	82.99
5470~5725	19.19	82.99

TX (11ac 80 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 1TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	7.96	6.25
5250~5350	7.99	6.30
5470~5725	12.82	19.14



TX (11a)

FREQUENCY BAND (MHz)	MAX. POWER for 2TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	18.99	79.25
5250~5350	19.94	98.63
5470~5725	21.05	127.35

TX (11n 40 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 2TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	18.93	78.16
5250~5350	18.81	76.03
5470~5725	18.95	78.52

TX (11ac 80 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 2TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	8.05	6.38
5250~5350	8.00	6.31
5470~5725	12.79	19.01



TX (11a)

FREQUENCY BAND (MHz)	MAX. POWER for 3TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	18.62	72.78
5250~5350	19.56	90.36
5470~5725	20.60	114.82

TX (11n 40 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 3TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	18.33	68.08
5250~5350	18.58	72.11
5470~5725	18.46	70.15

TX (11ac 80 MHz)

FREQUENCY BAND (MHz)	MAX. POWER for 3TX	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5150~5250	8.63	7.29
5250~5350	8.49	7.06
5470~5725	12.30	16.98



3. U-NII DFS RULE REQUIREMENTS

3.1 WORKING MODES AND REQUIRED TEST ITEMS

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 5: Applicability of DFS requirements prior to use a channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	Not required	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
Uniform Spreading	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Table 6: Applicability of DFS requirements during normal operation.

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
DFS Detection Threshold	✓	Not required	✓
Channel Closing Transmission Time	✓	✓	✓
Channel Move Time	✓	✓	✓
U-NII Detection Bandwidth	✓	Not required	✓



3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS

DETECTION THRESHOLD VALUES

Table 7: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection.

Maximum Transmit Power	Value (See Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Table 8: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 80% of the UNII 99% transmission power bandwidth. See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short Pulse Radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.



PARAMETERS OF DFS TEST SIGNALS

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 9: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Table 10: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 11: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30



4. TEST INSTRUMENTS

Table 1: Test instruments list.

DESCRIPTION	MANUFACTURER	MODEL NO.	Serial No	Calibration Until
EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	2014-04-25
Signal Generator	Agilent	E4438C	My49071316	2014-04-25
POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910	2014-04-25
POWER SPLITTER	Mini-Circuits	ZN4PD1-63-S+	SF933501045	2014-04-25
POWER SPLITTER	Mini-Circuits	ZN2PD-9G-S+	SF012700714	2014-04-25
attenuator	Mini-Circuits	VAT-30+	30912	2014-04-25
attenuator	Mini-Circuits	VAT-10+	30909	2014-04-25
Spectrum Analyzer	R&S	FSL6	1004423	2013-11-25
PC	Dell 745	DCSM	G7K832X	--
Netbook	Hp	HSTNN-I69C-3	CNU02203XG	--


Note: Calibration interval of instruments listed above is one year.

5. EMC EMISSION TEST

5.1 DFS MEASUREMENT SYSTEM:

CONDUCTED METHOD SYSTEM BLOCK DIAGRAM

Master Conducted Measurement

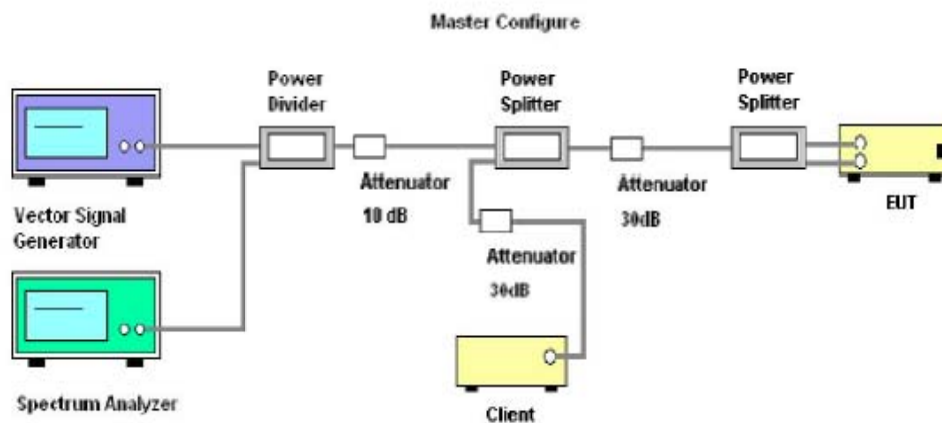

SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.



The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), additional combiner/dividers are inserted between the Master Combiner/Divider and the pad connected to the Master Device (and/or between the Slave Combiner/Divider and the pad connected to the Slave Device). Additional pads are utilized such that there is one pad at each RF port on each EUT.




5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL:

A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected in place of the master device and the signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of -62 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. Measure the amplitude and calculate the difference from -62 dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of -62 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.

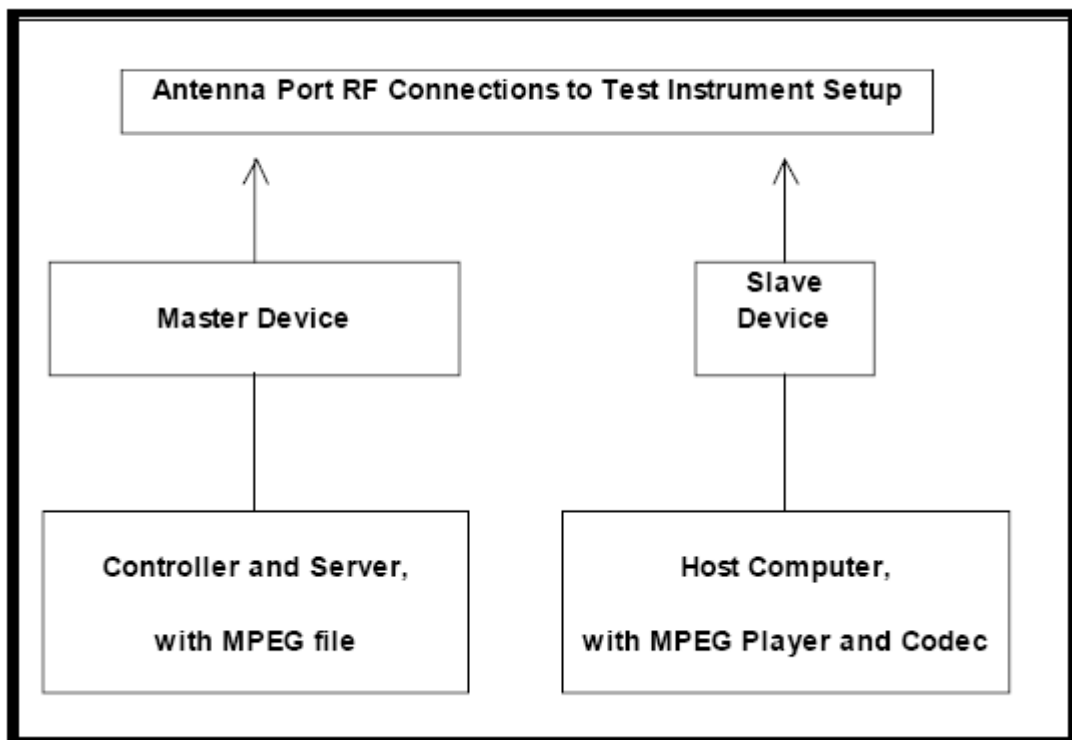

5.3 DEVIATION FROM TEST STANDARD

No deviation.



6. TEST RESULTS

6.1 SUMMARY OF TEST RESULT

Clause	Test Parameter	Remarks	Pass/Fail
15.407	DFS Detection Threshold	Applicable	Pass
15.407	Channel Availability Check Time	Applicable	Pass
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non- Occupancy Period	Applicable	Pass
15.407	Uniform Spreading	Applicable	Pass
15.407	U-NII Detection Bandwidth	Applicable	Pass



6.2 DETELED TEST RESULTS

Clause	Test Parameter	Remarks	Pass/Fail
15.407	DFS Detection Threshold	Applicable	Pass
15.407	Channel Availability Check Time	Applicable	Pass
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non- Occupancy Period	Applicable	Pass
15.407	Uniform Spreading	Applicable	Pass
15.407	U-NII Detection Bandwidth	Applicable	Pass

6.2.1 TEST MODE: DEVICE OPERATING IN MASTER MODE.

Master with injection at the Master. (Radar Test Waveforms are injected into the Master)

6.2.2 DFS DETECTION THRESHOLD


Calibration:

For a detection threshold level of -62dBm and the Master antenna gain is 2.3dBi, required detection threshold is -59.7 dBm ($= -62+2.3$).


Note: Maximum Transmit Power is less than 200 milliwatt in this report, so detection threshold level is -62dBm (please refer to Table 7 [page 8]).



Radar Signal 1

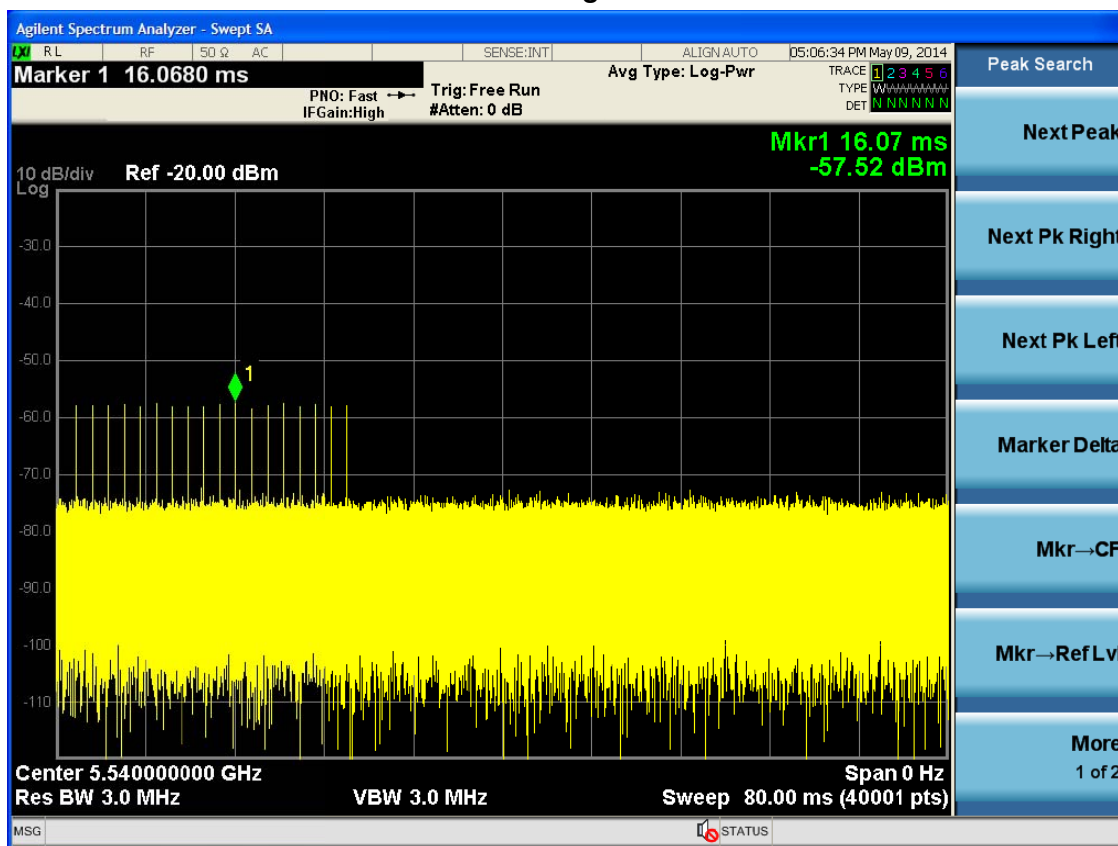


Radar Signal 2

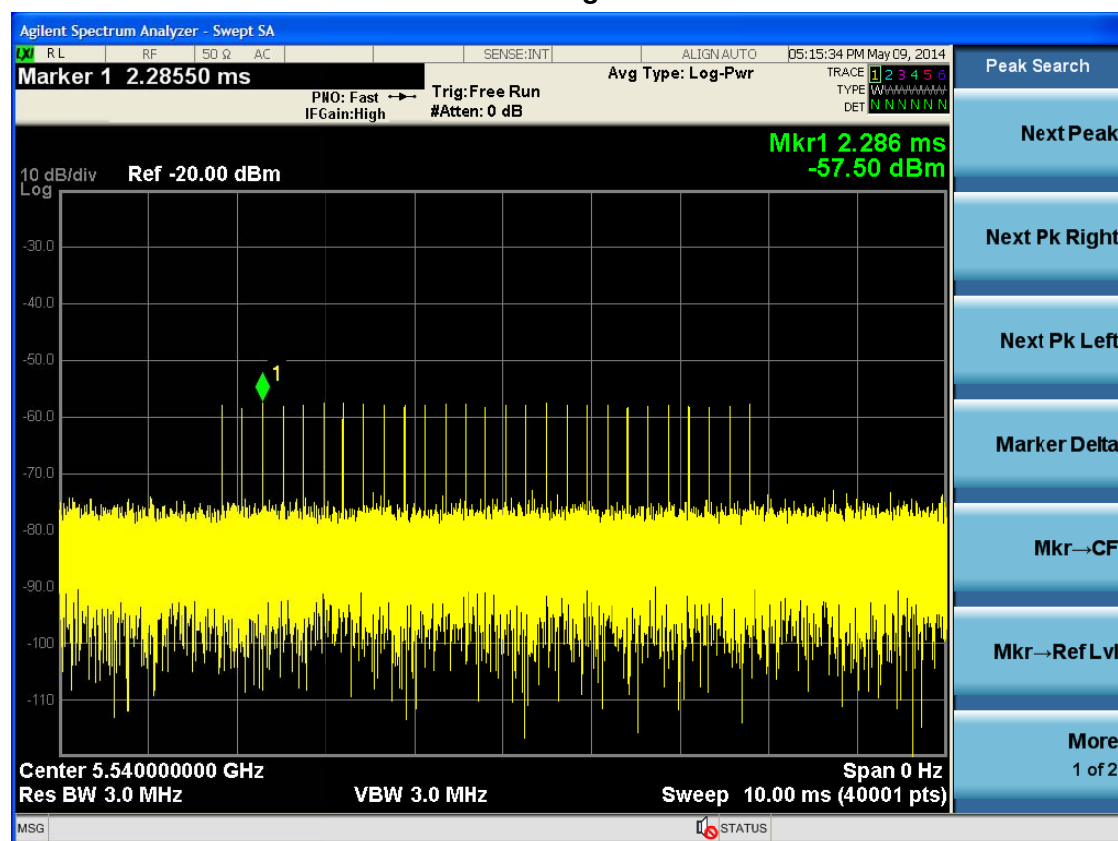




Radar Signal 3

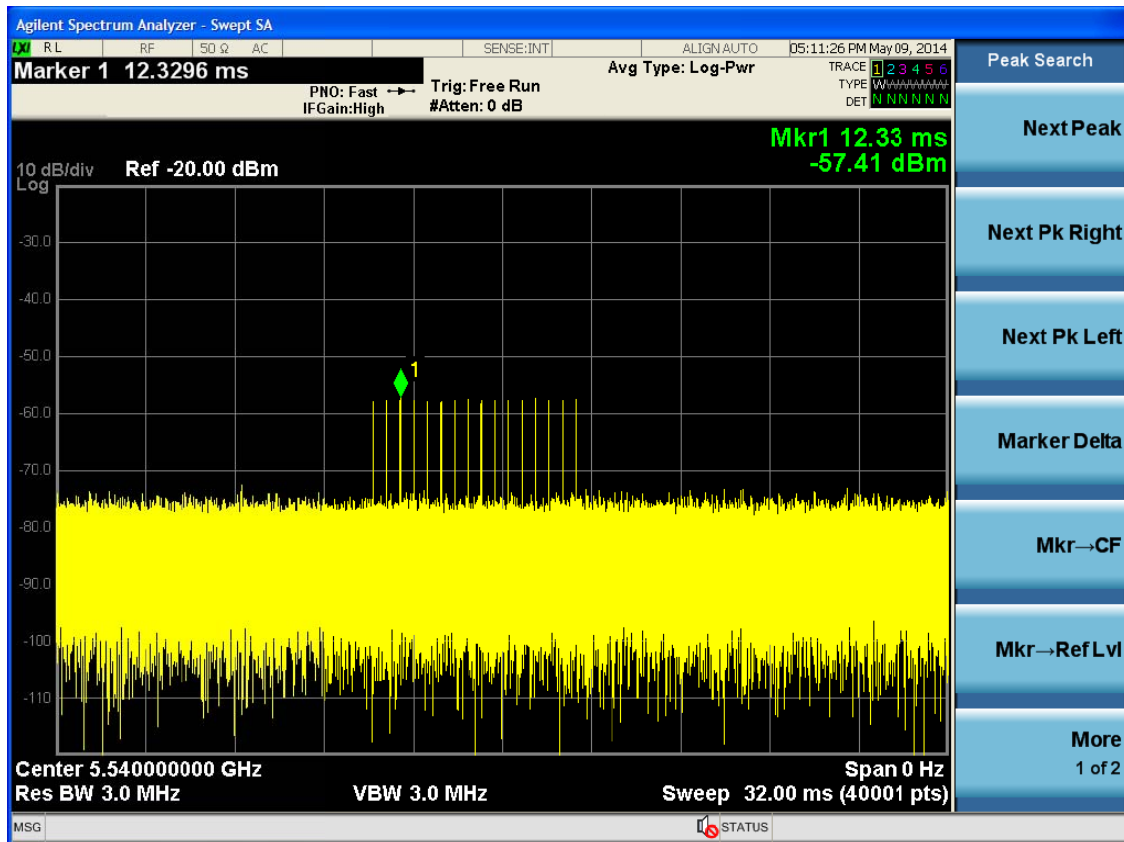


Radar Signal 4

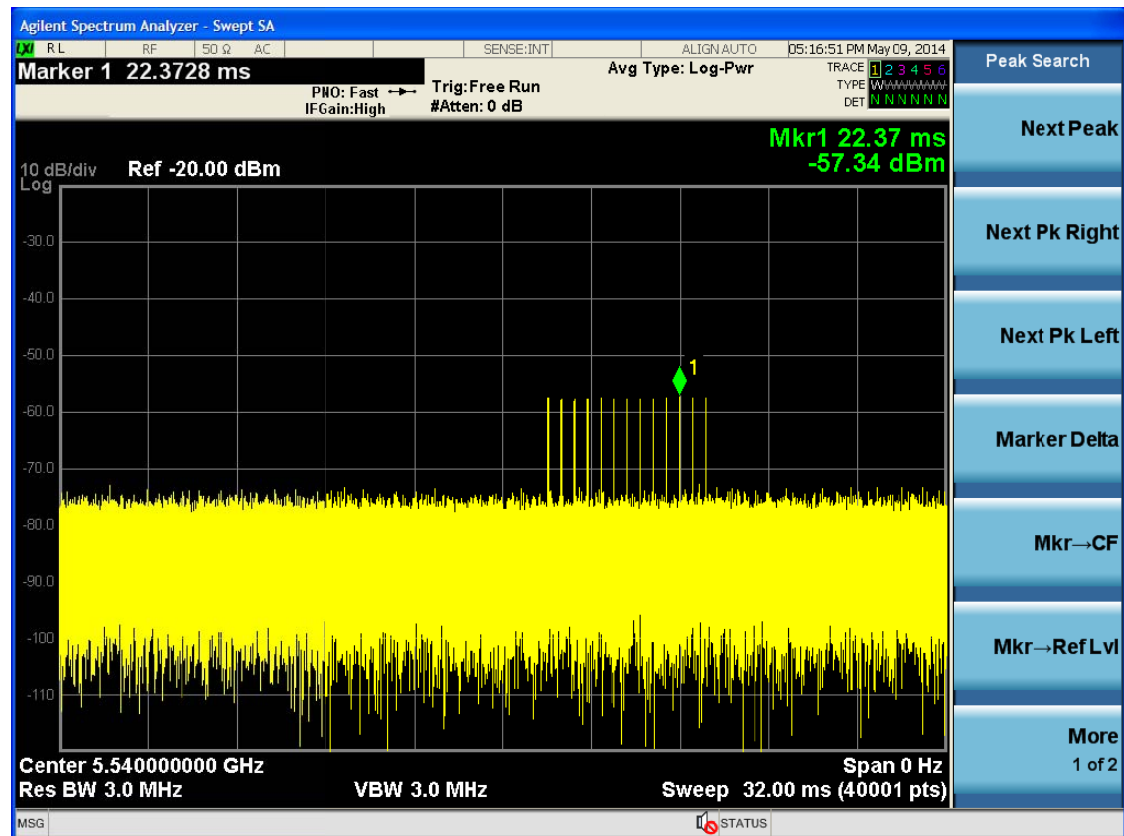




Radar Signal 5

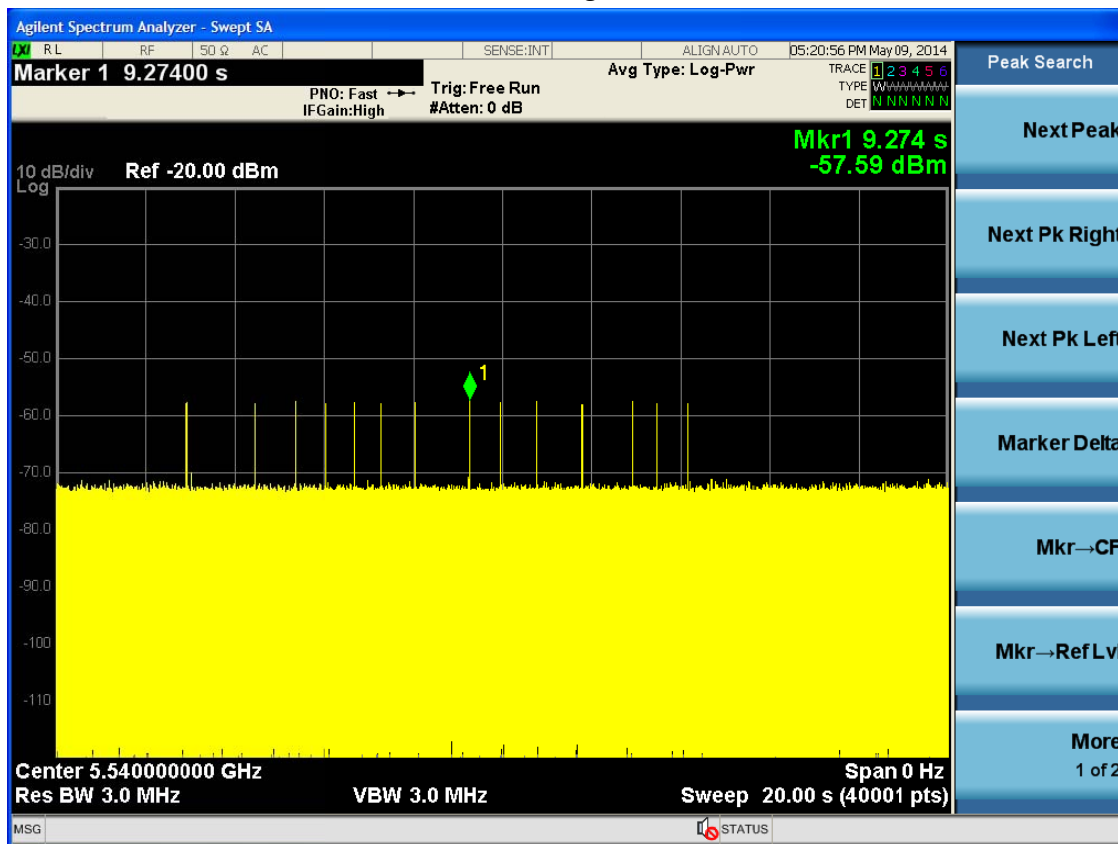

Radar Signal 6

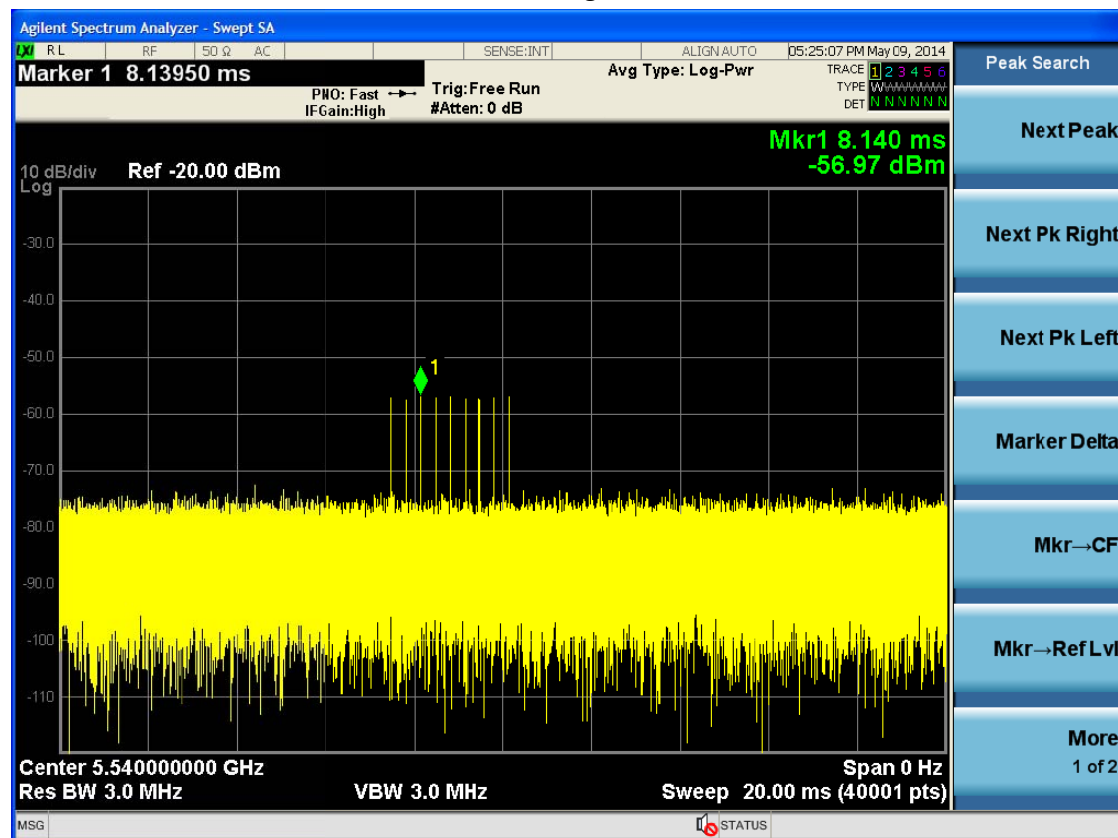




6.2.3 CHANNEL AVAILABILITY CHECK TIME

If the UUT successfully detected the radar burst, it should be observed as the UUT has no transmissions occurred until the UUT starts transmitting on another channel.

Timing of Radar Signal	Observation	
	UUT	Spectrum Analyzer
Spectrum Analyzer	Spectrum Analyzer	Spectrum Analyzer
Spectrum Analyzer	Spectrum Analyzer	Spectrum Analyzer

11a Mode


Initial Channel Availability Check Time

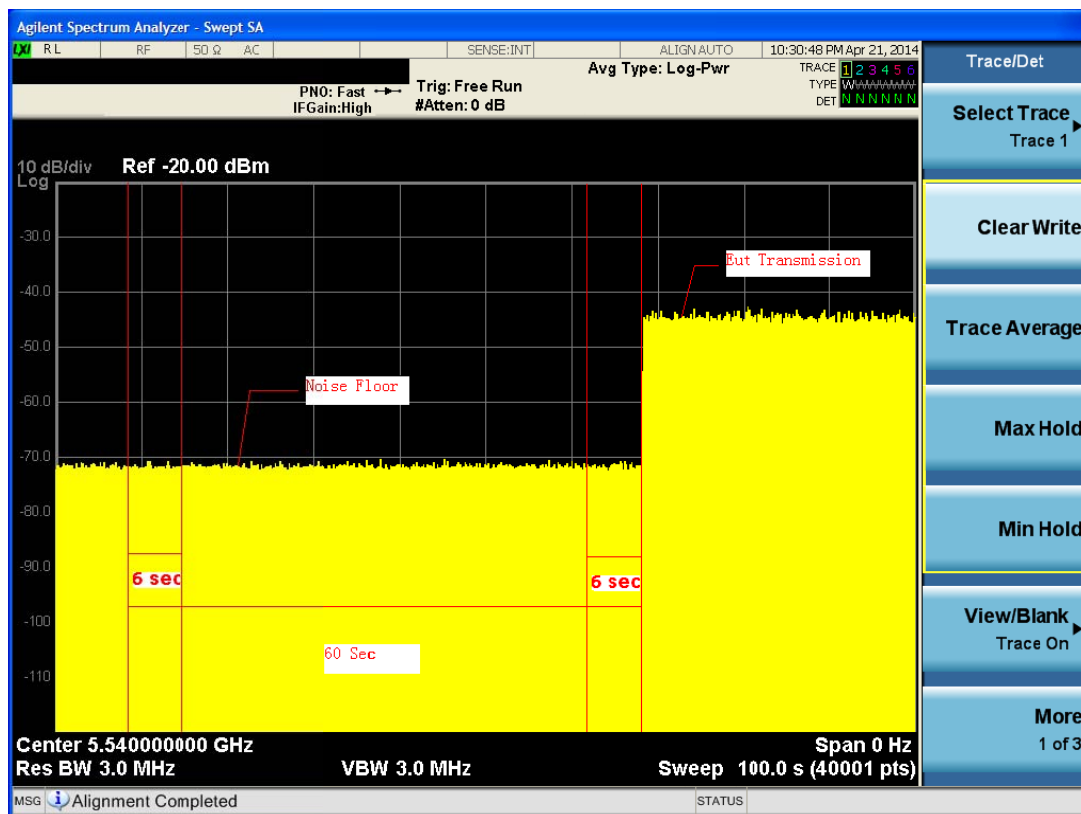

Note: T0 denotes the end of power-up time period is 14 second. T3 denotes the end of Channel Availability Check time is 74 second. Channel Availability Check time is equal to (T3 – T0) 60 seconds.




Radar Burst at the Beginning of the Channel Availability Check Time

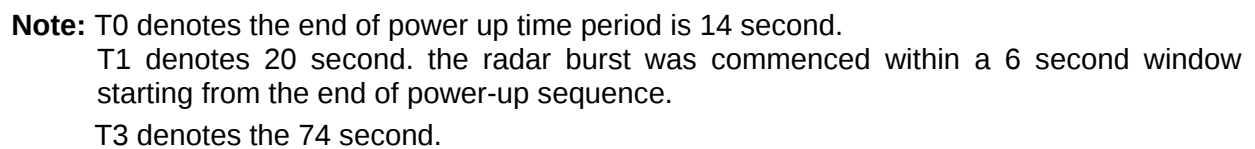



11a Mode

Radar Burst at the End of the Channel Availability Check Time

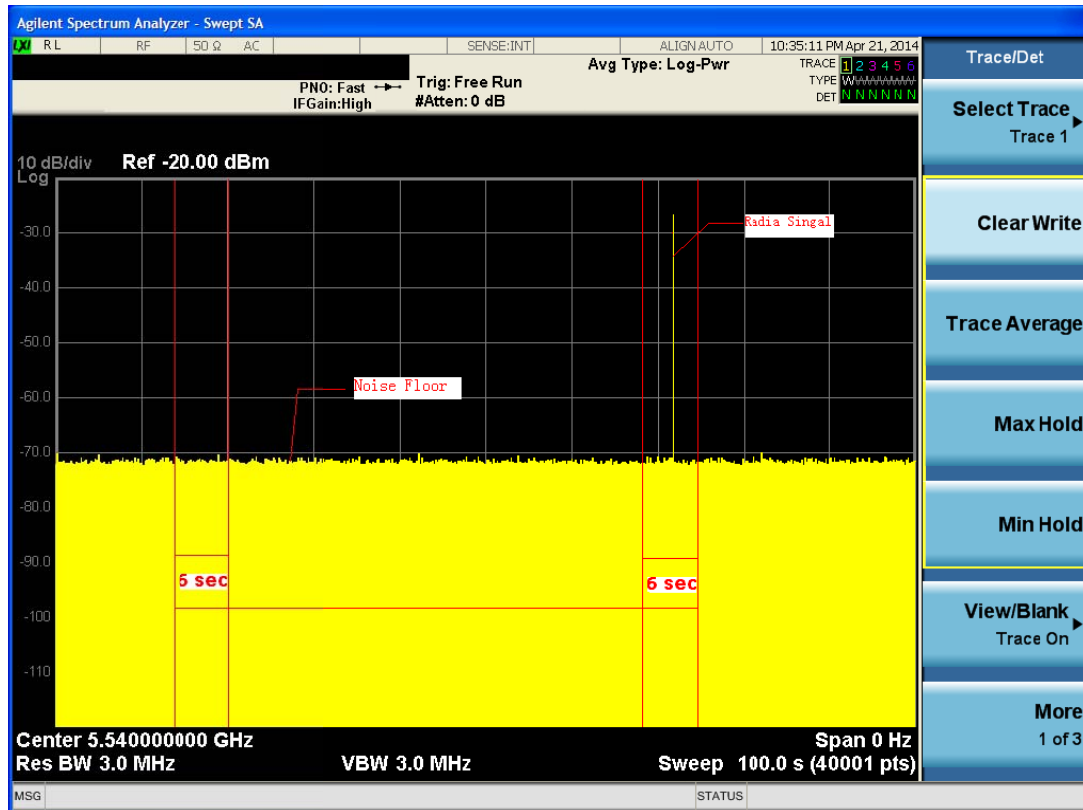

Note: T0 denotes the end of power up time period is 14 second.


T2 denotes 68 second and radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence.

T3 denotes the 74 second



11n 40MHz Mode


Initial Channel Availability Check Time

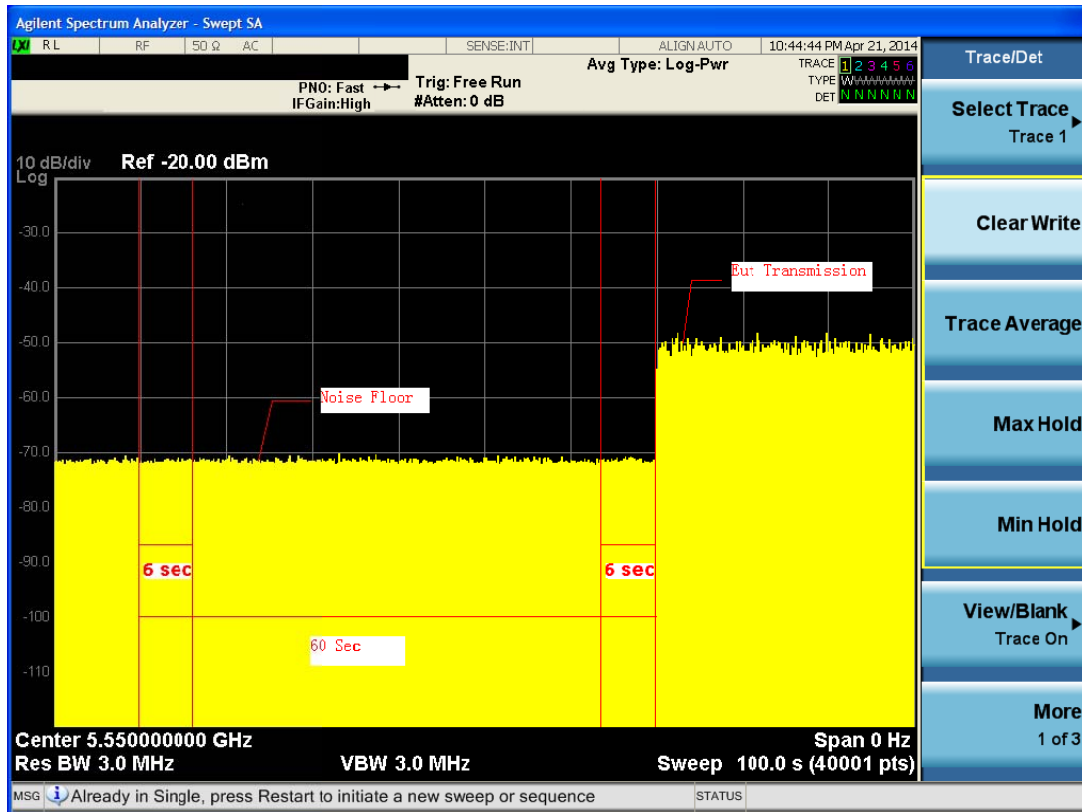

Note: T0 denotes the end of power-up time period is 14 second. T3 denotes the end of Channel Availability Check time is 74 second. Channel Availability Check time is equal to (T3 – T0) 60 seconds.



Radar Burst at the Beginning of the Channel Availability Check Time

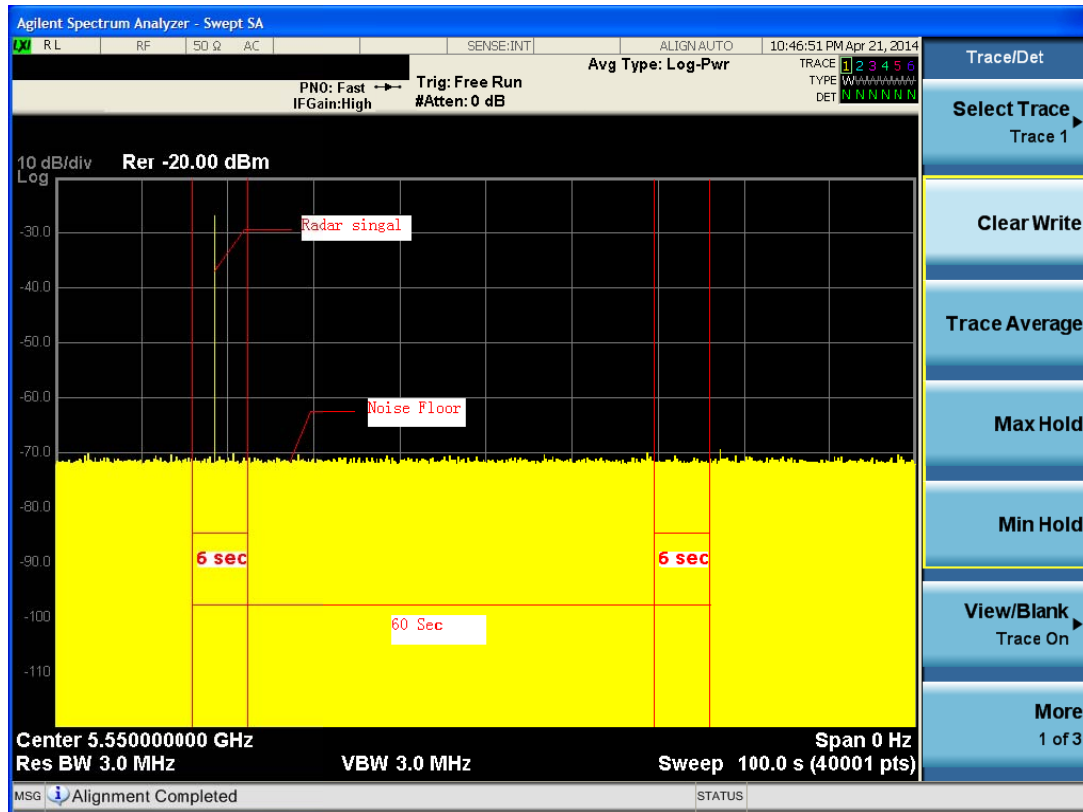


T3 denotes the 74 second.



11n 40MHz Mode

Radar Burst at the End of the Channel Availability Check Time

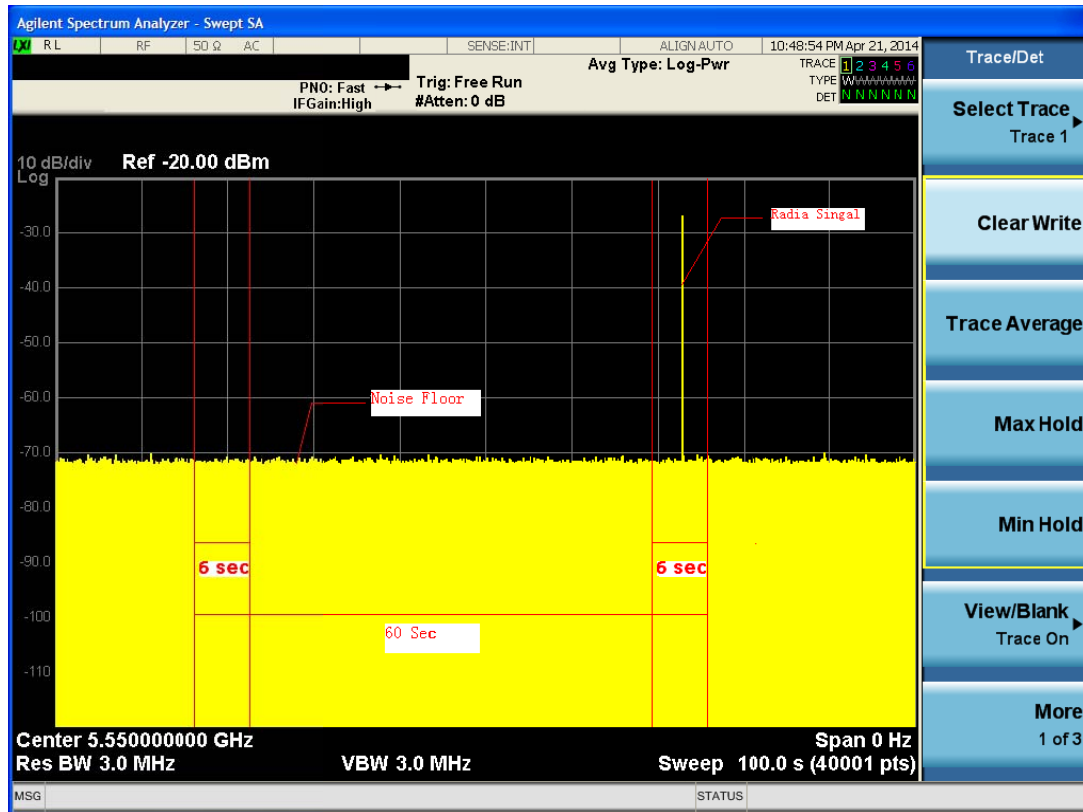

Note: T0 denotes the end of power up time period is 14 second.


T2 denotes 68 second and radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence.

T3 denotes the 74 second



11ac 80MHz Mode

Initial Channel Availability Check Time

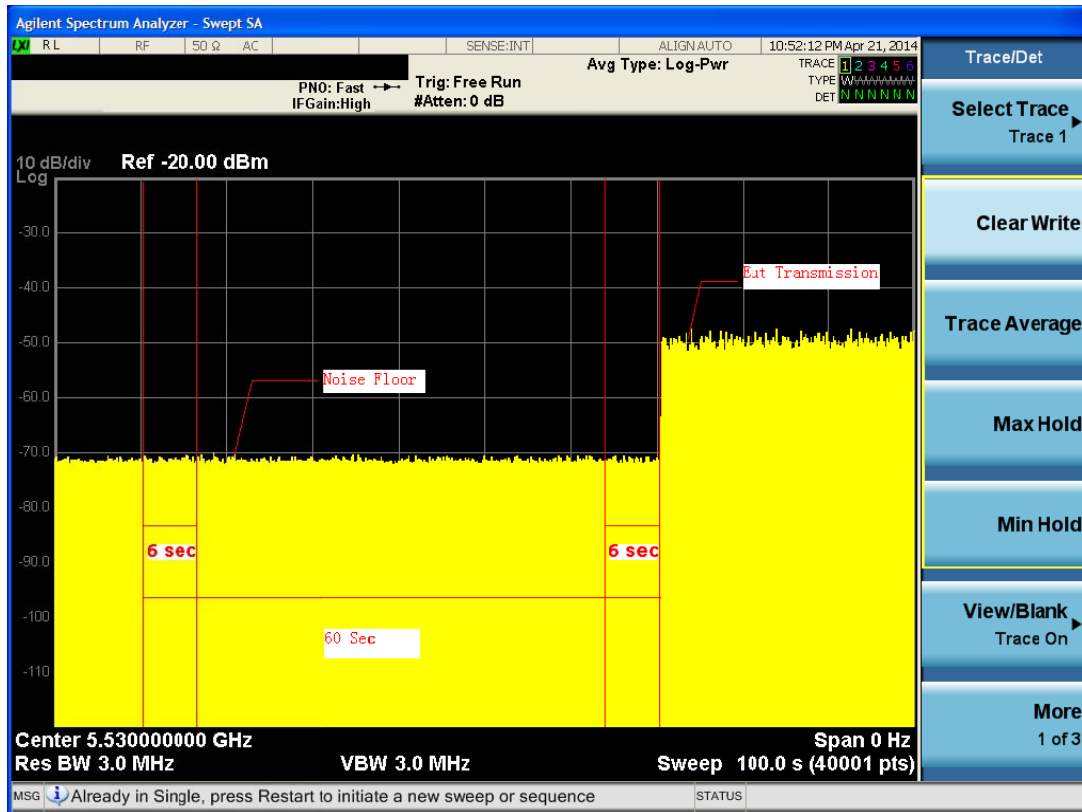


Note: T0 denotes the end of power-up time period is 14 second. T3 denotes the end of Channel Availability Check time is 74 second. Channel Availability Check time is equal to (T3 – T0) 60 seconds.



11ac 80MHz Mode

Radar Burst at the Beginning of the Channel Availability Check Time

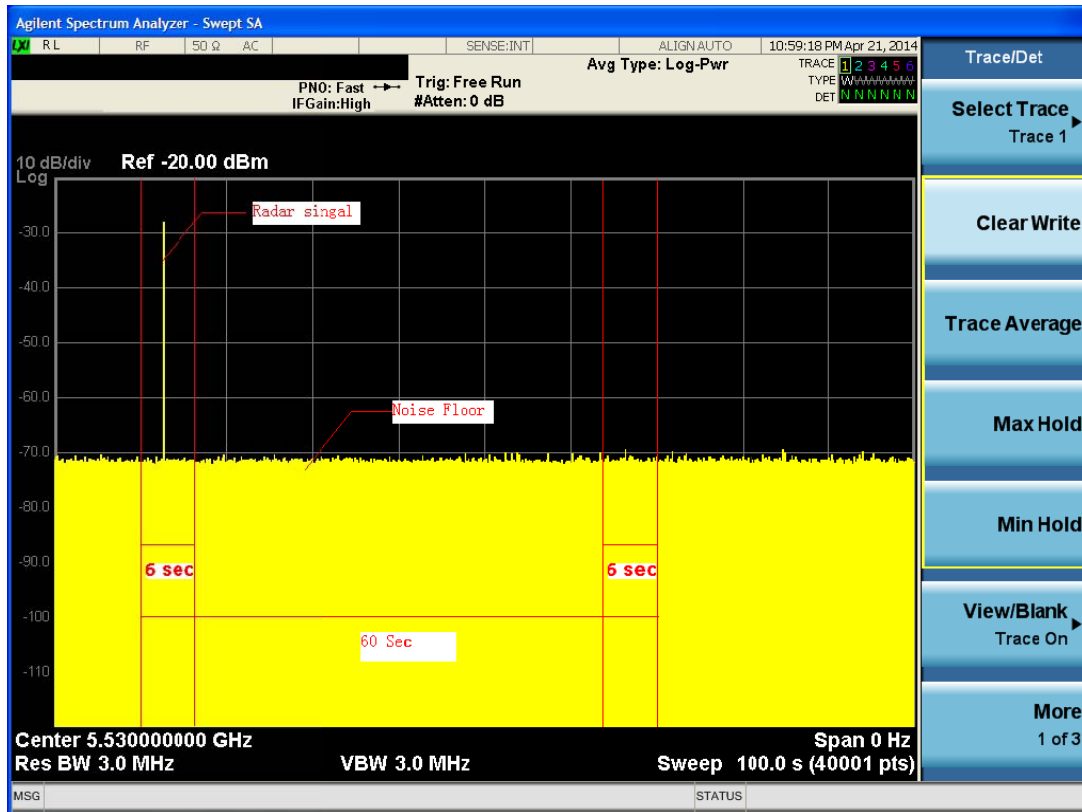

Note: T0 denotes the end of power up time period is 14 second.


T1 denotes 20 second. the radar burst was commenced within a 6 second window starting from the end of power-up sequence.

T3 denotes the 74 second.



11ac 80MHz Mode

Radar Burst at the End of the Channel Availability Check Time

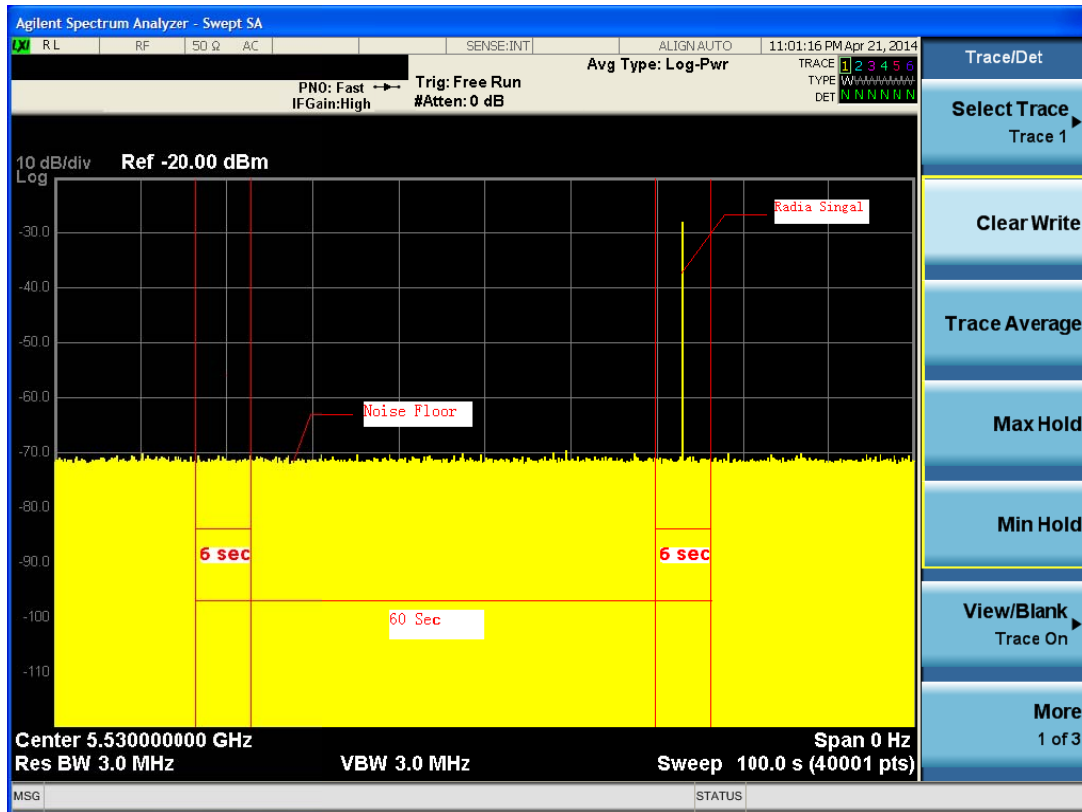

Note: T0 denotes the end of power up time period is 14 second.

T2 denotes 68 second and radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence.

T3 denotes the 74 second



6.2.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC

TX (11a Mode)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
1	1	1428	18	27	3	90
2	1-5	150-230	23-29	28	2	93
3	6-10	200-500	16-18	26	4	87
4	11-20	200-500	12-16	28	2	93
Aggregate (Radar Types 1-4)			-	109	11	91

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Pass times	Fail times	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	0	100


Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	27	3	90



TX (11a Mode)

Radar signal 1

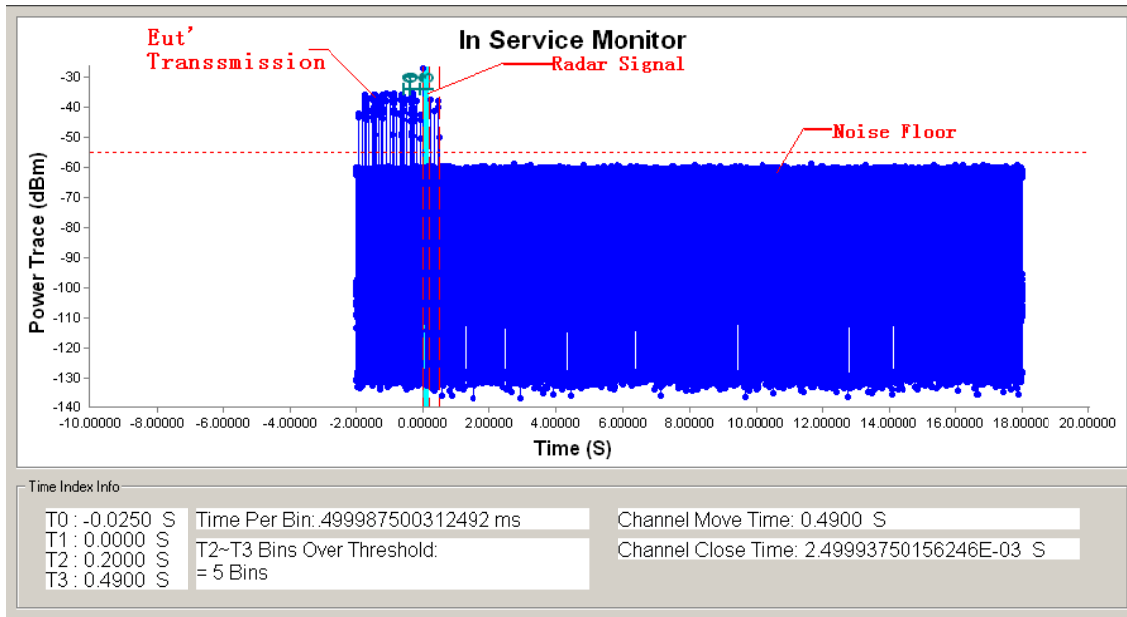

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.




Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11a Mode)

Radar signal 2

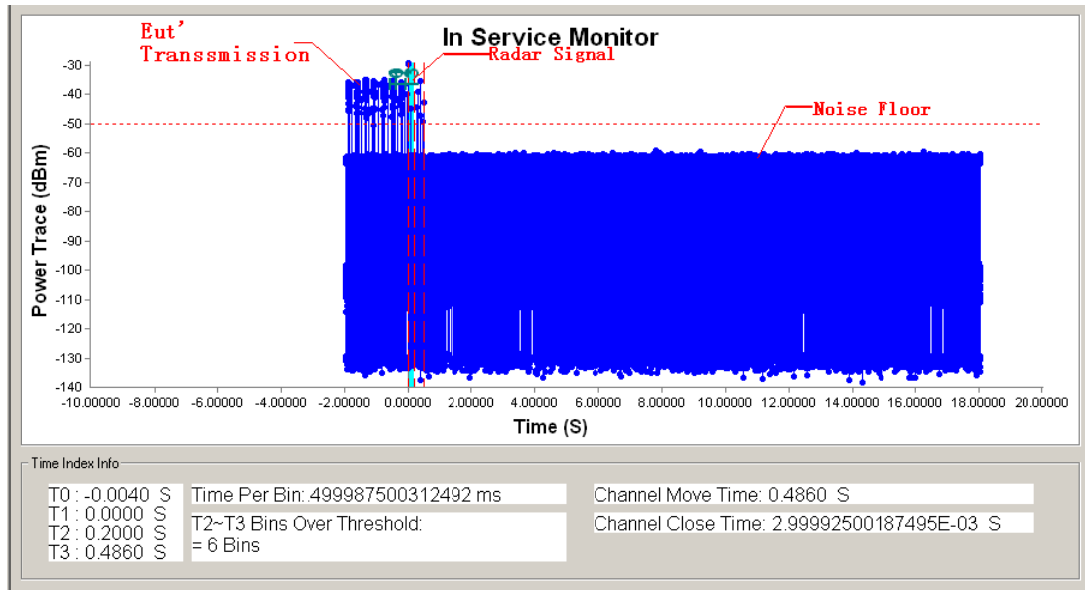

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

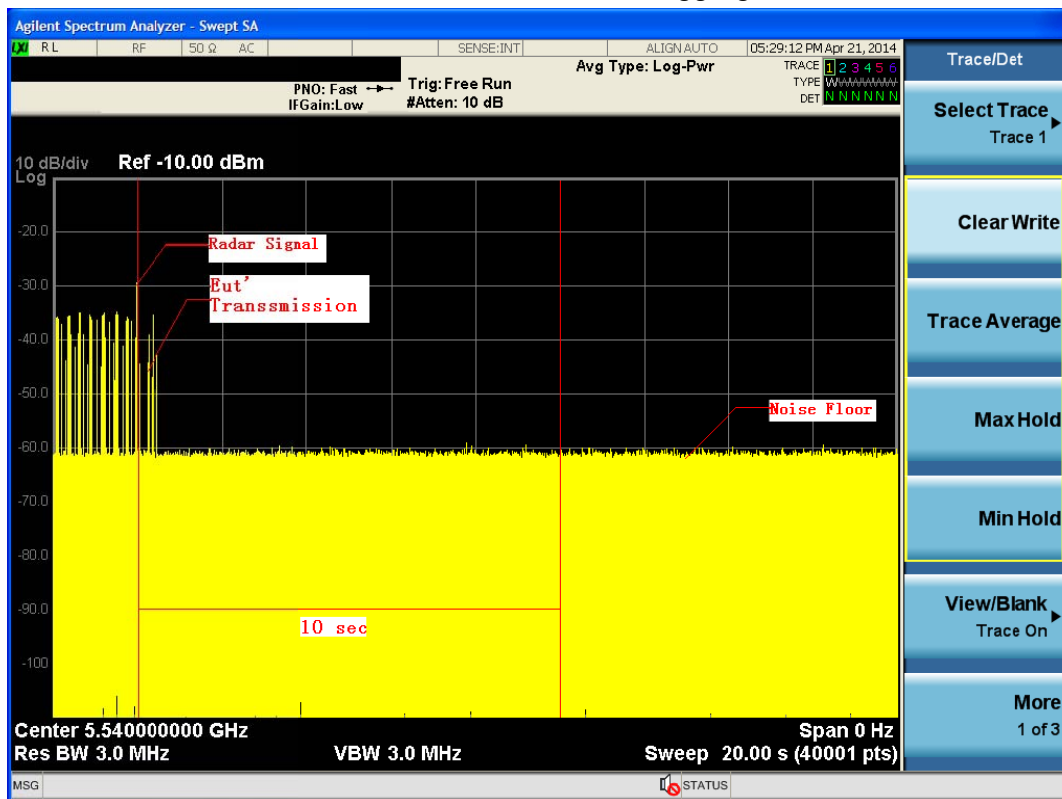


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11a Mode)

Radar signal 3

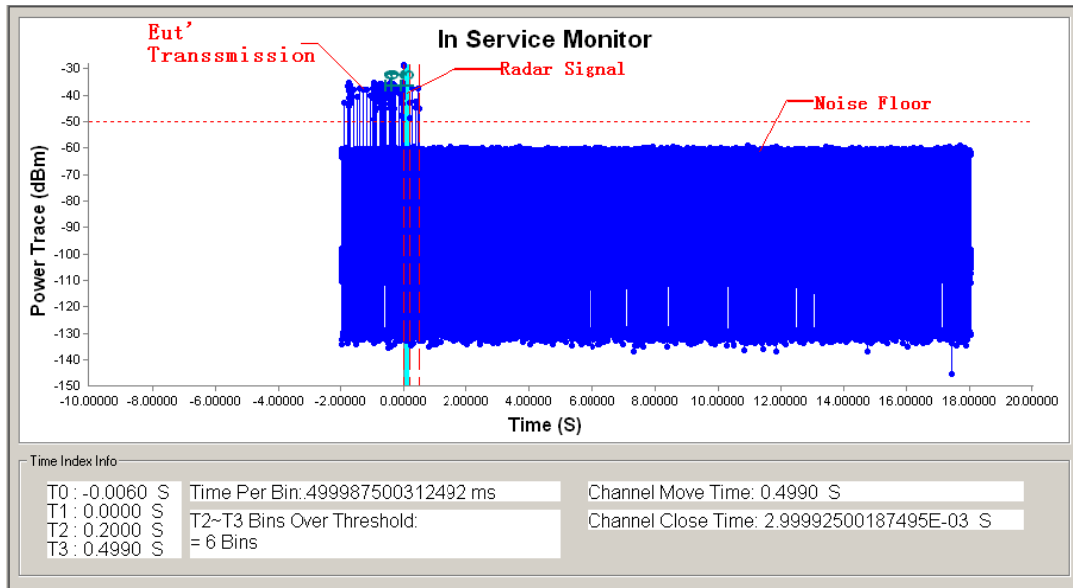

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

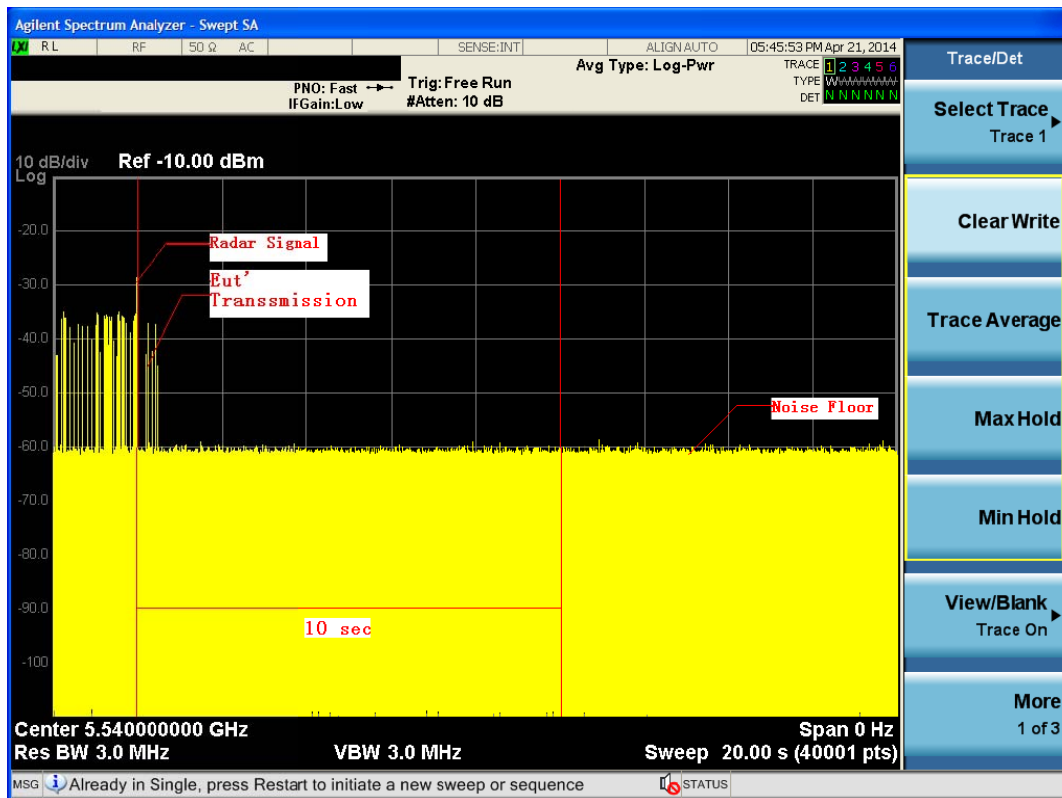


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11a Mode)

Radar signal 4

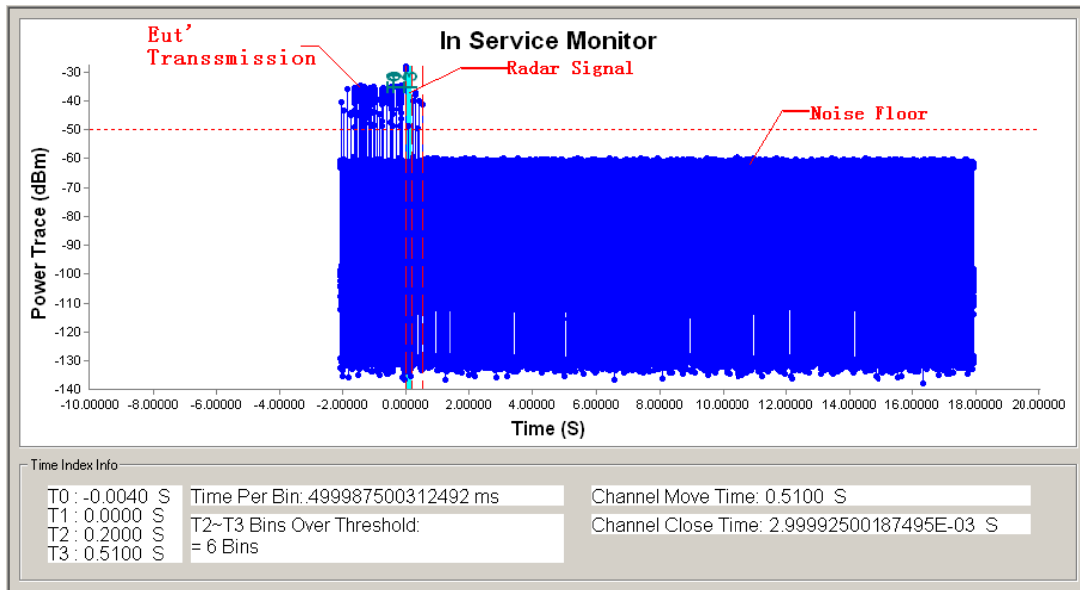

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

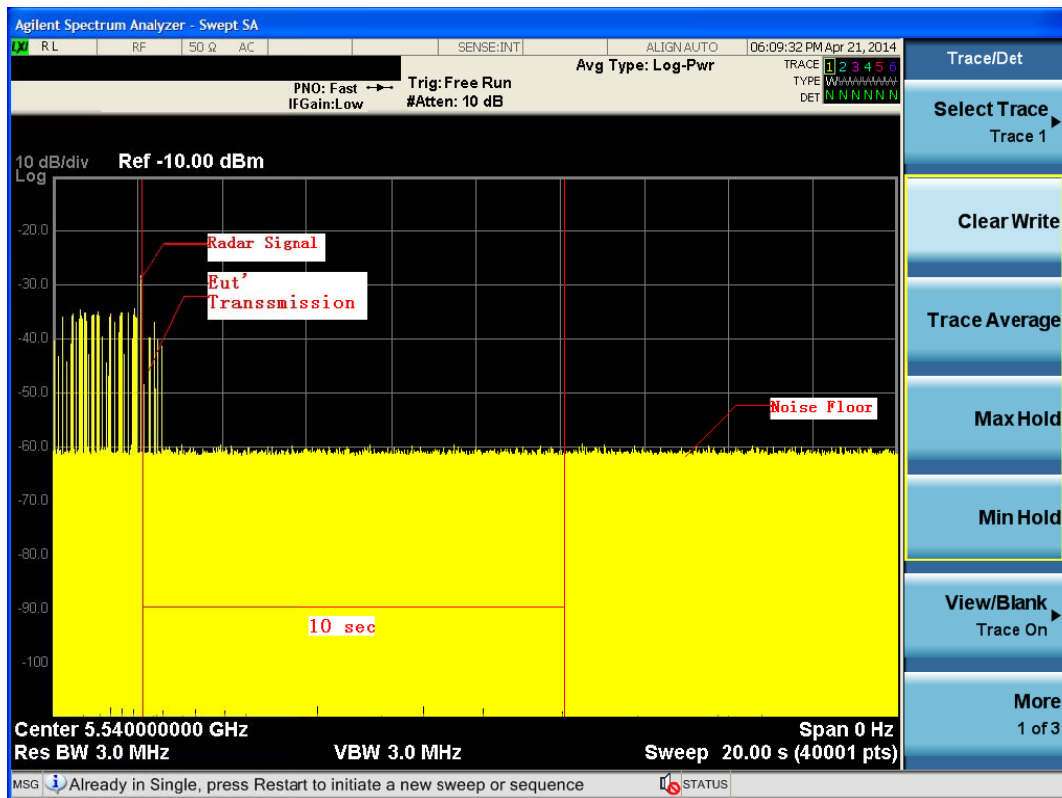


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11a Mode)

Radar signal 5

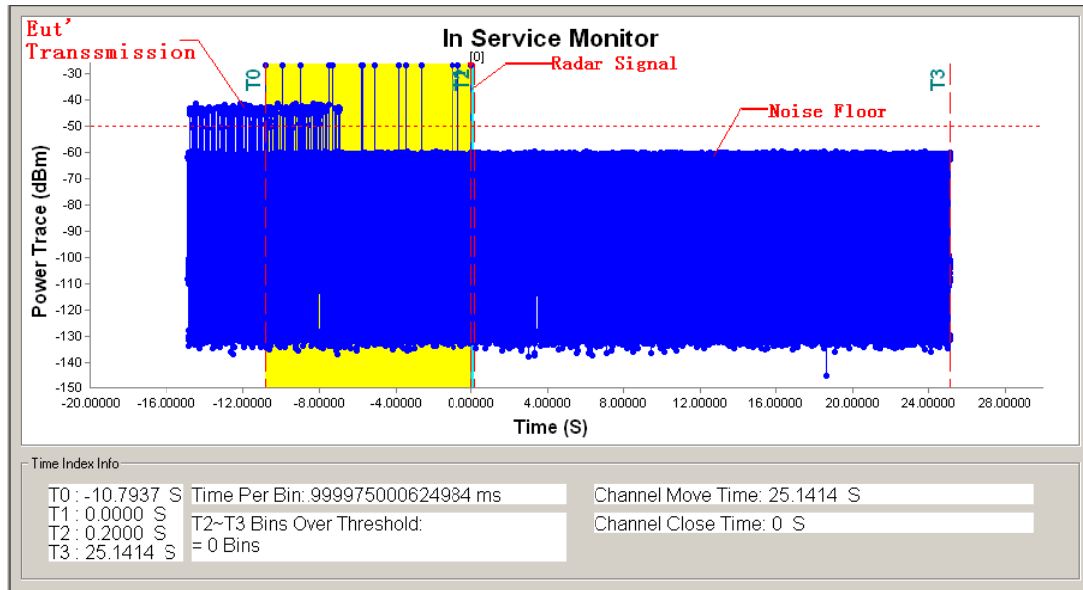

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

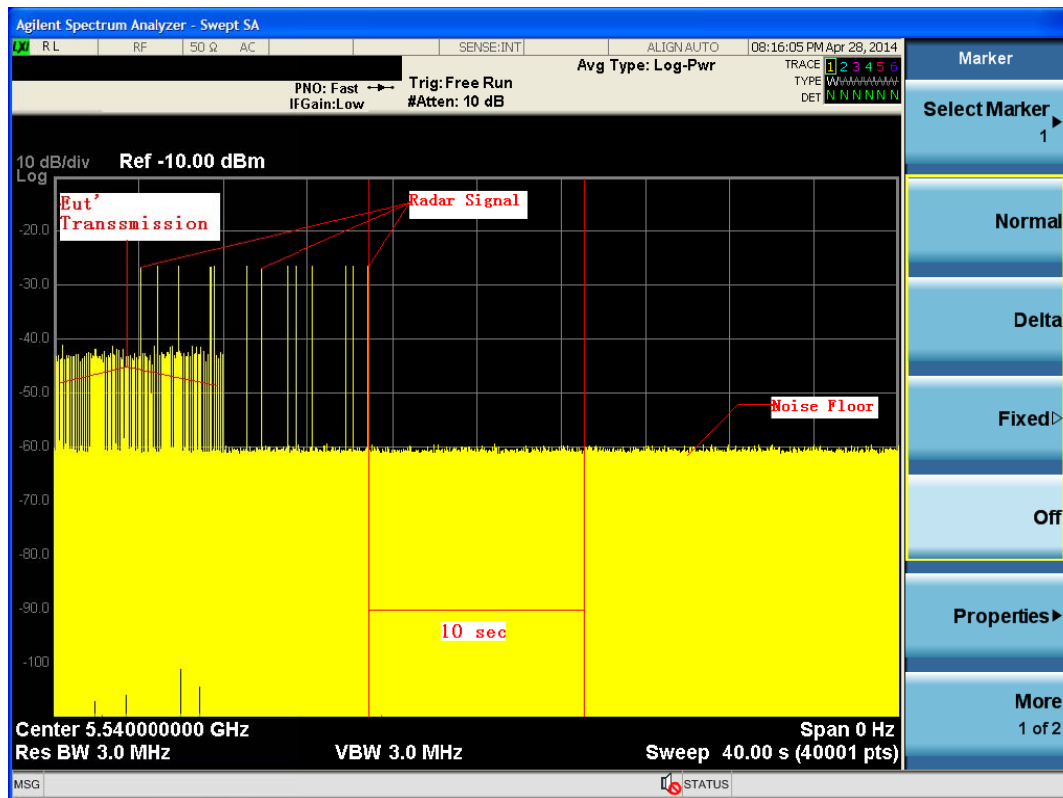


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11a Mode)

Radar signal 6

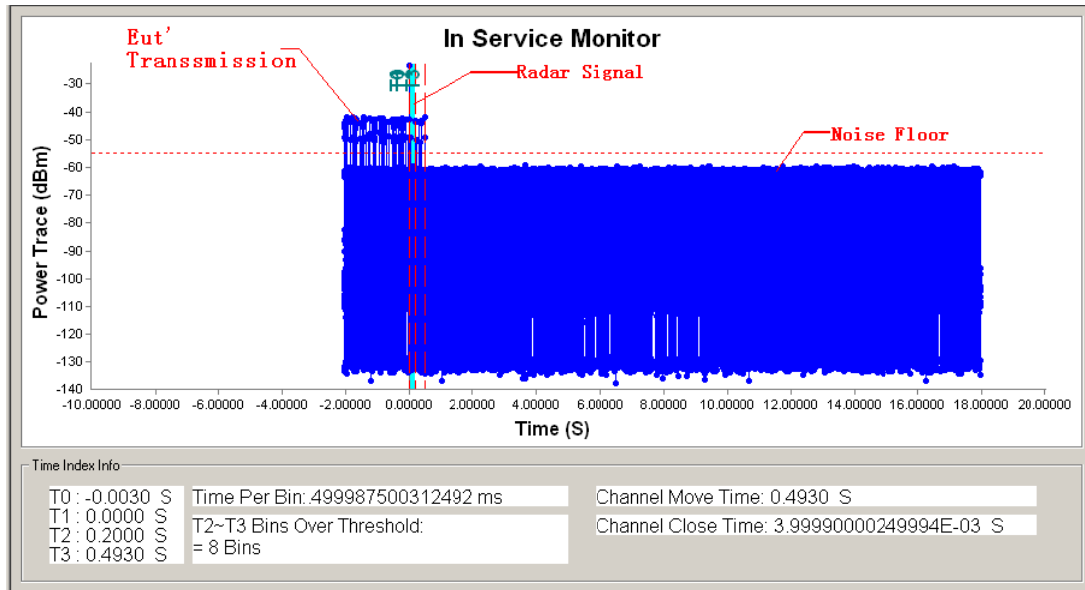

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

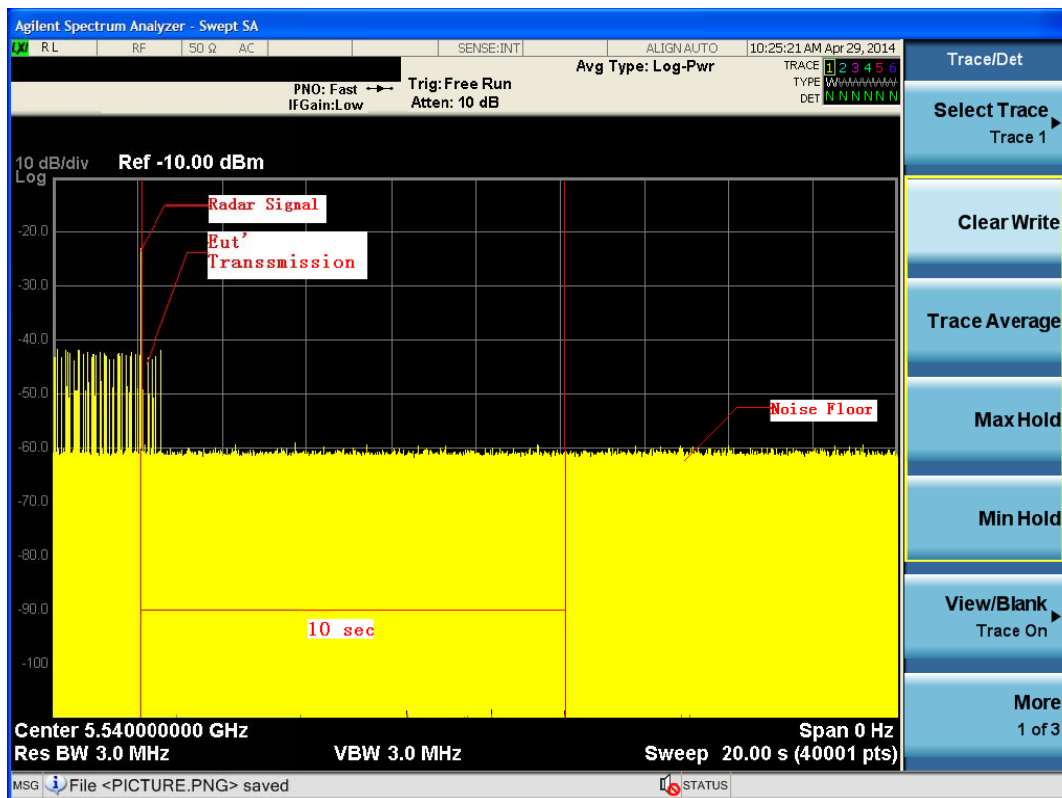

Note: An expanded plot for the device vacates the channel in the required 500ms



TX (11a Mode)

Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(Yes / No)
1	18	1.0u	1.428	YES
2	18	1.0u	1.428	YES
3	18	1.0u	1.428	YES
4	18	1.0u	1.428	YES
5	18	1.0u	1.428	NO
6	18	1.0u	1.428	YES
7	18	1.0u	1.428	YES
8	18	1.0u	1.428	YES
9	18	1.0u	1.428	YES
10	18	1.0u	1.428	YES
11	18	1.0u	1.428	YES
12	18	1.0u	1.428	NO
13	18	1.0u	1.428	YES
14	18	1.0u	1.428	YES
15	18	1.0u	1.428	YES
16	18	1.0u	1.428	YES
17	18	1.0u	1.428	YES
18	18	1.0u	1.428	YES
19	18	1.0u	1.428	YES
20	18	1.0u	1.428	YES
21	18	1.0u	1.428	YES
22	18	1.0u	1.428	YES
23	18	1.0u	1.428	YES
24	18	1.0u	1.428	YES
25	18	1.0u	1.428	NO
26	18	1.0u	1.428	YES
27	18	1.0u	1.428	YES
28	18	1.0u	1.428	YES
29	18	1.0u	1.428	YES
30	18	1.0u	1.428	YES
Detection Rate 90%				



Radar2 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(Yes / No)
1	28	4.3u	208	YES
2	28	2.8u	160	YES
3	26	2.9u	184	YES
4	24	2.7u	190	YES
5	28	3.4u	172	YES
6	28	4.0u	170	YES
7	27	1.3u	220	YES
8	28	1.4u	168	YES
9	25	4.5u	209	YES
10	24	3.3u	204	NO
11	26	2.4u	229	YES
12	27	3.8u	224	YES
13	23	2.7u	207	YES
14	24	3.3u	204	YES
15	26	2.4u	229	YES
16	27	3.8u	224	NO
17	29	2.7u	226	YES
18	29	2.9u	210	YES
19	27	1.8u	190	YES
20	26	2.0u	198	YES
21	23	1.2u	151	YES
22	25	1.4u	168	YES
23	25	1.5u	193	YES
24	27	2.6u	228	YES
25	26	1.7u	216	YES
26	23	4.8u	225	YES
27	28	1.9u	221	YES
28	26	4.1u	227	YES
29	26	3.1u	169	YES
30	27	2.2u	208	YES
Detection Rate 93%				



Radar3 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(Yes / No)
1	18	8.6u	405	YES
2	18	8.4u	410	YES
3	16	9.3u	398	NO
4	16	8.0u	364	YES
5	17	9.6u	366	YES
6	18	8.0u	258	YES
7	16	9.3u	268	NO
8	16	8.2u	477	YES
9	18	8.7u	206	YES
10	18	9.0u	213	YES
11	16	9.8u	482	YES
12	17	7.9u	436	YES
13	17	7.0u	447	YES
14	16	7.6u	410	YES
15	16	8.2u	300	YES
16	18	7.4u	336	YES
17	16	9.3u	492	YES
18	17	7.5u	471	YES
19	17	7.9u	481	NO
20	18	8.0u	492	YES
21	16	9.9u	463	YES
22	17	8.5u	445	YES
23	17	8.0u	250	YES
24	16	8.0u	364	YES
25	17	7.2u	435	YES
26	18	6.5u	336	YES
27	18	6.8u	480	YES
28	17	7.2u	435	NO
29	18	6.5u	336	YES
30	18	6.8u	480	YES
Detection Rate 87%				



Radar4 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(Yes / No)
1	13	13.8u	482	YES
2	15	14.9u	436	YES
3	15	15.8u	447	YES
4	15	14.6u	410	YES
5	14	13.9u	481	YES
6	14	16.0u	492	YES
7	15	17.0u	463	YES
8	12	17.5u	445	YES
9	12	16.0u	442	YES
10	13	13.6u	405	YES
11	16	14.4u	440	YES
12	16	15.3u	398	YES
13	13	14.0u	364	YES
14	16	13.2u	477	YES
15	12	12.7u	206	NO
16	13	12.0u	213	YES
17	15	19.0u	300	YES
18	13	11.4u	336	YES
19	16	12.5u	330	YES
20	13	16.6u	463	YES
21	13	18.8u	445	YES
22	15	19.0u	442	YES
23	15	14.8u	405	YES
24	15	18.6u	409	YES
25	15	18.2u	441	YES
26	12	20.0u	332	YES
27	14	14.8u	478	YES
28	13	15.6u	367	YES
29	14	17.0u	258	NO
30	15	19.3u	270	YES
Detection Rate 93%				



Radar5 Statical Performances		
Trial #	Test Signal name	Detection(Yes / No)
1	LP_Signal_01	Yes
2	LP_Signal_02	Yes
3	LP_Signal_03	Yes
4	LP_Signal_04	Yes
5	LP_Signal_05	Yes
6	LP_Signal_06	Yes
7	LP_Signal_07	Yes
8	LP_Signal_08	Yes
9	LP_Signal_09	Yes
10	LP_Signal_10	Yes
11	LP_Signal_11	Yes
12	LP_Signal_12	Yes
13	LP_Signal_13	Yes
14	LP_Signal_14	Yes
15	LP_Signal_15	Yes
16	LP_Signal_16	Yes
17	LP_Signal_17	Yes
18	LP_Signal_18	Yes
19	LP_Signal_19	Yes
20	LP_Signal_20	Yes
21	LP_Signal_21	Yes
22	LP_Signal_22	Yes
23	LP_Signal_23	Yes
24	LP_Signal_24	Yes
25	LP_Signal_25	Yes
26	LP_Signal_26	Yes
27	LP_Signal_27	Yes
28	LP_Signal_28	Yes
29	LP_Signal_29	Yes
30	LP_Signal_30	Yes
Detection Rate 100%		



Radar6 Statical Performances		
Trial #	Hoping Frequency Sequence Name	Detection(Yes / No)
1	HOP_FREQ_SEQ_01	Yes
2	HOP_FREQ_SEQ_02	Yes
3	HOP_FREQ_SEQ_03	Yes
4	HOP_FREQ_SEQ_04	NO
5	HOP_FREQ_SEQ_05	Yes
6	HOP_FREQ_SEQ_06	Yes
7	HOP_FREQ_SEQ_07	Yes
8	HOP_FREQ_SEQ_08	Yes
9	HOP_FREQ_SEQ_09	Yes
10	HOP_FREQ_SEQ_10	Yes
11	HOP_FREQ_SEQ_11	Yes
12	HOP_FREQ_SEQ_12	NO
13	HOP_FREQ_SEQ_13	Yes
14	HOP_FREQ_SEQ_14	Yes
15	HOP_FREQ_SEQ_15	NO
16	HOP_FREQ_SEQ_16	Yes
17	HOP_FREQ_SEQ_17	Yes
18	HOP_FREQ_SEQ_18	Yes
19	HOP_FREQ_SEQ_19	Yes
20	HOP_FREQ_SEQ_20	Yes
21	HOP_FREQ_SEQ_21	Yes
22	HOP_FREQ_SEQ_22	Yes
23	HOP_FREQ_SEQ_23	Yes
24	HOP_FREQ_SEQ_24	Yes
25	HOP_FREQ_SEQ_25	Yes
26	HOP_FREQ_SEQ_26	Yes
27	HOP_FREQ_SEQ_27	Yes
28	HOP_FREQ_SEQ_28	Yes
29	HOP_FREQ_SEQ_29	Yes
30	HOP_FREQ_SEQ_30	Yes
Detection Rate 90%		



TX (11n 40MHz Mode)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
1	1	1428	18	29	1	97
2	1-5	150-230	23-29	30	0	100
3	6-10	200-500	16-18	28	2	93
4	11-20	200-500	12-16	29	1	97
Aggregate (Radar Types 1-4)			-	116	4	97

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Pass times	Fail times	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	0	100


Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	29	1	97




TX (11n 40MHz Mode)

Radar signal 1

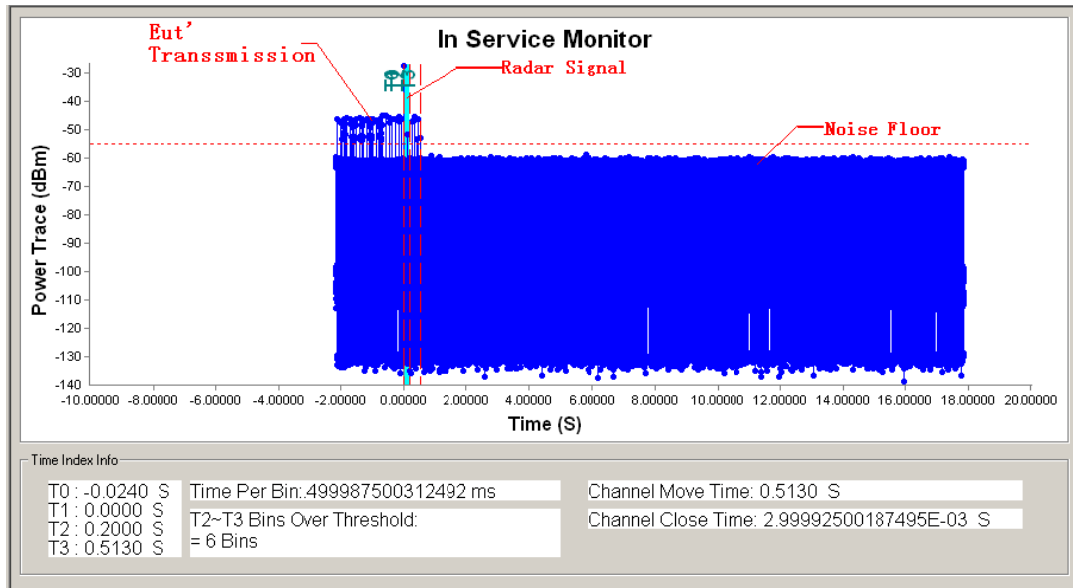

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

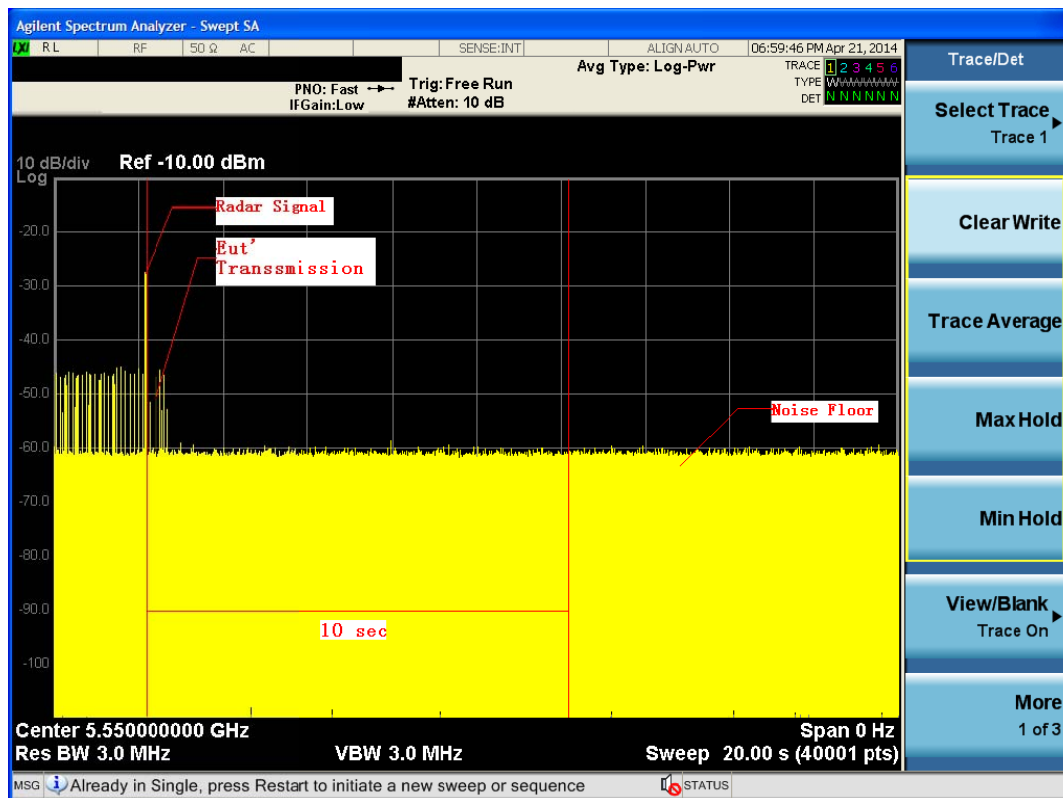


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11n 40MHz Mode)

Radar signal 2

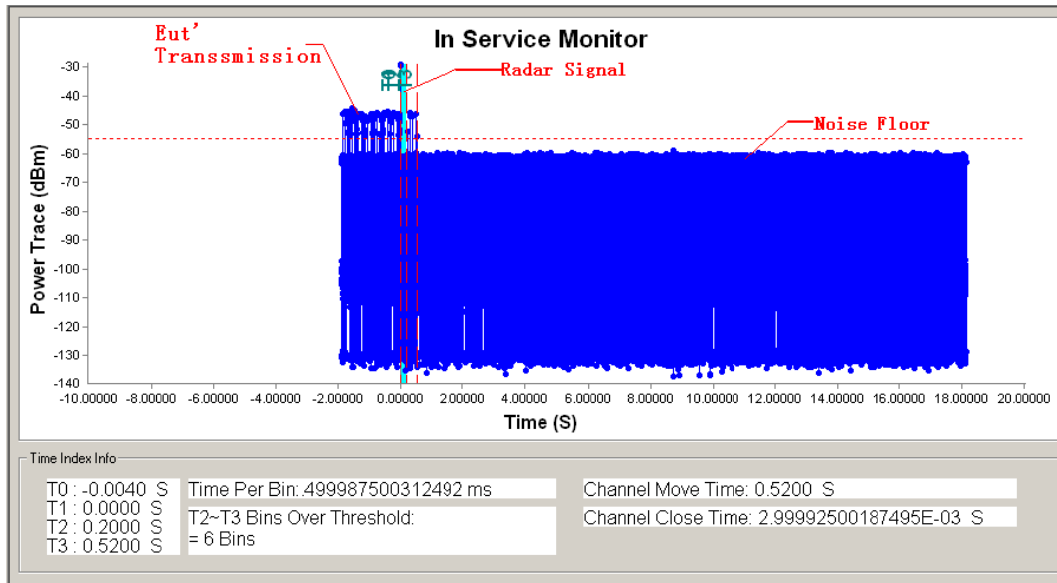

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

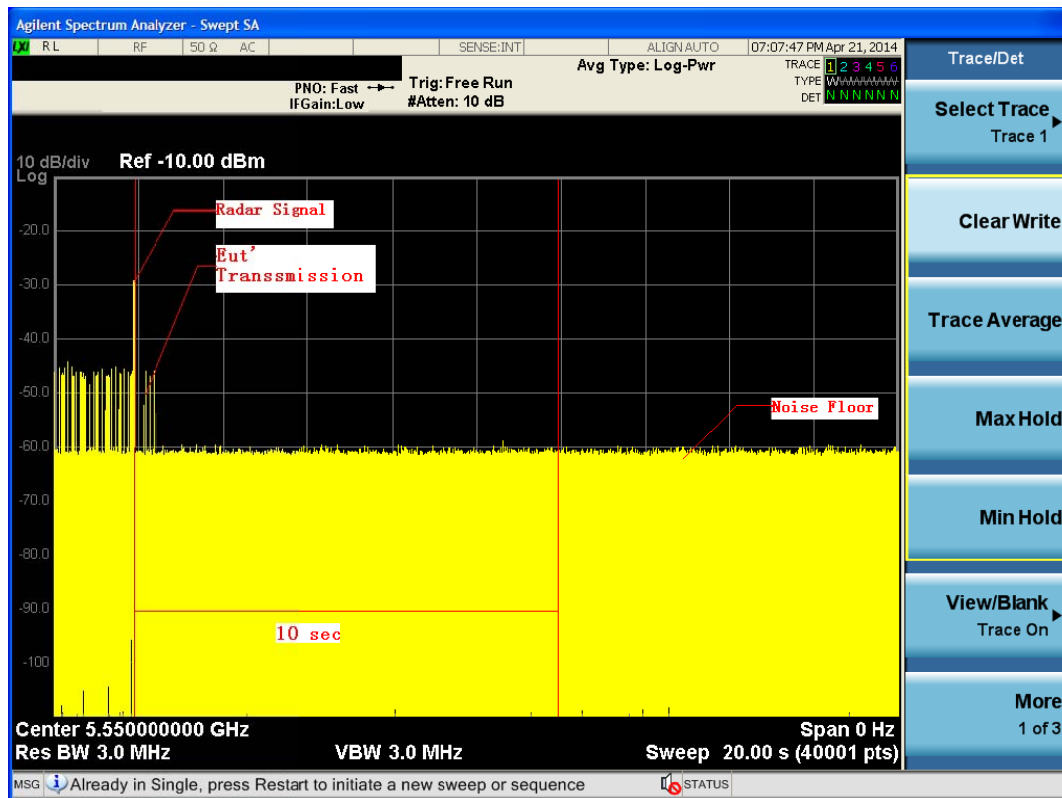


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11n 40MHz Mode)

Radar signal 3

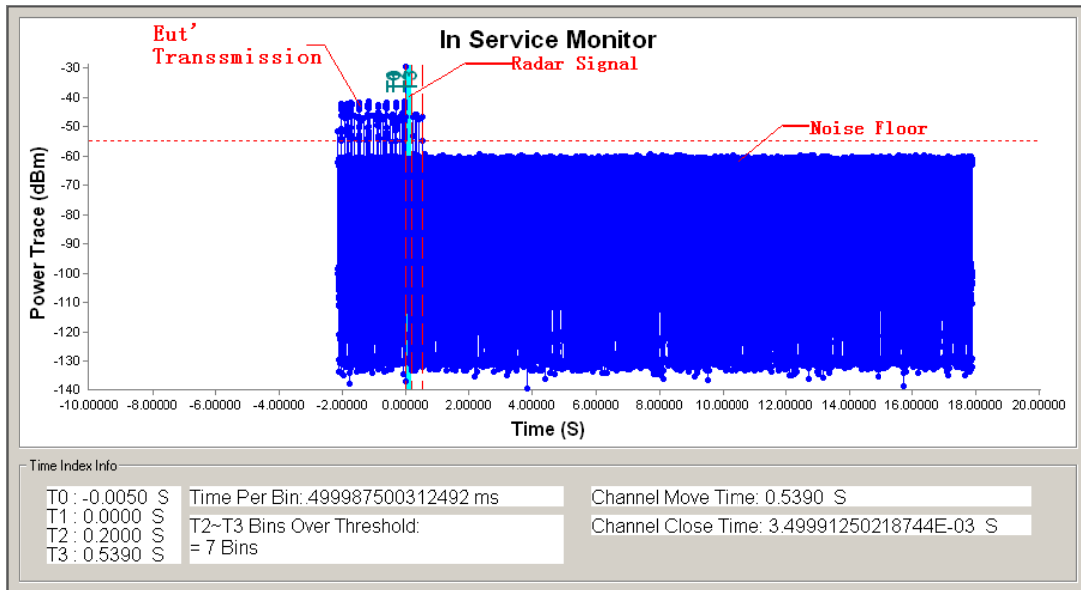

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

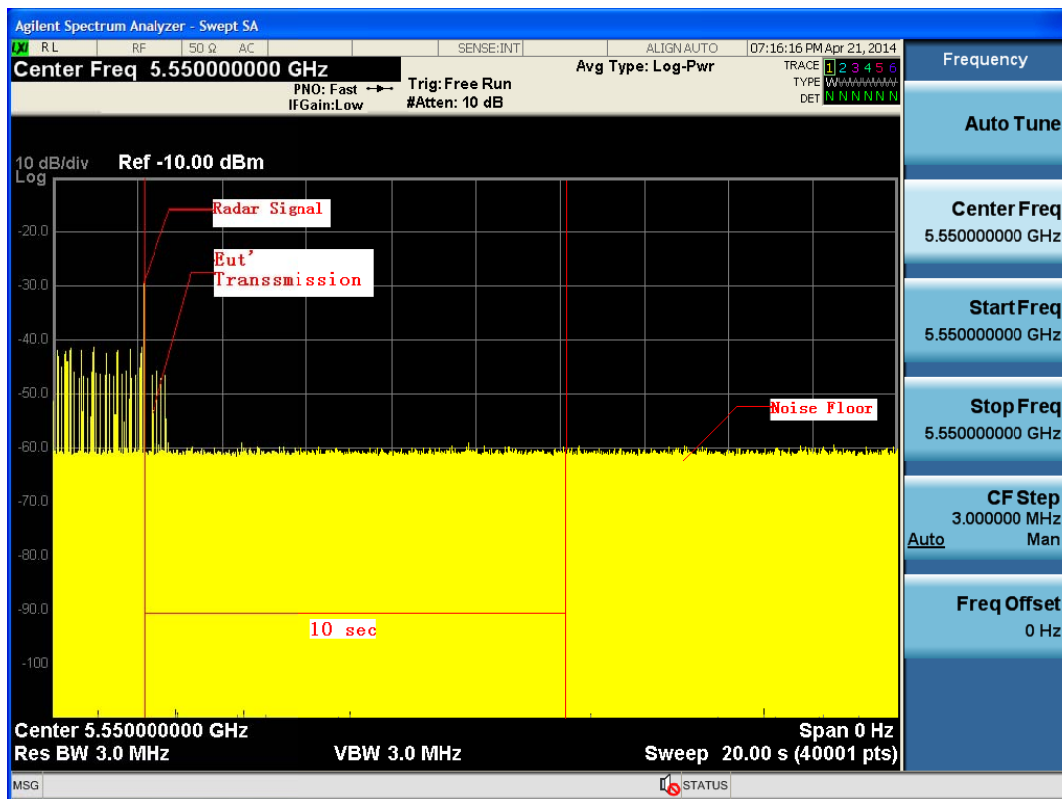


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11n 40MHz Mode)

Radar signal 4

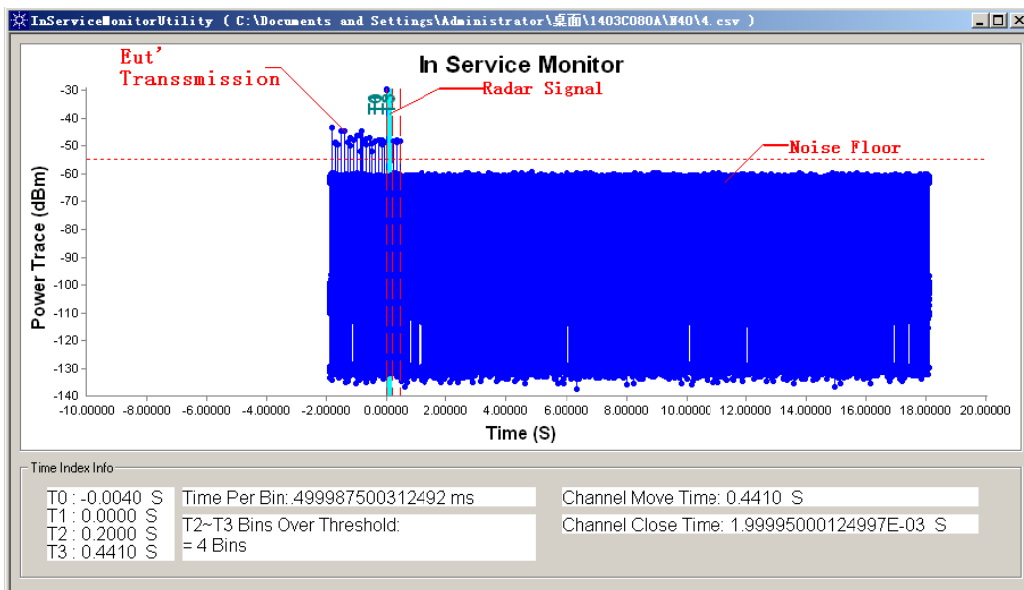

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

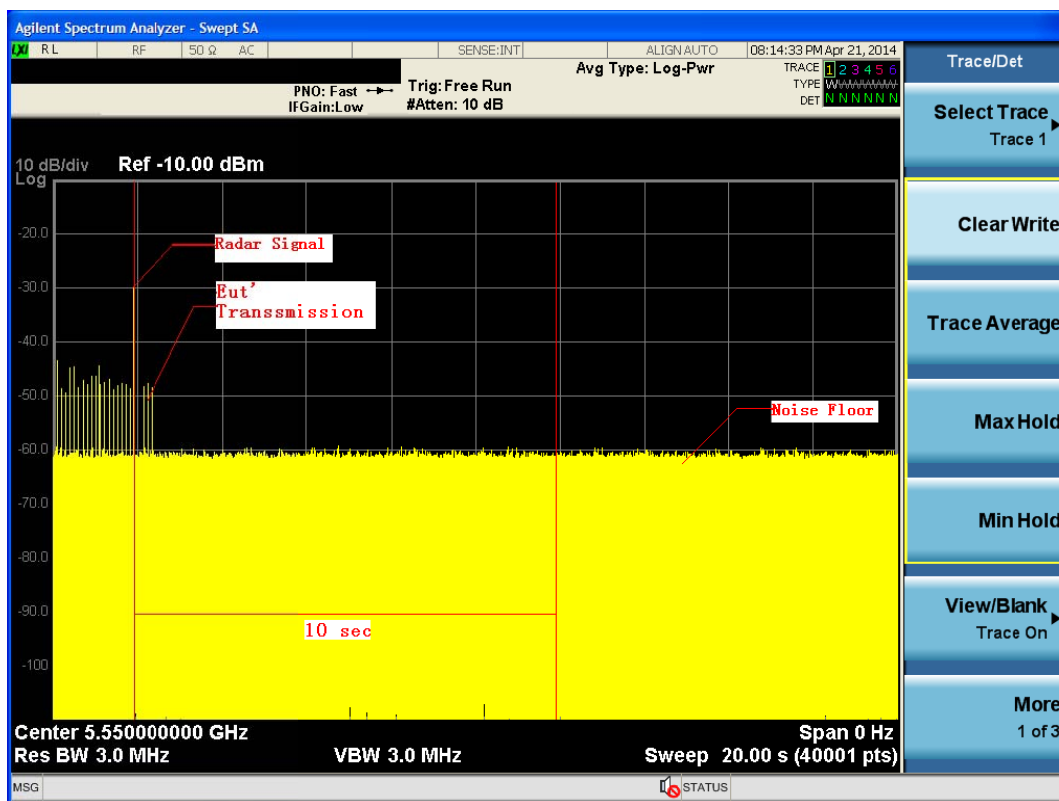


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11n 40MHz Mode)

Radar signal 5

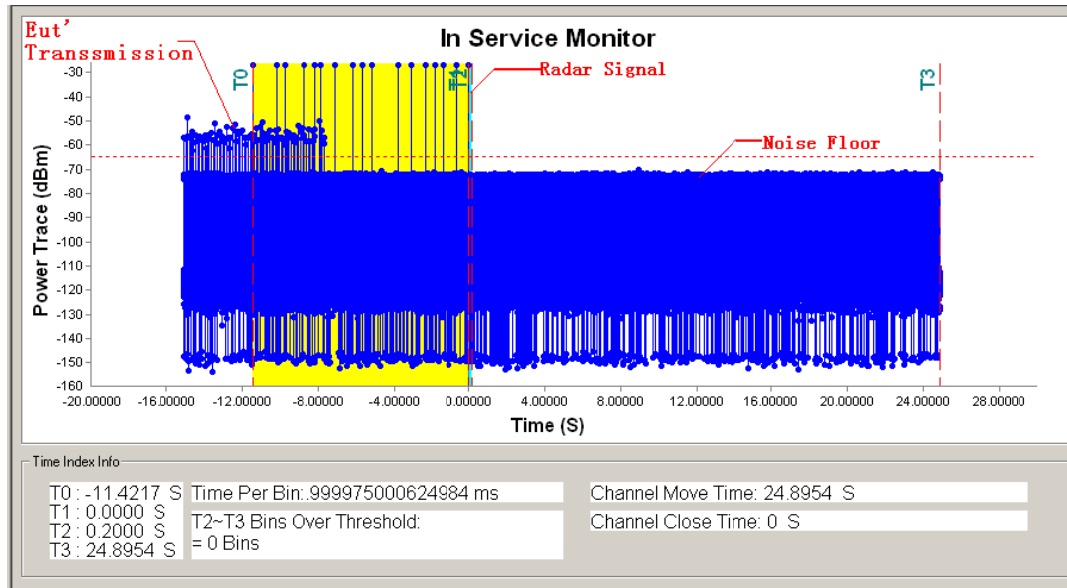

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

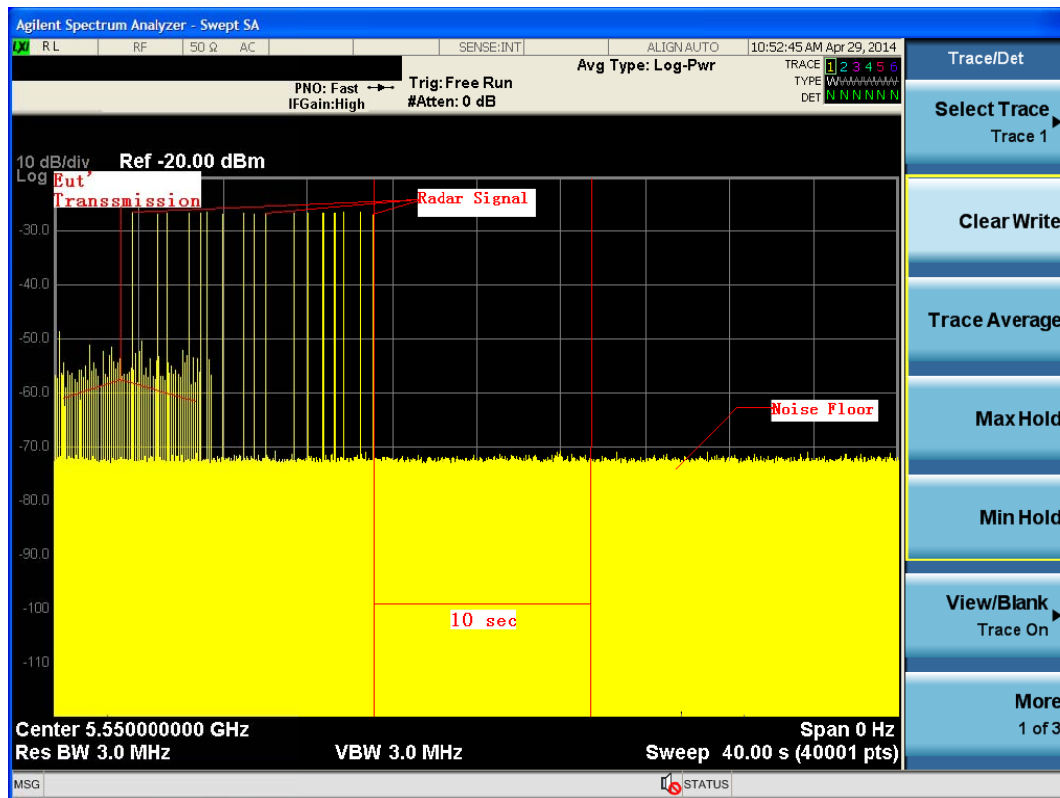


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11n 40MHz Mode)

Radar signal 6

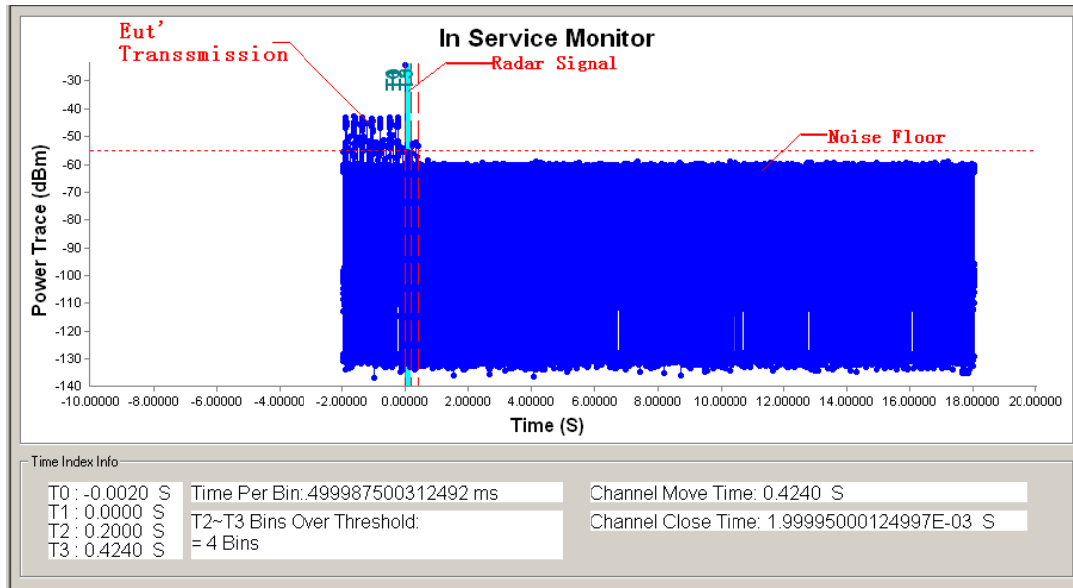

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

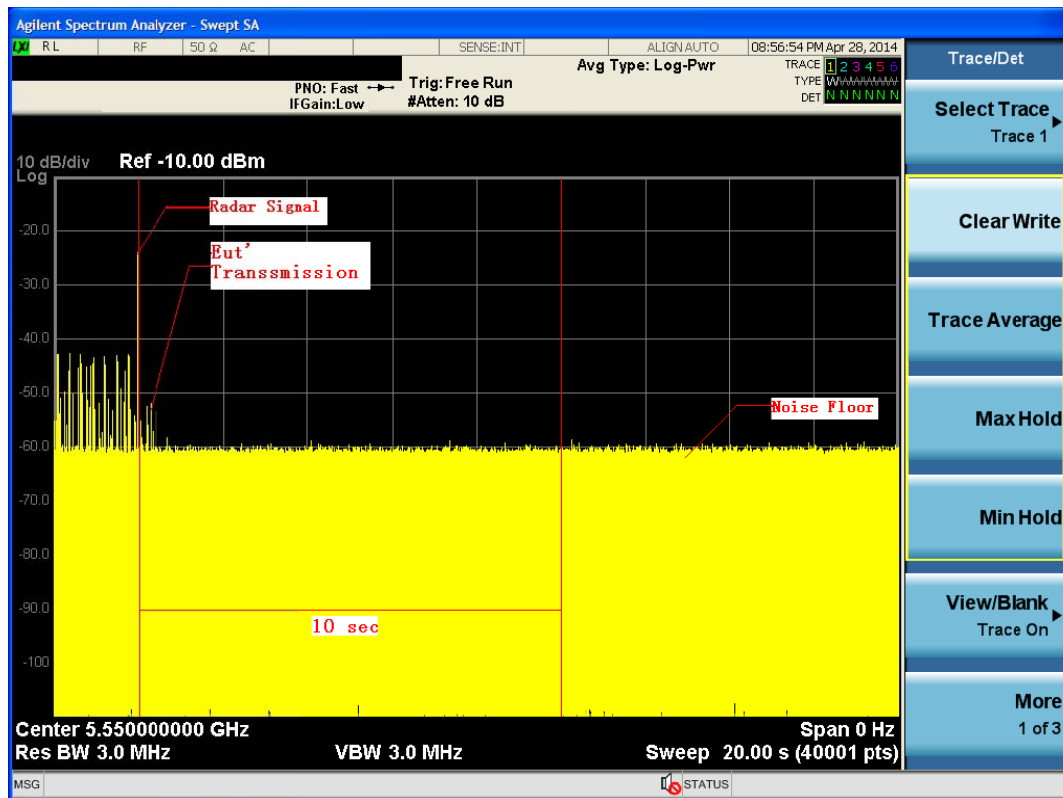

Note: An expanded plot for the device vacates the channel in the required 500ms



TX (11n 40MHz Mode)

Radar1 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(Yes / No)
1	18	1.0u	1.428	YES
2	18	1.0u	1.428	YES
3	18	1.0u	1.428	YES
4	18	1.0u	1.428	YES
5	18	1.0u	1.428	YES
6	18	1.0u	1.428	YES
7	18	1.0u	1.428	YES
8	18	1.0u	1.428	YES
9	18	1.0u	1.428	YES
10	18	1.0u	1.428	YES
11	18	1.0u	1.428	YES
12	18	1.0u	1.428	NO
13	18	1.0u	1.428	YES
14	18	1.0u	1.428	YES
15	18	1.0u	1.428	YES
16	18	1.0u	1.428	YES
17	18	1.0u	1.428	YES
18	18	1.0u	1.428	YES
19	18	1.0u	1.428	YES
20	18	1.0u	1.428	YES
21	18	1.0u	1.428	YES
22	18	1.0u	1.428	YES
23	18	1.0u	1.428	YES
24	18	1.0u	1.428	YES
25	18	1.0u	1.428	YES
26	18	1.0u	1.428	YES
27	18	1.0u	1.428	YES
28	18	1.0u	1.428	YES
29	18	1.0u	1.428	YES
30	18	1.0u	1.428	YES
Detection Rate 97%				



Radar2 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(Yes / No)
1	25	4.0u	208	YES
2	25	3.9u	160	YES
3	24	2.4u	218	YES
4	24	3.8u	220	YES
5	27	1.4u	168	YES
6	23	4.5u	209	YES
7	27	3.3u	190	YES
8	26	2.4u	198	YES
9	26	3.8u	224	YES
10	25	3.2u	207	YES
11	27	1.1u	158	YES
12	26	3.0u	157	YES
13	25	1.9u	168	YES
14	24	1.8u	192	YES
15	27	2.8u	228	YES
16	23	3.8u	216	YES
17	25	2.7u	228	YES
18	26	3.2u	221	YES
19	24	4.3u	227	YES
20	27	3.1u	186	YES
21	28	2.2u	172	YES
22	23	1.3u	170	YES
23	29	1.4u	166	YES
24	25	4.5u	221	YES
25	25	2.5u	135	YES
26	25	4.9u	220	YES
27	29	2.7u	204	YES
28	27	2.9u	229	YES
29	24	2.8u	220	YES
30	29	2.6u	198	YES
Detection Rate 100%				



Radar3 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(s)	PRI(us)	Detection(Yes / No)
1	18	9.5u	269	YES
2	16	9.8u	431	YES
3	16	8.5u	436	YES
4	18	9.9u	447	YES
5	16	8.5u	477	YES
6	17	8.0u	206	YES
7	16	6.5u	477	YES
8	18	8.2u	206	YES
9	18	8.7u	218	NO
10	18	9.5u	482	YES
11	16	6.0u	436	YES
12	18	7.0u	463	YES
13	17	9.5u	492	YES
14	16	9.8u	463	YES
15	18	8.0u	431	YES
16	18	9.6u	330	YES
17	18	6.0u	230	NO
18	18	9.5u	269	YES
19	16	9.8u	431	YES
20	16	8.5u	436	YES
21	18	9.9u	447	YES
22	16	8.5u	477	YES
23	17	8.0u	206	YES
24	16	8.6u	440	YES
25	18	9.9u	442	YES
26	16	8.5u	405	YES
27	17	8.0u	364	YES
28	18	6.0u	366	YES
29	16	9.5u	364	YES
30	16	6.0u	366	YES
Detection Rate 93%				



Radar4 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(Yes / No)
1	16	15.8u	482	YES
2	16	14.6u	436	YES
3	14	13.9u	447	YES
4	14	16.5u	258	YES
5	13	14.0u	270	YES
6	16	15.6u	482	YES
7	15	17.0u	330	YES
8	16	19.3u	335	YES
9	14	18.2u	328	YES
10	14	15.3u	445	YES
11	14	19.0u	442	YES
12	15	13.8u	332	YES
13	16	14.9u	478	YES
14	12	15.8u	442	YES
15	15	19.6u	405	YES
16	16	13.9u	409	YES
17	16	16.0u	463	YES
18	12	11.5u	490	NO
19	14	12.0u	442	YES
20	15	13.8u	405	YES
21	15	14.9u	370	YES
22	13	19.8u	470	YES
23	15	14.6u	320	YES
24	13	13.9u	485	YES
25	14	18.0u	414	YES
26	12	13.2u	409	YES
27	15	12.0u	477	YES
28	16	12.0u	206	YES
29	12	13.8u	216	YES
30	13	15.0u	213	YES
Detection Rate 87%				



Radar5 Statical Performances		
Trial #	Test Signal name	Detection(Yes / No)
1	LP_Signal_01	Yes
2	LP_Signal_02	Yes
3	LP_Signal_03	Yes
4	LP_Signal_04	Yes
5	LP_Signal_05	Yes
6	LP_Signal_06	Yes
7	LP_Signal_07	Yes
8	LP_Signal_08	Yes
9	LP_Signal_09	Yes
10	LP_Signal_10	Yes
11	LP_Signal_11	Yes
12	LP_Signal_12	Yes
13	LP_Signal_13	Yes
14	LP_Signal_14	Yes
15	LP_Signal_15	Yes
16	LP_Signal_16	Yes
17	LP_Signal_17	Yes
18	LP_Signal_18	Yes
19	LP_Signal_19	Yes
20	LP_Signal_20	Yes
21	LP_Signal_21	Yes
22	LP_Signal_22	Yes
23	LP_Signal_23	Yes
24	LP_Signal_24	Yes
25	LP_Signal_25	Yes
26	LP_Signal_26	Yes
27	LP_Signal_27	Yes
28	LP_Signal_28	Yes
29	LP_Signal_29	Yes
30	LP_Signal_30	Yes
Detection Rate 100%		



Radar6 Statical Performances		
Trial #	Hoping Frequency Sequence Name	Detection(Yes / No)
1	HOP_FREQ_SEQ_01	Yes
2	HOP_FREQ_SEQ_02	Yes
3	HOP_FREQ_SEQ_03	Yes
4	HOP_FREQ_SEQ_04	Yes
5	HOP_FREQ_SEQ_05	Yes
6	HOP_FREQ_SEQ_06	Yes
7	HOP_FREQ_SEQ_07	Yes
8	HOP_FREQ_SEQ_08	Yes
9	HOP_FREQ_SEQ_09	Yes
10	HOP_FREQ_SEQ_10	Yes
11	HOP_FREQ_SEQ_11	Yes
12	HOP_FREQ_SEQ_12	Yes
13	HOP_FREQ_SEQ_13	Yes
14	HOP_FREQ_SEQ_14	Yes
15	HOP_FREQ_SEQ_15	NO
16	HOP_FREQ_SEQ_16	Yes
17	HOP_FREQ_SEQ_17	Yes
18	HOP_FREQ_SEQ_18	Yes
19	HOP_FREQ_SEQ_19	Yes
20	HOP_FREQ_SEQ_20	Yes
21	HOP_FREQ_SEQ_21	Yes
22	HOP_FREQ_SEQ_22	Yes
23	HOP_FREQ_SEQ_23	Yes
24	HOP_FREQ_SEQ_24	Yes
25	HOP_FREQ_SEQ_25	Yes
26	HOP_FREQ_SEQ_26	Yes
27	HOP_FREQ_SEQ_27	Yes
28	HOP_FREQ_SEQ_28	Yes
29	HOP_FREQ_SEQ_29	Yes
30	HOP_FREQ_SEQ_30	Yes
Detection Rate 97%		



TX (11ac 80MHz Mode)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
1	1	1428	18	30	0	100
2	1-5	150-230	23-29	30	0	100
3	6-10	200-500	16-18	29	1	97
4	11-20	200-500	12-16	28	2	93
Aggregate (Radar Types 1-4)			-	117	3	98

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Pass times	Fail times	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	0	100


Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	30	0	100




TX (11ac 80MHz Mode)

Radar signal 1

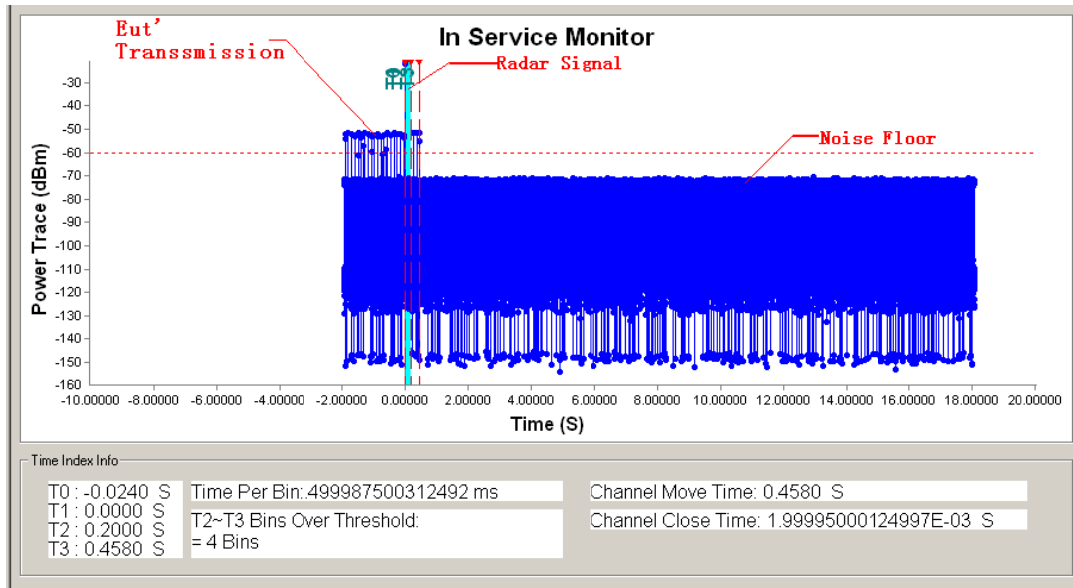

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

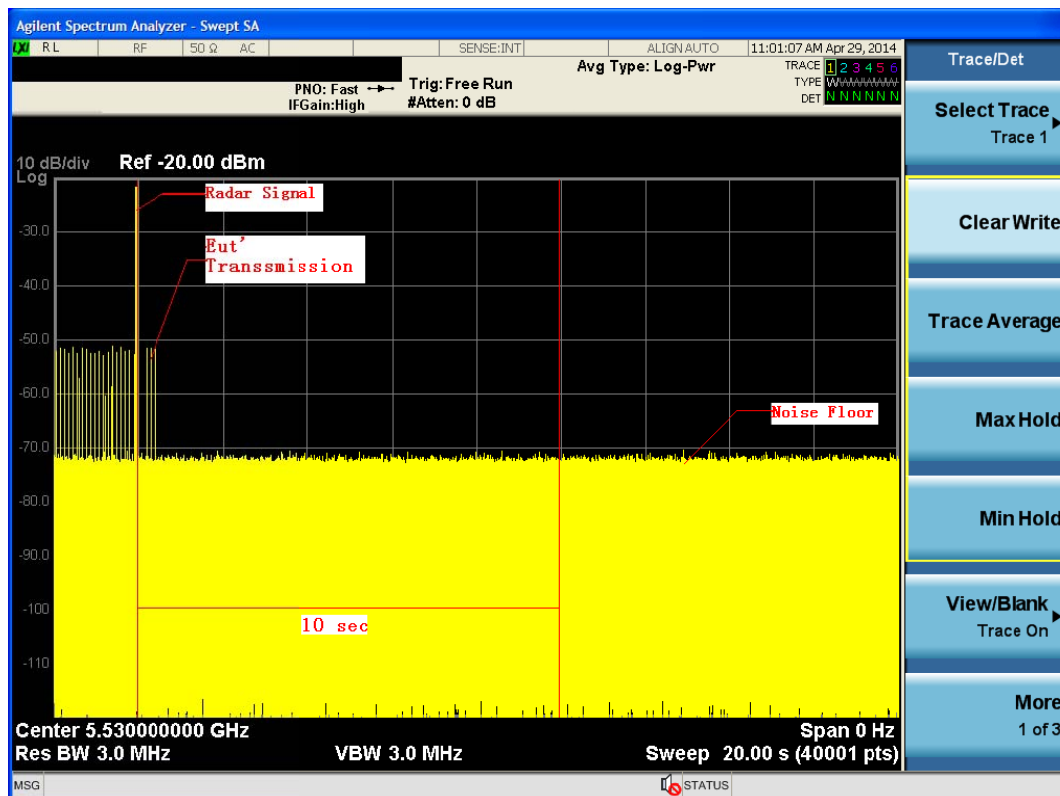


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11ac 80MHz Mode)

Radar signal 2

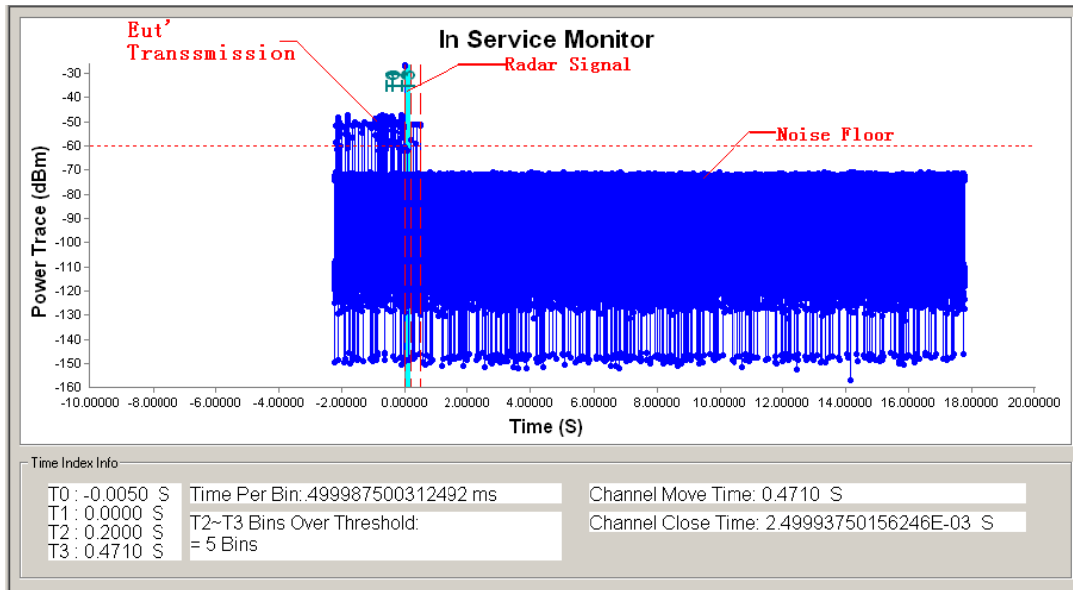

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

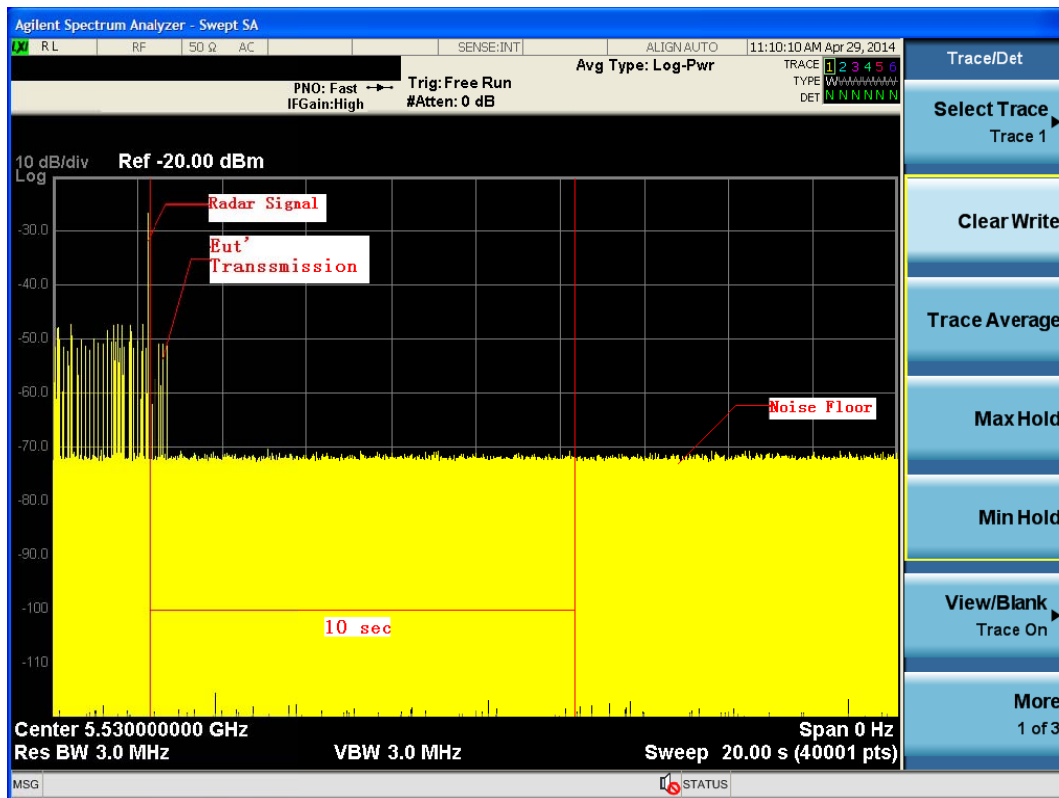


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11ac 80MHz Mode)

Radar signal 3

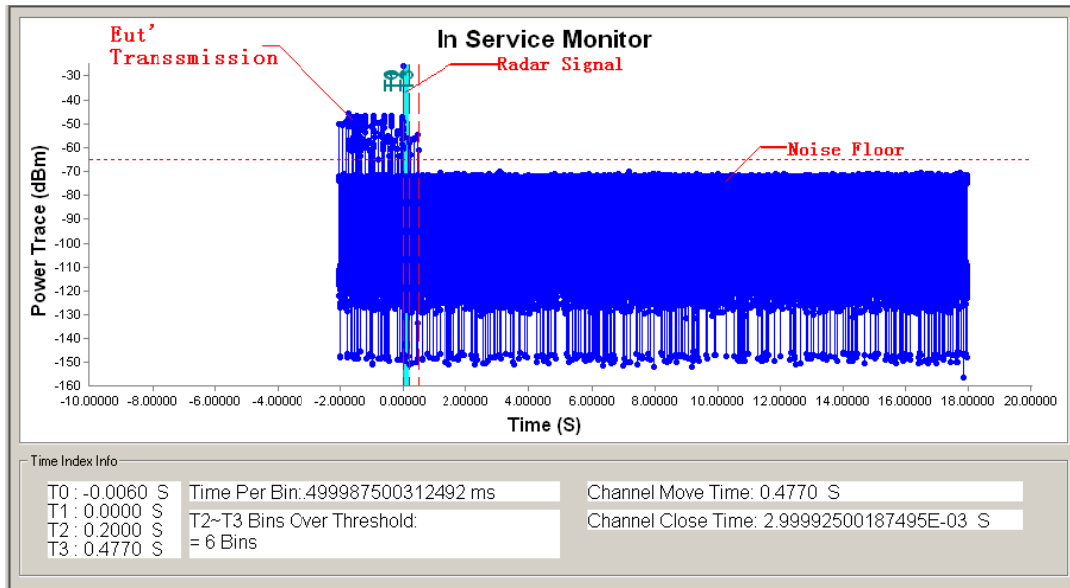

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

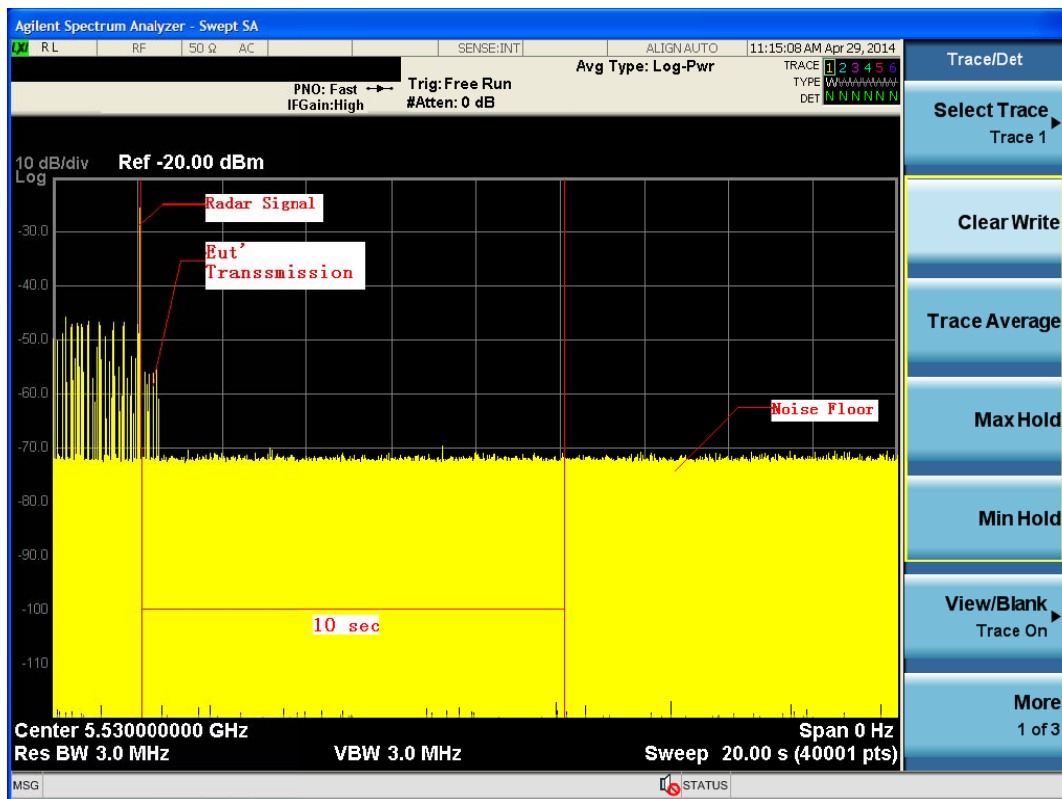


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11ac 80MHz Mode)

Radar signal 4

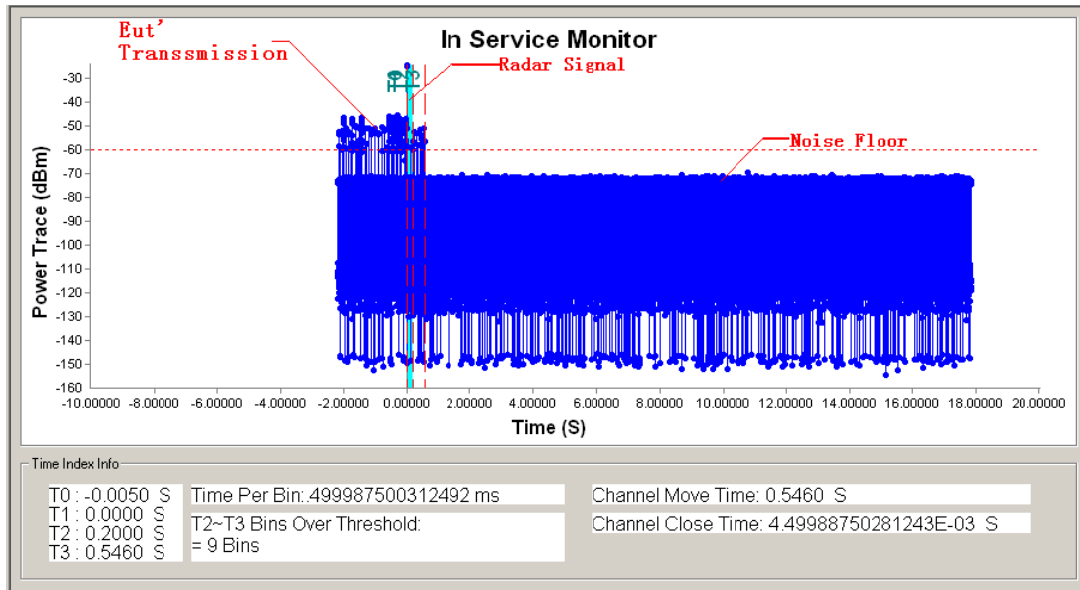

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

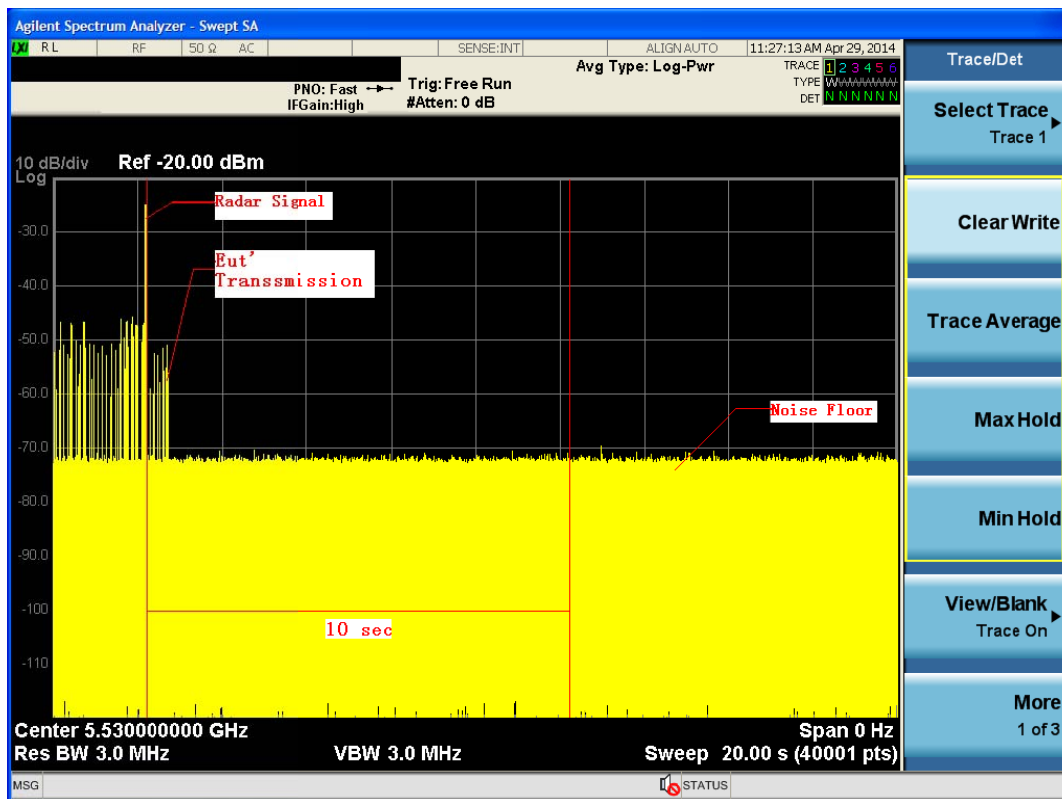


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11ac 80MHz Mode)

Radar signal 5

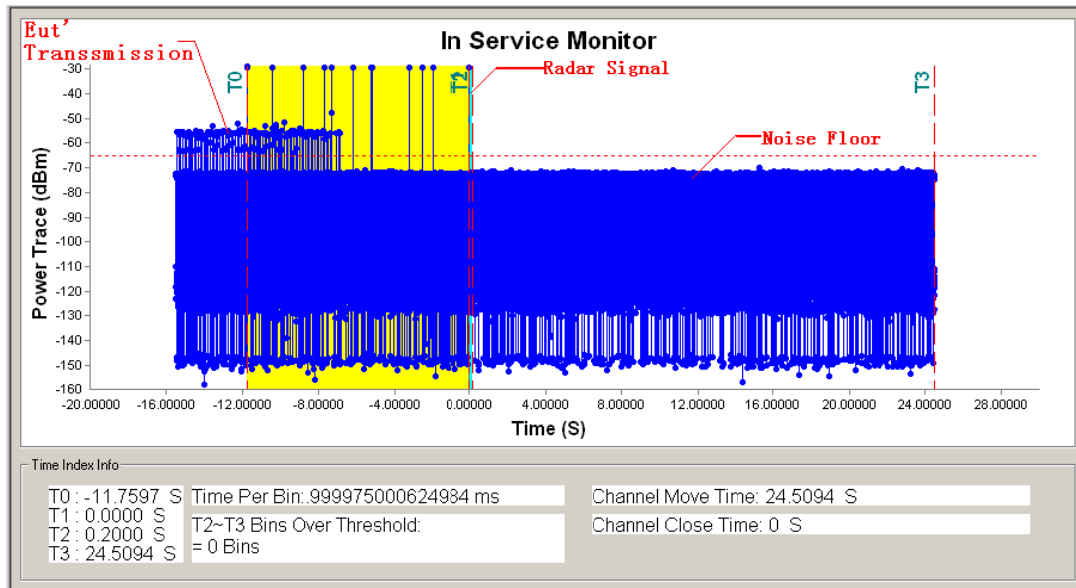

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

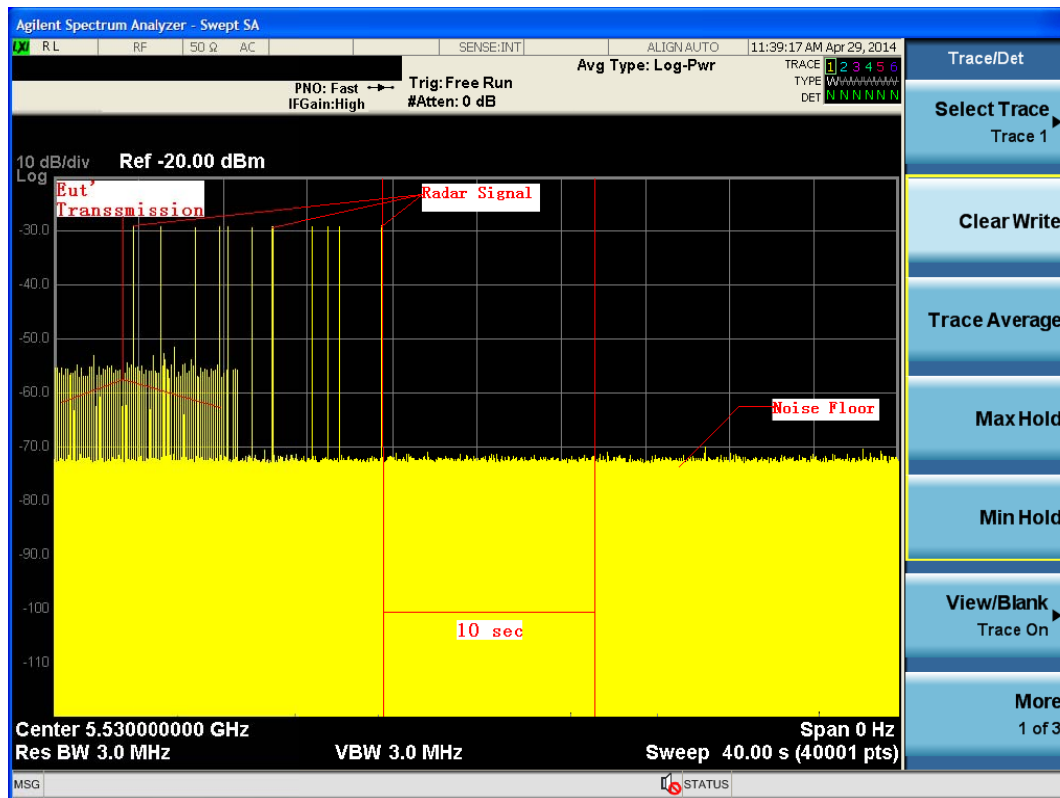


Note: An expanded plot for the device vacates the channel in the required 500ms




TX (11ac 80MHz Mode)

Radar signal 6

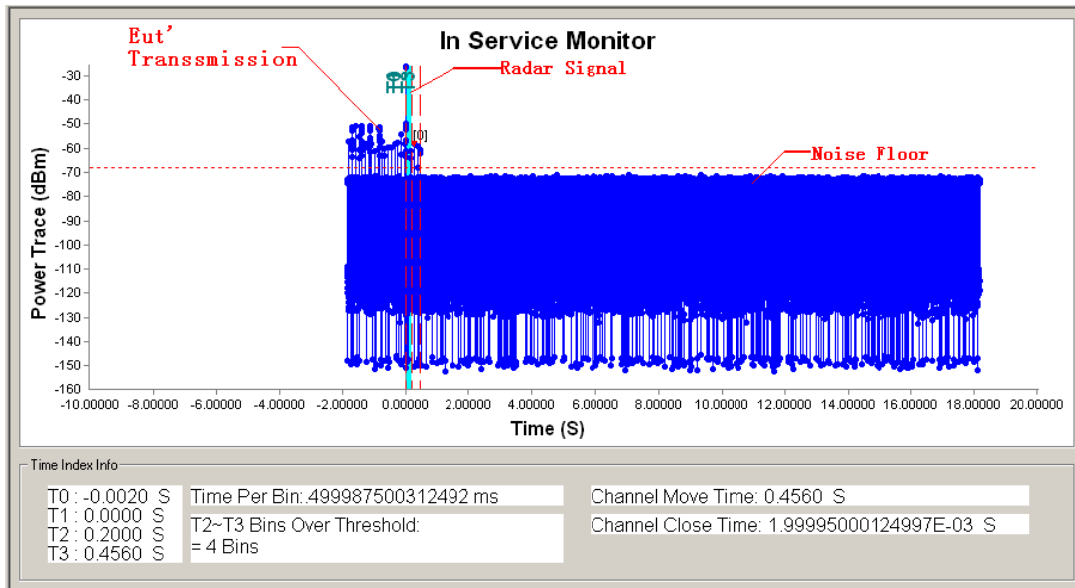

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
T1 denotes the data transmission time of 200ms from T0.
T2 denotes the end of Channel Move Time.
T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

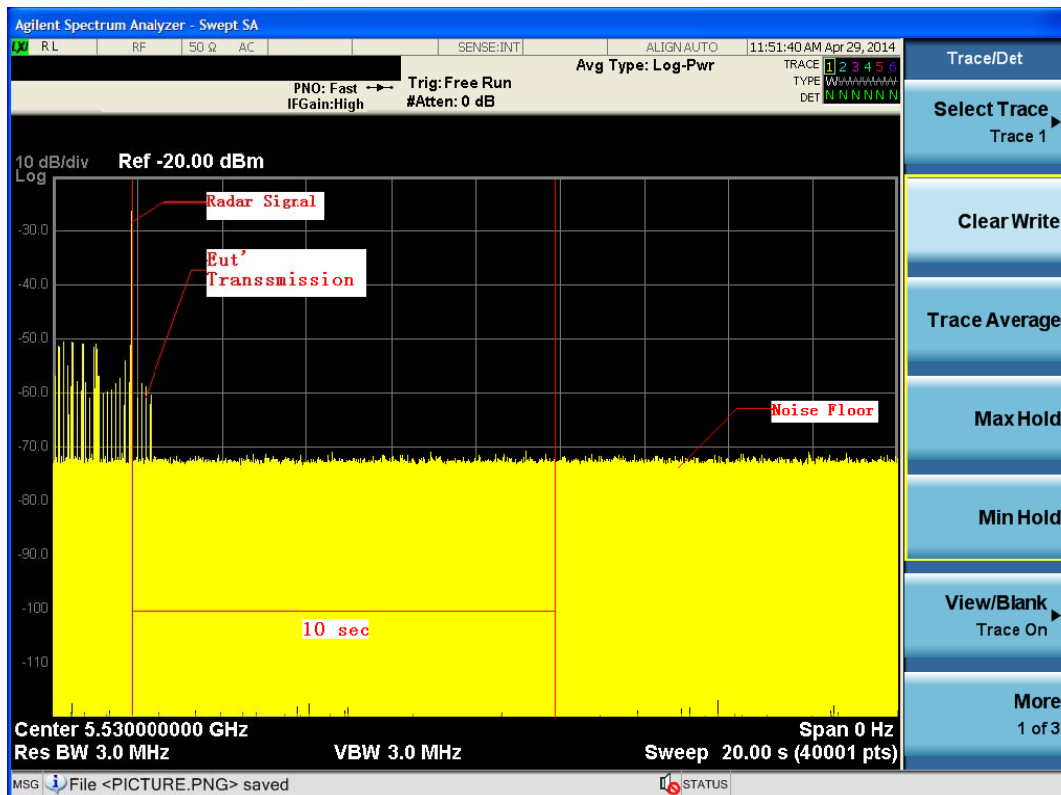

Note: An expanded plot for the device vacates the channel in the required 500ms



TX (11n 40MHz Mode)

Radar1 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(Yes / No)
1	18	1.0u	1.428	YES
2	18	1.0u	1.428	YES
3	18	1.0u	1.428	YES
4	18	1.0u	1.428	YES
5	18	1.0u	1.428	YES
6	18	1.0u	1.428	YES
7	18	1.0u	1.428	YES
8	18	1.0u	1.428	YES
9	18	1.0u	1.428	YES
10	18	1.0u	1.428	YES
11	18	1.0u	1.428	YES
12	18	1.0u	1.428	YES
13	18	1.0u	1.428	YES
14	18	1.0u	1.428	YES
15	18	1.0u	1.428	YES
16	18	1.0u	1.428	YES
17	18	1.0u	1.428	YES
18	18	1.0u	1.428	YES
19	18	1.0u	1.428	YES
20	18	1.0u	1.428	YES
21	18	1.0u	1.428	YES
22	18	1.0u	1.428	YES
23	18	1.0u	1.428	YES
24	18	1.0u	1.428	YES
25	18	1.0u	1.428	YES
26	18	1.0u	1.428	YES
27	18	1.0u	1.428	YES
28	18	1.0u	1.428	YES
29	18	1.0u	1.428	YES
30	18	1.0u	1.428	YES
Detection Rate 100%				



Radar2 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(Yes / No)
1	23	1.2u	207	YES
2	23	1.4u	158	YES
3	25	1.5u	208	YES
4	26	2.6u	160	YES
5	24	2.2u	184	YES
6	27	1.3u	186	YES
7	27	3.2u	221	YES
8	26	4.3u	227	YES
9	26	3.1u	169	YES
10	26	3.1u	169	YES
11	25	2.2u	208	YES
12	27	1.3u	220	YES
13	28	1.4u	168	YES
14	25	4.5u	209	YES
15	24	3.3u	204	YES
16	23	2.4u	229	YES
17	27	3.8u	224	YES
18	23	1.4u	158	YES
19	27	1.3u	186	YES
20	28	1.4u	172	YES
21	28	4.5u	170	YES
22	29	2.7u	221	YES
23	27	2.9u	203	YES
24	24	1.8u	190	YES
25	27	3.8u	224	YES
26	23	1.2u	207	YES
27	23	1.4u	158	YES
28	25	1.5u	208	YES
29	26	2.6u	160	YES
30	24	2.2u	184	YES
Detection Rate 100%				



Radar3 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(s)	PRI(us)	Detection(Yes / No)
1	16	9.9u	481	YES
2	17	8.5u	436	YES
3	17	8.0u	447	YES
4	18	8.6u	410	YES
5	18	8.8u	409	YES
6	16	7.6u	398	YES
7	16	7.9u	364	YES
8	16	9.0u	398	YES
9	17	9.5u	364	YES
10	17	6.6u	369	YES
11	16	8.8u	258	YES
12	16	9.5u	477	YES
13	18	9.8u	206	YES
14	18	8.6u	213	YES
15	16	8.0u	366	YES
16	18	9.9u	260	YES
17	16	8.5u	269	NO
18	17	8.0u	431	YES
19	18	9.6u	330	YES
20	18	6.0u	440	YES
21	18	8.6u	300	YES
22	18	8.2u	336	YES
23	17	8.7u	328	YES
24	18	9.0u	408	YES
25	16	9.8u	492	YES
26	18	9.5u	463	YES
27	17	9.8u	445	YES
28	16	8.6u	442	YES
29	16	8.2u	405	YES
30	18	8.7u	409	YES
Detection Rate 97%				



Radar4 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(Yes / No)
1	13	13.9u	409	YES
2	15	18.0u	477	YES
3	16	13.2u	206	YES
4	12	12.0u	206	YES
5	13	12.0u	213	YES
6	13	13.8u	482	YES
7	13	14.9u	436	NO
8	12	12.7u	330	YES
9	14	12.0u	335	YES
10	15	13.8u	328	YES
11	15	14.9u	445	YES
12	13	19.8u	442	YES
13	15	14.6u	405	YES
14	13	19.3u	405	YES
15	16	18.2u	409	YES
16	16	15.3u	481	NO
17	14	19.0u	492	YES
18	14	13.8u	463	YES
19	13	14.9u	445	YES
20	16	15.8u	442	YES
21	15	15.8u	447	YES
22	15	14.6u	258	YES
23	14	13.9u	270	YES
24	14	16.5u	441	YES
25	15	14.0u	332	YES
26	16	15.6u	478	YES
27	12	17.0u	442	YES
28	16	19.6u	405	YES
29	12	13.9u	334	YES
30	14	17.0u	470	YES
Detection Rate 93%				




Radar5 Statical Performances		
Trial #	Test Signal name	Detection(Yes / No)
1	LP_Signal_01	Yes
2	LP_Signal_02	Yes
3	LP_Signal_03	Yes
4	LP_Signal_04	Yes
5	LP_Signal_05	Yes
6	LP_Signal_06	Yes
7	LP_Signal_07	Yes
8	LP_Signal_08	Yes
9	LP_Signal_09	Yes
10	LP_Signal_10	Yes
11	LP_Signal_11	Yes
12	LP_Signal_12	Yes
13	LP_Signal_13	Yes
14	LP_Signal_14	Yes
15	LP_Signal_15	Yes
16	LP_Signal_16	Yes
17	LP_Signal_17	Yes
18	LP_Signal_18	Yes
19	LP_Signal_19	Yes
20	LP_Signal_20	Yes
21	LP_Signal_21	Yes
22	LP_Signal_22	Yes
23	LP_Signal_23	Yes
24	LP_Signal_24	Yes
25	LP_Signal_25	Yes
26	LP_Signal_26	Yes
27	LP_Signal_27	Yes
28	LP_Signal_28	Yes
29	LP_Signal_29	Yes
30	LP_Signal_30	Yes
Detection Rate 100%		




Radar6 Statical Performances		
Trial #	Hoping Frequency Sequence Name	Detection(Yes / No)
1	HOP_FREQ_SEQ_01	Yes
2	HOP_FREQ_SEQ_02	Yes
3	HOP_FREQ_SEQ_03	Yes
4	HOP_FREQ_SEQ_04	Yes
5	HOP_FREQ_SEQ_05	Yes
6	HOP_FREQ_SEQ_06	Yes
7	HOP_FREQ_SEQ_07	Yes
8	HOP_FREQ_SEQ_08	Yes
9	HOP_FREQ_SEQ_09	Yes
10	HOP_FREQ_SEQ_10	Yes
11	HOP_FREQ_SEQ_11	Yes
12	HOP_FREQ_SEQ_12	Yes
13	HOP_FREQ_SEQ_13	Yes
14	HOP_FREQ_SEQ_14	Yes
15	HOP_FREQ_SEQ_15	Yes
16	HOP_FREQ_SEQ_16	Yes
17	HOP_FREQ_SEQ_17	Yes
18	HOP_FREQ_SEQ_18	Yes
19	HOP_FREQ_SEQ_19	Yes
20	HOP_FREQ_SEQ_20	Yes
21	HOP_FREQ_SEQ_21	Yes
22	HOP_FREQ_SEQ_22	Yes
23	HOP_FREQ_SEQ_23	Yes
24	HOP_FREQ_SEQ_24	Yes
25	HOP_FREQ_SEQ_25	Yes
26	HOP_FREQ_SEQ_26	Yes
27	HOP_FREQ_SEQ_27	Yes
28	HOP_FREQ_SEQ_28	Yes
29	HOP_FREQ_SEQ_29	Yes
30	HOP_FREQ_SEQ_30	Yes
Detection Rate 100%		

6.2.5 NON- OCCUPANCY PERIOD


During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

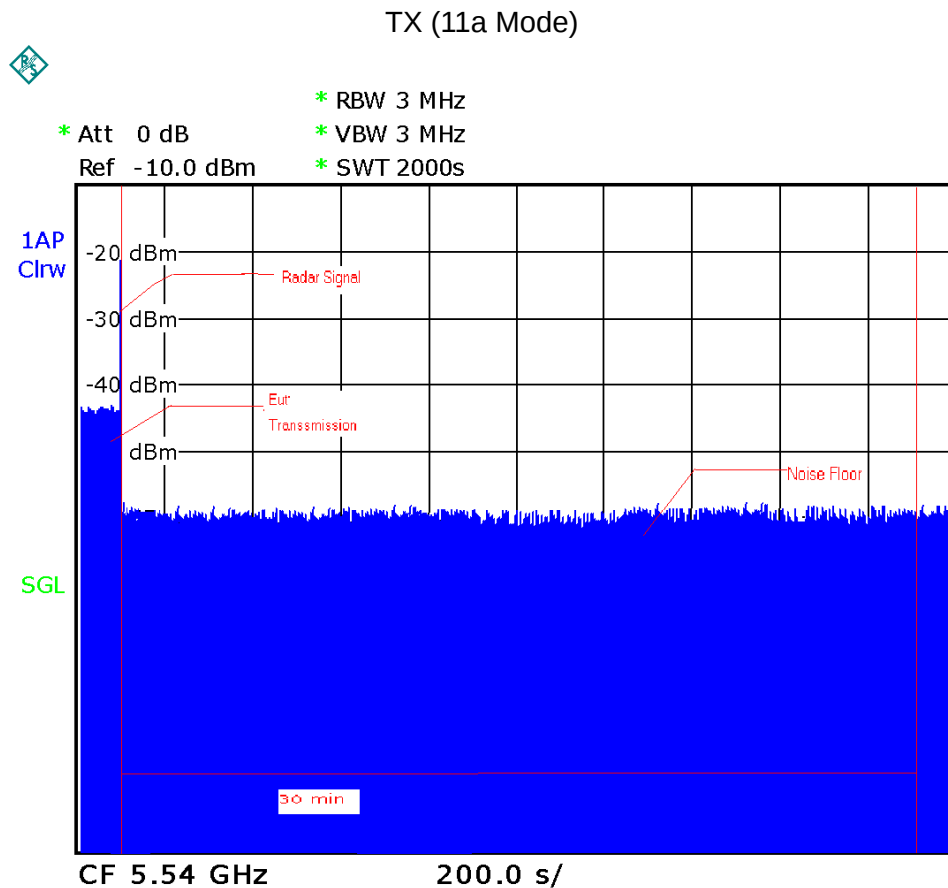

Date: 7.MAY.2014 20:53:43

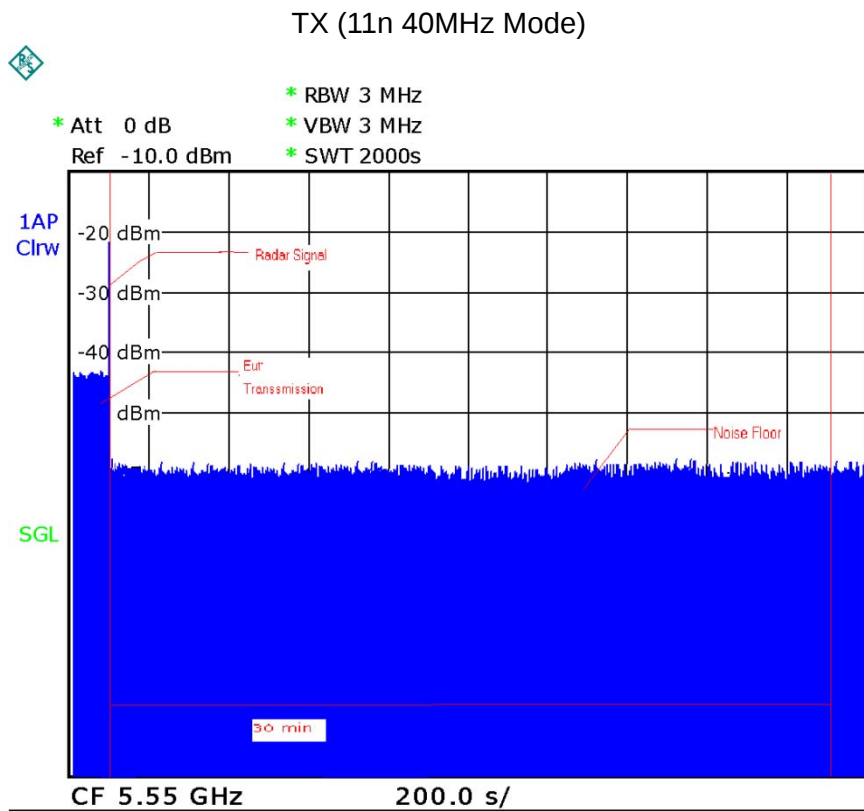

Date: 7.MAY.2014 14:12:54

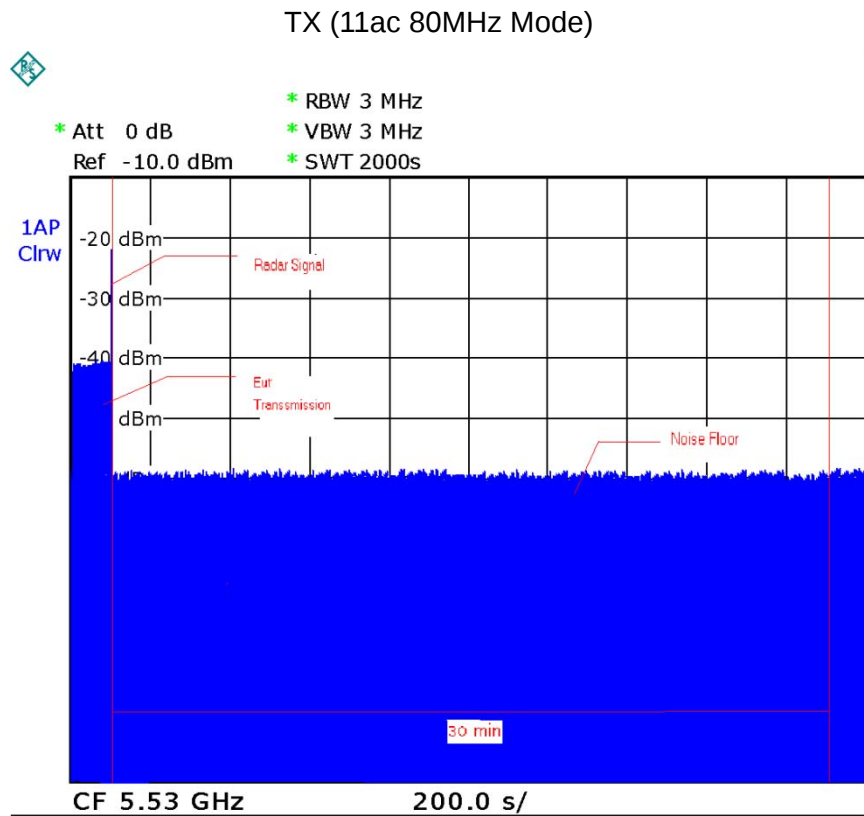

Date: 7.MAY.2014 10:35:40






6.2.6 UNIFORM SPREADING

The intention of the uniform spreading is to provide, on aggregate, a uniform loading of the spectrum. The UUT using the bands 5250 to 5350MHz and 5470 to 5600 MHz channels so that the probability of selecting a given channel shall be the same for channels. The UUT will select channel by random mode and remember this channel when detect radar signal, so that will select unused channel by random mode.



6.2.7 U-NII DETECTION BANDWIDTH

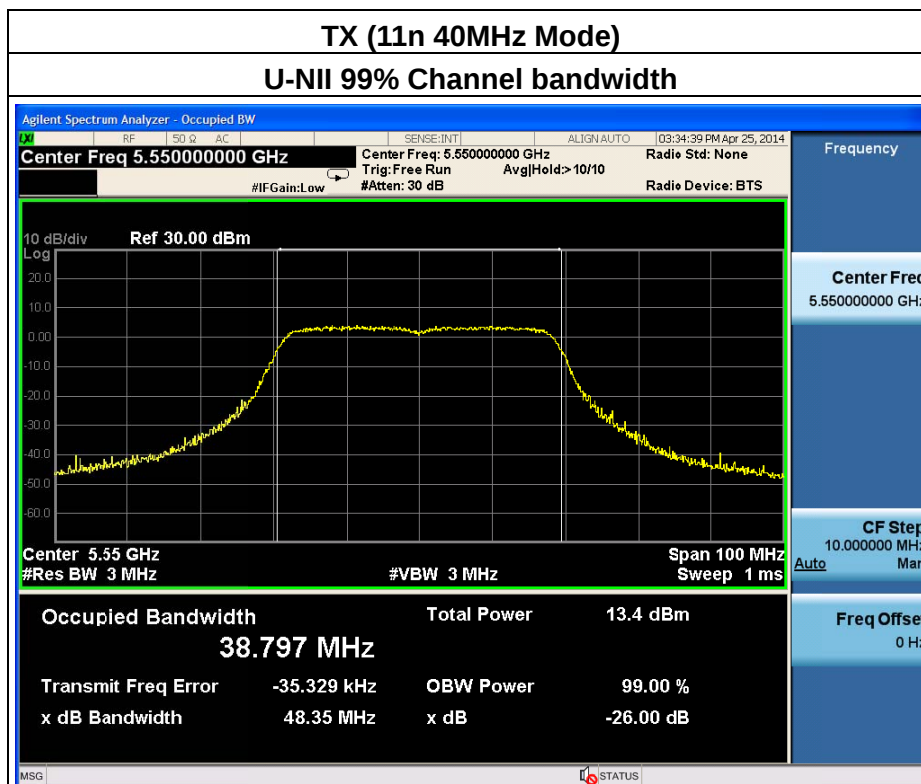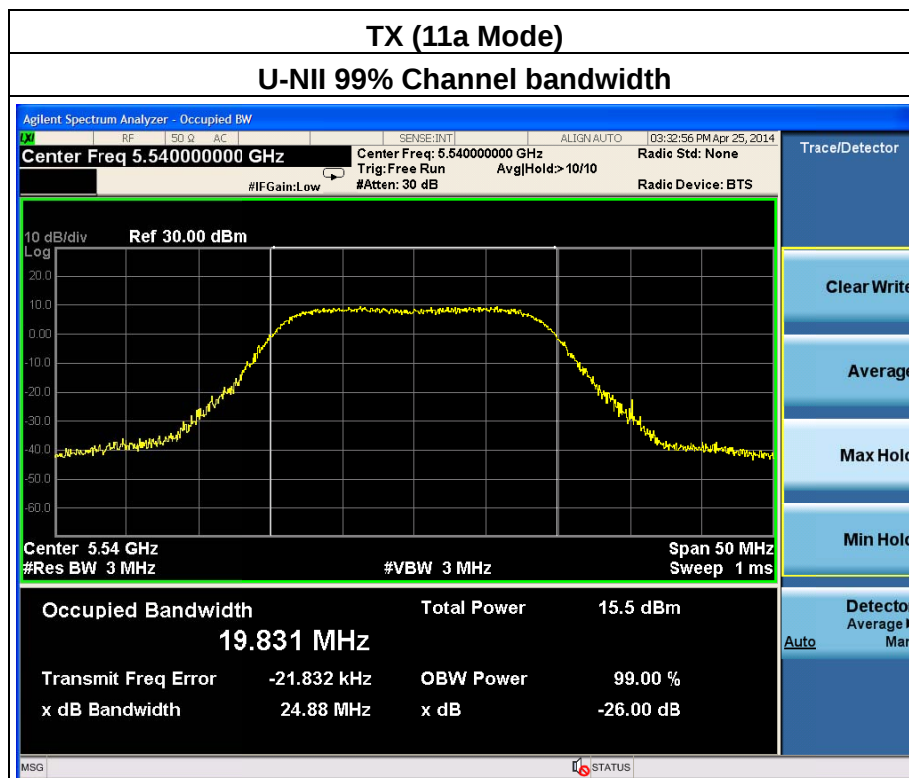

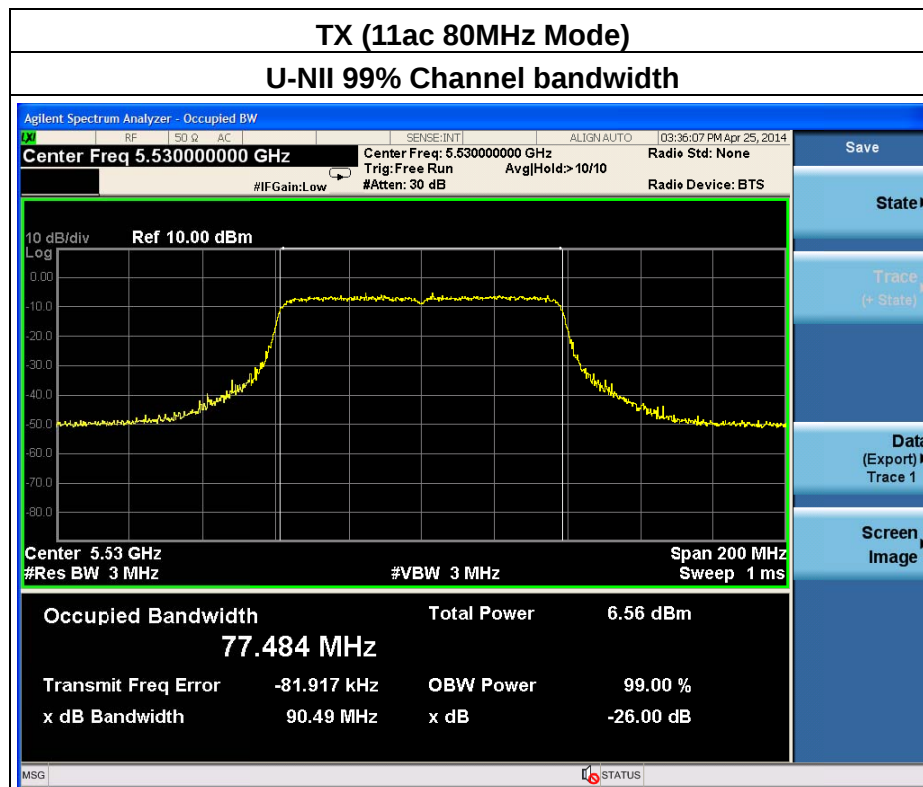



11a Mode

Detection Bandwith test transmission 20M											
EUT FREQUENCY	5540M										
EUT power bandwith	19.83MHz										
Detection Bandwith limit(80%of EUT 99% Power bandwith)	15.86										
Detection Bandwith(5549(FH)-5531(FL))	20										
Test Result	PASS										
Radar Freq (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5529	1	0	0	1	1	0	0	0	1	1	50
5530	1	1	0	0	0	1	0	1	0	1	50
5531(FL)	1	1	1	1	1	1	1	1	1	1	100
5532	1	1	1	1	1	1	1	1	1	1	100
5533	1	1	1	1	1	1	1	1	1	1	100
5534	1	1	1	1	1	1	1	1	1	1	100
5535	1	1	1	1	1	1	1	1	1	1	100
5536	1	1	1	1	1	1	1	1	1	1	100
5537	1	1	1	1	1	1	1	1	1	1	100
5538	1	1	1	1	1	1	1	1	1	1	100
5539	1	1	1	1	1	1	1	1	1	1	100
5540	1	1	1	1	1	1	1	1	1	1	100
5541	1	1	1	1	1	1	1	1	1	1	100
5542	1	1	1	1	1	1	1	1	1	1	100
5543	1	1	1	1	1	1	1	1	1	1	100
5544	1	1	1	1	1	1	1	1	1	1	100
5545	1	1	1	1	1	1	1	1	1	1	100
5546	1	1	1	1	1	1	1	1	1	1	100
5547	1	1	1	1	1	1	1	1	1	1	100
5548	1	1	1	1	1	1	1	1	1	1	100
5549(FH)	1	1	1	1	1	1	1	1	1	1	100
5550	0	1	0	0	0	1	0	0	0	1	40
5551	1	0	1	0	0	0	1	0	1	1	50



11n 40MHz Mode

Detection Bandwidth test transmission	40M										
EUT FREQUENCY	5550M										
EUT power bandwidth	38.8MHz										
Detection Bandwidth limit(80%of EUT 99% Power bandwidth)	31.04										
Detection Bandwidth(5569(FH)-5531(FL))	40										
Test Result	PASS										
	DFS Detection Trials (1=Detection, 0= No Detection)										
Radar Freq (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5529	1	0	1	1	0	1	1	0	1	0	50
5530	1	1	1	0	1	0	1	0	1	0	60
5531(FL)	1	1	1	1	1	1	1	1	1	1	100
5532	1	1	1	1	1	1	1	1	1	1	100
5533	1	1	1	1	1	1	1	1	1	1	100
5534	1	1	1	1	1	1	1	1	1	1	100
5535	1	1	1	1	1	1	1	1	1	1	100
5536	1	1	1	1	1	1	1	1	1	1	100
5537	1	1	1	1	1	1	1	1	1	1	100
5538	1	1	1	1	1	1	1	1	1	1	100
5539	1	1	1	1	1	1	1	1	1	1	100
5540	1	1	1	1	1	1	1	1	1	1	100
5541	1	1	1	1	1	1	1	1	1	1	100
5542	1	1	1	1	1	1	1	1	1	1	100
5543	1	1	1	1	1	1	1	1	1	1	100
5544	1	1	1	1	1	1	1	1	1	1	100
5545	1	1	1	1	1	1	1	1	1	1	100
5546	1	1	1	1	1	1	1	1	1	1	100
5547	1	1	1	1	1	1	1	1	1	1	100
5548	1	1	1	1	1	1	1	1	1	1	100
5549	1	1	1	1	1	1	1	1	1	1	100
5550	1	1	1	1	1	1	1	1	1	1	100
5551	1	1	1	1	1	1	1	1	1	1	100
5552	1	1	1	1	1	1	1	1	1	1	100
5553	1	1	1	1	1	1	1	1	1	1	100
5554	1	1	1	1	1	1	1	1	1	1	100
5555	1	1	1	1	1	1	1	1	1	1	100
5556	1	1	1	1	1	1	1	1	1	1	100
5557	1	1	1	1	1	1	1	1	1	1	100
5558	1	1	1	1	1	1	1	1	1	1	100
5559	1	1	1	1	1	1	1	1	1	1	100
5560	1	1	1	1	1	1	1	1	1	1	100
5561	1	1	1	1	1	1	1	1	1	1	100
5562	1	1	1	1	1	1	1	1	1	1	100
5563	1	1	1	1	1	1	1	1	1	1	100
5564	1	1	1	1	1	1	1	1	1	1	100
5565	1	1	1	1	1	1	1	1	1	1	100
5566	1	1	1	1	1	1	1	1	1	1	100
5567	1	1	1	1	1	1	1	1	1	1	100
5568	1	1	1	1	1	1	1	1	1	1	100
5569(FL)	1	1	1	1	1	1	1	1	1	1	100
5570	1	0	1	1	0	1	0	0	1	0	50
5571	1	0	0	1	0	1	1	0	0	1	40



11ac 80MHz Mode

Detection Bandwidth test transmission	80M										
EUT FREQUENCY	5530M										
EUT power bandwidth	77.48MHz										
Detection Bandwidth limit(80%of EUT 99% Power bandwidth)	61.98										
Detection Bandwidth(5570(FH)-5549(FL))	80										
Test Result	PASS										
	DFS Detection Trials (1=Detection, 0= No Detection)										
Radar Freq (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5489	1	0	0	0	1	0	1	0	0	0	30
5490(FL)	1	1	1	1	1	1	1	1	1	1	100
5491	1	1	1	1	1	1	1	1	1	1	100
5492	1	1	1	1	1	1	1	1	1	1	100
5493	1	1	1	1	1	1	1	1	1	1	100
5494	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5496	1	1	1	1	1	1	1	1	1	1	100
5497	1	1	1	1	1	1	1	1	1	1	100
5498	1	1	1	1	1	1	1	1	1	1	100
5499	1	1	1	1	1	1	1	1	1	1	100
5500	1	1	1	1	1	1	1	1	1	1	100
5501	1	1	1	1	1	1	1	1	1	1	100
5502	1	1	1	1	1	1	1	1	1	1	100
5503	1	1	1	1	1	1	1	1	1	1	100
5504	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5506	1	1	1	1	1	1	1	1	1	1	100
5507	1	1	1	1	1	1	1	1	1	1	100
5508	1	1	1	1	1	1	1	1	1	1	100
5509	1	1	1	1	1	1	1	1	1	1	100
5510	1	1	1	1	1	1	1	1	1	1	100
5511	1	1	1	1	1	1	1	1	1	1	100
5512	1	1	1	1	1	1	1	1	1	1	100
5513	1	1	1	1	1	1	1	1	1	1	100
5514	1	1	1	1	1	1	1	1	1	1	100
5515	1	1	1	1	1	1	1	1	1	1	100
5516	1	1	1	1	1	1	1	1	1	1	100
5517	1	1	1	1	1	1	1	1	1	1	100
5518	1	1	1	1	1	1	1	1	1	1	100
5519	1	1	1	1	1	1	1	1	1	1	100
5520	1	1	1	1	1	1	1	1	1	1	100
5521	1	1	1	1	1	1	1	1	1	1	100
5522	1	1	1	1	1	1	1	1	1	1	100
5523	1	1	1	1	1	1	1	1	1	1	100
5524	1	1	1	1	1	1	1	1	1	1	100
5525	1	1	1	1	1	1	1	1	1	1	100
5526	1	1	1	1	1	1	1	1	1	1	100
5527	1	1	1	1	1	1	1	1	1	1	100
5528	1	1	1	1	1	1	1	1	1	1	100
5529	1	1	1	1	1	1	1	1	1	1	100
5530	1	1	1	1	1	1	1	1	1	1	100
5531	1	1	1	1	1	1	1	1	1	1	100
5532	1	1	1	1	1	1	1	1	1	1	100
5533	1	1	1	1	1	1	1	1	1	1	100
5534	1	1	1	1	1	1	1	1	1	1	100
5535	1	1	1	1	1	1	1	1	1	1	100
5536	1	1	1	1	1	1	1	1	1	1	100
5537	1	1	1	1	1	1	1	1	1	1	100
5538	1	1	1	1	1	1	1	1	1	1	100



11ac 80MHz Mode

Detection Bandwidth test transmission	80M										
EUT FREQUENCY	5530M										
EUT power bandwidth	77.48MHz										
Detection Bandwidth limit(80%of EUT 99% Power bandwidth)	61.98										
Detection Bandwidth(5570(FH)-5549(FL))	80										
Test Result	PASS										
	DFS Detection Trials (1=Detection, 0= No Detection)										
Radar Freq (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5539	1	1	1	1	1	1	1	1	1	1	100
5540	1	1	1	1	1	1	1	1	1	1	100
5541	1	1	1	1	1	1	1	1	1	1	100
5542	1	1	1	1	1	1	1	1	1	1	100
5543	1	1	1	1	1	1	1	1	1	1	100
5544	1	1	1	1	1	1	1	1	1	1	100
5545	1	1	1	1	1	1	1	1	1	1	100
5546	1	1	1	1	1	1	1	1	1	1	100
5547	1	1	1	1	1	1	1	1	1	1	100
5548	1	1	1	1	1	1	1	1	1	1	100
5549	1	1	1	1	1	1	1	1	1	1	100
5550	1	1	1	1	1	1	1	1	1	1	100
5551	1	1	1	1	1	1	1	1	1	1	100
5552	1	1	1	1	1	1	1	1	1	1	100
5553	1	1	1	1	1	1	1	1	1	1	100
5554	1	1	1	1	1	1	1	1	1	1	100
5555	1	1	1	1	1	1	1	1	1	1	100
5556	1	1	1	1	1	1	1	1	1	1	100
5557	1	1	1	1	1	1	1	1	1	1	100
5558	1	1	1	1	1	1	1	1	1	1	100
5559	1	1	1	1	1	1	1	1	1	1	100
5560	1	1	1	1	1	1	1	1	1	1	100
5561	1	1	1	1	1	1	1	1	1	1	100
5562	1	1	1	1	1	1	1	1	1	1	100
5563	1	1	1	1	1	1	1	1	1	1	100
5564	1	1	1	1	1	1	1	1	1	1	100
5565	1	1	1	1	1	1	1	1	1	1	100
5566	1	1	1	1	1	1	1	1	1	1	100
5567	1	1	1	1	1	1	1	1	1	1	100
5568	1	1	1	1	1	1	1	1	1	1	100
5569	1	1	1	1	1	1	1	1	1	1	100
5570(FL)	1	1	1	1	1	1	1	1	1	1	100
5571	0	1	0	0	0	0	1	0	0	0	20