

FCC Radio Test Report

FCC ID: QISAP6050DN6150DN

This report concerns (check one): Original Grant Class II Change

Project No. : 1604C201C
Equipment : Wireless LAN Access Point
Model Name : AP6050DN
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,Bantian, Longgang District, Shenzhen 518129 China

Date of Receipt : Sep. 09, 2016
Date of Test : Sep. 09, 2016 ~ May 12, 2017
Issued Date : May 15, 2017
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . EUT INFORMATION	6
2.1 EUT SPECIFICATION TABLE	6
2.2 DESCRIPTION OF AVAILABLE ANTENNAS TO THE EUT	6
2.3 CONDUCTED OUTPUT POWER AND EIRP POWER	7
2.4 EUT MAXIMUM AND MINIMUM E.I.R.P. POWER	8
3 .U-NII DFS RULE REQUIREMENTS	9
3.1 WORKING MODES AND REQUIRED TEST ITEMS	9
3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS	10
4 . TEST INSTRUMENTS	13
5 .EMC EMISSION TEST	14
5.1 DFS MEASUREMENT SYSTEM:	14
TEST PRECEDURE	14
TEST” TO REACH 17% CHANNEL LOADING AS BELOW	14
5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL	19
5.3 DEVIATION FROM TEST STANDARD	19
6 . TEST RESULTS	20
6.1 SUMMARY OF TEST RESULT	20
6.2 TEST MODE: DEVICE OPERATING IN MASTER MODE.	20
6.3 DFS DETECTION THRESHOLD	20
6.4 PARAMETER DATE SHEET FOR RADAR TYPE 5	35
6.5 CHANNEL AVAILABILITY CHECK TIME	65
6.6 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC	80
6.7 NON- OCCUPANCY PERIOD	106
6.8 UNIFORM SPREADING	109
6.9 U-NII DETECTION BANDWIDTH	109
7 . EUT TEST PHOTO	120

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1604C201C	Original Issue.	May 15, 2017

1. CERTIFICATION

Equipment : Wireless LAN Access Point
Brand Name : HUAWEI
Model Name : AP6050DN
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen 518129, P.R.China
Factory : CIG Shanghai Co.,Ltd., Shanghai Branch.
Address : F/2,3 Building 1, No. 505 Jiangyue Road, Minhang District, Shanghai, P.R. China
Date of Test: : Sep. 19, 2016 ~ May 12, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart E (Section 15.407)
FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02
905462 D02 UNII DFS Compliance Procedures New Rules v01r02
RSS-247, Section 6

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1604C201C) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the DFS Mode part of the product.

2. EUT INFORMATION

2.1 EUT SPECIFICATION TABLE

Table 1: Specification of EUT

Product name	Wireless LAN Access Point
Brand Name	HUAWEI
Model	AP6050DN
Operational Mode	Master
Operating FrequencyRange	5260~5320MHz&5500~5700MHz
Modulation	OFDM

Note: This device was functioned as a Master Slave device during the DF

2.2 DESCRIPTION OF AVAILABLE ANTENNAS TO THE EUT

Antenna Specification:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	上海旌泓通信技术有限公司	N/A	Internal	U.FL	6.58
2	上海旌泓通信技术有限公司	N/A	Internal	U.FL	6.58
3	上海旌泓通信技术有限公司	N/A	Internal	U.FL	6.58
4	上海旌泓通信技术有限公司	N/A	Internal	U.FL	6.58

Note:

The EUT incorporates a MIMO function. Physically, the EUT provides four completed transmitters and receivers (4T4R).

2.3 CONDUCTED OUTPUT POWER AND EIRP POWER

TABLE 3: THE CONDUCTED OUTPUT POWER LIST

TX (11a)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5260~5320	18.59	72.28
5500~5700	18.65	73.28

TX (11n 40MHz)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5270~5310	17.77	59.84
5510~5670	17.78	59.98

TX (11ac 80 MHz)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5290	14.70	29.51
5530	14.72	29.65

2.4 EUT MAXIMUM AND MINIMUM E.I.R.P. POWER

TABLE 4: THE MAX EIRP LIST

TX (11a)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5260~5320	26.50	328.85
5500~5700	26.45	333.43

TX (11n40MHz)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5270~5310	28.54	272.27
5510~5670	29.40	272.90

TX (11ac 80 MHz)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5290	21.46	134.28
5530	28.47	134.90

3.U-NII DFS RULE REQUIREMENTS

3.1 WORKING MODES AND REQUIRED TEST ITEMS

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 5: Applicability of DFS requirements prior to use a channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	Not required	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
Uniform Spreading	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Table 6: Applicability of DFS requirements during normal operation.

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
DFS Detection Threshold	✓	Not required	✓
Channel Closing Transmission Time	✓	✓	✓
Channel Move Time	✓	✓	✓
U-NII Detection Bandwidth	✓	Not required	✓

3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS

DETECTION THRESHOLD VALUES

Table 7: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection.

Maximum Transmit Power	Value (See Notes 1 and 2)
EIRP \geq 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 8: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the UNII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

PARAMETERS OF DFS TEST SIGNALS

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 9: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \begin{array}{l} \left(\frac{1}{360} \right) \\ \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \end{array} \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

Table 10: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen (The center frequency for each of the 30 trials of the Bin 5 radar shall be randomly selected within 80% of the Occupied Bandwidth.) Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Table 11: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

4. TEST INSTRUMENTS

Table 1: Test instruments list.

DESCRIPTION	MANUFACTURER	MODEL NO.	Serial No	Calibration Until
EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 26, 2018
Signal Generator	Agilent	E4438C	MY49071316	Mar. 26, 2018
POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Feb. 25, 2018
POWER SPLITTER	Mini-Circuits	ZN4PD1-63-S+	SF9335D1045-1	Feb. 22, 2018
Attenuator	WOKEN	6SM3502	VAS1214NL	Mar. 01, 2018


Note: Calibration interval of instruments listed above is one year.

5. EMC EMISSION TEST

5.1 DFS MEASUREMENT SYSTEM: TEST PRECEDURE


1. Master device and client device are set up by conduction method as the following configuration.
2. The client device is connected to notebook and to access a IP address on wireless connection with the master device.
3. Then the master device is connected to another notebook to access a IP address.
4. Finally, let the two IP addresses run traffic with each other through the Run flow software “Lan test” to reach 17% channel loading as below

Setup

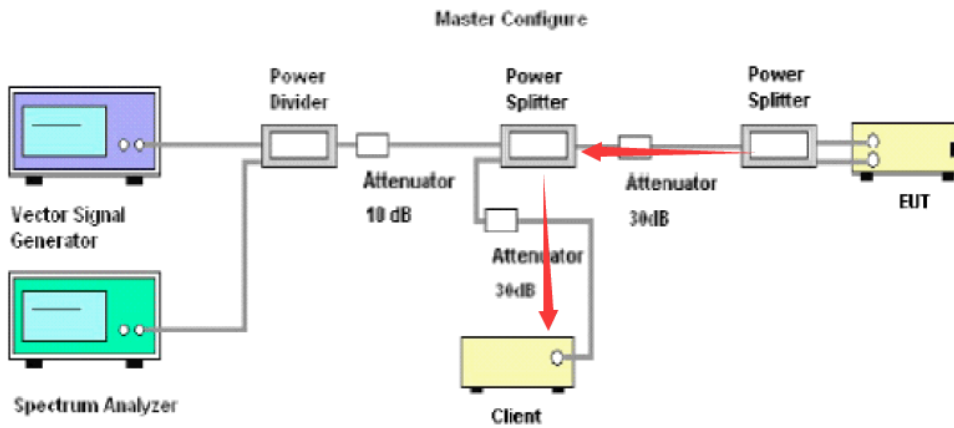


Channel Loading



11a Mode

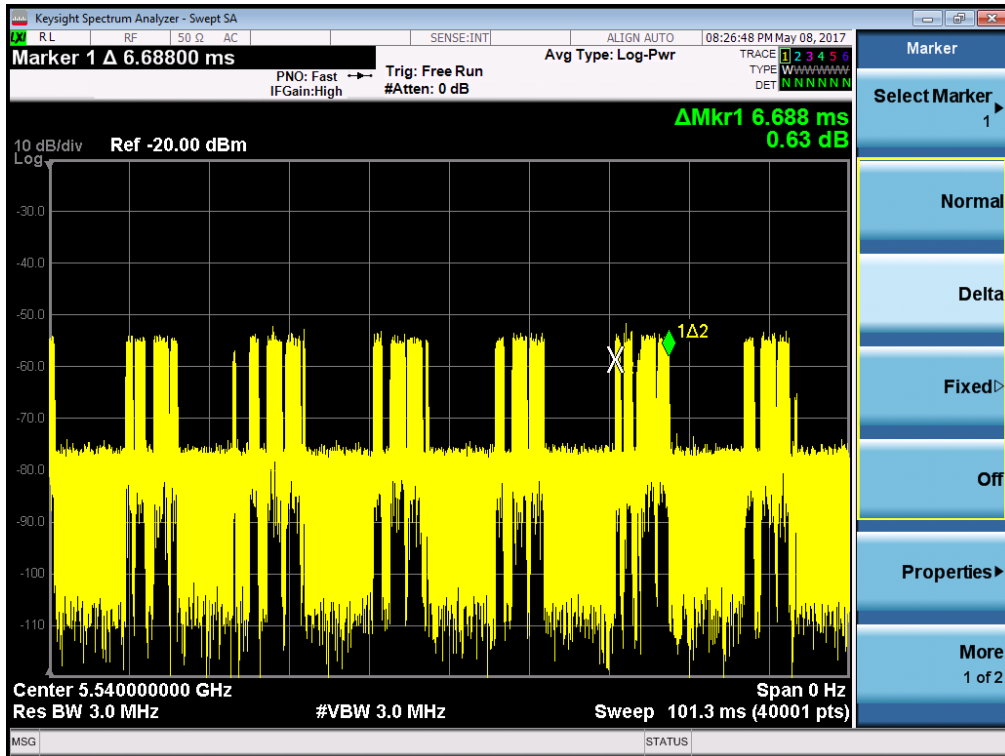


11n 40MHz Mode

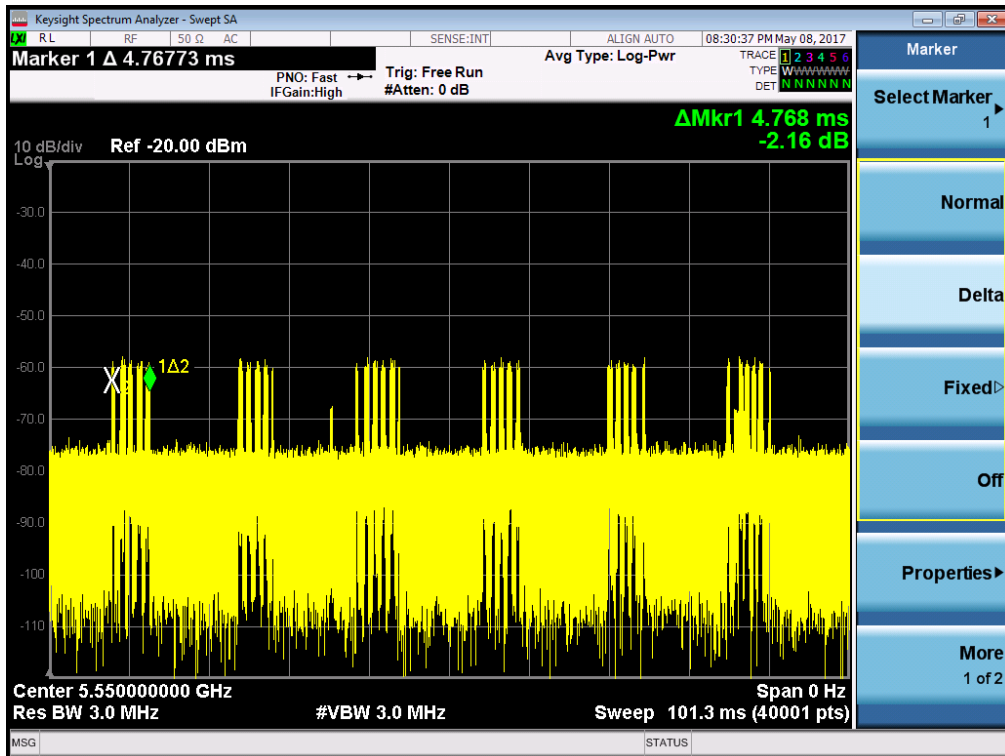

11ac 80MHz Mode

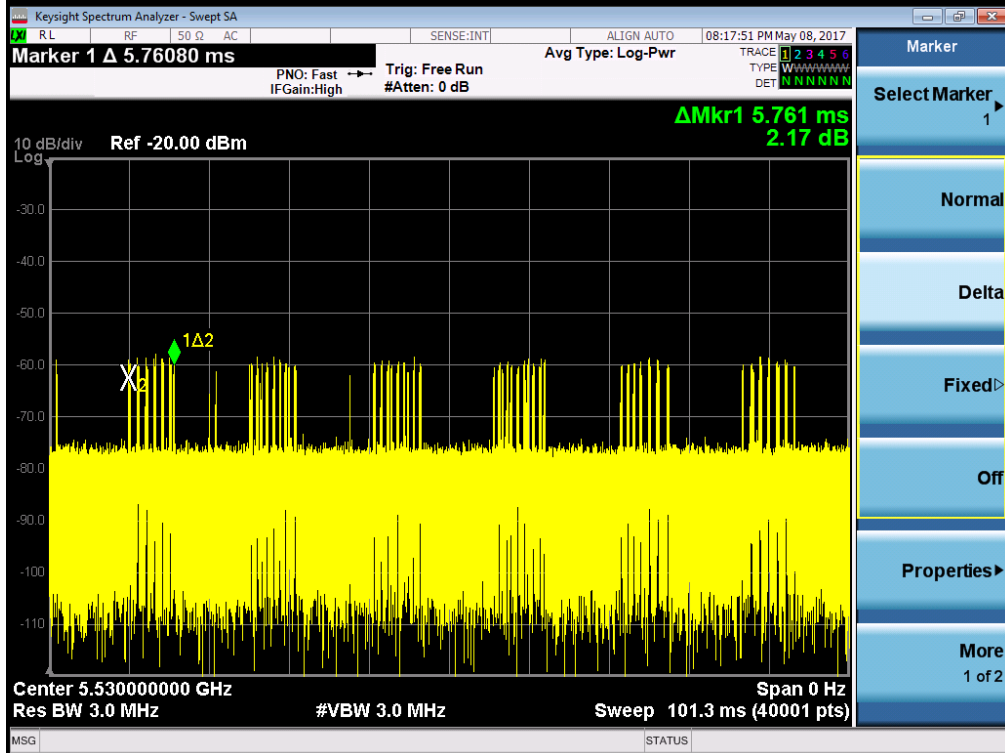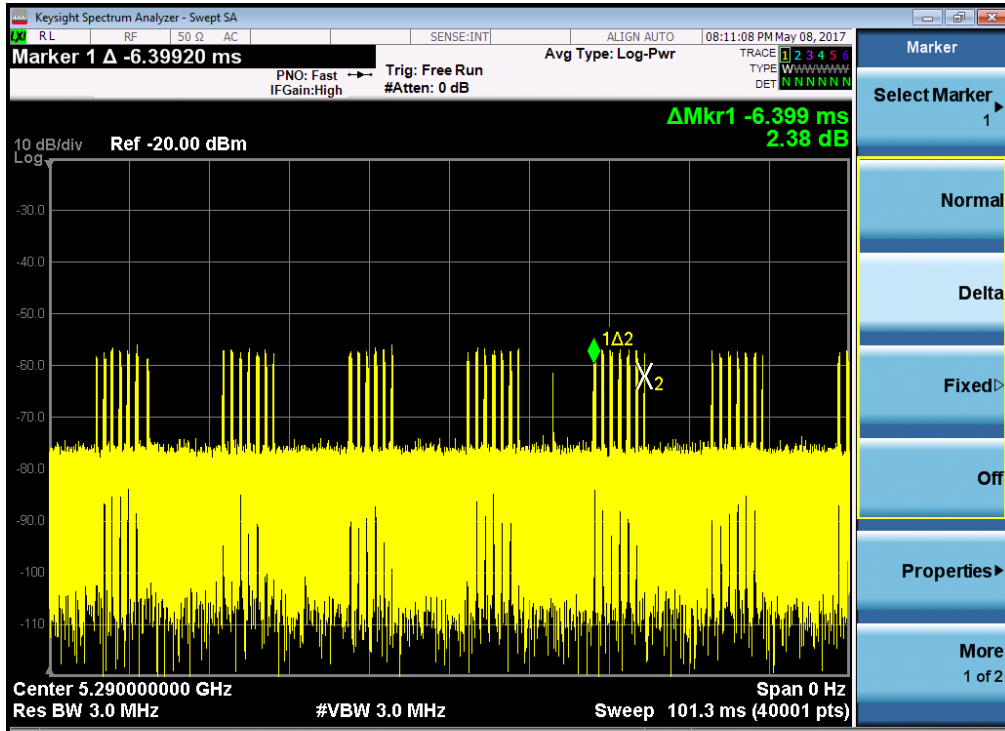

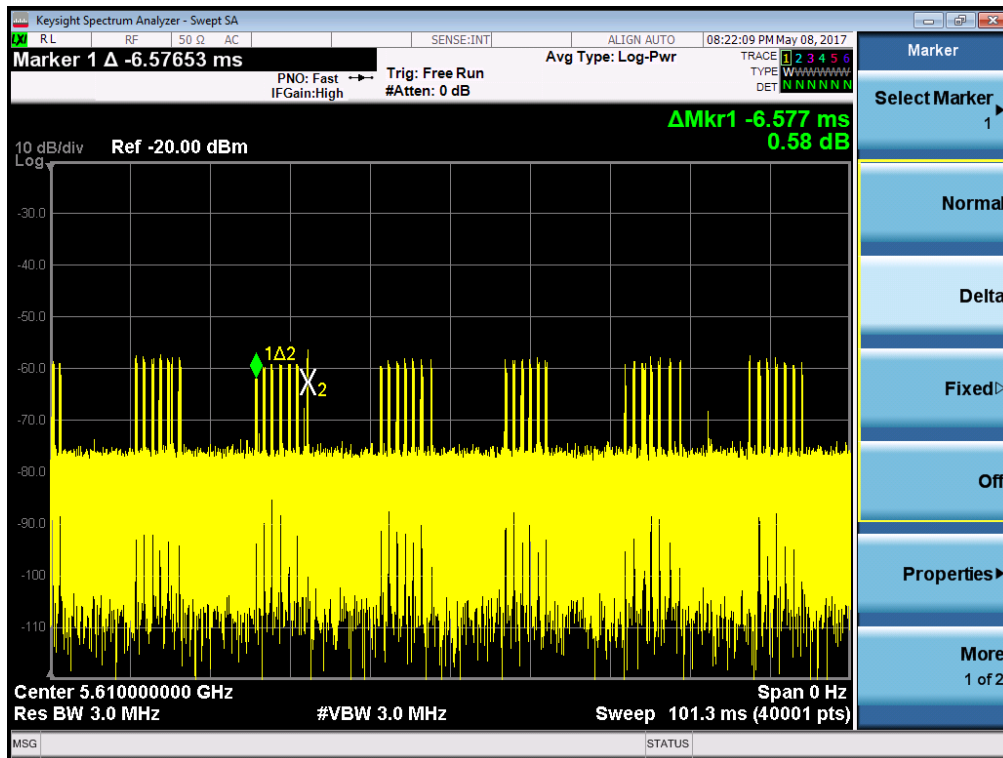

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), additional combiner/dividers are inserted between the Master Combiner/Divider and the pad connected to the Master Device (and/or between the Slave Combiner/Divider and the pad connected to the Slave Device). Additional pads are utilized such that there is one pad at each RF port on each EUT.


5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL

A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected in place of the master device and the signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of -62 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. Measure the amplitude and calculate the difference from -62 dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of -62 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.

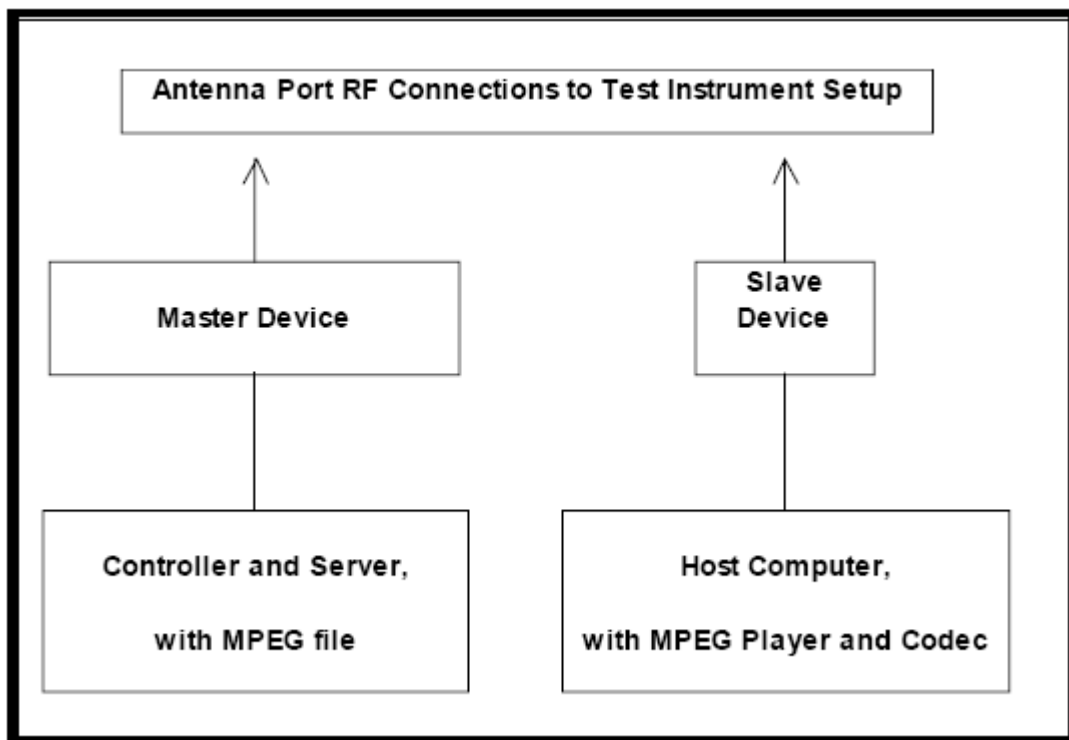

5.3 DEVIATION FROM TEST STANDARD

No deviation.

6. TEST RESULTS

6.1 SUMMARY OF TEST RESULT

Clause	Test Parameter	Remarks	Pass/Fail
15.407	DFS Detection Threshold	Applicable	Pass
15.407	Channel Availability Check Time	Applicable	Pass
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non- Occupancy Period	Applicable	Pass
15.407	Uniform Spreading	Applicable	Pass
15.407	U-NII Detection Bandwidth	Applicable	Pass

6.2 TEST MODE: DEVICE OPERATING IN MASTER MODE.

Master with injection at the Master. (Radar Test Waveforms are injected into the Master)


6.3 DFS DETECTION THRESHOLD

Calibration:


For a detection threshold level of -64dBm and the Master antenna gain is 6.58dBi, required detection threshold is -57.42 dBm (= -64+6.58).

Note: Maximum Transmit Power is more than 200 milliwatt in this report, so detection threshold level is -64dBm (please refer to Table 7 [page 10]).


Radar Signal 0

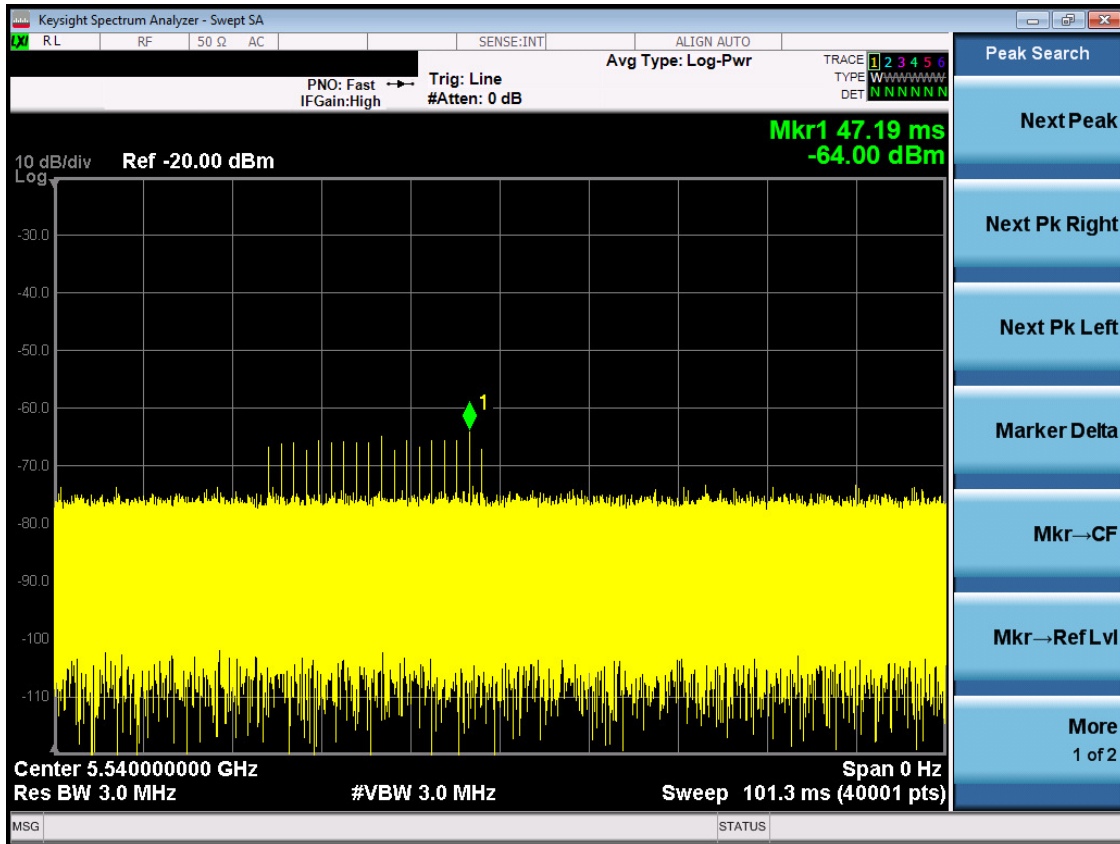


Radar Signal 1

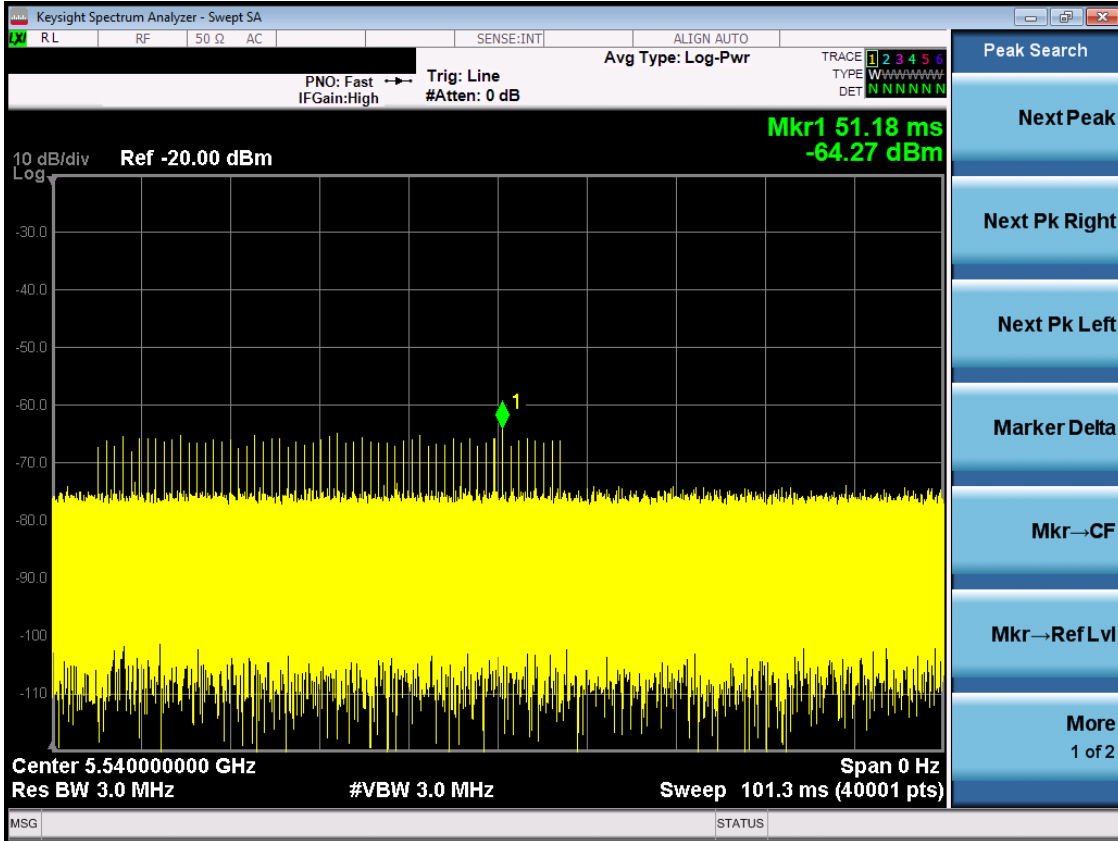


Radar Signal 2

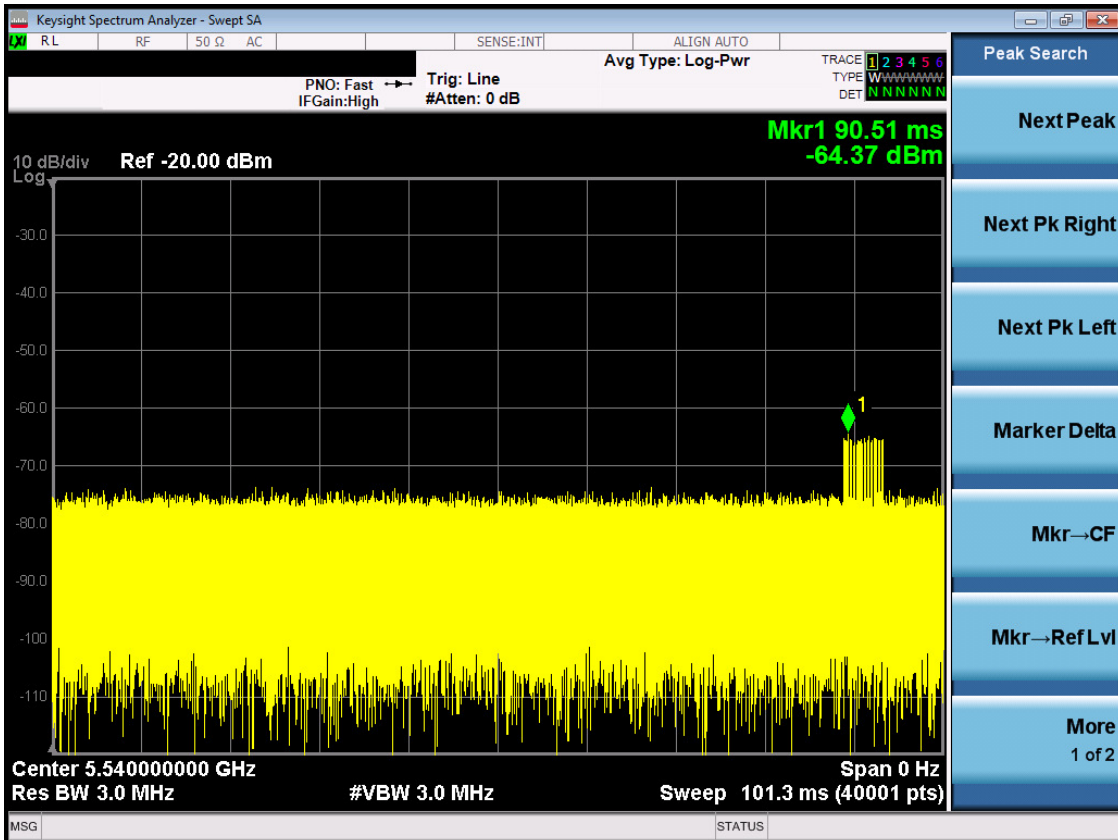

Radar Signal 5

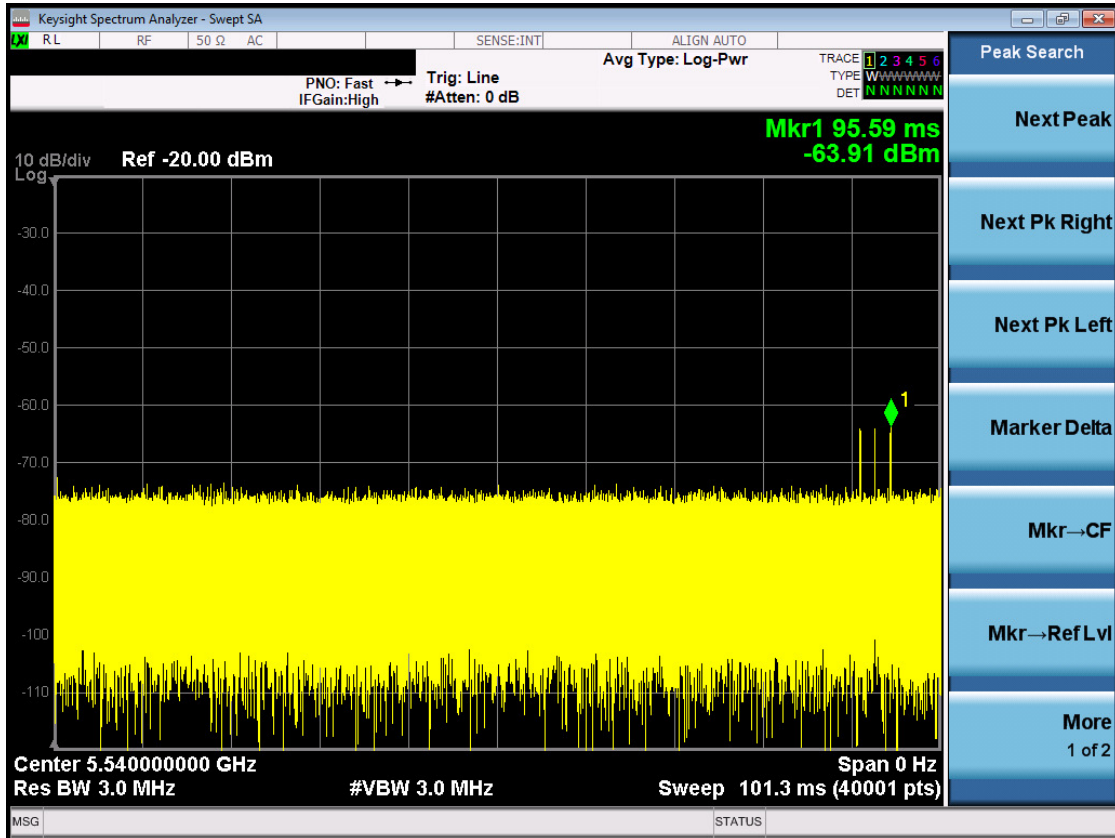

Radar Signal 6

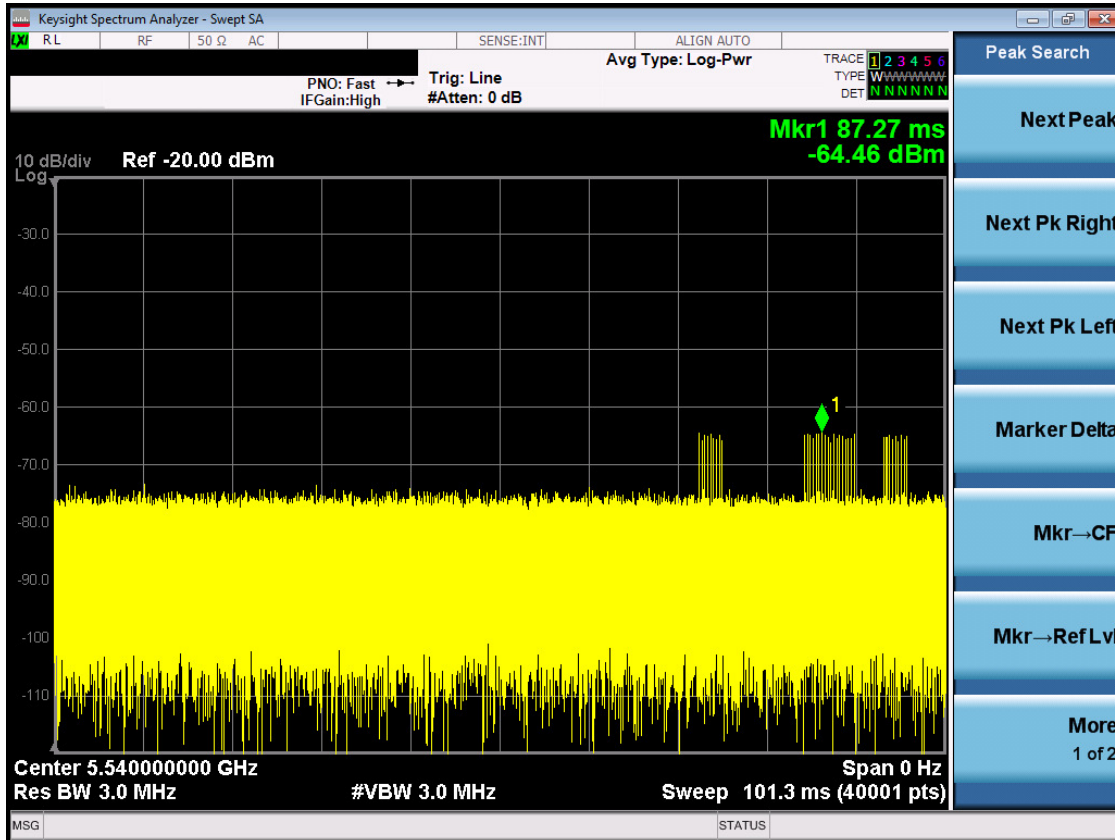

Radar Signal 0

Trial ID	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
0	Type 0	1	1428	18	25704
1	Type 0	1	1428	18	25704
2	Type 0	1	1428	18	25704
3	Type 0	1	1428	18	25704
4	Type 0	1	1428	18	25704
5	Type 0	1	1428	18	25704
6	Type 0	1	1428	18	25704
7	Type 0	1	1428	18	25704
8	Type 0	1	1428	18	25704
9	Type 0	1	1428	18	25704
10	Type 0	1	1428	18	25704
11	Type 0	1	1428	18	25704
12	Type 0	1	1428	18	25704
13	Type 0	1	1428	18	25704
14	Type 0	1	1428	18	25704
15	Type 0	1	1428	18	25704
16	Type 0	1	1428	18	25704
17	Type 0	1	1428	18	25704
18	Type 0	1	1428	18	25704
19	Type 0	1	1428	18	25704
20	Type 0	1	1428	18	25704
21	Type 0	1	1428	18	25704
22	Type 0	1	1428	18	25704
23	Type 0	1	1428	18	25704
24	Type 0	1	1428	18	25704
25	Type 0	1	1428	18	25704
26	Type 0	1	1428	18	25704
27	Type 0	1	1428	18	25704
28	Type 0	1	1428	18	25704
29	Type 0	1	1428	18	25704

Radar Signal 1

Trial ID	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
0	Type 1	1	938	57	53466
1	Type 1	1	698	76	53048
2	Type 1	1	618	86	53148
3	Type 1	1	538	99	53262
4	Type 1	1	878	61	53558
5	Type 1	1	3066	18	55188
6	Type 1	1	638	83	52954
7	Type 1	1	918	58	53244
8	Type 1	1	838	63	52794
9	Type 1	1	858	62	53196
10	Type 1	1	798	67	53466
11	Type 1	1	718	74	53132
12	Type 1	1	578	92	53176
13	Type 1	1	598	89	53222
14	Type 1	1	558	95	53010
15	Type 1	1	2536	21	53256
16	Type 1	1	966	55	53130
17	Type 1	1	827	64	52928
18	Type 1	1	2501	22	55022
19	Type 1	1	2595	21	54495
20	Type 1	1	1114	48	53472
21	Type 1	1	1302	41	53382
22	Type 1	1	3045	18	54810
23	Type 1	1	1624	33	53592
24	Type 1	1	2878	19	54682
25	Type 1	1	1027	52	53404
26	Type 1	1	2485	22	54670
27	Type 1	1	1600	33	52800
28	Type 1	1	1172	46	53912
29	Type 1	1	1177	45	52965

Radar Signal 2

Trial ID	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
0	Type 2	3.2	179	26	4654
1	Type 2	1.1	207	23	4761
2	Type 2	2.1	230	24	5520
3	Type 2	4.8	200	29	5800
4	Type 2	3.9	214	28	5992
5	Type 2	2.9	222	26	5772
6	Type 2	3.2	204	26	5304
7	Type 2	2.5	192	25	4800
8	Type 2	3.1	164	26	4264
9	Type 2	1.2	156	23	3588
10	Type 2	3.9	210	27	5670
11	Type 2	4.6	201	29	5829
12	Type 2	3.2	162	26	4212
13	Type 2	2.2	197	25	4925
14	Type 2	4.5	163	29	4727
15	Type 2	3	203	26	5278
16	Type 2	5	168	29	4872
17	Type 2	2.4	217	25	5425
18	Type 2	2.9	191	26	4966
19	Type 2	2.3	166	25	4150
20	Type 2	3.7	150	27	4050
21	Type 2	2.2	176	25	4400
22	Type 2	4.9	195	29	5655
23	Type 2	2.9	202	26	5252
24	Type 2	2.5	178	25	4450
25	Type 2	1.1	206	23	4738
26	Type 2	3.8	155	27	4185
27	Type 2	4.7	157	29	4553
28	Type 2	2.4	224	25	5600
29	Type 2	4.2	159	28	4452

Radar Signal 3

Trial ID	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
0	Type 3	8.2	355	17	6035
1	Type 3	6.1	487	16	7792
2	Type 3	7.1	344	16	5504
3	Type 3	9.8	288	18	5184
4	Type 3	8.9	230	18	4140
5	Type 3	7.9	432	17	7344
6	Type 3	8.2	207	17	3519
7	Type 3	7.5	443	17	7531
8	Type 3	8.1	439	17	7463
9	Type 3	6.2	223	16	3568
10	Type 3	8.9	208	18	3744
11	Type 3	9.6	463	18	8334
12	Type 3	8.2	441	17	7497
13	Type 3	7.2	323	16	5168
14	Type 3	9.5	297	18	5346
15	Type 3	8	412	17	7004
16	Type 3	10	324	18	5832
17	Type 3	7.4	271	17	4607
18	Type 3	7.9	349	17	5933
19	Type 3	7.3	409	16	6544
20	Type 3	8.7	373	18	6714
21	Type 3	7.2	254	16	4064
22	Type 3	9.9	274	18	4932
23	Type 3	7.9	278	17	4726
24	Type 3	7.5	317	17	5389
25	Type 3	6.1	260	16	4160
26	Type 3	8.8	211	18	3798
27	Type 3	9.7	272	18	4896
28	Type 3	7.4	264	17	4488
29	Type 3	9.2	284	18	5112

Radar Signal 4

Trial ID	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
0	Type 4	16	355	14	4970
1	Type 4	11.3	487	12	5844
2	Type 4	13.5	344	13	4472
3	Type 4	19.4	288	16	4608
4	Type 4	17.5	230	15	3450
5	Type 4	15.3	432	14	6048
6	Type 4	15.9	207	14	2898
7	Type 4	14.3	443	13	5759
8	Type 4	15.8	439	14	6146
9	Type 4	11.5	223	12	2676
10	Type 4	17.4	208	15	3120
11	Type 4	19	463	16	7408
12	Type 4	16	441	14	6174
13	Type 4	13.8	323	13	4199
14	Type 4	18.9	297	16	4752
15	Type 4	15.5	412	14	5768
16	Type 4	19.9	324	16	5184
17	Type 4	14.1	271	13	3523
18	Type 4	15.2	349	14	4886
19	Type 4	13.8	409	13	5317
20	Type 4	17.1	373	15	5595
21	Type 4	13.8	254	13	3302
22	Type 4	19.8	274	16	4384
23	Type 4	15.3	278	14	3892
24	Type 4	14.5	317	13	4121
25	Type 4	11.3	260	12	3120
26	Type 4	17.3	211	15	3165
27	Type 4	19.2	272	16	4352
28	Type 4	14.2	264	13	3432
29	Type 4	18.2	284	15	4260

Radar Signal 5

Trial ID	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Center Frequency(GHz)
0	Type 5	15	0.8	12	5.5525
1	Type 5	8	1.5	12	5.5325
2	Type 5	11	1.0909091	12	5.5415
3	Type 5	20	0.6	12	5.5665
4	Type 5	17	0.7058824	12	5.5585
5	Type 5	14	0.8571429	12	5.5495
6	Type 5	15	0.8	12	5.5515
7	Type 5	12	1	12	5.5445
8	Type 5	14	0.8571429	12	5.5515
9	Type 5	8	1.5	12	5.5335
10	Type 5	17	0.7058824	12	5.5585
11	Type 5	19	0.6315789	12	5.5645
12	Type 5	15	0.8	12	5.5515
13	Type 5	12	1	12	5.5425
14	Type 5	19	0.6315789	12	5.5645
15	Type 5	14	0.8571429	12	5.5495
16	Type 5	20	0.6	12	5.5685
17	Type 5	12	1	12	5.5445
18	Type 5	14	0.8571429	12	5.5485
19	Type 5	12	1	12	5.5435
20	Type 5	16	0.75	12	5.5565
21	Type 5	12	1	12	5.5425
22	Type 5	20	0.6	12	5.5675
23	Type 5	14	0.8571429	12	5.5495
24	Type 5	13	0.9230769	12	5.5455
25	Type 5	8	1.5	12	5.5325
26	Type 5	17	0.7058824	12	5.5575
27	Type 5	19	0.6315789	12	5.5655
28	Type 5	12	1	12	5.5445
29	Type 5	18	0.6666667	12	5.5615

Radar Signal 5 11a Mode

Trial ID	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Center Frequency(GHz)
0	Type 5	15	0.8	12	5.55
1	Type 5	8	1.5	12	5.55
2	Type 5	11	1.0909091	12	5.55
3	Type 5	20	0.6	12	5.55
4	Type 5	17	0.7058824	12	5.55
5	Type 5	14	0.8571429	12	5.55
6	Type 5	15	0.8	12	5.55
7	Type 5	12	1	12	5.55
8	Type 5	14	0.8571429	12	5.55
9	Type 5	8	1.5	12	5.55
10	Type 5	17	0.7058824	12	5.5474
11	Type 5	19	0.6315789	12	5.5486
12	Type 5	15	0.8	12	5.5462
13	Type 5	12	1	12	5.545
14	Type 5	19	0.6315789	12	5.5482
15	Type 5	14	0.8571429	12	5.5458
16	Type 5	20	0.6	12	5.549
17	Type 5	12	1	12	5.545
18	Type 5	14	0.8571429	12	5.5458
19	Type 5	12	1	12	5.545
20	Type 5	16	0.75	12	5.553
21	Type 5	12	1	12	5.5554
22	Type 5	20	0.6	12	5.551
23	Type 5	14	0.8571429	12	5.5542
24	Type 5	13	0.9230769	12	5.5546
25	Type 5	8	1.5	12	5.557
26	Type 5	17	0.7058824	12	5.5526
27	Type 5	19	0.6315789	12	5.5514
28	Type 5	12	1	12	5.555
29	Type 5	18	0.6666667	12	5.5522

Radar Signal 5 11n 40MHz Mode

Trial ID	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Center Frequency(GHz)
0	Type 5	15	0.8	12	5.55
1	Type 5	8	1.5	12	5.55
2	Type 5	11	1.0909091	12	5.55
3	Type 5	20	0.6	12	5.55
4	Type 5	17	0.7058824	12	5.55
5	Type 5	14	0.8571429	12	5.55
6	Type 5	15	0.8	12	5.55
7	Type 5	12	1	12	5.55
8	Type 5	14	0.8571429	12	5.55
9	Type 5	8	1.5	12	5.55
10	Type 5	17	0.7058824	12	5.5384
11	Type 5	19	0.6315789	12	5.5396
12	Type 5	15	0.8	12	5.5372
13	Type 5	12	1	12	5.536
14	Type 5	19	0.6315789	12	5.5392
15	Type 5	14	0.8571429	12	5.5368
16	Type 5	20	0.6	12	5.54
17	Type 5	12	1	12	5.536
18	Type 5	14	0.8571429	12	5.5368
19	Type 5	12	1	12	5.536
20	Type 5	16	0.75	12	5.562
21	Type 5	12	1	12	5.5644
22	Type 5	20	0.6	12	5.56
23	Type 5	14	0.8571429	12	5.5632
24	Type 5	13	0.9230769	12	5.5636
25	Type 5	8	1.5	12	5.566
26	Type 5	17	0.7058824	12	5.5616
27	Type 5	19	0.6315789	12	5.5604
28	Type 5	12	1	12	5.564
29	Type 5	18	0.6666667	12	5.5612

Radar Signal 5 11ac 80MHz Mode

Trial ID	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Center Frequency(GHz)
0	Type 5	15	0.8	12	5.53
1	Type 5	8	1.5	12	5.53
2	Type 5	11	1.0909091	12	5.53
3	Type 5	20	0.6	12	5.53
4	Type 5	17	0.7058824	12	5.53
5	Type 5	14	0.8571429	12	5.53
6	Type 5	15	0.8	12	5.53
7	Type 5	12	1	12	5.53
8	Type 5	14	0.8571429	12	5.53
9	Type 5	8	1.5	12	5.53
10	Type 5	17	0.7058824	12	5.4984
11	Type 5	19	0.6315789	12	5.4996
12	Type 5	15	0.8	12	5.4972
13	Type 5	12	1	12	5.496
14	Type 5	19	0.6315789	12	5.4992
15	Type 5	14	0.8571429	12	5.4968
16	Type 5	20	0.6	12	5.5
17	Type 5	12	1	12	5.496
18	Type 5	14	0.8571429	12	5.4968
19	Type 5	12	1	12	5.496
20	Type 5	16	0.75	12	5.562
21	Type 5	12	1	12	5.5644
22	Type 5	20	0.6	12	5.56
23	Type 5	14	0.8571429	12	5.5632
24	Type 5	13	0.9230769	12	5.5636
25	Type 5	8	1.5	12	5.566
26	Type 5	17	0.7058824	12	5.5616
27	Type 5	19	0.6315789	12	5.5604
28	Type 5	12	1	12	5.564
29	Type 5	18	0.6666667	12	5.5612

Radar Signal 6

Trial ID	Radar Type	Pulse Width (μs)	PRI (μs)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	Number of Pulses
0	Type 6	1	333.3	9	0.3333	300	16
1	Type 6	1	333.3	9	0.3333	300	10
2	Type 6	1	333.3	9	0.3333	300	14
3	Type 6	1	333.3	9	0.3333	300	19
4	Type 6	1	333.3	9	0.3333	300	15
5	Type 6	1	333.3	9	0.3333	300	18
6	Type 6	1	333.3	9	0.3333	300	14
7	Type 6	1	333.3	9	0.3333	300	14
8	Type 6	1	333.3	9	0.3333	300	21
9	Type 6	1	333.3	9	0.3333	300	15
10	Type 6	1	333.3	9	0.3333	300	16
11	Type 6	1	333.3	9	0.3333	300	24
12	Type 6	1	333.3	9	0.3333	300	13
13	Type 6	1	333.3	9	0.3333	300	20
14	Type 6	1	333.3	9	0.3333	300	17
15	Type 6	1	333.3	9	0.3333	300	20
16	Type 6	1	333.3	9	0.3333	300	16
17	Type 6	1	333.3	9	0.3333	300	18
18	Type 6	1	333.3	9	0.3333	300	14
19	Type 6	1	333.3	9	0.3333	300	16
20	Type 6	1	333.3	9	0.3333	300	20
21	Type 6	1	333.3	9	0.3333	300	19
22	Type 6	1	333.3	9	0.3333	300	23
23	Type 6	1	333.3	9	0.3333	300	17
24	Type 6	1	333.3	9	0.3333	300	16
25	Type 6	1	333.3	9	0.3333	300	13
26	Type 6	1	333.3	9	0.3333	300	13
27	Type 6	1	333.3	9	0.3333	300	18
28	Type 6	1	333.3	9	0.3333	300	19
29	Type 6	1	333.3	9	0.3333	300	20

6.4 PARAMETER DATE SHEET FOR RADAR TYPE 5

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	0		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	636185	77.8	13	2	1665	1477	-
1	32674	51.9	13	1	1074	-	-
2	226294	63.8	13	1	1584	-	-
3	417976	96.6	13	3	1682	1786	1843
4	611152	85.9	13	3	1795	1215	1729
5	8789	73.7	13	2	1198	1549	-
6	201917	77.2	13	2	1837	1819	-
7	395530	68.4	13	2	1587	1114	-
8	588564	76.7	13	2	2000	1155	-
9	783794	53.2	13	1	1147	-	-
10	177933	85.7	13	3	1433	1695	1394
11	370624	94.3	13	3	1670	1426	1935
12	564893	77.6	13	2	1294	1671	-
13	759583	65.7	13	1	1512	-	-
14	154262	93.5	13	3	1444	1130	1468

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	1		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	653020	75	5	2	1880	1527	-
1	1015643	99.4	5	3	1401	1262	1257
2	1379398	67.4	5	2	1531	1403	-
3	245489	73.6	5	2	1449	1041	-
4	609113	65.9	5	1	1432	-	-
5	970852	83.8	5	3	1356	1292	1419
6	1335913	65.5	5	1	1543	-	-
7	200406	98.6	5	3	1548	1796	1728

Statistical Performance Check Result

Rader Test Signal(#)		5		Trail#	2		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	409565	73.8	9	2	1806	1538	-
1	673692	69.5	9	2	1117	1649	-
2	938562	51.9	9	1	1651	-	-
3	113209	84.6	9	3	1976	1032	1271
4	376726	95.4	9	3	1060	1903	1388
5	641212	68	9	2	1368	1351	-
6	903714	89.6	9	3	1338	1514	1573
7	80863	81.9	9	2	1022	1689	-
8	344067	88.3	9	3	1810	1330	1838
9	609331	53.7	9	1	1597	-	-
10	871542	91.3	9	3	1961	1106	1001

Statistical Performance Check Result

Rader Test Signal(#)		5		Trail#	3		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	26541	68.1	19	2	1339	1355	-
1	171821	58.7	19	1	1251	-	-
2	316229	75.3	19	2	1136	1640	-
3	461864	56.4	19	1	1753	-	-
4	8677	99.7	19	3	1196	1708	1159
5	153995	57.7	19	1	1013	-	-
6	299238	59.5	19	1	1072	-	-
7	443177	80	19	2	1482	1369	-
8	587671	82	19	2	1993	1197	-
9	135674	82.8	19	2	1883	1005	-
10	279928	88	19	3	1061	1928	1101
11	424279	93.2	19	3	1207	1907	1223
12	570132	70.4	19	2	1526	1360	-
13	117439	95.3	19	3	1171	1955	1775
14	262502	81.9	19	2	1690	1545	-
15	406573	98.5	19	3	1975	1169	1062
16	553328	65	19	1	1767	-	-
17	99799	85.4	19	3	1011	1637	1425
18	244095	91.6	19	3	1878	1445	1325
19	390012	67.3	19	2	1091	1218	-

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	4		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	629614	67.9	16	2	1320	1133	-
1	96856	62.3	16	1	1957	-	-
2	267719	53.3	16	1	1592	-	-
3	436784	90	16	3	1900	1153	1346
4	608289	77.1	16	2	1166	1646	-
5	75610	83.9	16	3	1278	1232	1459
6	245638	89.1	16	3	1240	1384	1939
7	416355	81.8	16	2	1833	1676	-
8	588736	50.3	16	1	1075	-	-
9	54571	87.1	16	3	1116	1996	1756
10	225175	71.3	16	2	1225	1815	-
11	394825	97.5	16	3	1884	1465	1132
12	565361	90.6	16	3	1561	1040	1354
13	33643	86.3	16	3	1596	1183	1792
14	203957	97.6	16	3	1365	1073	1361
15	373812	84.7	16	3	1021	1718	1854
16	544060	99.7	16	3	1150	1244	1988

Statistical Performance Check Result

Rader Test Signal(#)		5		Trail#	5		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	15438	92.9	12	3	1085	1564	1407
1	222486	67.7	12	2	1744	1747	-
2	430731	65.8	12	1	1092	-	-
3	637784	56.3	12	1	1851	-	-
4	845342	53.7	12	1	1727	-	-
5	196720	83.5	12	3	1679	1930	1025
6	404955	65.8	12	1	1519	-	-
7	610711	85.9	12	3	1134	1034	1808
8	818057	76.3	12	2	1606	1926	-
9	171459	81.5	12	2	1891	1714	-
10	377969	89.4	12	3	1310	1594	1827
11	586875	63.4	12	1	1568	-	-
12	792834	69.6	12	2	1307	1925	-
13	146044	74.5	12	2	1264	1846	-

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	6		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	329022	96.6	13	3	1182	1609	1581
1	521718	96.7	13	3	1829	1799	1154
2	714222	86.5	13	3	1923	1396	1865
3	112450	73.3	13	2	1908	1318	-
4	306283	55.8	13	1	1688	-	-
5	500239	55.4	13	1	1145	-	-
6	690932	85.3	13	3	1336	1504	1820
7	88645	79.4	13	2	1344	1893	-
8	282508	65.7	13	1	1476	-	-
9	475842	68.6	13	2	1008	1028	-
10	667887	77.7	13	2	1972	1835	-
11	64845	79.6	13	2	1882	1331	-
12	257755	94.9	13	3	1830	1070	1349
13	452335	61.4	13	1	1451	-	-
14	643395	90.6	13	3	1233	1562	1887

Statistical Performance Check Result

Rader Test Signal(#)		5		Trail#	7		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	51446	52.6	10	1	1210	-	-
1	292696	84.1	10	3	1314	1725	1529
2	533989	97.7	10	3	1139	1868	1805
3	775564	97.3	10	3	1341	1446	1755
4	21542	98.8	10	3	1544	1386	1302
5	263385	72.2	10	2	1771	1184	-
6	505581	67.6	10	2	1175	1027	-
7	747058	75.7	10	2	1026	1871	-
8	989976	60.9	10	1	1798	-	-
9	234024	64.2	10	1	1138	-	-
10	475207	78.8	10	2	1784	1604	-
11	715825	87.5	10	3	1511	1712	1683

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	8		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	823112	54.1	13	1	1415	-	-
1	174965	50.7	13	1	1221	-	-
2	382216	52.3	13	1	1974	-	-
3	587395	99.8	13	3	1558	1696	1949
4	796897	68.4	13	2	1014	1099	-
5	149042	80.8	13	2	1736	1505	-
6	356750	62.5	13	1	1778	-	-
7	563824	74.8	13	2	1149	1204	-
8	772314	50.8	13	1	1049	-	-
9	123796	54	13	1	1417	-	-
10	331215	63	13	1	1730	-	-
11	537402	91.8	13	3	1143	1270	1347
12	744805	79.3	13	2	1274	1992	-
13	98172	64.3	13	1	1937	-	-

Statistical Performance Check Result

Rader Test Signal(#)		5		Trail#	9		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	535615	63.4	6	1	1043	-	-
1	898668	52	6	1	1863	-	-
2	1259235	97.2	6	3	1973	1605	1583
3	127106	78.7	6	2	1466	1743	-
4	490358	74.2	6	2	1280	1219	-
5	852409	88.7	6	3	1293	1934	1273
6	1217152	54.3	6	1	1991	-	-
7	82296	95.4	6	3	1580	1555	1791

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	10		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	209249	73.7	16	2	1208	1497	-
1	378386	97.4	16	3	1942	1754	1613
2	548411	91.7	16	3	1999	1702	1462
3	17733	66.2	16	1	1393	-	-
4	187952	70.8	16	2	1968	1821	-
5	359277	52.3	16	1	1740	-	-
6	528886	78.9	16	2	1308	1984	-
7	700166	70.9	16	2	1050	1358	-
8	167197	75.6	16	2	1437	1430	-
9	338262	59.1	16	1	1697	-	-
10	508324	77	16	2	1397	1304	-
11	678689	67.9	16	2	1803	1083	-
12	146031	81.2	16	2	1720	1932	-
13	316923	78.7	16	2	1247	1121	-
14	488056	63.3	16	1	1634	-	-
15	657326	68.9	16	2	1849	1423	-
16	125509	59.3	16	1	1093	-	-

Statistical Performance Check Result

Rader Test Signal(#)		5		Trail#	11		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	263736	98.9	19	3	1381	1680	1488
1	416459	82.3	19	2	1716	1855	-
2	567902	86.7	19	3	1211	1400	1919
3	92979	89.7	19	3	1861	1068	1282
4	245155	98.6	19	3	1507	1194	1461
5	397609	71.1	19	2	1921	1789	-
6	551431	55.9	19	1	1947	-	-
7	74413	67.9	19	2	1350	1372	-
8	226559	84.4	19	3	1203	1107	1443
9	380056	58.8	19	1	1715	-	-
10	533408	65.6	19	1	1017	-	-
11	55547	78.5	19	2	1911	1704	-
12	207876	82.3	19	2	1845	1686	-
13	359771	90.1	19	3	1938	1071	1266
14	511297	90.2	19	3	1989	1089	1950
15	36803	83.1	19	2	1943	1406	-
16	189652	58.8	19	1	1742	-	-
17	341809	77	19	2	1187	1657	-
18	495737	55	19	1	1012	-	-

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	12		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	22911	58.1	13	1	1929	-	-
1	216473	52.1	13	1	1910	-	-
2	410004	59.9	13	1	1971	-	-
3	603671	60.2	13	1	1812	-	-
4	794160	95.9	13	3	1399	1906	1608
5	192251	79.9	13	2	1626	1859	-
6	385590	78.5	13	2	1238	1917	-
7	579862	53.8	13	1	1763	-	-
8	773423	64.7	13	1	1800	-	-
9	168898	61.4	13	1	1390	-	-
10	361606	83.2	13	2	1692	1858	-
11	553866	84.7	13	3	1533	1677	1638
12	747241	88.7	13	3	1703	1528	1058
13	144710	78.3	13	2	1258	1951	-
14	337856	69.3	13	2	1731	1717	-

Statistical Performance Check Result

Rader Test Signal(#)		5		Trail#	13		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	664275	75.3	10	2	1994	1612	-
1	907886	56.3	10	1	1456	-	-
2	151316	67.7	10	2	1617	1185	-
3	393746	55.6	10	1	1337	-	-
4	635093	75.2	10	2	1421	1267	-
5	876993	76.3	10	2	1359	1305	-
6	121278	85.7	10	3	1547	1362	1924
7	362696	98.4	10	3	1873	1550	1249
8	604342	86.4	10	3	1779	1439	1046
9	846453	93.6	10	3	1059	1031	1452
10	91871	63.3	10	1	1328	-	-
11	333050	92.4	10	3	1412	1673	1322

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	14		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	361323	93.3	18	3	1983	1912	1535
1	515261	69.1	18	2	1102	1794	-
2	39025	86.9	18	3	1044	1152	1148
3	190900	84.9	18	3	1894	1948	1118
4	343941	72.3	18	2	1094	1916	-
5	497624	51.7	18	1	1447	-	-
6	20319	58.3	18	1	1429	-	-
7	172999	60.8	18	1	1979	-	-
8	325872	57.1	18	1	1641	-	-
9	475841	88.9	18	3	1886	1964	1489
10	1489	72	18	2	1909	1297	-
11	153647	90.9	18	3	1261	1566	1370
12	307096	59.8	18	1	1552	-	-
13	458804	70	18	2	1759	1291	-
14	610798	67.2	18	2	1625	1881	-
15	134759	91.2	18	3	1382	1832	1661
16	288306	56.5	18	1	1483	-	-
17	441296	51.2	18	1	1237	-	-
18	592780	74.1	18	2	1471	1245	-

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	15		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	158286	76.9	12	2	1110	1140	-
1	366024	50.2	12	1	1316	-	-
2	573452	62.9	12	1	1520	-	-
3	780619	64.7	12	1	1902	-	-
4	132455	83.8	12	3	1410	1097	1621
5	340207	65.4	12	1	1944	-	-
6	548208	53.2	12	1	1024	-	-
7	755333	51.7	12	1	1603	-	-
8	107117	78.7	12	2	1804	1168	-
9	314500	72.4	12	2	1030	1343	-
10	522447	53.8	12	1	1327	-	-
11	728517	73.6	12	2	1524	1553	-
12	81611	66.7	12	2	1722	1122	-
13	288948	82.5	12	2	1404	1019	-

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	16		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	345766	87.6	20	3	1565	1055	1840
1	490019	85.2	20	3	1735	1541	1408
2	39073	84.8	20	3	1534	1889	1463
3	183923	77.9	20	2	1749	1460	-
4	328777	76.5	20	2	1518	1485	-
5	474728	60.9	20	1	1540	-	-
6	21394	83	20	2	1080	1010	-
7	165992	80.4	20	2	1824	1752	-
8	310973	67.5	20	2	1764	1181	-
9	456884	62.1	20	1	1495	-	-
10	3515	86.4	20	3	1773	1966	1263
11	147928	84.3	20	3	1593	1188	1788
12	293225	76.9	20	2	1226	1537	-
13	436922	95.8	20	3	1192	1298	1844
14	584015	55.2	20	1	1644	-	-
15	130832	59	20	1	1402	-	-
16	274684	94.5	20	3	1296	1700	1283
17	418579	91.9	20	3	1970	1978	1165
18	563464	85.2	20	3	1732	1551	1189
19	112787	69.5	20	2	1038	1224	-

Statistical Performance Check Result

Rader Test Signal(#)		5		Trail#	17		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	429224	86.4	10	3	1259	1918	1455
1	670241	92.2	10	3	1598	1719	1895
2	912880	80.4	10	2	1816	1899	-
3	158603	54.3	10	1	1335	-	-
4	400824	53.1	10	1	1303	-	-
5	641915	69.4	10	2	1503	1546	-
6	883823	69.1	10	2	1279	1639	-
7	128373	100	10	3	1375	1438	1595
8	370379	79.6	10	2	1239	1705	-
9	611194	88.4	10	3	1374	1579	1623
10	855665	53.3	10	1	1016	-	-
11	98897	65.3	10	1	1709	-	-

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	18		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	292143	55.3	12	1	1920	-	-
1	499633	58.3	12	1	1797	-	-
2	706377	72.3	12	2	1610	1039	-
3	58989	84.8	12	3	1131	1761	1721
4	266161	82.5	12	2	1875	1431	-
5	474469	63.3	12	1	1095	-	-
6	680544	80	12	2	1119	1913	-
7	33519	90.3	12	3	1660	1853	1123
8	240319	91.1	12	3	1539	1783	1172
9	447400	96.6	12	3	1525	1036	1385
10	654516	82.7	12	2	1710	1990	-
11	8083	50.7	12	1	1234	-	-
12	215435	78.4	12	2	1047	1109	-
13	421325	99.5	12	3	1299	1965	1869

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	19		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	733725	88.6	10	3	1501	1067	1927
1	977882	57.4	10	1	1723	-	-
2	221197	96.6	10	3	1086	1658	1324
3	462915	69.7	10	2	1751	1945	-
4	705071	77.9	10	2	1642	1317	-
5	947923	62	10	1	1866	-	-
6	191373	88.4	10	3	1997	1077	1366
7	432561	97.3	10	3	1790	1896	1367
8	674004	96.2	10	3	1391	1787	1672
9	915842	95.4	10	3	1020	1892	1414
10	162176	54.8	10	1	1084	-	-
11	403553	80.4	10	2	1850	1436	-

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	20		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	483470	74.7	15	2	1619	1611	-
1	666072	57.1	15	1	1560	-	-
2	98810	91.9	15	3	1392	1475	1276
3	279914	83.1	15	2	1809	1772	-
4	462536	50.7	15	1	1003	-	-
5	642324	79.2	15	2	1574	1600	-
6	76831	58.7	15	1	1186	-	-
7	257785	71	15	2	1521	1567	-
8	438554	79	15	2	1777	1960	-
9	620397	68.5	15	2	1284	1428	-
10	54310	73.5	15	2	1904	1352	-
11	235506	70.5	15	2	1864	1115	-
12	417036	76.6	15	2	1045	1300	-
13	597974	81.2	15	2	1160	1675	-
14	32086	61.8	15	1	1277	-	-
15	212751	94.9	15	3	1450	1206	1860

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	21		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	526149	78.5	9	2	1653	1698	-
1	767135	89.8	9	3	1174	1962	1167
2	12955	59.4	9	1	1982	-	-
3	254612	79.6	9	2	1633	1890	-
4	496588	76	9	2	1112	1811	-
5	739728	53.6	9	1	1144	-	-
6	980872	80.9	9	2	1220	1053	-
7	225249	61.6	9	1	1724	-	-
8	467279	53.4	9	1	1901	-	-
9	709720	59.9	9	1	1379	-	-
10	951847	60.4	9	1	1453	-	-
11	194839	91.4	9	3	1768	1726	1227

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	22		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	261858	77	20	2	1191	1363	-
1	407646	58.1	20	1	1248	-	-
2	552319	62.1	20	1	1836	-	-
3	99107	76.9	20	2	1334	1236	-
4	243514	80	20	2	1914	1852	-
5	389464	52	20	1	1701	-	-
6	531093	88.6	20	3	1693	1995	1905
7	81159	72.9	20	2	1922	1387	-
8	225245	98.5	20	3	1839	1746	1389
9	371906	57.9	20	1	1193	-	-
10	514197	95.9	20	3	1659	1870	1066
11	63561	53.5	20	1	1162	-	-
12	207510	92	20	3	1745	1654	1458
13	353638	57.3	20	1	1834	-	-
14	497515	70.5	20	2	1684	1586	-
15	45553	70	20	2	1042	1664	-
16	189821	84	20	3	1765	1630	1176
17	335330	76.1	20	2	1557	1057	-
18	478825	93.2	20	3	1985	1018	1340
19	27594	96.8	20	3	1760	1614	1817

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	23		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	247117	50.1	12	1	1841	-	-
1	453362	93.5	12	3	1590	1081	1413
2	660875	68.8	12	2	1707	1577	-
3	14140	56.3	12	1	1056	-	-
4	220734	86	12	3	1953	1108	1987
5	428367	75.2	12	2	1572	1536	-
6	636681	54.4	12	1	1517	-	-
7	843157	71.1	12	2	1329	1243	-
8	195585	76.2	12	2	1940	1770	-
9	403231	80.2	12	2	1098	1209	-
10	610202	79.7	12	2	1588	1214	-
11	815229	90.9	12	3	1615	1862	1601
12	170267	68.7	12	2	1377	1441	-
13	377306	67.4	12	2	1872	1313	-

Statistical Performance Check Result

Rader Test Signal(#)		5		Trail#	24		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	628071	94	11	3	1643	1748	1941
1	853391	70.8	11	2	1177	1201	-
2	156223	56.3	11	1	1006	-	-
3	378734	96.7	11	3	1230	1163	1332
4	601331	90.6	11	3	1217	1582	1498
5	825462	74.5	11	2	1569	1281	-
6	128265	92.6	11	3	1065	1669	1222
7	351161	89	11	3	1493	1135	1380
8	573425	96.5	11	3	1607	1822	1602
9	798431	70.5	11	2	1141	1178	-
10	100737	94	11	3	1009	1629	1956
11	324661	55.8	11	1	1290	-	-
12	546278	87.7	11	3	1435	1963	1164

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	25		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	1253842	68.6	5	2	1306	1161	-
1	119486	83.1	5	2	1420	1315	-
2	482958	60.9	5	1	1687	-	-
3	845641	77.7	5	2	1776	1158	-
4	1208428	77.4	5	2	1793	1510	-
5	74748	66.8	5	2	1576	1323	-
6	438300	63.7	5	1	1333	-	-
7	800152	91.2	5	3	1409	1681	1275

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	26		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	545865	83.6	16	3	1632	1195	1000
1	14067	89.4	16	3	1173	1627	1656
2	184953	55.8	16	1	1532	-	-
3	353759	90.9	16	3	1981	1554	1998
4	526388	54.7	16	1	1825	-	-
5	694806	97.7	16	3	1734	1202	1250
6	163568	67.5	16	2	1571	1434	-
7	333410	96.7	16	3	1589	1469	1268
8	504006	68.3	16	2	1750	1954	-
9	675297	78.3	16	2	1591	1082	-
10	142890	55	16	1	1427	-	-
11	312479	84.9	16	3	1129	1936	1199
12	482953	74.6	16	2	1959	1856	-
13	655022	63.3	16	1	1885	-	-
14	121457	99.8	16	3	1035	1515	1120
15	292606	63.6	16	1	1647	-	-
16	461322	87.3	16	3	1931	1051	1831

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	27		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	565136	85.6	19	3	1946	1078	1015
1	89970	68.6	19	2	1029	1780	-
2	243121	54.2	19	1	1111	-	-
3	396034	61.2	19	1	1104	-	-
4	546225	97.1	19	3	1157	1969	1100
5	70998	98.3	19	3	1142	1699	1622
6	224093	62.4	19	1	1655	-	-
7	376127	80.2	19	2	1126	1769	-
8	527806	87.5	19	3	1216	1448	1179
9	52247	85.8	19	3	1847	1348	1472
10	204582	88.1	19	3	1023	1124	1631
11	357941	65.3	19	1	1848	-	-
12	510977	52.5	19	1	1470	-	-
13	33698	52.3	19	1	1312	-	-
14	186023	74.1	19	2	1915	1200	-
15	339327	54.9	19	1	1479	-	-
16	491053	76.2	19	2	1376	1502	-
17	14858	60.4	19	1	1758	-	-
18	167387	81.5	19	2	1491	1103	-

Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	28		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	507709	50.5	10	1	1857	-	-
1	750249	55.7	10	1	1246	-	-
2	989003	85.8	10	3	1774	1002	1967
3	235634	76.9	10	2	1125	1474	-
4	477675	75.1	10	2	1254	1052	-
5	718312	92.3	10	3	1180	1486	1492
6	960895	78.1	10	2	1301	1757	-
7	205370	92.2	10	3	1898	1252	1713
8	446940	89	10	3	1260	1706	1411
9	689225	70.9	10	2	1578	1620	-
10	932305	63.1	10	1	1782	-	-
11	176231	55.3	10	1	1522	-	-


Statistical Performance Check Result							
Rader Test Signal(#)		5		Trail#	29		
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	277485	83.4	17	3	1454	1205	1801
1	437880	97.3	17	3	1319	1826	1635
2	598445	90.4	17	3	1079	1986	1674
3	97088	91.8	17	3	1563	1151	1802
4	257251	98.2	17	3	1876	1977	1766
5	419893	59.5	17	1	1952	-	-
6	580724	80	17	2	1253	1137	-
7	77366	86.5	17	3	1054	1128	1828
8	238032	91.1	17	3	1105	1599	1442
9	398605	93.5	17	3	1867	1373	1087
10	562025	60.7	17	1	1033	-	-
11	57684	67.2	17	2	1288	1405	-
12	219083	61.8	17	1	1585	-	-
13	379234	79.4	17	2	1933	1667	-
14	540896	81.4	17	2	1096	1464	-
15	37916	65.7	17	1	1496	-	-
16	198794	76	17	2	1733	1255	-
17	359754	81	17	2	1326	1668	-

6.5 CHANNEL AVAILABILITY CHECK TIME

If the UUT successfully detected the radar burst, it should be observed as the UUT has no transmissions occurred until the UUT starts transmitting on another channel.

11a Mode


Initial Channel Availability Check Time

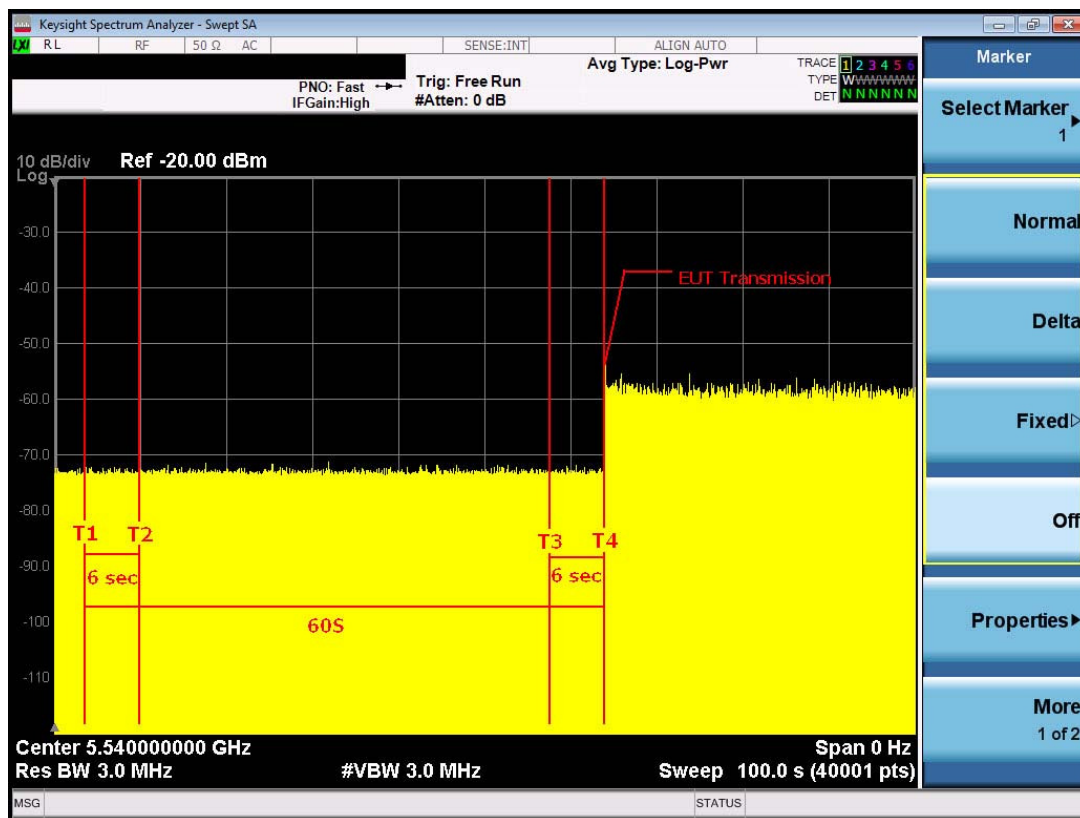

Note: T1 denotes the end of power-up time period is 6 Seconds .
 T4 denotes the end of Channel Availability Check time is 66 Seconds. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

11a Mode


Radar Burst at the Beginning of the Channel Availability Check Time

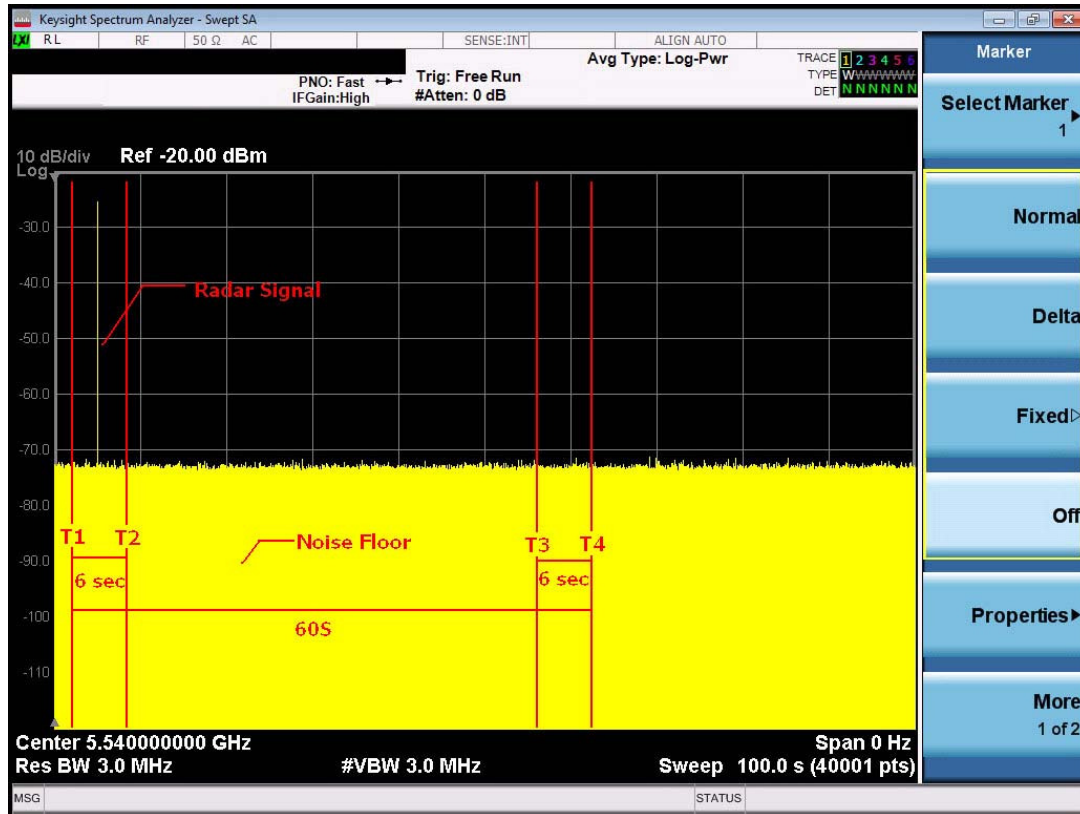

Note: T1 denotes the end of power up time period is 6 seconds.
 T2 denotes 12 second. the radar burst was commenced within a 6 Seconds window starting from the end of power-up sequence.
 T4 denotes the 66 Seconds.

11a Mode


Radar Burst at the End of the Channel Availability Check Time

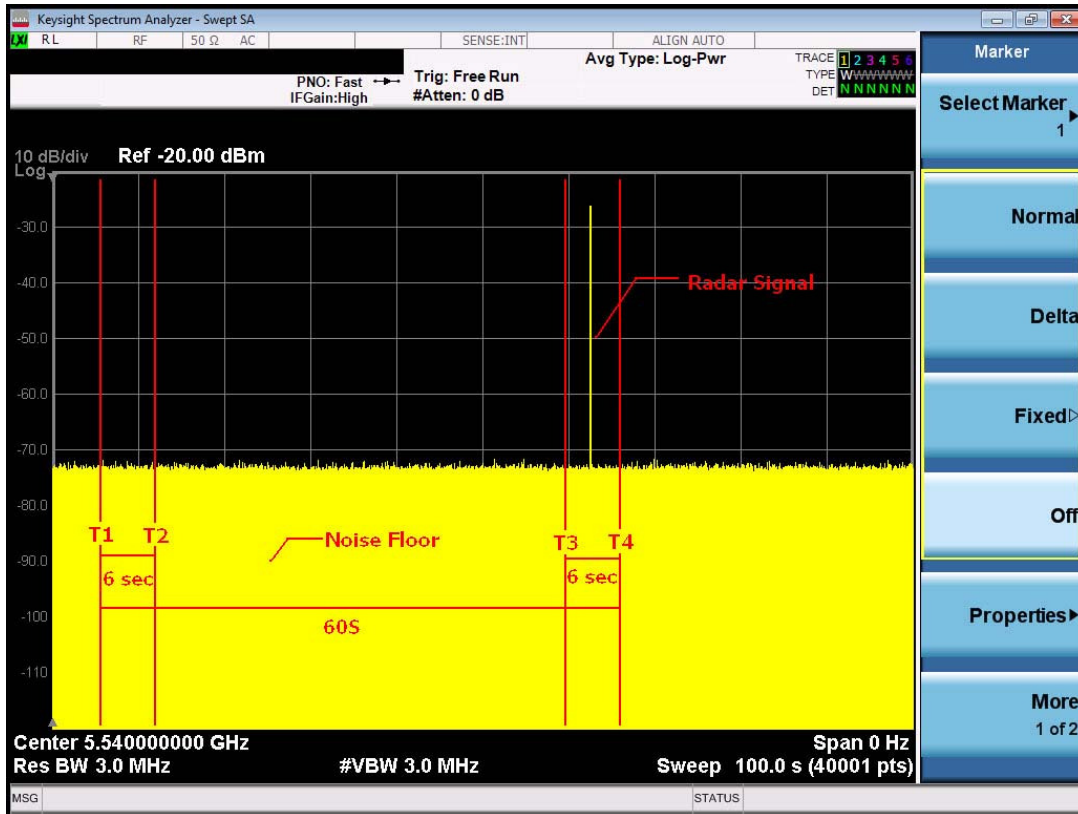

Note: T1 denotes the end of power up time period is 6 seconds.
 T3 denotes 66 seconds and radar burst was commenced within 54thsecond to 60thsecond window starting from the end of power-up sequence.
 T4 denotes the 66 seconds.

11n 40MHz Mode


Initial Channel Availability Check Time

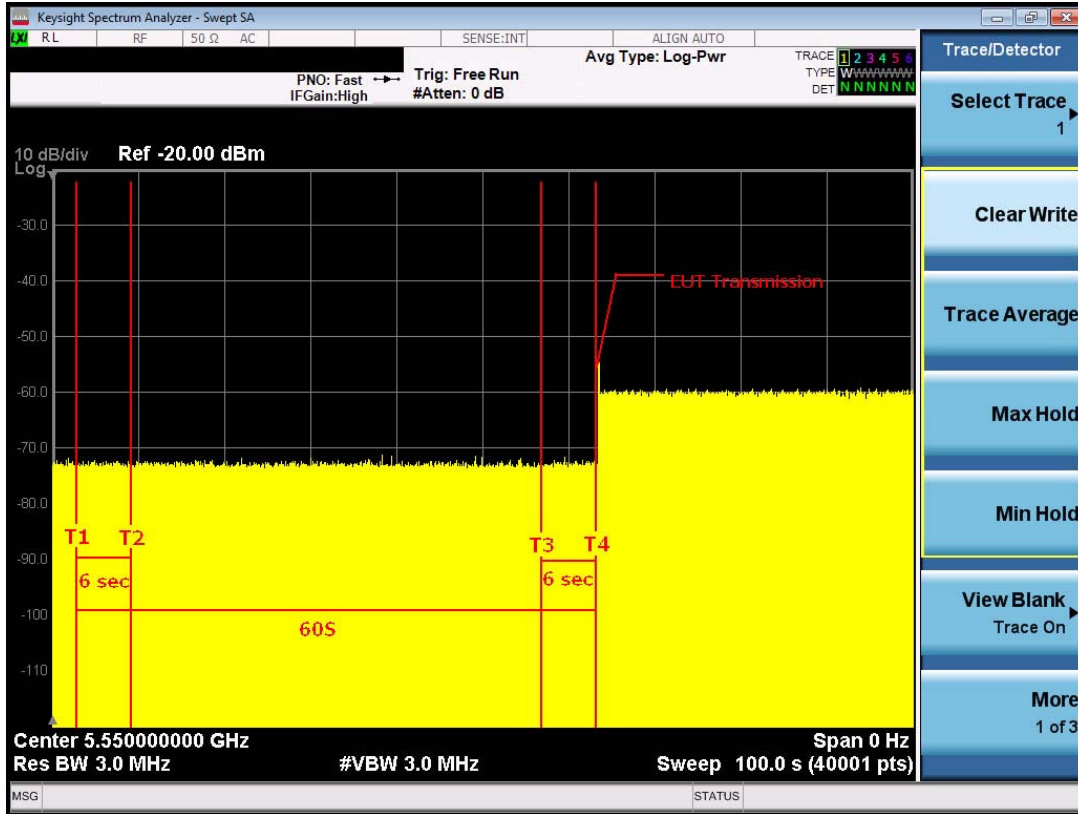

Note: T1 denotes the end of power-up time period is 6 seconds.
 T4 denotes the end of Channel Availability Check time is 66 seconds. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

11n 40MHz Mode


Radar Burst at the Beginning of the Channel Availability Check Time

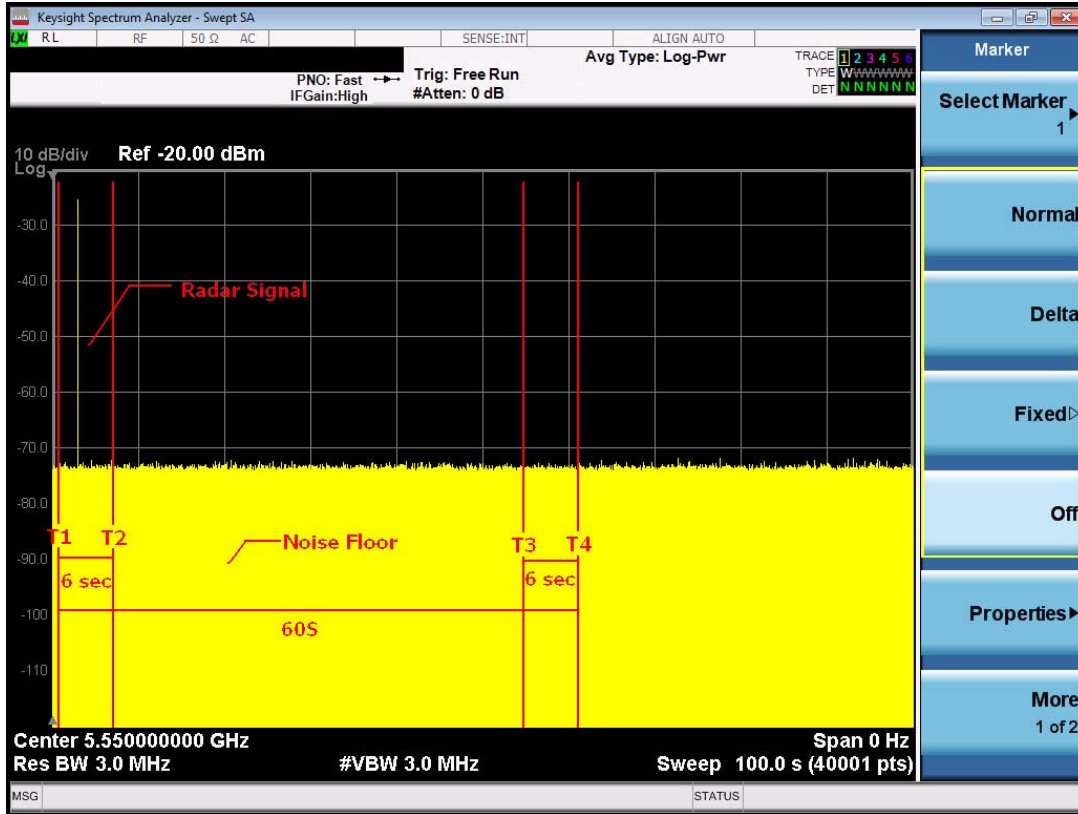

Note: T1 denotes the end of power up time period is 6 Seconds.
 T2 denotes 12 Seconds. the radar burst was commenced within a 6 Seconds window starting from the end of power-up sequence.
 T4 denotes the 66 Seconds.

11n 40MHz Mode


Radar Burst at the End of the Channel Availability Check Time

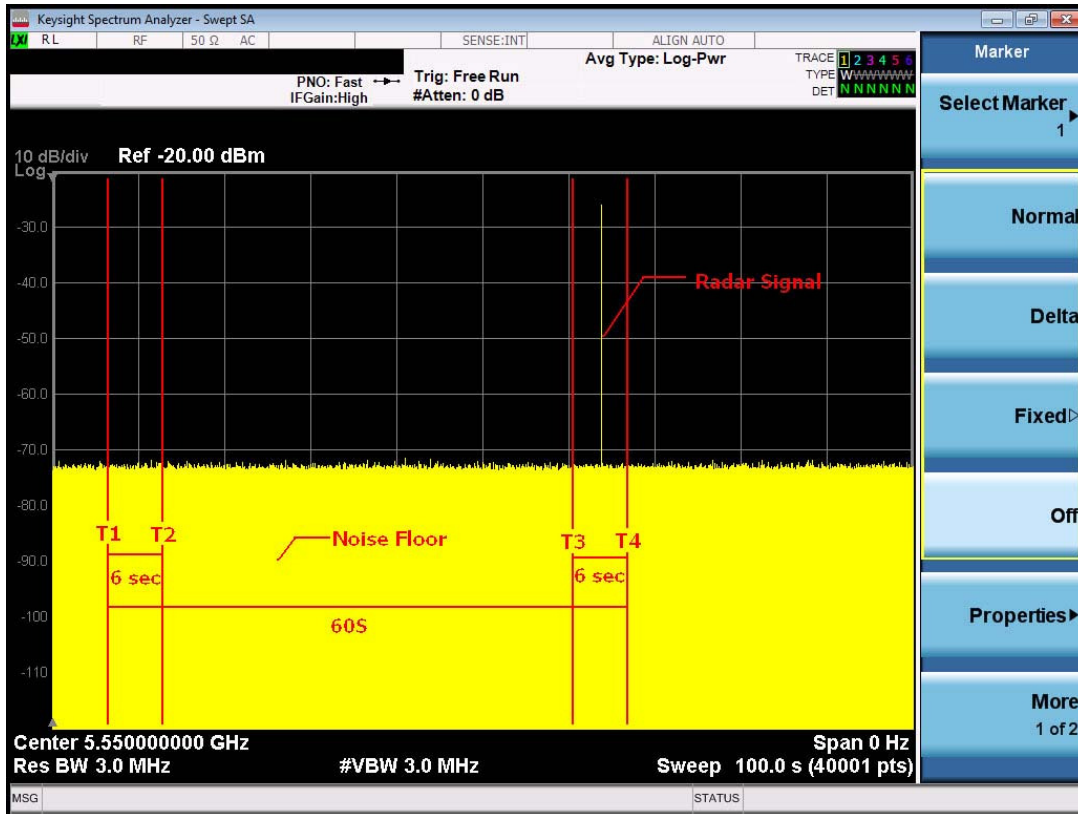

Note: T1 denotes the end of power up time period is 6 Seconds.
 T3 denotes 66 Seconds and radar burst was commenced within 54thSecond to 60thsecond window starting from the end of power-up sequence.
 T4 denotes the 66 Seconds

11ac 80MHz Mode


Initial Channel Availability Check Time

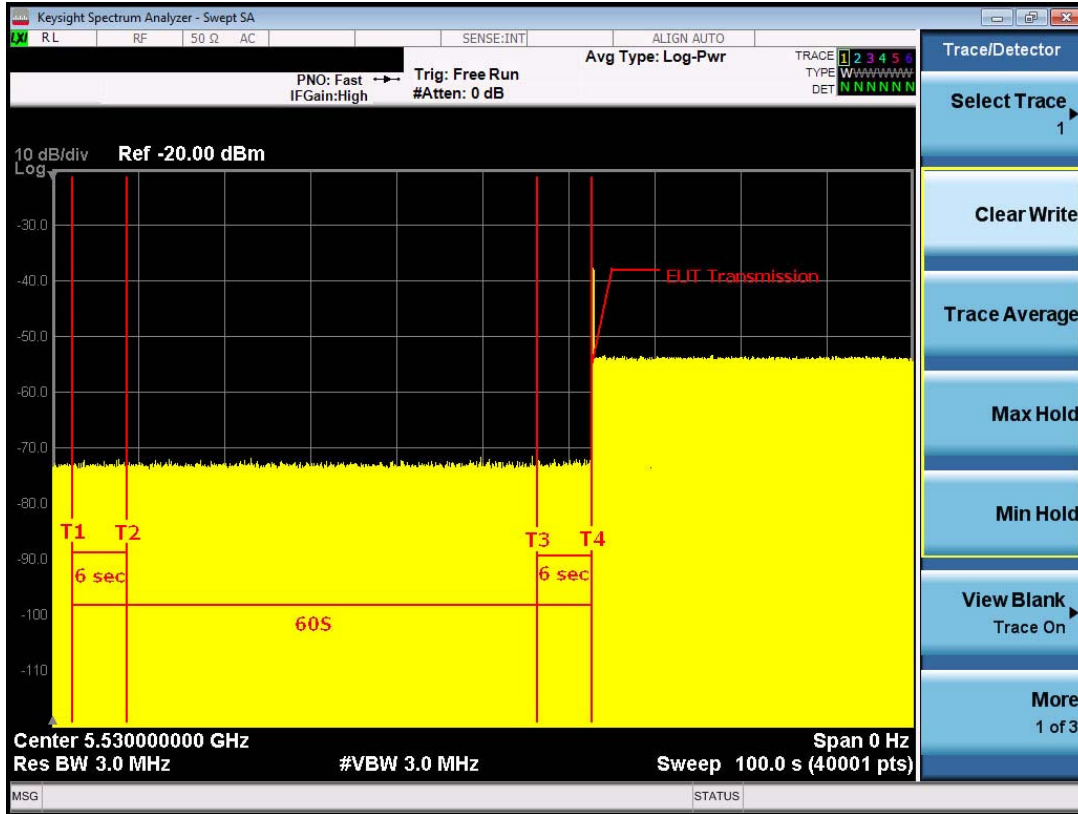

Note: T1 denotes the end of power-up time period is 6 Seconds.
 T4 denotes the end of Channel Availability Check time is 66 Seconds. Channel Availability Check time is equal to (T4 – T1) 60 Seconds.

11ac 80MHz Mode


Radar Burst at the Beginning of the Channel Availability Check Time

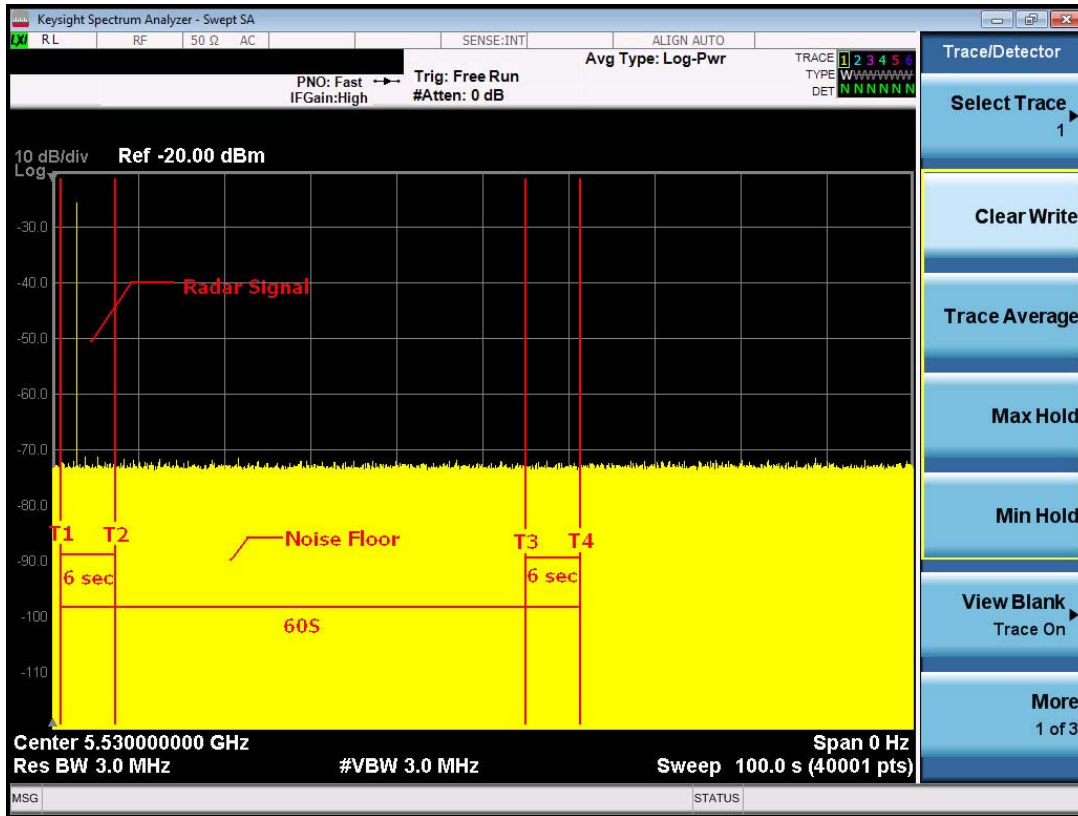

Note: T1 denotes the end of power up time period is 6 Seconds.
 T2 denotes 12 Seconds. the radar burst was commenced within a 6 Seconds window starting from the end of power-up sequence.
 T4 denotes the 66 Seconds.

11ac 80MHz Mode


Radar Burst at the End of the Channel Availability Check Time

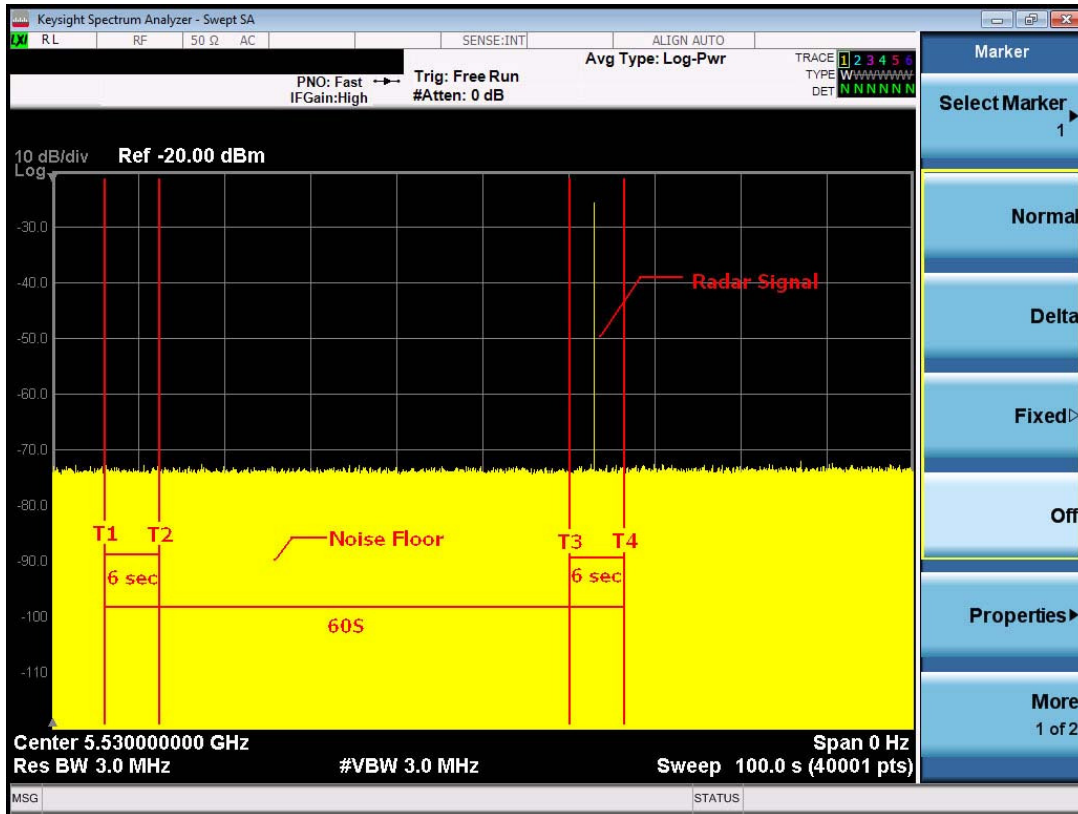

Note: T1 denotes the end of power up time period is 6 Seconds.
 T3 denotes 66 Seconds and radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence.
 T4 denotes the 66 seconds.


11ac 80MHz+80MHz Mode_5290MHz

Initial Channel Availability Check Time

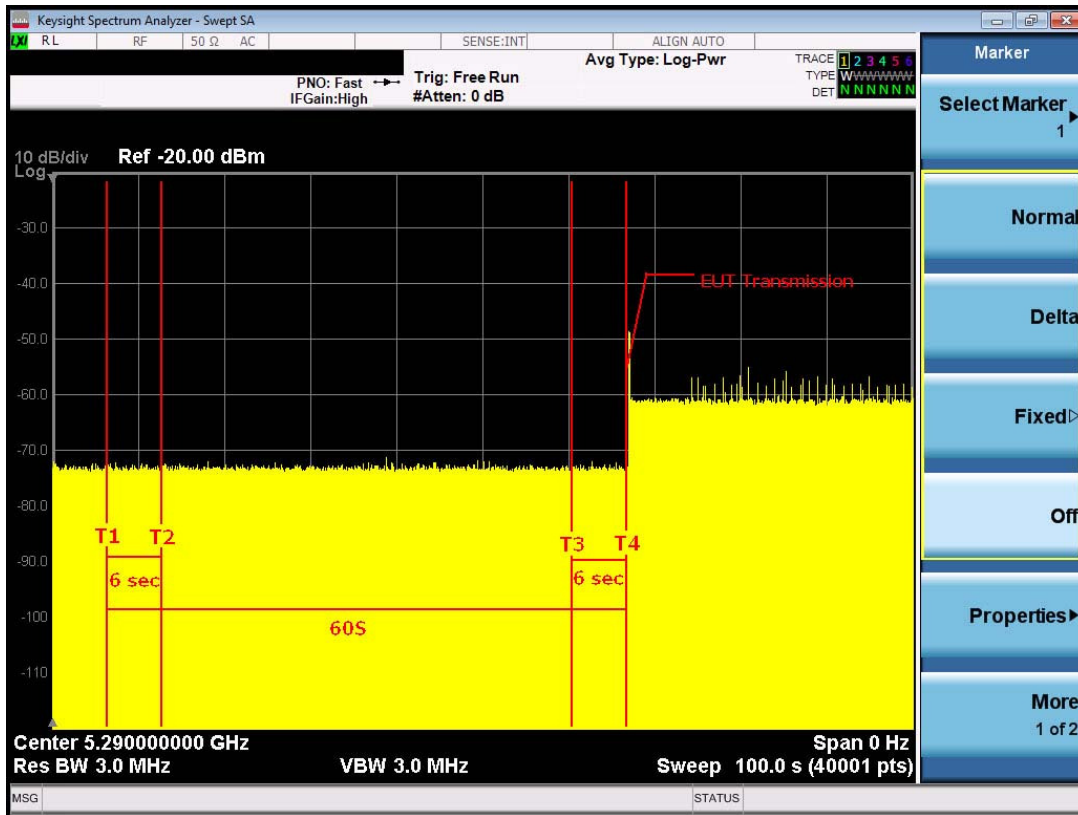

Note: T1 denotes the end of power-up time period is 6 seconds.
 T4 denotes the end of Channel Availability Check time is 66 seconds. Channel Availability Check time is equal to (T4 – T1) 60 seconds.


11ac 80MHz+80MHz Mode_5290MHz Radar Burst at the Beginning of the Channel Availability Check Time

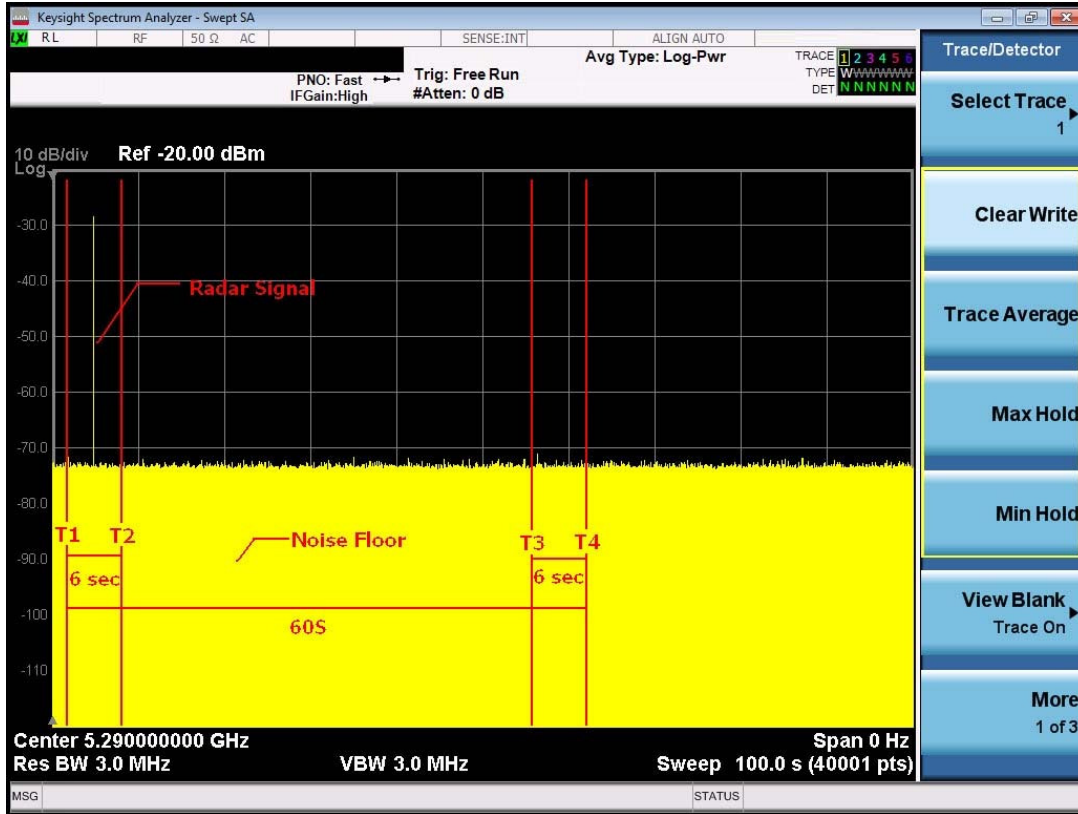

Note: T1 denotes the end of power up time period is 6 seconds.
 T2 denotes 12 second. the radar burst was commenced within a 6 seconds window starting from the end of power-up sequence.
 T4 denotes the 66 seconds.

11ac 80MHz+80MHz Mode_5290MHz


Radar Burst at the End of the Channel Availability Check Time

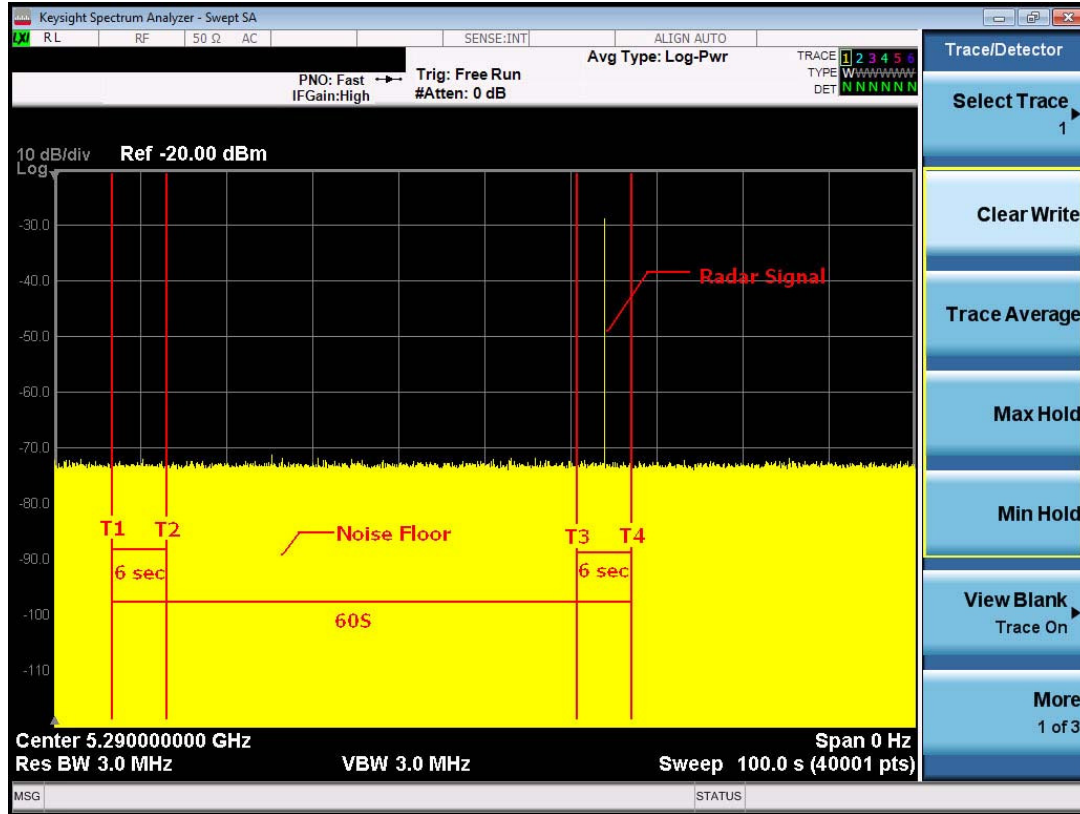

Note: T1 denotes the end of power up time period is 6 seconds.
 T3 denotes 66 seconds and radar burst was commenced within 54thsecond to 60thsecond window starting from the end of power-up sequence.
 T4 denotes the 66 seconds.


11ac 80MHz+80MHz Mode_5610MHz

Initial Channel Availability Check Time

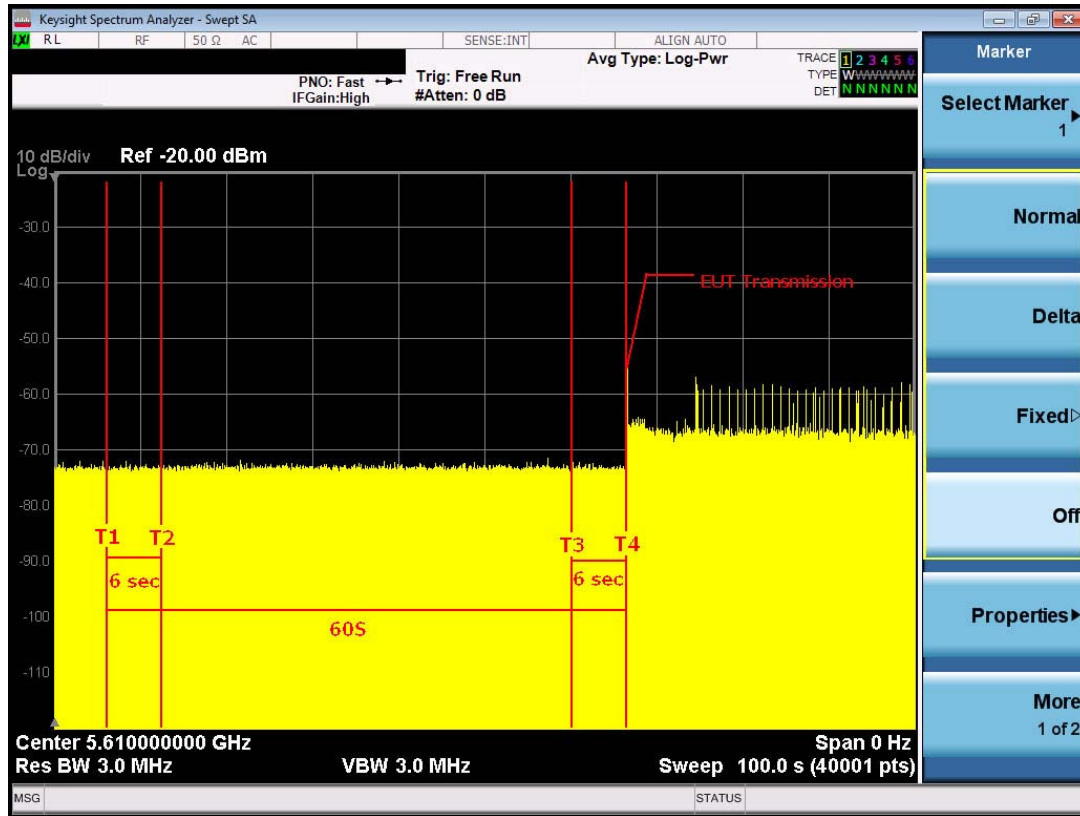

Note: T1 denotes the end of power-up time period is 6 seconds.
 T4 denotes the end of Channel Availability Check time is 66 seconds. Channel Availability Check time is equal to (T4 – T1) 60 seconds.


11ac 80MHz+80MHz Mode_5610MHz
 Radar Burst at the Beginning of the Channel Availability Check Time

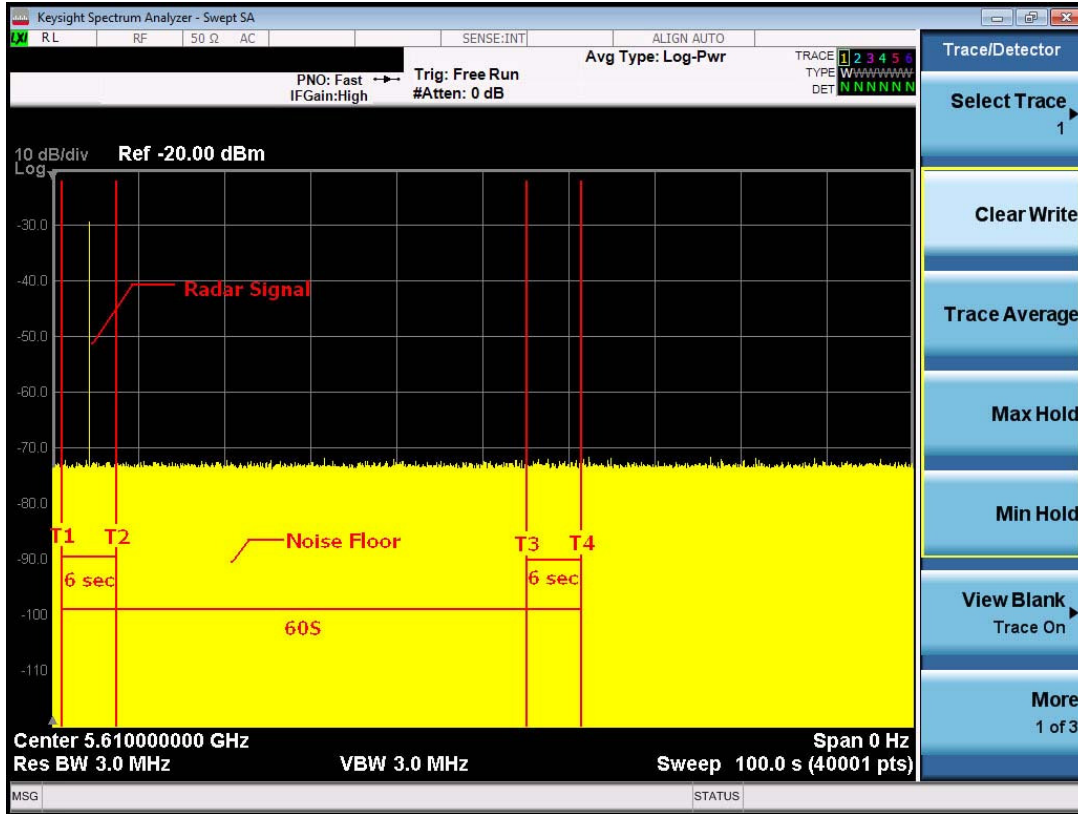

Note: T1 denotes the end of power up time period is 6 seconds.
 T2 denotes 12 second. the radar burst was commenced within a 6 seconds window starting from the end of power-up sequence.
 T4 denotes the 66 seconds.

11ac 80MHz+80MHz Mode_5610MHz

Radar Burst at the End of the Channel Availability Check Time

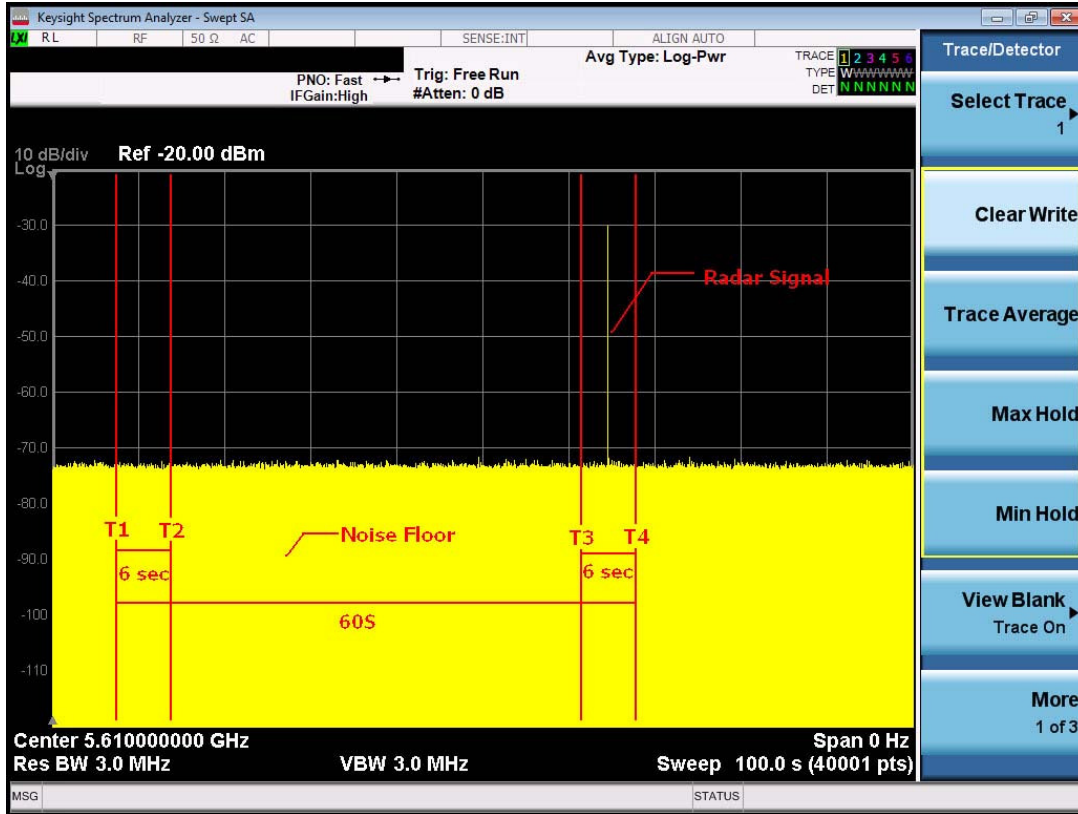


Note: T1 denotes the end of power up time period is 6 seconds.
 T3 denotes 66 second and radar burst was commenced within 54thsecond to 60thsecond window starting from the end of power-up sequence.
 T4 denotes the 66 second.

6.6 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC


TX (11a Mode)

Radar signal 0

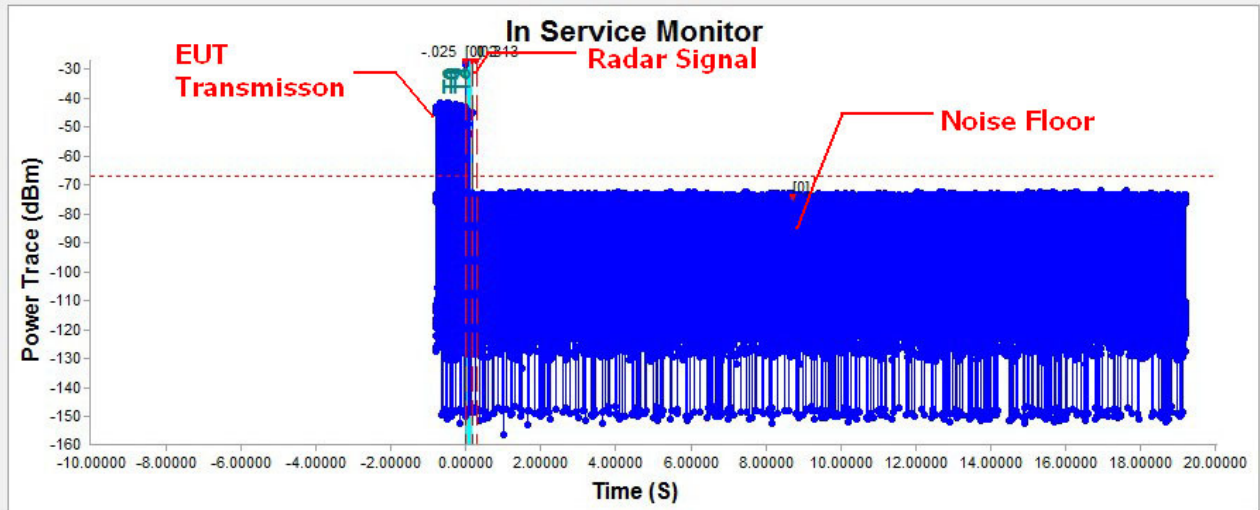

Time Index Info			
T0 : -0.0250 S (Radar Injection Start)	Time Per Bin: 0.4999875	Channel Move Time: 0.3129922 S	
T1 : 0.0000 S (Radar Injection Stop)	T2~T3 Bins Over Threshold:	Channel Close Time: 0.0 S	
T2 : 0.2000 S (200msec Interval)	= 0 Bins		
T3 : 0.3130 S (Channel Move Time)			


Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
 T1 denotes the data transmission time of 200ms from T0.
 T2 denotes the end of Channel Move Time.
 T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

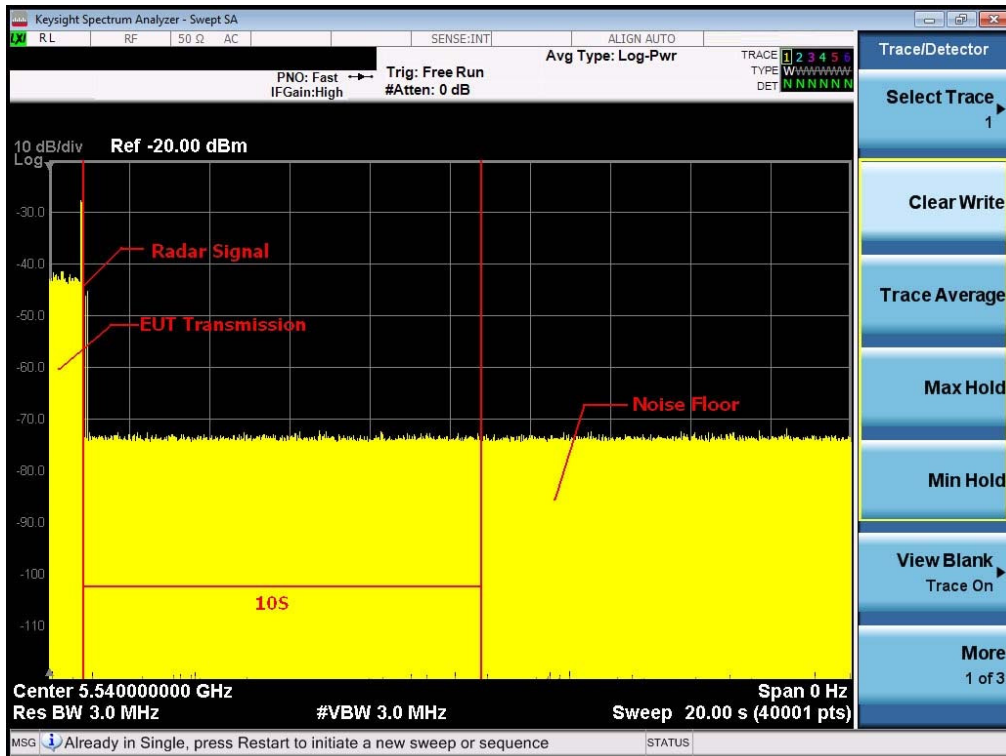

Note: An expanded plot for the device vacates the channel in the required 500ms


TX (11n 40MHz Mode)

Radar signal 0

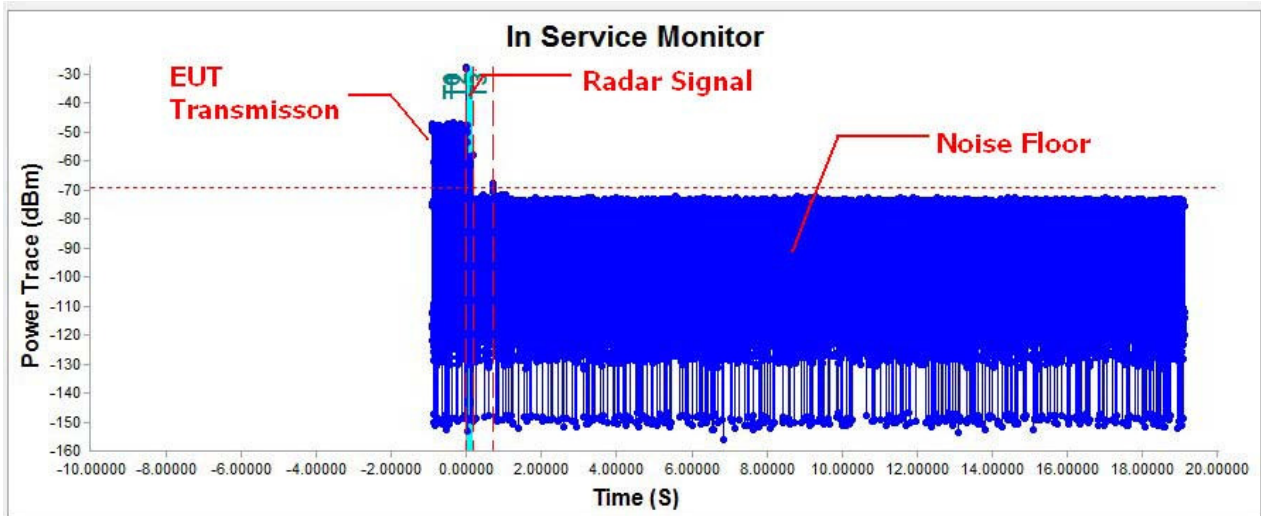

Time Index Info			
T0 : -0.0240 S	(Radar Injection Start)	Time Per Bin: 0.4999875	Channel Move Time: 0.7239819 S
T1 : 0.0000 S	(Radar Injection Stop)	T2~T3 Bins Over Threshold: = 9 Bins	Channel Close Time: 0.0044999 S
T2 : 0.2000 S	(200msec Interval)		
T3 : 0.7240 S	(Channel Move Time)		


Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
 T1 denotes the data transmission time of 200ms from T0.
 T2 denotes the end of Channel Move Time.
 T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

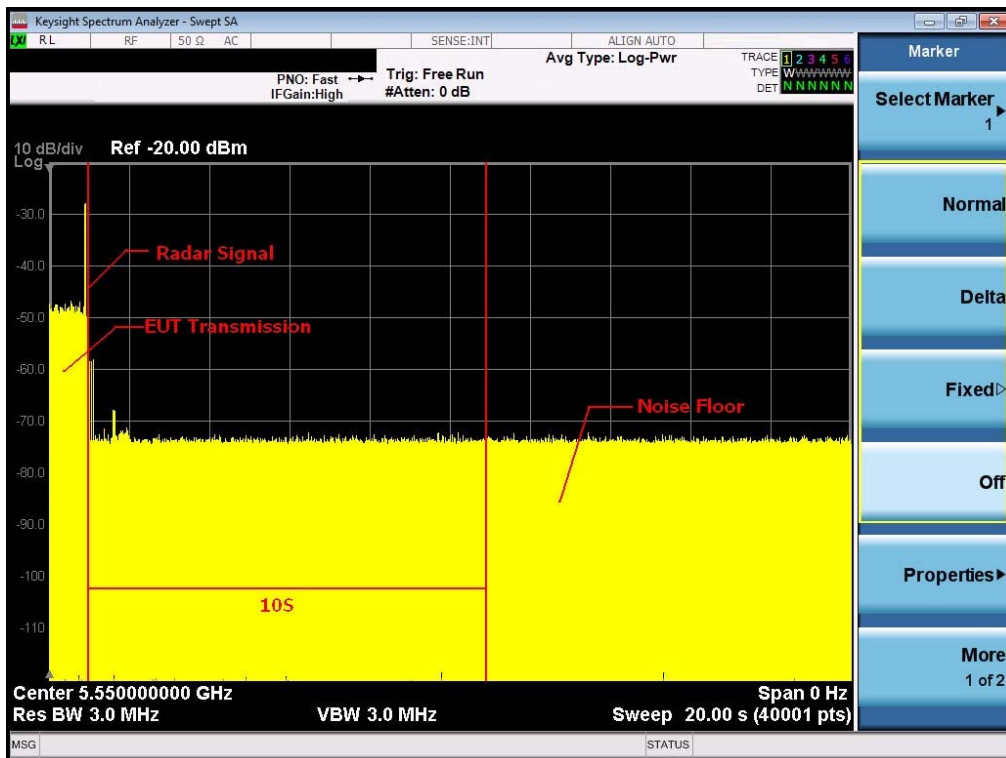

Note: An expanded plot for the device vacates the channel in the required 500ms

TX (11ac 80MHz Mode)


Radar signal 0

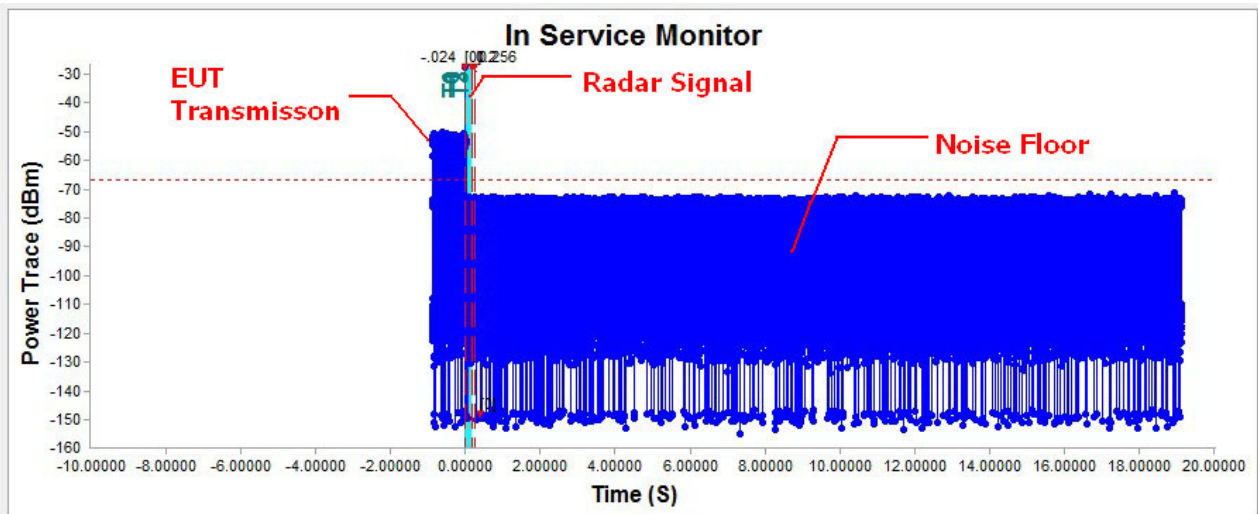

Time Index Info

T0 : -0.0240 S (Radar Injection Start)	Time Per Bin: 0.4999875	Channel Move Time: 0.2559936 S
T1 : 0.0000 S (Radar Injection Stop)		
T2 : 0.2000 S (200msec Interval)	T2~T3 Bins Over Threshold:	Channel Close Time: 0.0 S
T3 : 0.2560 S (Channel Move Time)	= 0 Bins	


Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
 T1 denotes the data transmission time of 200ms from T0.
 T2 denotes the end of Channel Move Time.
 T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

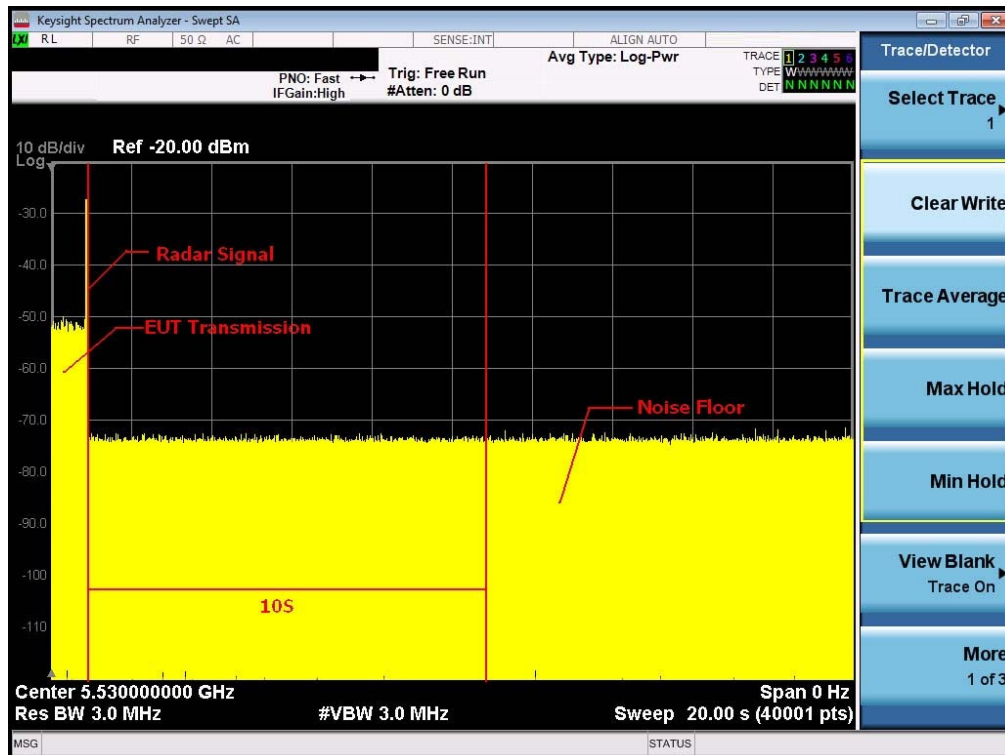

Note: An expanded plot for the device vacates the channel in the required 500ms


TX (11ac 80MHz+80MHz Mode)_5290MHz

Radar signal 0

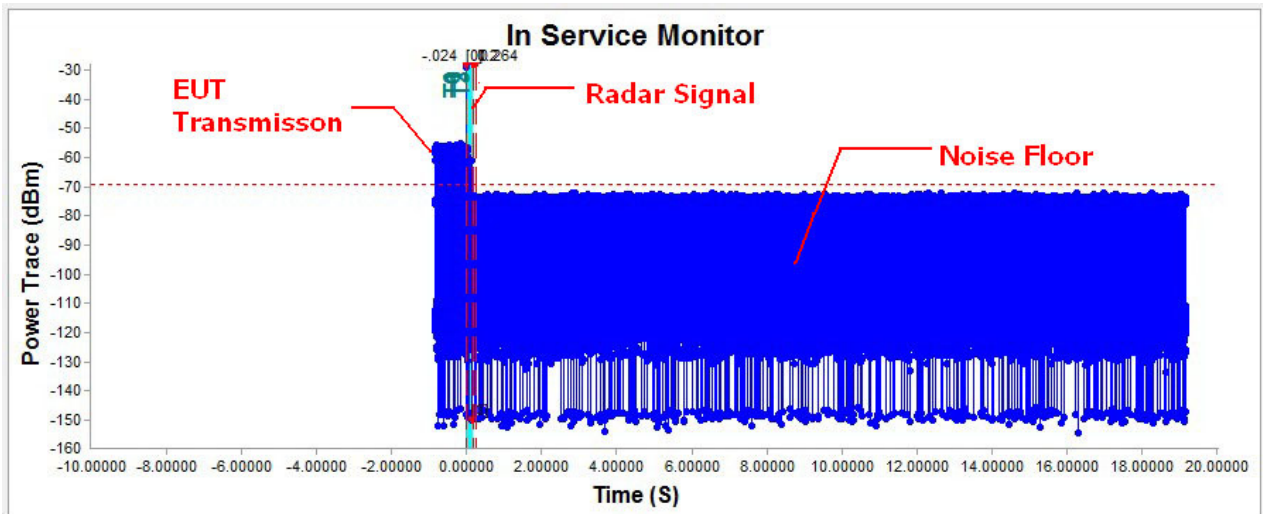

Time Index Info			
T0 : -0.0240 S	(Radar Injection Start)	Time Per Bin: 0.4999875	Channel Move Time: 0.2639934 S
T1 : 0.0000 S	(Radar Injection Stop)	T2~T3 Bins Over Threshold: = 0 Bins	Channel Close Time: 0.0 S
T2 : 0.2000 S	(200msec Interval)		
T3 : 0.2640 S	(Channel Move Time)		


Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
 T1 denotes the data transmission time of 200ms from T0.
 T2 denotes the end of Channel Move Time.
 T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

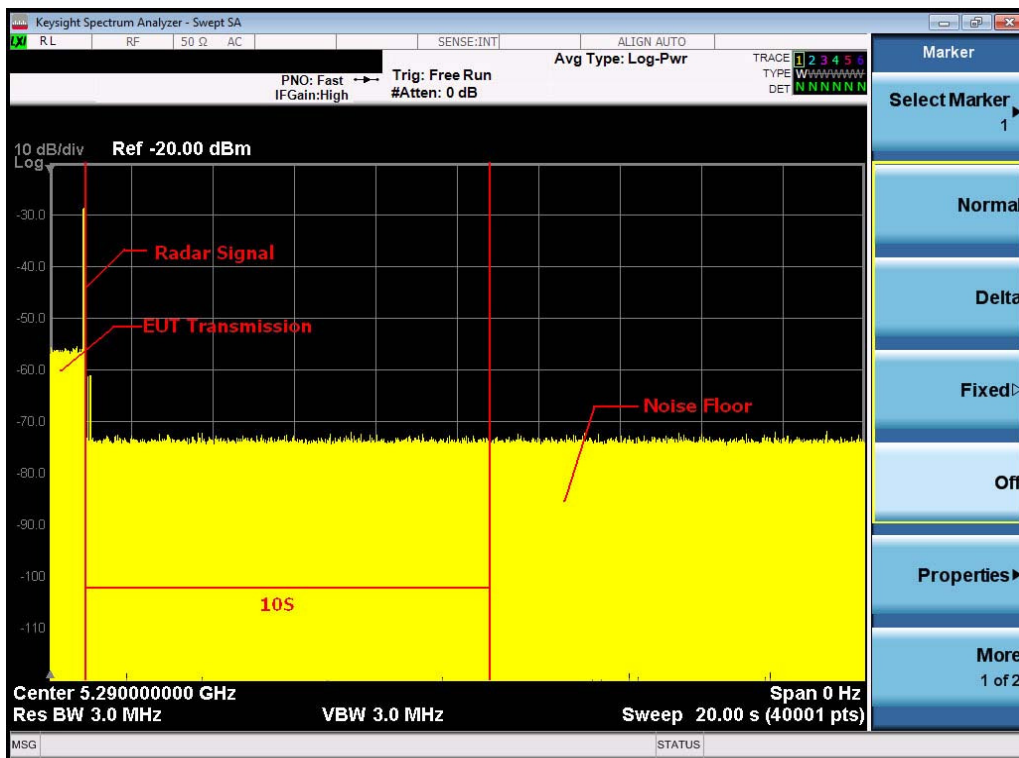

Note: An expanded plot for the device vacates the channel in the required 500ms


TX (11ac 80MHz+80MHz Mode) _5610MHz

Radar signal 0

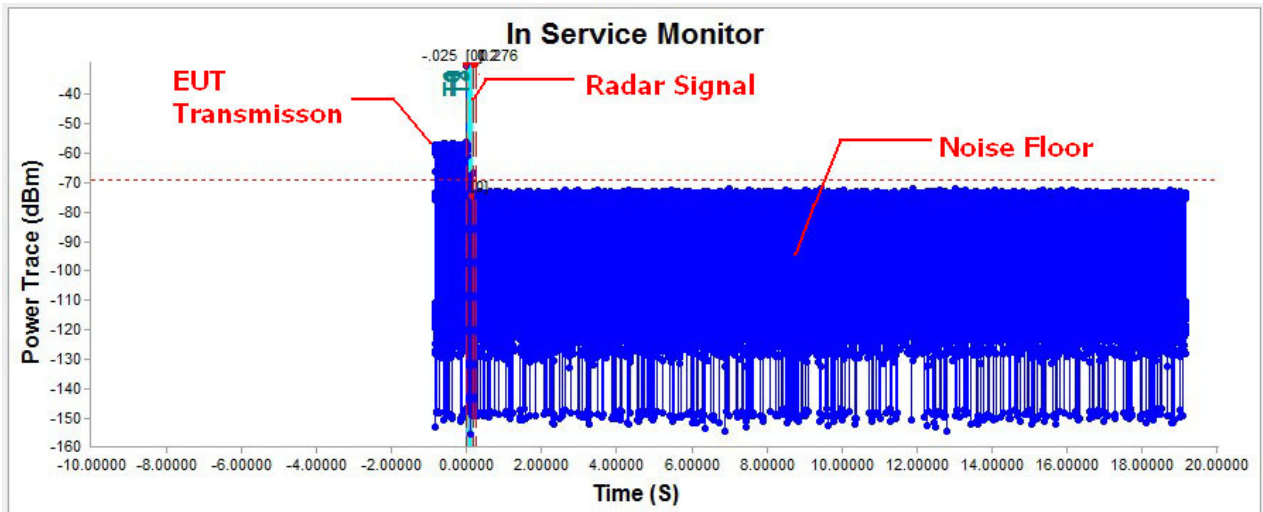

Time Index Info		
T0 : -0.0250 S (Radar Injection Start)	Time Per Bin: 0.4999875	Channel Move Time: 0.2759931 S
T1 : 0.0000 S (Radar Injection Stop)	T2~T3 Bins Over Threshold: = 0 Bins	Channel Close Time: 0.0 S
T2 : 0.2000 S (200msec Interval)		
T3 : 0.2760 S (Channel Move Time)		

Note: T0 denotes the start of Channel Move Time upon the end of the last Radar burst.
 T1 denotes the data transmission time of 200ms from T0.
 T2 denotes the end of Channel Move Time.
 T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

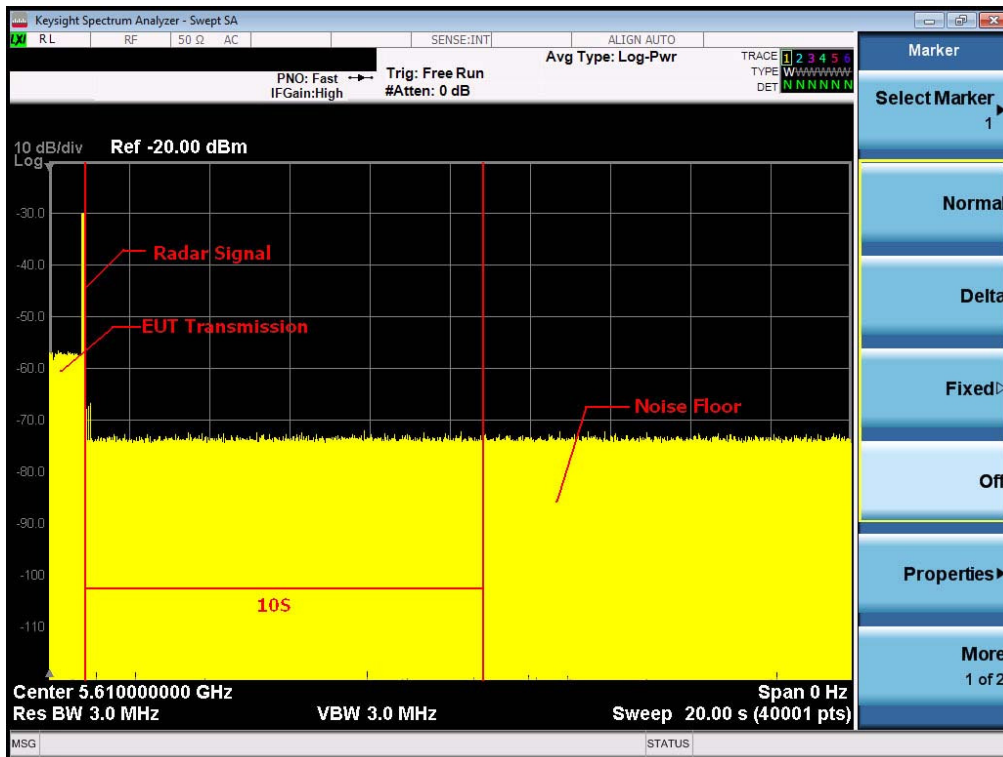

Note: An expanded plot for the device vacates the channel in the required 500ms

11a Mode		
	Measured Value	Limit
Channel Move Time	0.200995 s	10 s
Channel Close Time	0.0 s	0.26 s

11n 40MHz Mode		
	Measured Value	Limit
Channel Move Time	0.200995 s	10 s
Channel Close Time	0.0 s	0.26 s

11ac 80MHz Mode		
	Measured Value	Limit
Channel Move Time	0.2029949 s	10 s
Channel Close Time	0.0 s	0.26 s

11ac 80MHz+80MHz Mode_5290MHz		
	Measured Value	Limit
Channel Move Time	0.2639934 s	10 s
Channel Close Time	0.0 s	0.26 s

11ac 80MHz+80MHz Mode_5610MHz		
	Measured Value	Limit
Channel Move Time	0.2759931 s	10 s
Channel Close Time	0.0 s	0.26 s

TX (11a Mode)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \begin{array}{l} \left(\frac{1}{360} \right)^{\cdot} \\ \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \end{array} \right\}$	29	1	97
2	1-5	150-230	23-29	27	3	90
3	6-10	200-500	16-18	27	3	90
4	11-20	200-500	12-16	26	4	87
Aggregate (Radar Types 1-4)			-	109	11	91

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Pass times	Fail times	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	28	2	93

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	28	2	93

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type1	1	YES	16	YES
	2	YES	17	NO
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type2	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	NO
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	NO
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	NO
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type3	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	NO
	6	YES	21	NO
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	NO
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type4	1	YES	16	NO
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	NO
	8	YES	23	NO
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	NO	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type5	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	NO
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	NO
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type6	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	NO
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	NO
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

TX (11n 40MHz Mode)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a <hr/> Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right\}$	28	2	93
2	1-5	150-230	23-29	28	2	93
3	6-10	200-500	16-18	26	4	87
4	11-20	200-500	12-16	27	3	90
Aggregate (Radar Types 1-4)			-	109	11	91

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses Per Burst	Number of Bursts	Pass times	Fail times	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	28	2	93

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	26	4	87

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type1	1	YES	16	YES
	2	YES	17	NO
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	NO
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type2	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	NO
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	NO
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type3	1	YES	16	NO
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	NO	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	NO
	14	YES	29	NO
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type4	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	NO
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	NO
	9	YES	24	NO
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type5	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	NO
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	NO
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type6	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	NO
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	NO
	10	YES	25	NO
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	NO
	14	YES	29	YES
	15	YES	30	YES

TX (11ac 80MHz Mode)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a <hr/> Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right\}$	27	3	90
2	1-5	150-230	23-29	27	3	90
3	6-10	200-500	16-18	28	2	93
4	11-20	200-500	12-16	27	3	90
Aggregate (Radar Types 1-4)			-	106	109	91

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses Per Burst	Number of Bursts	Pass times	Fail times	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	27	3	90

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	27	3	90

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type1	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	NO
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	NO
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	NO	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type2	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	NO
	4	YES	19	NO
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	NO
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type3	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	NO
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	NO
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type4	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	NO
	4	YES	19	YES
	5	YES	20	NO
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	NO
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type5	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	NO
	6	YES	21	NO
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	NO
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type6	1	YES	16	YES
	2	YES	17	NO
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	NO
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	NO	28	YES
	14	YES	29	YES
	15	YES	30	YES

TX (11ac 80MHz+80MHz Mode)_5290MHz

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right\}$	26	4	87
2	1-5	150-230	23-29	27	3	90
3	6-10	200-500	16-18	26	4	87
4	11-20	200-500	12-16	25	5	83
Aggregate (Radar Types 1-4)			-	104	16	87

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Pass times	Fail times	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	27	3	90

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	27	3	90

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type1	1	YES	16	YES
	2	YES	17	NO
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	NO
	10	YES	25	YES
	11	YES	26	NO
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	NO	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type2	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	NO	25	YES
	11	NO	26	NO
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type3	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	NO
	7	NO	22	YES
	8	YES	23	YES
	9	NO	24	NO
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type4	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	NO
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	NO	26	NO
	12	YES	27	NO
	13	YES	28	YES
	14	NO	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type5	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	NO
	4	YES	19	NO
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	NO
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type6	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	NO
	6	YES	21	NO
	7	YES	22	YES
	8	NO	23	YES
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

TX (11ac 80MHz+80MHz Mode)_5610MHz

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a <hr/> Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right\}$	26	4	87
2	1-5	150-230	23-29	26	4	87
3	6-10	200-500	16-18	25	5	83
4	11-20	200-500	12-16	25	5	83
Aggregate (Radar Types 1-4)			-	102	18	85

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Pass times	Fail times	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	26	4	87

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	27	3	90

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type1	1	YES	16	YES
	2	YES	17	NO
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	NO
	9	YES	24	NO
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	NO	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type2	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	YES
	10	NO	25	NO
	11	YES	26	NO
	12	YES	27	YES
	13	YES	28	YES
	14	NO	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type3	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	NO
	6	YES	21	NO
	7	YES	22	YES
	8	YES	23	YES
	9	NO	24	NO
	10	YES	25	YES
	11	NO	26	YES
	12	YES	27	YES
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type4	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	YES
	6	YES	21	NO
	7	YES	22	YES
	8	YES	23	NO
	9	YES	24	YES
	10	NO	25	YES
	11	YES	26	YES
	12	YES	27	NO
	13	NO	28	YES
	14	YES	29	YES
	15	YES	30	YES


Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type5	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	NO
	5	YES	20	YES
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	NO
	9	YES	24	YES
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	YES
	13	YES	28	NO
	14	YES	29	NO
	15	YES	30	YES

Radar type	Trial #	Detection	Trial #	Detection
		YES / NO		YES / NO
Type6	1	YES	16	YES
	2	YES	17	YES
	3	YES	18	YES
	4	YES	19	YES
	5	YES	20	NO
	6	YES	21	YES
	7	YES	22	YES
	8	YES	23	YES
	9	YES	24	NO
	10	YES	25	YES
	11	YES	26	YES
	12	YES	27	NO
	13	YES	28	YES
	14	YES	29	YES
	15	YES	30	YES


6.7 NON- OCCUPANCY PERIOD

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.


5530 Non-Occupancy period

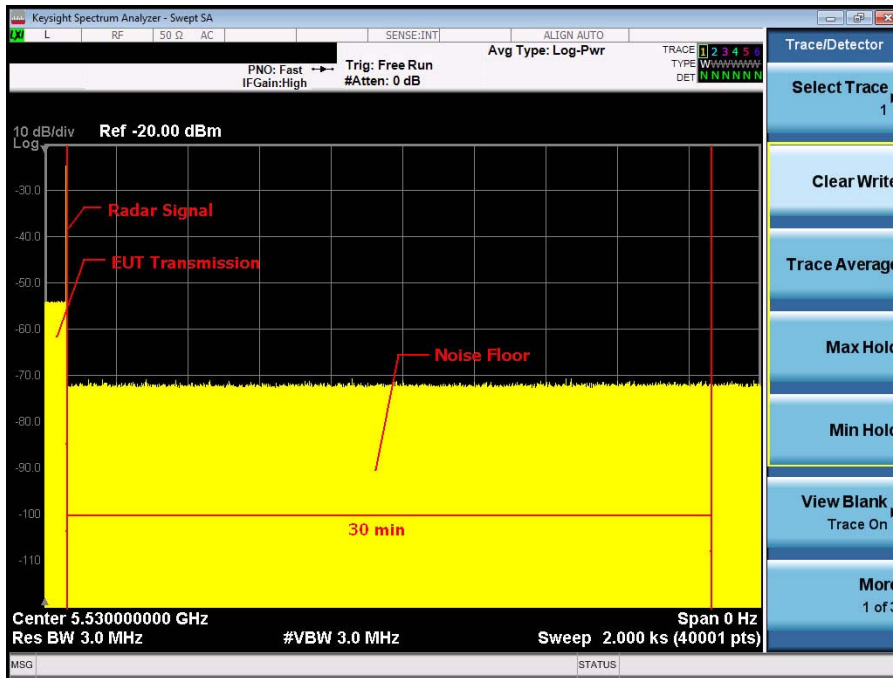


5540 Non-Occupancy period

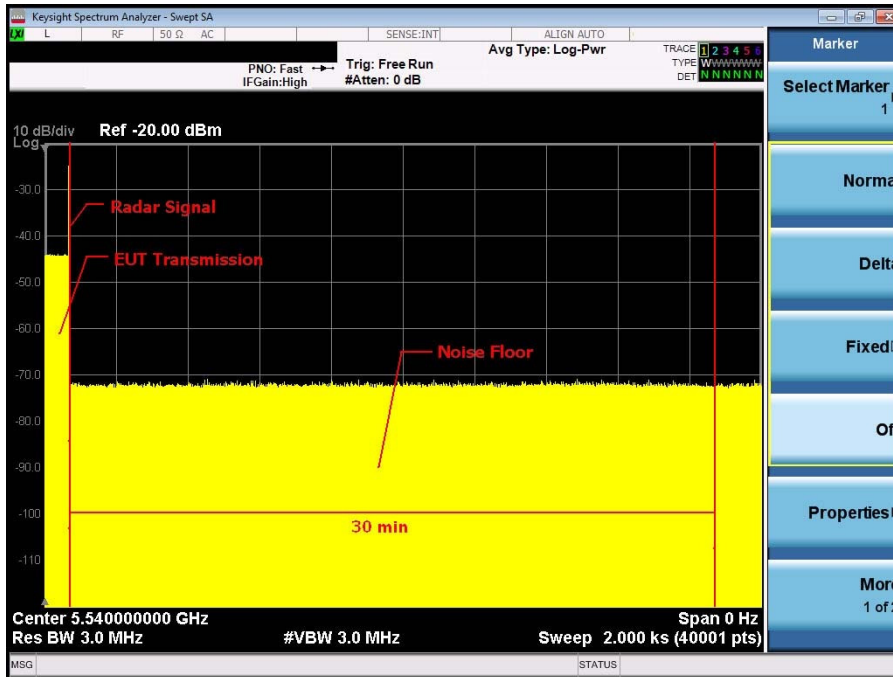


5290 Non-Occupancy period

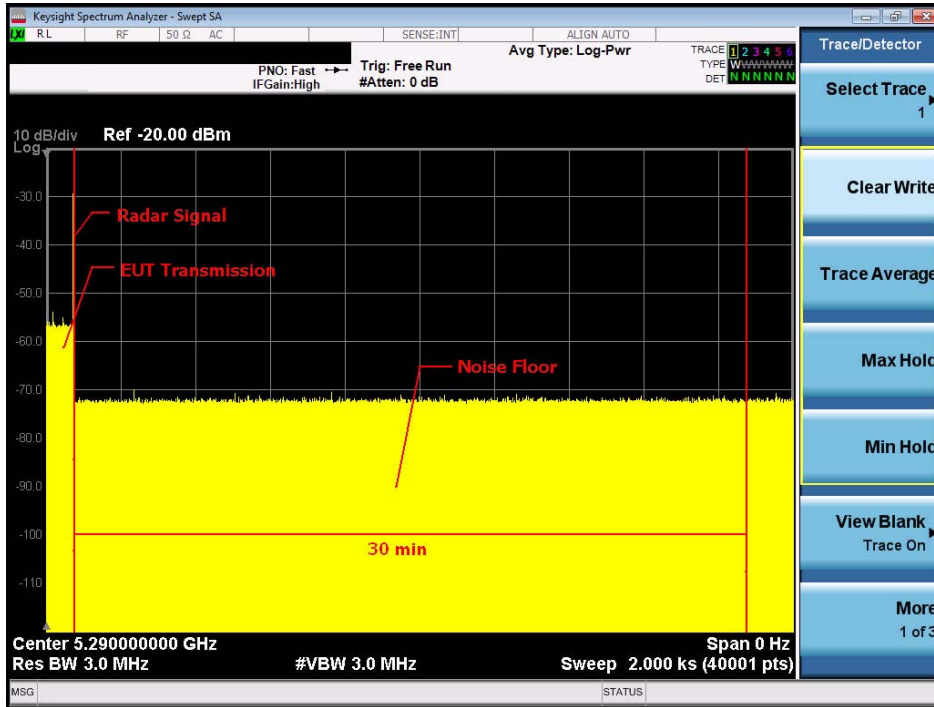

5550 Non-Occupancy period

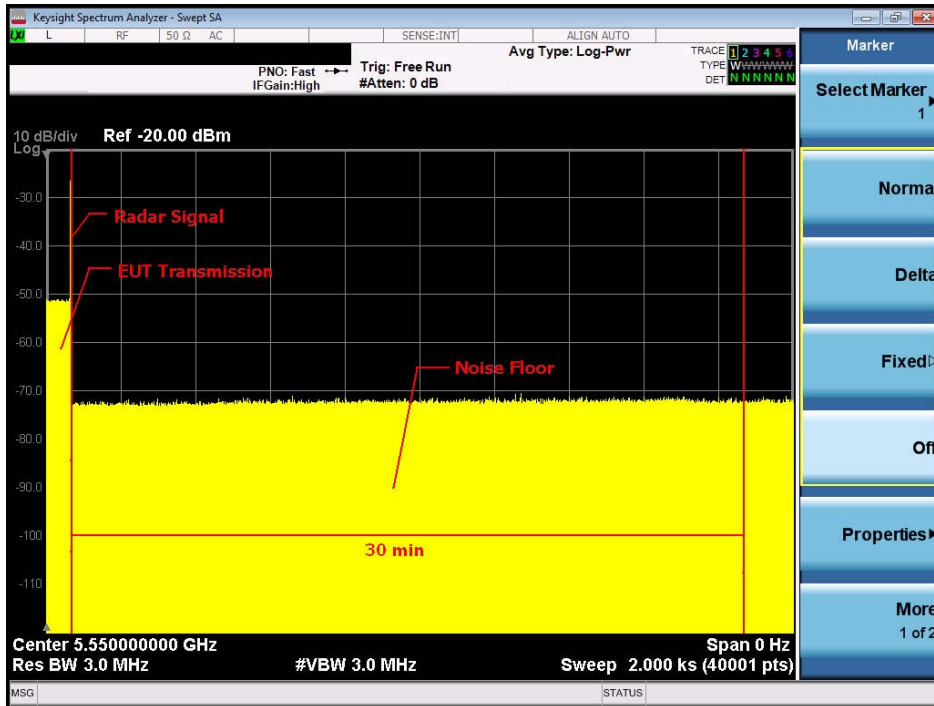

5610 Non-Occupancy period

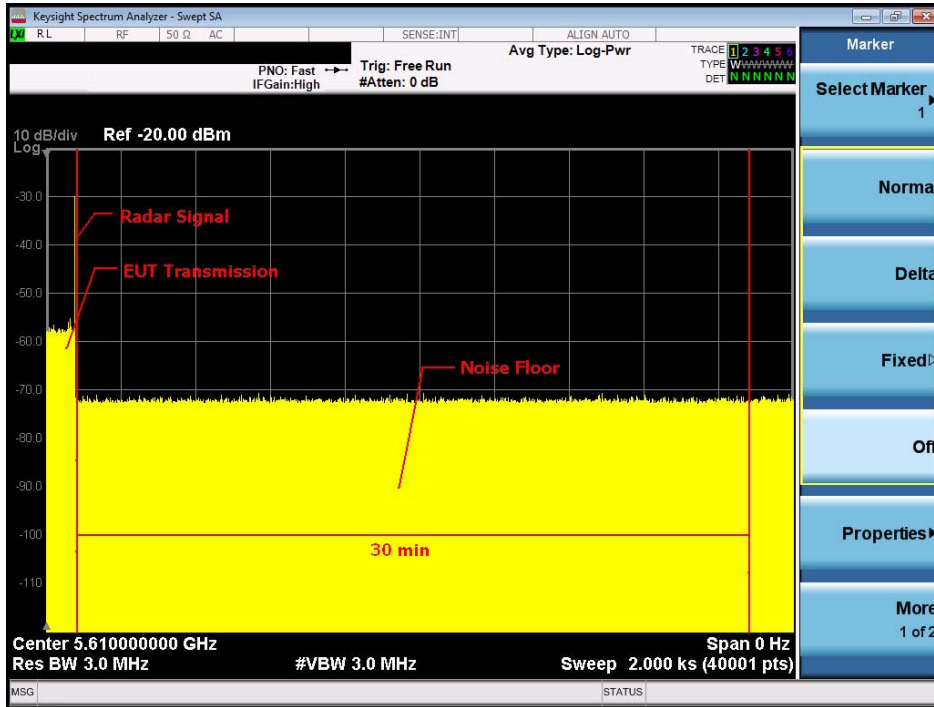


6.8 UNIFORM SPREADING

The intention of the uniform spreading is to provide, on aggregate, a uniform loading of the spectrum. The UUT using the bands 5250 to 5350MHz and 5470 to 5600 MHz channels so that the probability of selecting a given channel shall be the same for channels. The UUT will select channel by random mode and remember this channel when detect radar signal, so that will select unused channel by random mode.


6.9 U-NII DETECTION BANDWIDTH

TX (11a Mode) U-NII 99% Channel bandwidth

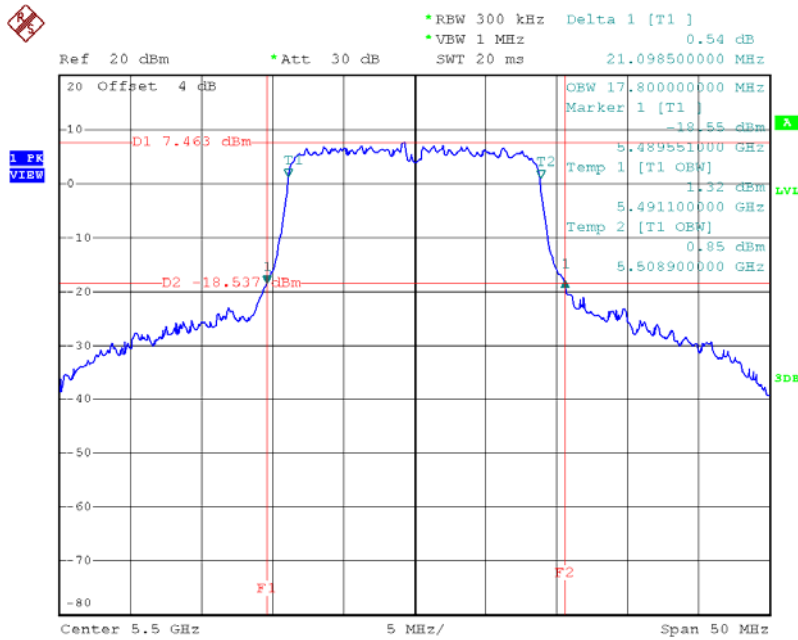


Date: 29.DEC.2016 11:29:17

TX (11n 40MHz Mode) U-NII 99% Channel bandwidth

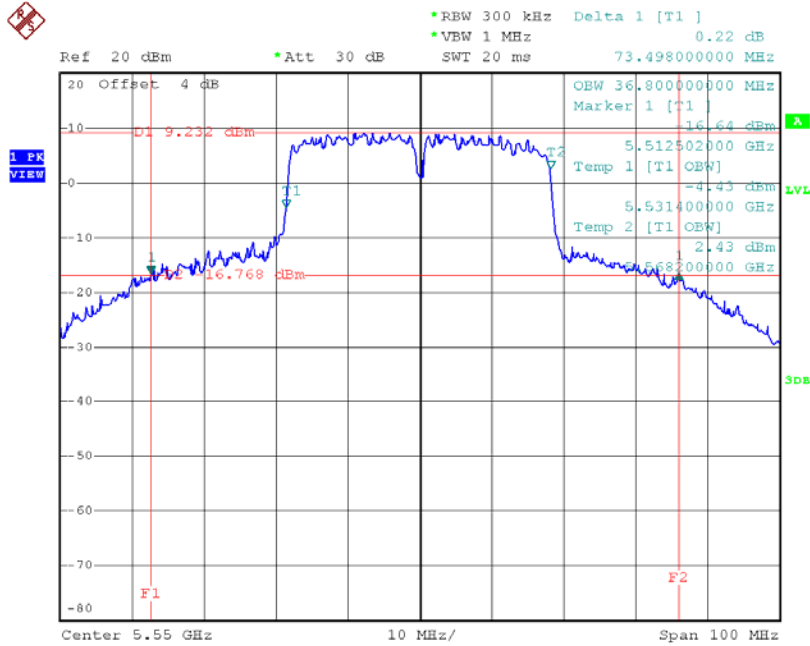


Date: 18.DEC.2016 18:20:02

TX (11ac 80MHz Mode) U-NII 99% Channel bandwidth

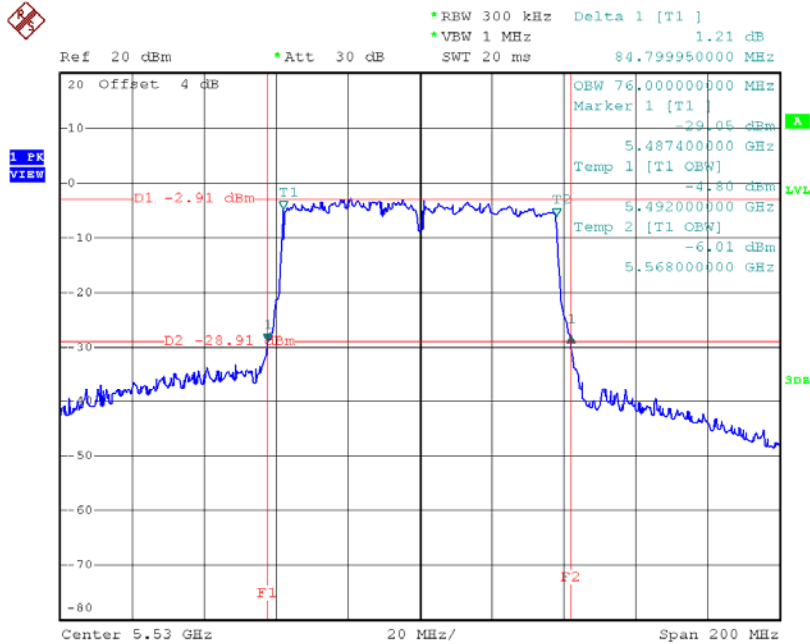


Date: 30.DEC.2016 18:26:57

TX (11ac 80MHz+80MHz Mode)
U-NII 99% Channel bandwidth_5290MHz

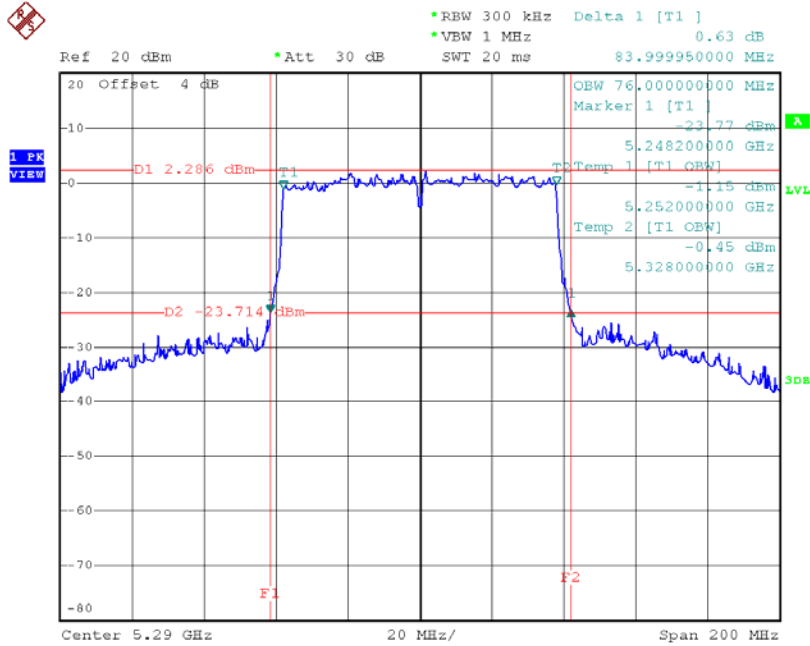

Date: 3.JAN.2017 13:32:11

U-NII 99% Channel bandwidth_5610MHz

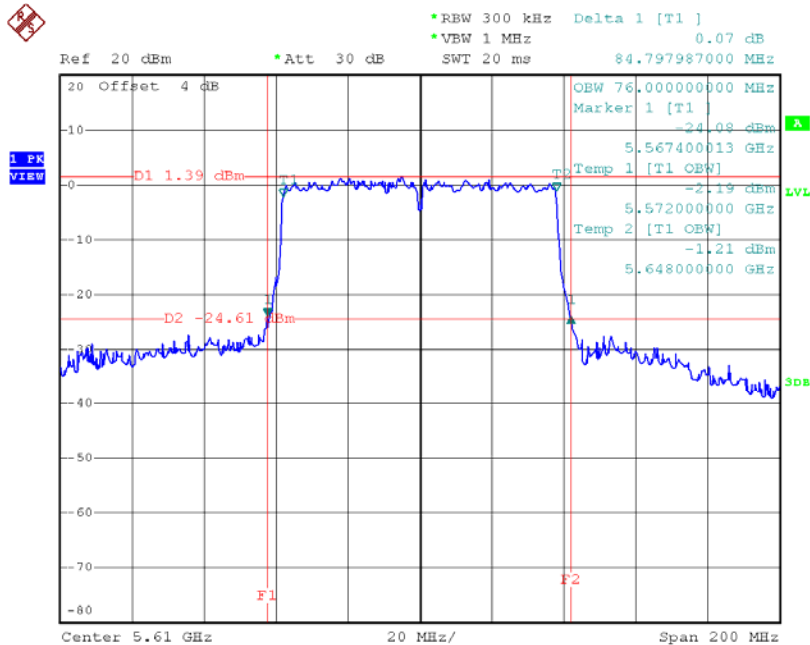

Date: 3.JAN.2017 13:41:50

11a Mode

Detection Bandwith test transmission A												
EUT FREQUENCY	5500M											
EUT power bandwith	17.8MHz											
Detection Bandwith limit(100%of EUT 99% Power bandwith)	17.8											
Detection Bandwith(5509(FH)-5491(FL))	18											
Test Result	PASS											
Radar Freq (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)	
	1	2	3	4	5	6	7	8	9	10		
5489	0	0	0	0	0	0	0	0	0	0	0	0
5490	1	1	0	1	0	0	1	1	0	1	1	60
5491(FL)	1	1	1	0	1	1	1	1	1	1	1	90
5492	1	1	1	1	1	1	1	1	1	1	1	100
5493	1	1	1	1	1	1	1	1	1	1	1	100
5494	1	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	1	100
5496	1	1	1	1	1	1	1	1	1	1	1	100
5497	1	1	1	1	1	1	1	1	1	1	1	100
5498	1	1	1	1	1	1	1	1	1	1	1	100
5499	1	1	1	1	1	1	1	1	1	1	1	100
5500	1	1	1	1	1	1	1	1	1	1	1	100
5501	1	1	1	1	1	1	1	1	1	1	1	100
5502	1	1	1	1	1	1	1	1	1	1	1	100
5503	1	1	1	1	1	1	1	1	1	1	1	100
5504	1	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	1	100
5506	1	1	1	1	1	1	1	1	1	1	1	100
5507	1	1	1	1	1	1	1	1	1	1	1	100
5508	1	1	1	1	1	1	1	1	1	1	1	100
5509(FH)	1	1	1	1	1	0	1	1	1	1	1	90
5510	1	1	0	1	0	1	0	1	0	0	0	50

11n 40MHz Mode

Detection Bandwith test transmission		40M										
EUT FREQUENCY		5550M										
EUT power bandwidth		36.2MHz										
Detection Bandwith limit(100%of EUT 99% Power bandwidth)		36.2										
Detection Bandwith(5569(FH)-5531(FL))		38										
Test Result	PASS											
	DFS Detection Trials (1=Detection, 0= No Detection)											
Radar Freq (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)	
5529	0	0	0	0	0	0	0	0	0	0	0	
5530	1	1	0	1	1	0	1	0	1	0	60	
5531(FL)	1	1	1	1	1	1	1	1	1	0	90	
5532	1	1	1	1	1	1	1	0	1	1	90	
5533	1	1	1	1	1	1	1	1	1	1	100	
5534	1	1	1	1	1	1	1	1	1	1	100	
5535	1	1	1	1	1	1	1	1	1	1	100	
5536	1	1	1	1	1	1	1	1	1	1	100	
5537	1	1	1	1	1	1	1	1	1	1	100	
5538	1	1	1	1	1	1	1	1	1	1	100	
5539	1	1	1	1	1	1	1	1	1	1	100	
5540	1	1	1	1	1	1	1	1	1	1	100	
5541	1	1	1	1	1	1	1	1	1	1	100	
5542	1	1	1	1	1	1	1	1	1	1	100	
5543	1	1	1	1	1	1	1	1	1	1	100	
5544	1	1	1	1	1	1	1	1	1	1	100	
5545	1	1	1	1	1	1	1	1	1	1	100	
5546	1	1	1	1	1	1	1	1	1	1	100	
5547	1	1	1	1	1	1	1	1	1	1	100	
5548	1	1	1	1	1	1	1	1	1	1	100	
5549	1	1	1	1	1	1	1	1	1	1	100	
5550	1	1	1	1	1	1	1	1	1	1	100	
5551	1	1	1	1	1	1	1	1	1	1	100	
5552	1	1	1	1	1	1	1	1	1	1	100	
5553	1	1	1	1	1	1	1	1	1	1	100	
5554	1	1	1	1	1	1	1	1	1	1	100	
5555	1	1	1	1	1	1	1	1	1	1	100	
5556	1	1	1	1	1	1	1	1	1	1	100	
5557	1	1	1	1	1	1	1	1	1	1	100	
5558	1	1	1	1	1	1	1	1	1	1	100	
5559	1	1	1	1	1	1	1	1	1	1	100	
5560	1	1	1	1	1	1	1	1	1	1	100	
5561	1	1	1	1	1	1	1	1	1	1	100	
5562	1	1	1	1	1	1	1	1	1	1	100	
5563	1	1	1	1	1	1	1	1	1	1	100	
5564	1	1	1	1	1	1	1	1	1	1	100	
5565	1	1	1	1	1	1	1	1	1	1	100	
5566	1	1	1	1	1	1	1	1	1	1	100	
5567	1	1	1	1	1	1	1	1	1	1	100	
5568	1	1	1	1	0	1	1	1	1	1	90	
5569(FH)	1	1	1	1	1	1	1	0	1	1	90	
5570	0	1	0	1	1	0	1	1	0	0	50	
5571	0	0	0	0	0	0	0	0	0	0	0	

11ac 80MHz Mode

Detection Bandwidth test transmission	80M										
EUT FREQUENCY	5530M										
EUT power bandwidth	76										
Detection Bandwidth limit(100%of EUT 99% Power bandwidth)	76										
Detection Bandwidth(5568(FH)-5492(FL))	76										
Test Result	PASS										
	DFS Detection Trials (1=Detection, 0= No Detection)										
Radar Freq (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5489	0	1	0	1	0	0	1	1	0	1	50
5490	1	1	1	0	1	0	1	0	1	0	60
5491	1	1	0	1	1	0	1	0	1	0	60
5492(FL)	1	1	1	1	1	1	1	1	1	1	100
5493	1	1	1	1	1	1	1	1	1	1	100
5494	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5496	1	1	1	1	1	1	1	1	1	1	100
5497	1	1	1	1	1	1	1	1	1	1	100
5498	1	1	1	1	1	1	1	1	1	1	100
5499	1	1	1	1	1	1	1	1	1	1	100
5500	1	1	1	1	1	1	1	1	1	1	100
5501	1	1	1	1	1	1	1	1	1	1	100
5502	1	1	1	1	1	1	1	1	1	1	100
5503	1	1	1	1	1	1	1	1	1	1	100
5504	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5506	1	1	1	1	1	1	1	1	1	1	100
5507	1	1	1	1	1	1	1	1	1	1	100
5508	1	1	1	1	1	1	1	1	1	1	100
5509	1	1	1	1	1	1	1	1	1	1	100
5510	1	1	1	1	1	1	1	1	1	1	100
5511	1	1	1	1	1	1	1	1	1	1	100
5512	1	1	1	1	1	1	1	1	1	1	100
5513	1	1	1	1	1	1	1	1	1	1	100
5514	1	1	1	1	1	1	1	1	1	1	100
5515	1	1	1	1	1	1	1	1	1	1	100
5516	1	1	1	1	1	1	1	1	1	1	100
5517	1	1	1	1	1	1	1	1	1	1	100
5518	1	1	1	1	1	1	1	1	1	1	100
5519	1	1	1	1	1	1	1	1	1	1	100
5520	1	1	1	1	1	1	1	1	1	1	100
5521	1	1	1	1	1	1	1	1	1	1	100
5522	1	1	1	1	1	1	1	1	1	1	100
5523	1	1	1	1	1	1	1	1	1	1	100
5524	1	1	1	1	1	1	1	1	1	1	100
5525	1	1	1	1	1	1	1	1	1	1	100
5526	1	1	1	1	1	1	1	1	1	1	100
5527	1	1	1	1	1	1	1	1	1	1	100
5528	1	1	1	1	1	1	1	1	1	1	100
5529	1	1	1	1	1	1	1	1	1	1	100
5530	1	1	1	1	1	1	1	1	1	1	100
5531	1	1	1	1	1	1	1	1	1	1	100
5532	1	1	1	1	1	1	1	1	1	1	100
5533	1	1	1	1	1	1	1	1	1	1	100
5534	1	1	1	1	1	1	1	1	1	1	100
5535	1	1	1	1	1	1	1	1	1	1	100
5536	1	1	1	1	1	1	1	1	1	1	100
5537	1	1	1	1	1	1	1	1	1	1	100
5538	1	1	1	1	1	1	1	1	1	1	100
5539	1	1	1	1	1	1	1	1	1	1	100
5540	1	1	1	1	1	1	1	1	1	1	100
5541	1	1	1	1	1	1	1	1	1	1	100
5542	1	1	1	1	1	1	1	1	1	1	100
5543	1	1	1	1	1	1	1	1	1	1	100
5544	1	1	1	1	1	1	1	1	1	1	100
5545	1	1	1	1	1	1	1	1	1	1	100
5546	1	1	1	1	1	1	1	1	1	1	100

5547	1	1	1	1	1	1	1	1	1	1	1	100
5548	1	1	1	1	1	1	1	1	1	1	1	100
5549	1	1	1	1	1	1	1	1	1	1	1	100
5550	1	1	1	1	1	1	1	1	1	1	1	100
5551	1	1	1	1	1	1	1	1	1	1	1	100
5552	1	1	1	1	1	1	1	1	1	1	1	100
5553	1	1	1	1	1	1	1	1	1	1	1	100
5554	1	1	1	1	1	1	1	1	1	1	1	100
5555	1	1	1	1	1	1	1	1	1	1	1	100
5556	1	1	1	1	1	1	1	1	1	1	1	100
5557	1	1	1	1	1	1	1	1	1	1	1	100
5558	1	1	1	1	1	1	1	1	1	1	1	100
5559	1	1	1	1	1	1	1	1	1	1	1	100
5560	1	1	1	1	1	1	1	1	1	1	1	100
5561	1	1	1	1	1	1	1	1	1	1	1	100
5562	1	1	1	1	1	1	1	1	1	1	1	100
5563	1	1	1	1	1	1	1	1	1	1	1	100
5564	1	1	1	1	1	1	1	1	1	1	1	100
5565	1	1	1	1	1	1	1	1	1	1	1	100
5566	1	1	1	1	1	1	1	1	1	1	1	100
5567	1	1	1	1	1	1	1	1	1	1	1	100
5568(FH)	1	1	1	1	1	1	1	0	1	1	1	90
5569	1	1	0	1	1	0	1	0	0	0	0	50
5570	1	1	0	1	0	0	1	0	1	0	0	50
5571	1	1	0	1	0	1	0	0	0	0	0	40

11ac 80MHz+80MHz Mode_5290MHz

Detection Bandwidth test transmission		AC80+80M									
EUT FREQUENCY		5290M									
EUT power bandwidth		76									
Detection Bandwidth limit(100%of EUT 99% Power bandwidth)		76									
Detection Bandwidth(5328(FH)-5252(FL))		76									
Test Result	PASS										
	DFS Detection Trials (1=Detection, 0= No Detection)										
Radar Freq (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5249	0	0	0	0	0	0	0	0	0	0	0
5250	1	0	1	0	1	0	1	0	1	0	50
5251	0	0	1	1	1	0	1	1	0	0	50
5252	1	1	1	1	0	1	1	1	1	1	90
5253	1	1	1	1	1	1	1	1	1	1	100
5254	1	1	1	1	1	1	1	1	1	1	100
5255	1	1	1	1	1	1	1	1	1	1	100
5256	1	1	1	1	1	1	1	1	1	1	100
5257	1	1	1	1	1	1	1	1	1	1	100
5258	1	1	1	1	1	1	1	1	1	1	100
5259	1	1	1	1	1	1	1	1	1	1	100
5260	1	1	1	1	1	1	1	1	1	1	100
5261	1	1	1	1	1	1	1	1	1	1	100
5262	1	1	1	1	1	1	1	1	1	1	100
5263	1	1	1	1	1	1	1	1	1	1	100
5264	1	1	1	1	1	1	1	1	1	1	100
5265	1	1	1	1	1	1	1	1	1	1	100
5266	1	1	1	1	1	1	1	1	1	1	100
5267	1	1	1	1	1	1	1	1	1	1	100
5268	1	1	1	1	1	1	1	1	1	1	100
5269	1	1	1	1	1	1	1	1	1	1	100
5270	1	1	1	1	1	1	1	1	1	1	100
5271	1	1	1	1	1	1	1	1	1	1	100
5272	1	1	1	1	1	1	1	1	1	1	100
5273	1	1	1	1	1	1	1	1	1	1	100
5274	1	1	1	1	1	1	1	1	1	1	100
5275	1	1	1	1	1	1	1	1	1	1	100
5276	1	1	1	1	1	1	1	1	1	1	100
5277	1	1	1	1	1	1	1	1	1	1	100
5278	1	1	1	1	1	1	1	1	1	1	100
5279	1	1	1	1	1	1	1	1	1	1	100
5280	1	1	1	1	1	1	1	1	1	1	100
5281	1	1	1	1	1	1	1	1	1	1	100
5282	1	1	1	1	1	1	1	1	1	1	100
5283	1	1	1	1	1	1	1	1	1	1	100
5284	1	1	1	1	1	1	1	1	1	1	100
5285	1	1	1	1	1	1	1	1	1	1	100
5286	1	1	1	1	1	1	1	1	1	1	100
5287	1	1	1	1	1	1	1	1	1	1	100
5288	1	1	1	1	1	1	1	1	1	1	100
5289	1	1	1	1	1	1	1	1	1	1	100
5290	1	1	1	1	1	1	1	1	1	1	100
5291	1	1	1	1	1	1	1	1	1	1	100
5292	1	1	1	1	1	1	1	1	1	1	100
5293	1	1	1	1	1	1	1	1	1	1	100
5294	1	1	1	1	1	1	1	1	1	1	100
5295	1	1	1	1	1	1	1	1	1	1	100
5296	1	1	1	1	1	1	1	1	1	1	100
5297	1	1	1	1	1	1	1	1	1	1	100
5298	1	1	1	1	1	1	1	1	1	1	100
5299	1	1	1	1	1	1	1	1	1	1	100
5300	1	1	1	1	1	1	1	1	1	1	100
5301	1	1	1	1	1	1	1	1	1	1	100
5302	1	1	1	1	1	1	1	1	1	1	100
5303	1	1	1	1	1	1	1	1	1	1	100
5304	1	1	1	1	1	1	1	1	1	1	100
5305	1	1	1	1	1	1	1	1	1	1	100
5306	1	1	1	1	1	1	1	1	1	1	100

5307	1	1	1	1	1	1	1	1	1	1	1	100
5308	1	1	1	1	1	1	1	1	1	1	1	100
5309	1	1	1	1	1	1	1	1	1	1	1	100
5310	1	1	1	1	1	1	1	1	1	1	1	100
5311	1	1	1	1	1	1	1	1	1	1	1	100
5312	1	1	1	1	1	1	1	1	1	1	1	100
5313	1	1	1	1	1	1	1	1	1	1	1	100
5314	1	1	1	1	1	1	1	1	1	1	1	100
5315	1	1	1	1	1	1	1	1	1	1	1	100
5316	1	1	1	1	1	1	1	1	1	1	1	100
5317	1	1	1	1	1	1	1	1	1	1	1	100
5318	1	1	1	1	1	1	1	1	1	1	1	100
5319	1	1	1	1	1	1	1	1	1	1	1	100
5320	1	1	1	1	1	1	1	1	1	1	1	100
5321	1	1	1	1	1	1	1	1	1	1	1	100
5322	1	1	1	1	1	1	1	1	1	1	1	100
5323	1	1	1	1	1	1	1	1	1	1	1	100
5324	1	1	1	1	1	1	1	1	1	1	1	100
5325	1	1	1	1	1	1	1	1	1	1	1	100
5326	1	1	1	1	1	1	1	1	1	1	1	100
5327	1	1	1	1	1	1	1	1	1	1	1	100
5328	1	1	1	0	1	1	1	1	1	1	1	90
5329	0	1	0	0	1	1	1	0	1	1	1	60
5330	1	0	1	1	0	0	1	0	1	0	0	50
5331	0	0	0	0	0	0	0	0	0	0	0	0

11ac 80MHz +80MHzMode_5610MHz

Detection Bandwith test tranmission		AC80+80M										
EUT FREQUENCY		5610M										
EUT power bandwith		76										
Detection Bandwith limit(100%of EUT 99% Power bandwith)		76										
Detection Bandwith(5648(FH)-5572(FL))		76										
Test Result		PASS										
		DFS Detection Trials (1=Detection, 0= No Detection)										
Radar Freq (MHz)		1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5569		0	0	0	0	0	0	0	0	0	0	0
5570		1	0	0	1	0	0	1	1	1	0	50
5571		1	0	1	1	0	0	1	1	0	0	50
5572		1	1	1	1	1	1	1	1	1	1	100
5573		1	1	1	1	1	1	1	1	1	1	100
5574		1	1	1	1	1	1	1	1	1	1	100
5575		1	1	1	1	1	1	1	1	1	1	100
5576		1	1	1	1	1	1	1	1	1	1	100
5577		1	1	1	1	1	1	1	1	1	1	100
5578		1	1	1	1	1	1	1	1	1	1	100
5579		1	1	1	1	1	1	1	1	1	1	100
5580		1	1	1	1	1	1	1	1	1	1	100
5581		1	1	1	1	1	1	1	1	1	1	100
5582		1	1	1	1	1	1	1	1	1	1	100
5583		1	1	1	1	1	1	1	1	1	1	100
5584		1	1	1	1	1	1	1	1	1	1	100
5585		1	1	1	1	1	1	1	1	1	1	100
5586		1	1	1	1	1	1	1	1	1	1	100
5587		1	1	1	1	1	1	1	1	1	1	100
5588		1	1	1	1	1	1	1	1	1	1	100
5589		1	1	1	1	1	1	1	1	1	1	100
5590		1	1	1	1	1	1	1	1	1	1	100
5591		1	1	1	1	1	1	1	1	1	1	100
5592		1	1	1	1	1	1	1	1	1	1	100
5593		1	1	1	1	1	1	1	1	1	1	100
5594		1	1	1	1	1	1	1	1	1	1	100
5595		1	1	1	1	1	1	1	1	1	1	100
5596		1	1	1	1	1	1	1	1	1	1	100
5597		1	1	1	1	1	1	1	1	1	1	100
5598		1	1	1	1	1	1	1	1	1	1	100
5599		1	1	1	1	1	1	1	1	1	1	100
5600		1	1	1	1	1	1	1	1	1	1	100
5601		1	1	1	1	1	1	1	1	1	1	100
5602		1	1	1	1	1	1	1	1	1	1	100
5603		1	1	1	1	1	1	1	1	1	1	100
5604		1	1	1	1	1	1	1	1	1	1	100
5605		1	1	1	1	1	1	1	1	1	1	100
5606		1	1	1	1	1	1	1	1	1	1	100
5607		1	1	1	1	1	1	1	1	1	1	100
5608		1	1	1	1	1	1	1	1	1	1	100
5609		1	1	1	1	1	1	1	1	1	1	100
5610		1	1	1	1	1	1	1	1	1	1	100
5611		1	1	1	1	1	1	1	1	1	1	100
5612		1	1	1	1	1	1	1	1	1	1	100
5613		1	1	1	1	1	1	1	1	1	1	100
5614		1	1	1	1	1	1	1	1	1	1	100
5615		1	1	1	1	1	1	1	1	1	1	100
5616		1	1	1	1	1	1	1	1	1	1	100
5617		1	1	1	1	1	1	1	1	1	1	100
5618		1	1	1	1	1	1	1	1	1	1	100
5619		1	1	1	1	1	1	1	1	1	1	100
5620		1	1	1	1	1	1	1	1	1	1	100
5621		1	1	1	1	1	1	1	1	1	1	100
5622		1	1	1	1	1	1	1	1	1	1	100
5623		1	1	1	1	1	1	1	1	1	1	100
5624		1	1	1	1	1	1	1	1	1	1	100
5625		1	1	1	1	1	1	1	1	1	1	100
5626		1	1	1	1	1	1	1	1	1	1	100

5627	1	1	1	1	1	1	1	1	1	1	1	100
5628	1	1	1	1	1	1	1	1	1	1	1	100
5629	1	1	1	1	1	1	1	1	1	1	1	100
5630	1	1	1	1	1	1	1	1	1	1	1	100
5631	1	1	1	1	1	1	1	1	1	1	1	100
5632	1	1	1	1	1	1	1	1	1	1	1	100
5633	1	1	1	1	1	1	1	1	1	1	1	100
5634	1	1	1	1	1	1	1	1	1	1	1	100
5635	1	1	1	1	1	1	1	1	1	1	1	100
5636	1	1	1	1	1	1	1	1	1	1	1	100
5637	1	1	1	1	1	1	1	1	1	1	1	100
5638	1	1	1	1	1	1	1	1	1	1	1	100
5639	1	1	1	1	1	1	1	1	1	1	1	100
5640	1	1	1	1	1	1	1	1	1	1	1	100
5641	1	1	1	1	1	1	1	1	1	1	1	100
5642	1	1	1	1	1	1	1	1	1	1	1	100
5643	1	1	1	1	1	1	1	1	1	1	1	100
5644	1	1	1	1	1	1	1	1	1	1	1	100
5645	1	1	1	1	1	1	1	1	1	1	1	100
5646	1	1	1	1	1	1	1	1	1	1	1	100
5647	1	1	1	1	1	1	1	1	1	1	1	100
5648	1	1	1	1	1	1	1	1	1	0	1	90
5649	1	0	1	0	0	1	0	1	1	0	0	50
5650	0	1	1	1	0	0	1	0	1	0	0	50
5651	0	0	0	0	0	0	0	0	0	0	0	0

7. EUT TEST PHOTO

