





2.41 11N40m\_M@Ant 1


Pref:




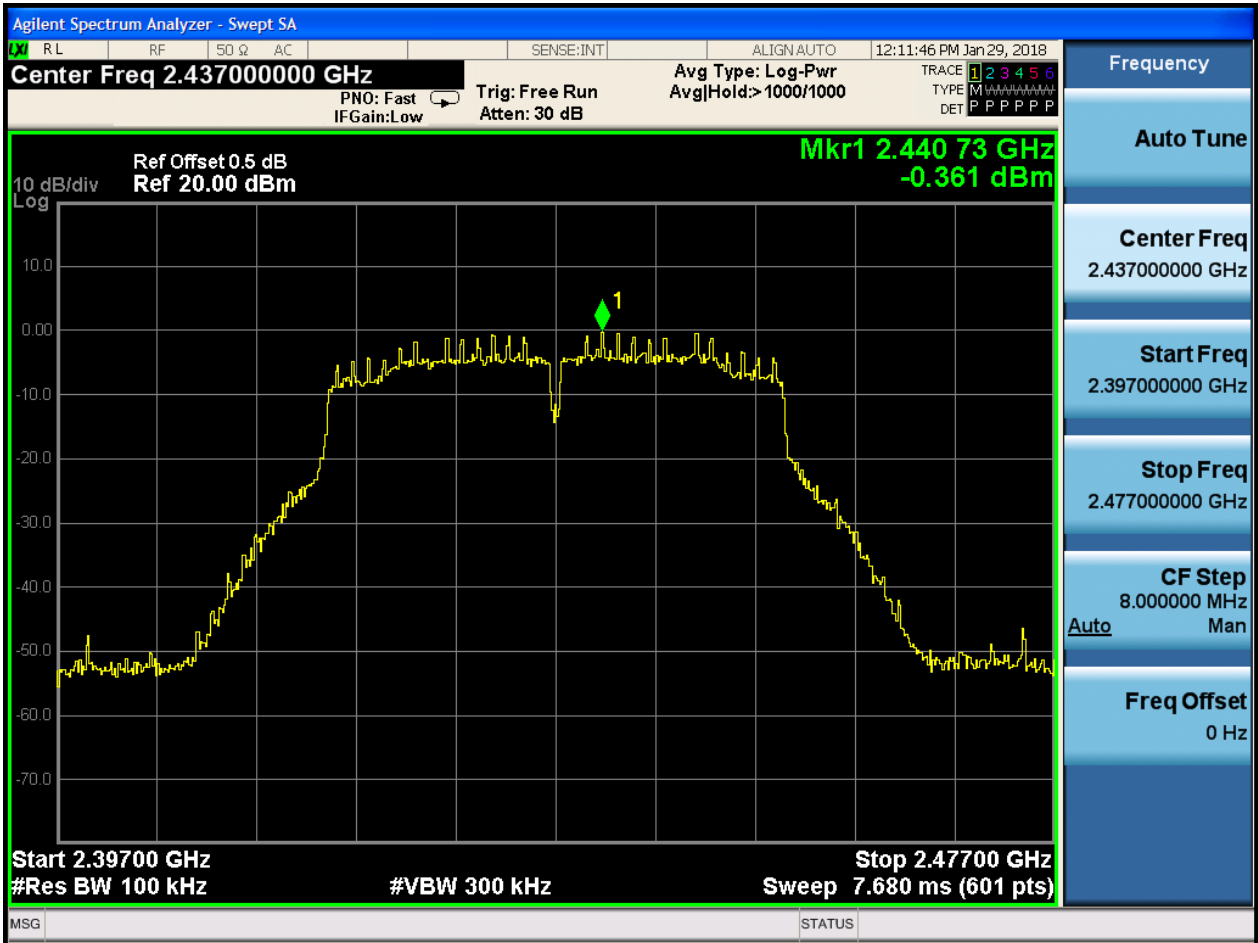



Puw:

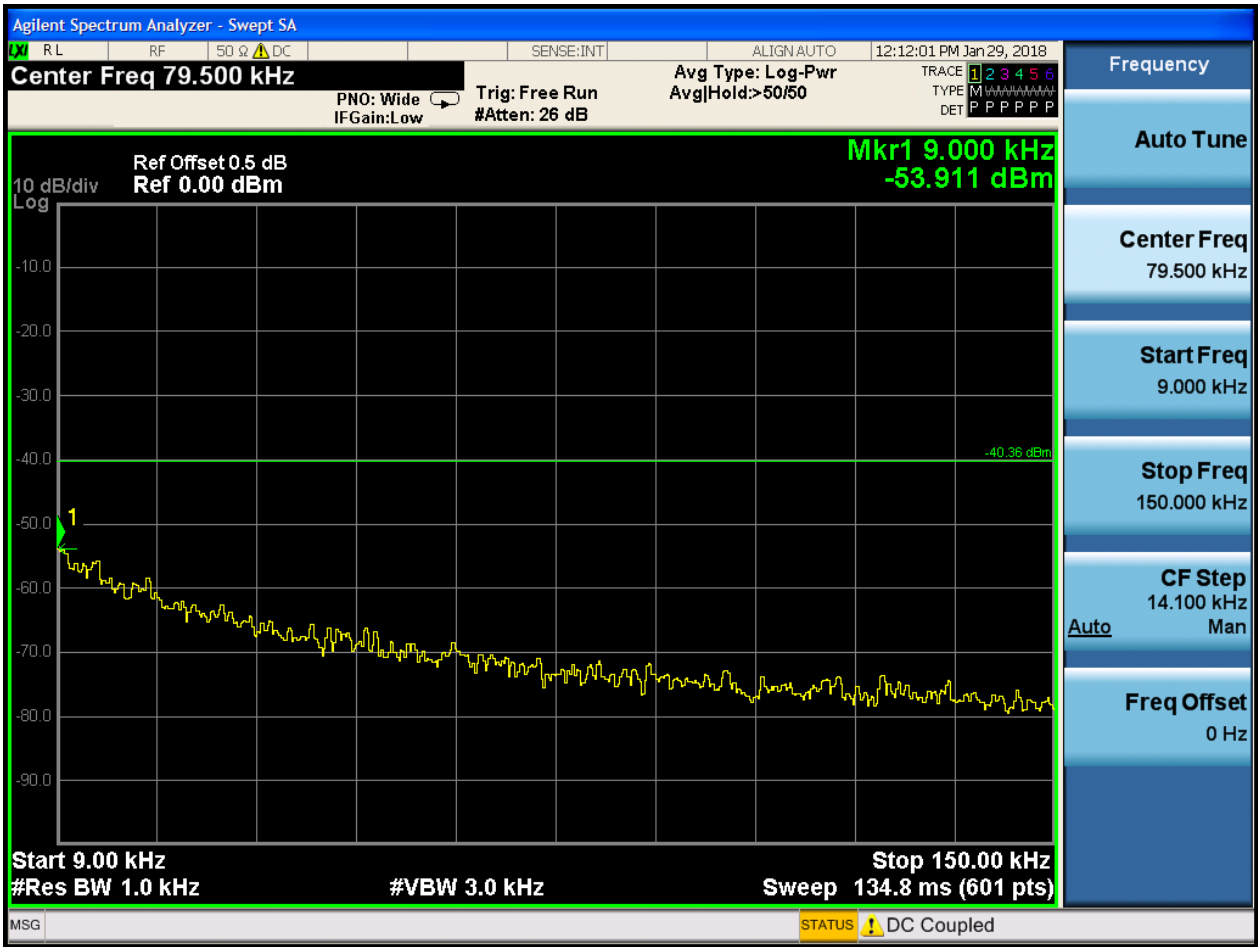

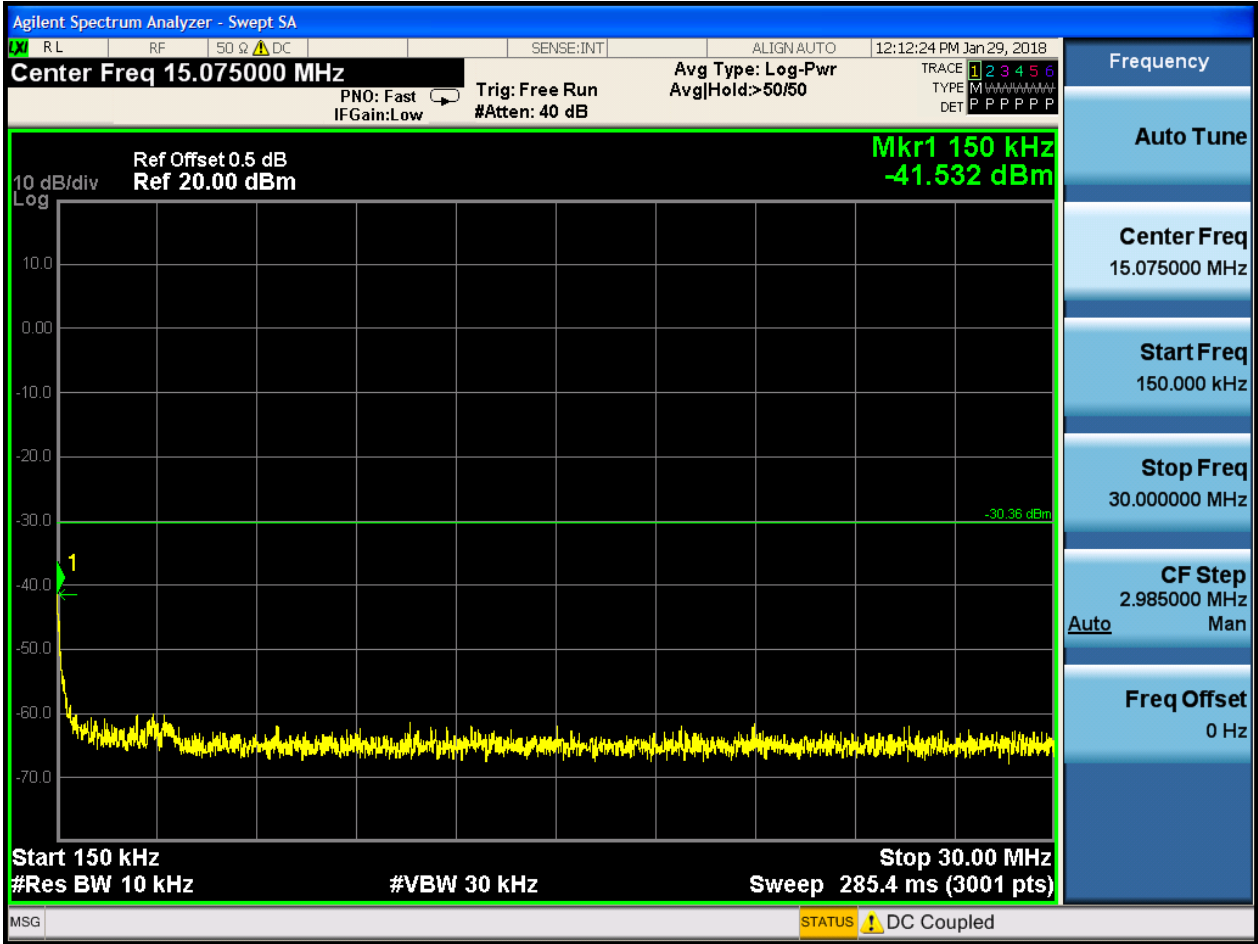


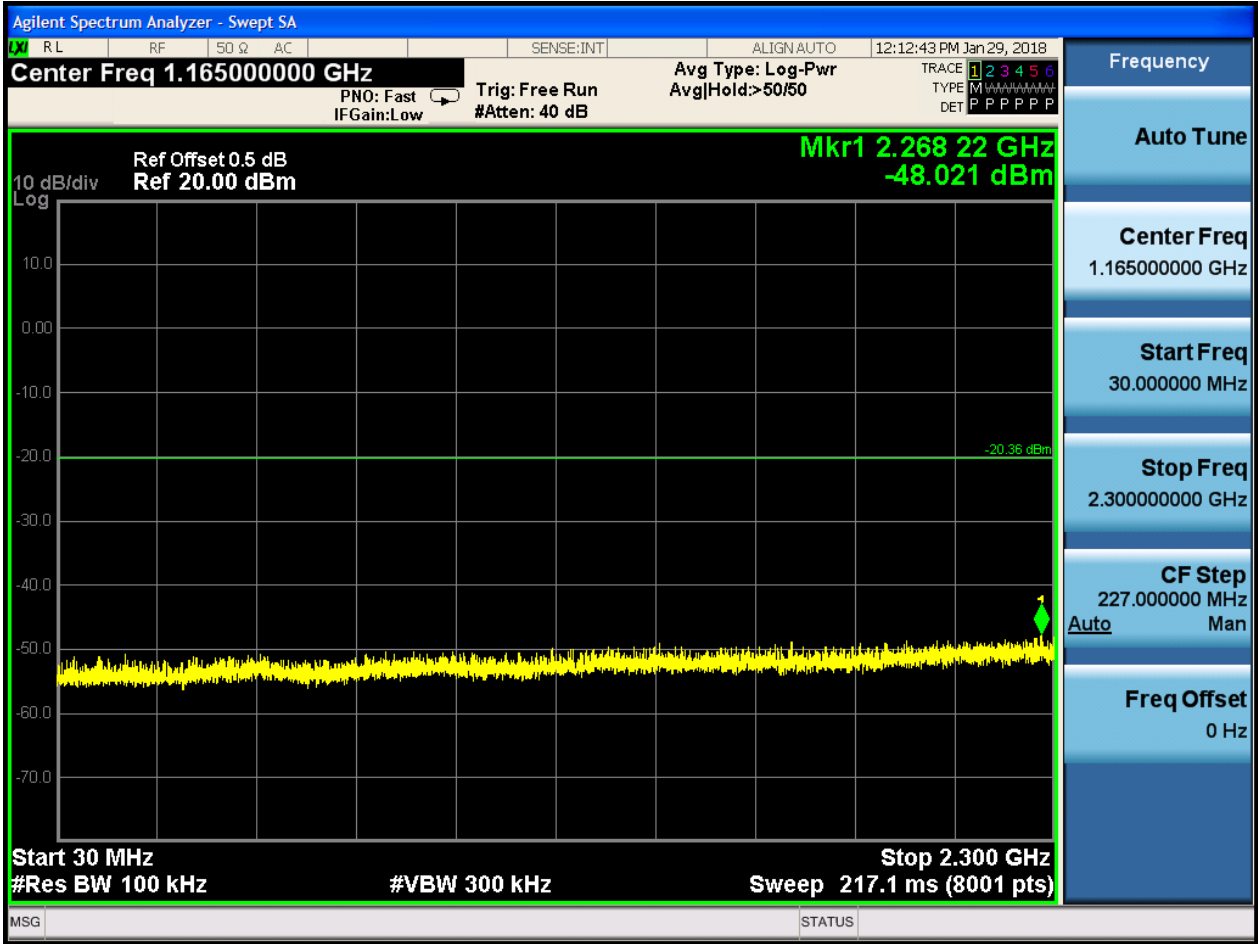

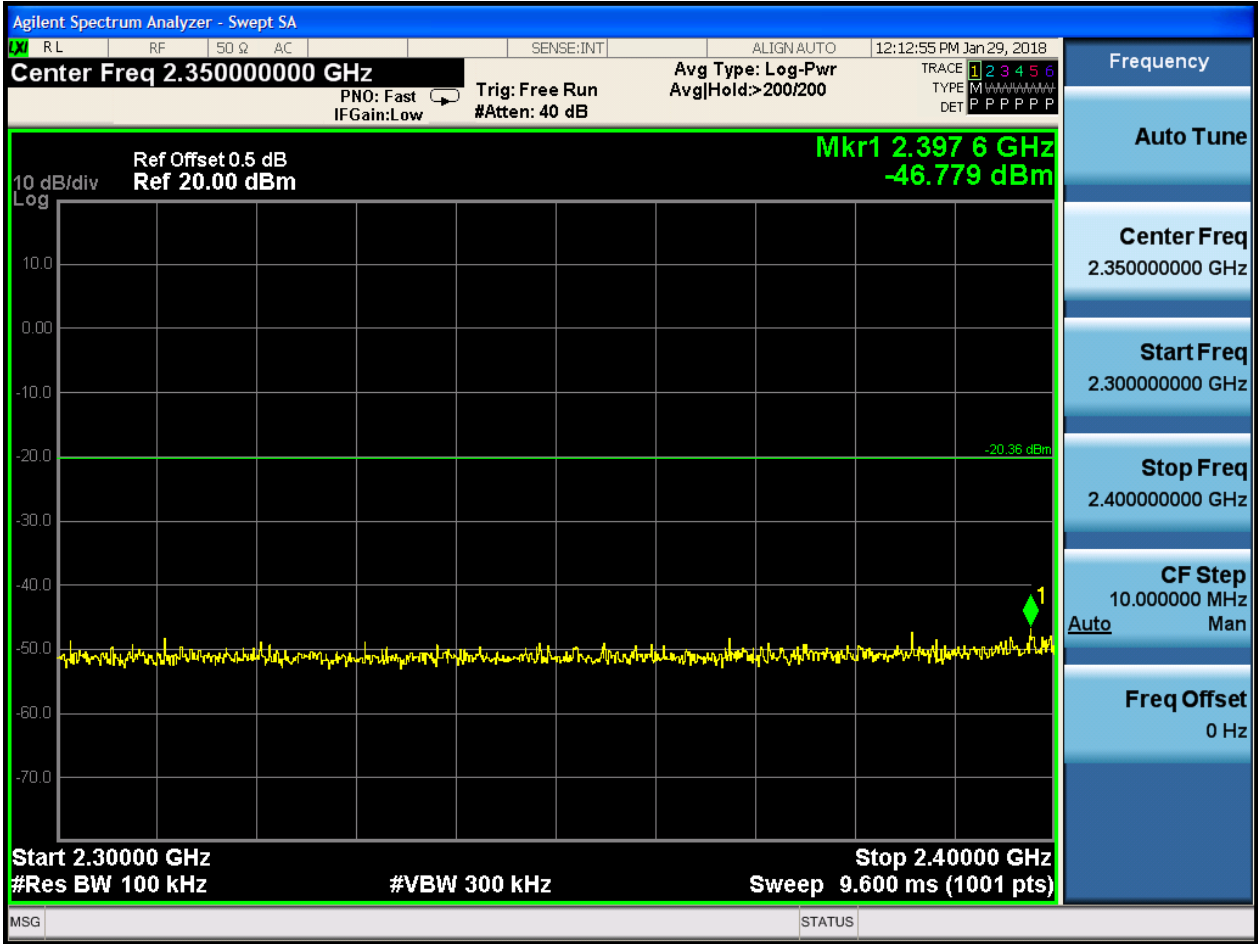

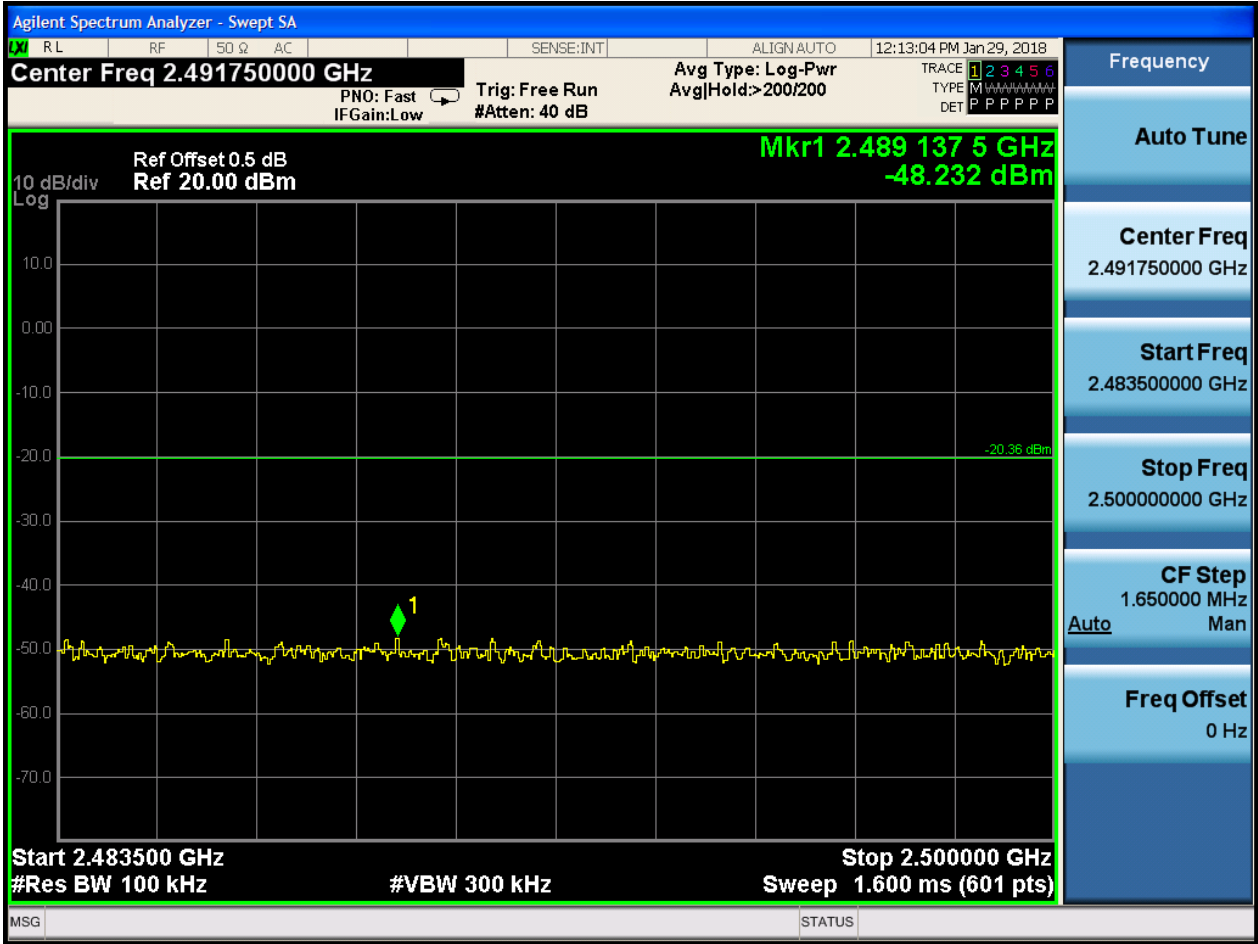



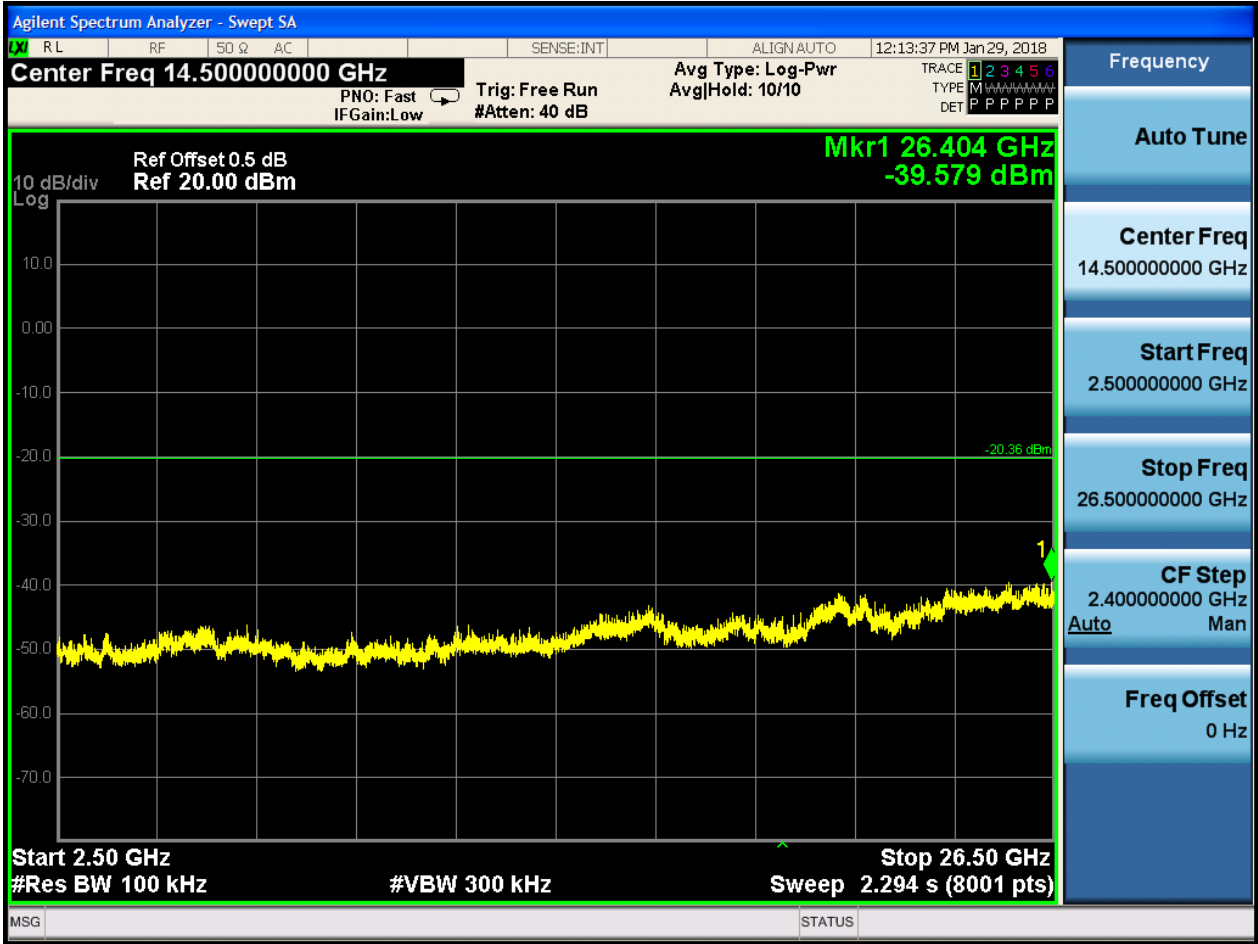



2.42 11N40m\_M@Ant 2


Pref:







Puw:



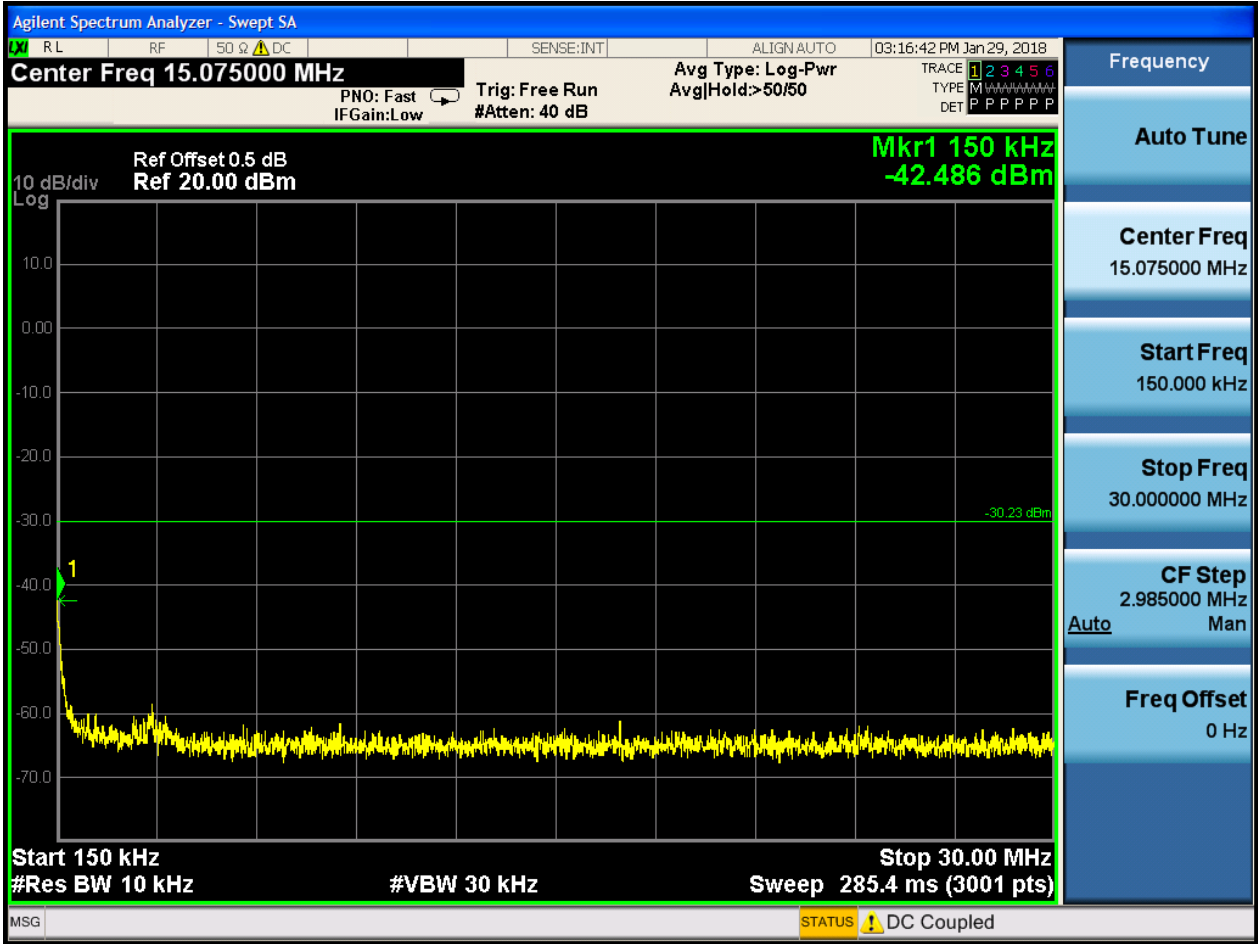



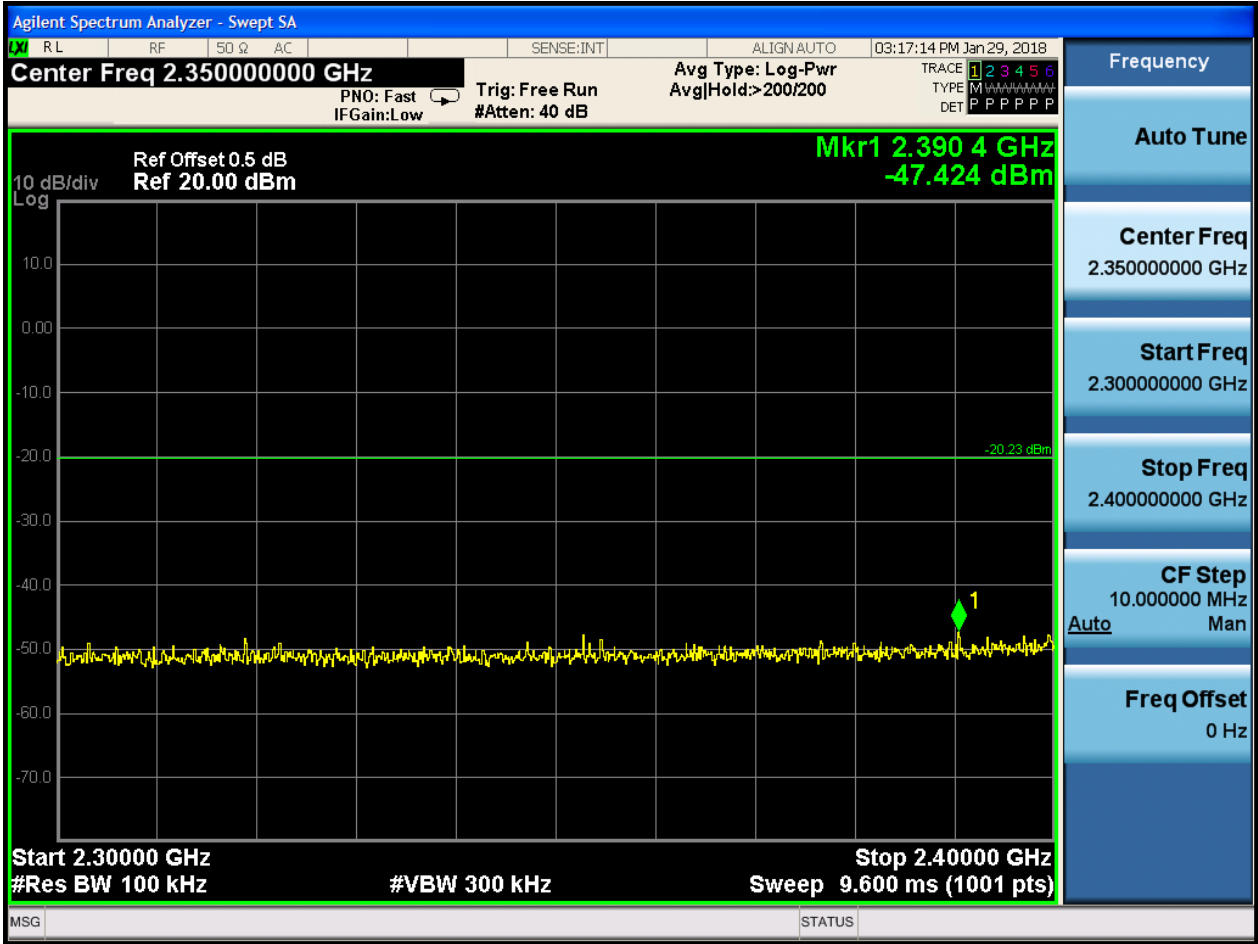

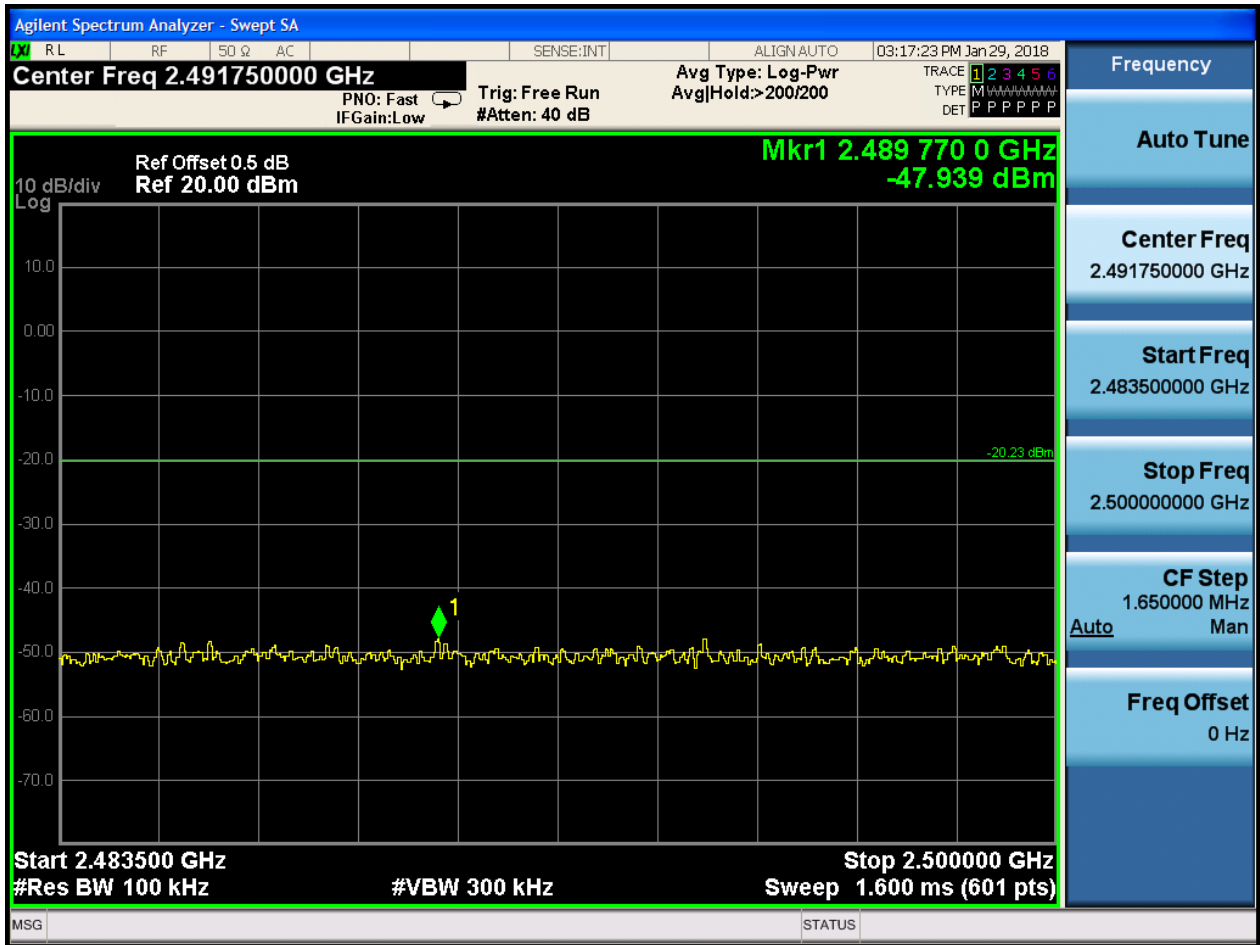







2.43 11N40m\_H@Ant 1


Pref:








P<sub>uw</sub>:




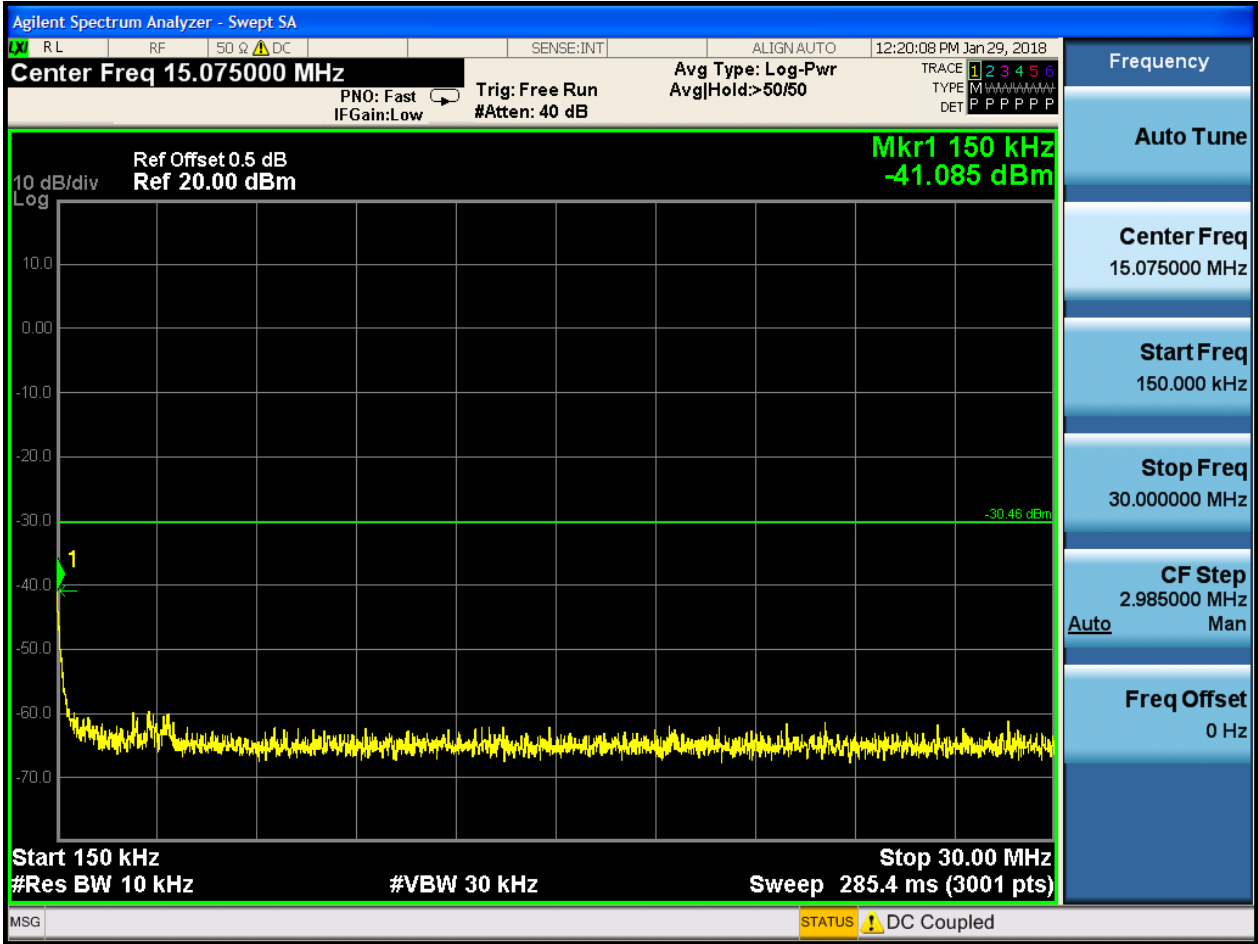

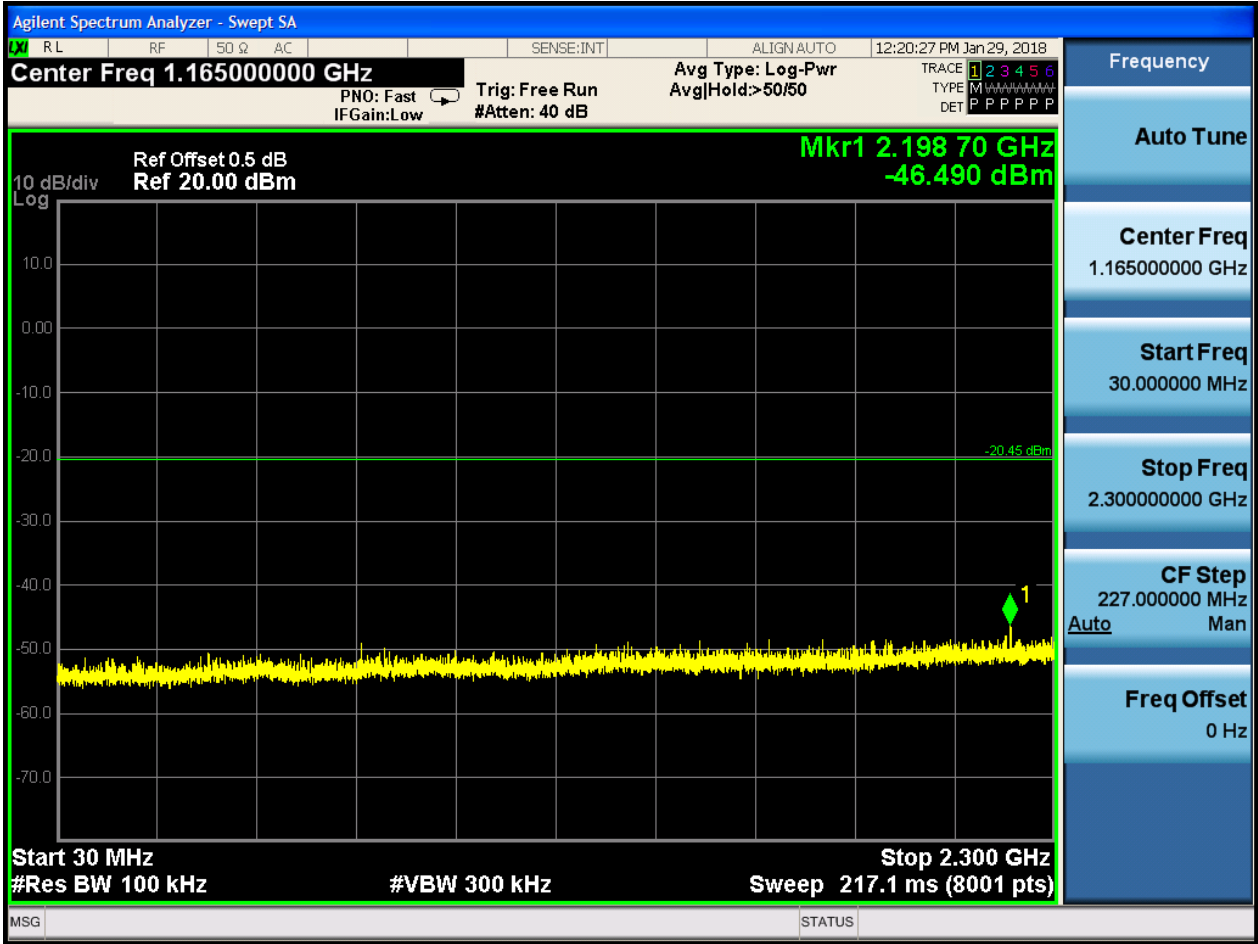

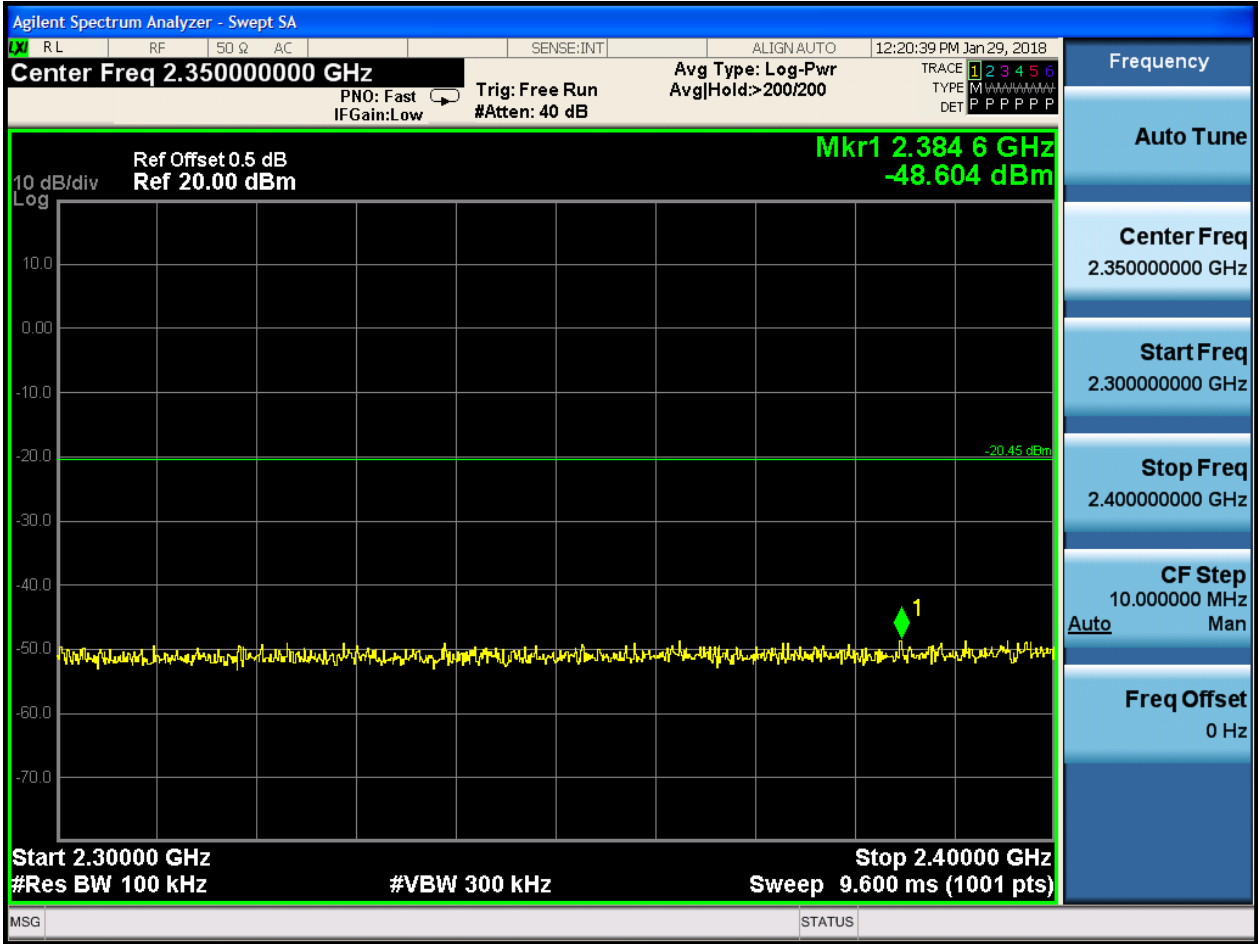

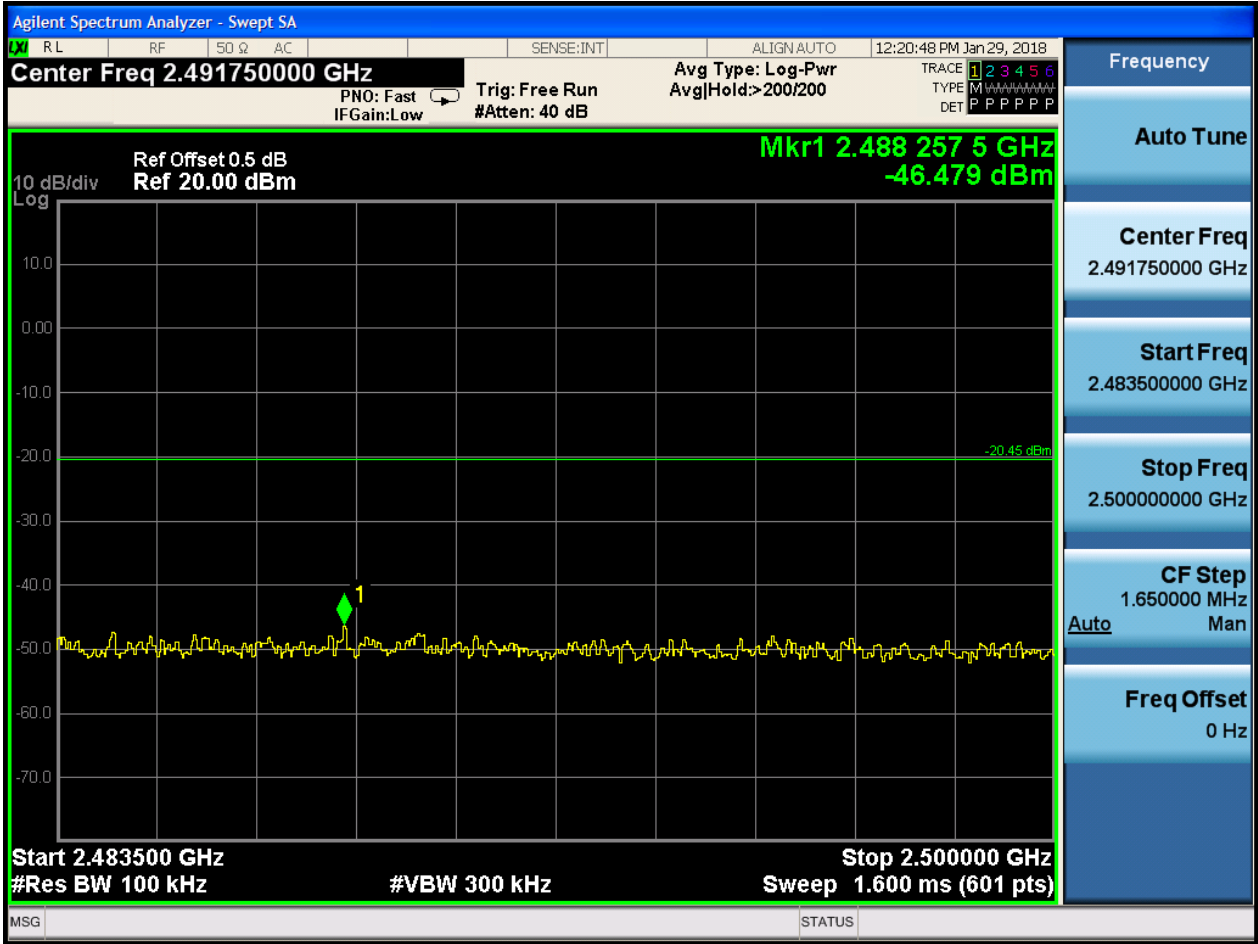


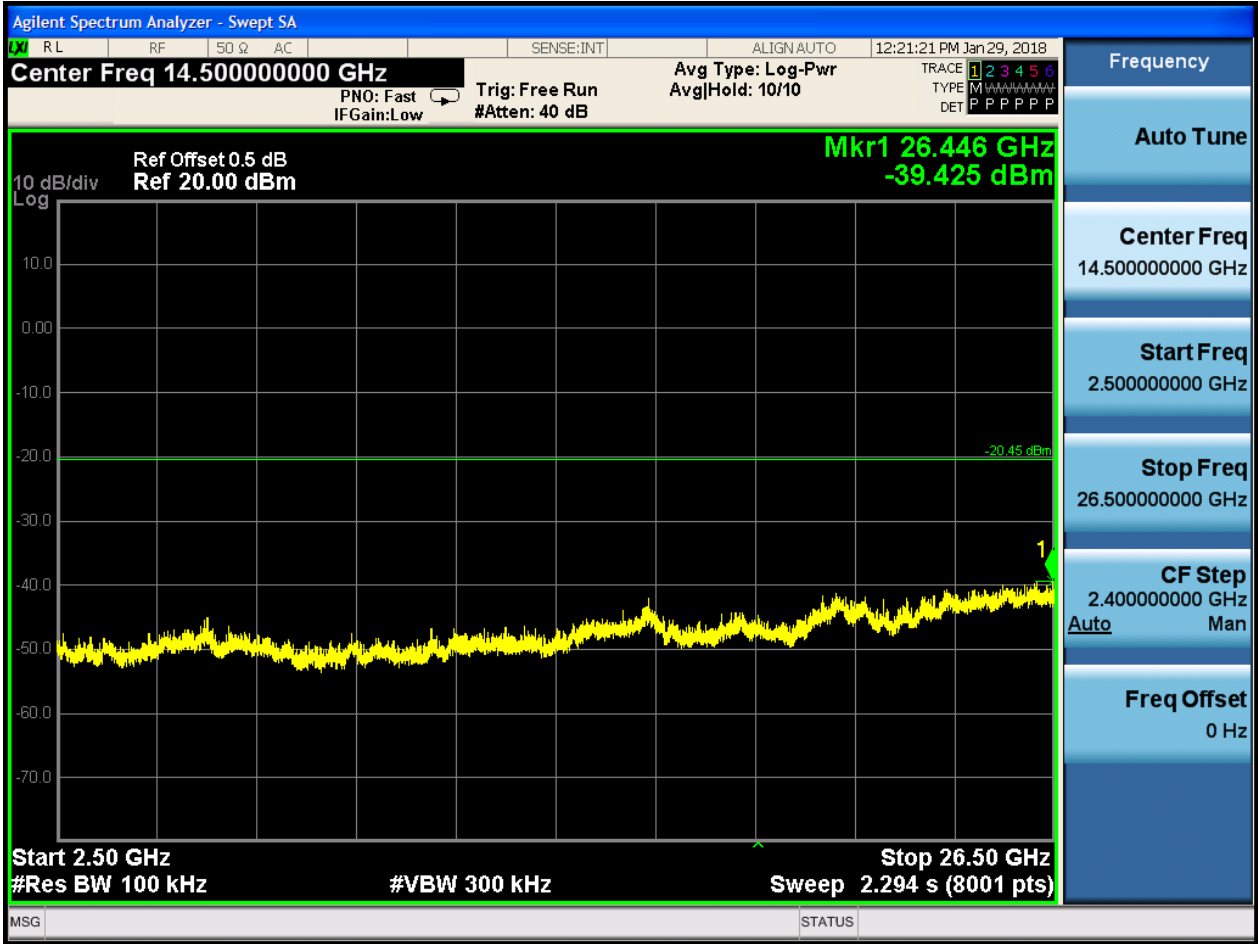



2.44 11N40m\_H@Ant 2


Pref:

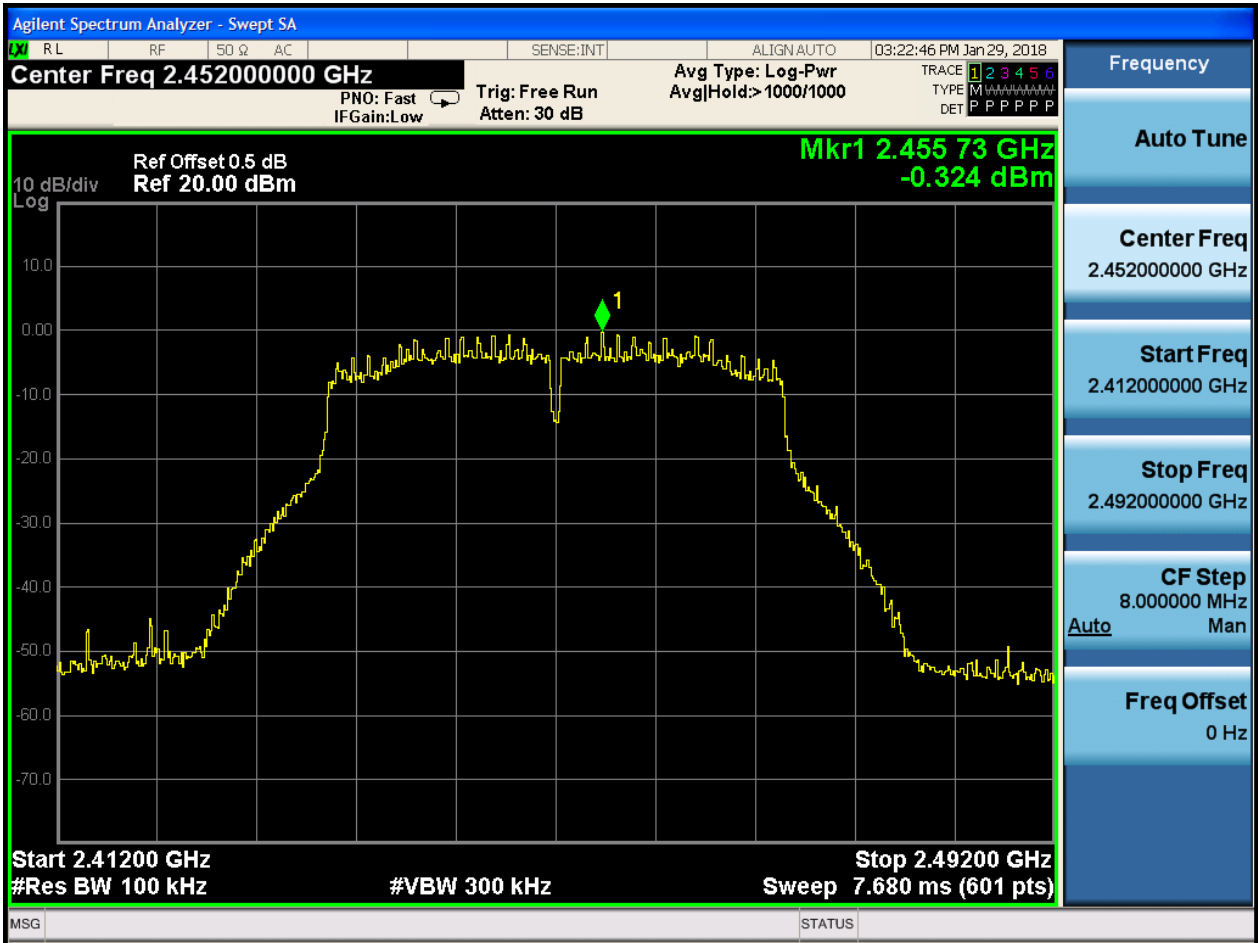









Puw:

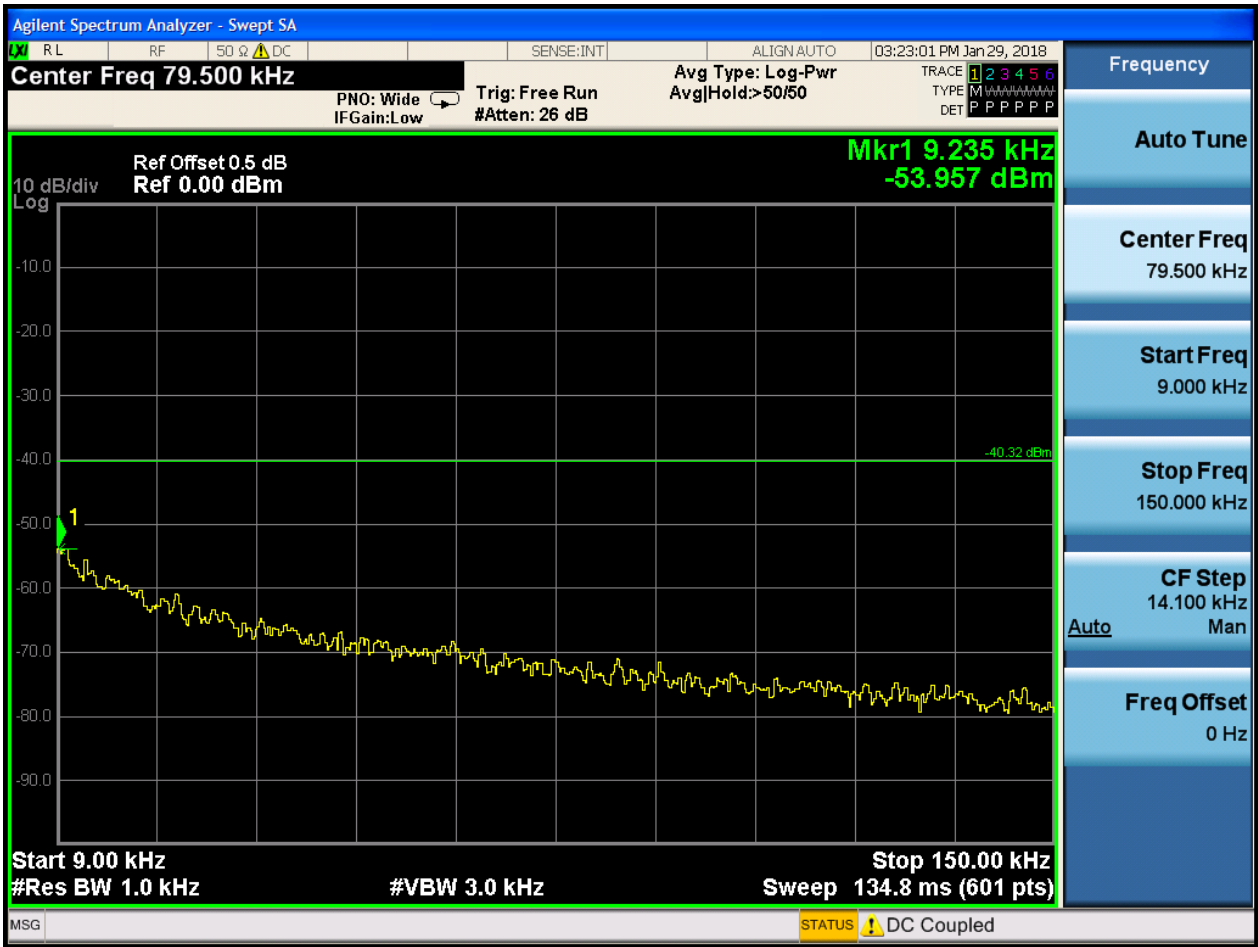


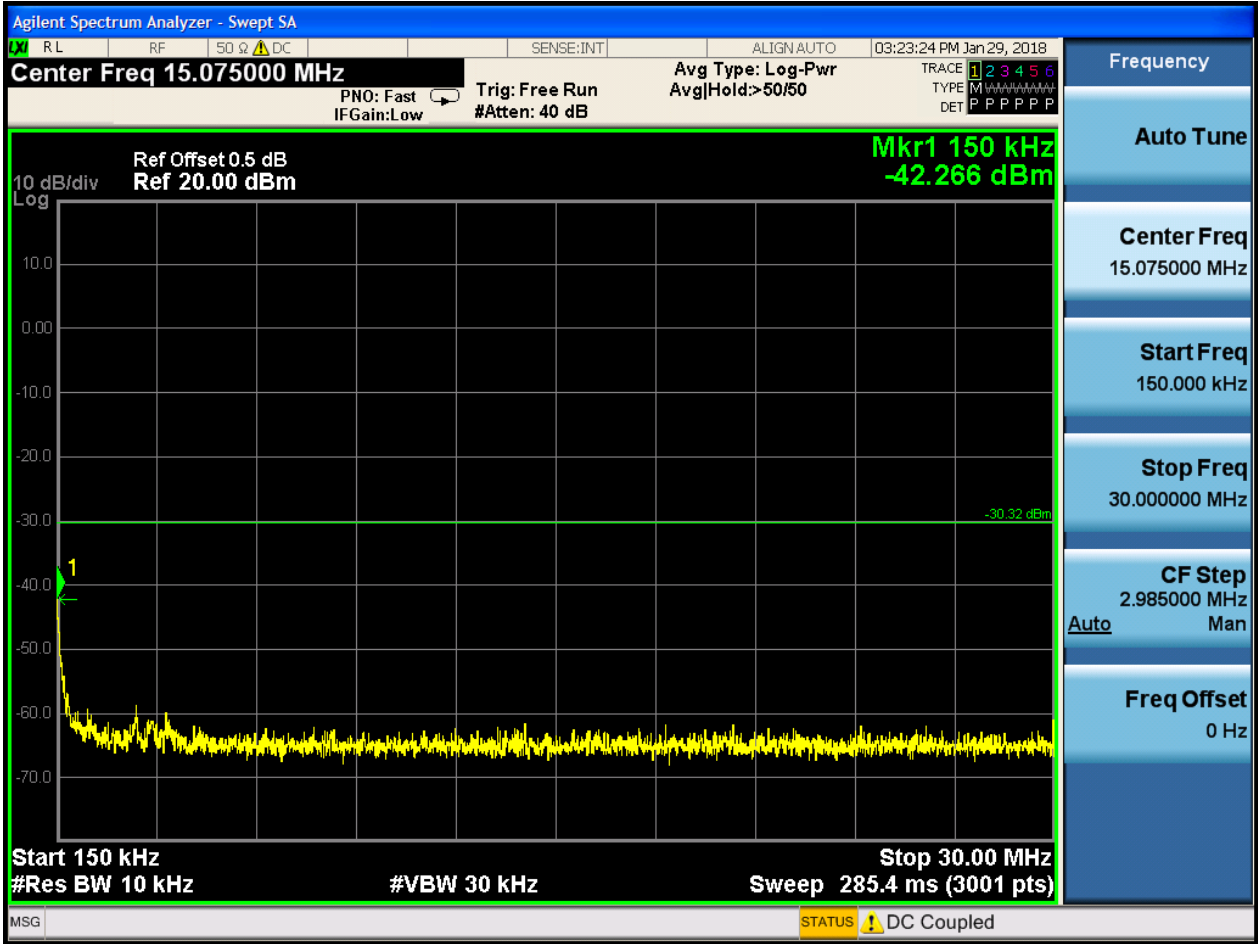

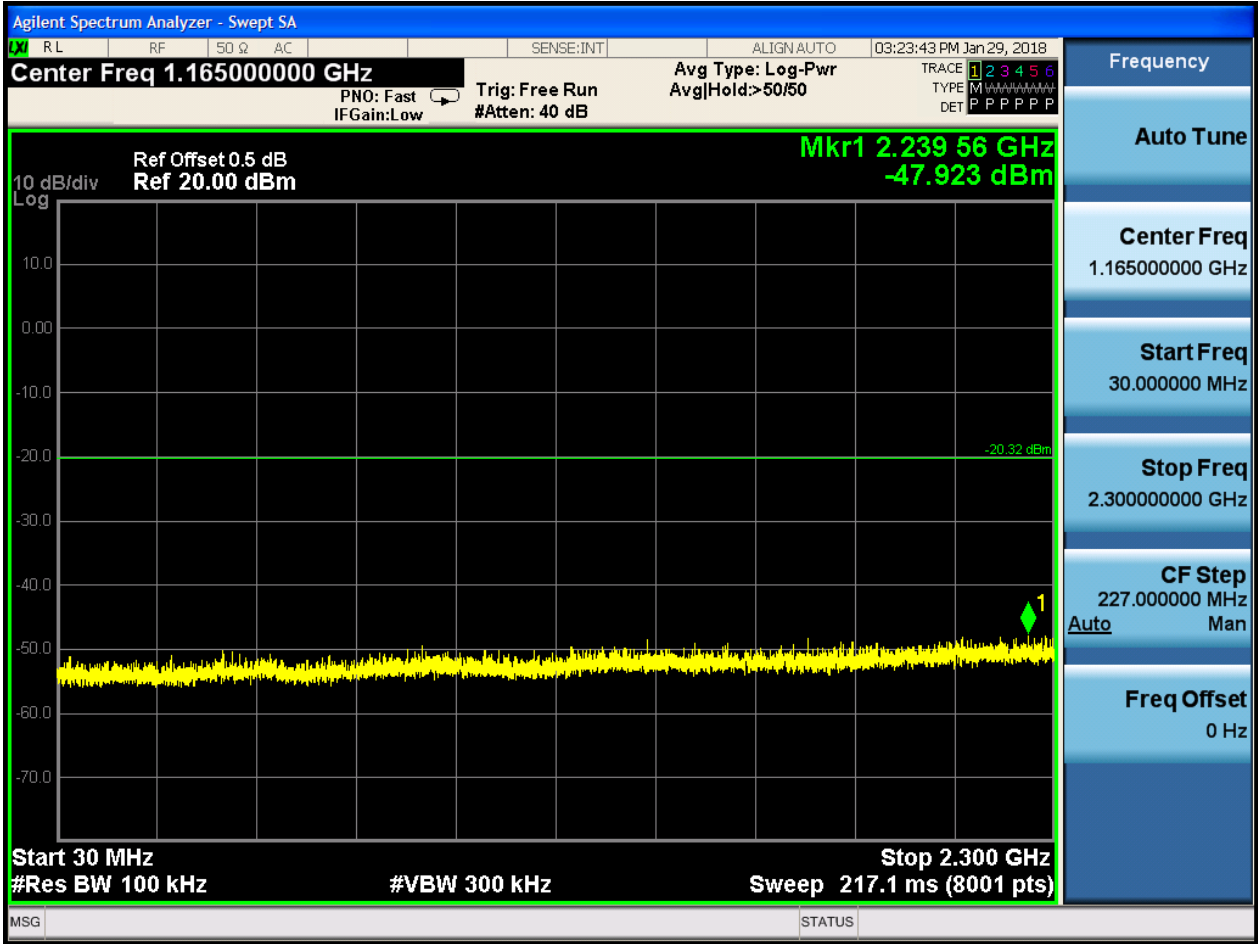

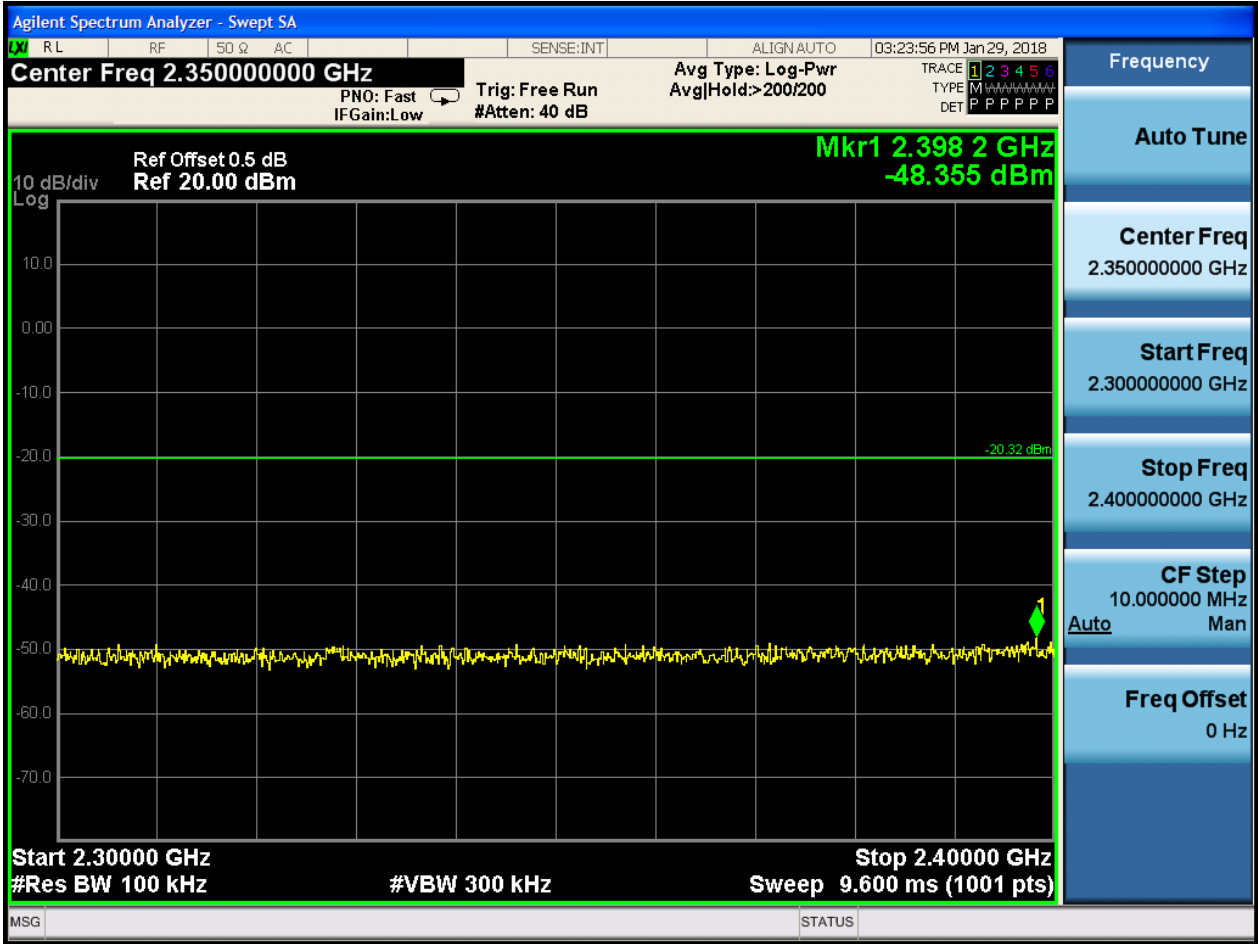

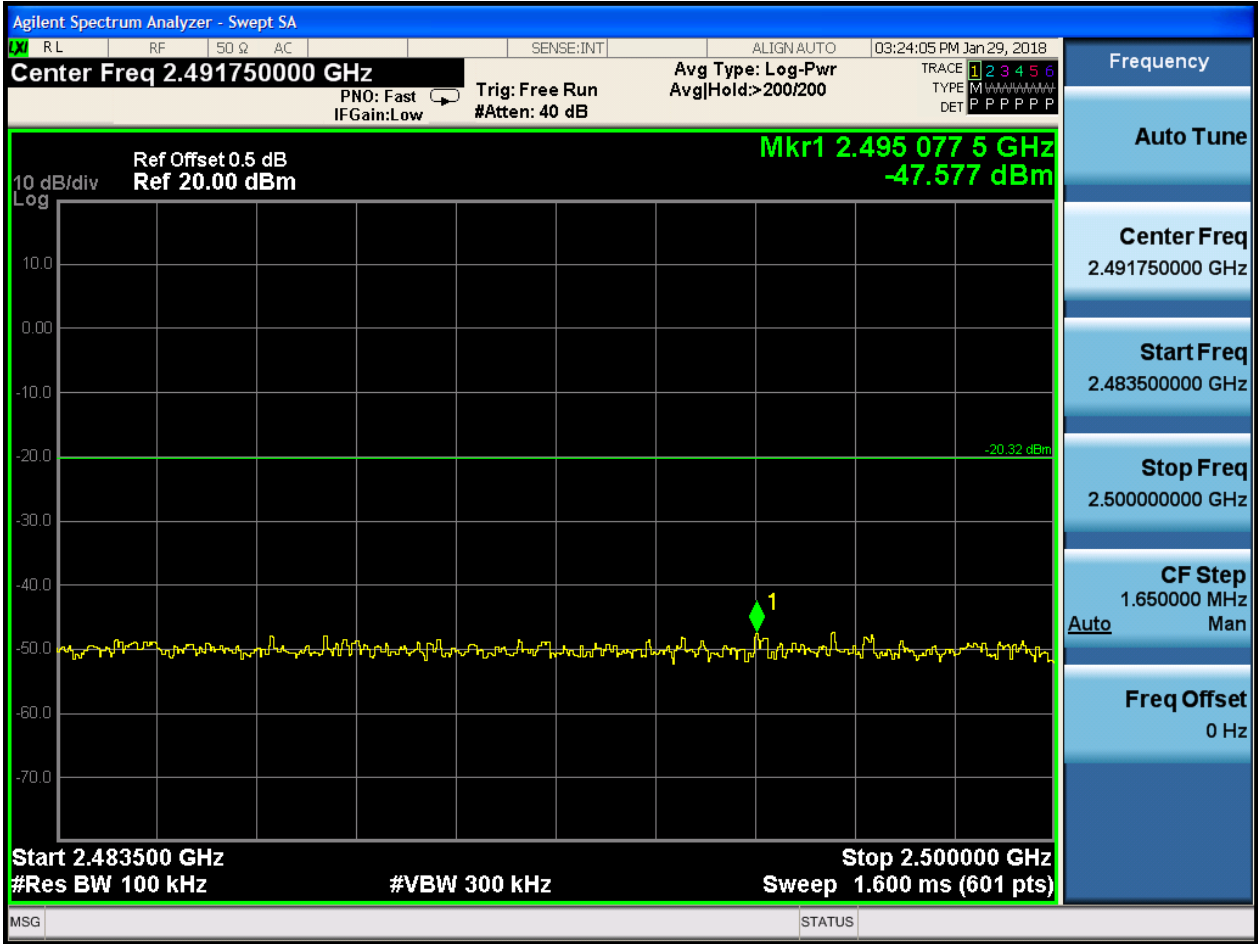

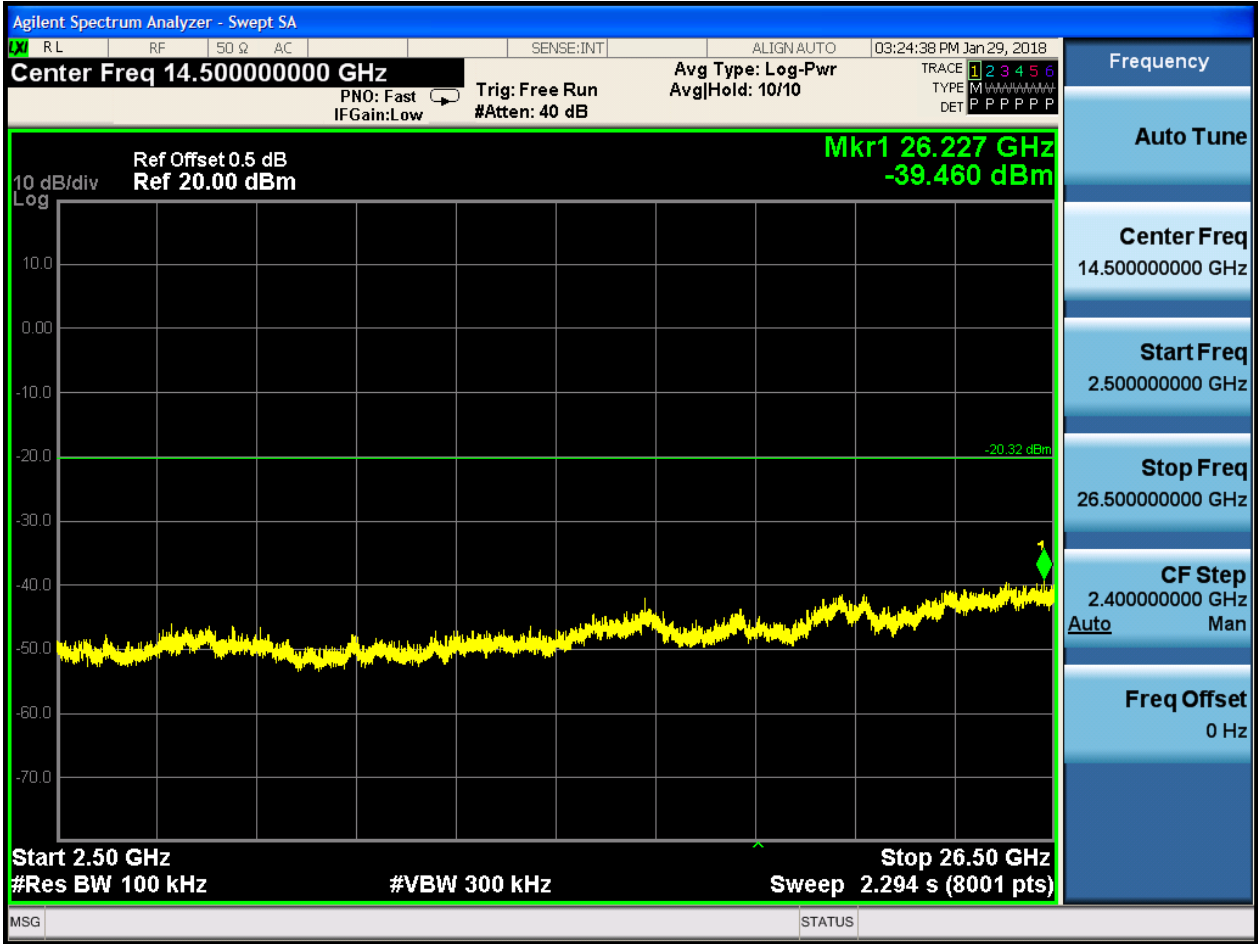



## Appendix I: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case.

Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered


**1.1 Part 1: Testing Range of “9 kHz to 30MHz”**

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

**1.2 Part 2: Testing Range of “30 MHz to 1 GHz”**

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

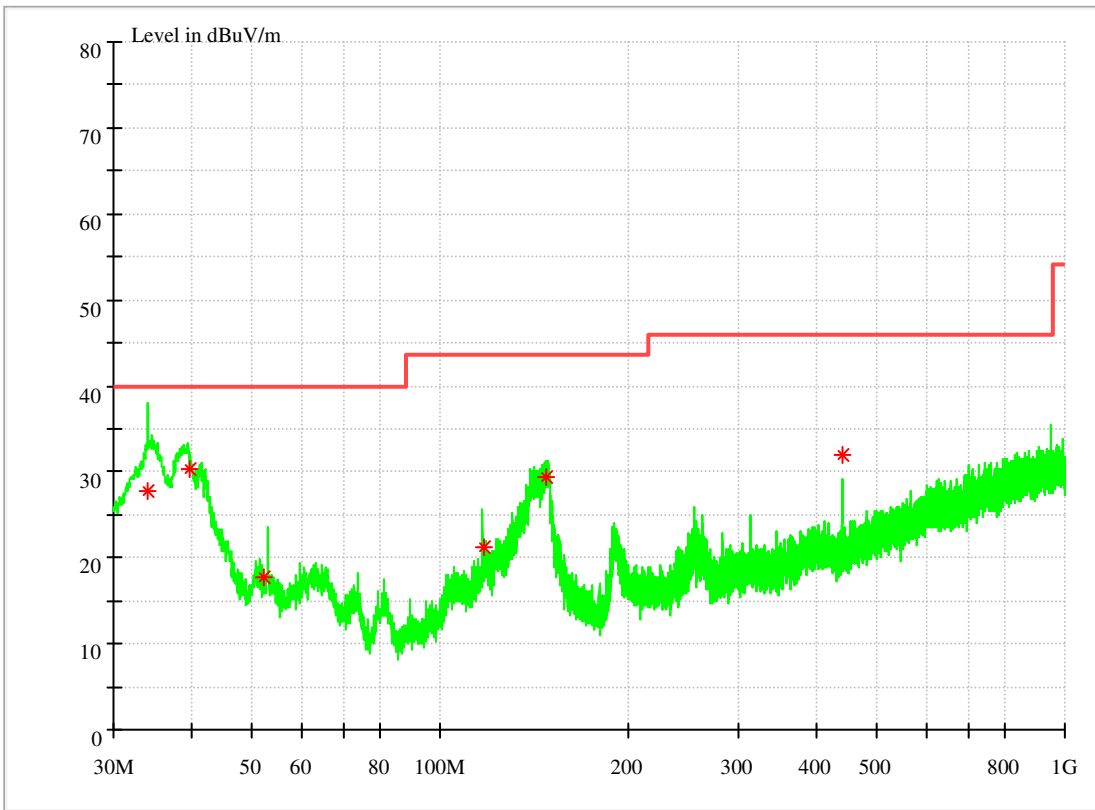

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
33.91580	27.67	40.00	12.33	127.0	V	323.0	15.3
39.615460	30.34	40.00	9.66	100.0	V	293.0	17.1
52.156240	17.80	40.00	22.20	400.0	V	293.0	11.1
117.916000	21.15	43.50	22.35	101.0	V	242.0	13.5
147.411540	29.47	43.50	14.03	102.0	V	300.0	12.8
439.255620	31.91	46.00	14.09	100.0	V	41.0	19.2

Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)



The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

### 1.3 Part 3: Testing Range of “1 GHz to 3 GHz”

Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.


Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).


Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Test Mode:

#### 1.4.1 Test Mode: 11B@Ant 1

##### 1.4.1.1 Channel 1

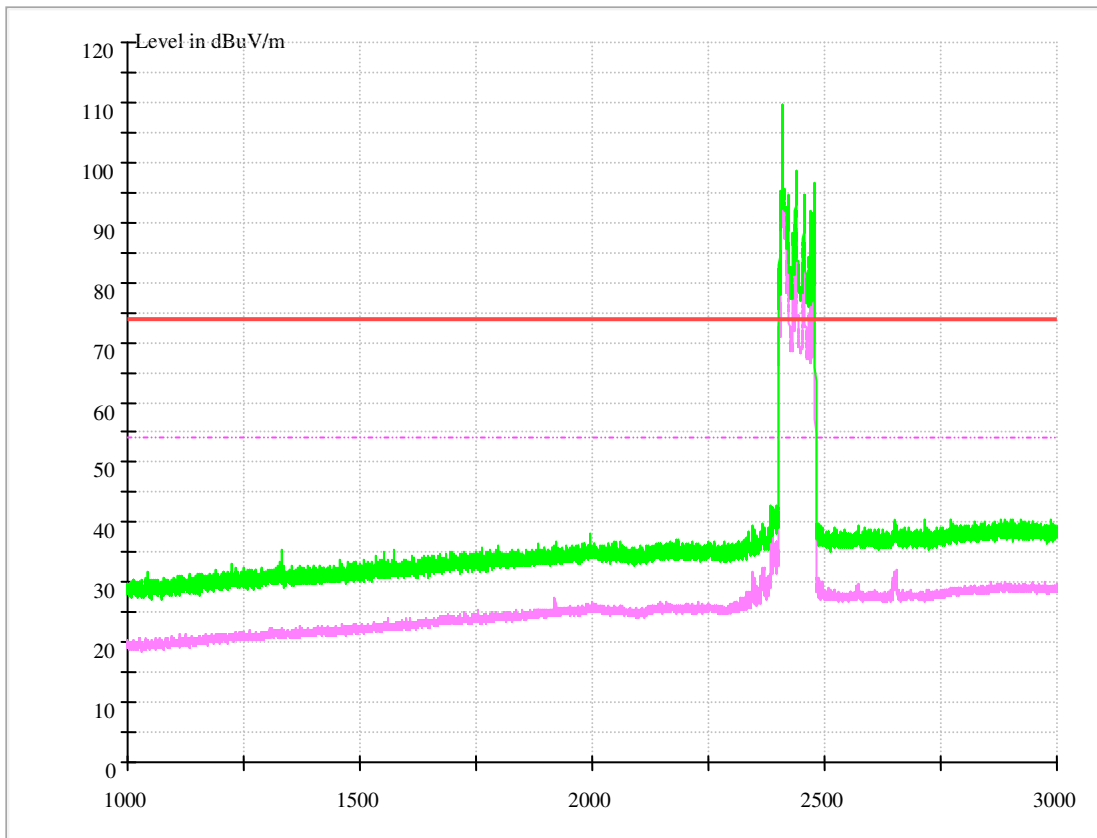

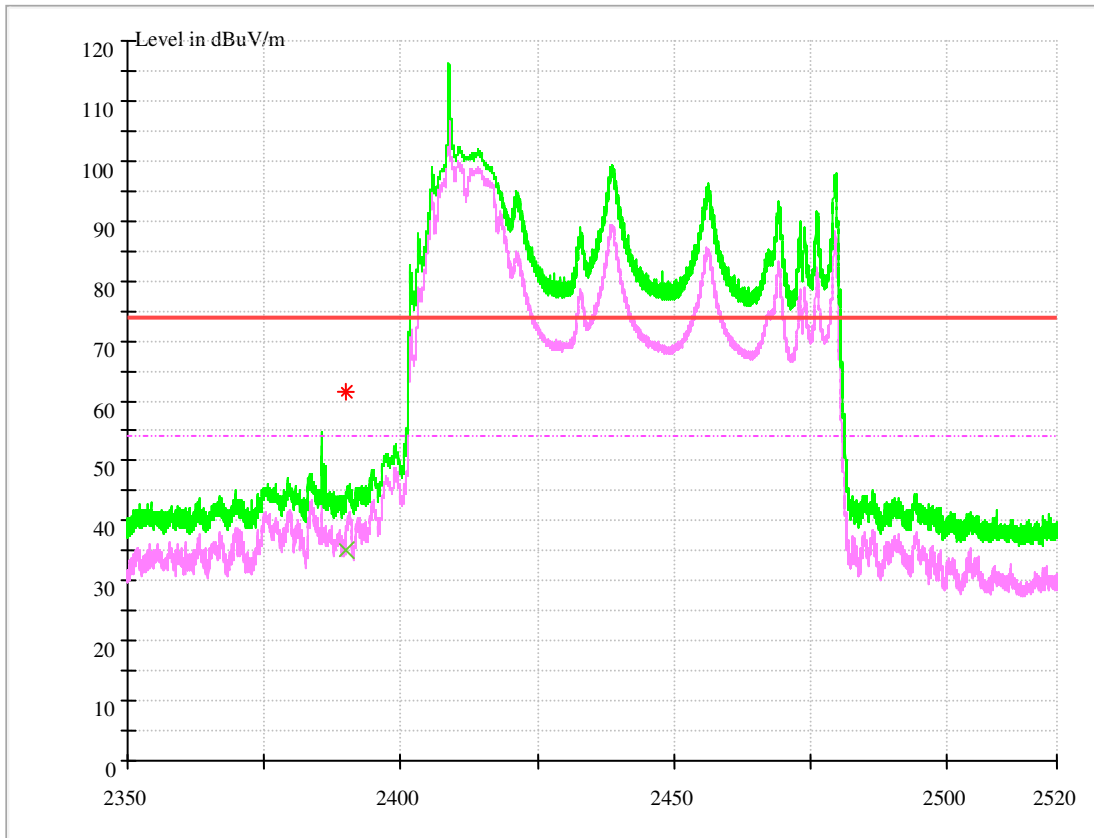

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.0000	35.04	54.00	18.96	150.0	H	215.0	-8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.0000	61.55	74.00	12.45	150.0	H	289.0	-8.5


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.4.1.2 Channel 10

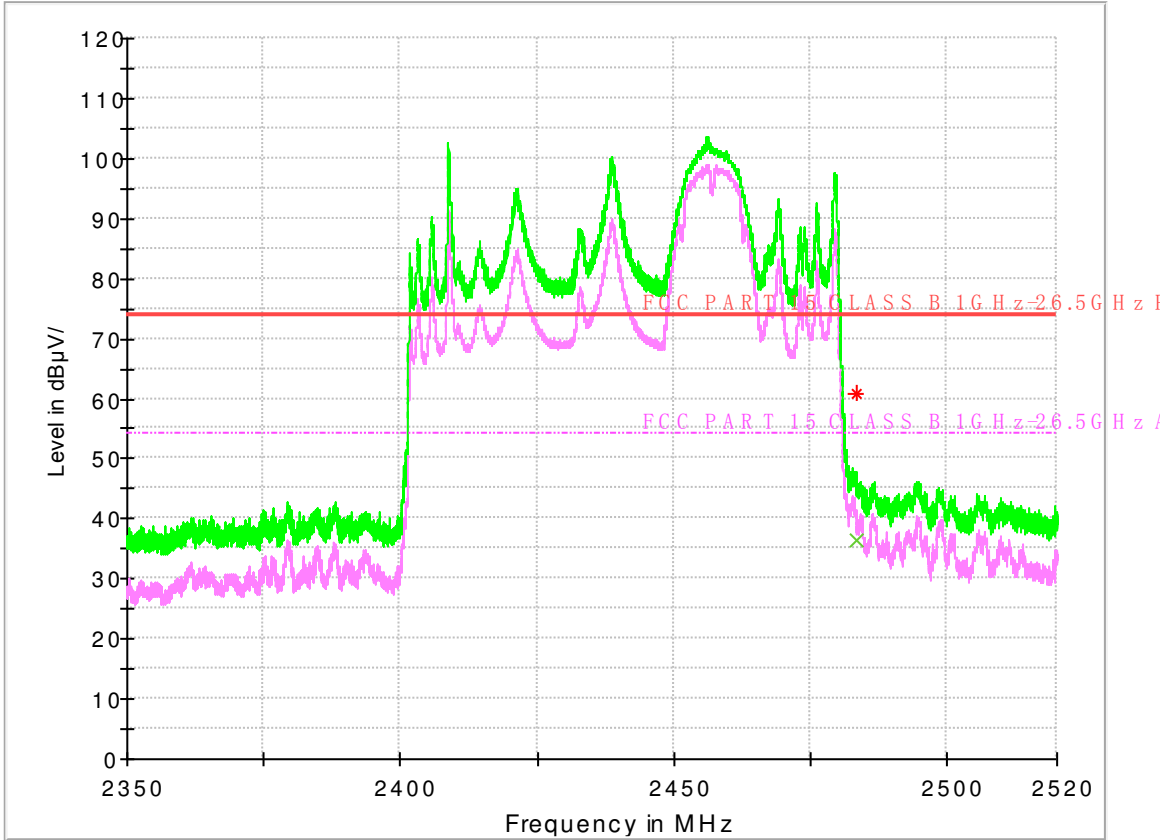

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5000	36.36	54.00	17.64	150.0	H	224.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5000	60.80	74.00	13.20	150.0	H	237.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.4.1.3 Channel 11

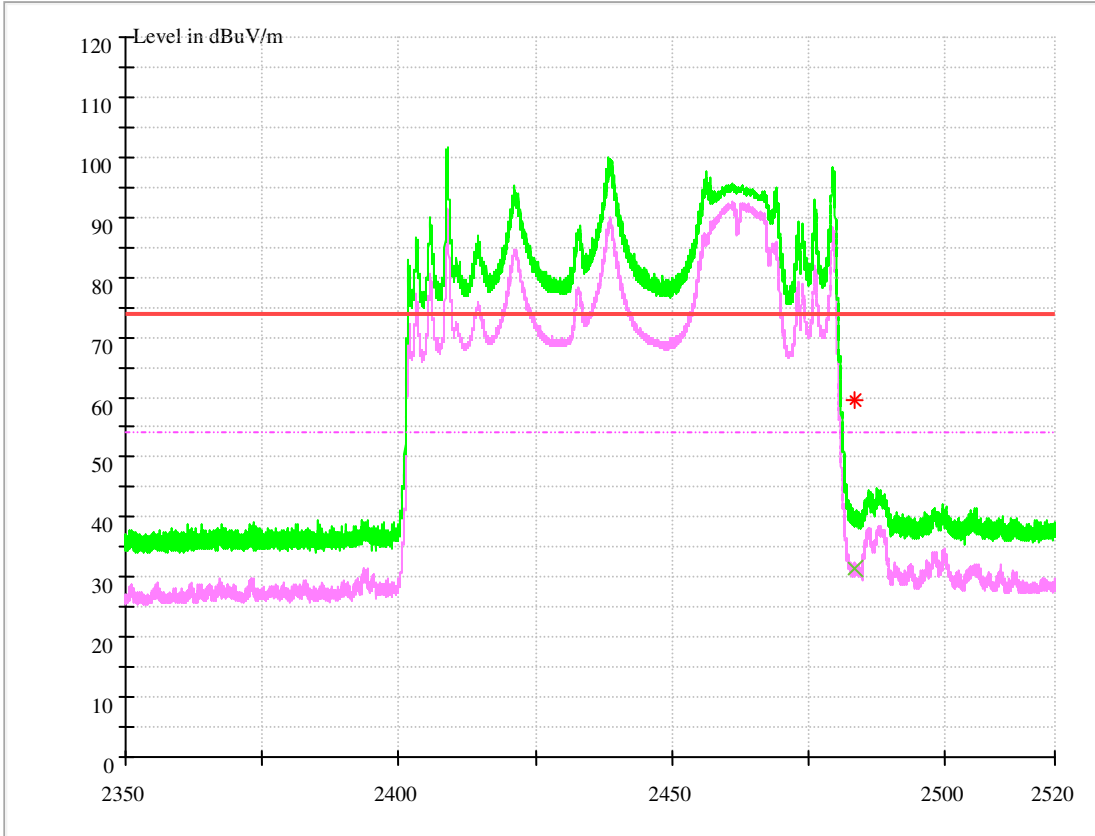

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5000	31.30	54.00	22.70	150.0	H	226.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5000	59.51	74.00	14.49	150.0	H	311.0	-6.8

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

### 1.4.2 Test Mode: 11B@Ant 2

#### 1.4.2.1 Channel 1

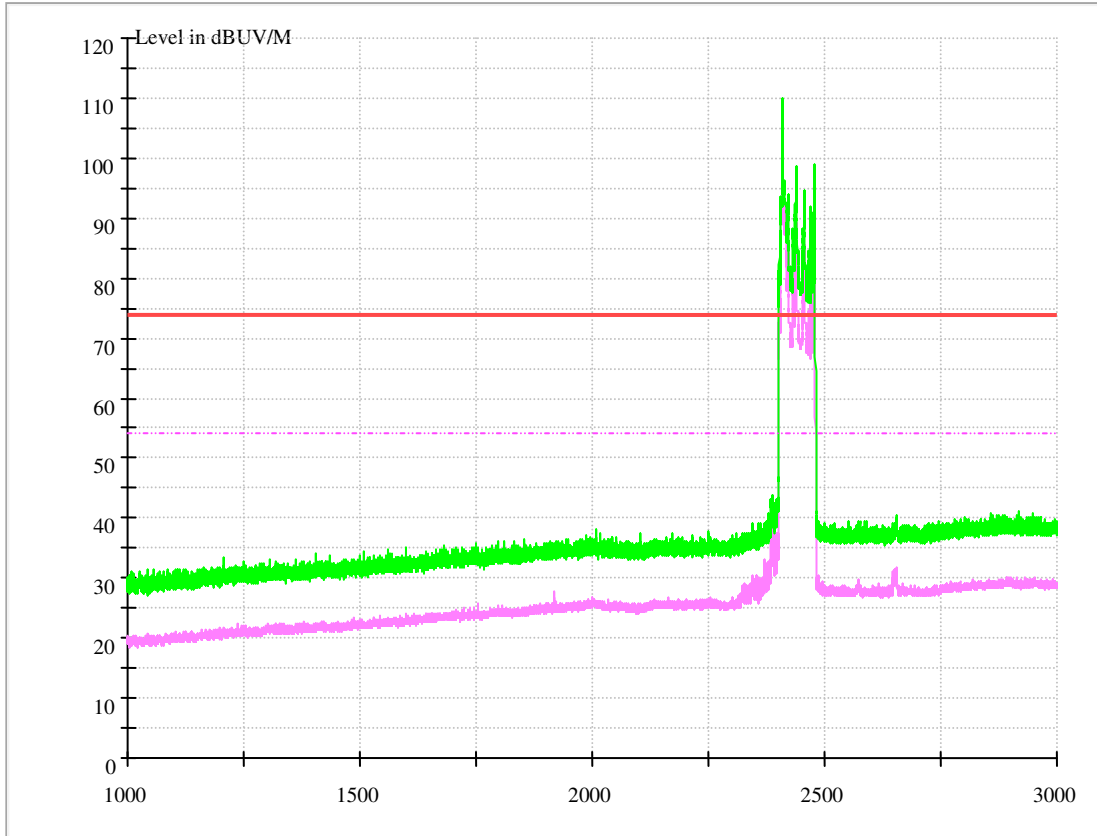

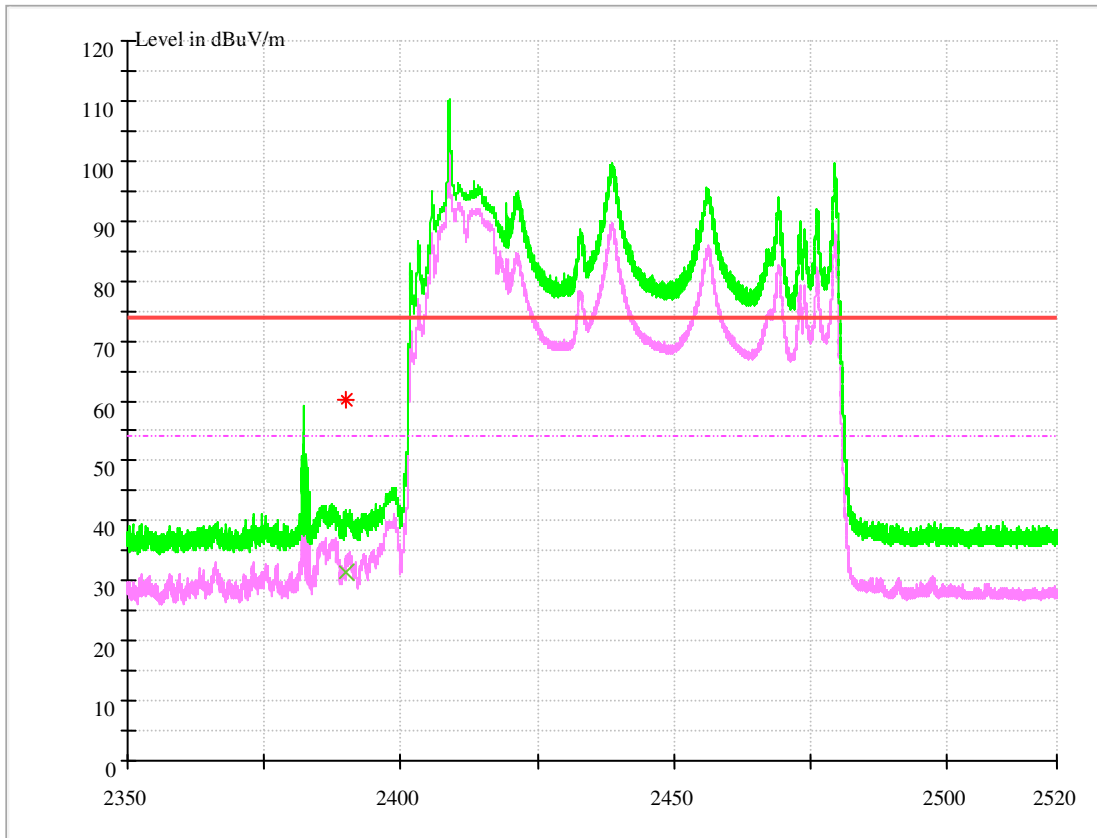

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.0000	31.37	54.00	22.63	150.0	H	225.0	-8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.0000	60.16	74.00	13.84	150.0	H	187.0	-8.5


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.4.2.2 Channel 10

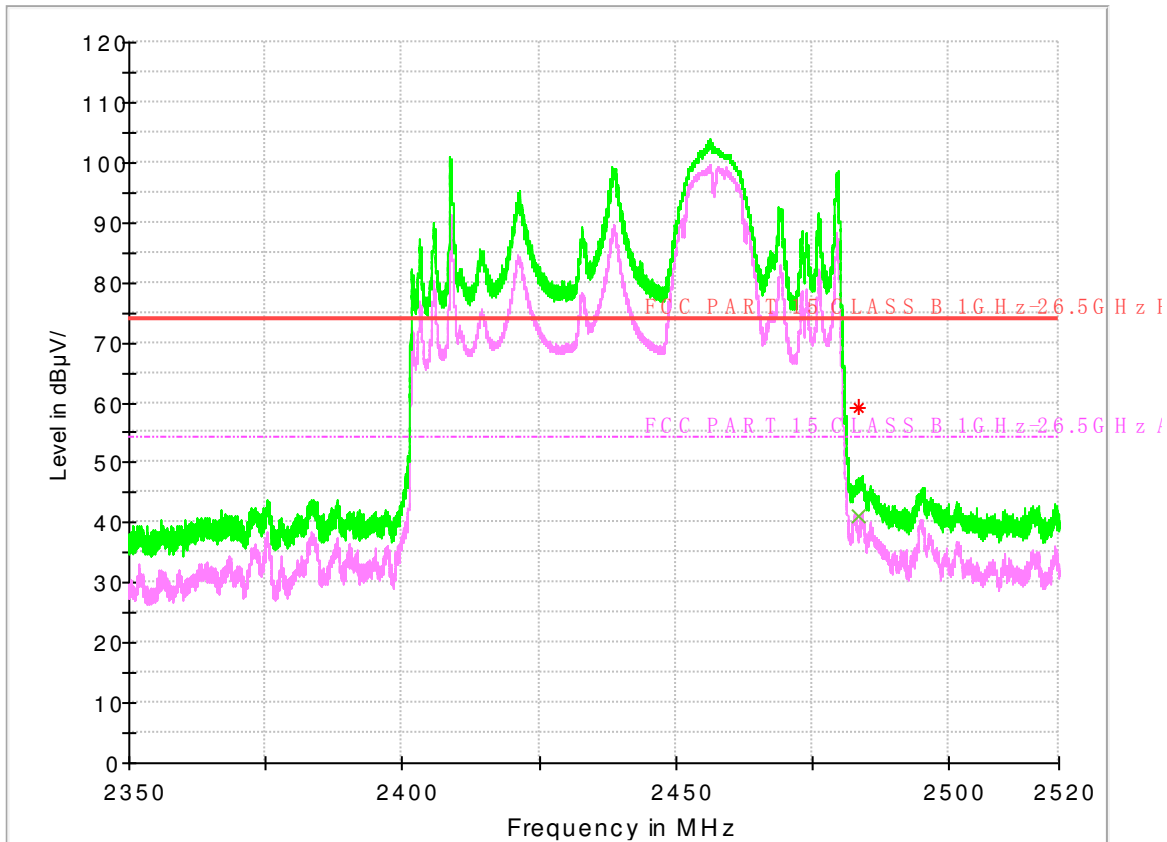

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.500000	41.04	54.00	12.96	150.0	H	225.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.500000	59.24	74.00	14.76	150.0	H	207.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.4.2.3 Channel 11

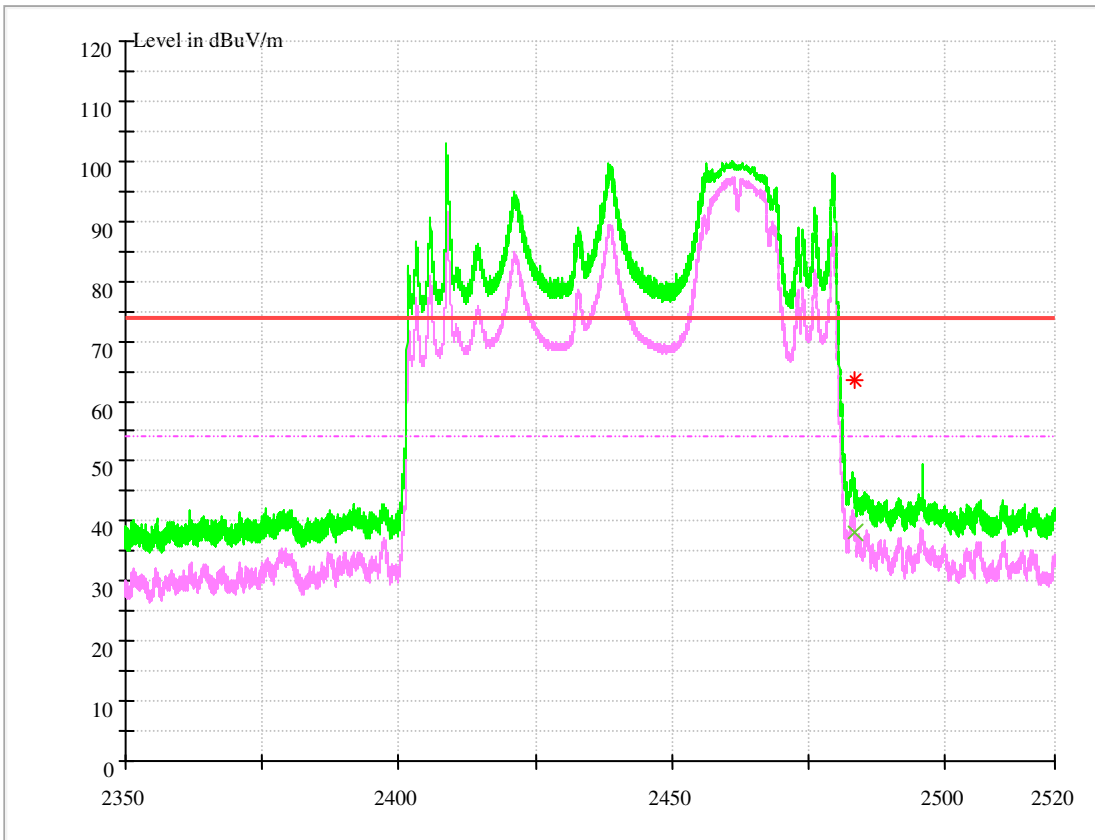

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	38.23	54.00	15.77	150.0	H	225.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	63.47	74.00	10.53	150.0	H	199.0	-6.8

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.


2, Margin=Limit - Level



### 1.4.3 Test Mode: 11G@Ant 1

#### 1.4.3.1 Channel 1

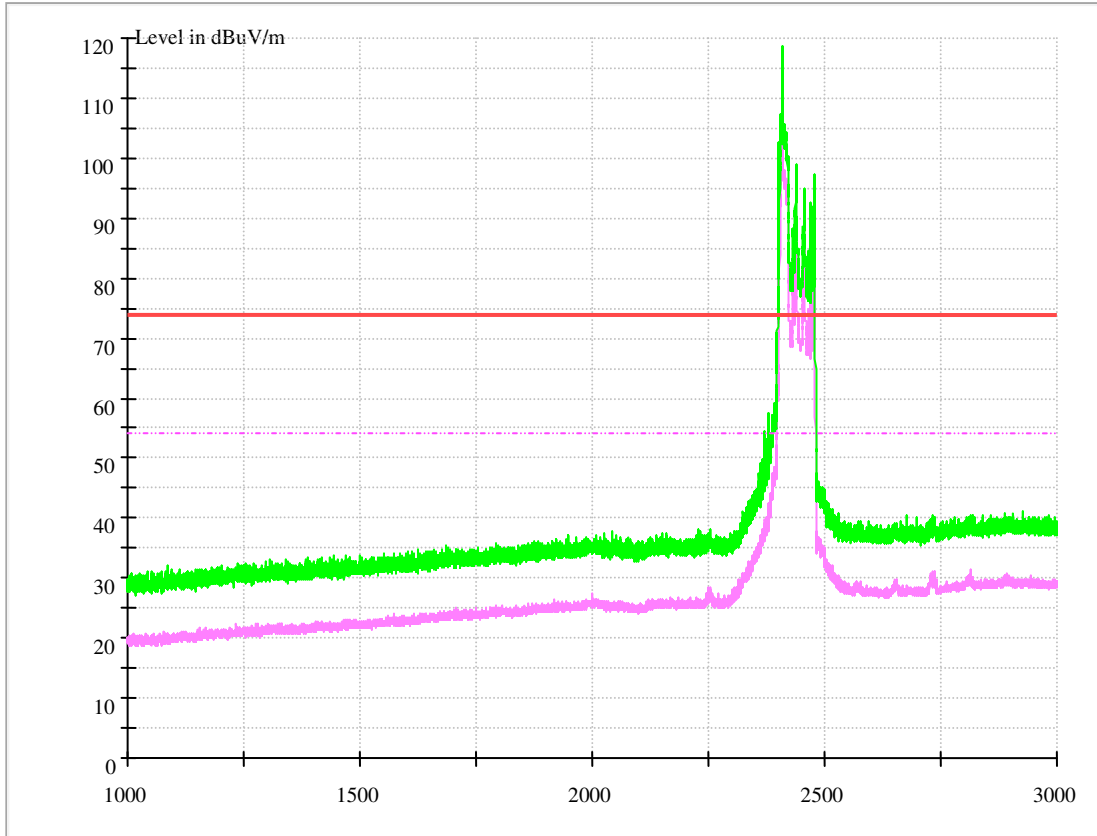

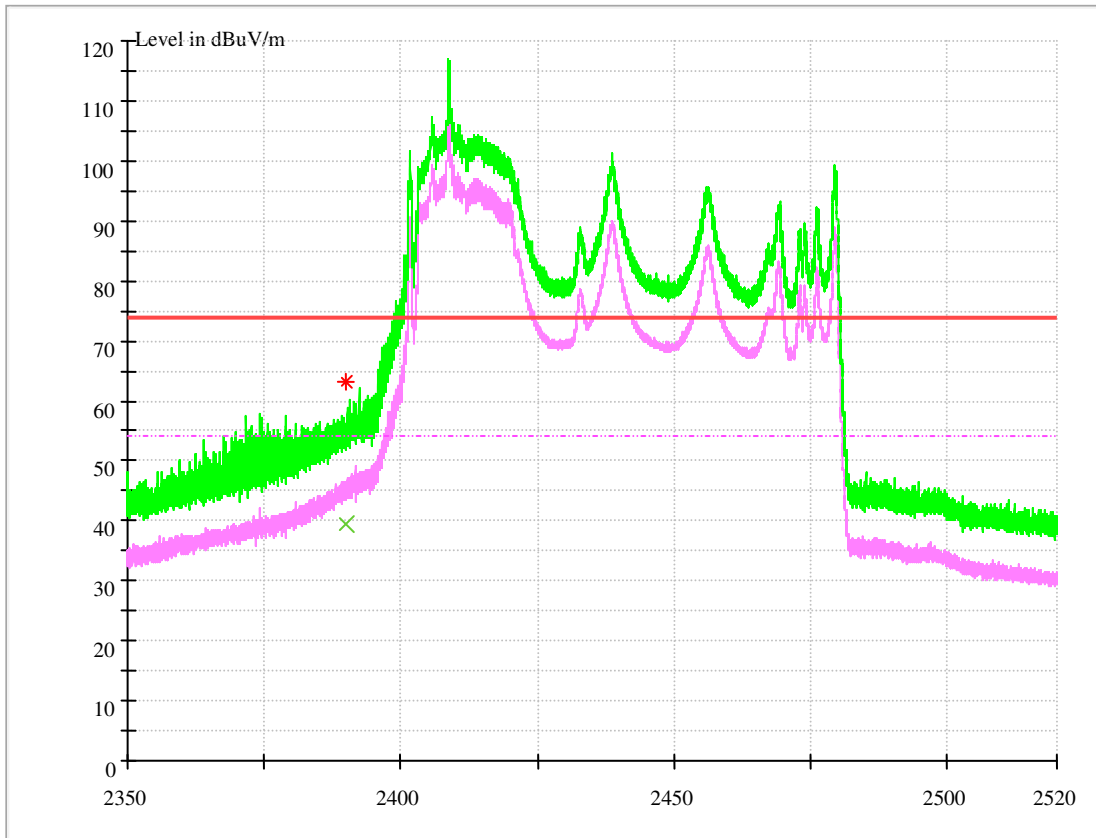

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2390.000000	39.58	54.00	14.42	150.0	V	0.0	-8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2390.000000	63.23	74.00	10.77	150.0	V	282.0	-8.5


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4.3.2 Channel 10

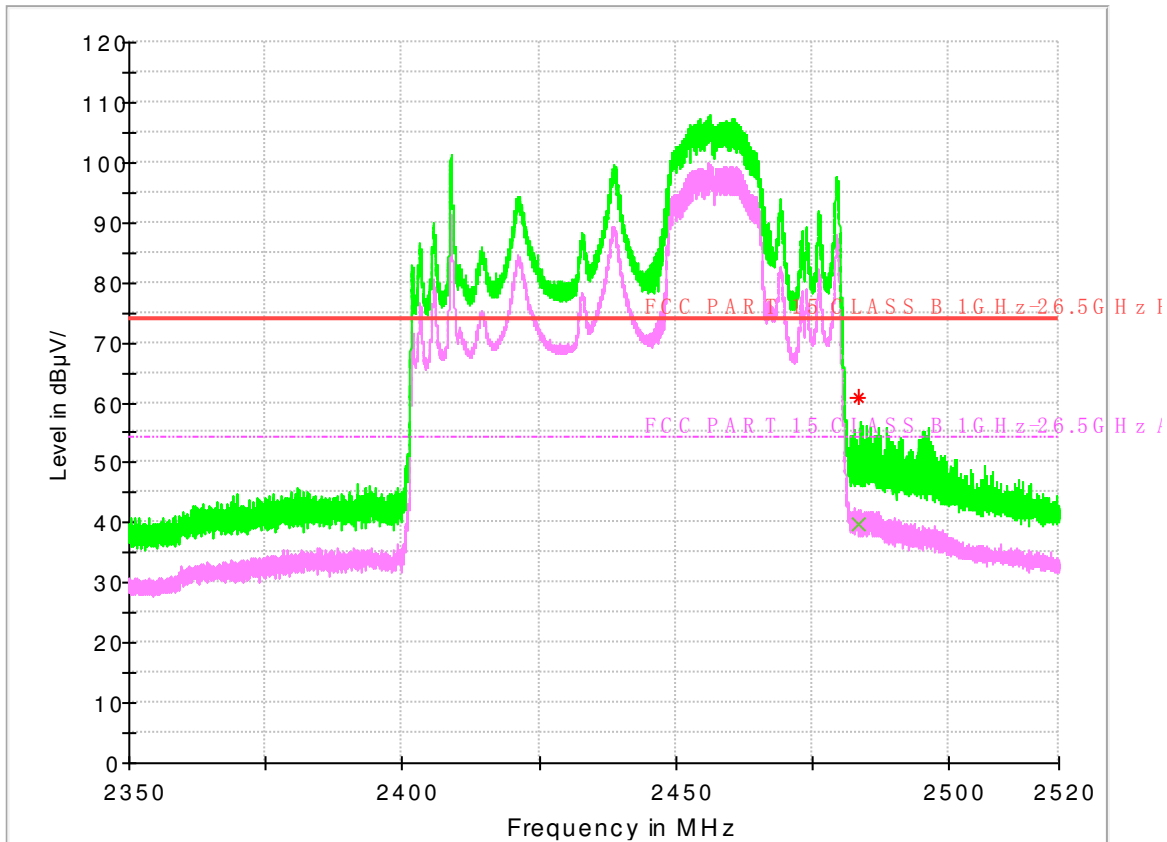

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	39.88	54.00	14.12	150.0	H	246.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	60.95	74.00	13.05	150.0	H	245.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.4.3.3 Channel 11

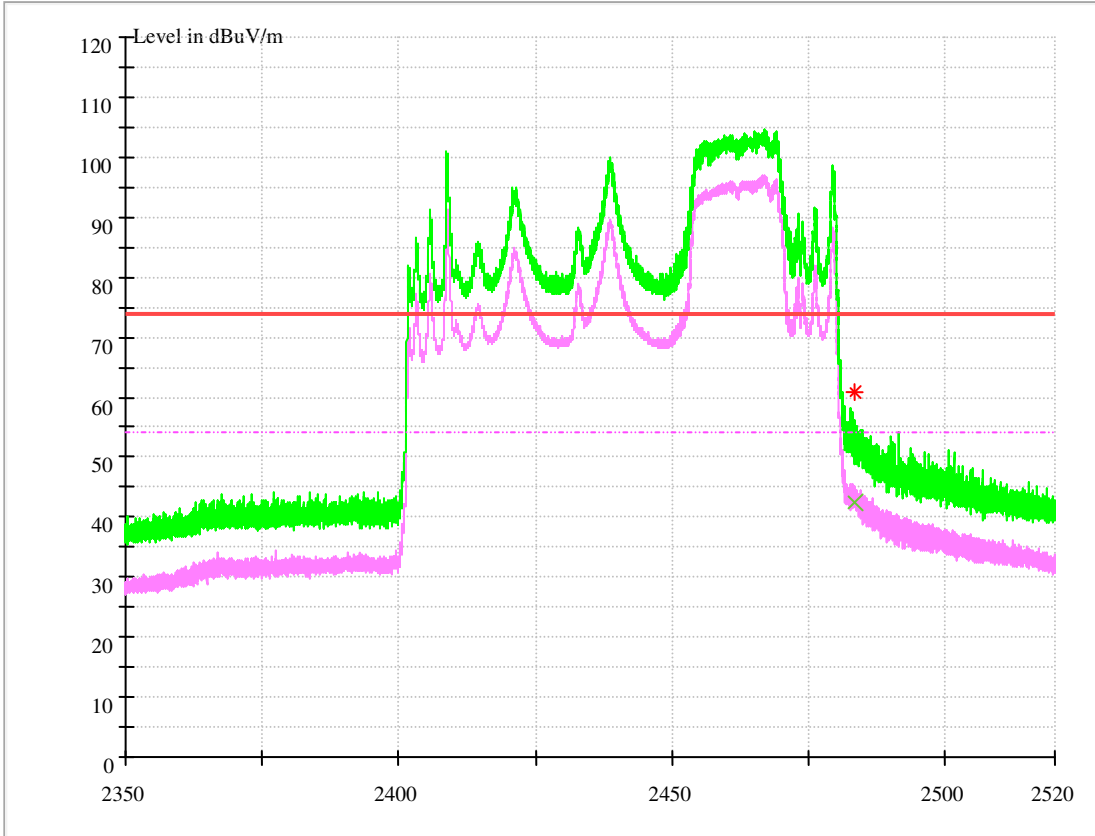

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	42.33	54.00	11.67	150.0	H	266.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	60.77	74.00	13.23	150.0	H	310.0	-6.8

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

### 1.4.4 Test Mode: 11G@Ant 2

#### 1.4.4.1 Channel 1

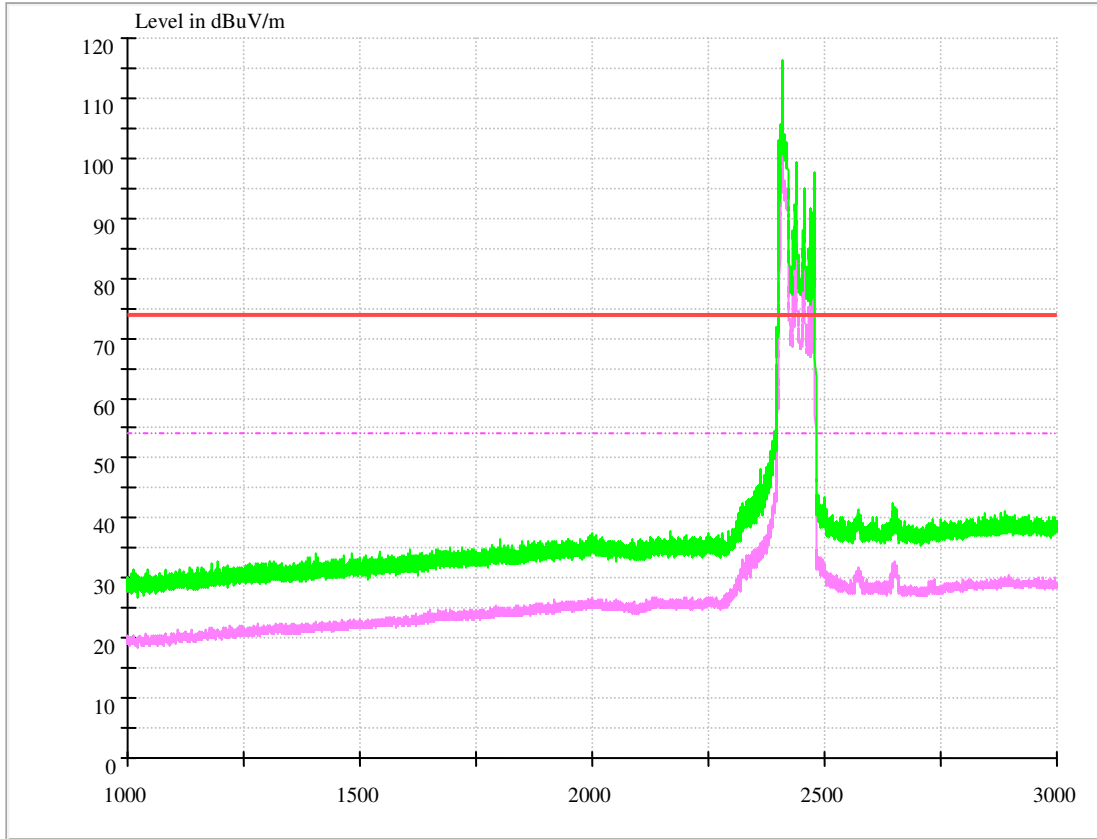

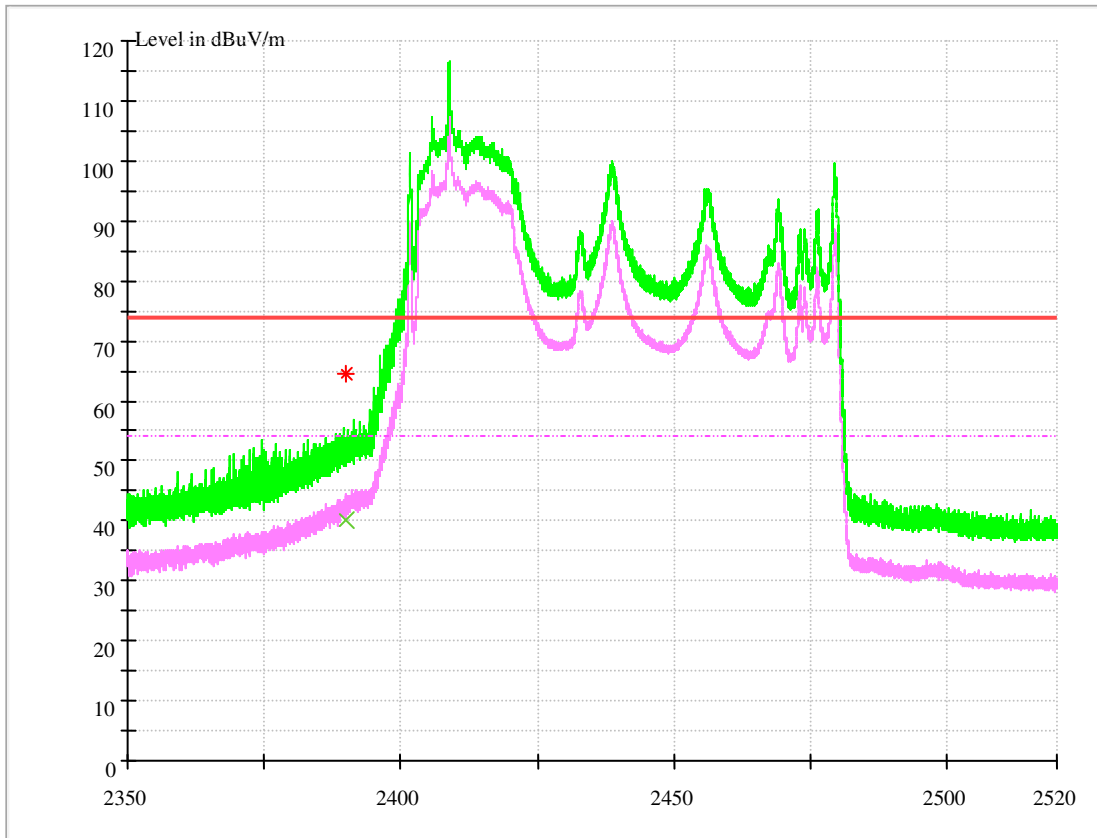

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2390.00000	40.22	54.00	13.78	150.0	H	268.0	-8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2390.0000	64.42	74.00	9.58	150.0	H	253.0	-8.5


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.4.4.2 Channel 10

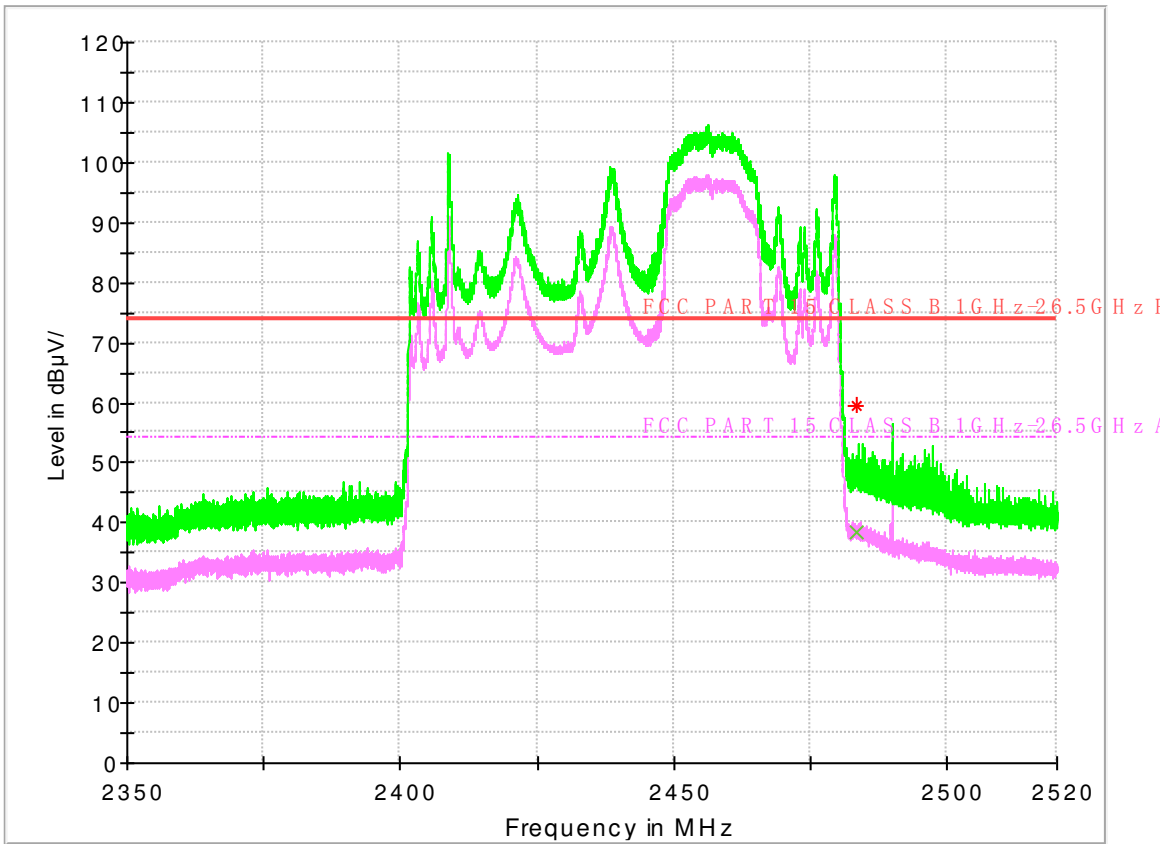

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.500000	38.31	54.00	15.69	150.0	H	225.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.500000	59.45	74.00	14.55	150.0	H	225.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.4.4.3 Channel 11

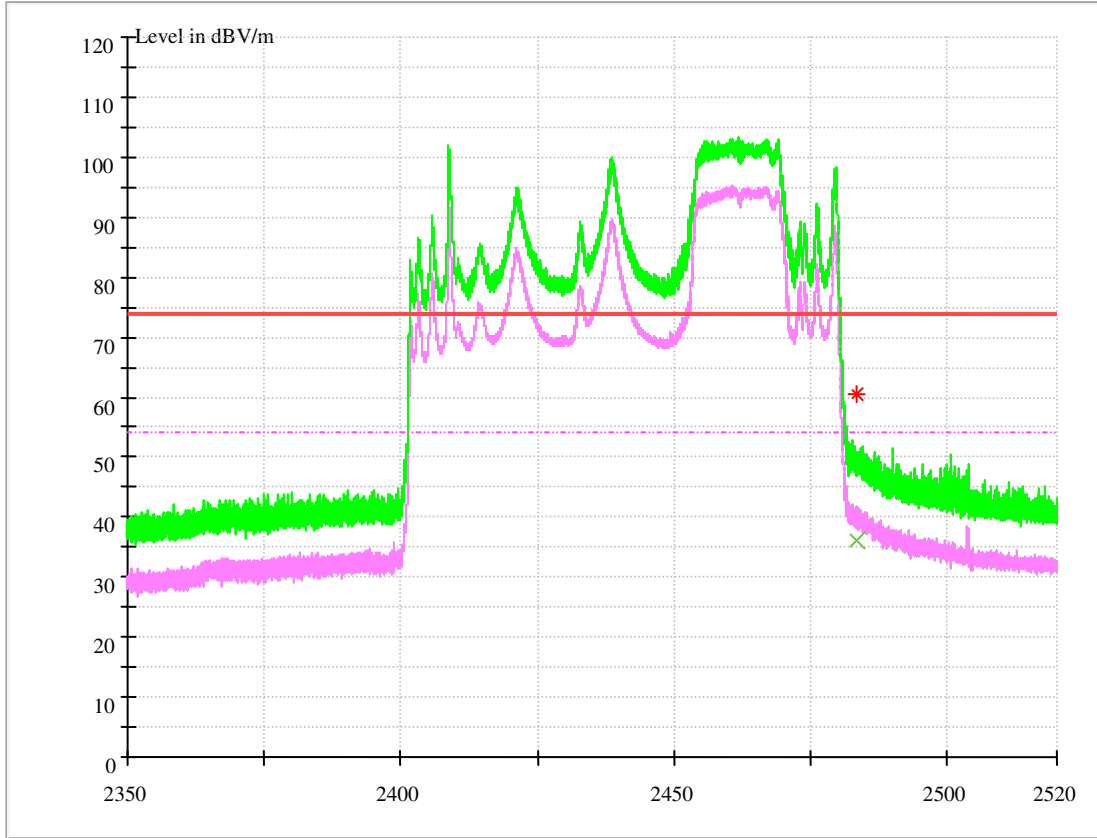

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	36.23	54.00	17.77	150.0	H	258.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	60.42	74.00	13.58	150.0	H	278.0	-6.8

Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.


2, Margin = Limit - Level



### 1.4.5 Test Mode: 11N20@Ant 1

#### 1.4.5.1 Channel 1

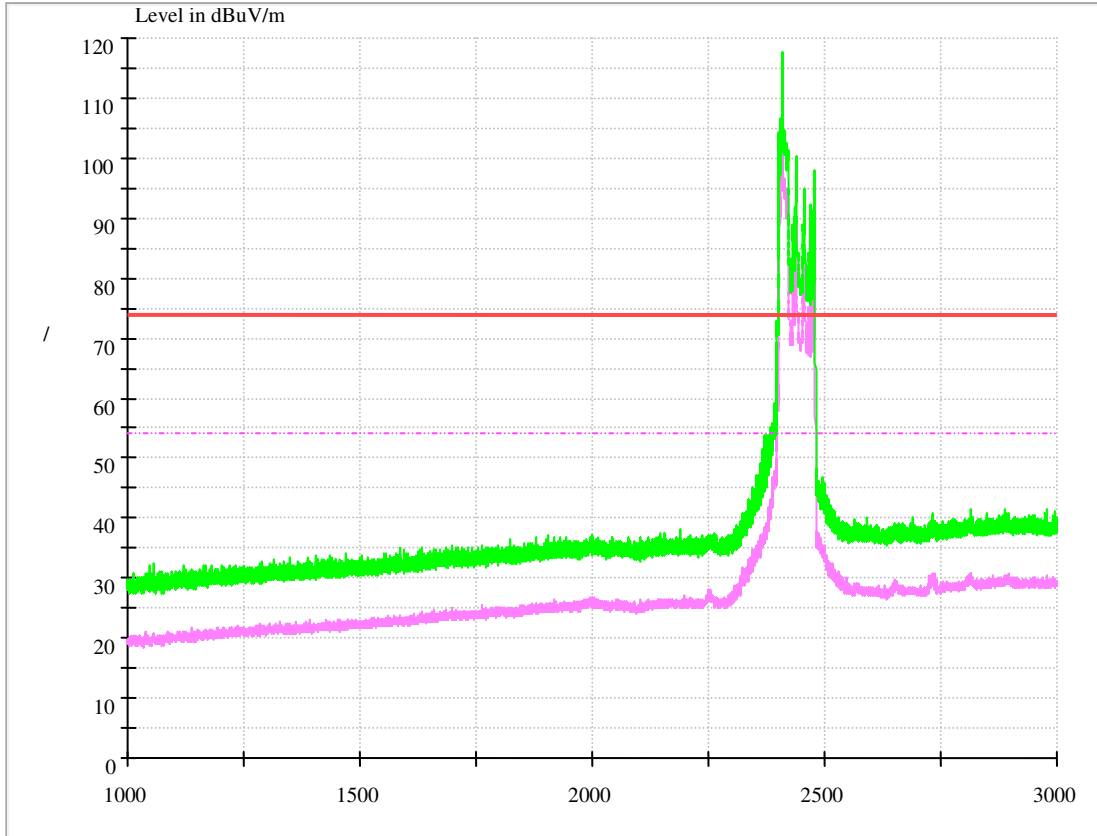

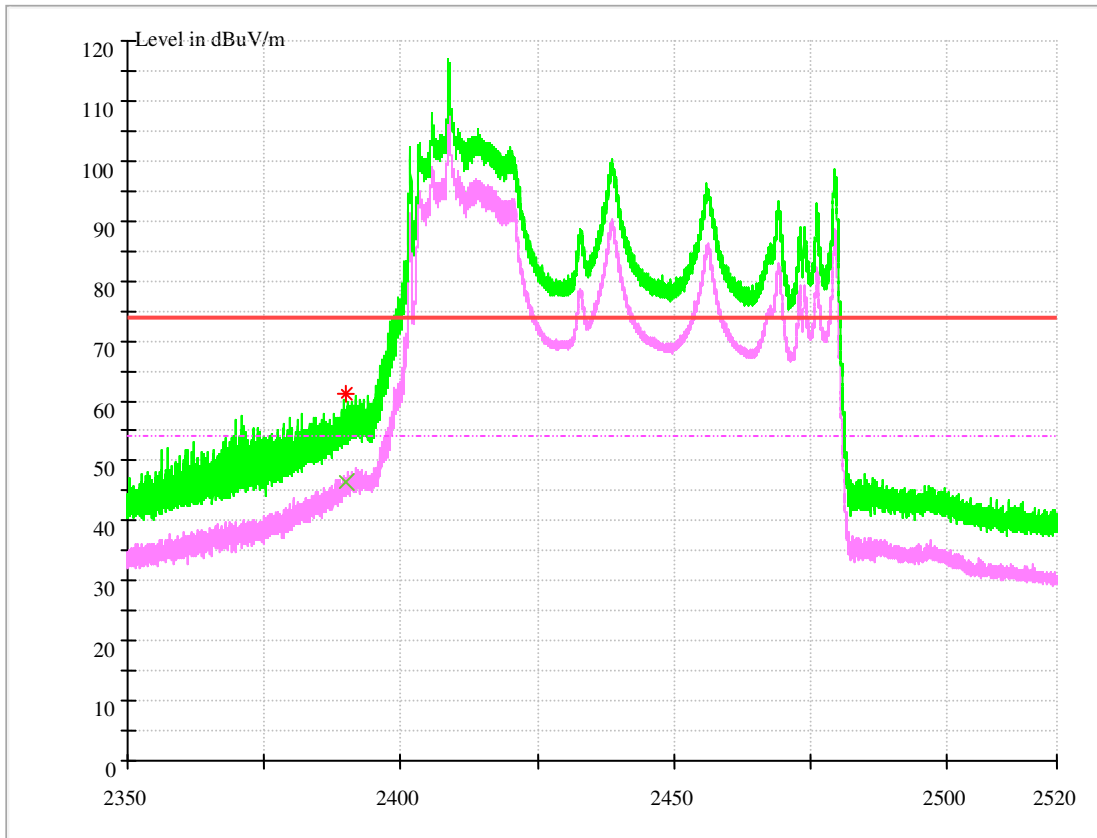

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.00000	46.41	54.00	7.59	150.0	H	237.0	-8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.00000	61.11	74.00	12.89	150.0	H	164.0	-8.5


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.4.5.2 Channel 10

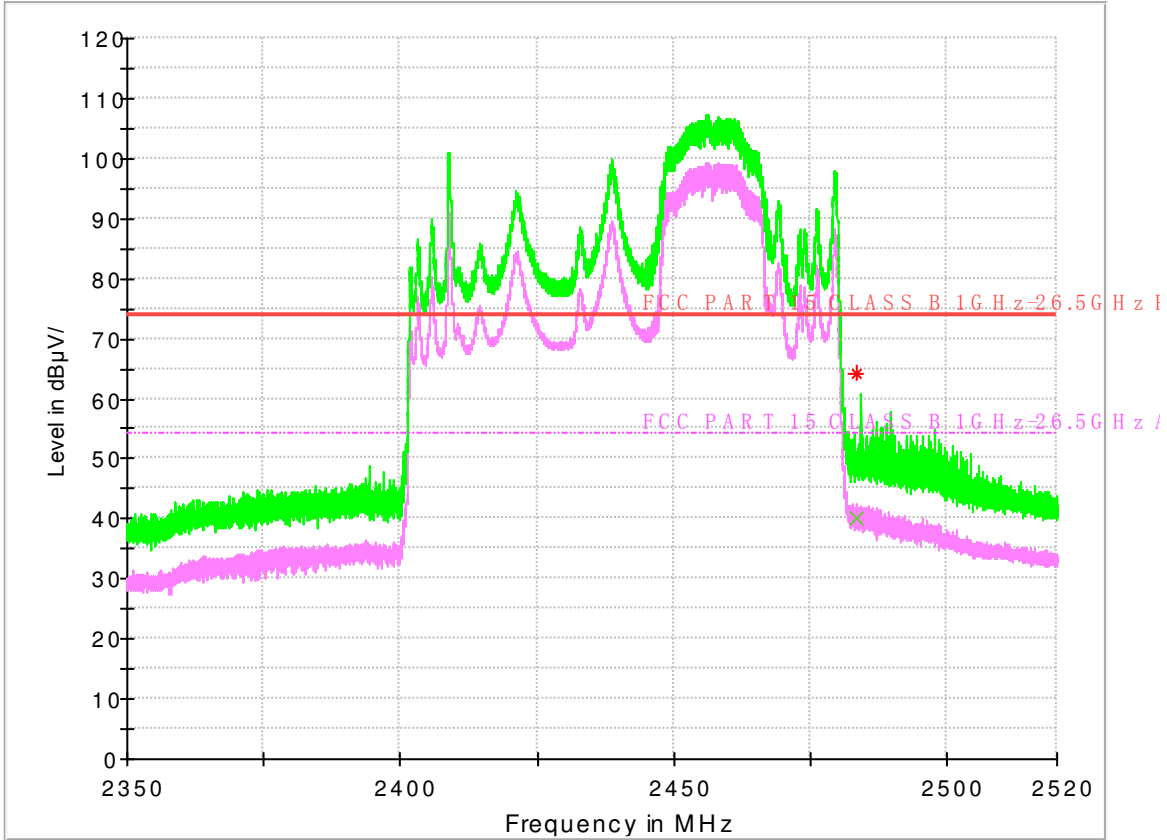

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.500000	40.02	54.00	13.98	150.0	H	245.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.500000	64.02	74.00	9.98	150.0	H	216.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.4.5.3 Channel 11

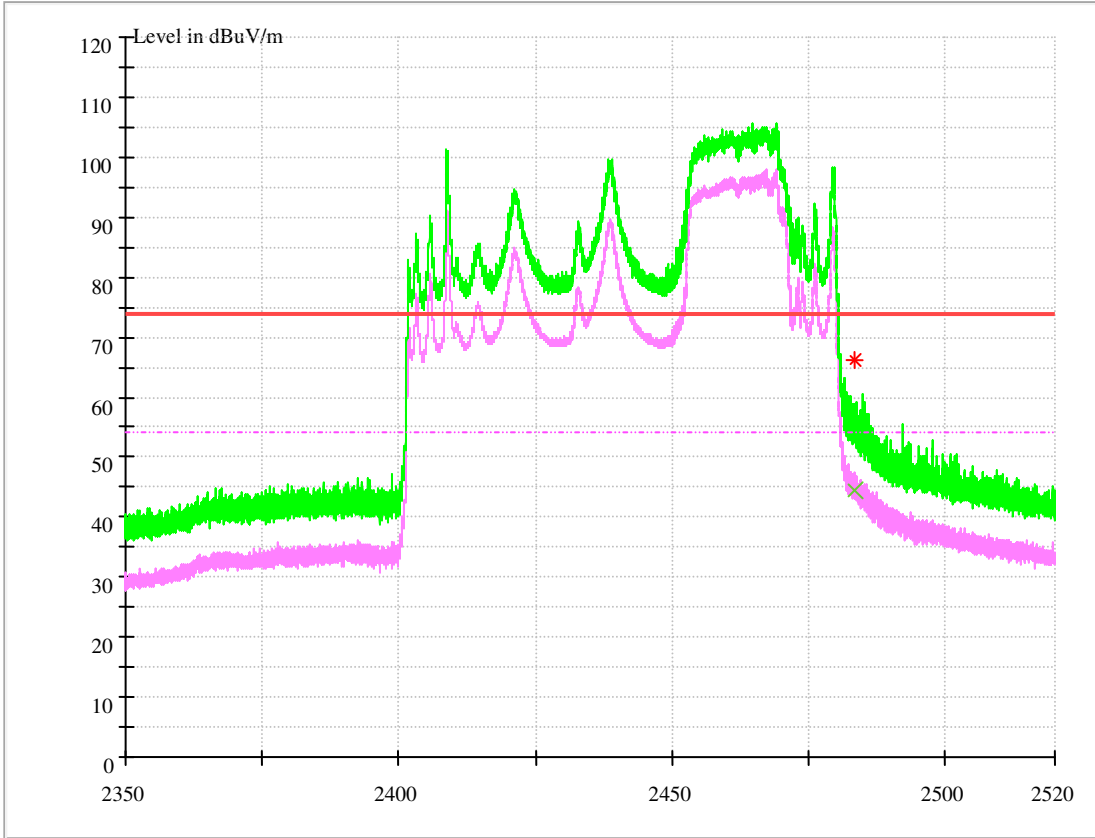

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	44.47	54.00	9.53	150.0	H	253.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	66.24	74.00	7.76	150.0	H	255.0	-6.8

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

### 1.4.6 Test Mode: 11N20@Ant 2

#### 1.4.6.1 Channel 1

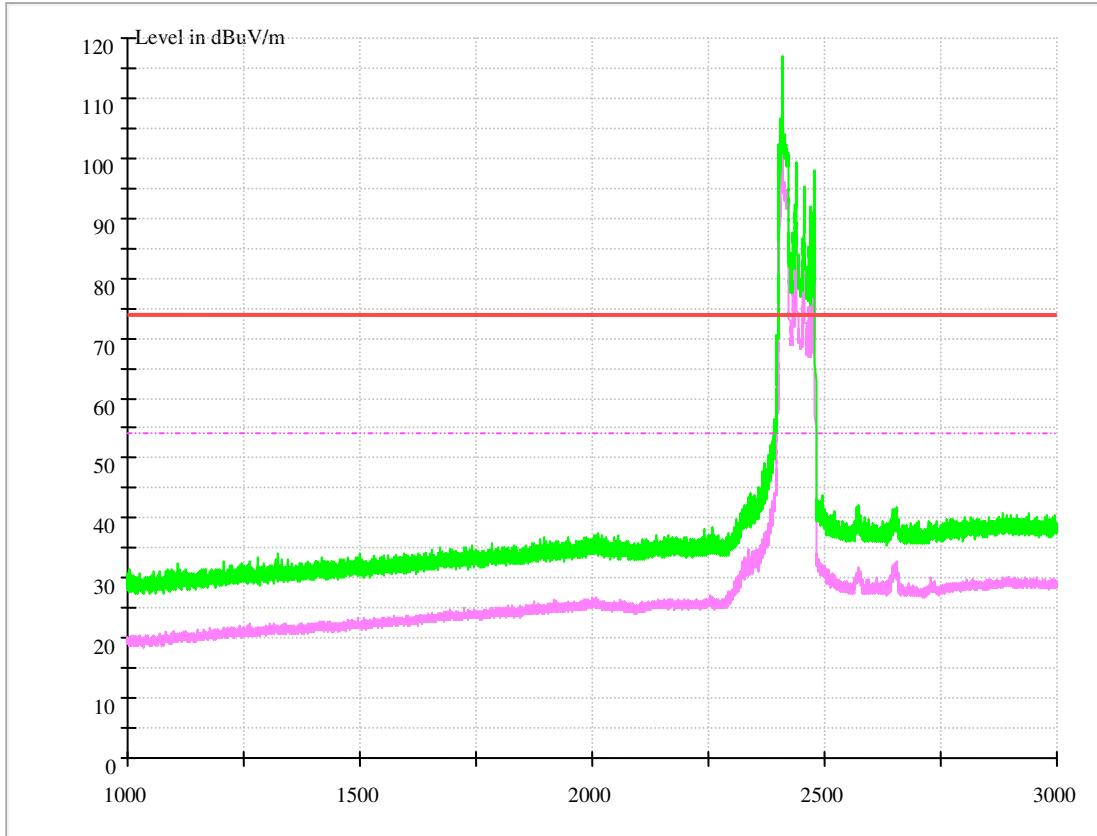

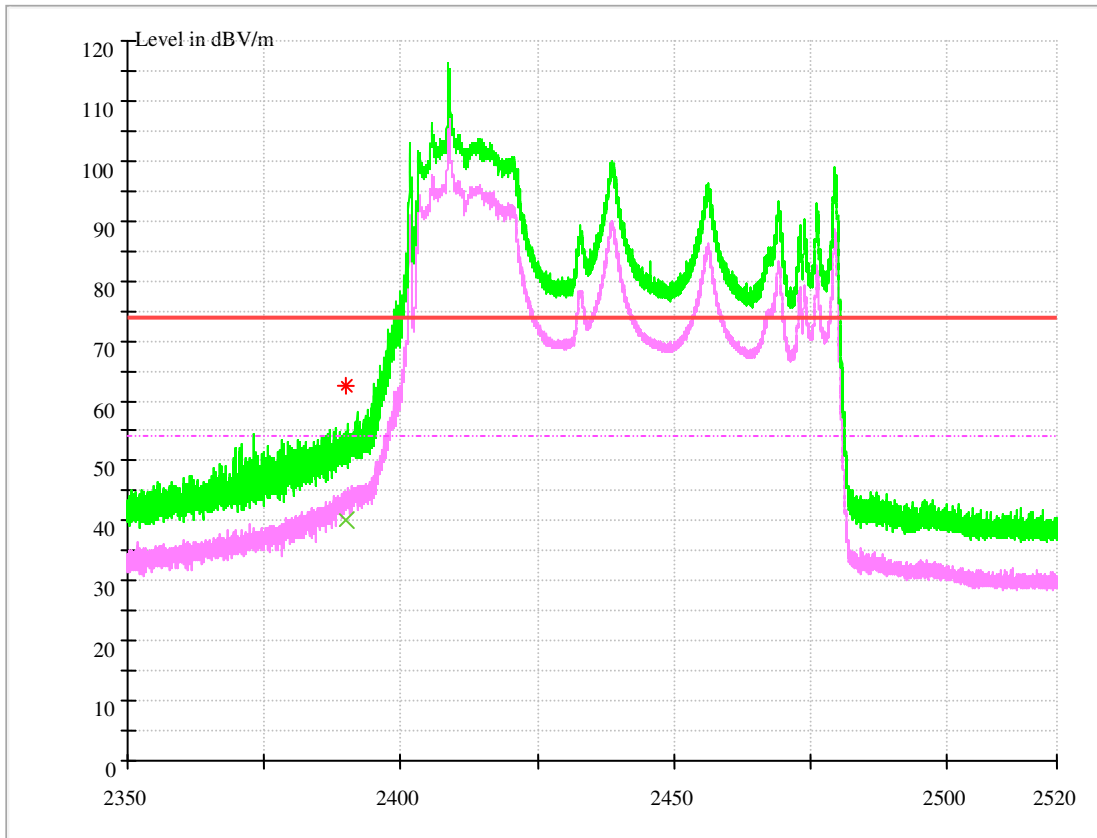

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2390.00000	40.08	54.00	13.92	150.0	V	265.0	-8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2390.00000	62.64	74.00	11.36	150.0	V	288.0	-8.5


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.4.6.2 Channel 10

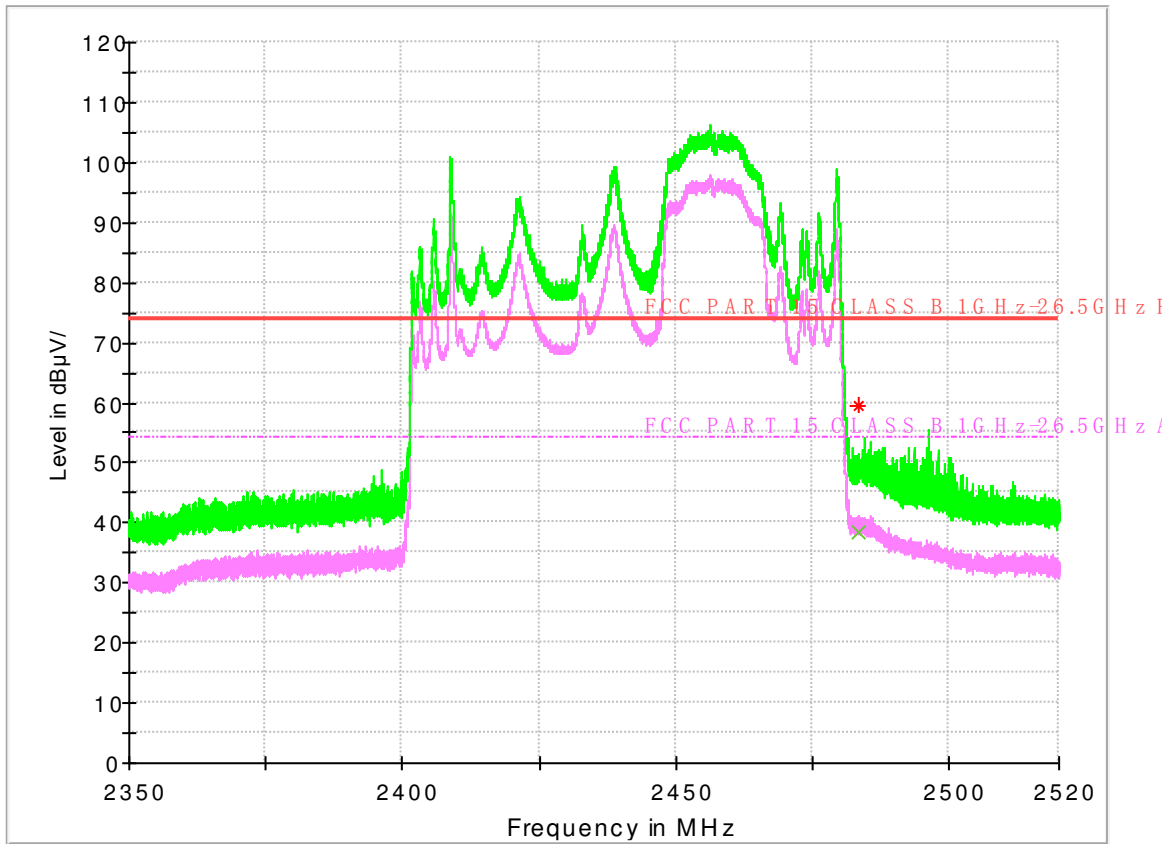

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	38.38	54.00	15.62	150.0	H	221.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	59.38	74.00	14.62	150.0	H	189.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.4.6.3 Channel 11

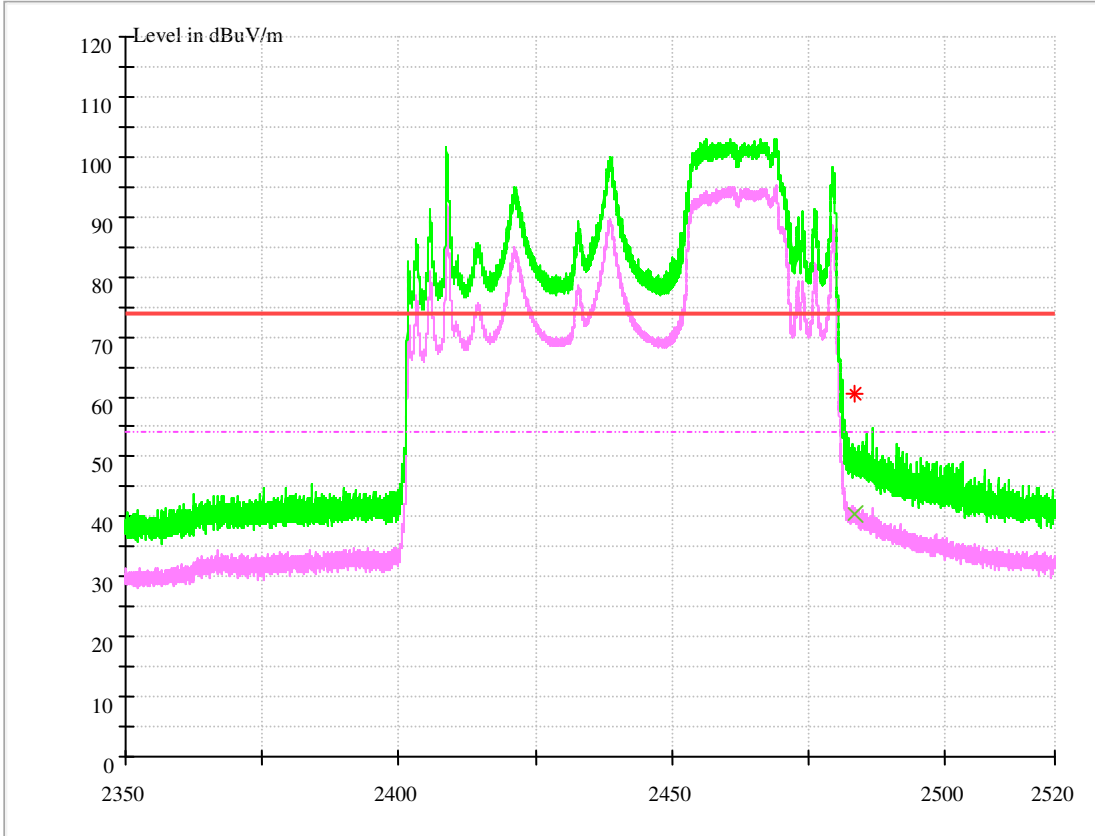

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	40.57	54.00	13.43	150.0	H	214.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	60.46	74.00	13.54	150.0	H	141.0	-6.8


Note:


- 1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)  
The reading level is calculated by software which is not shown in the sheet.
- 2, Margin = Limit – Level



1.4.7 Test Mode: MIMO 11N20

1.4.7.1 Channel 1

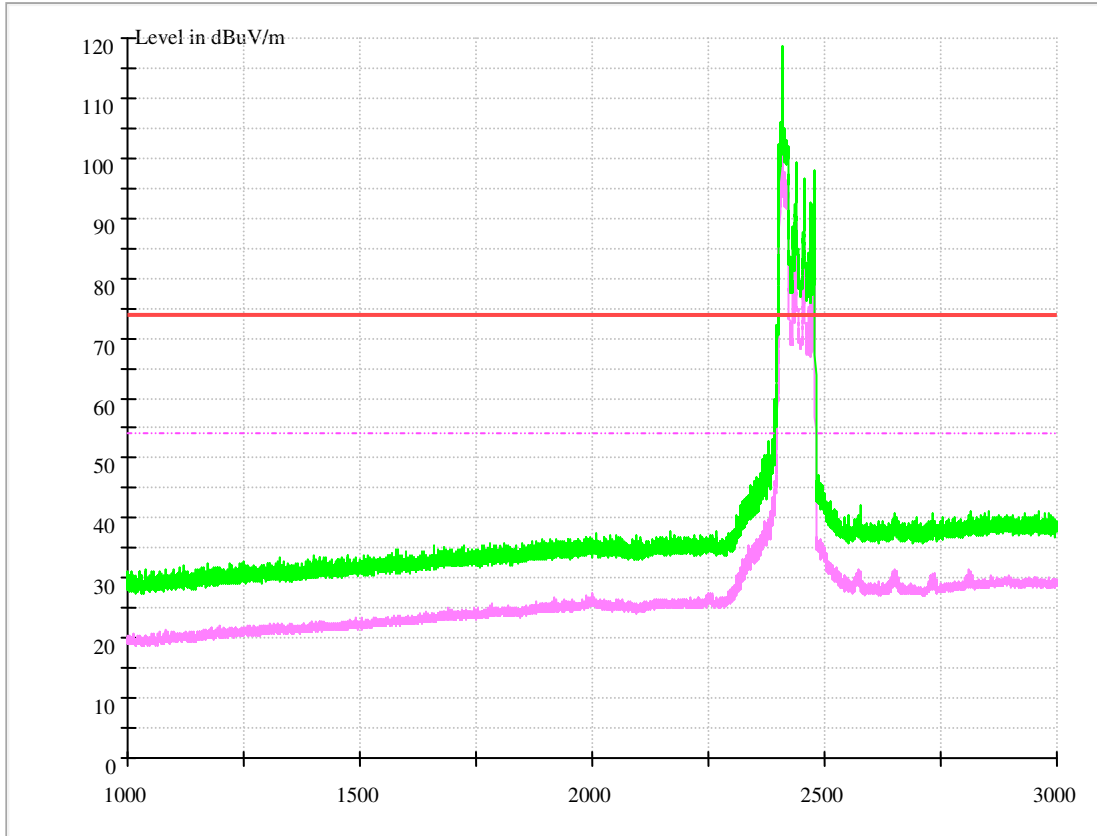

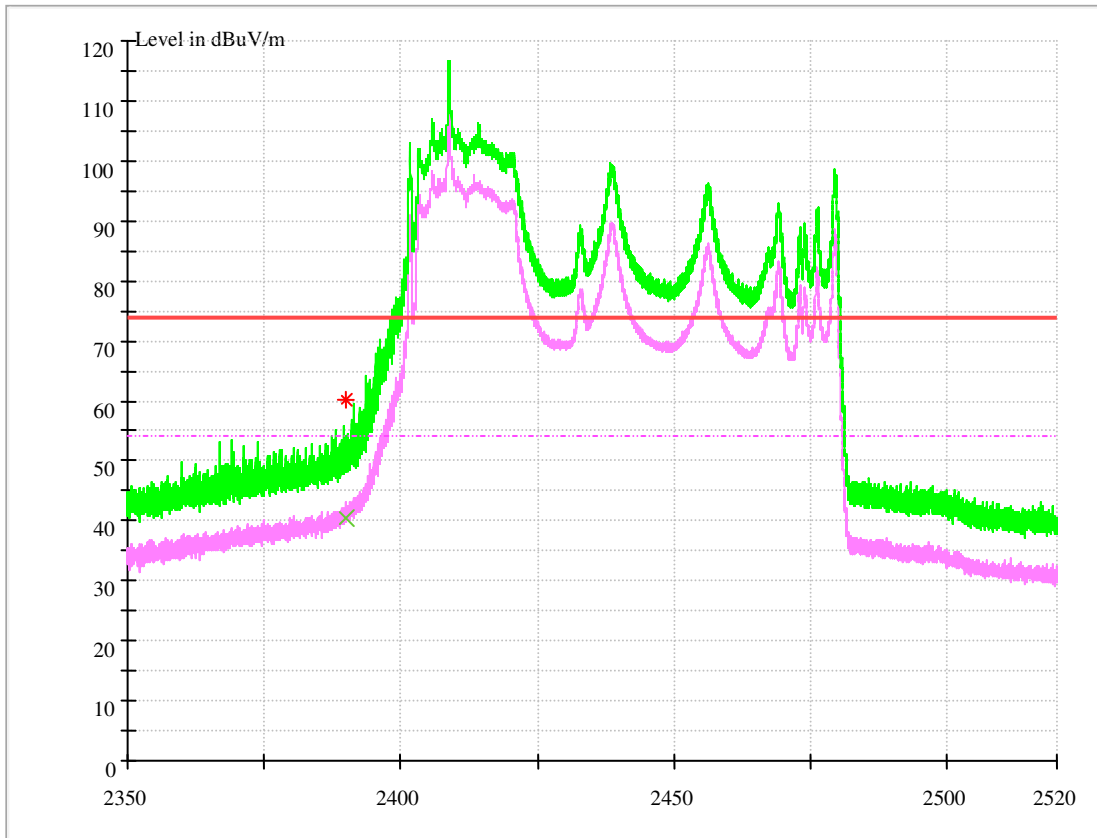

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.000000	40.45	54.00	13.55	150.0	H	225.0	-8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.000000	60.05	74.00	13.95	150.0	H	99.0	-8.5


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4.7.2 Channel 10

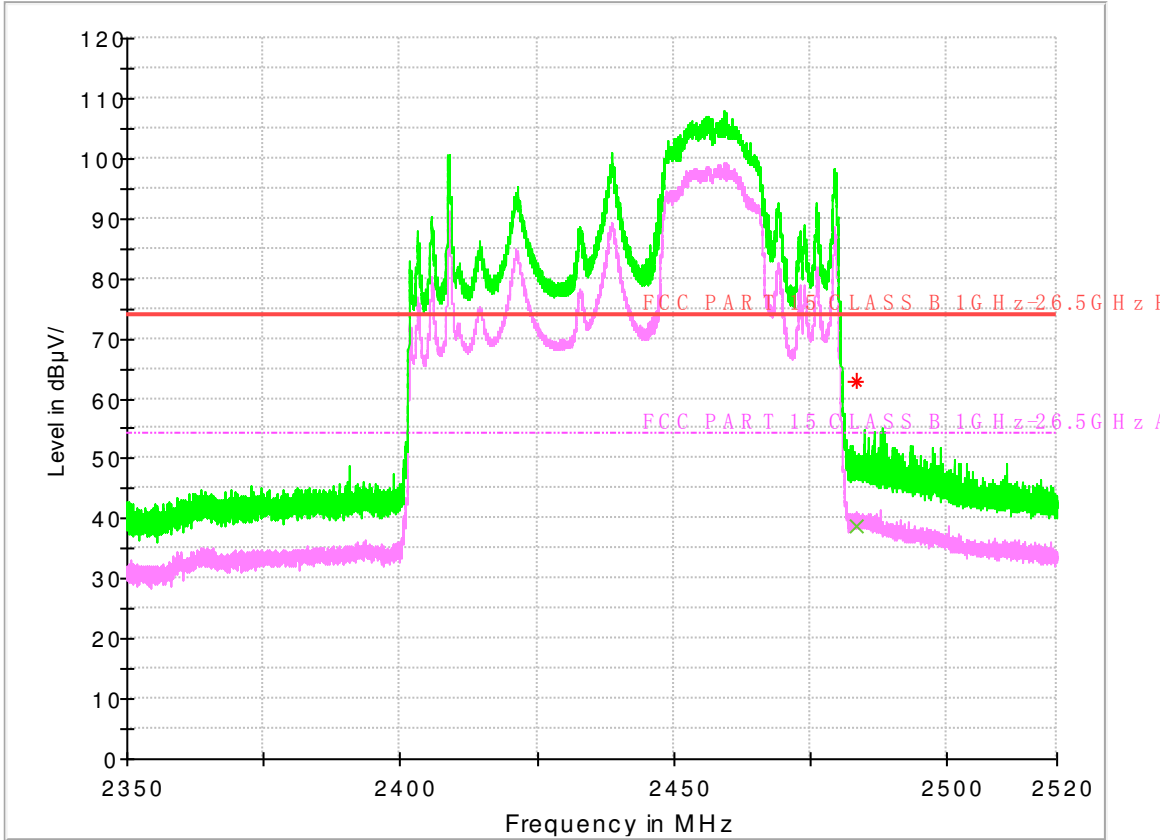

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.500000	38.91	54.00	15.09	150.0	H	188.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.500000	62.94	74.00	11.06	150.0	H	216.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.4.7.3 Channel 11

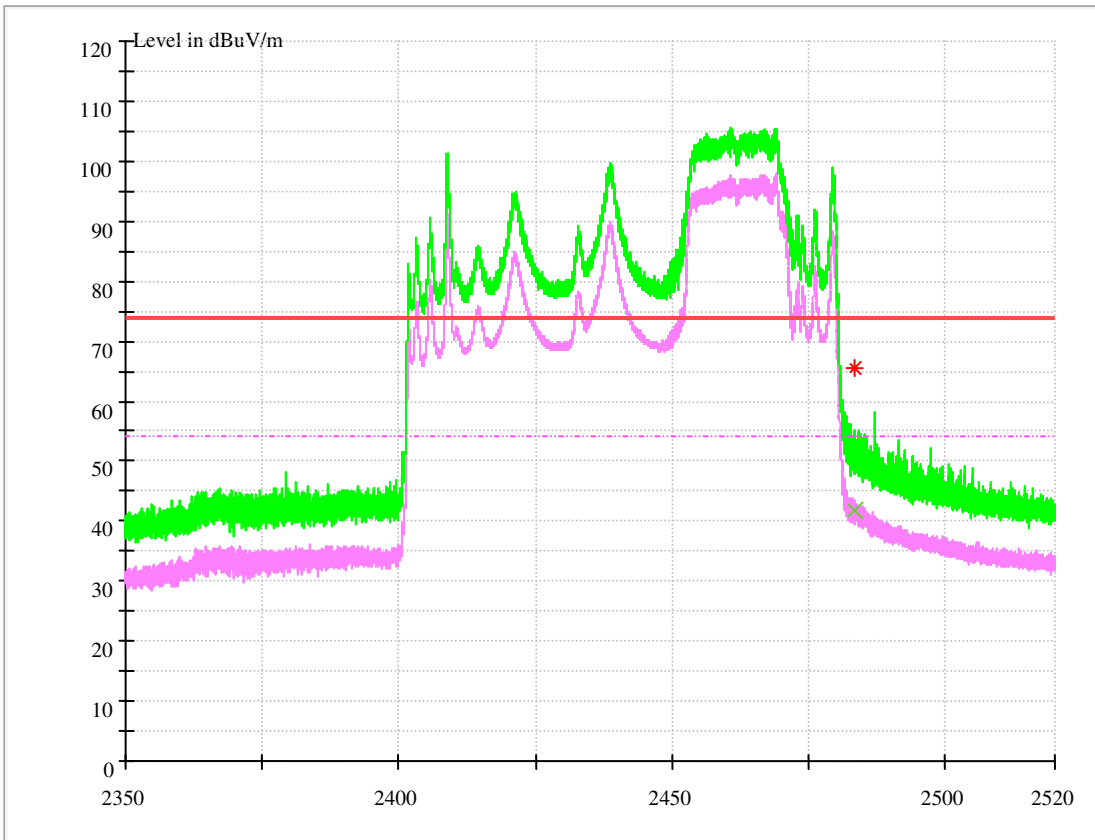

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	41.88	54.00	12.12	150.0	H	253.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	65.60	74.00	8.40	150.0	H	231.0	-6.8

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

### 1.4.8 Test Mode: 11N40@Ant 1

#### 1.4.8.1 Channel 3

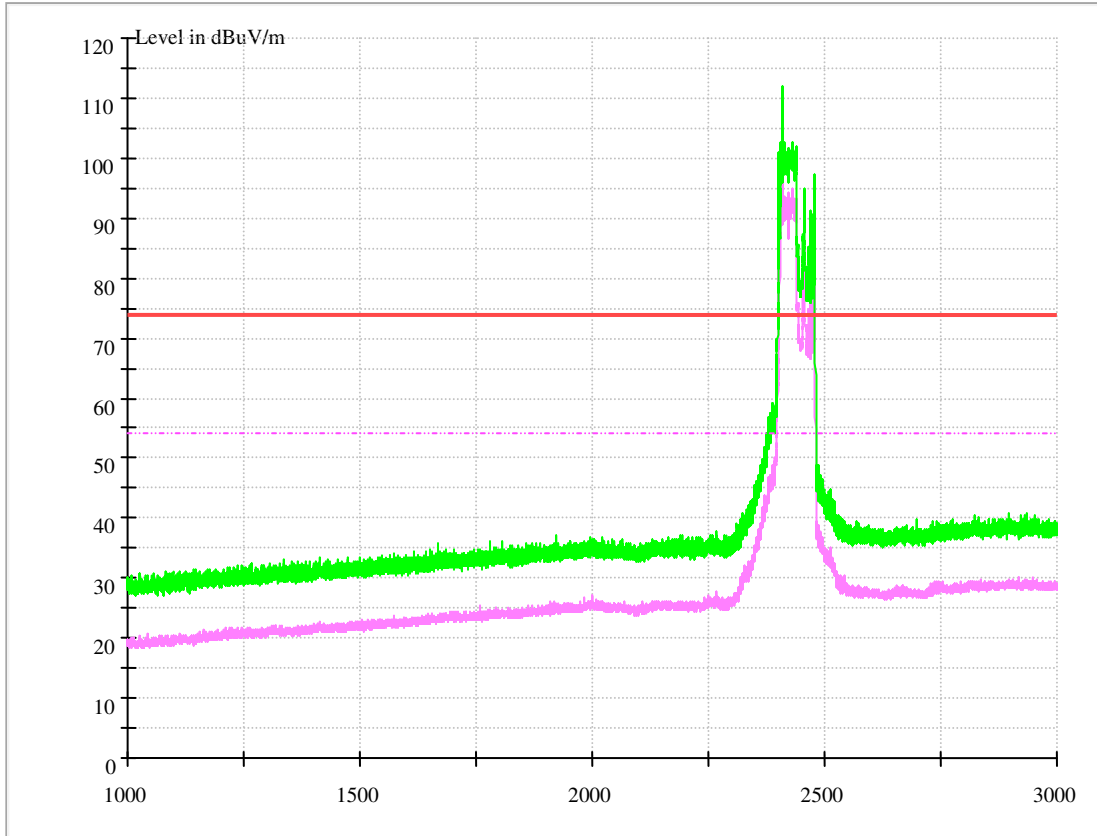

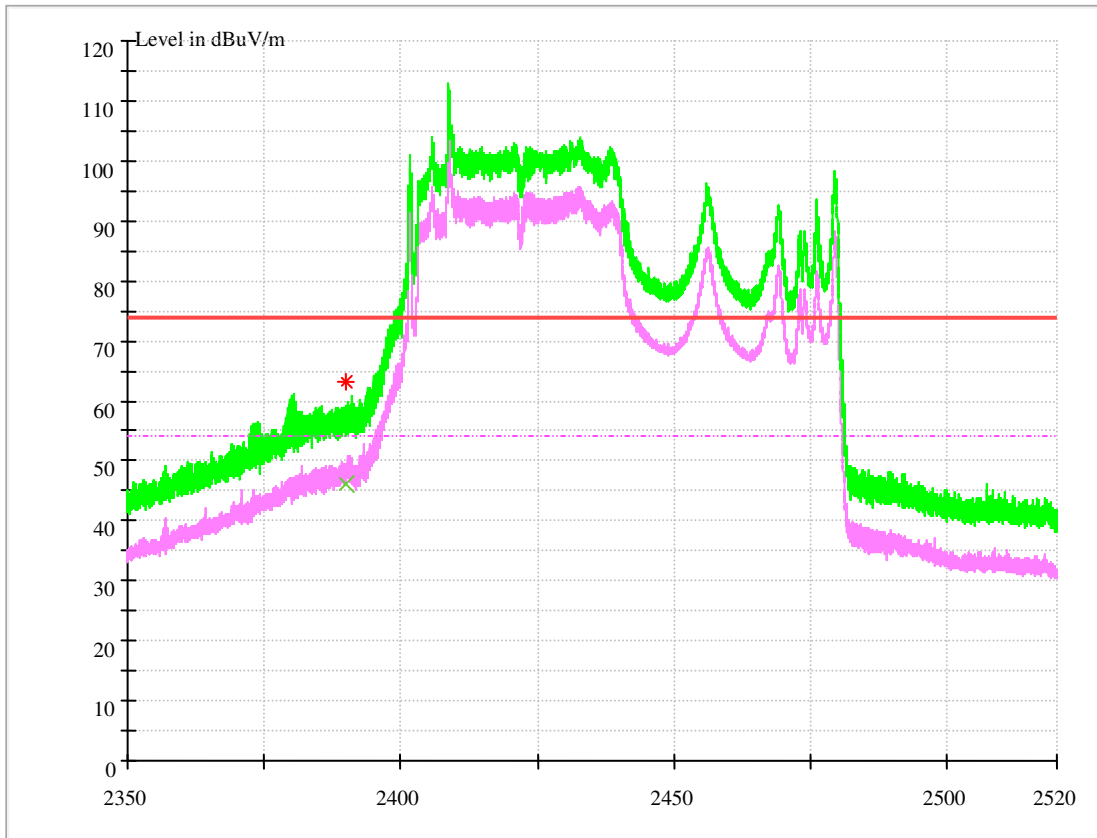

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.000000	46.18	54.00	7.82	150.0	H	233.0	-8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.000000	63.20	74.00	10.80	150.0	H	222.0	-8.5


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4.8.2 Channel 9

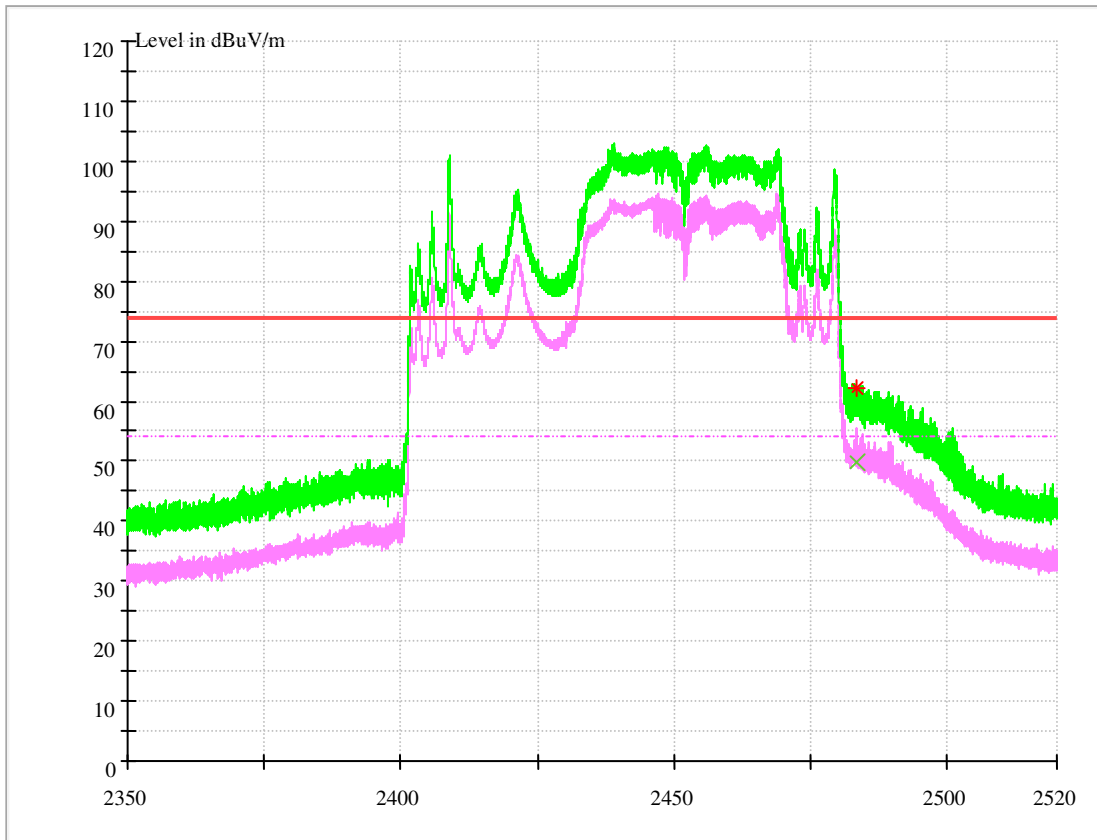

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	49.72	54.00	5.28	150.0	H	258.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	62.05	74.00	11.95	150.0	H	277.0	-6.8

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.


2, Margin = Limit - Level

1.4.9 Test Mode: 11N40@Ant 2

1.4.6.1 Channel 3

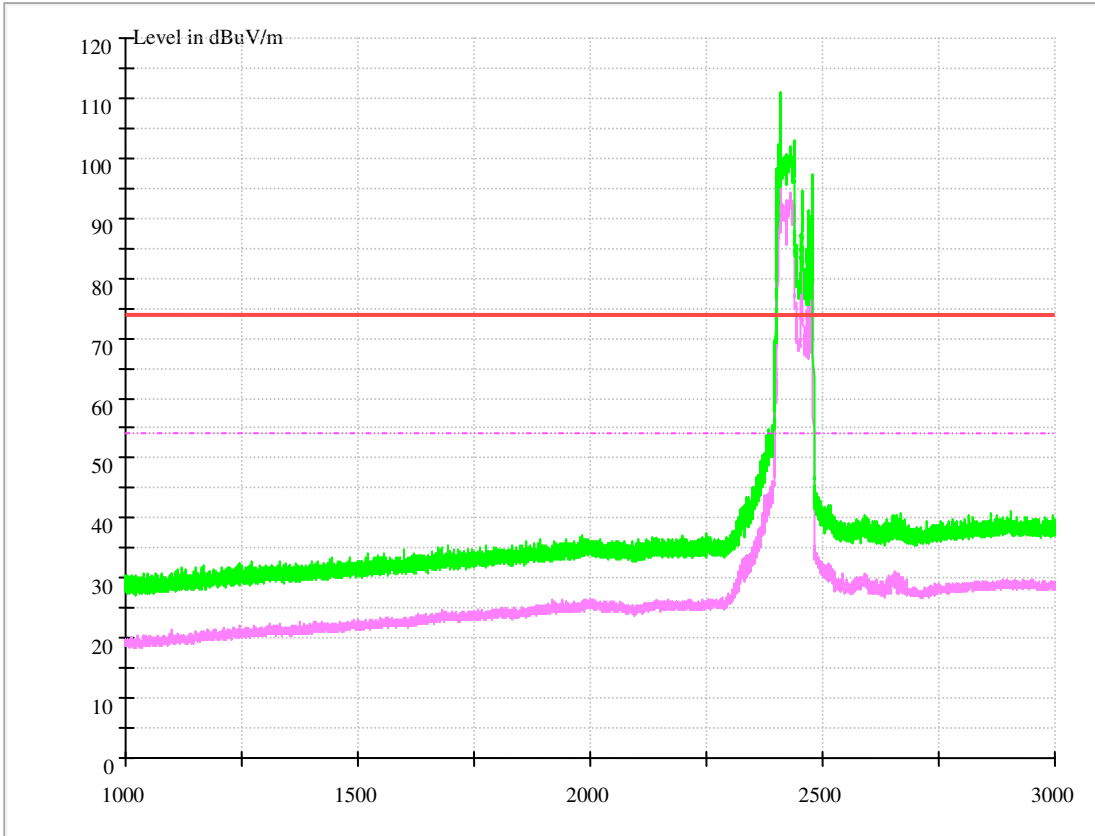



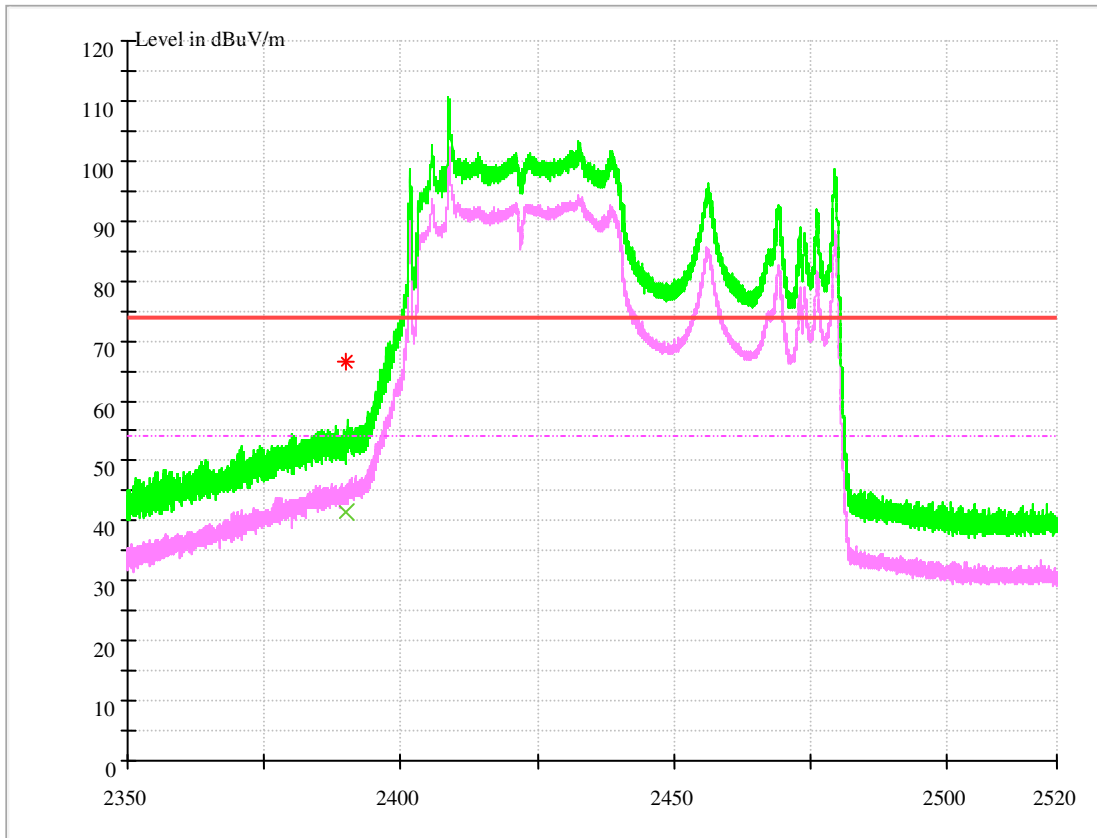

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2390.00000	41.33	54.00	12.67	150.0	V	266.0	-8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2390.00000	66.36	74.00	7.64	150.0	V	266.0	-8.5


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4.9.2 Channel 9

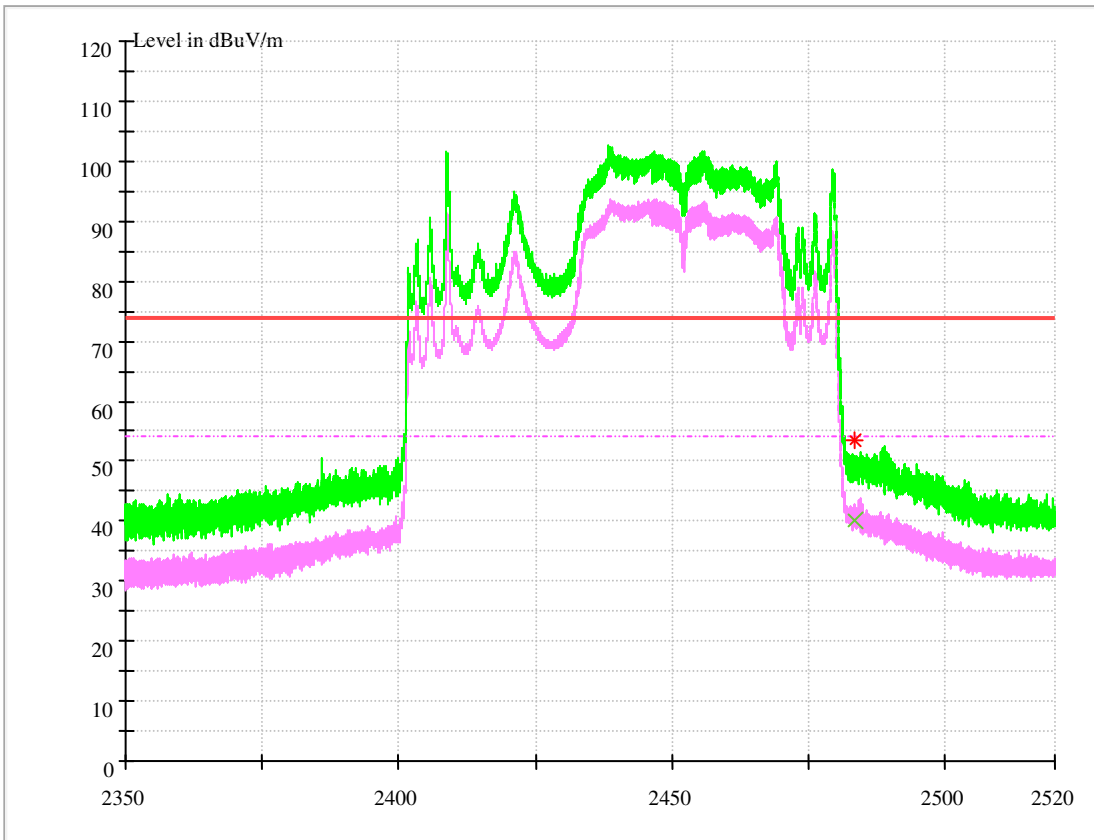

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	39.98	54.00	14.02	150.0	H	225.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	53.59	74.00	20.41	150.0	H	216.0	-6.8

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

### 1.4.10 Test Mode: MIMO 11N40

#### 1.4.10.1 Channel 3

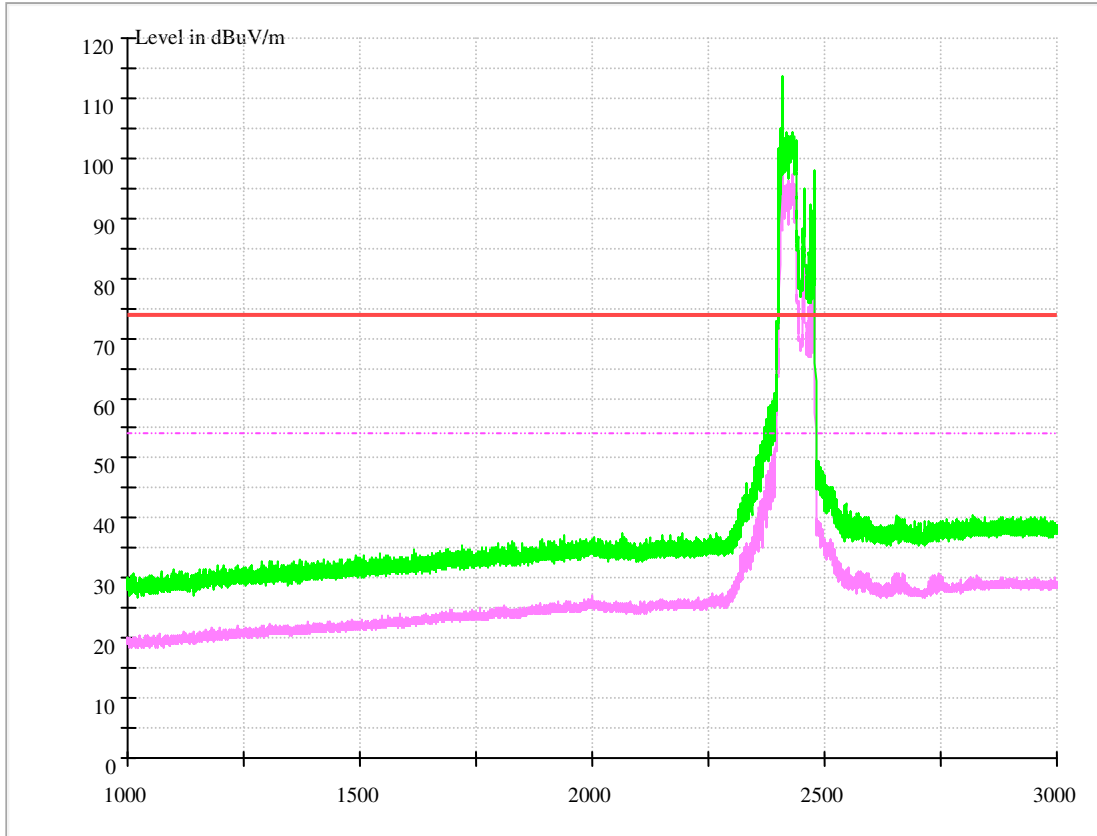

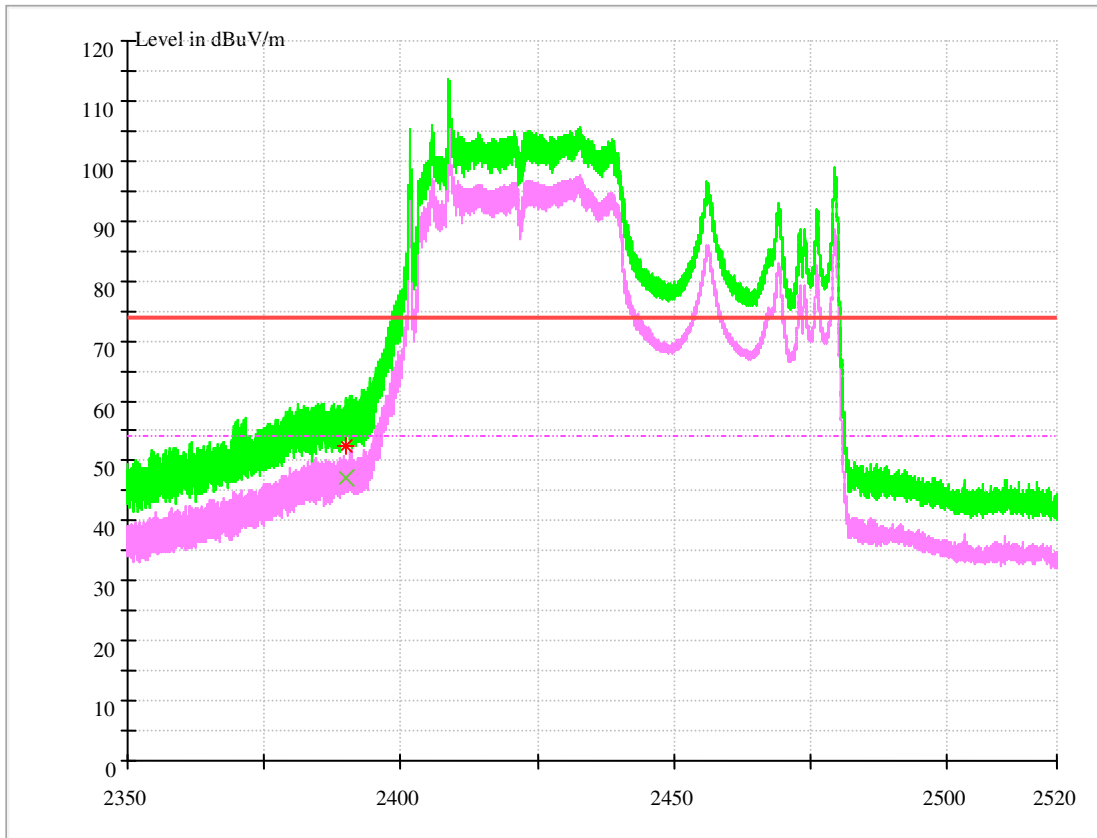

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.00000	47.03	54.00	6.97	150.0	H	189.0	-8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.00000	52.65	74.00	21.35	150.0	H	129.0	-8.5


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4.10.2 Channel 9

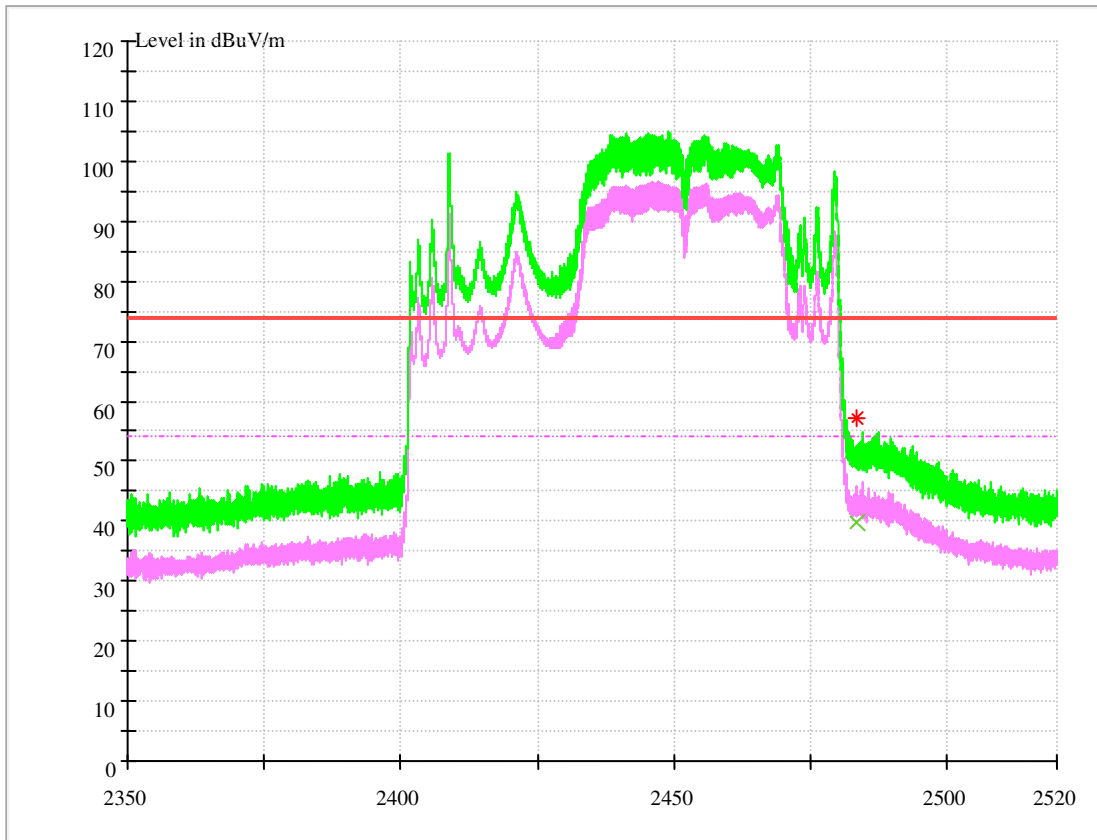

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.500000	39.92	54.00	14.08	150.0	H	236.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.500000	57.18	74.00	16.82	150.0	H	280.0	-6.8

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

### 1.5 Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 3 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

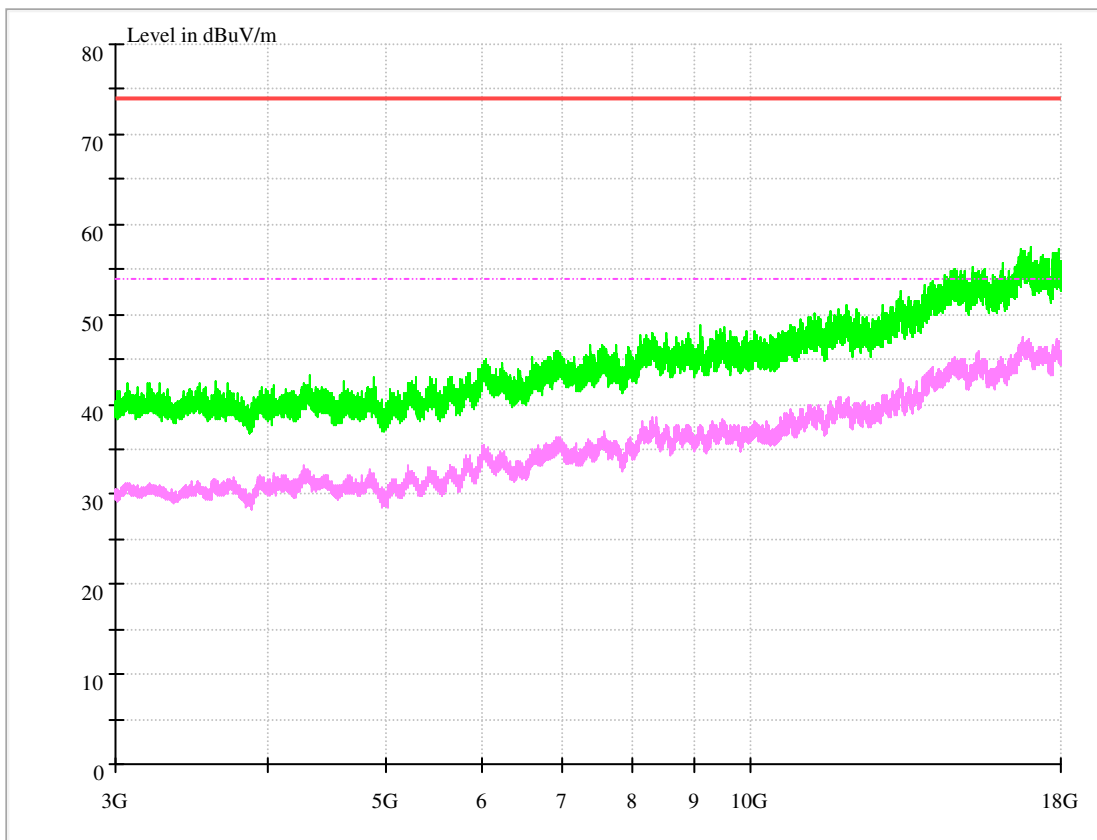




1.12 Part 5: Testing Range of "18 GHz to 26.5 GHz"

NOTE: No peak found in the Test Range of "18 GHz to 26.5GHz"

## Appendix J: Conducted Emission at Power Port

Note: RBW =9 kHz, VBW = 30 kHz

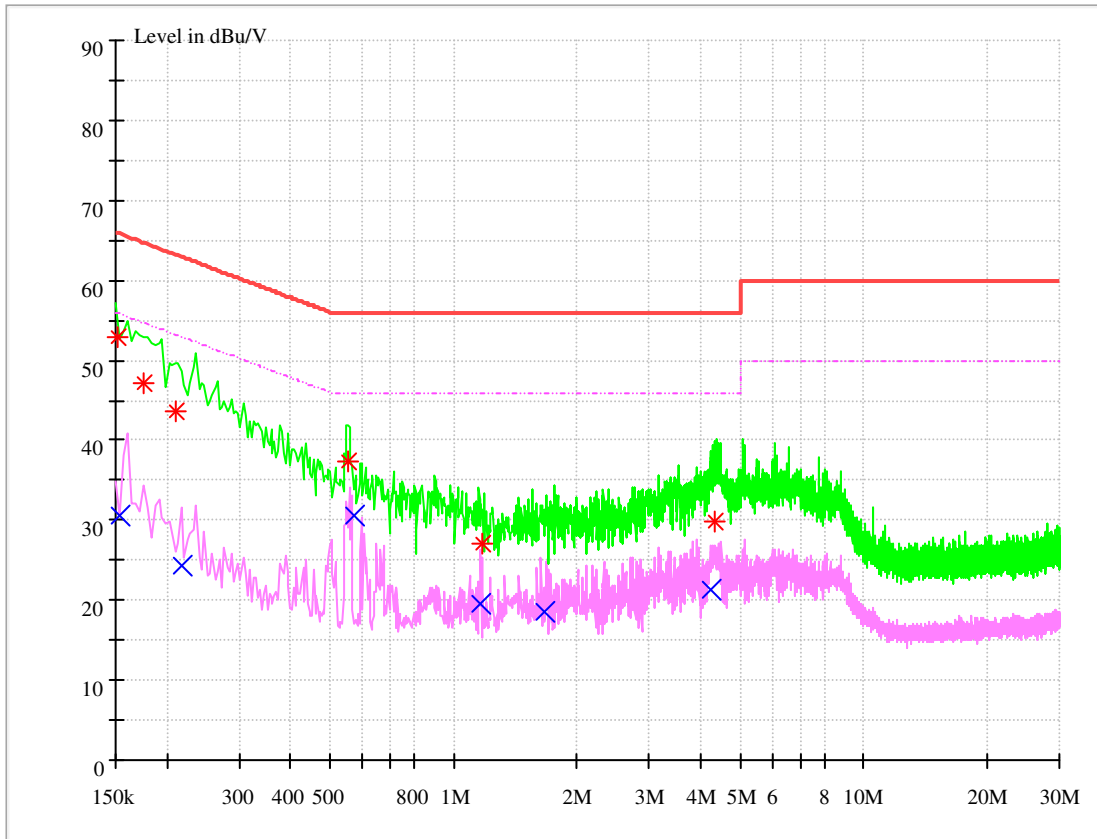

### MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Transd. (dB)	Margin (dB)	Line	PE
0.153204	30.48	55.82	9.7	25.35	N	FLO
0.218262	24.28	52.89	9.7	28.61	N	FLO
0.571819	30.68	46.00	9.7	15.32	N	FLO
1.161510	19.53	46.00	9.7	26.47	N	FLO
1.659864	18.50	46.00	9.7	27.50	N	FLO
4.220263	21.27	46.00	9.8	24.73	N	FLO



**MEASUREMENT RESULT: PK Detector**

Frequency (MHz)	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Transd. (dB)	Margin (dB)	Line	PE
0.151050	52.89	65.94	9.7	13.05	N	FLO
0.176428	47.20	64.65	9.7	17.45	N	FLO
0.209379	43.65	63.23	9.7	19.58	N	FLO
0.552484	37.35	56.00	9.7	18.65	N	FLO
1.173834	26.97	56.00	9.7	29.03	N	FLO
4.334275	29.77	56.00	9.8	26.23	L1	FLO

## Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

---

END