



P_{uw}:
















1.48 11N40MIMO_Ant2_2452


Pref:

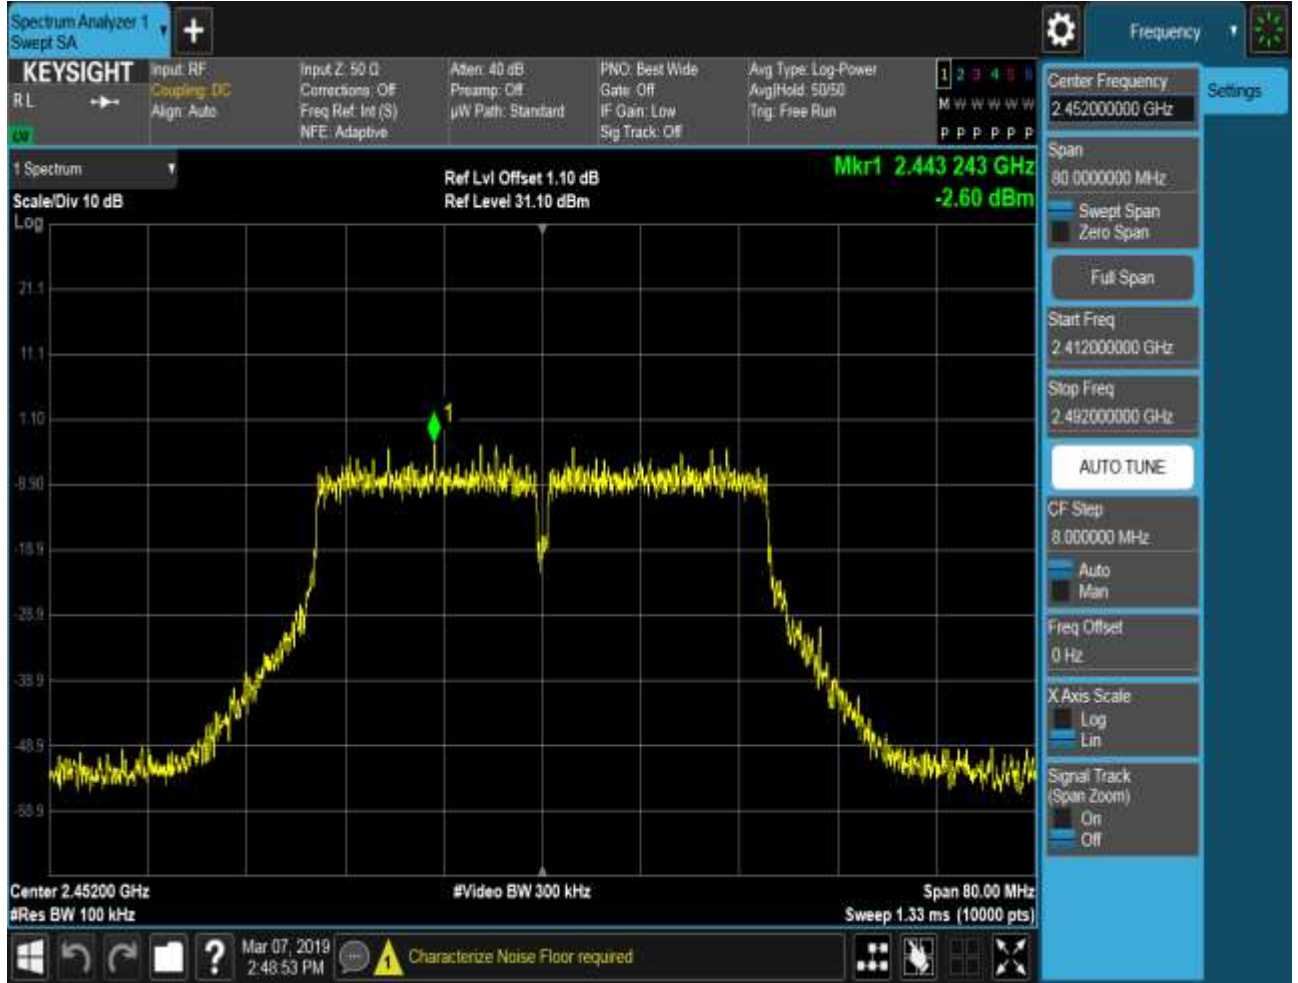




P_{uw}:



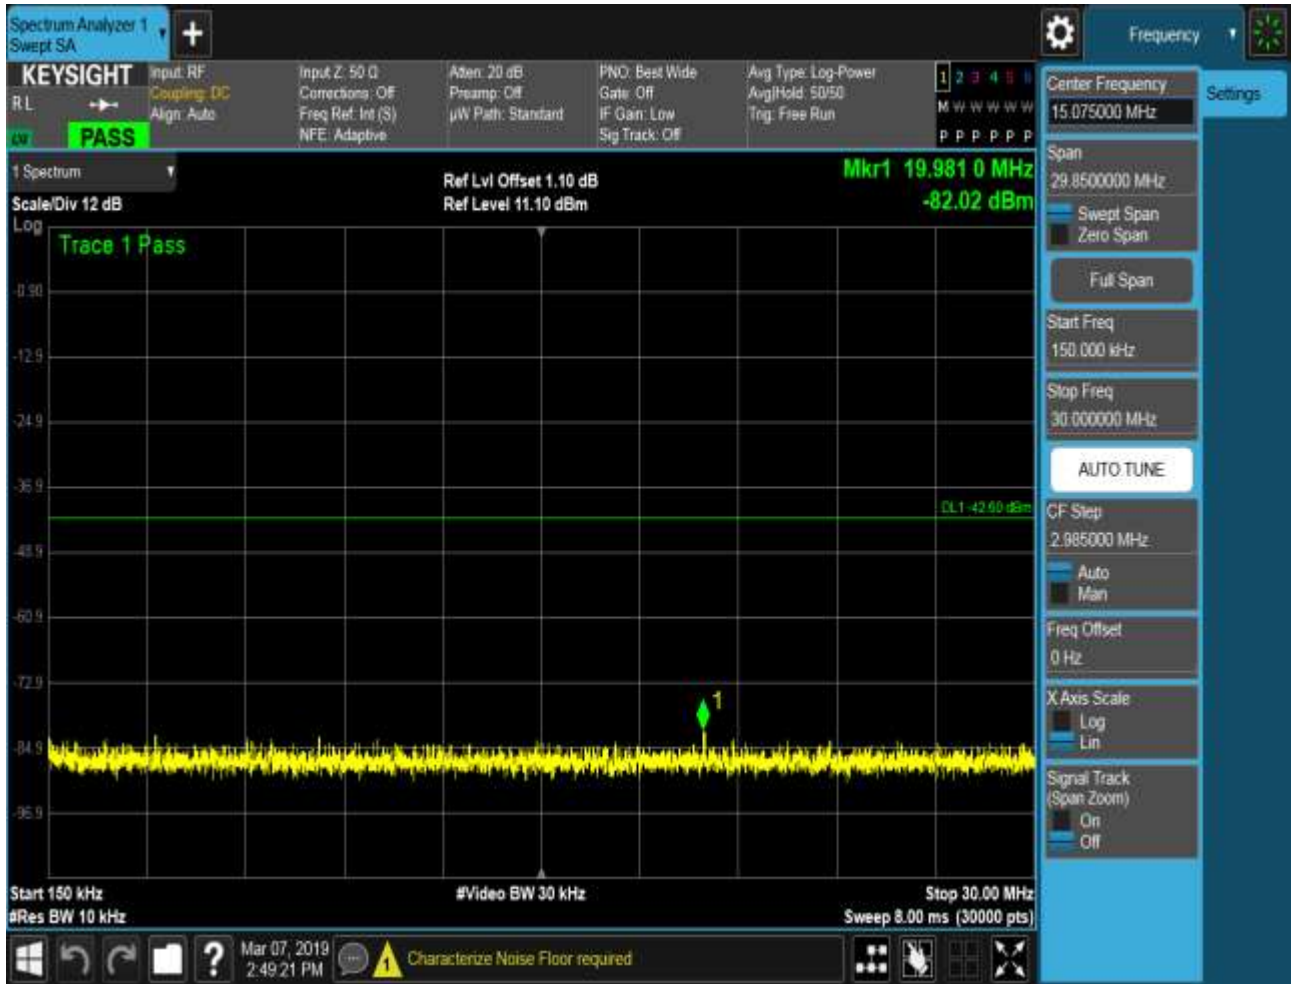



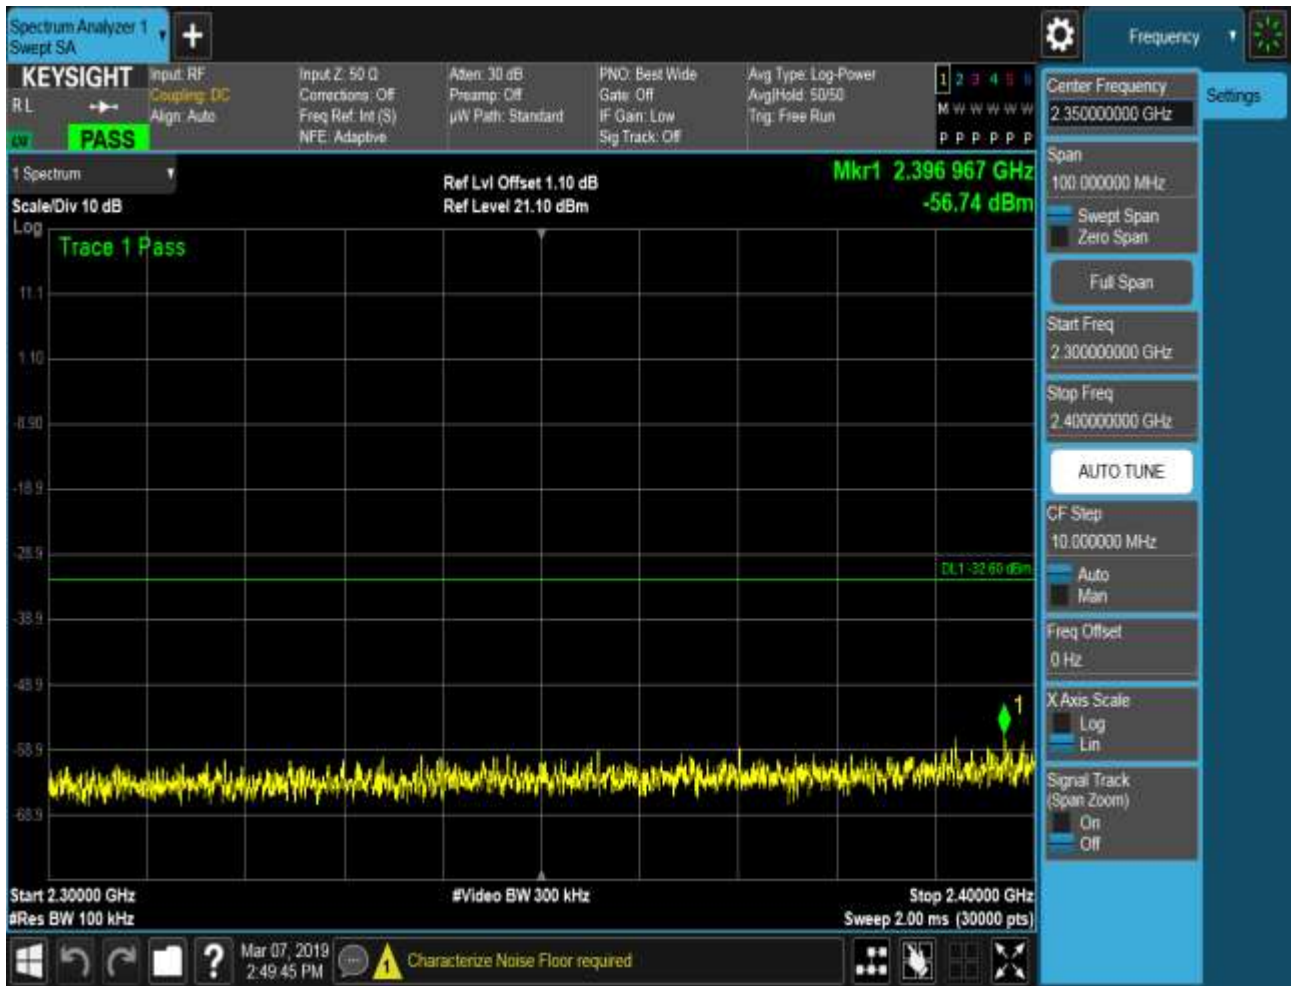







Appendix H: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case.

Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.


Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered



1.1 Part 1: Testing Range of “9 kHz to 30MHz”

Note 1: The test results and plot for testing range of “9 kHz to 30 MHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

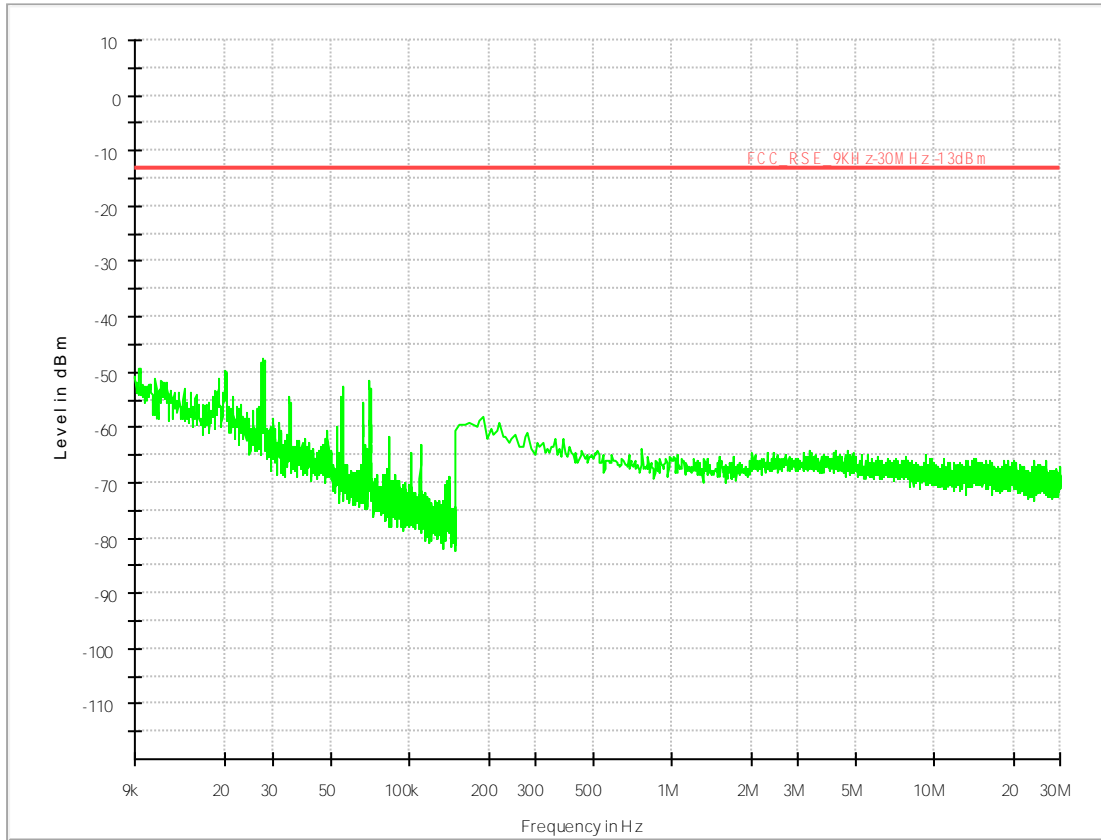


1.2 Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

Full Spectrum

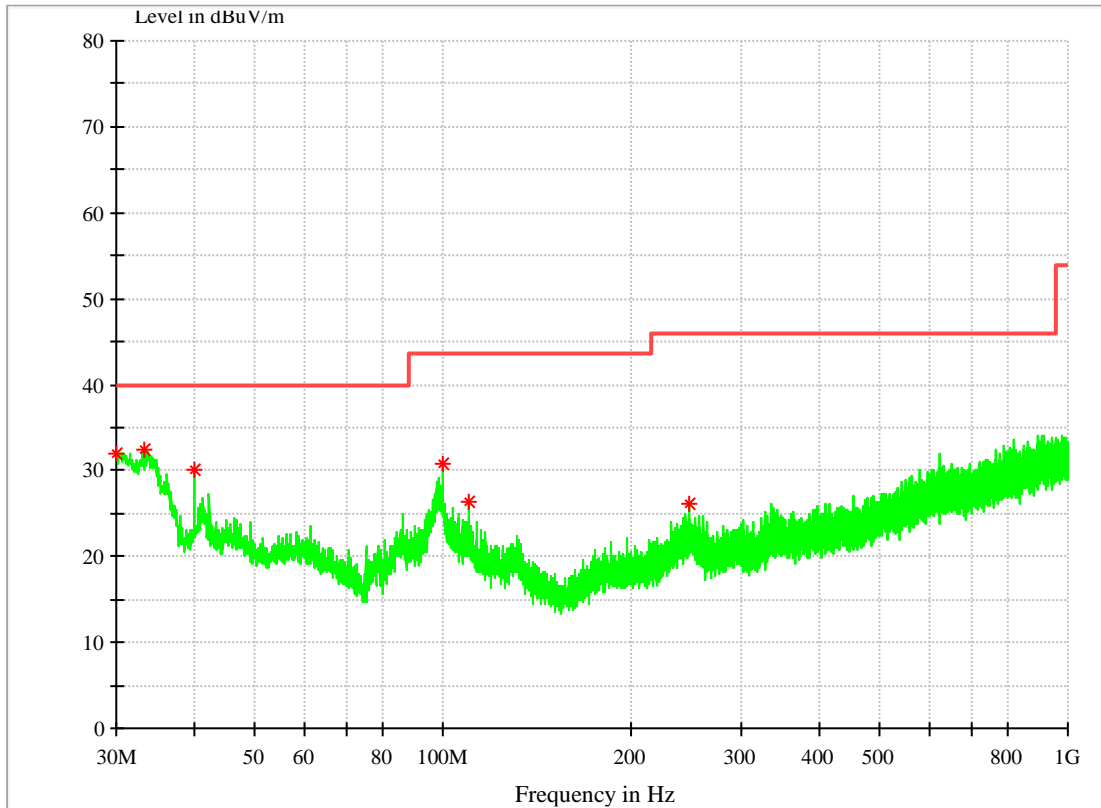

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
30.097000	32.06	40.00	7.94	100.0	V	301.0	12.6
33.249500	32.49	40.00	7.51	100.0	V	135.0	12.9
39.991000	30.20	40.00	9.80	100.0	V	74.0	14.4
99.985500	30.69	43.50	12.81	100.0	V	316.0	14.0
109.976500	26.34	43.50	17.16	100.0	V	104.0	13.0
248.395500	26.14	46.00	19.86	100.0	V	0.0	13.3

Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level


1.3 Part 3: Testing Range of “1 GHz to 3 GHz”

Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.


Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

1.3.1 Test Mode: 11B

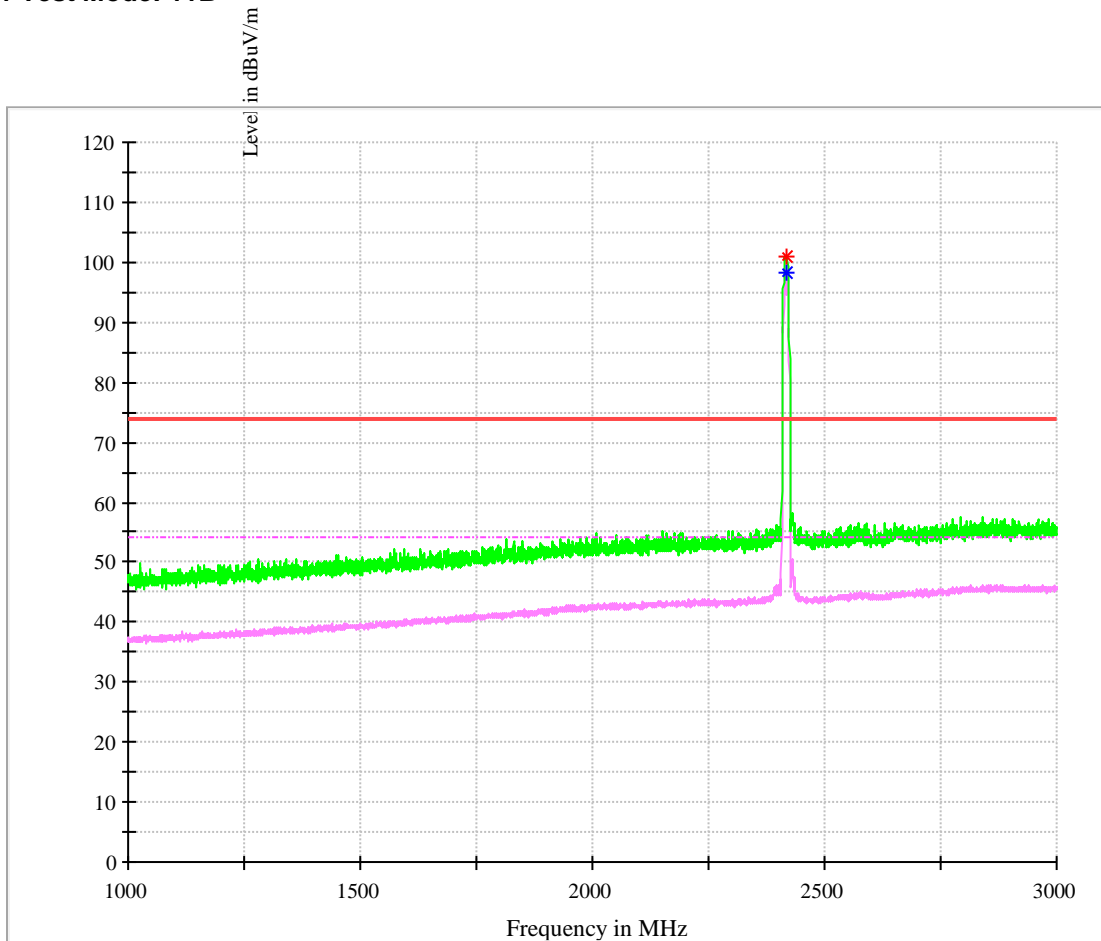

1.3.1.1 Channel 1 @Ant 1

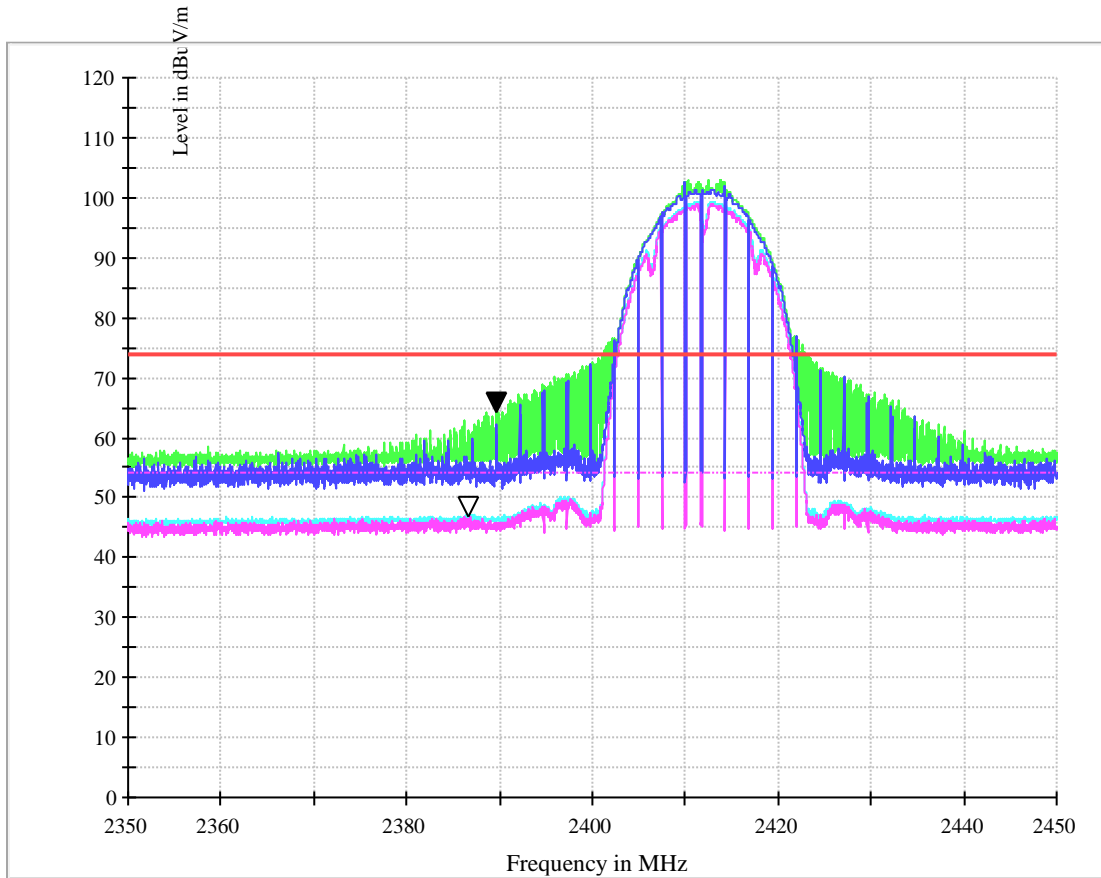

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	47.14	54.00	6.86	150.0	H	45.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	64.43	74.00	9.57	150.0	H	46.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.1.2 Channel 2 @Ant 1

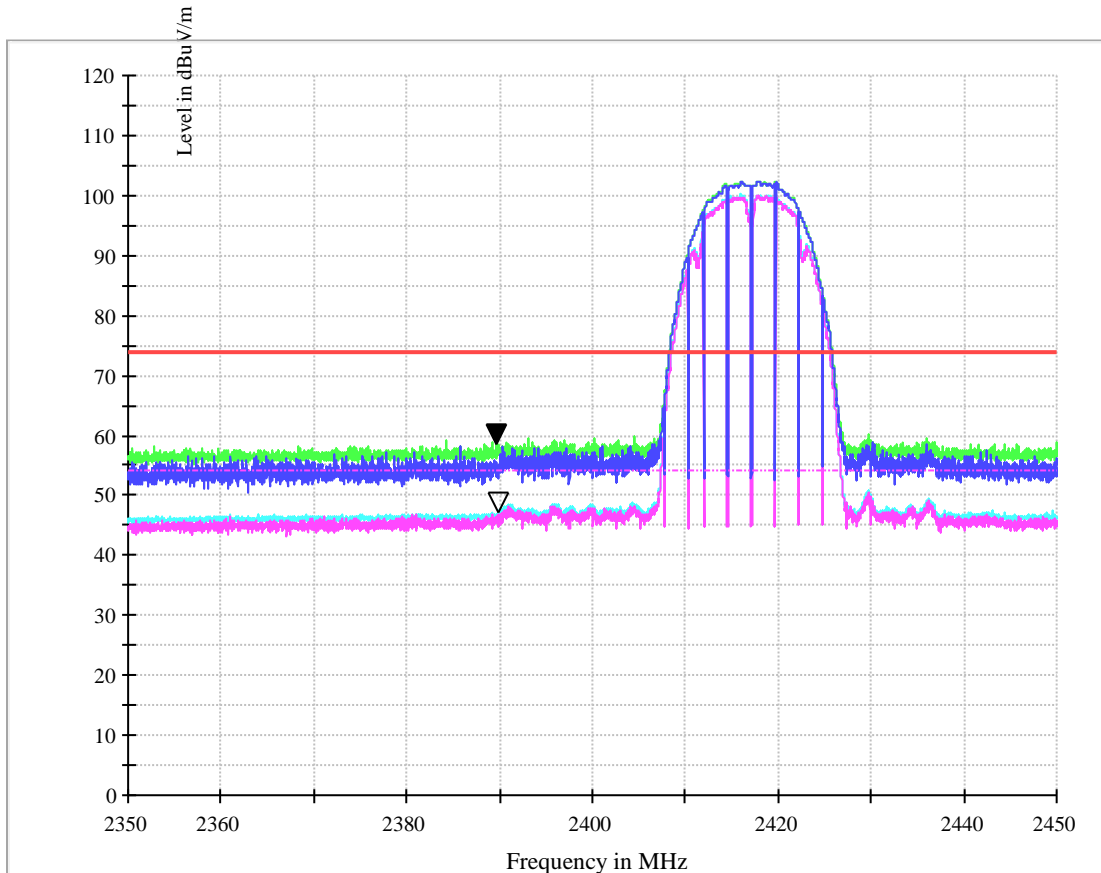

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	47.38	54.00	6.62	150.0	H	36.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
-----------------	----------------	----------------	-------------	-------------	-----	---------	--------------



2390	58.68	74.00	15.32	150.0	H	36.0	-6.8
------	-------	-------	-------	-------	---	------	------


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.1.3 Channel 10@Ant 1

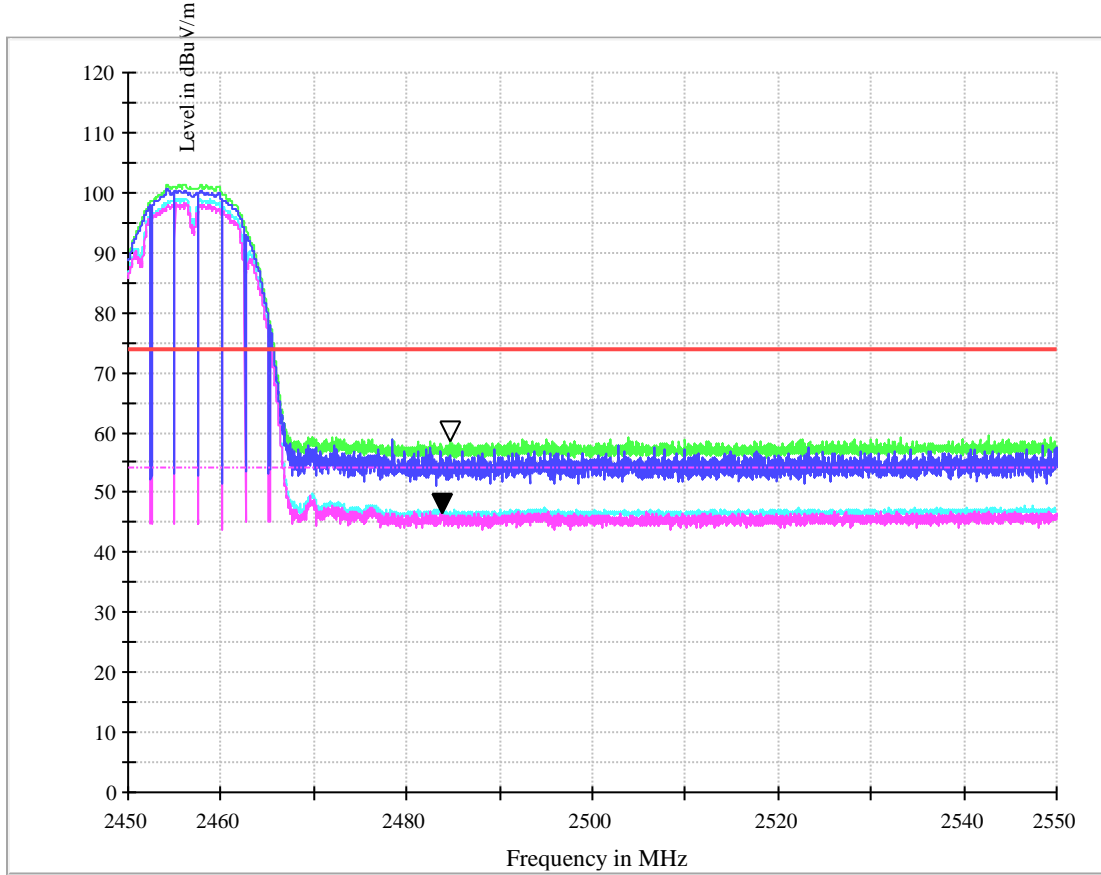

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	46.96	54.00	7.04	150.0	H	47.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	58.75	74.00	15.25	150.0	H	43.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.1.4 Channel 11@Ant 1

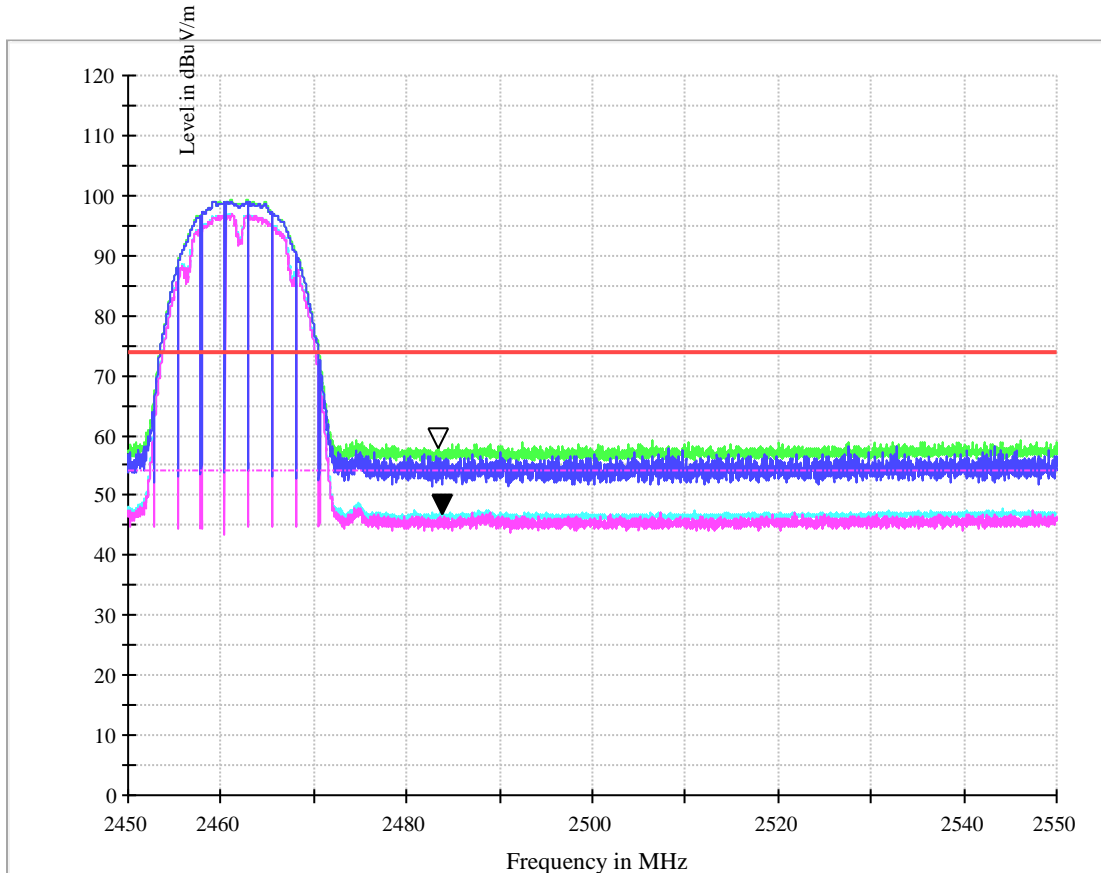

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	47.05	54.00	7.033	150.0	H	47.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)



2483.5	58.30	74.00	15.463	150.0	H	32.0	-10.2
--------	-------	-------	--------	-------	---	------	-------


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.1.5 Channel 1 @Ant 2

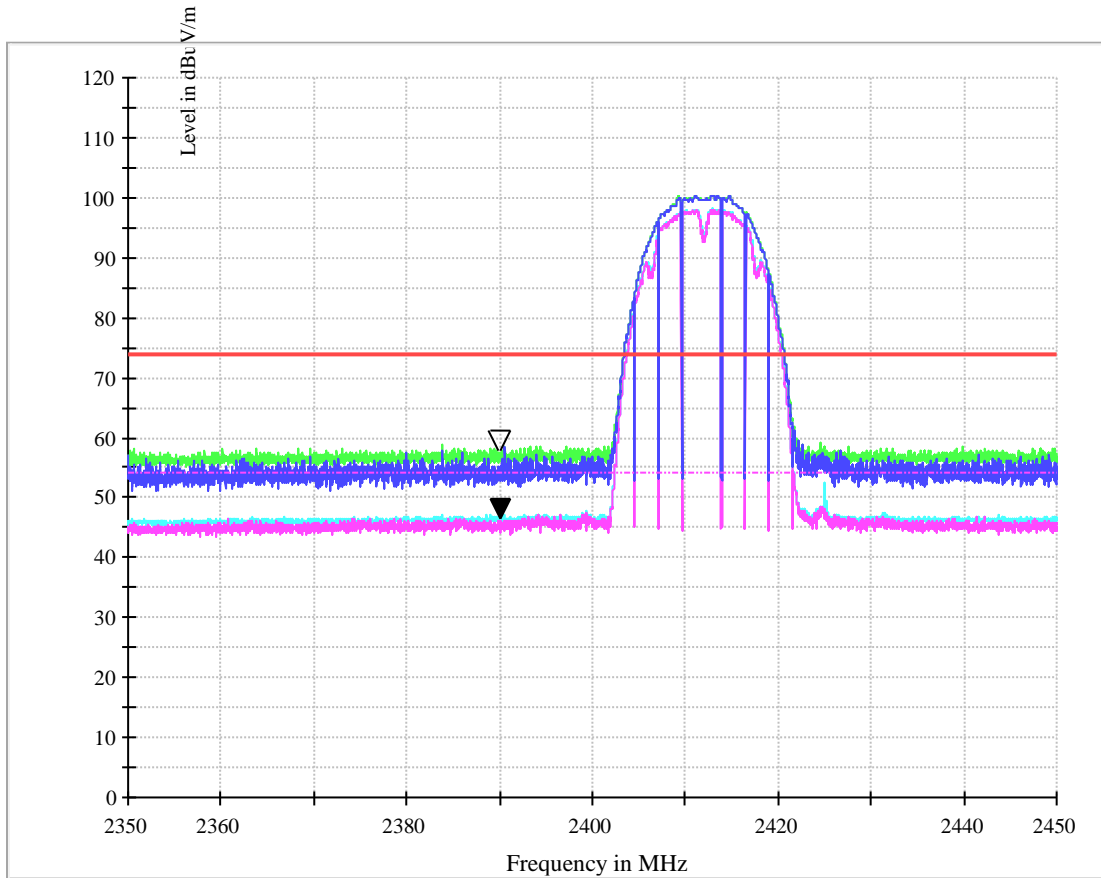

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	46.96	54.00	7.04	150.0	H	38.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	58.09	74.00	15.91	150.0	H	43.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.1.6 Channel 2 @Ant 2

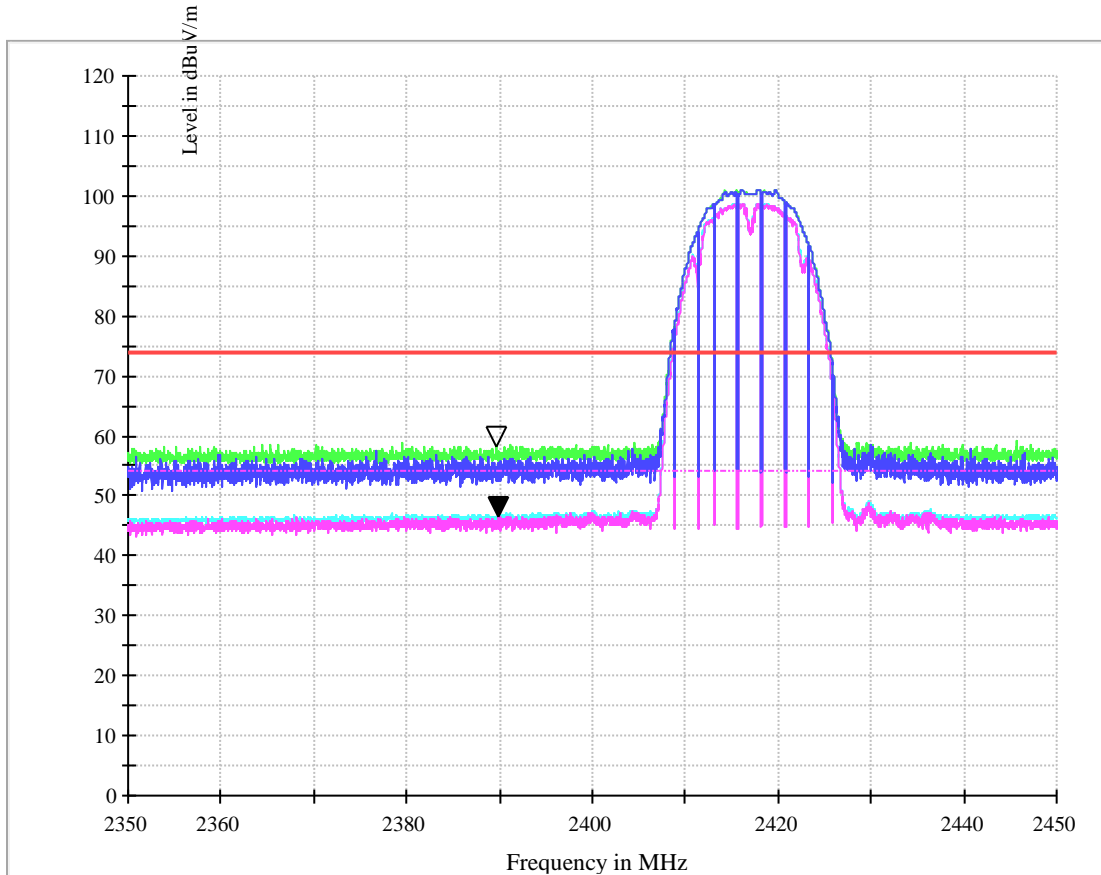

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	45.89	54.00	8.11	150.0	H	74.0	-6.8



MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	58.50	74.00	15.50	150.0	H	46.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.1.7 Channel 10@Ant 2

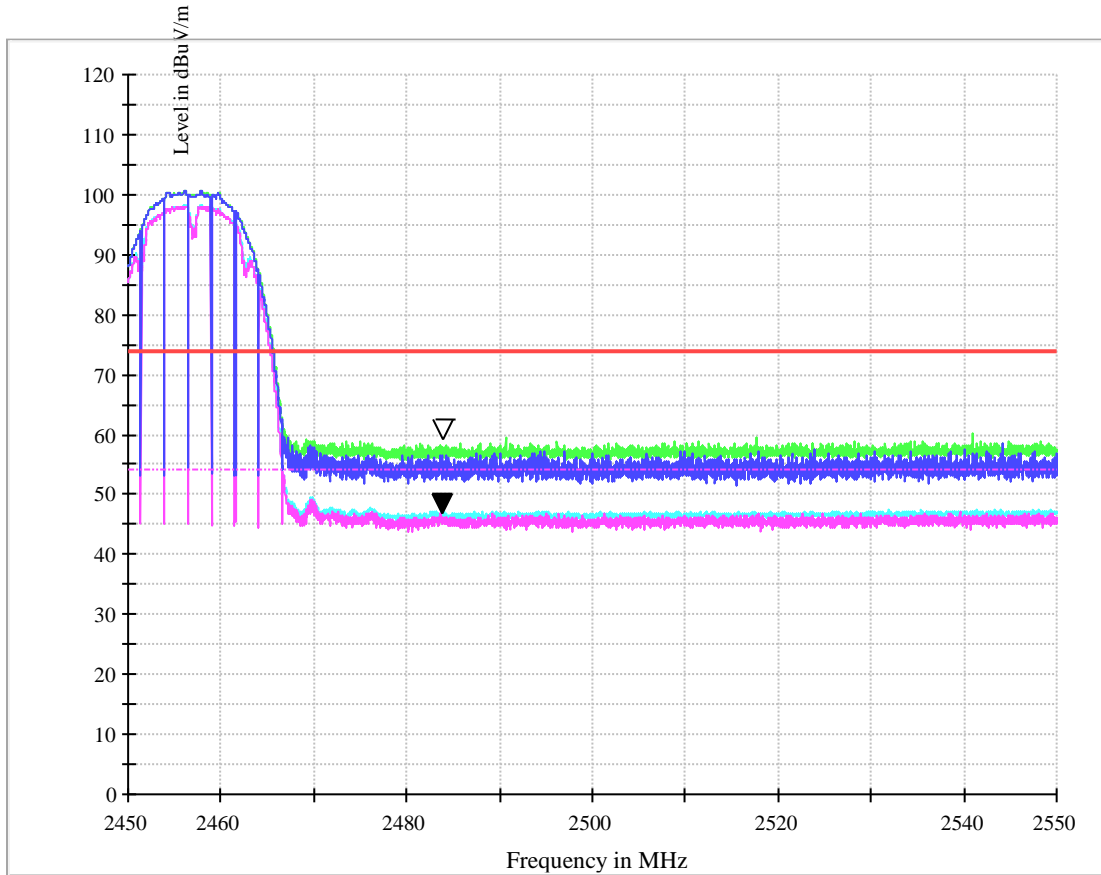

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	47.16	54.00	6.84	150.0	H	25.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	58.61	74.00	15.39	150.0	H	21.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.1.8 Channel 11@Ant 2

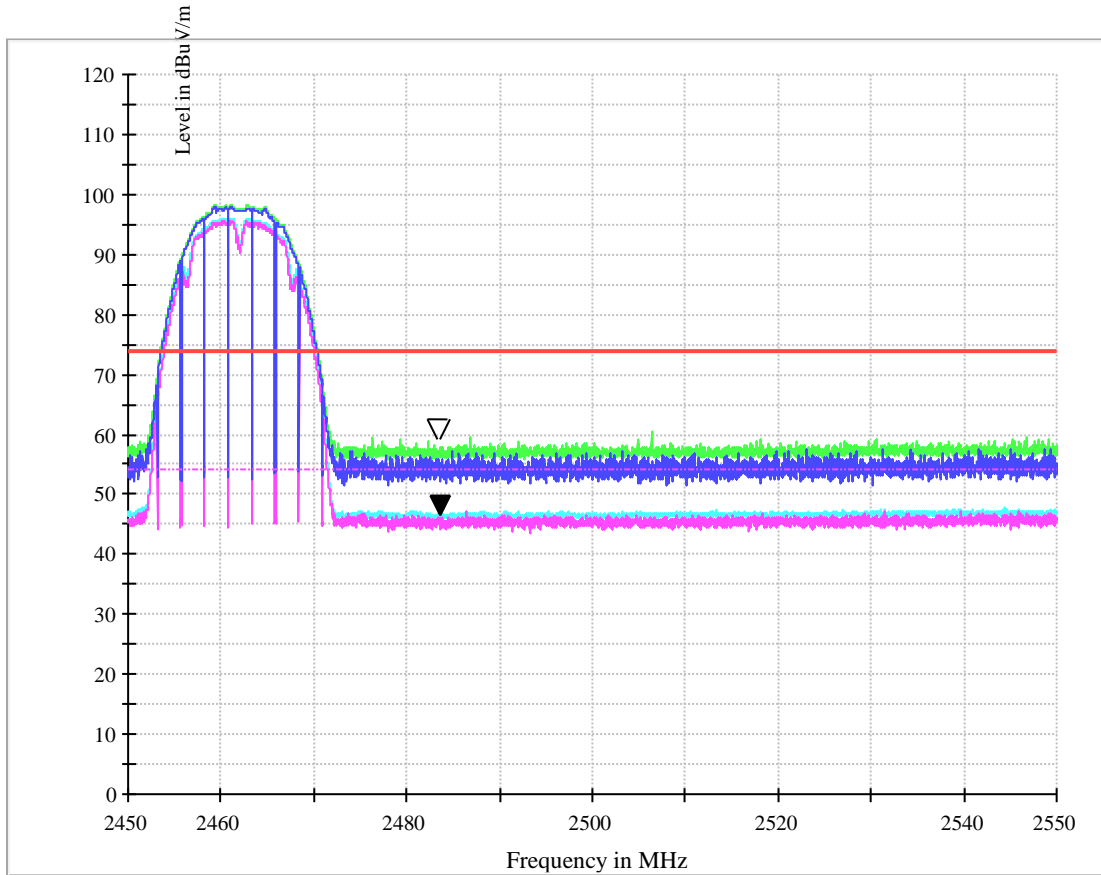

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	45.65	54.00	8.35	150.0	H	52.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	45.65	54.00	8.35	150.0	H	52.0	-10.2



2483.5	59.49	74.00	14.51	150.0	H	36.0	-10.2
--------	-------	-------	-------	-------	---	------	-------

Note:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.


2, Margin=Limit - Level



1.3.2 Test Mode: 11G

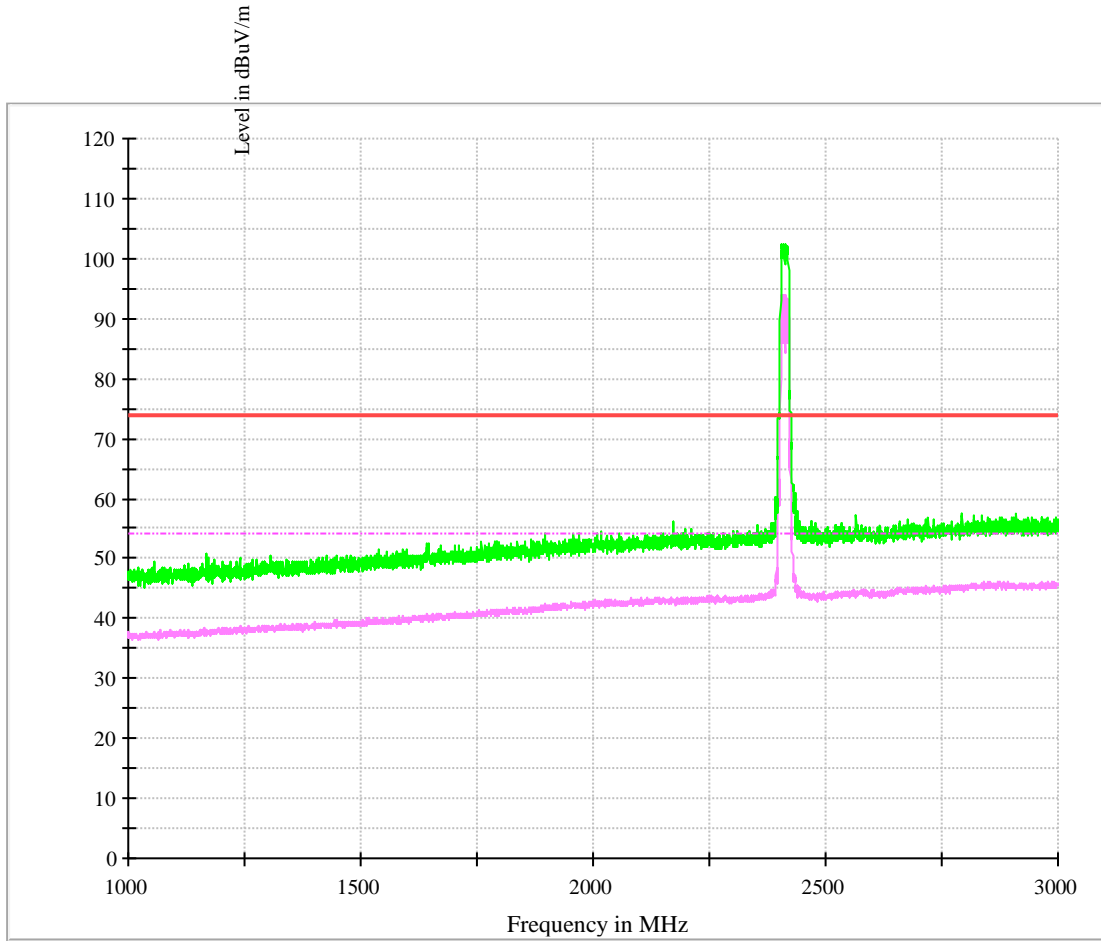

1.3.2.1 Channel 1 @Ant 1

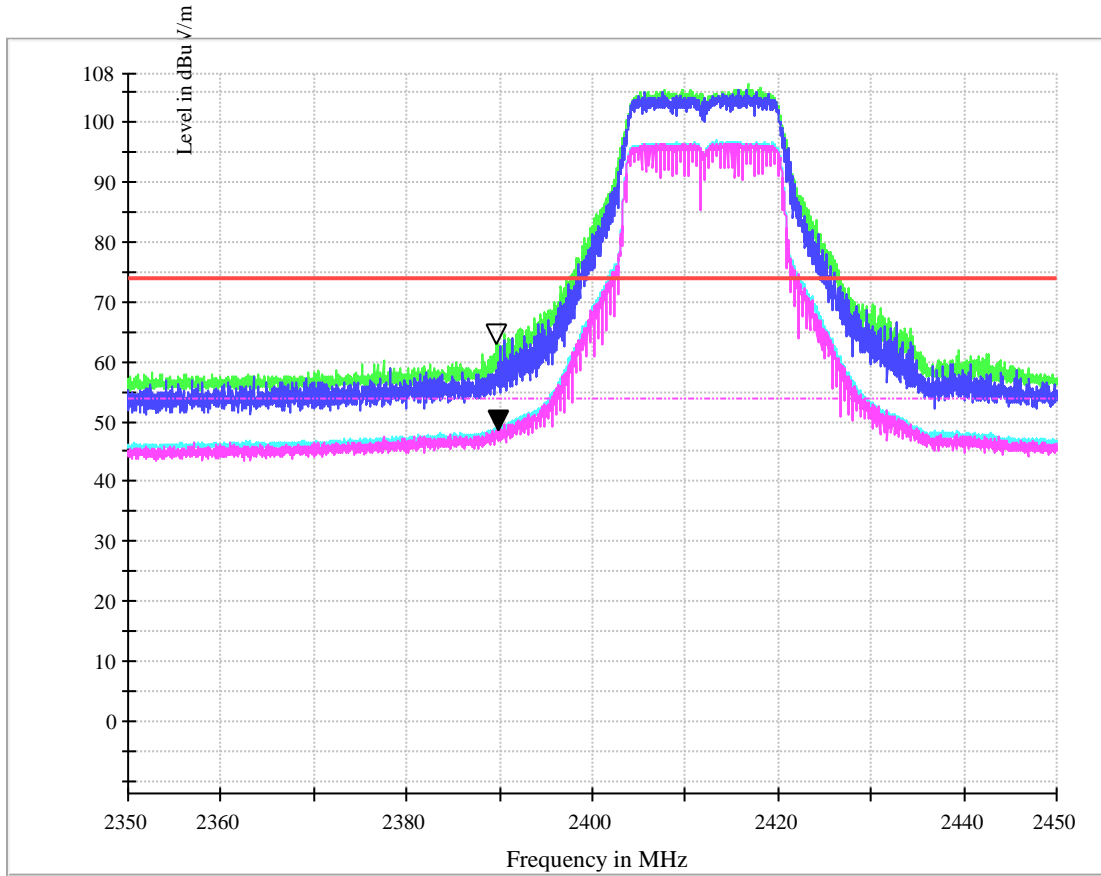

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	48.89	54.00	5.11	150.0	H	85.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	63.06	74.00	10.94	150.0	H	86.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.2.2 Channel 2 @Ant 1

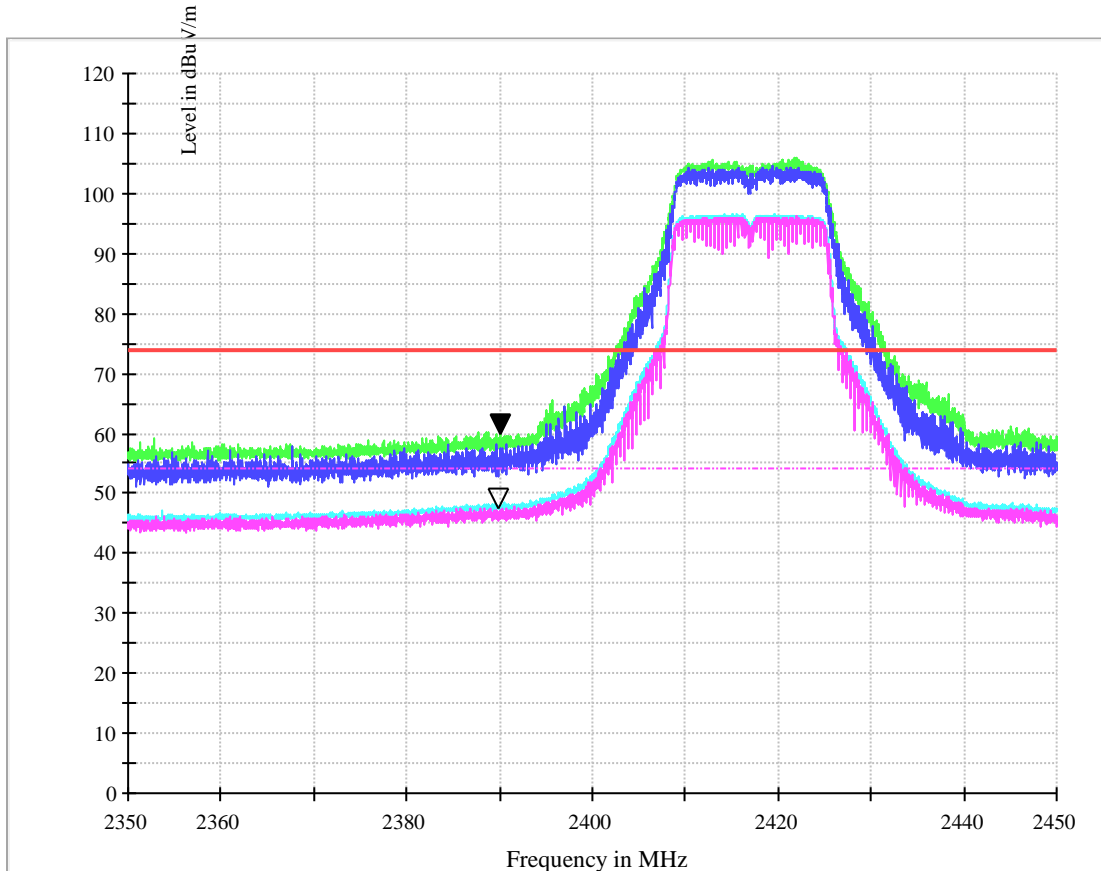

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	47.85	54.00	6.15	150.0	H	28.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	47.85	54.00	6.15	150.0	H	28.0	-6.8



2390	60.14	74.00	13.84	150.0	H	26.0	-6.8
------	-------	-------	-------	-------	---	------	------


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.3 Channel 10@Ant 1

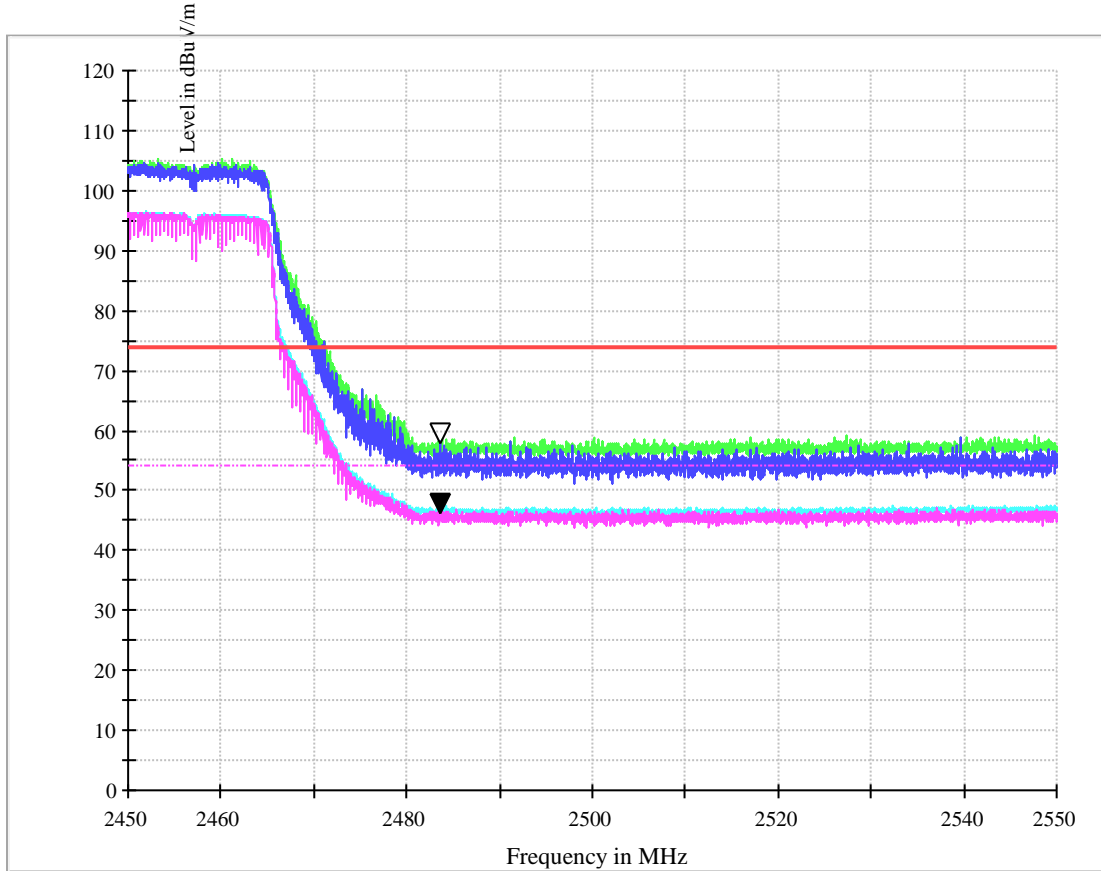

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	46.61	54.00	7.305	150.0	H	57.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	58.23	74.00	16.125	150.0	H	58.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.9.098

2, Margin=Limit - Level

1.3.2.4 Channel 11@Ant 1

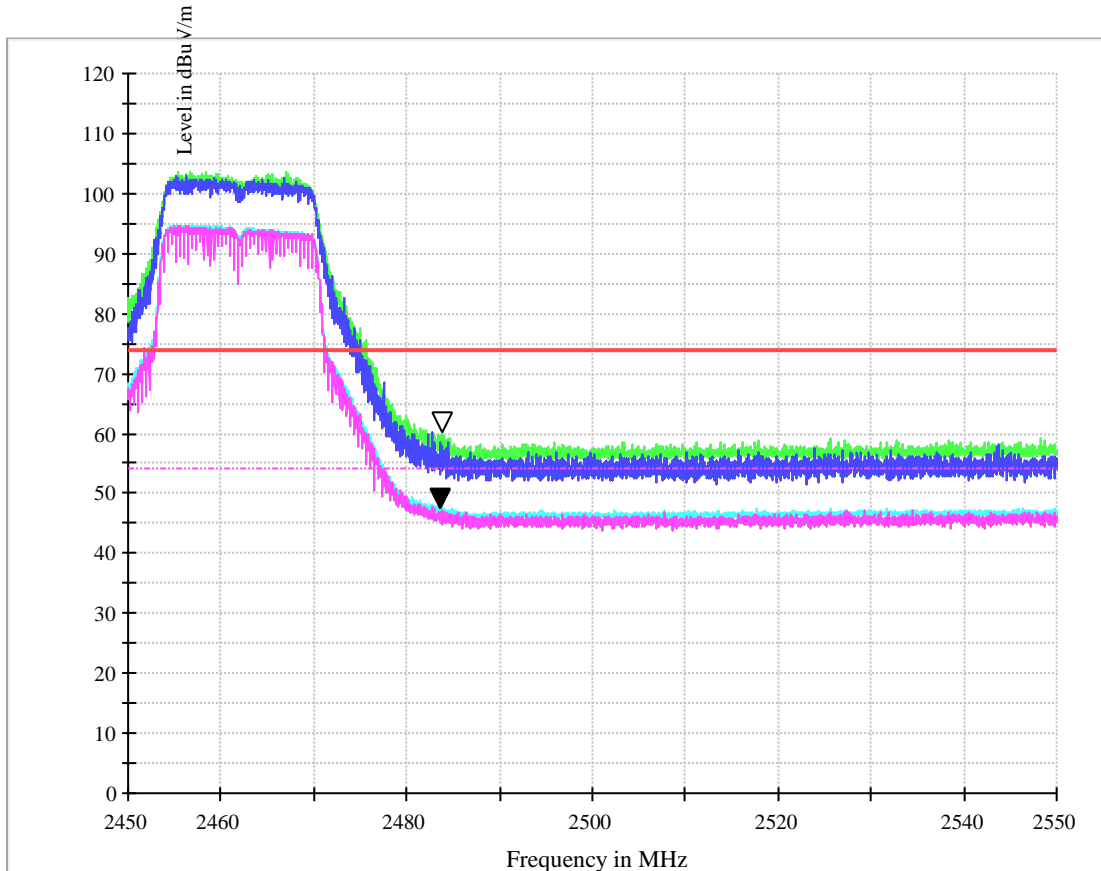

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	47.76	54.00	6.24	150.0	H	45.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	47.76	54.00	6.24	150.0	H	45.0	-10.2



2483.5	60.45	74.00	13.55	150.0	H	46.0	-10.2
--------	-------	-------	-------	-------	---	------	-------


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.2.5 Channel 1 @Ant 2

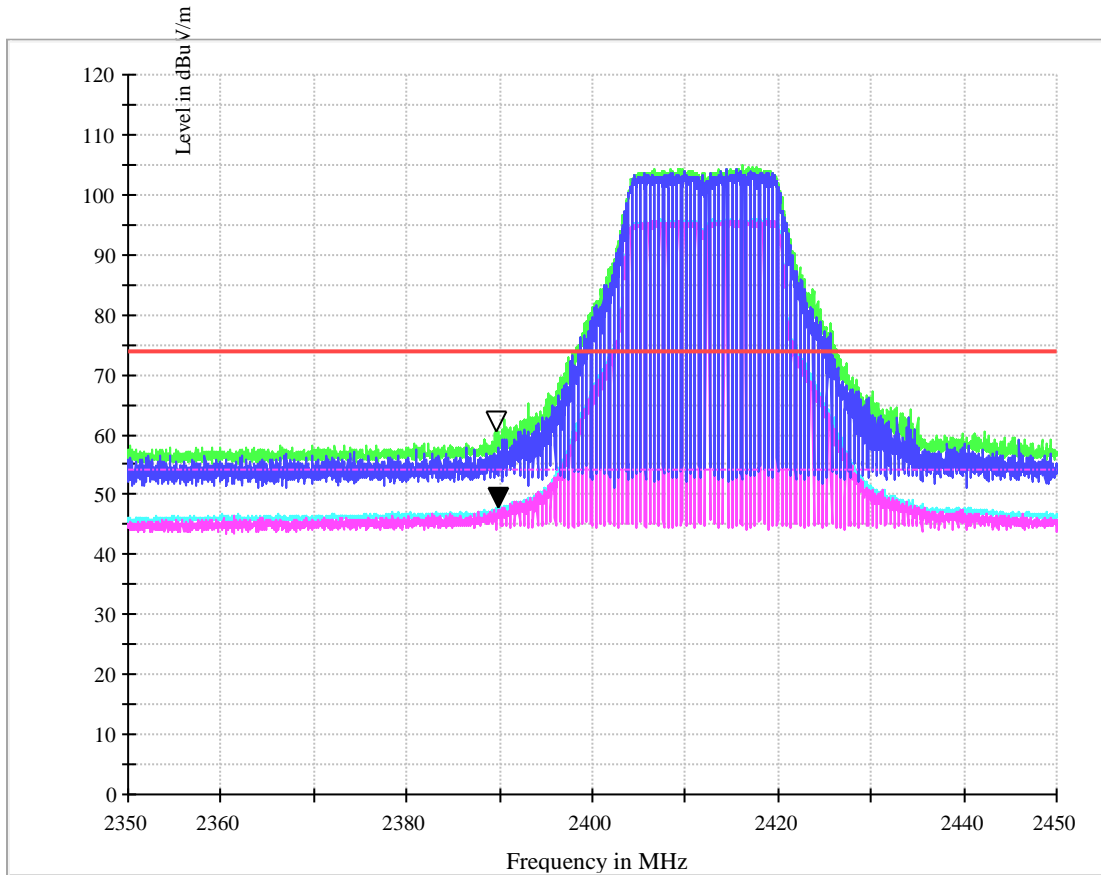

MEASUREMENT RESULT: AV Detector



Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	48.26	54.00	5.74	150.0	H	65.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	60.96	74.00	13.04	150.0	H	88.0	-6.8




Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.2.6 Channel 2 @Ant 2

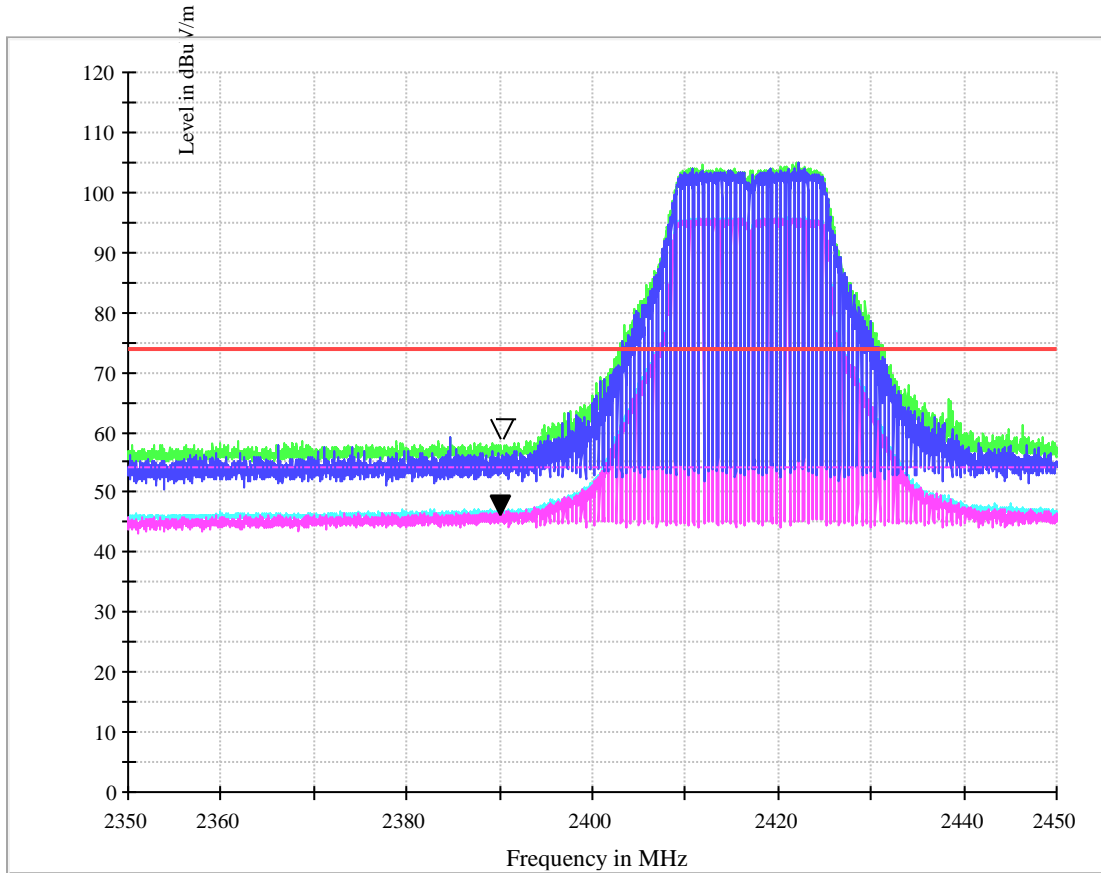

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
-----------------	----------------	----------------	-------------	-------------	-----	---------	--------------



2390	45.56	54.00	8.000	150.0	H	43.0	-6.8
------	-------	-------	-------	-------	---	------	------

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	59.28	74.00	16.777	150.0	H	43.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.2.7 Channel 10@Ant 2

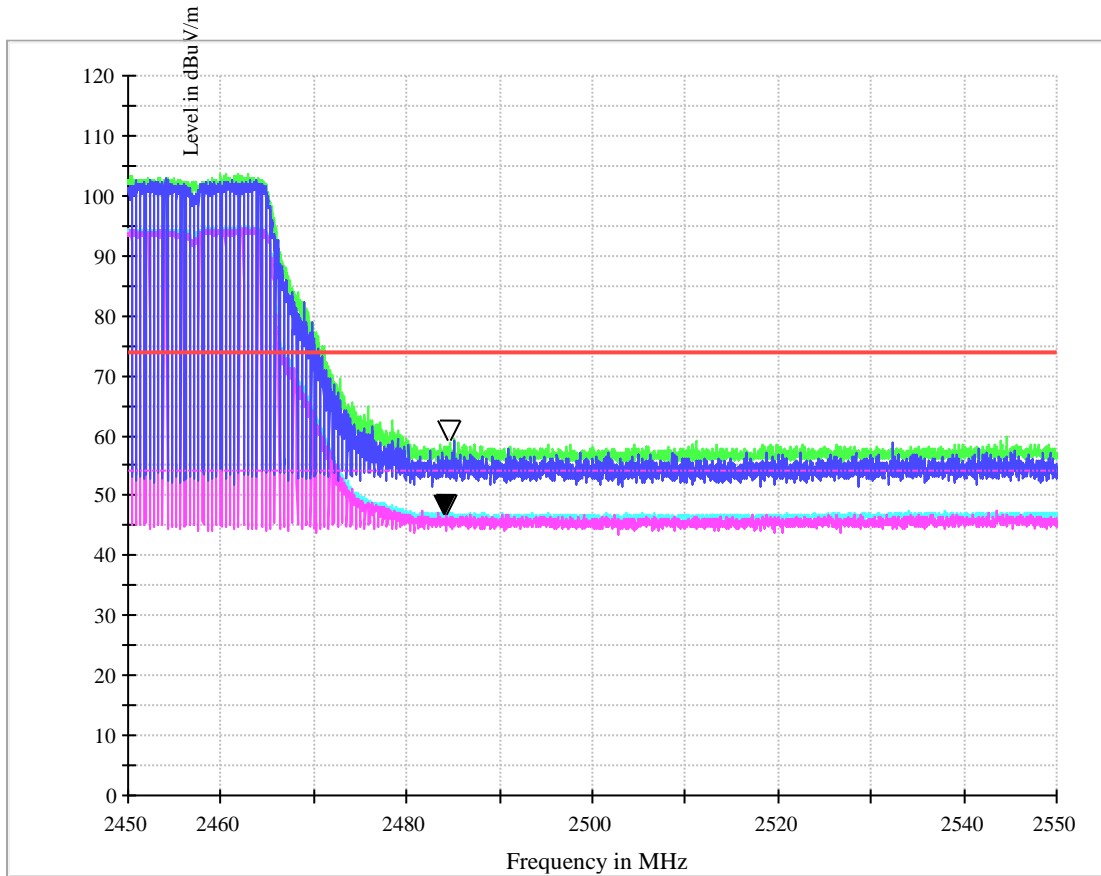

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.5	47.03	54.00	6.97	150.0	H	38.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.5	59.36	74.00	14.64	150.0	H	44.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.8 Channel 11@Ant 2

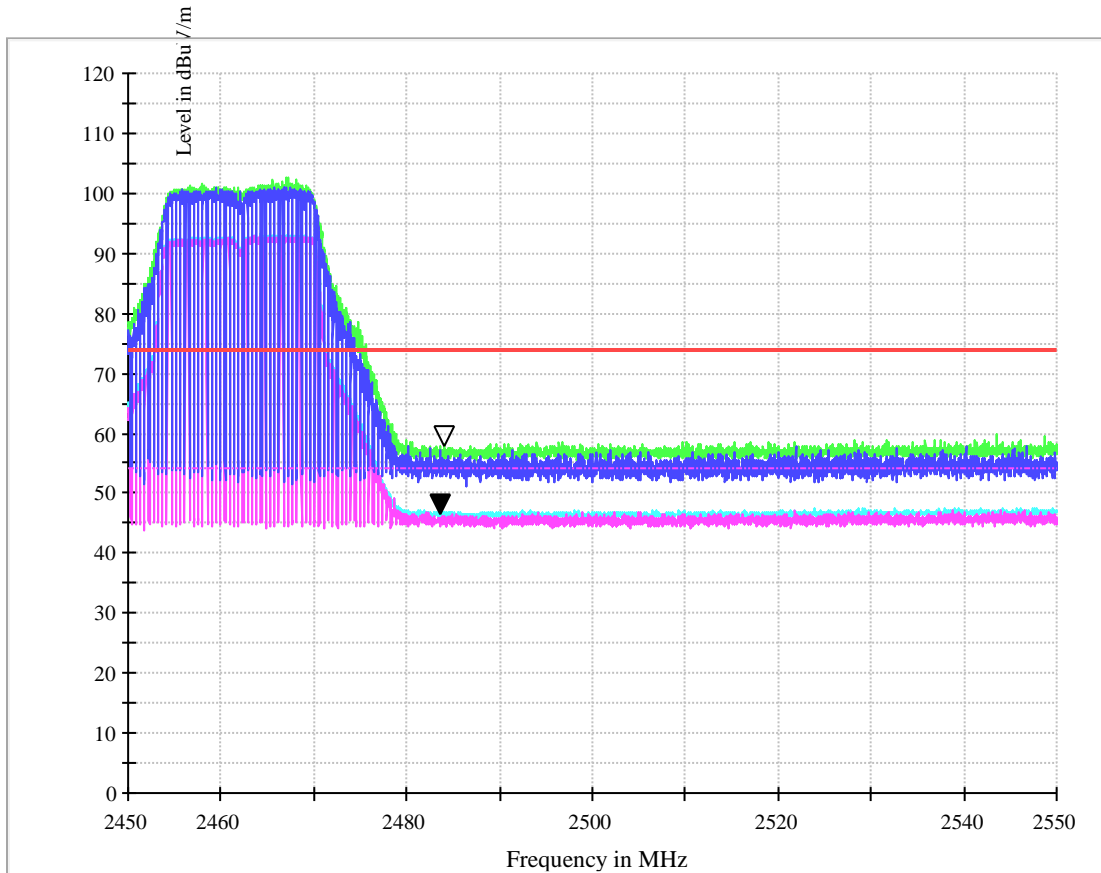

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	46.84	54.00	7.664	150.0	H	47.0	-10.2

MEASUREMENT RESULT: PK Detector



Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	58.30	74.00	16.201	150.0	H	43.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3 Test Mode: 11N20

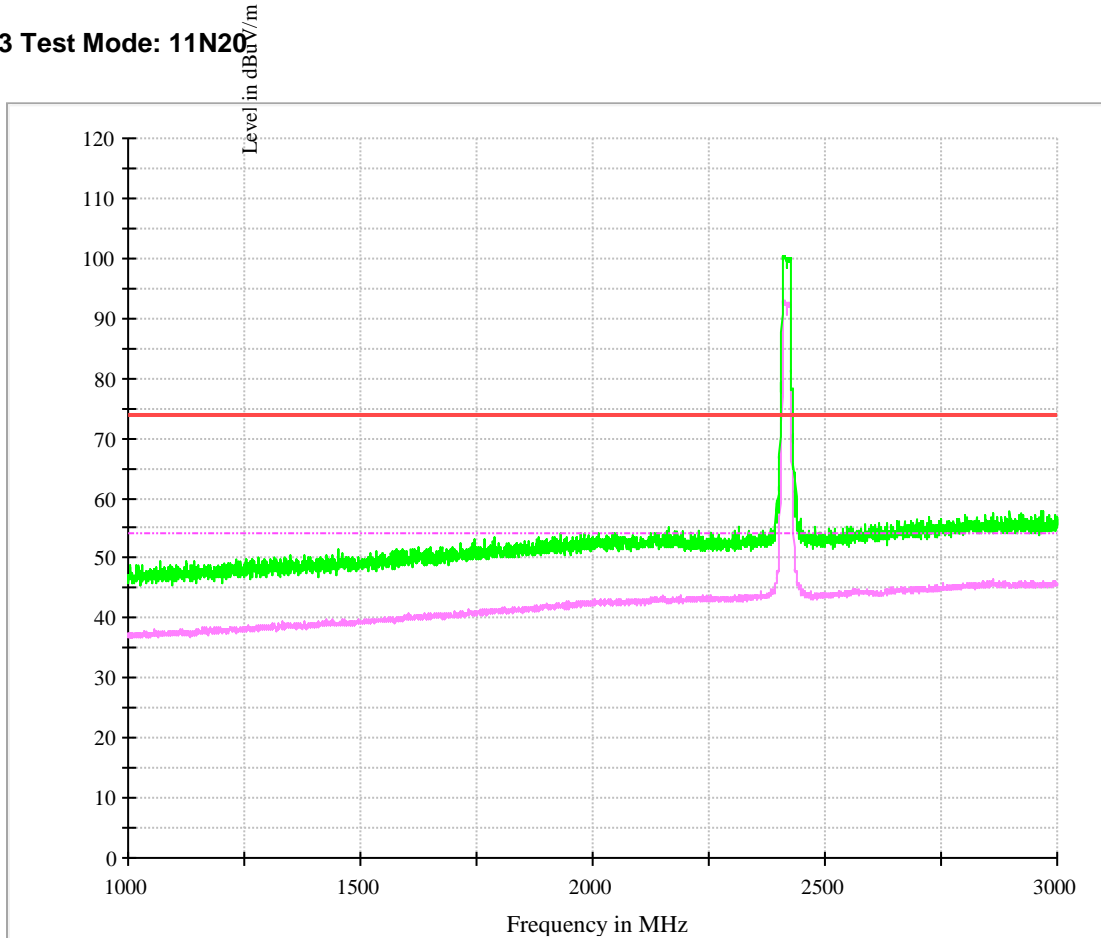

1.3.3.1 Channel 1 @Ant 1

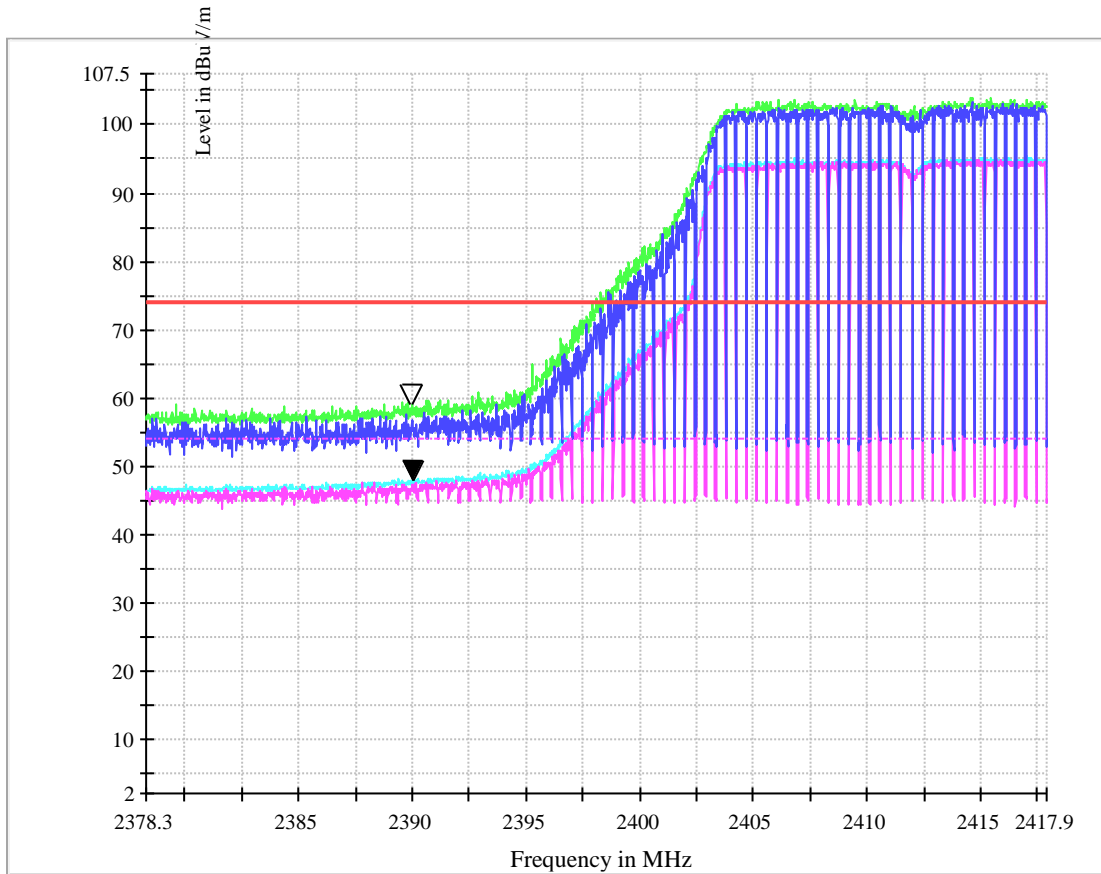

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	48.28	54.00	5.72	150.0	H	68.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	59.42	74.00	14.58	150.0	H	45.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.3.2 Channel 2 @Ant 1

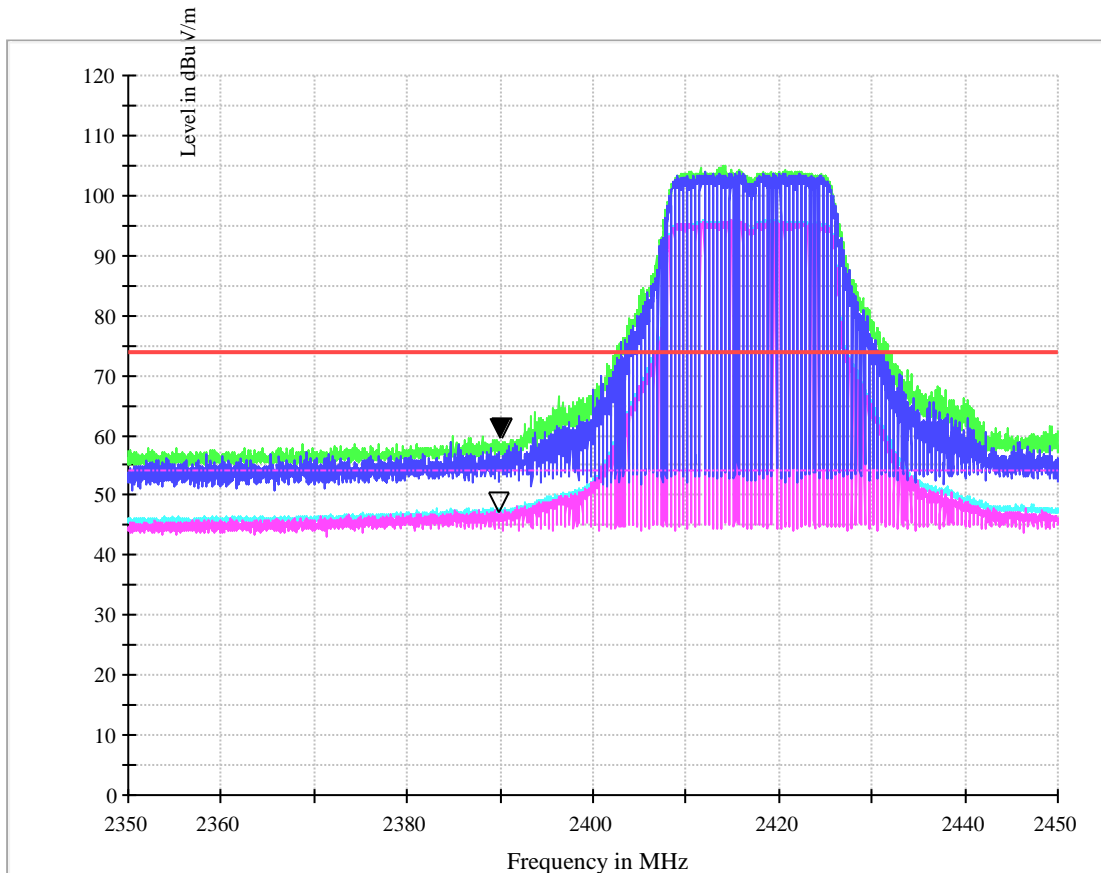

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	47.58	54.00	7.315	150.0	H	57.0	-6.8

MEASUREMENT RESULT: PK Detector



Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	59.86	74.00	16.129	150.0	H	58.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3.3 Channel 10@Ant 1

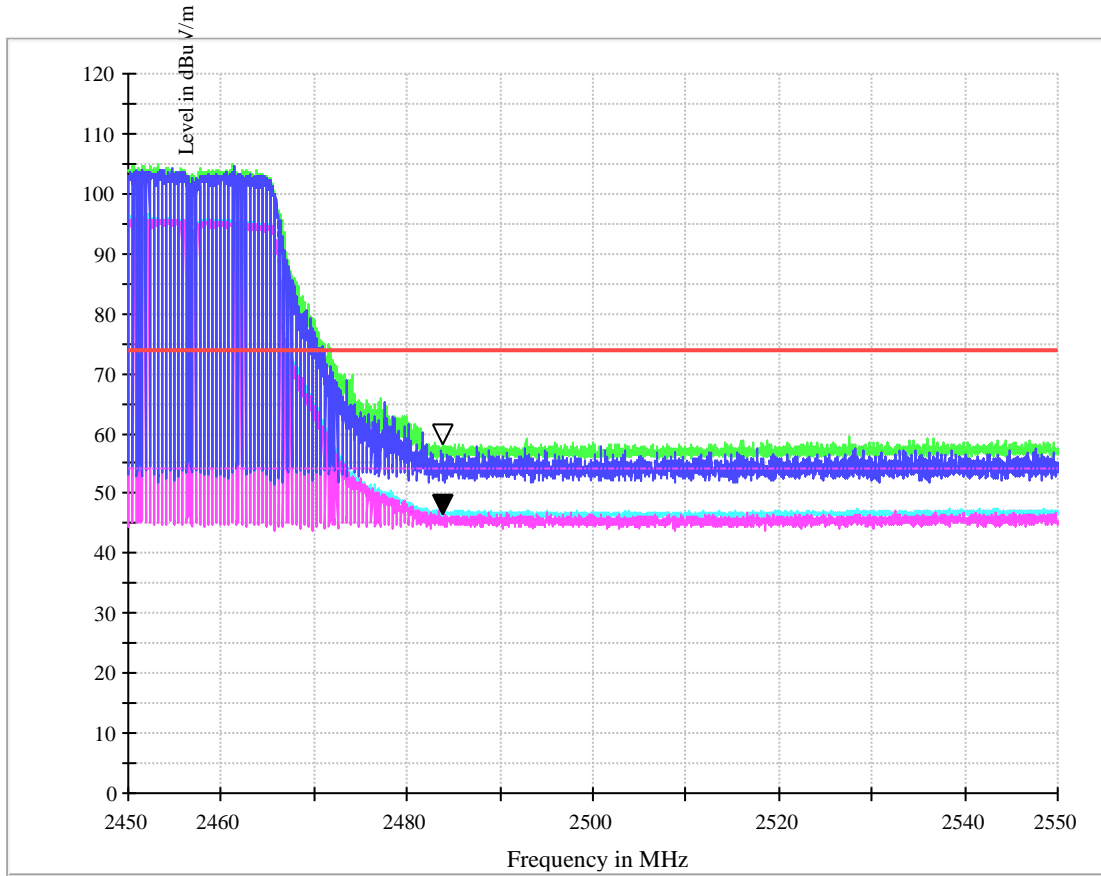

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	46.80	54.00	7.20	150.0	H	46.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	58.40	74.00	15.60	150.0	H	58.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.3.4 Channel 11@Ant 1

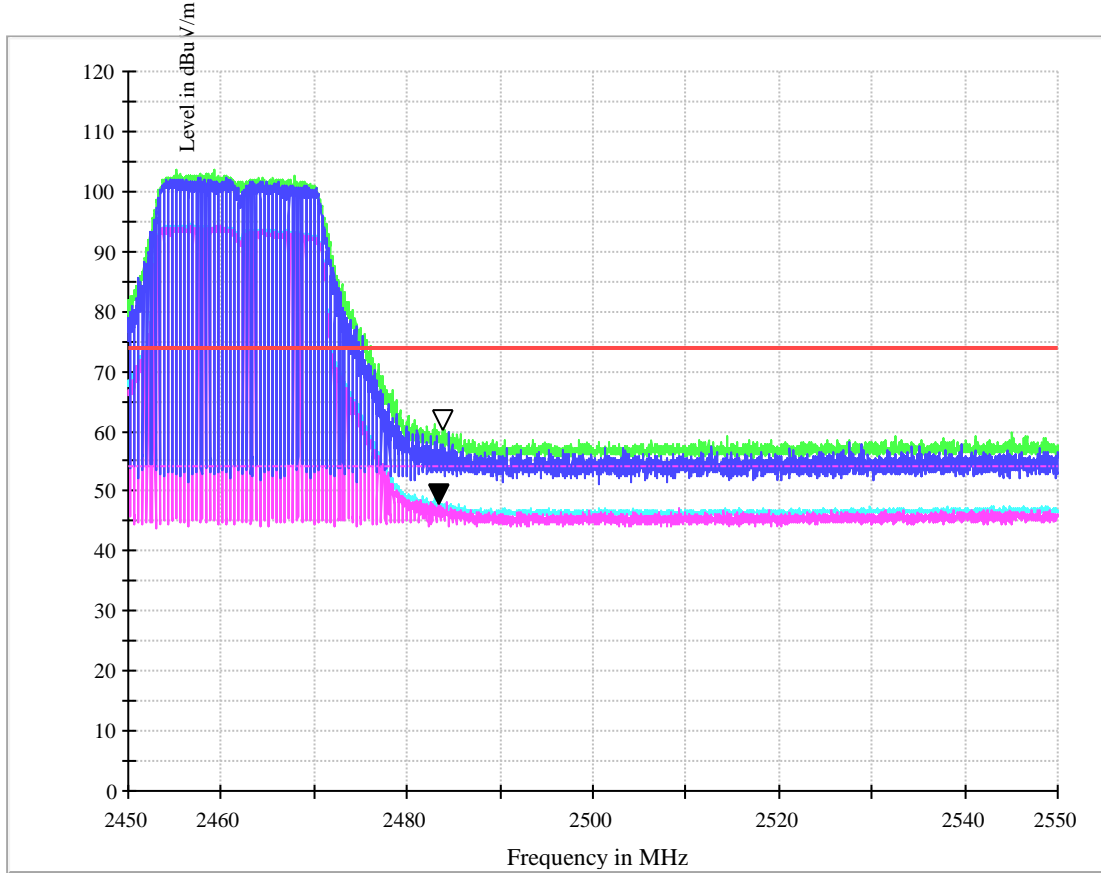

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	48.20	54.00	5.80	150.0	H	47.0	-10.2



MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	60.66	74.00	13.34	150.0	H	59.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3.5 Channel 1 @Ant 2

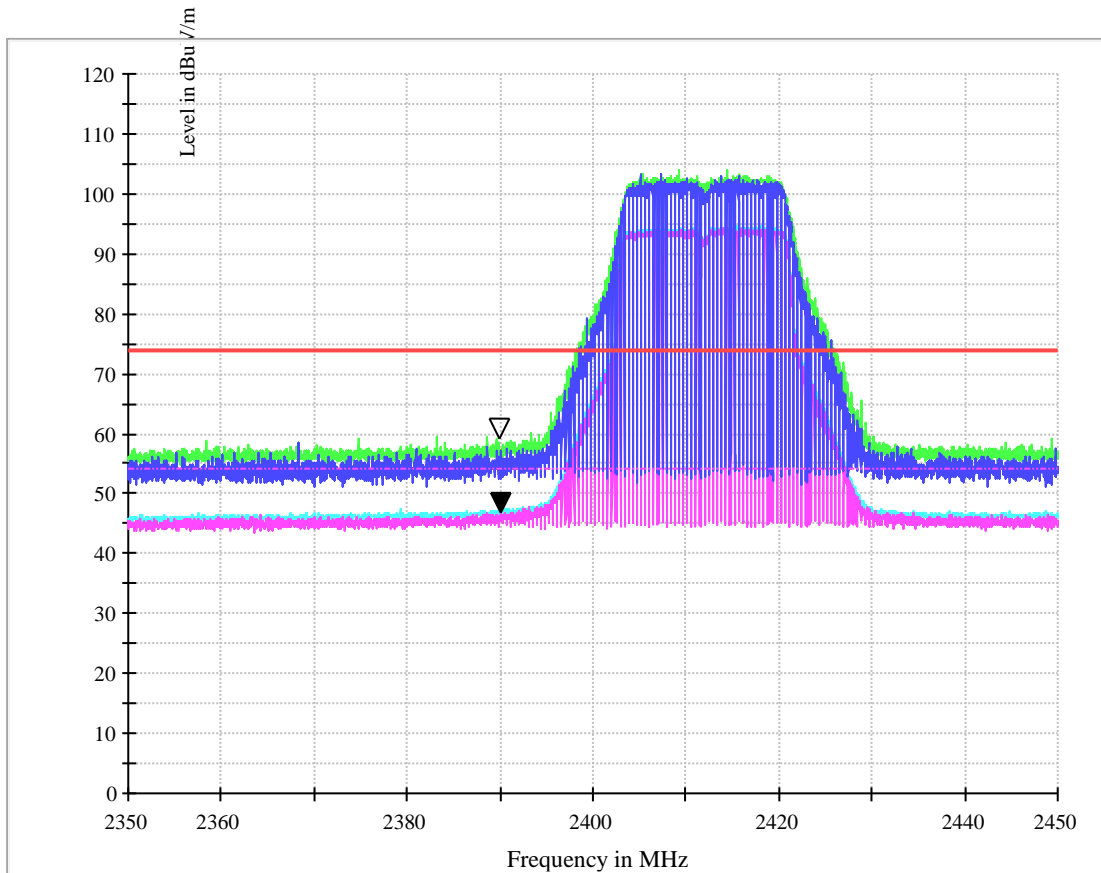

MEASUREMENT RESULT: AV Detector



Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	47.13	54.00	6.87	150.0	H	57.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	59.36	74.00	14.64	150.0	H	56.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.3.6 Channel 2 @Ant 2

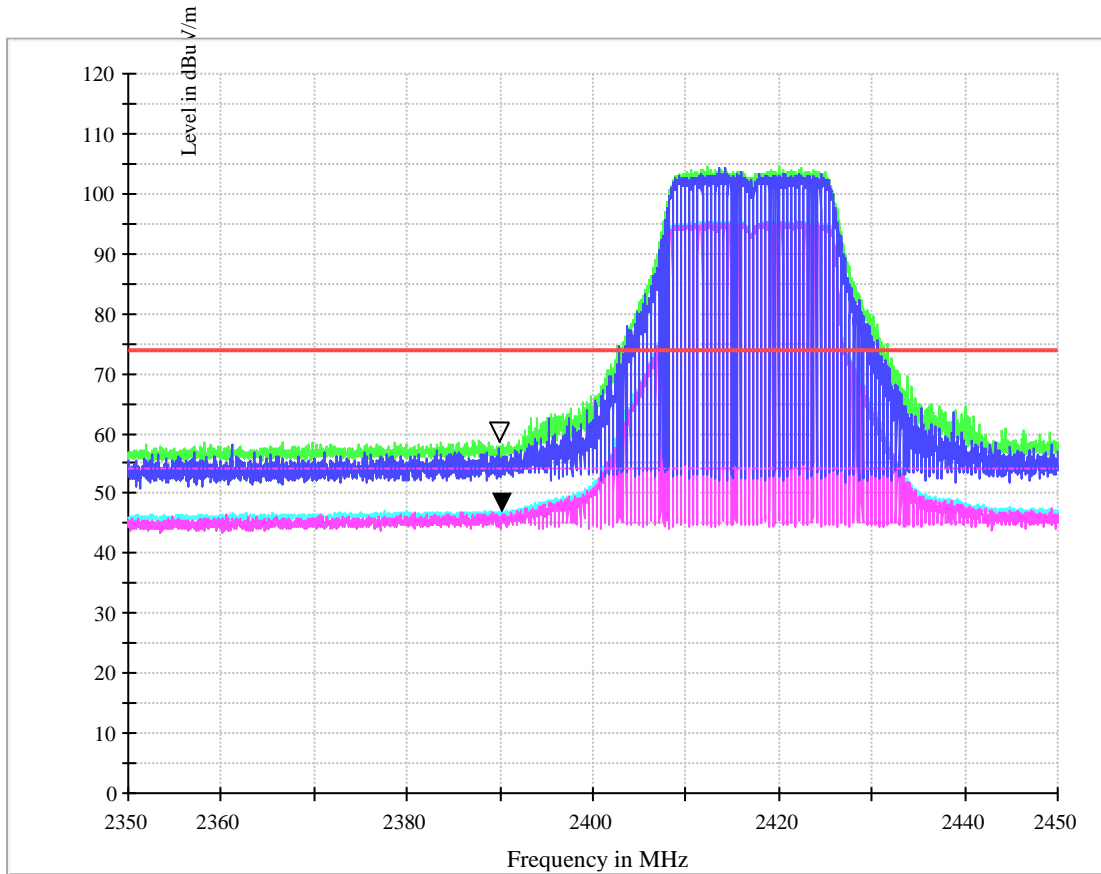

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	47.29	54.00	6.71	150.0	H	39.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	58.87	74.00	15.13	150.0	H	35.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.3.7 Channel 10@Ant 2

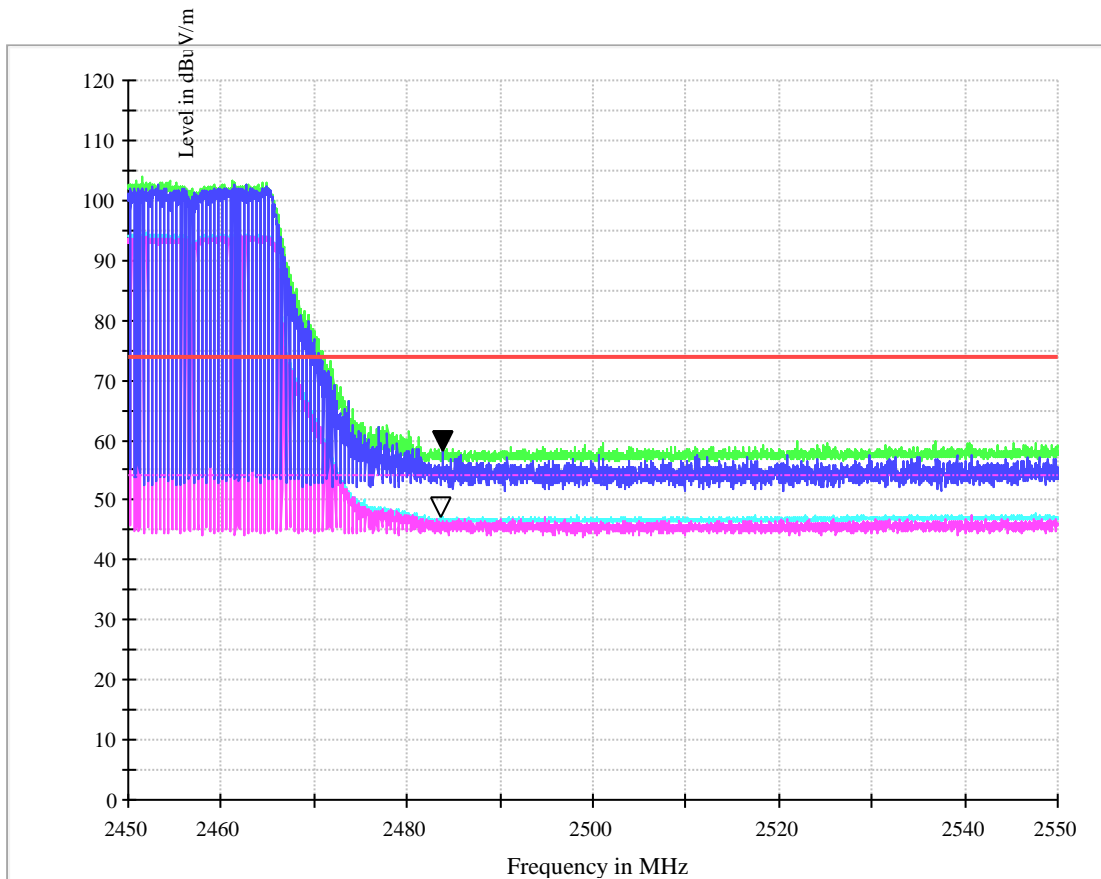

MEASUREMENT RESULT: AV Detector



Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	47.30	54.00	6.70	150.0	H	65.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	58.48	74.00	15.52	150.0	H	72.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3.8 Channel 11@Ant 2

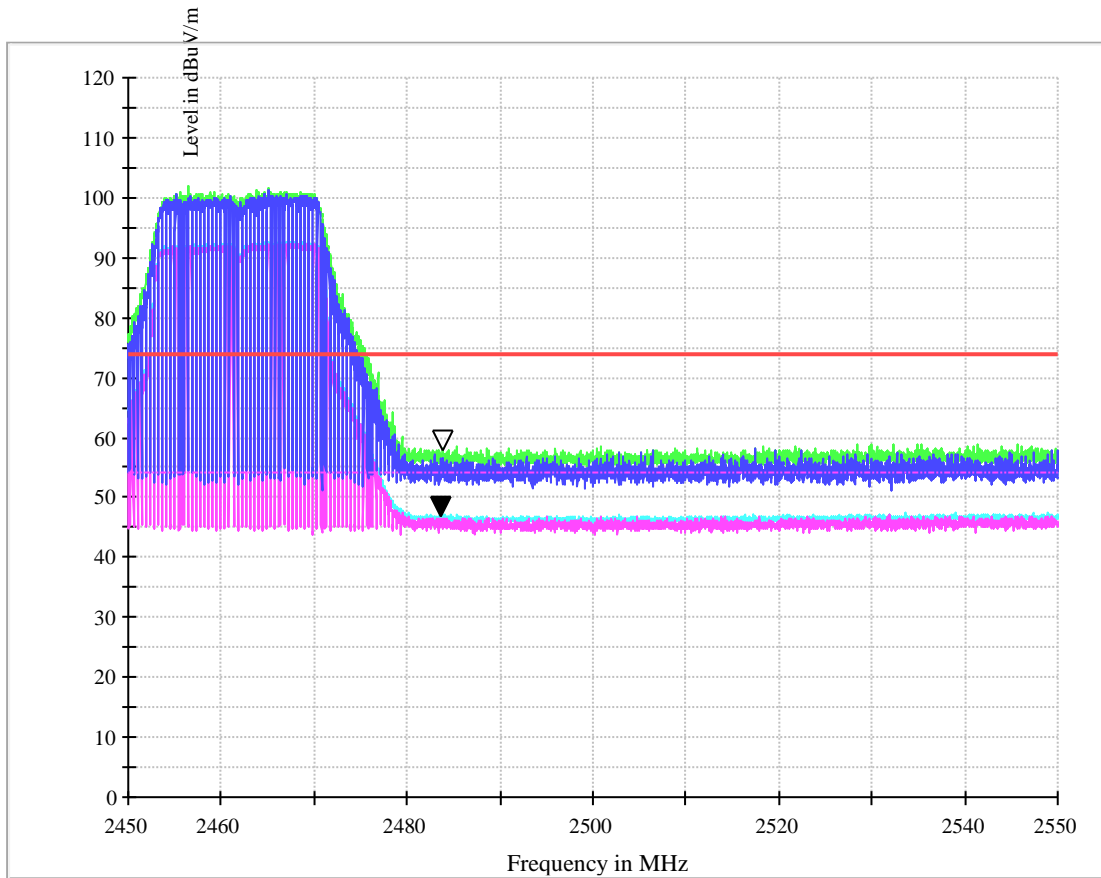

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	47.08	54.00	6.92	150.0	H	54.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	58.00	74.00	16.00	150.0	H	-31.0	-10.2

Note:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)




The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.4 Test Mode: 11N40

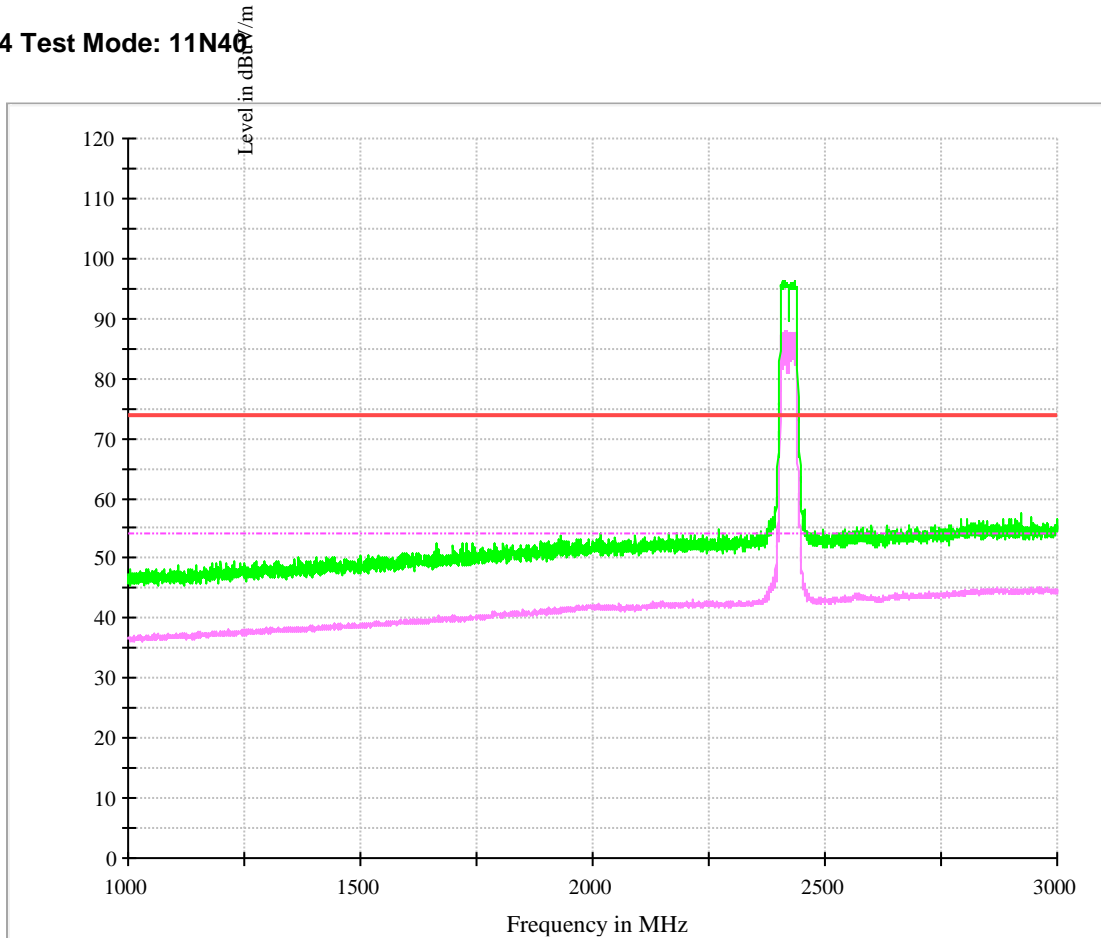

1.3.4.1 Channel 3 @Ant 1

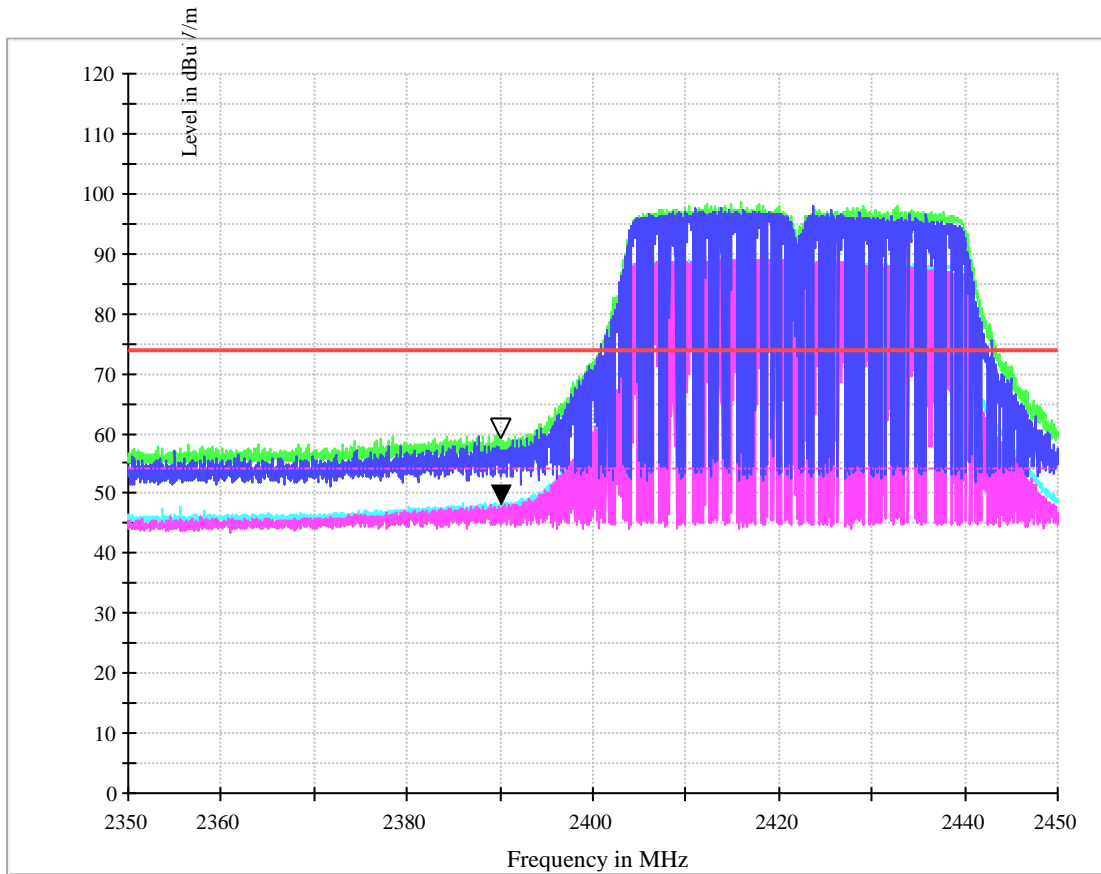

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	48.36	54.00	5.64	150.0	H	54.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	59.47	74.00	14.53	150.0	H	-31.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.4.2 Channel 4 @Ant 1

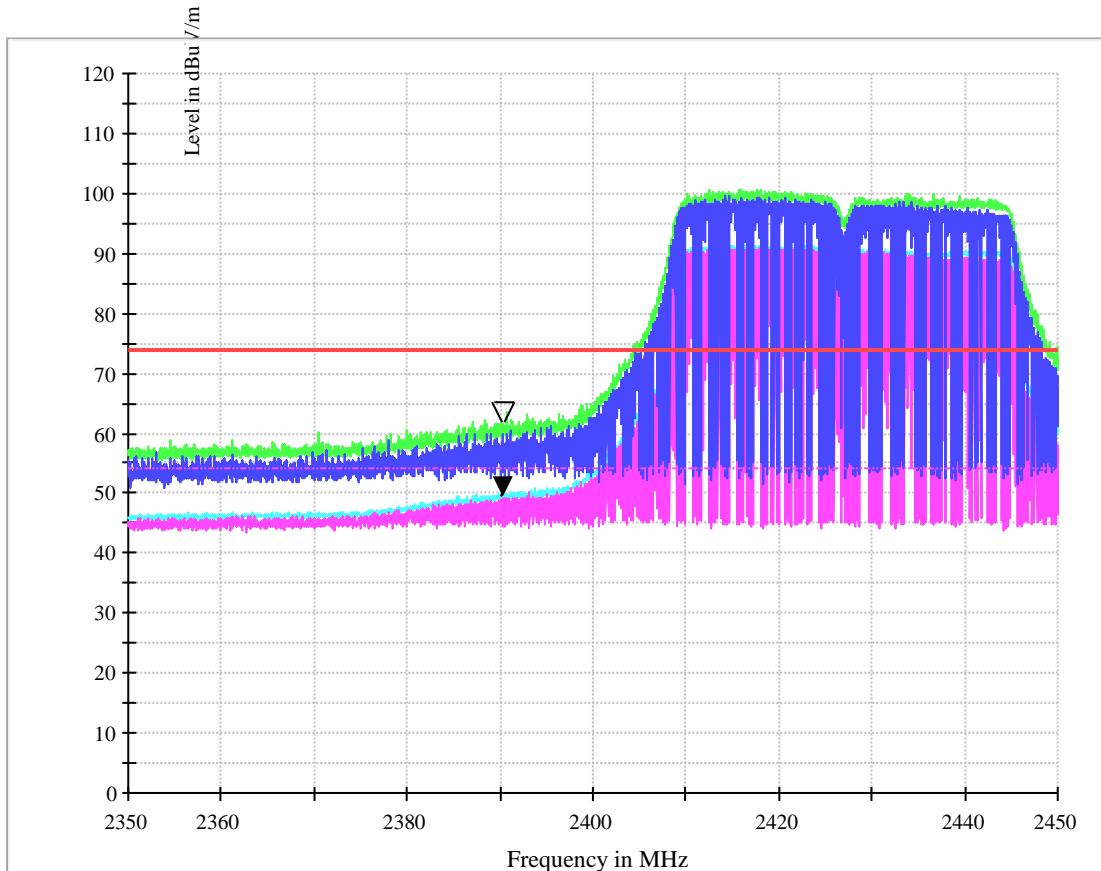

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	49.91	54.00	4.09	150.0	H	54.0	-6.8

MEASUREMENT RESULT: PK Detector



Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	62.10	74.00	11.90	150.0	H	-31.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.4.3 Channel 8 @Ant 1

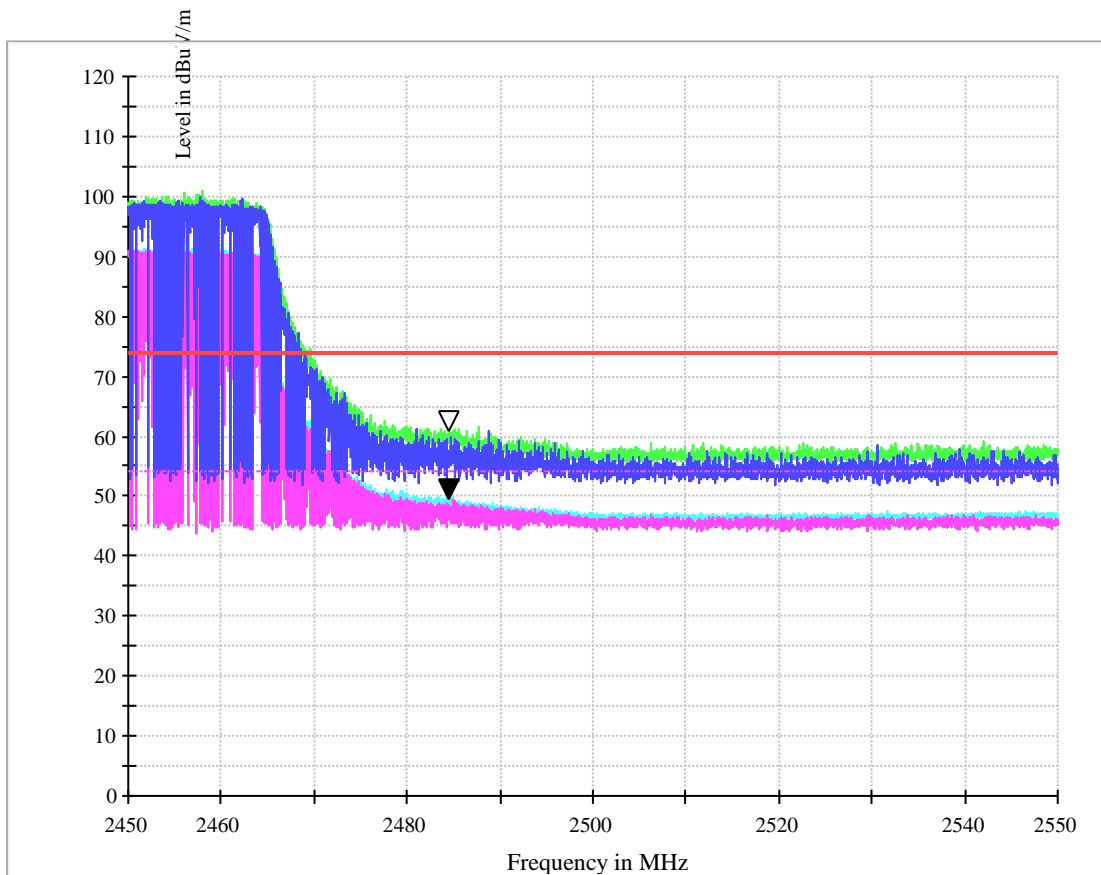

MEASUREMENT RESULT: AV Detector



Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	49.95	54.00	4.05	150.0	H	54.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	61.09	74.00	12.91	150.0	H	-31.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.4.4 Channel 9 @Ant 1

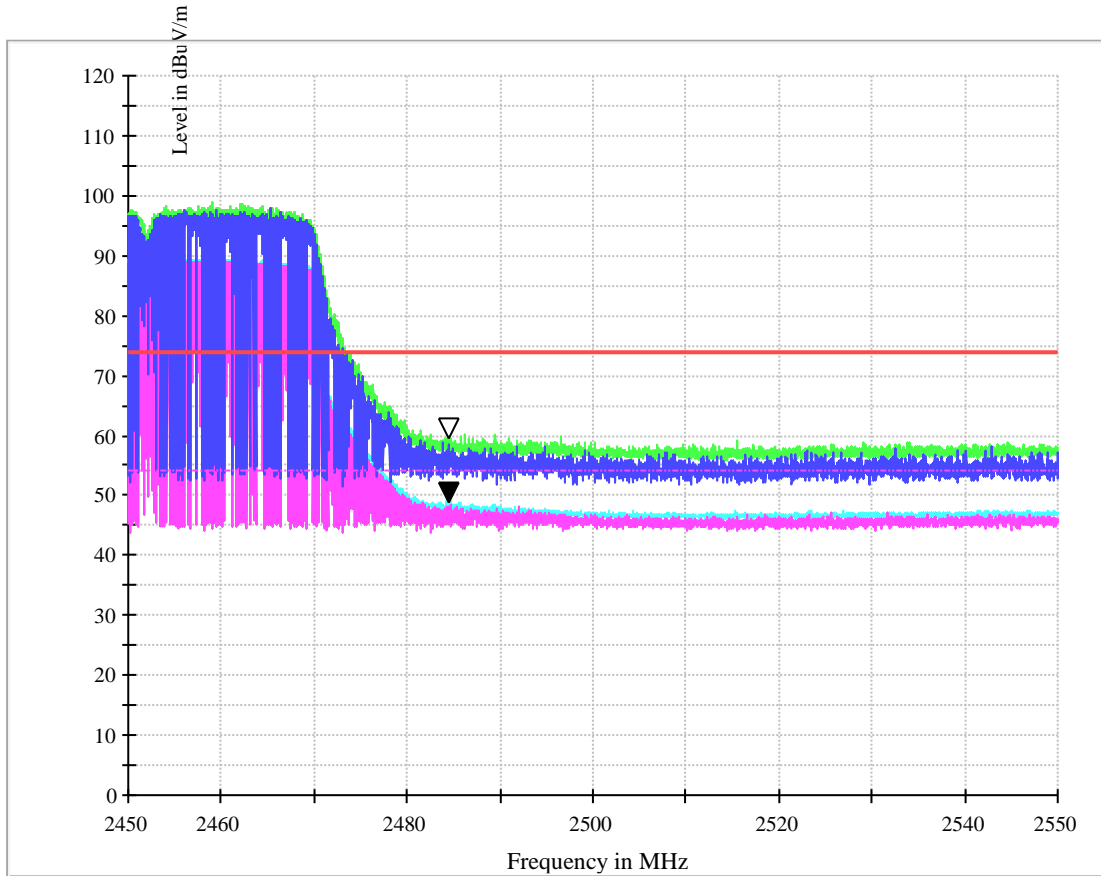

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	49.25	54.00	4.75	150.0	H	54.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	59.76	74.00	14.24	150.0	H	-31.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.4.5 Channel 3 @Ant 2

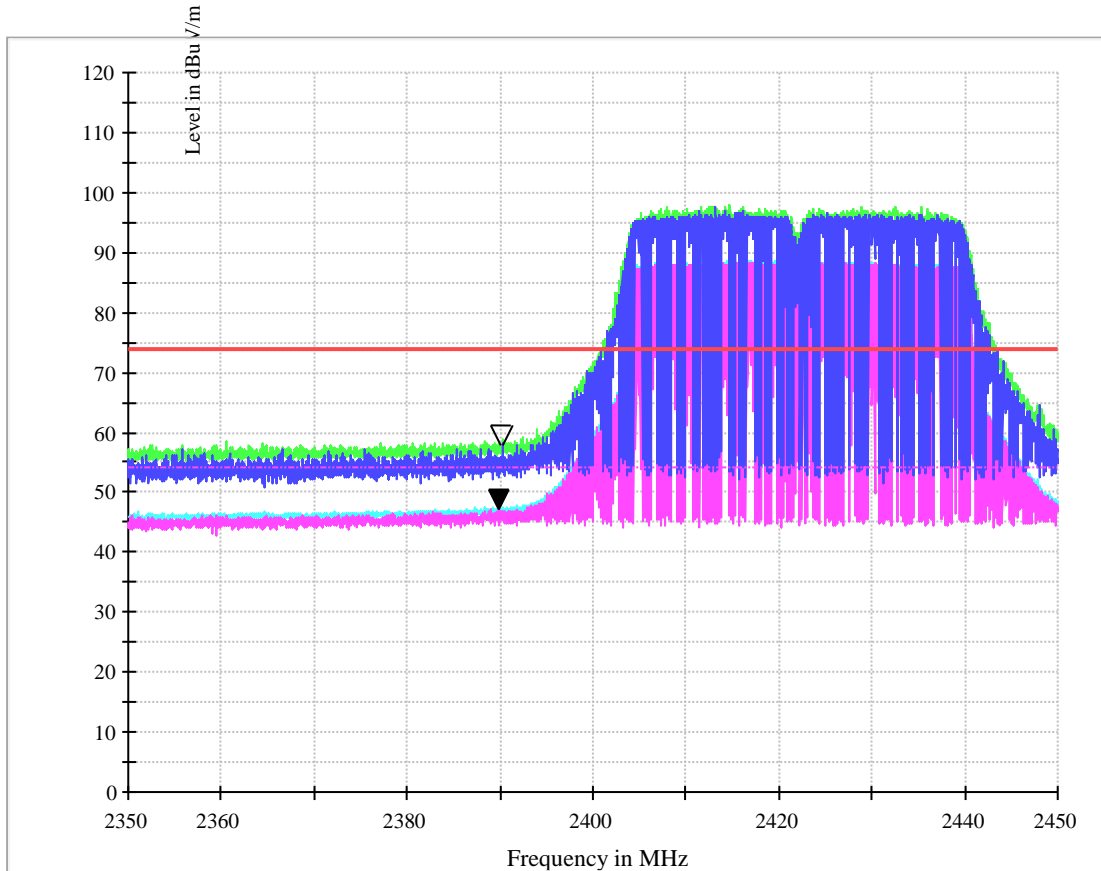

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	47.54	54.00	6.46	150.0	H	67.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
-----------------	----------------	----------------	-------------	-------------	-----	---------	--------------



2390	58.32	74.00	15.68	150.0	H	56.0	-6.8
------	-------	-------	-------	-------	---	------	------


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.4.6 Channel 4 @Ant 2

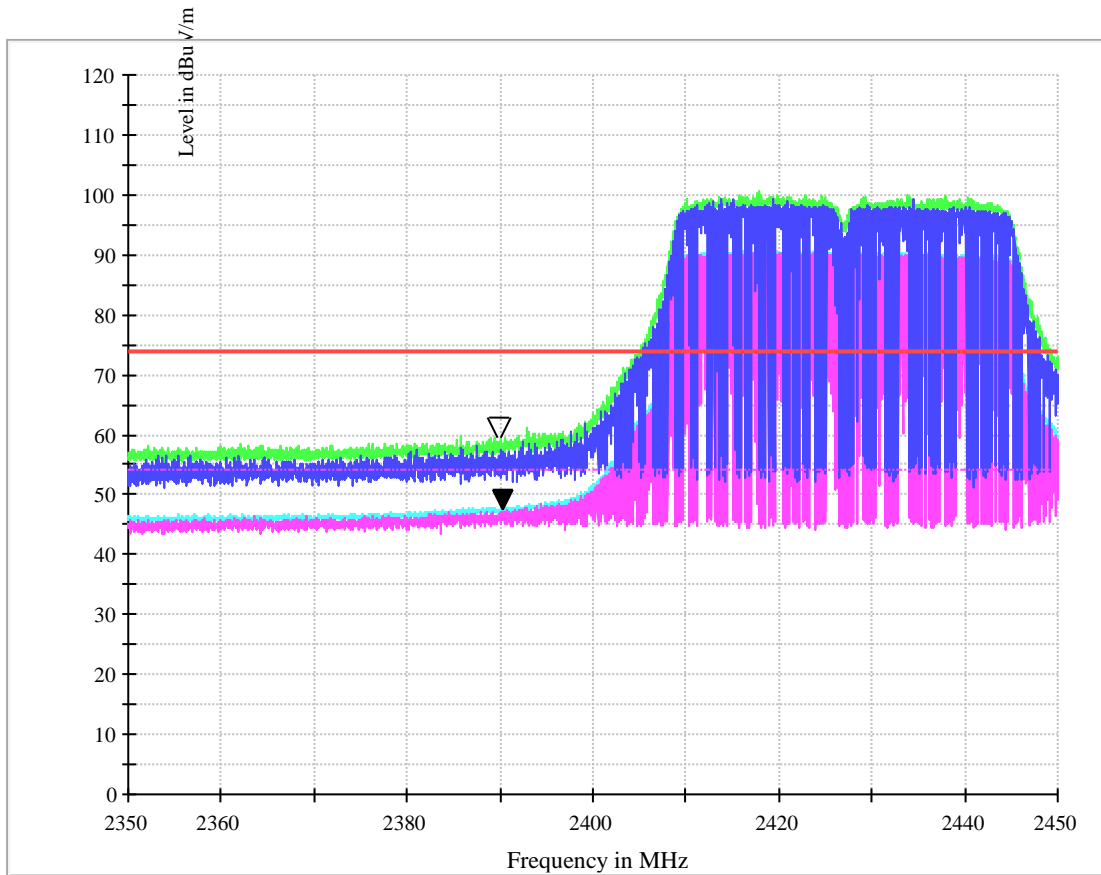

MEASUREMENT RESULT: AV Detector



Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	47.84	54.00	6.16	150.0	H	62.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	59.77	74.00	14.23	150.0	H	53.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.4.7 Channel 8 @Ant 2

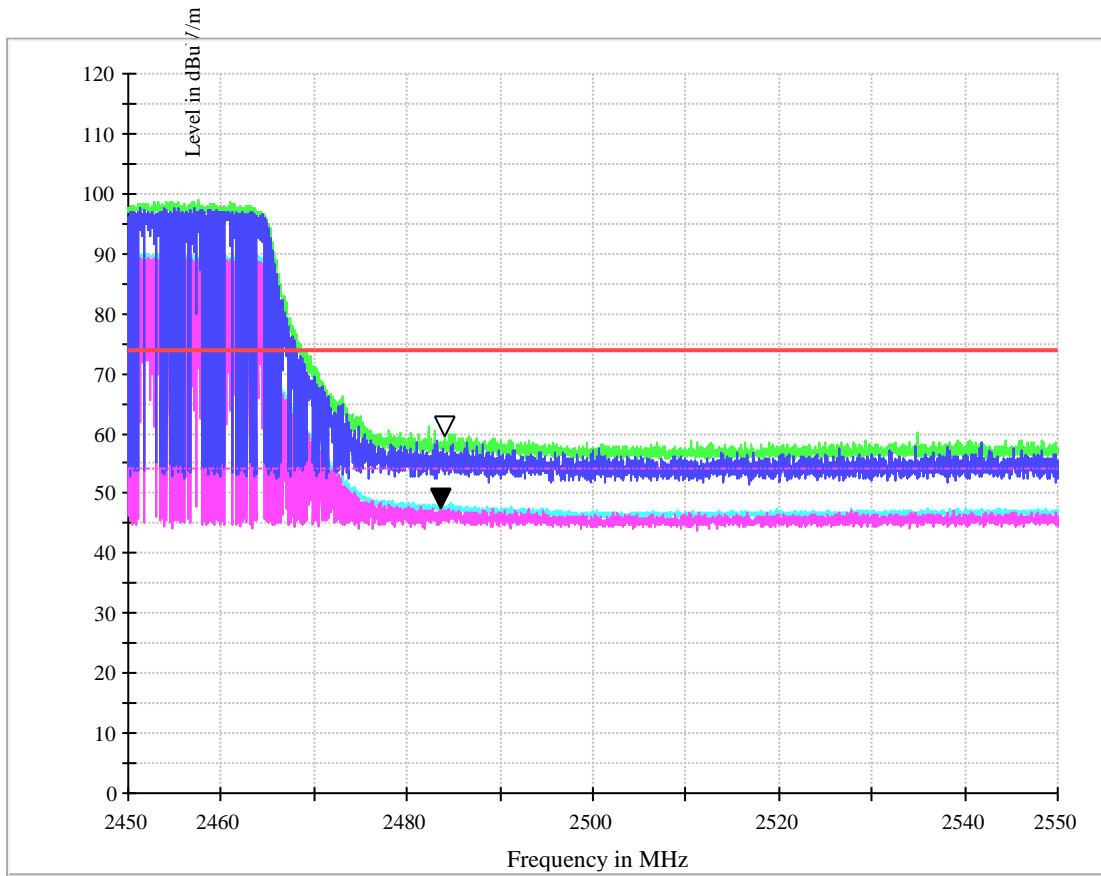

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	47.94	54.00	6.06	150.0	H	37.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	59.89	74.00	14.11	150.0	H	38.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.4.8 Channel 9 @Ant 2

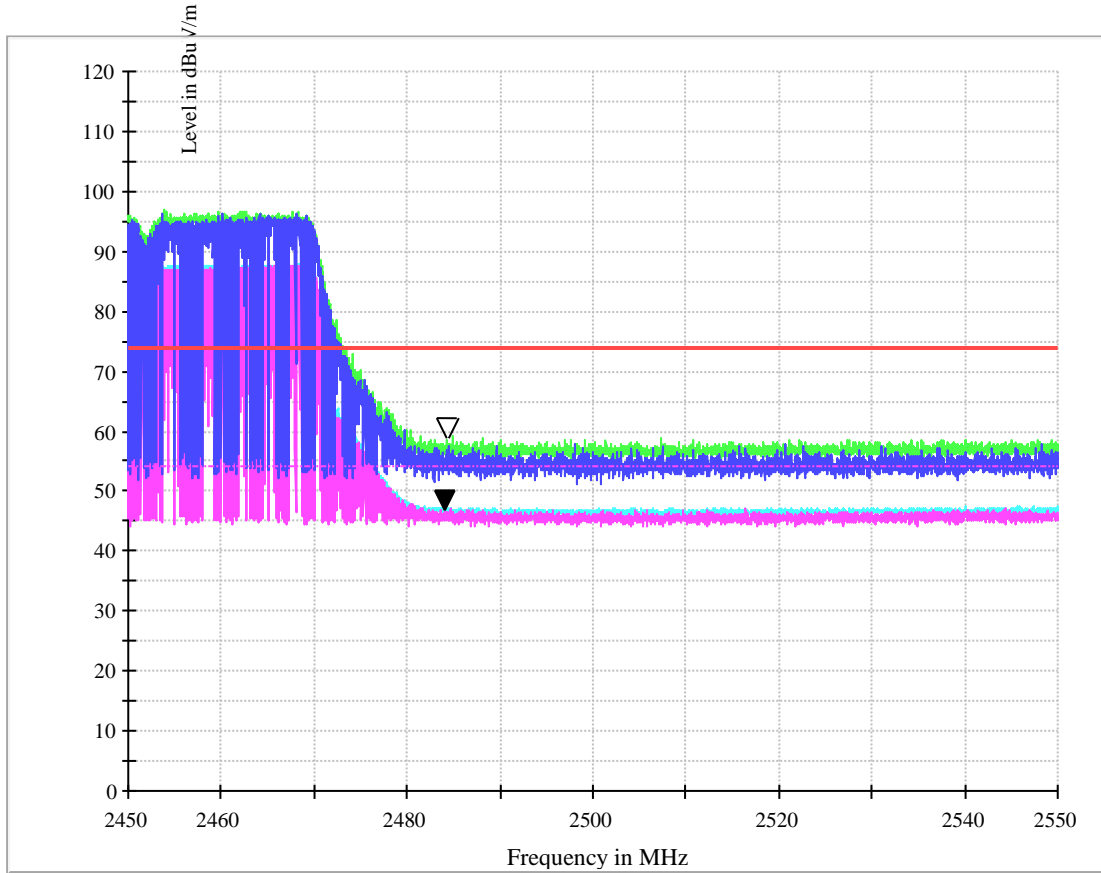

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	47.02	54.00	6.98	150.0	H	26.0	-10.2



MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2483.5	59.14	74.00	14.86	150.0	H	21.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.6 Test Mode: 11N-MIMO-20M

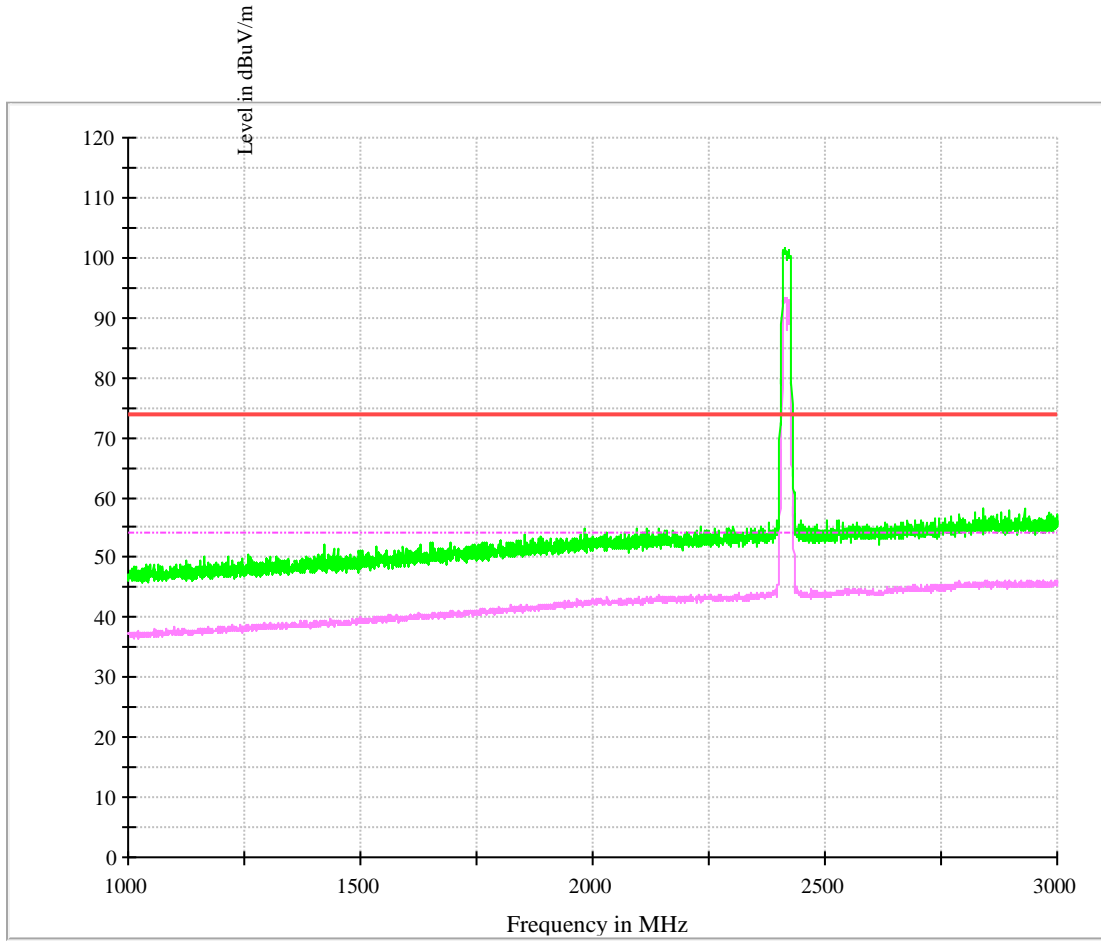

1.3.6.1 Channel 1

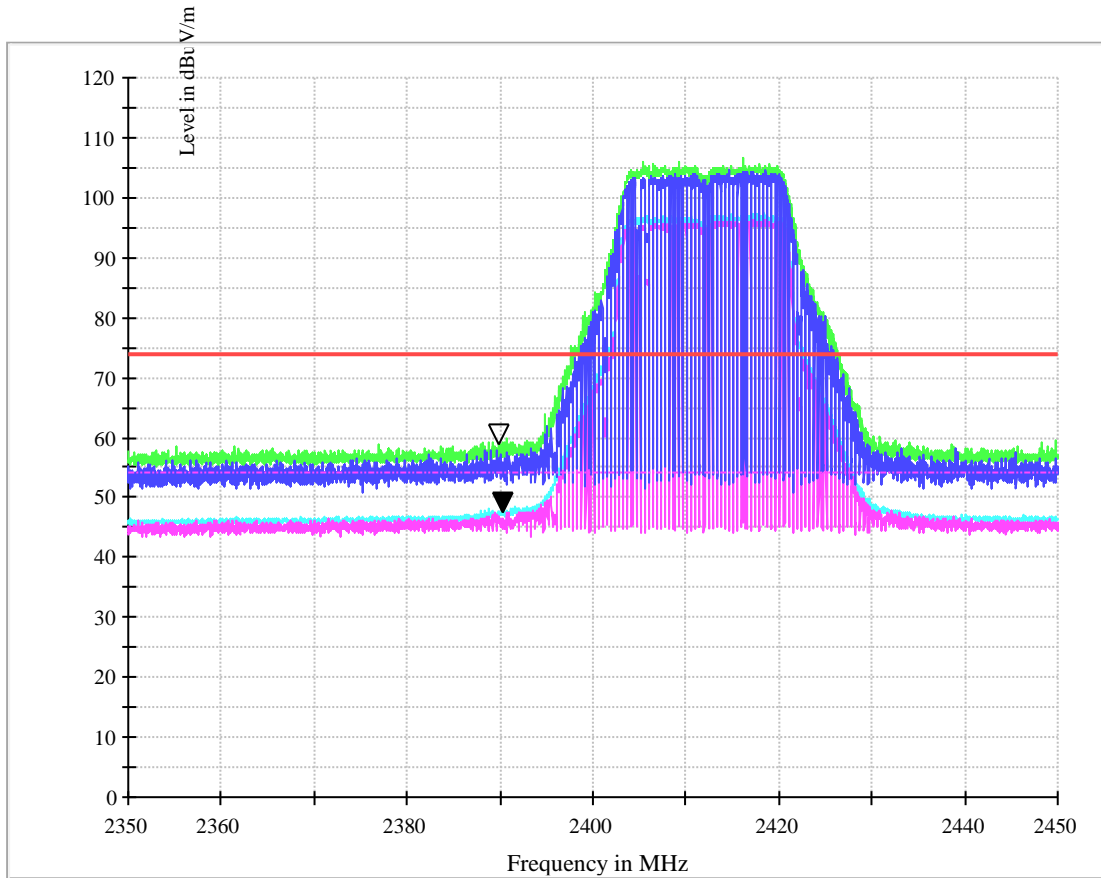

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (th)	Transd. (dB)
2390	47.85	54.00	6.15	150.0	H	45.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (th)	Transd. (dB)
2390	59.22	74.00	14.78	150.0	H	36.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.6.2 Channel 2

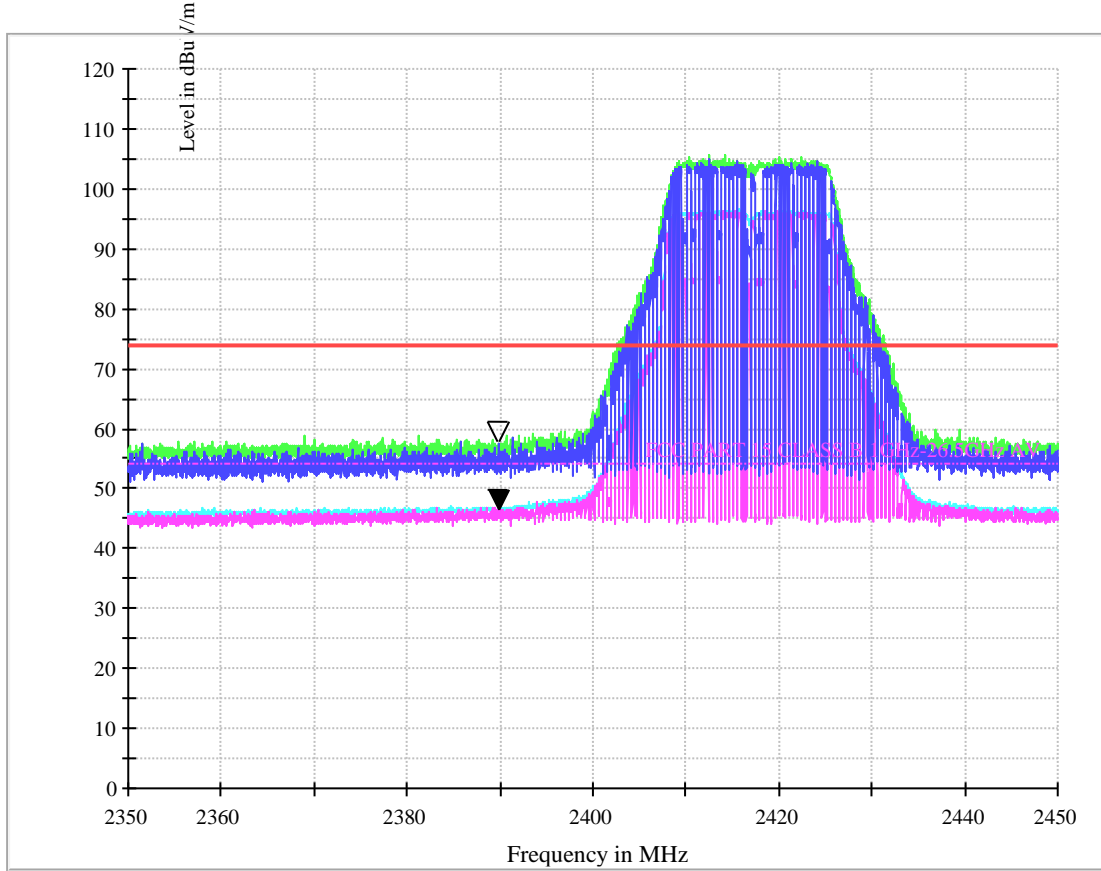

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	48.93	54.00	5.07	150.0	H	57.0	-6.8

MEASUREMENT RESULT: PK Detector



Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	58.16	74.00	15.84	150.0	H	59.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.6.3 Channel 10

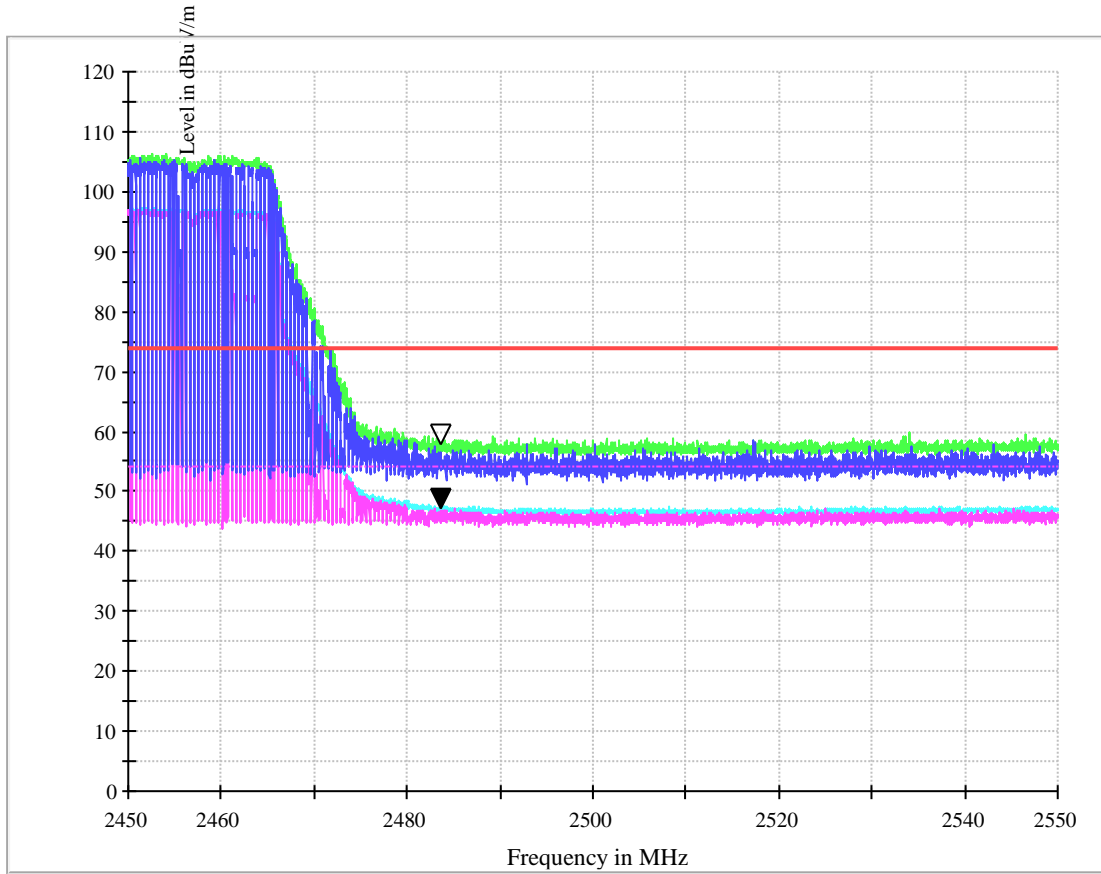

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	47.31	54.00	6.69	150.0	H	52.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	58.26	74.00	15.74	150.0	H	58.0	-10.2


Not2:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.6.4 Channel 11

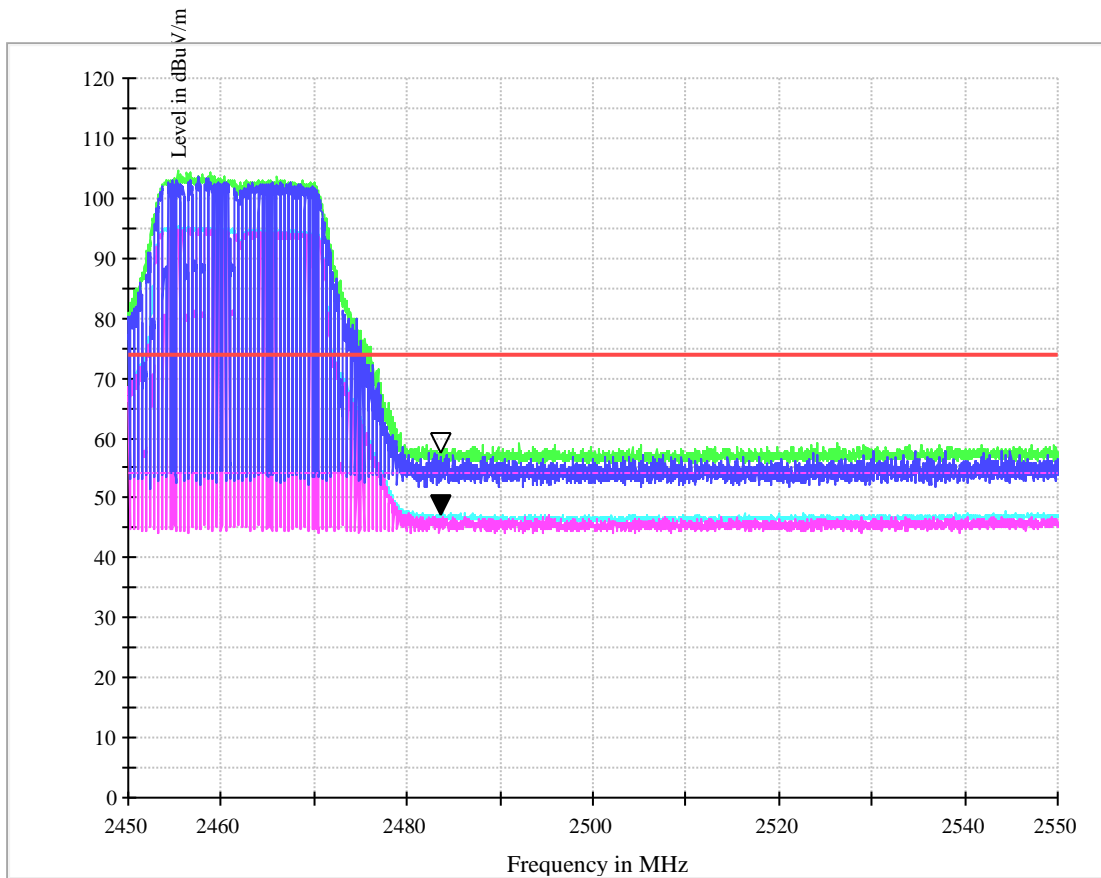

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
-----------------	----------------------	----------------------	-------------	-------------	-----	---------	--------------



2483.5	47.41	54.00	6.59	150.0	H	37.0	-10.2
--------	-------	-------	------	-------	---	------	-------

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	57.86	74.00	16.14	150.0	H	39.0	-10.2


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.7 Test Mode: 11N-MIMO-40M

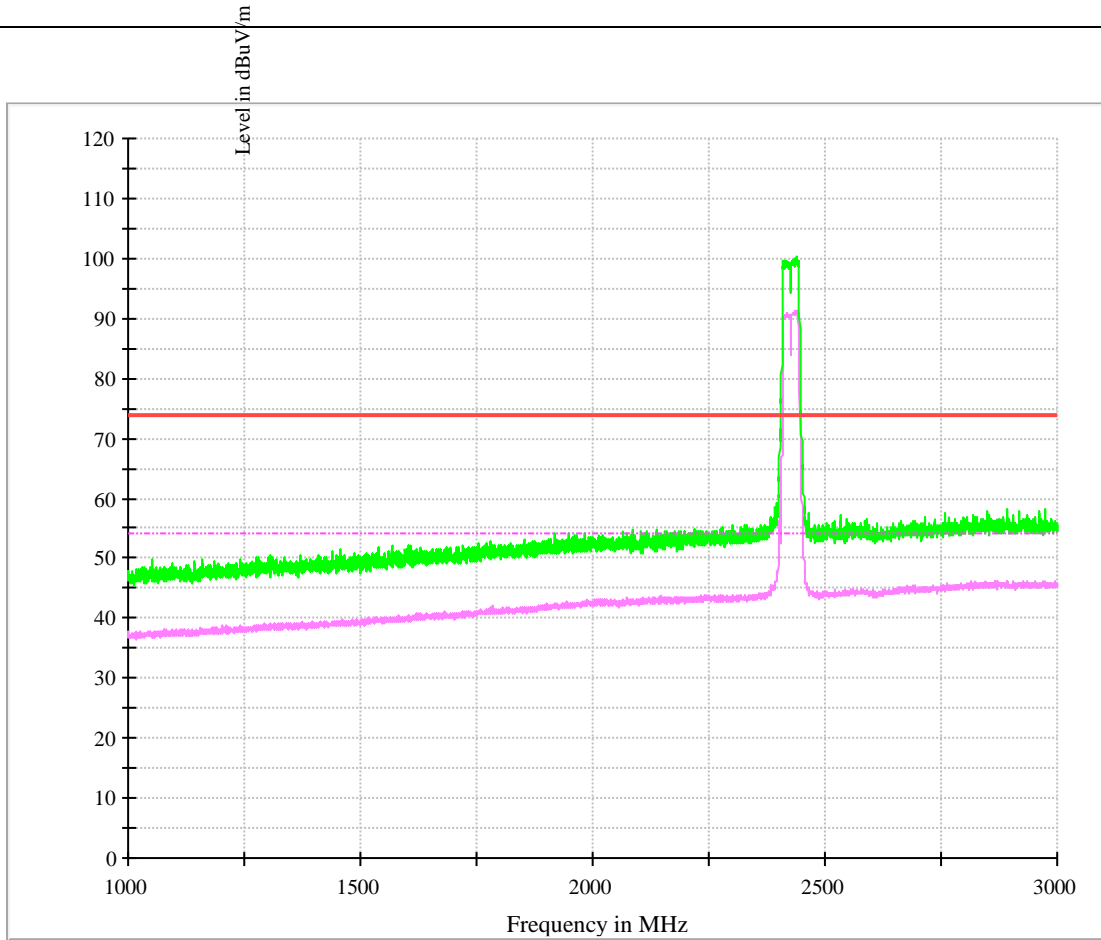

1.3.7.1 Channel 3

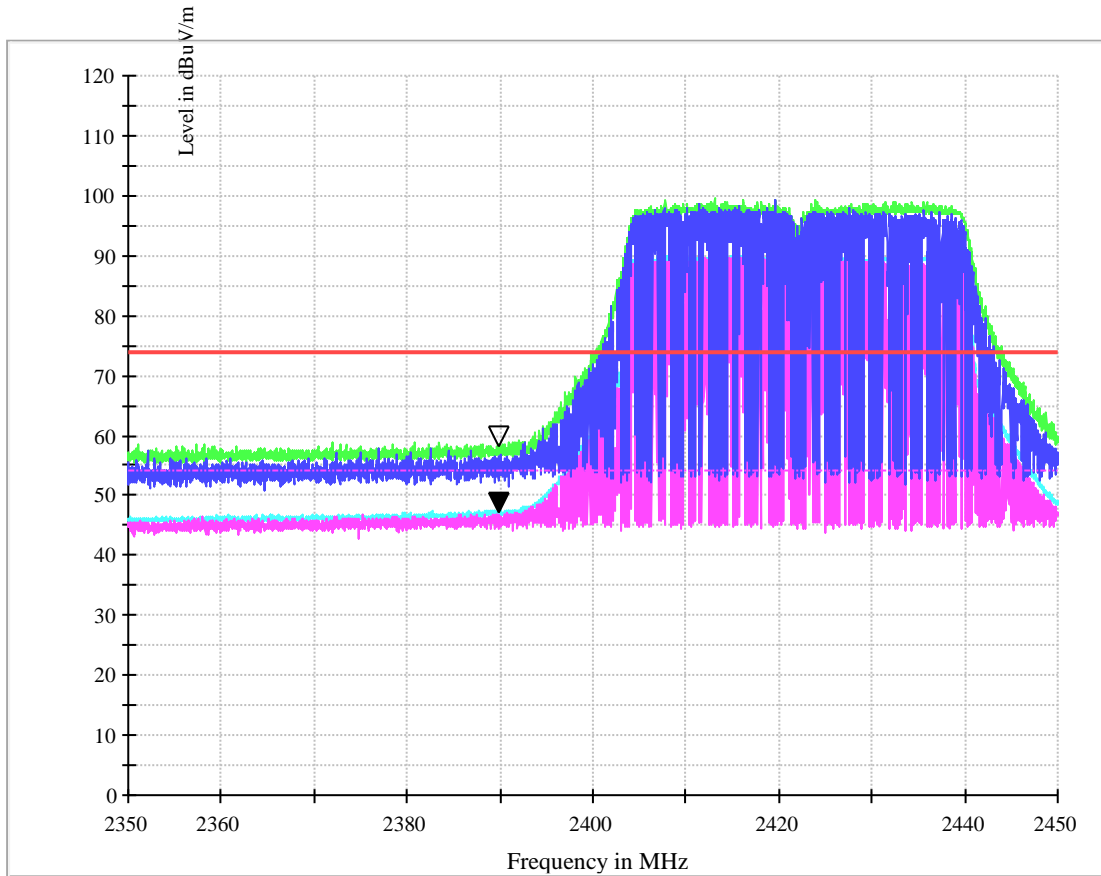

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	47.32	54.00	6.68	150.0	H	67.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	58.43	74.00	15.57	150.0	H	-16.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.7.2 Channel 4

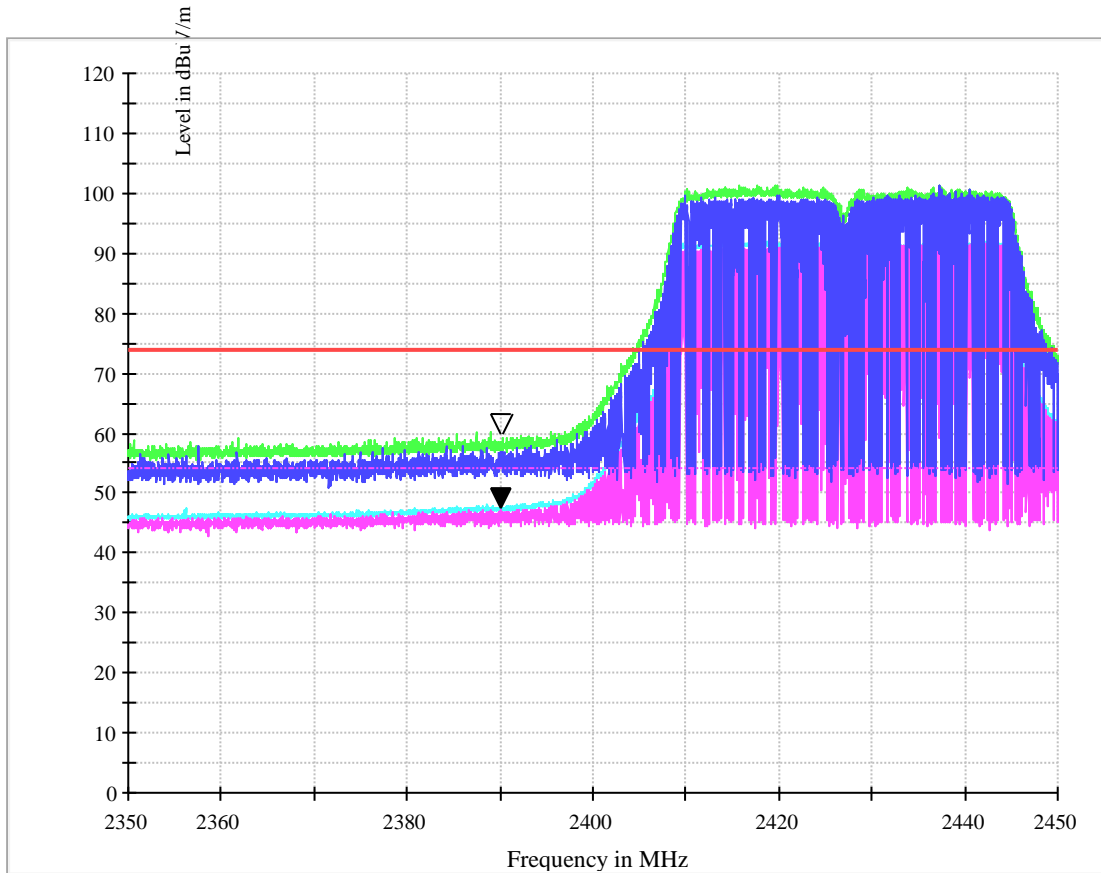

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
-----------------	----------------	----------------	-------------	-------------	-----	---------	--------------



2390	47.76	54.00	6.24	150.0	H	62.0	-6.8
------	-------	-------	------	-------	---	------	------

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2390	60.03	74.00	13.97	150.0	H	53.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.7.3 Channel 8

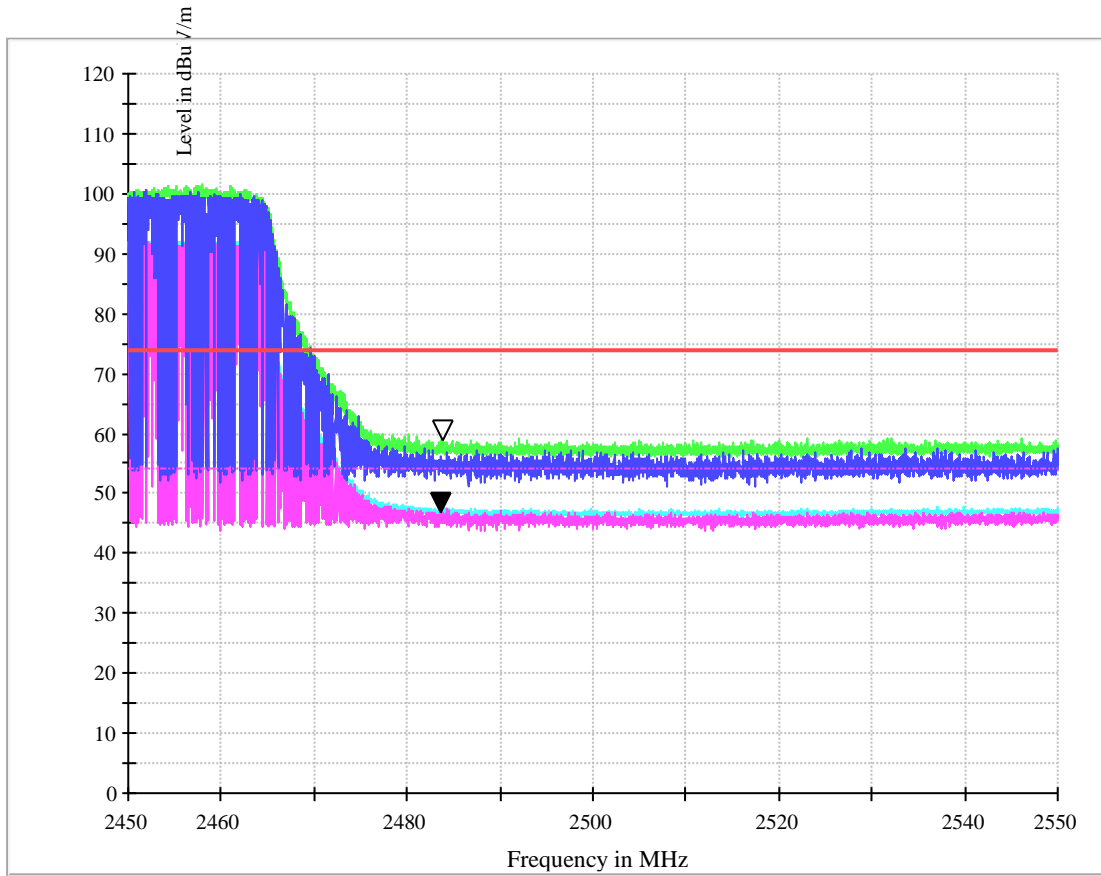

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	47.09	54.00	6.91	150.0	H	67.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	59.16	74.00	14.84	150.0	H	65.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.7.4 Channel 9

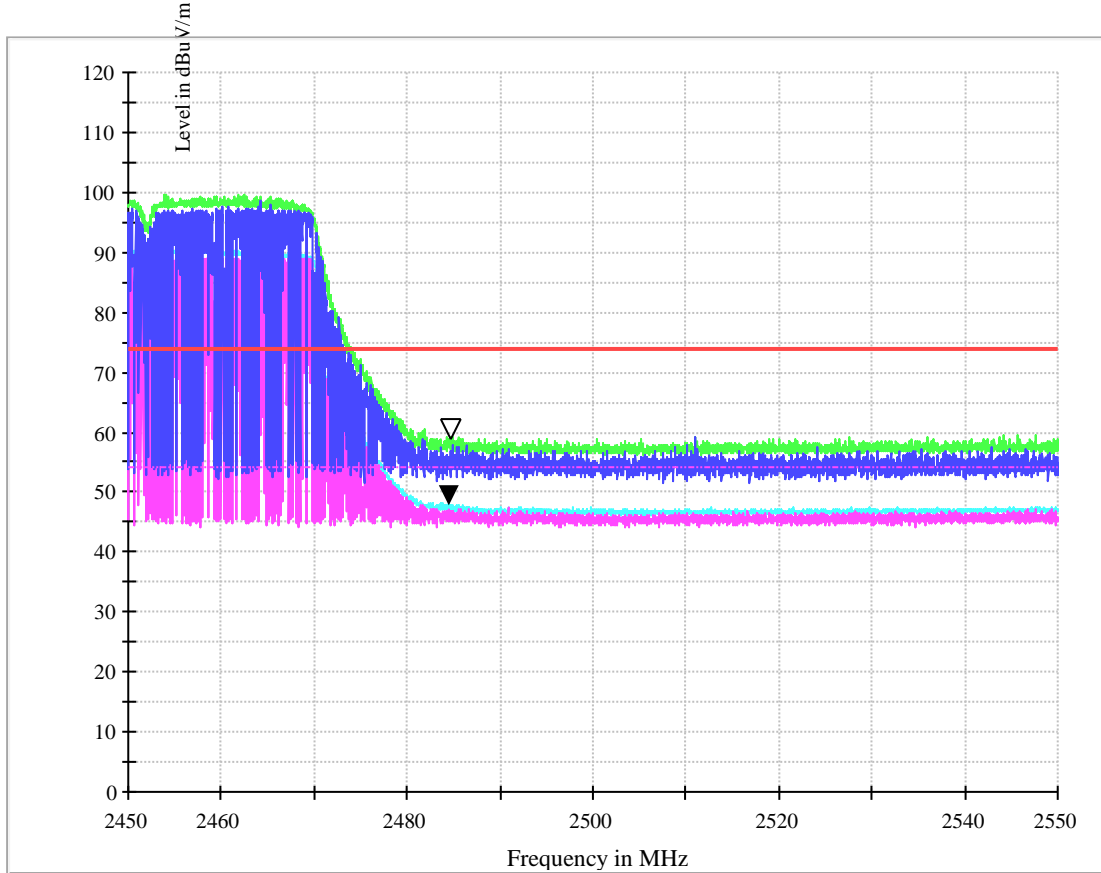

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	48.00	54.00	6.00	150.0	H	36.0	-10.2



MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth	Transd. (dB)
2483.5	59.15	74.00	14.85	150.0	H	26.0	-10.2

Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level



1.4 Part 4: Testing Range of “3 GHz to 18 GHz”


- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

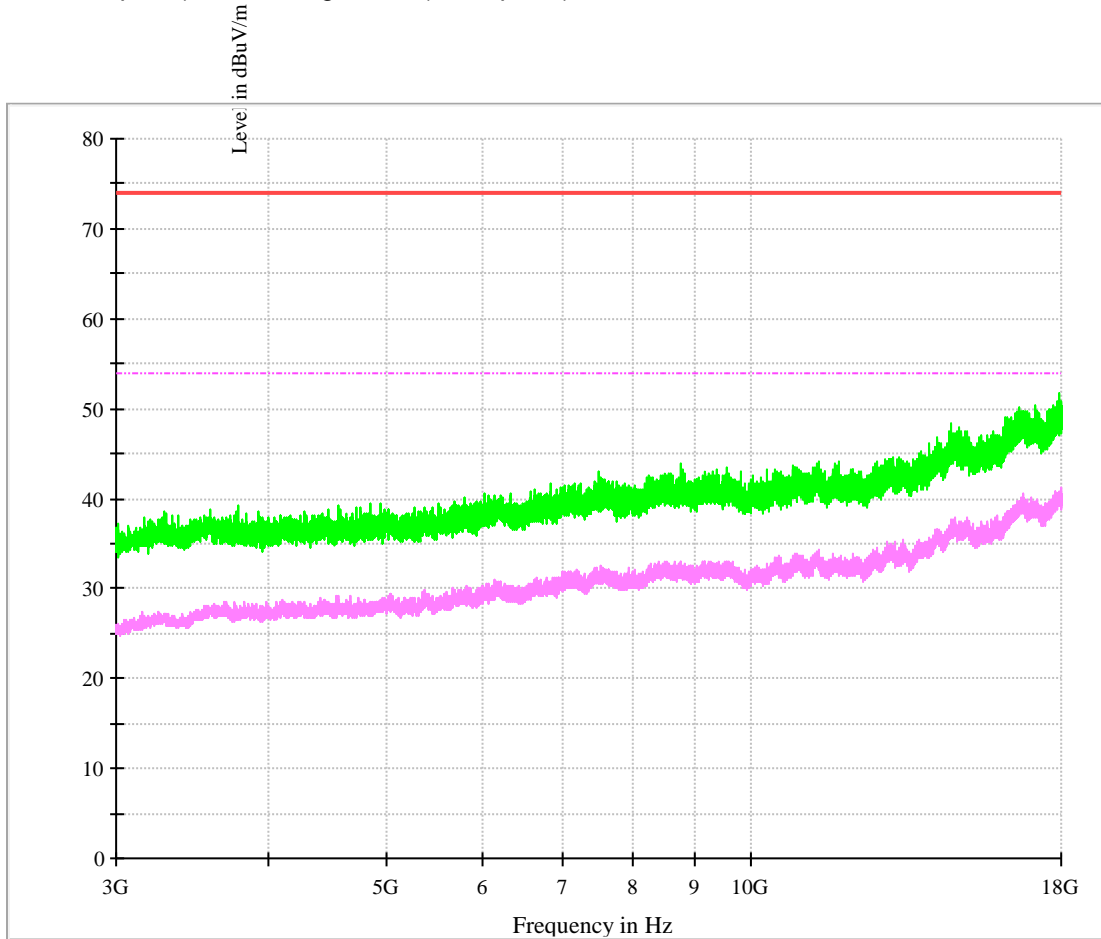




1.5 Part 5: Testing Range of “18 GHz to 26.5 GHz”

- Note 1: The test results and plot for testing range of “18 GHz to 26.5 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “18 GHz to 26.5 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

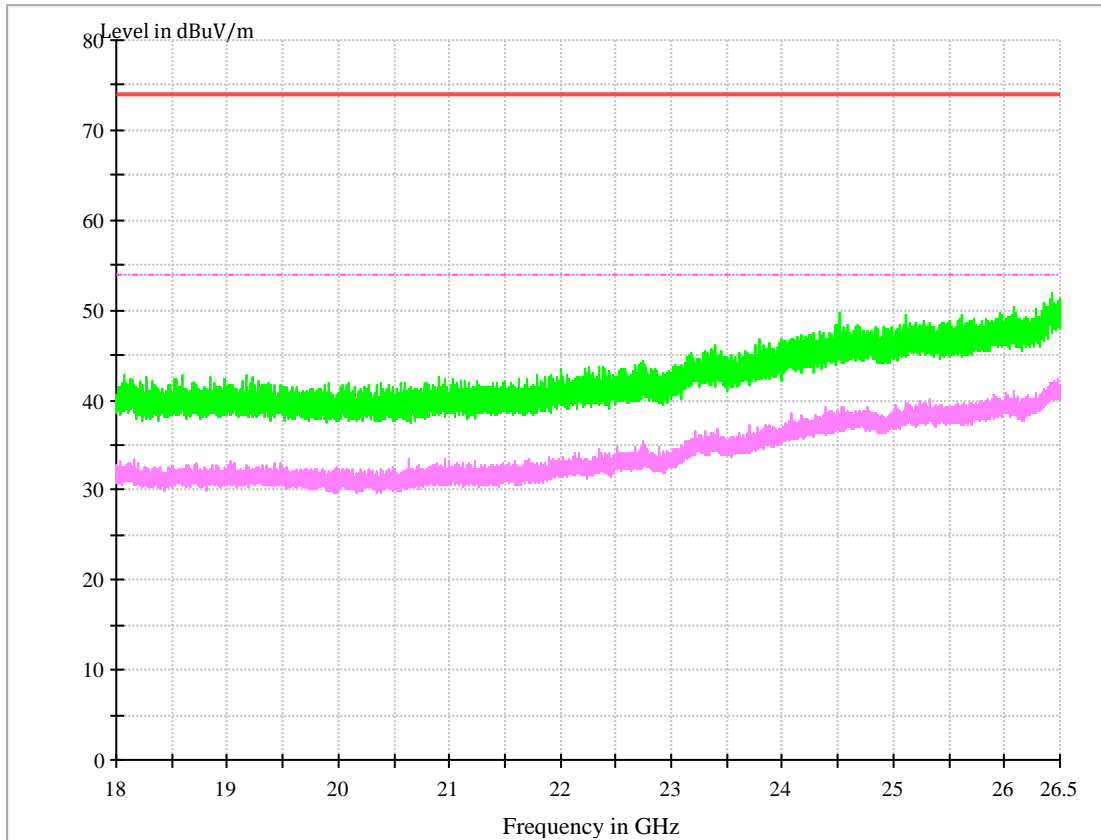

Appendix I: Conducted Emission at Power Port

Note: RBW =9 kHz, VBW = 30 kHz

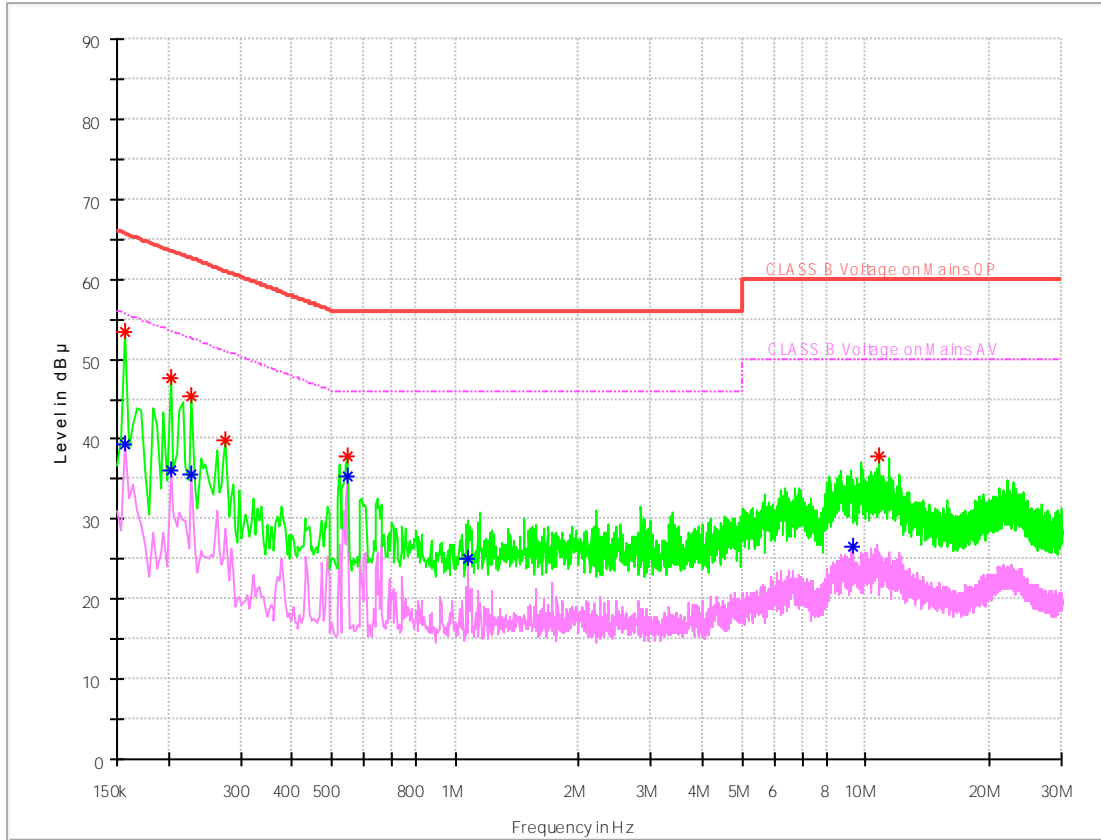

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Transd. (dB)	Margin (dB)	Line	PE
0.157462	53.43	65.6	9.7	12.17	N	FLO
0.202238	47.68	63.52	9.7	15.83	N	FLO
0.228356	45.5	62.51	9.7	17.01	L1	FLO
0.276862	39.88	60.91	9.7	21.03	L1	FLO
0.545512	37.91	56	9.7	18.09	N	FLO
10.769138	37.81	60	10.0	22.19	L1	FLO



MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V)	Limit (dB μ V)	Transd. (dB)	Margin (dB)	Line	PE
0.157462	39.29	55.6	9.7	16.31	N	FLO
0.202238	36.2	53.52	9.7	17.32	N	FLO
0.228356	35.7	52.51	9.7	16.81	L1	FLO
0.545512	35.31	46	9.7	10.69	N	FLO
1.07535	24.95	46	9.7	21.05	L1	FLO
9.2841	26.66	50	9.7	23.34	L1	FLO

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END