


Setting the time and date


To set the time and date for the handset display, press the left soft key to open the **MENU**, select **SETTINGS**, then select **DATE AND TIME**. Use the directional keypad to adjust the settings, and then press the left soft key to save your changes or the right soft key to cancel your changes. For the **DATE FORMAT**, note that you can also choose **MMM/DD** as a date format, which will display the month as a three letter code.

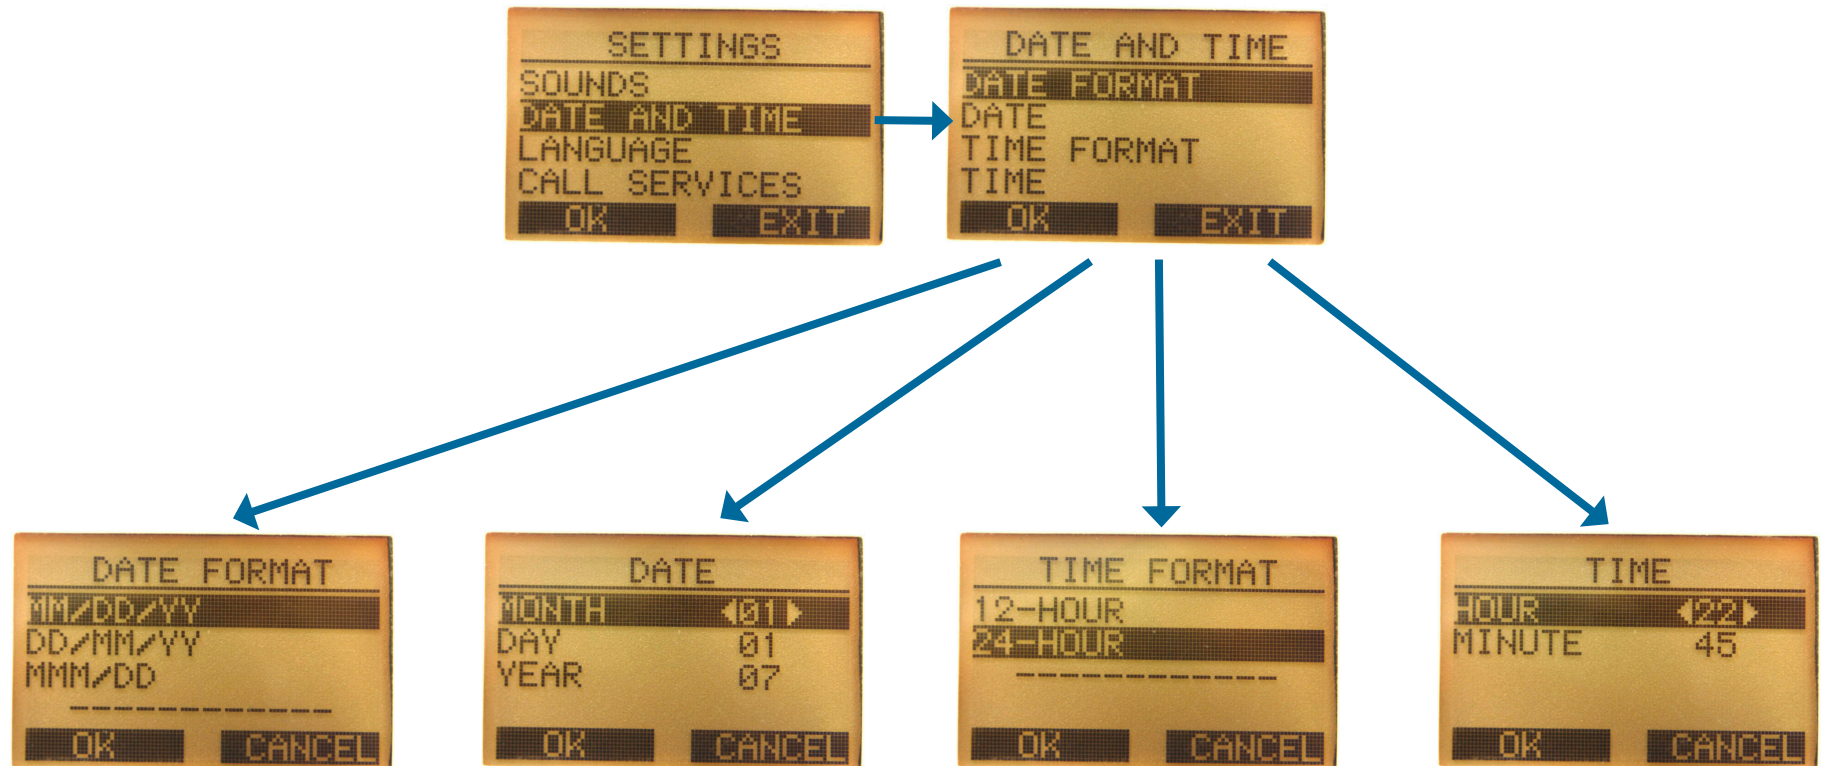


Call conference

The DHA-130 supports three-way call conference between a regular PSTN phone call and a D-Life call, or between two different D-Life calls. The DHA-130 also supports four-way conference by adding another handset connected to the same base station.

3-way conference: During a call, press the left soft key to open the **OPTIONS** menu, and select **HOLD CALL** to hold your current call. Select your calling mode, dial the number of the other party you wish to call, and press the call key. After connecting, press the left soft key to open the **OPTIONS** menu and select **CONFERENCE** to join the calls together.

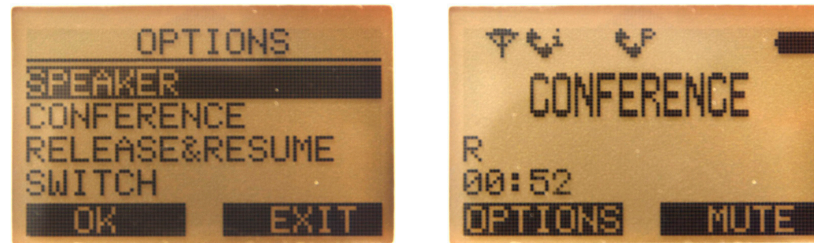

During a conference call, you can press the left soft key to enter the **OPTIONS** menu, then end a specific call or end all calls. **END CALL 1** will end the first call you connected to, and **END CALL 2** will end the second call you connected.

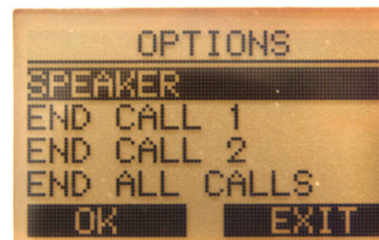


4-way conference: After setting up a 3-way call, you can add a handset to the conversation by pressing the **INT** key, selecting the handset you want to call, then after the other party connects, pressing the left soft key to open the **OPTIONS** menu and selecting **CONFERENCE**.

Emergency number calling

If you need to make an emergency call, such as to 911, make sure you are in (P) mode. D-Life VoIP service does not have emergency number access, so you must use your regular phone line for emergency calls. Also note that if you have a power outage, you will not be able to use the DHA-130 for emergency calls.


You can also store up to 20 emergency numbers that can be accessed quickly by pressing the **Services** button on the headset. Here, select **VIEW** and a list of stored numbers will appear. Here, you can enter a name and number for each entry, which you can set for things like the Police Department, the Fire Department, or your local hospital. Highlighting an entry and pressing the call key will call that number. All calls made through this **SERVICES** menu will use your regular phone line.

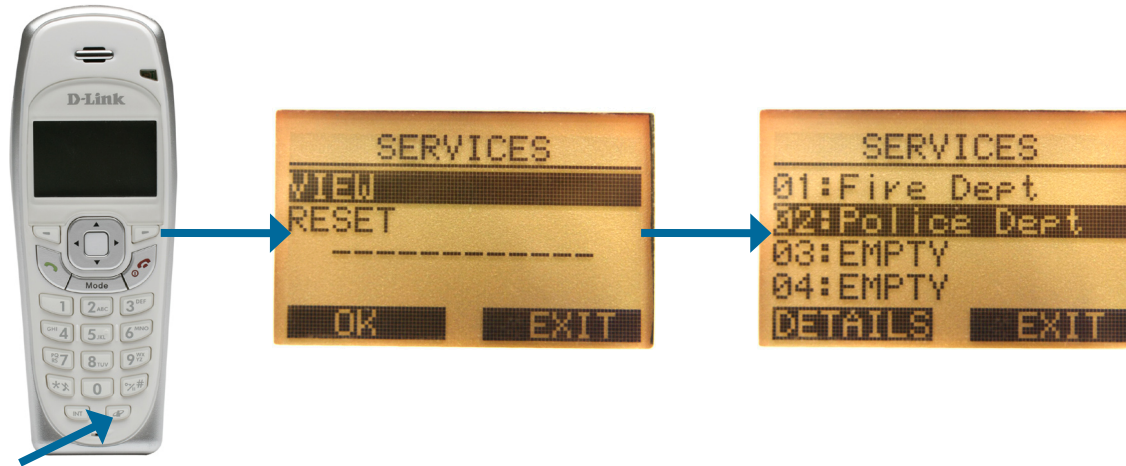

Extra functions

The handset offers additional functions such as an alarm clock, a timer, and a stopwatch. To access them, press the left soft key to open the **MENU**, then select **EXTRAS**.

Alarm clock - selecting **ALARM CLOCK** will let you set an alarm to wake you up or remind you of an important event. Select **ON** to enable the alarm, then set the time you want the alarm to go off using the directional keypad. A small clock icon will appear at the bottom of your display when the alarm is turned on. When the alarm rings, press the right soft key to **STOP** the alarm, or press the left soft key to **SNOOZE** the alarm for 10 minutes. If you do not press any buttons for 1 minute, the alarm will automatically snooze and ring again after 10 minutes.

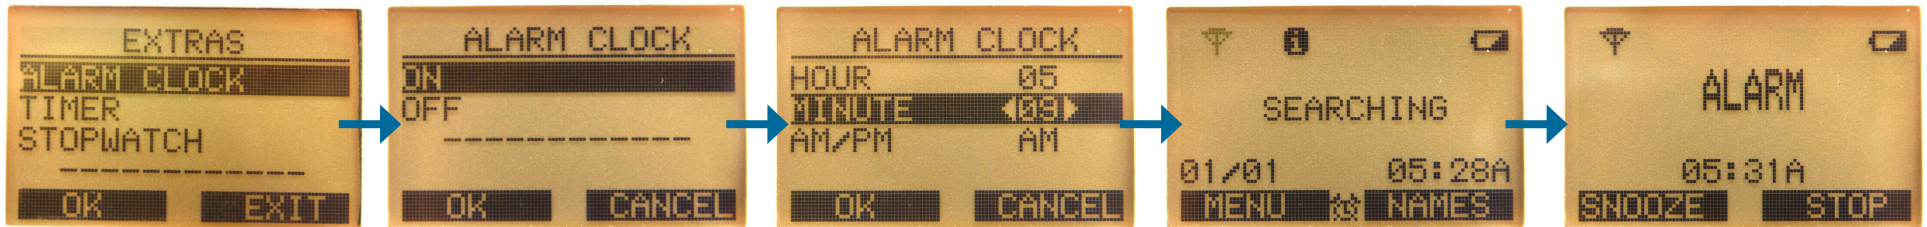

Timer - selecting **TIMER** will let you set an alarm that will go off after the amount of time you select. Use the directional pad to select the duration of the timer, then press the left soft key to start the timer. When the alarm goes off, press the right soft key to stop the alarm. If you do not press any buttons for 1 minute, the alarm will turn off automatically. You can also cancel the timer by going back to the **TIMER** menu, then pressing the left soft key to turn off the timer.

