

Hearing Aid Compatibility RF Near Field Emissions Test Report

Model: RM-860**FCC ID:** QMNRN-860**Intertek Report Number:** 100980503LEX-001**Tested in accordance with:**

ANSI C63.19-2007
FCC Rule Parts: §20.19(b), §6.3(v), §7.3(v)

Testing Performed By:

Intertek
731 Enterprise Drive
Lexington, KY 40510

Testing Authorized By:

Nokia
16620 West Bernardo Drive
San Diego, CA 92127

Prepared By:
Jason Centers, Senior Project Engineer**Date:** 1/2/13**Approved By:**
Bryan Taylor, Team Leader – Engineering**Date:** 1/2/13

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 2 / 44
--	---	---

TABLE OF CONTENTS

	Page
SECTION 1: INTRODUCTION	3
SECTION 2: SUMMARY OF TEST RESULTS	4
SECTION 3: EQUIPMENT UNDER TEST	5
3.1 Test Sample Photographs.....	5
3.2 Test Sample Description.....	5
3.3 Sample Modification.....	6
SECTION 4: TEST SITE DESCRIPTION	7
SECTION 5: VALIDATION PROCEDURES.....	8
5.1 System Validation with Calibration Dipole	8
5.2 Probe Modulation Factor.....	10
SECTION 6: MEASUREMENT PROCEDURES	11
6.1 ANSI Near-Field Categories.....	11
6.2 Wireless Device – Positioning and Call Setup.....	12
6.2.1 Device Positioning	12
6.3 Wireless Device (WD) Call Procedure.....	14
6.4 Near-Field RF Emissions Procedure	14
6.5 Interpretation and Post-Processing of Data.....	14
SECTION 7: TABULAR TEST DATA.....	15
7.1 Conducted Output Power.....	15
SECTION 8: RF EMISSIONS TEST DATA	16
SECTION 9: TEST EQUIPMENT	17
9.1 HAC RF Measurement System.....	17
9.2 Support Equipment	17
SECTION 10: MEASUREMENT UNCERTAINTY	18
10.1 Equipment Uncertainty	18
SECTION 11: DOCUMENT HISTORY	19
SECTION 12: REFERENCES	19
SECTION 13: HAC RF EMISSIONS TEST PLOTS	20
SECTION 14: HAC RF EMISSIONS SYSTEM VALIDATION PLOTS.....	36
SECTION 15: CALIBRATION DOCUMENTS	44

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860	FCC ID QMNRM-860
	INTERTEK REPORT NUMBER 100980503LEX-001	PAGE 3 / 44

SECTION 1: INTRODUCTION

The RM-860 was evaluated for HAC RF (E and H Field Emissions) in accordance with the requirements for RF Near Field Emissions compliance testing defined in ANSI C63.19-2007. Testing was performed at the Intertek facility in Lexington, Kentucky.

Per ANSI C63.19, testing that is performed on a wireless device establishes categories, which, when coupled with those of a hearing aid, can indicate to healthcare practitioners and hearing aid users which hearing aids are compatible with which wireless devices. The ANSI standard provides tests that can be used to assess the electromagnetic characteristics of hearing aids and wireless devices, and assigns them to these categories.

The aim of this report, therefore, is to provide RF measurements of the near-field electric and magnetic fields emitted by a wireless device to categorize these emissions for correlation with the RF immunity of a hearing aid.

For this evaluation, the SPEAG DASY52 HAC extension was used. This near-field measurement system is comprised of a high-precision robot, HAC Test Arch, calibration dipoles, electric field probes (ER3DV4R), magnetic field probes (H3DV6), dipole holder, EUT holder and DASY52 software with SEMCAD post-processor for generating test plots.

Electric and magnetic fields of a wireless device are scanned with the free-space probes in a 5 x 5 cm area located 15 mm above its acoustic or T-Coil output. The maximum field values in 9 sub-grids of the electrical and magnetic field scans are evaluated automatically according to the rules defined in the standard and assigned a classification.

The specially designed Test Arch allows a high precision positioning of both the device and any of the calibration dipoles. The broadband dipoles are calibrated at a single frequency and are used for system performance checks.

This report demonstrates compliance for near-field emissions only and not for T-coil HAC performance compliance.

SECTION 2: SUMMARY OF TEST RESULTS

This report contains data for the RM-860 in CDMA mode only. The minimum HAC RF ("M") ratings that were obtained for the RM-860 are summarized below:

Table 1: Summary of Test Results with Overall Rating

RF Test	Band	Call Mode	Channel	Peak Field (V/m) or (A/m)	M-Rating
E-Field	CDMA Cell	Full Rate	777	71.23	M4
	CDMA Cell	1/8th Rate	1013	70.52	M4
	CDMA PCS	Full Rate	25	57.32	M4
	CDMA PCS	1/8th Rate	25	44.32	M4
H-Field	CDMA Cell	Full Rate	777	0.1631	M4
	CDMA Cell	1/8th Rate	777	0.165	M4
	CDMA PCS	Full Rate	25	0.1272	M4
	CDMA PCS	1/8th Rate	25	0.13	M4
Overall M Rating					M4

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860	FCC ID QMNRN-860
	INTERTEK REPORT NUMBER 100980503LEX-001	PAGE 5 / 44

SECTION 3: EQUIPMENT UNDER TEST

3.1 Test Sample Photographs

Photographs of the RM-860 can be found in a separate exhibit.

3.2 Test Sample Description

TEST SAMPLE		
NAME/MODEL	RM-860	
FCC ID	QMNRN-860	
IMEI	354106050009056	
HW ID	0103	
SW VERSION	1532.5801.1247.0000	
SAMPLE TYPE	Prototype	
MODE(S) OF OPERATION	GSM, WCDMA, CDMA	
FREQUENCY RANGE	GSM 850 – 824.2 – 848.6 MHz GSM 1900 – 1850.2 – 1909.8 MHz WCDMA 850 – 826.4 – 846.6 MHz WCDMA 1900 – 1852.4 – 1907.6 MHz CDMA Cell – 824.7 – 848.31 MHz CDMA PCS – 1851.2 – 1908.75 MHz	
ANTENNA DESCRIPTION		
TYPE	Internal fixed antenna	
TEST SAMPLE ACCESSORIES		
BATTERY TYPE	Internal Battery	
OTHER ACCESSORIES	None	
JOB DESCRIPTION		
MANUFACTURER	Nokia, 16620 West Bernardo Drive, San Diego, CA, 92127	
CONTACT PERSON Mary Thomas	PHONE (858) 831-5000	FAX NA
EUT RECEIVE DATE 12/6/12	TEST START DATE 12/6/12	TEST END DATE 12/10/12
EUT CONDITION Good condition	EUT TESTED BY Jason Centers, Senior Project Engineer	

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860	FCC ID QMNRM-860
	INTERTEK REPORT NUMBER 100980503LEX-001	PAGE 6 / 44

Table 2: Summary of Air Interfaces & Bands Supported

Air-Interface	Band (MHz)	Type	C63.19/Tested	Simultaneous Transmissions Note: Not to be tested	Reduced Power 20.19(c)(1)	Voice over Digital Transport
GSM	850	Voice	Yes	Yes	No	NA
	1900	Voice	Yes	BT, WLAN	No	
	GPRS/EDGE	Data	N/A	Yes BT, WLAN	No	Yes
WCDMA	850	Voice/Data	Yes	Yes	No	Yes
	1900	Voice/Data	Yes	BT, WLAN	No	
CDMA	850	Voice/Data	Yes	Yes	No	Yes
	1900	Voice/Data	Yes	BT, WLAN	No	
LTE	700 (Band 13)	Data	NA	Yes BT, WLAN	No	Yes
LTE	1700 (Band 4)	Data	NA	Yes BT, WLAN	No	Yes
BT	2450	Data	NA	Yes GSM, GPRS/EDGE, WCDMA, LTE	No	No
WLAN	2450	Data	NA	Yes GSM, GPRS/EDGE, WCDMA, LTE	No	Yes
WLAN	5GHz Bands	Data	NA	Yes GSM, GPRS/EDGE, WCDMA, LTE	No	Yes

Note: this report only contains data for CDMA modes.

3.3 Sample Modification

No modifications were made to the test sample during this evaluation.

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRM-860 PAGE 7 / 44
--	---	---


SECTION 4: TEST SITE DESCRIPTION

The Intertek HAC test site is located at 731 Enterprise Drive, Lexington, KY 40510, USA.

The HAC RF Setup is comprised of the SPEAG DASY 52 Hearing Aid Compatibility extension, which is used to measure electric and magnetic fields generated by wireless communication devices in the region controlled for use by a hearing aid in accordance with ANSI C63.19.

This system is installed in an ambient-free shielded chamber. During each day of testing, the ambient temperature was verified to be $23.0 \pm 5^{\circ}\text{C}$.

Figure 1: Intertek HAC RF Test Site

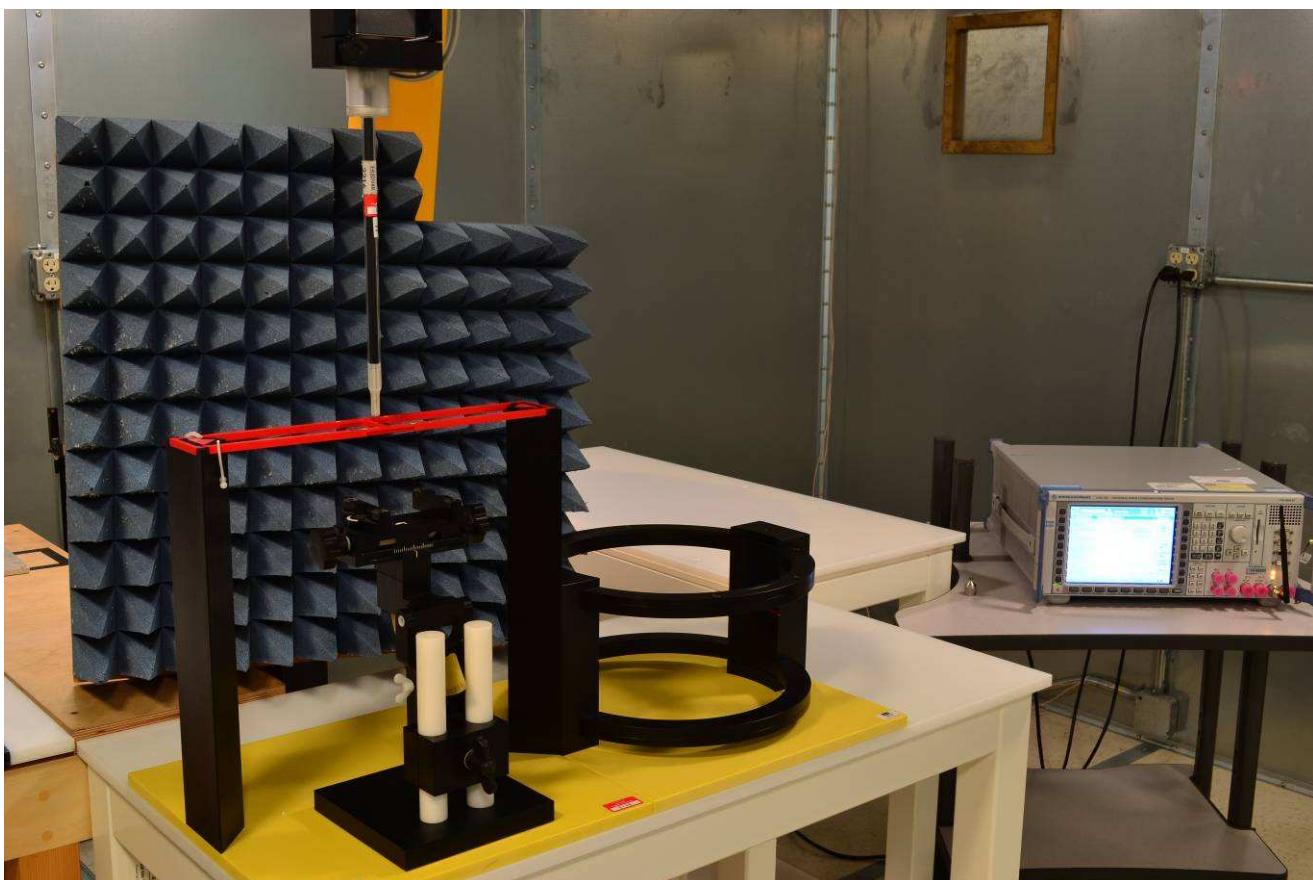

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 8 / 44
--	---	---

SECTION 5: VALIDATION PROCEDURES


5.1 System Validation with Calibration Dipole

As part of the SPEAG HAC extension, calibration dipoles (CD835V3 and CD1880V3) are provided to validate the test setup prior to any measurements at the frequency of interest. The dipoles are calibrated to a known electric and magnetic field at a specified forward power.

A E or H field calibration was performed on each day prior to the start of testing to verify the correct operation of the setup.


- a. The appropriate SPEAG probe (ER3DV4R for E-Field, H3DV6 for H-field) was installed into the DAE.
- b. The correct position of the HAC Test Arch's four reference points was verified using the DASY52 software.
- c. The appropriate dipole (CD835V3 or CD1880V3) was selected, depending on the desired frequency range to be validated.
- d. The calibration dipole was placed in the position that is normally occupied by the wireless device, as shown below.

Figure 2: Dipole Mounted under Test Arch

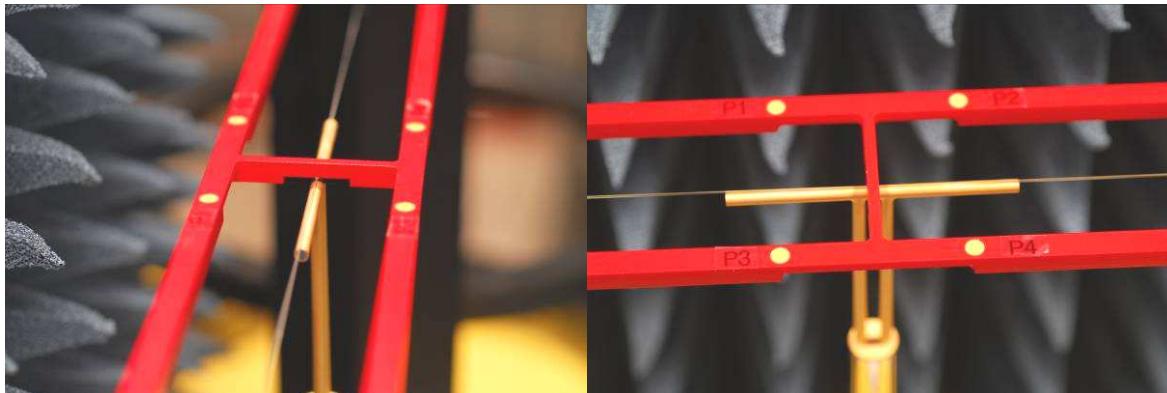

- e. The test bed shown in Figure 3 was used to illuminate the CD835V3 or CD1880V3 validation dipole with 20 dBm (100 mW) of forward power. This is the same input power used during the manufacturer's calibration of the dipole. The CW input signal was set to the appropriate frequency.

Figure 3: Setup for Dipole Validation

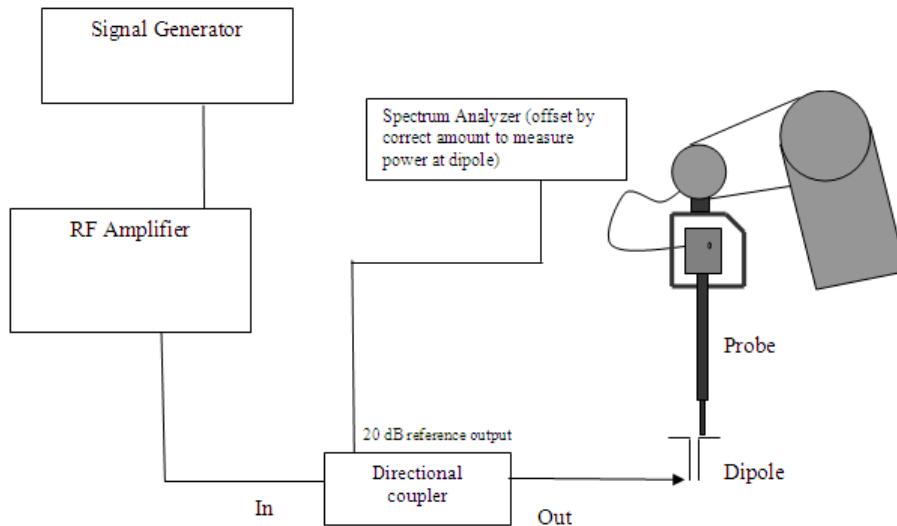

- f. The DASY52 profile was used to measure the maximum field strength along the length of the dipole arm. A separation distance of 10 mm was maintained between the center of the probe sensor and the top of the dipole. Note: This is how the manufacturer's dipole calibration was performed.
- g. Once the scan was complete, the E-field and H-field results were verified to be within 10% of the calibration lab's result.
- h. Dipole validation plots are shown in a appendix at the end of this report. Results from the dipole validation performed prior to testing are shown in Table 3 and Table 4.

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860	FCC ID QMNRN-860
	INTERTEK REPORT NUMBER 100980503LEX-001	PAGE 10 / 44

Table 3: Dipole Validation Results – 835 MHz

CD835V3 Dipole Validation Results					
Date	Input Power (mW) with f = 835 MHz	H-field (A/m)	H-field Deviation From Calibration (%)	Ave. Maximum E-field (V/m)	E-field Deviation From Calibration (%)
12/6/2012	100	0.4625	2.78	157.5	5.46
12/10/2012	100	0.4648	3.29	-	-

Table 4: Dipole Validation Results – 1880 MHz

CD1880V3 Dipole Validation Results					
Date	Input Power (mW) with f = 1880 MHz	H-field (A/m)	H-field Deviation From Calibration (%)	Ave. Maximum E-field (V/m)	E-field Deviation From Calibration (%)
12/6/2012	100	0.454	2.16	127.5	8.21
12/7/2012	100	-	-	129.5	6.77

5.2 Probe Modulation Factor

The probe modulation response of the E and H Field probes have been calibrated with the communications systems used for the evaluation. The probe modulation factor calibration was provided by SPEAG in accordance with ANSI C63.19:2007 and is automatically applied to the measured values in the DASY52 post processor.

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860	FCC ID QMNRN-860
	INTERTEK REPORT NUMBER 100980503LEX-001	PAGE 11 / 44

SECTION 6: MEASUREMENT PROCEDURES

Near-field E and H Field emissions measurements were taken by following the procedures outlined below. A complete evaluation was performed per the guidelines provided by ANSI C63.19.

6.1 ANSI Near-Field Categories

The procedures outlined in ANSI C63.19 for measuring near-field RF Emissions from a wireless device (WD) were followed. The test criteria (categories) to be met are stated in Table 7-4 of ANSI C63.19-2007 (see Table 5, below). This table was used to assign the wireless device's "M" rating based on the AWF shown in Table 6.

Table 5: ANSI Near-Field Categories in Linear Units

Category		Telephone RF parameters < 960 MHz			
Near field	AWF	E-field emissions		H-field emissions	
Category M1/T1	0	631.0 to 1122.0	V/m	1.91 to 3.39	A/m
	-5	473.2 to 841.4	V/m	1.43 to 2.54	A/m
Category M2/T2	0	354.8 to 631.0	V/m	1.07 to 1.91	A/m
	-5	266.1 to 473.2	V/m	0.80 to 1.43	A/m
Category M3/T3	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M4/T4	0	< 199.5	V/m	< 0.60	A/m
	-5	< 149.6	V/m	< 0.45	A/m

Category		Telephone RF parameters > 960 MHz			
Near field	AWF	E-field emissions		H-field emissions	
Category M1/T1	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M2/T2	0	112.2 to 199.5	V/m	0.34 to 0.60	A/m
	-5	84.1 to 149.6	V/m	0.25 to 0.45	A/m
Category M3/T3	0	63.1 to 112.2	V/m	0.19 to 0.34	A/m
	-5	47.3 to 84.1	V/m	0.14 to 0.25	A/m
Category M4/T4	0	< 63.1	V/m	< 0.19	A/m
	-5	< 47.3	V/m	< 0.14	A/m

Table 6: Articulation Weighting Factor

Standard	Technology	AWF (dB)
TIA/EIA/IS-2000	CDMA	0
TIA/EIA-136	TDMA (50 Hz)	0
J-STD-007	GSM (217)	-5
T1/T1P1/3GPP	UMTS (WCDMA)	0
iDEN	TDMA (22 Hz and 11 Hz)	0


 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 12 / 44
--	---	--

6.2 Wireless Device – Positioning and Call Setup


6.2.1 Device Positioning

- a. The DASY52 HAC RF test arch was installed on the phantom cover.
- b. A foam absorber panel, shown in Figure 4, was placed between the robot and the test arch in order to mitigate RF reflections from the robot during E-Field measurements.


Figure 4: Absorber Panel

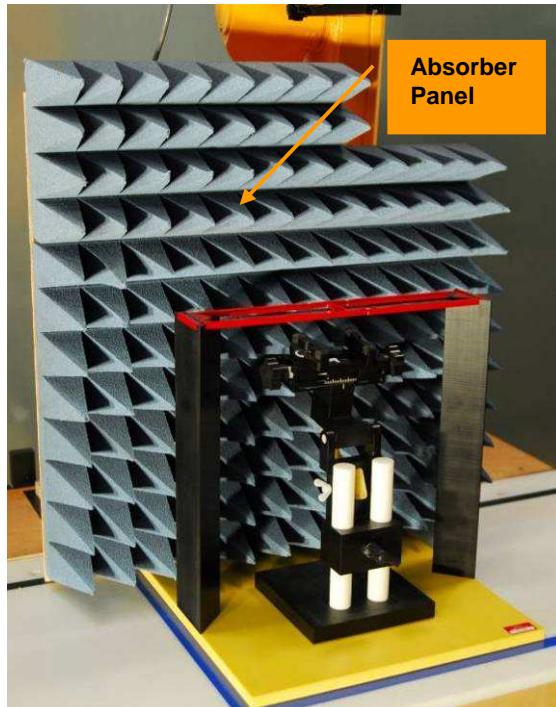

- c. The correct position of the test arch was verified by moving the free-space probe to its 4 reference points using the DASY52 software. If any variations were seen, the reference points were re-taught.
- d. The wireless device was mounted in the device holder shown in Figure 5.

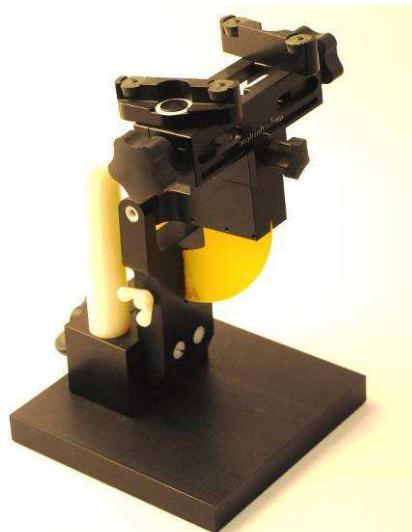Figure 5: Device Holder

e. The wireless device was then centered under the test arch as shown in Figure 6. The acoustic output (or T-Coil location, as required) of the WD coincided with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame.

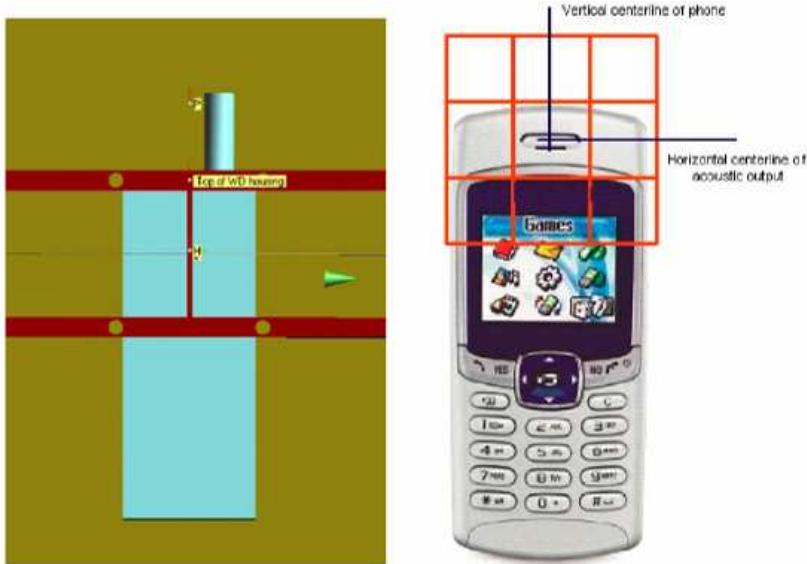Figure 6: Centering the WD under the Test Arch

f. The reference plane of the wireless device was then positioned as follows: After the phone was centered, it was adjusted until the reference plane was parallel to, and touching the bottom of the test arch. The reference plane is the planar area that contains the highest point in the area of the WD that normally rests against the user's ear. The measurement plane is 15 mm parallel to, and above the reference plane, and is measured to the center of the probe sensor per ANSI C63.19-2007.

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 14 / 44
--	---	--

6.3 Wireless Device (WD) Call Procedure

- a. A fully charged battery was installed in the phone.
- b. The WD was placed into a call using a base station simulator.
- c. CDMA devices were tested in RC1/SO2 (Full Rate) & RC1/SO3 (1/8th Rate) configurations unless otherwise noted.
- d. The WD was configured for normal operation at maximum rated output power.
- e. Since the presence of wires or conductors close to the WD will disturb the RF field, the WD was operated under its own power source, with no external connections.

6.4 Near-Field RF Emissions Procedure

- a. All system parameters in the DASY52 software (phantom section, communication system, crest factor, type of probe, etc) were verified to be correct.
- b. The Phantom adjustment and Verification steps were run to guarantee the proper placement and separation of the test arch in relation to the RF probe.
- c. The scan height of the free-space probe was verified. Different gauge blocks were used to verify the gap between the probe and the top of the test arch. This guaranteed a proper 15 mm separation between the device reference plane and the probe's measurement plane.
- d. The Hearing Aid Compatibility test was then run. A 5 cm x 5 cm area, divided into 9 sub-grids and centered on the device acoustic (or T-coil) output was evaluated with a 5 mm resolution (step size).
- e. The HAC procedure calculates power drift from the field strength at a reference point before and after each scan. If the power drift was greater than ± 0.20 dB, then the scan was repeated.

6.5 Interpretation and Post-Processing of Data

- a. The "M" rating of the wireless device was determined once a complete set of E-field scans and corresponding H-field scans for the same scan area and WD test modes was collected.
- b. Per ANSI C63.19, three contiguous blocks containing the highest field values may be excluded from either the E or H-field scans, but not to exceed 5 in total. The center sub-grid cannot be excluded. Therefore, 4 blocks will be common to both measurements.
- c. The SEMCAD post-processor uses the pre-determined PMF values to convert the average probe readings to peak field readings.
- d. The center of the 5 cm x 5 cm grid plus 3 other blocks that are common to the E and H-field scans were selected, per the ANSI standard.
- e. The "M" rating for the scan was assigned based on the criteria shown in Table 5 and Table 6.

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860	FCC ID QMNRN-860
	INTERTEK REPORT NUMBER 100980503LEX-001	PAGE 15 / 44

SECTION 7: TABULAR TEST DATA

7.1 Conducted Output Power

The conducted output power of the RM-860 was measured and summarized in Table 7. Conducted power measurements were taken with an base station simulator. Cable loss was accounted for within the test set by offsetting the readings by the appropriate amounts. Readings were taken at the RF port that was present on the RM-860 internal radio.

Table 7: Conducted Output Power - CDMA

Band	Channel	Frequency (MHz)	Avg Power (dBm)				
			RC1/SO2	RC1/SO55	RC1/SO3	RC3/SO2	RC3/SO55
Cellular	1013	824.7	22.97	22.97	23.12	23	23
	384	836.52	23.19	23.06	23.18	23.07	23.05
	777	848.31	23	23	23.05	22.96	22.97
PCS	25	1851.25	21.58	21.52	21.61	21.57	21.56
	600	1880	21.77	21.77	21.77	21.74	21.71
	1175	1908.75	21.99	21.91	22.12	21.92	21.95

SECTION 8: RF EMISSIONS TEST DATA

The results in the tables below summarize the data obtained when the device was tested in the operating conditions described previously. Plots of the measured near field emissions are shown in Section 13: of this report for the worse case measured channels in each band.

Table 8: E-Field Test Data

E-Field Emissions Data									
Band	Call Mode	Channel	Backlight	Measurement Plane Center (Acoustic/T-Coil)	Probe Modulation Factor	Drift (dB)	Excluded Cells	Peak E-Field (V/m)	M-Rating
CDMA Cell	Full Rate	1013	On	Acoustic	1.03	-0.06	None	69.82	M4
CDMA Cell	Full Rate	384	On	Acoustic	1.03	0.08	None	66.07	M4
CDMA Cell	Full Rate	777	On	Acoustic	1.03	-0.07	None	71.23	M4
CDMA Cell	1/8th Rate	1013	On	Acoustic	2.91	0.15	None	70.52	M4
CDMA Cell	1/8th Rate	384	On	Acoustic	2.91	-0.03	None	68.14	M4
CDMA Cell	1/8th Rate	777	On	Acoustic	2.91	-0.11	None	70.1	M4
CDMA PCS	Full Rate	25	On	Acoustic	1.03	-0.07	None	57.32	M4
CDMA PCS	Full Rate	600	On	Acoustic	1.03	0.1	None	39.68	M4
CDMA PCS	Full Rate	1175	On	Acoustic	1.03	-0.06	None	40.14	M4
CDMA PCS	1/8th Rate	25	On	Acoustic	2.91	0	None	44.32	M4
CDMA PCS	1/8th Rate	600	On	Acoustic	2.91	0	None	40.43	M4
CDMA PCS	1/8th Rate	1175	On	Acoustic	2.91	-0.1	None	40.68	M4

Table 9: H-Field Test Data

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860	FCC ID QMNRN-860
	INTERTEK REPORT NUMBER 100980503LEX-001	PAGE 17 / 44

SECTION 9: TEST EQUIPMENT

The following major equipment/components were used for the HAC RF evaluation:

9.1 HAC RF Measurement System

Table 10: HAC Measurement Equipment

Model	Manufacturer	Type of Equipment	Serial Number	Calibration Date	Calibration Due
RX-90	Stäubli	Robot	F11/5H1YA/A/01	N/A	N/A
ER3DV4R	SPEAG	Free-space E-field probe	2216	9/21/2012	9/21/2013
H3DV6	SPEAG	Free-space H-field probe	6220	9/21/2012	9/21/2013
CD835V3	SPEAG	Validation Dipole	1049	9/19/2012	9/19/2013
CD1880V3	SPEAG	Validation Dipole	1042	9/19/2012	9/19/2013
DAE4	SPEAG	Data Acquisition Electronics	258	9/12/2012	9/12/2013
SD HC P01BA	SPEAG	HAC RF Test Arch	1046	N/A	N/A

9.2 Support Equipment

Table 11: Test Support Equipment

Model	Manufacturer	Type of Equipment	Serial Number	Calibration Date	Calibration Due
CMU200	Rohde and Schwarz	Wireless Communications Test Set	119978	6/29/2012	6/29/2013
8960	Agilent	Wireless Communications Test Set	G843344835	3/20/2012	3/20/2013
ZHL-4240	Mini-Circuits	Amplifier	012012	Time of Use	Time of Use
DSG-D3000A	Agilent	Signal Generator	US37040988	3/20/2012	3/20/2013
8651A	Gigatronics	Power Meter	8650456	6/29/2012	6/29/2013
80701A	Gigatronics	Power Sensor	1834169	6/29/2012	6/29/2013
NRP-Z51	Rohde and Schwarz	Thermal Power Sensor	100705	9/14/2012	9/14/2013

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860	FCC ID QMNRN-860		
	INTERTEK REPORT NUMBER 100980503LEX-001			PAGE 18 / 44

SECTION 10: MEASUREMENT UNCERTAINTY

10.1 Equipment Uncertainty

Table 12 shows the uncertainty budget provided by SPEAG for the HAC RF extension. The budget is valid for the frequency range 800 MHz – 3 GHz and represents a worst-case analysis.

Table 12: SPEAG HAC Uncertainty Budget

Error Description	Uncertainty Value	Prob. Dist.	Div.	(c_i) E	(c_i) H	Std.Unc. E	Std.Unc. H
Measurement System							
Probe Calibration	±5.1%	N	1	1	1	±5.1%	±6.55%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Sensor Displacement	±16.5%	R	$\sqrt{3}$	1	0.145	±9.5%	±1.4%
Boundary Effects	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Scaling to Peak Envelope Power	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%
System Detection Limit	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Conditions	±6.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Reflections	±8.4%	R	$\sqrt{3}$	1	1	±4.9%	±4.9%
Probe Positioner	±1.2%	R	$\sqrt{3}$	1	0.67	±0.7%	±0.5%
Probe Positioning	±4.7%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Test Sample Related							
Device Positioning Vertical	±3.9%	R	$\sqrt{3}$	1	0.67	±2.7%	±1.8%
Device Positioning Lateral	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Device Holder & Test Arch	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
Phantom And Setup Related							
Test Arch Thickness	±2.5%	R	$\sqrt{3}$	1	0.67	±1.4%	±0.9%
Combined Standard Uncertainty						13.5%	10.3%
Expanded Std. Uncertainty On Power						27%	20.3%
Expanded Std. Uncertainty on Field						13.5%	10.3%

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRM-860 PAGE 19 / 44
--	---	--

SECTION 11: DOCUMENT HISTORY

Revision/ Project Number	Writer Initials	Date	Change
1.0 /G100980503	JC	1/2/13	Original document
1.1/G100980503	JC	1/16/13	Change serial number from hex to decimal
1.2/G100980503	JC	1/16/13	Add HWID & SW Number

SECTION 12: REFERENCES

- [1] ANSI/IEEE C63.19-2007: *American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.*
- [2] *SPEAG DASY5 V5.2 User Manual, August 2010*

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 20 / 44
--	---	--

SECTION 13: HAC RF EMISSIONS TEST PLOTS

Date/Time: 12/6/2012 4:32:46 PM

Test Laboratory: Intertek

File Name: [HAC RF Cell Band CDMA Full Rate.da52:2](#)

HAC RF Cell Band CDMA Full Rate

DUT: Nokia RM-860; Serial: MEID:35410605000905

Communication System: CDMA2000 (1xRTT, RC1); Communication System Band: Band Class 0 (824.0 - 849.0 MHz); Frequency: 848.31 MHz; Duty Cycle: 1:2.86418

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ER3DV4R - SN2216; ConvF(1, 1, 1); Calibrated: 9/21/2012;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

CDMA Device HAC E-Field Measurement/E Scan - ER3D: 15 mm from Probe Center to the Device - High Channel/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 85.19 V/m; Power Drift = -0.07 dB

PMR calibrated. Calibrated PMF = 1.032 is applied.

E-field emissions = 73.48 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field


Grid 1 M4 60.79 V/m	Grid 2 M4 73.48 V/m	Grid 3 M4 72.77 V/m
Grid 4 M4 61.81 V/m	Grid 5 M4 73.39 V/m	Grid 6 M4 72.91 V/m
Grid 7 M4 61.33 V/m	Grid 8 M4 71.55 V/m	Grid 9 M4 71.54 V/m

Cursor:

Total = 73.48 V/m

E Category: M4

Location: -6, -10, 8.7 mm

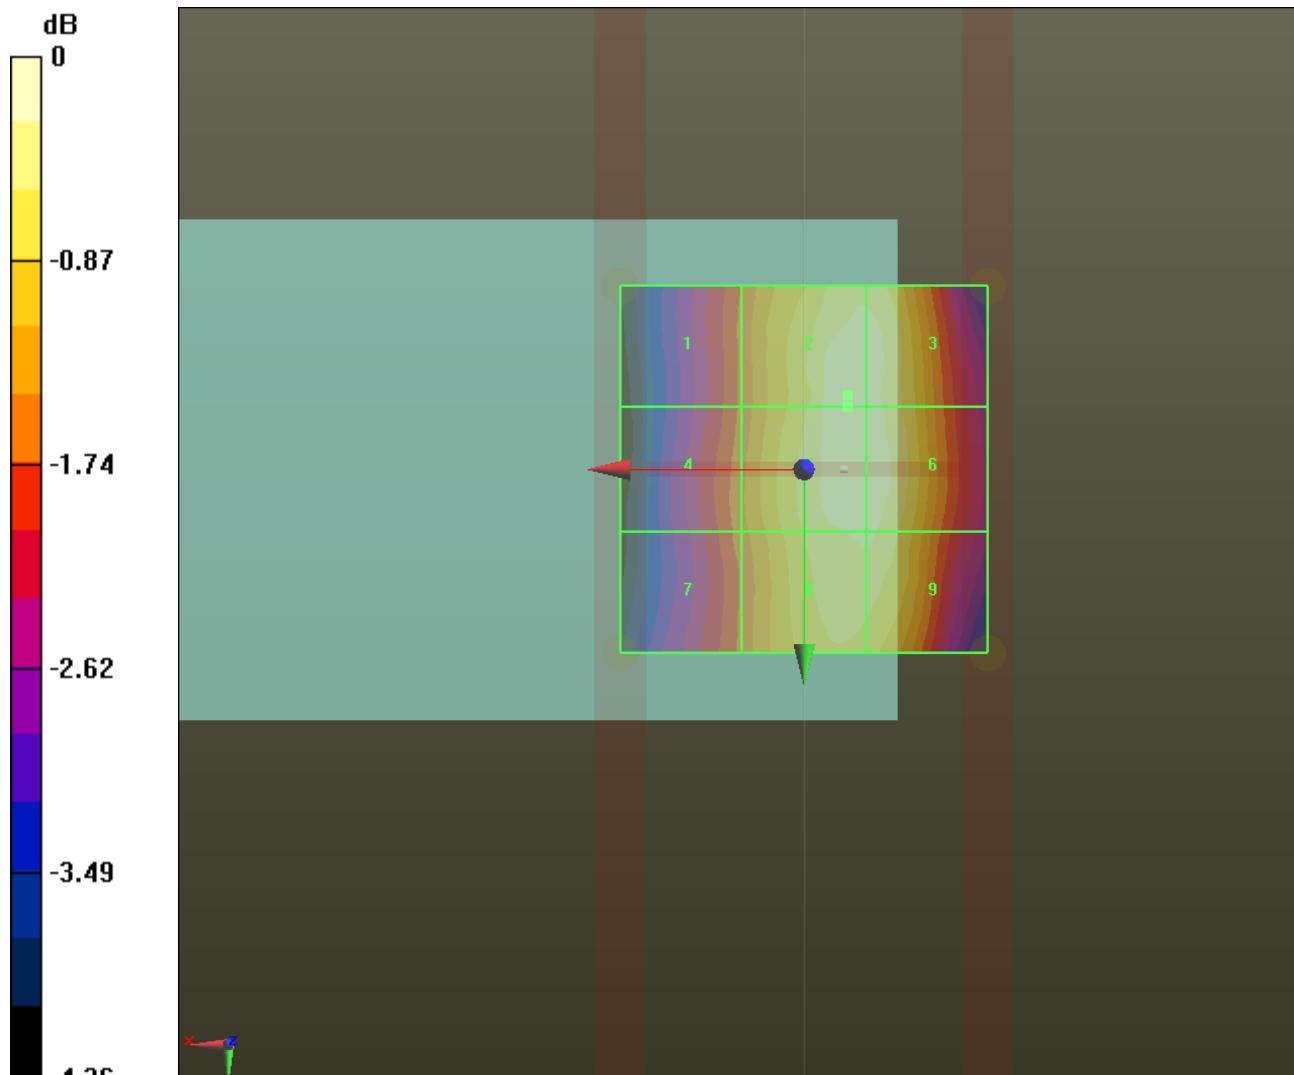

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 22 / 44
--	---	--

Date/Time: 12/6/2012 11:50:06 AM

Test Laboratory: Intertek

File Name: [HAC RF Cell Band CDMA Full Rate.da52:3](#)

HAC RF Cell Band CDMA Full Rate

DUT: Nokia RM-860; Serial: MEID:35410605000905

Communication System: CDMA2000 (1xRTT, RC1); Communication System Band: Band Class 0 (824.0 - 849.0 MHz); Frequency: 848.31 MHz; Duty Cycle: 1:2.86418

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: H3DV6 - SN6220; ; Calibrated: 9/21/2012
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

CDMA Device HAC H-Field Measurement/H Scan - H3DV6: 15 mm from Probe Center to the Device - High Channel/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.08200 A/m; Power Drift = -0.02 dB

PMR calibrated. Calibrated PMF = 1.032 is applied.

H-field emissions = 0.1682 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field


Grid 1 M4 0.160 A/m	Grid 2 M4 0.119 A/m	Grid 3 M4 0.071 A/m
Grid 4 M4 0.153 A/m	Grid 5 M4 0.111 A/m	Grid 6 M4 0.065 A/m
Grid 7 M4 0.168 A/m	Grid 8 M4 0.122 A/m	Grid 9 M4 0.073 A/m

Cursor:

Total = 0.1682 A/m

H Category: M4

Location: 25, 25, 8.7 mm

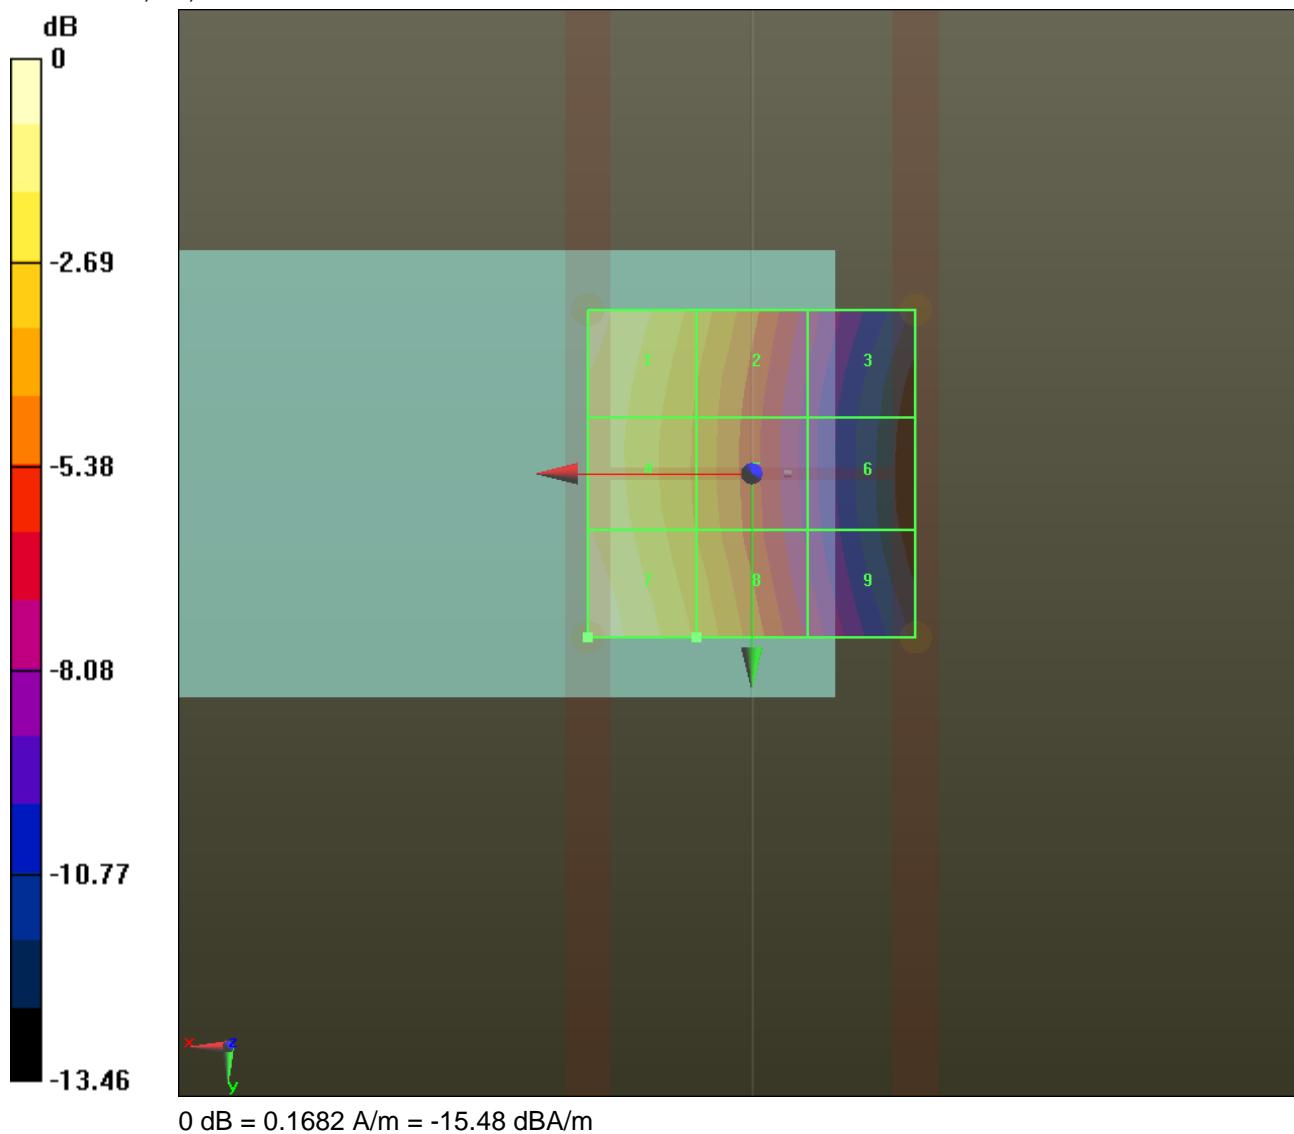

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 24 / 44
--	---	--

Date/Time: 12/6/2012 4:51:22 PM

Test Laboratory: Intertek

File Name: [HAC RF Cell Band CDMA RC1SO3.da52:2](#)

HAC RF Cell Band CDMA RC1SO3

DUT: Nokia RM-860; Serial: MEID:35410605000905

Communication System: CDMA2000 (1xRTT, RC1, 1/8 Rate); Communication System Band: Band Class 0 (824.0 - 849.0 MHz); Frequency: 848.31 MHz; Duty Cycle: 1:19.8153

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ER3DV4R - SN2216; ConvF(1, 1, 1); Calibrated: 9/21/2012;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

CDMA 1_8th Rate HAC E-Field Measurement/E Scan - ER3D: 15 mm from Probe Center to the Device - High Channel/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.04 V/m; Power Drift = -0.11 dB

PMR calibrated. Calibrated PMF = 2.911 is applied.

E-field emissions = 70.10 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field


Grid 1 M4 58.61 V/m	Grid 2 M4 70.10 V/m	Grid 3 M4 70.10 V/m
Grid 4 M4 58.69 V/m	Grid 5 M4 69.80 V/m	Grid 6 M4 69.80 V/m
Grid 7 M4 56.82 V/m	Grid 8 M4 68.51 V/m	Grid 9 M4 68.17 V/m

Cursor:

Total = 70.10 V/m

E Category: M4

Location: -8.5, -15, 8.7 mm

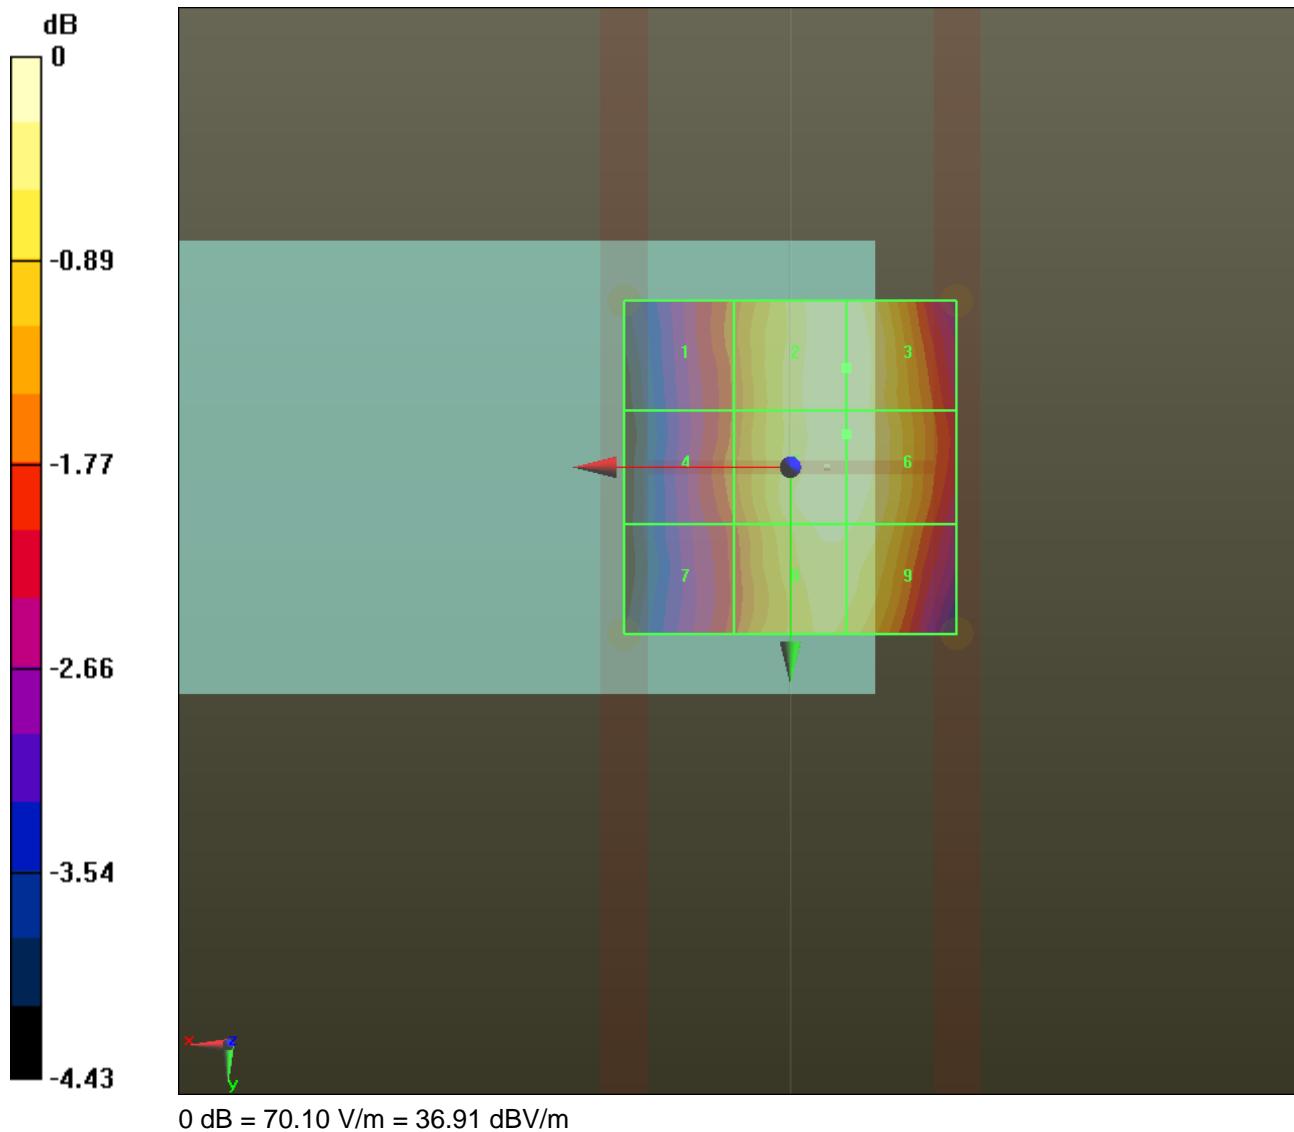

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 26 / 44
--	---	--

Date/Time: 12/10/2012 4:44:28 PM

Test Laboratory: Intertek

File Name: [HAC RF Cell Band CDMA RC1SO3.da52:3](#)

HAC RF Cell Band CDMA RC1SO3

DUT: Nokia RM-860; Serial: MEID:35410605000905

Communication System: CDMA2000 (1xRTT, RC1, 1/8 Rate); Communication System Band: Band Class 0 (824.0 - 849.0 MHz); Frequency: 848.31 MHz; Duty Cycle: 1:19.8153

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: H3DV6 - SN6220; ; Calibrated: 9/21/2012
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

CDMA 1_8th Rate HAC H-Field Measurement/H Scan - H3DV6: 15 mm from Probe Center to the Device - High Channel/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.02900 A/m; Power Drift = -0.08 dB

PMR calibrated. Calibrated PMF = 2.911 is applied.

H-field emissions = 0.1654 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field


Grid 1 M4 0.157 A/m	Grid 2 M4 0.116 A/m	Grid 3 M4 0.072 A/m
Grid 4 M4 0.150 A/m	Grid 5 M4 0.109 A/m	Grid 6 M4 0.065 A/m
Grid 7 M4 0.165 A/m	Grid 8 M4 0.117 A/m	Grid 9 M4 0.073 A/m

Cursor:

Total = 0.1654 A/m

H Category: M4

Location: 25, 25, 8.7 mm

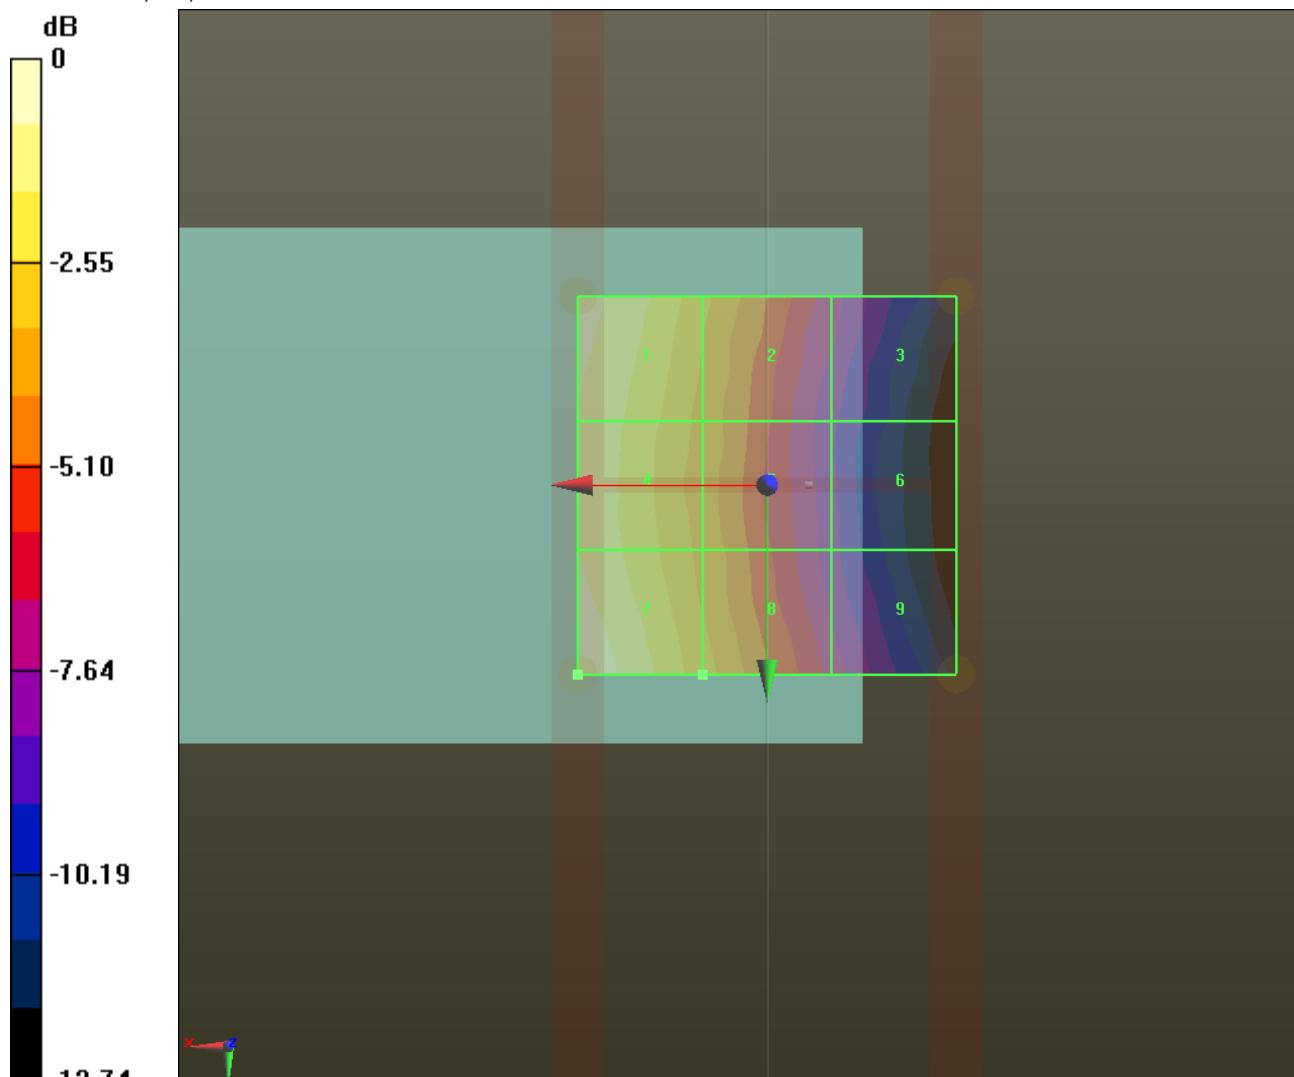

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 28 / 44
--	---	--

Date/Time: 12/7/2012 9:24:49 AM

Test Laboratory: Intertek

File Name: [HAC RF PCS Band CDMA Full Rate.da52:2](#)

HAC RF PCS Band CDMA Full Rate

DUT: Nokia RM-860; Serial: MEID:35410605000905

Communication System: CDMA2000 (1xRTT, RC1); Communication System Band: Band Class 1 (1850.0 - 1910.0 MHz); Frequency: 1851.25 MHz; Duty Cycle: 1:2.86418

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ER3DV4R - SN2216; ConvF(1, 1, 1); Calibrated: 9/21/2012;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

CDMA Device HAC E-Field Measurement/E Scan - ER3D: 15 mm from Probe Center to the Device - Low Channel/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 36.70 V/m; Power Drift = -0.07 dB

PMR calibrated. Calibrated PMF = 1.032 is applied.

E-field emissions = 59.13 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field


Grid 1 M4 40.00 V/m	Grid 2 M4 59.13 V/m	Grid 3 M4 53.65 V/m
Grid 4 M4 25.02 V/m	Grid 5 M4 51.40 V/m	Grid 6 M4 55.45 V/m
Grid 7 M4 33.09 V/m	Grid 8 M4 45.72 V/m	Grid 9 M4 54.72 V/m

Cursor:

Total = 59.13 V/m

E Category: M4

Location: -3.5, -25, 8.7 mm

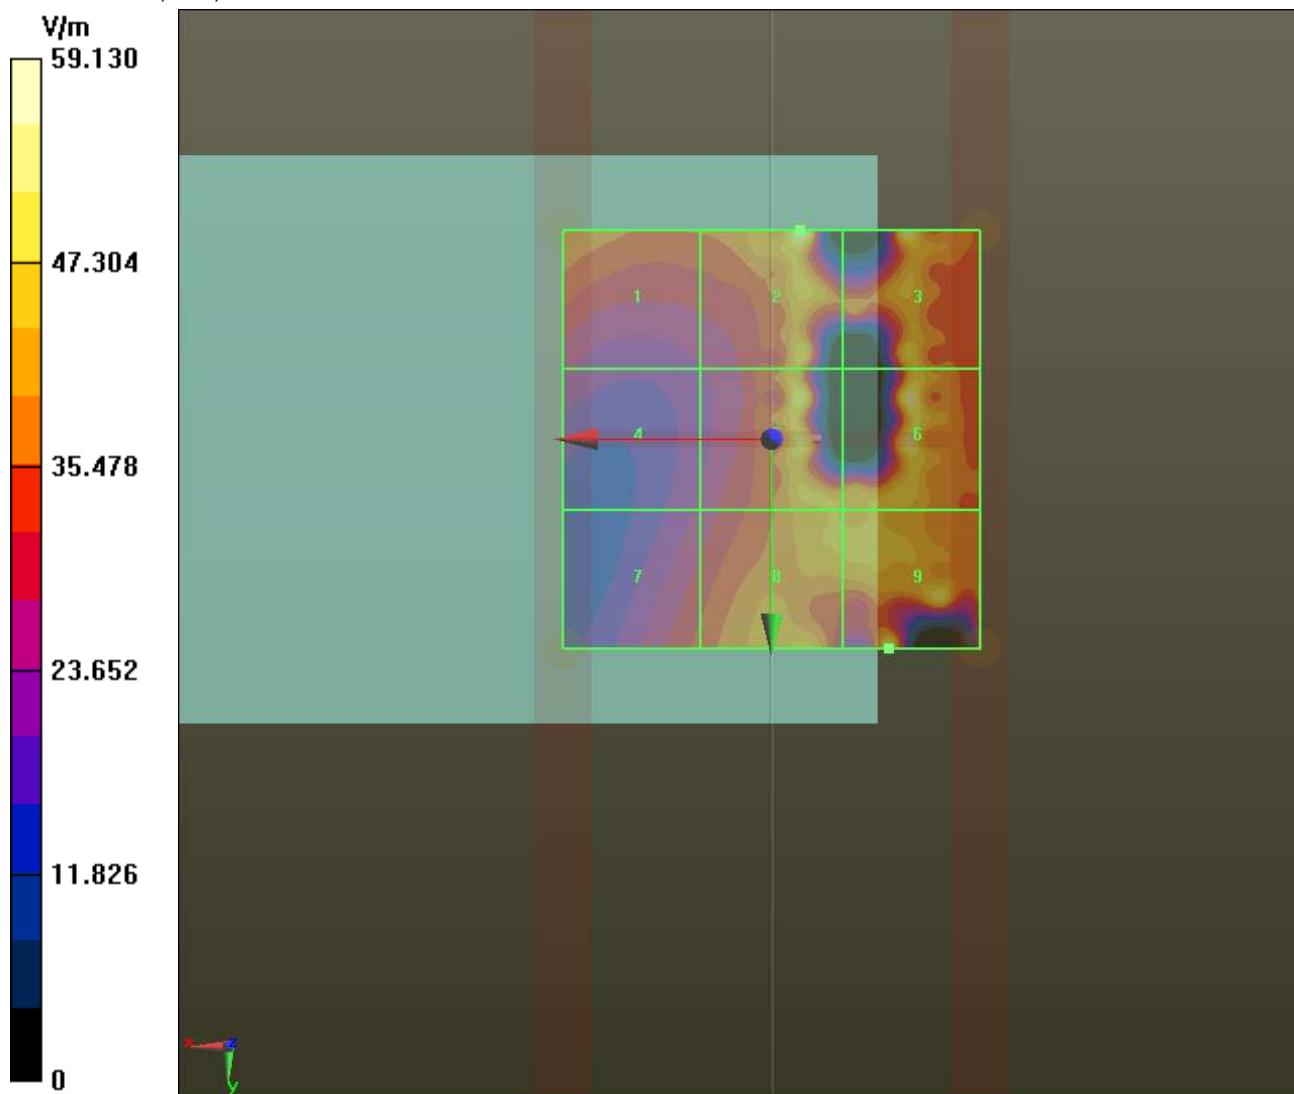

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 30 / 44
--	---	--

Date/Time: 12/6/2012 1:22:27 PM

Test Laboratory: Intertek
 File Name: [HAC RF PCS Band CDMA Full Rate.da52:3](#)

HAC RF PCS Band CDMA Full Rate

DUT: Nokia RM-860; Serial: MEID:35410605000905

Communication System: CDMA2000 (1xRTT, RC1); Communication System Band: Band Class 1 (1850.0 - 1910.0 MHz); Frequency: 1851.25 MHz; Duty Cycle: 1:2.86418

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: RF Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: H3DV6 - SN6220; ; Calibrated: 9/21/2012
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY5 52.8.3(988); SEMCAD X 14.6.7(6848)

CDMA Device HAC H-Field Measurement/H Scan - H3DV6: 15 mm from Probe Center to the Device - Low Channel/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: $dx=0.5000 \text{ mm}$, $dy=0.5000 \text{ mm}$

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.1010 A/m; Power Drift = -0.02 dB

PMR calibrated. Calibrated PMF = 1.032 is applied.

H-field emissions = 0.1312 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field


Grid 1 M4 0.131 A/m	Grid 2 M4 0.125 A/m	Grid 3 M4 0.112 A/m
Grid 4 M4 0.107 A/m	Grid 5 M4 0.107 A/m	Grid 6 M4 0.104 A/m
Grid 7 M4 0.108 A/m	Grid 8 M4 0.092 A/m	Grid 9 M4 0.078 A/m

Cursor:

Total = 0.1312 A/m

H Category: M4

Location: 22.5, -25, 8.7 mm

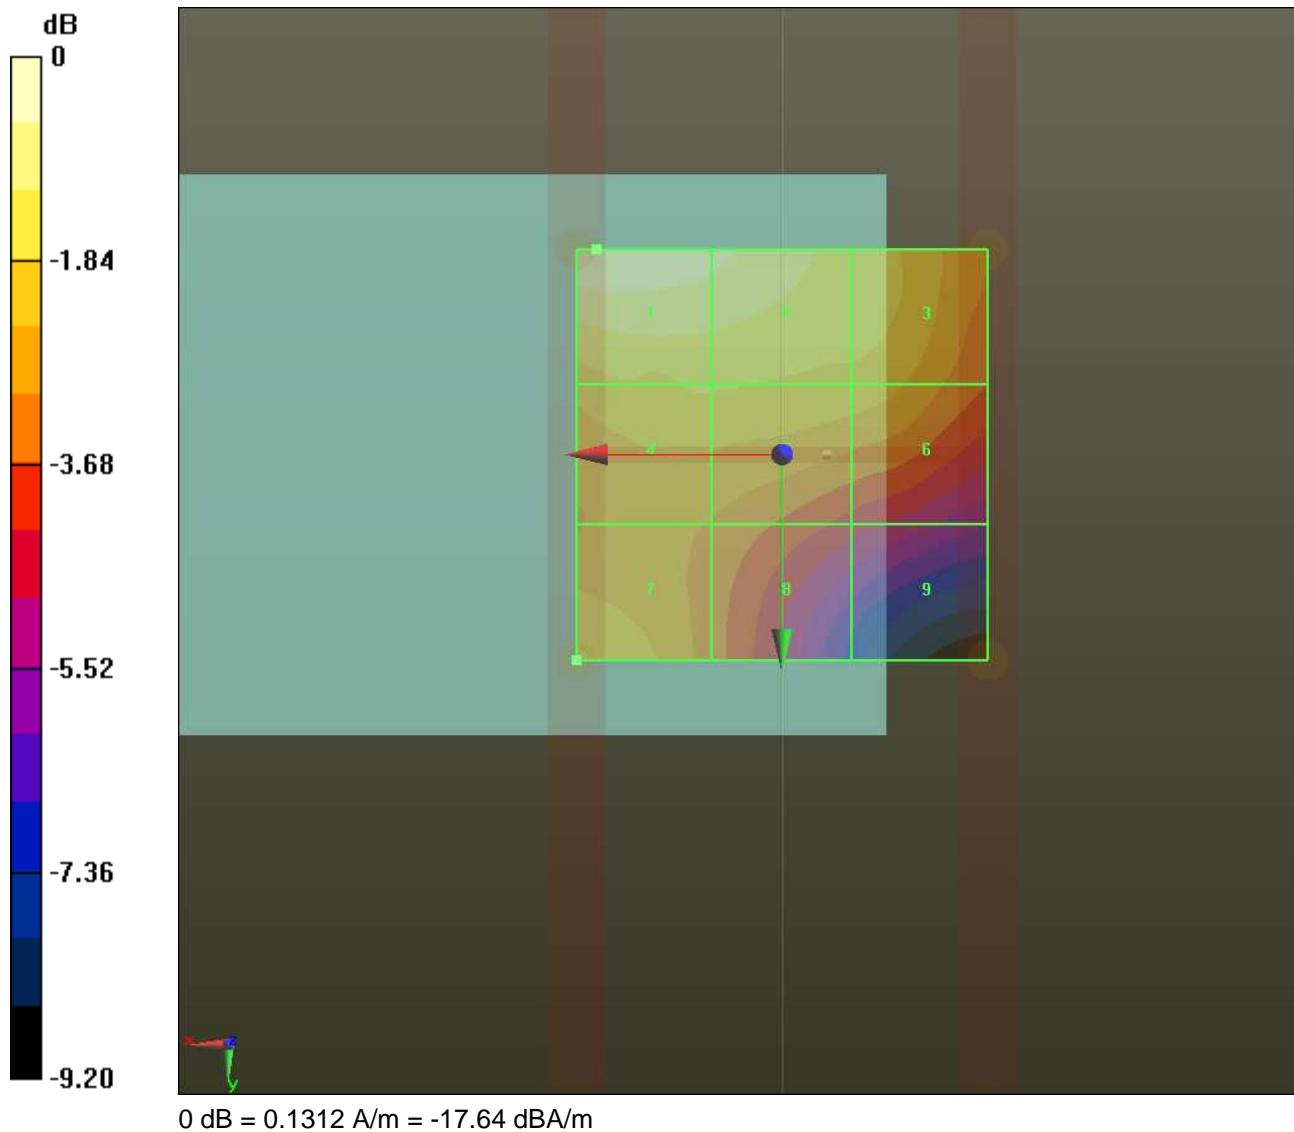

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 32 / 44
--	---	--

Date/Time: 12/7/2012 9:05:06 AM

Test Laboratory: Intertek
 File Name: [HAC RF PCS Band CDMA RC1SO3.da52:2](#)

HAC RF PCS Band CDMA RC1SO3

DUT: Nokia RM-860; Serial: MEID:35410605000905

Communication System: CDMA2000 (1xRTT, RC1, 1/8 Rate); Communication System Band: Band Class 1 (1850.0 - 1910.0 MHz); Frequency: 1851.25 MHz; Duty Cycle: 1:19.8153

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: RF Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ER3DV4R - SN2216; ConvF(1, 1, 1); Calibrated: 9/21/2012;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY5 52.8.3(988); SEMCAD X 14.6.7(6848)

CDMA 1_8th Rate HAC E-Field Measurement/E Scan - ER3D: 15 mm from Probe Center to the Device - Low Channel/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: $dx=0.5000 \text{ mm}$, $dy=0.5000 \text{ mm}$

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.37 V/m; Power Drift = -0.00 dB

PMR calibrated. Calibrated PMF = 2.911 is applied.

E-field emissions = 44.32 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field


Grid 1 M4 39.44 V/m	Grid 2 M4 39.17 V/m	Grid 3 M4 37.89 V/m
Grid 4 M4 24.04 V/m	Grid 5 M4 39.95 V/m	Grid 6 M4 40.25 V/m
Grid 7 M4 32.45 V/m	Grid 8 M4 44.31 V/m	Grid 9 M4 44.32 V/m

Cursor:

Total = 44.32 V/m

E Category: M4

Location: -9, 22, 8.7 mm

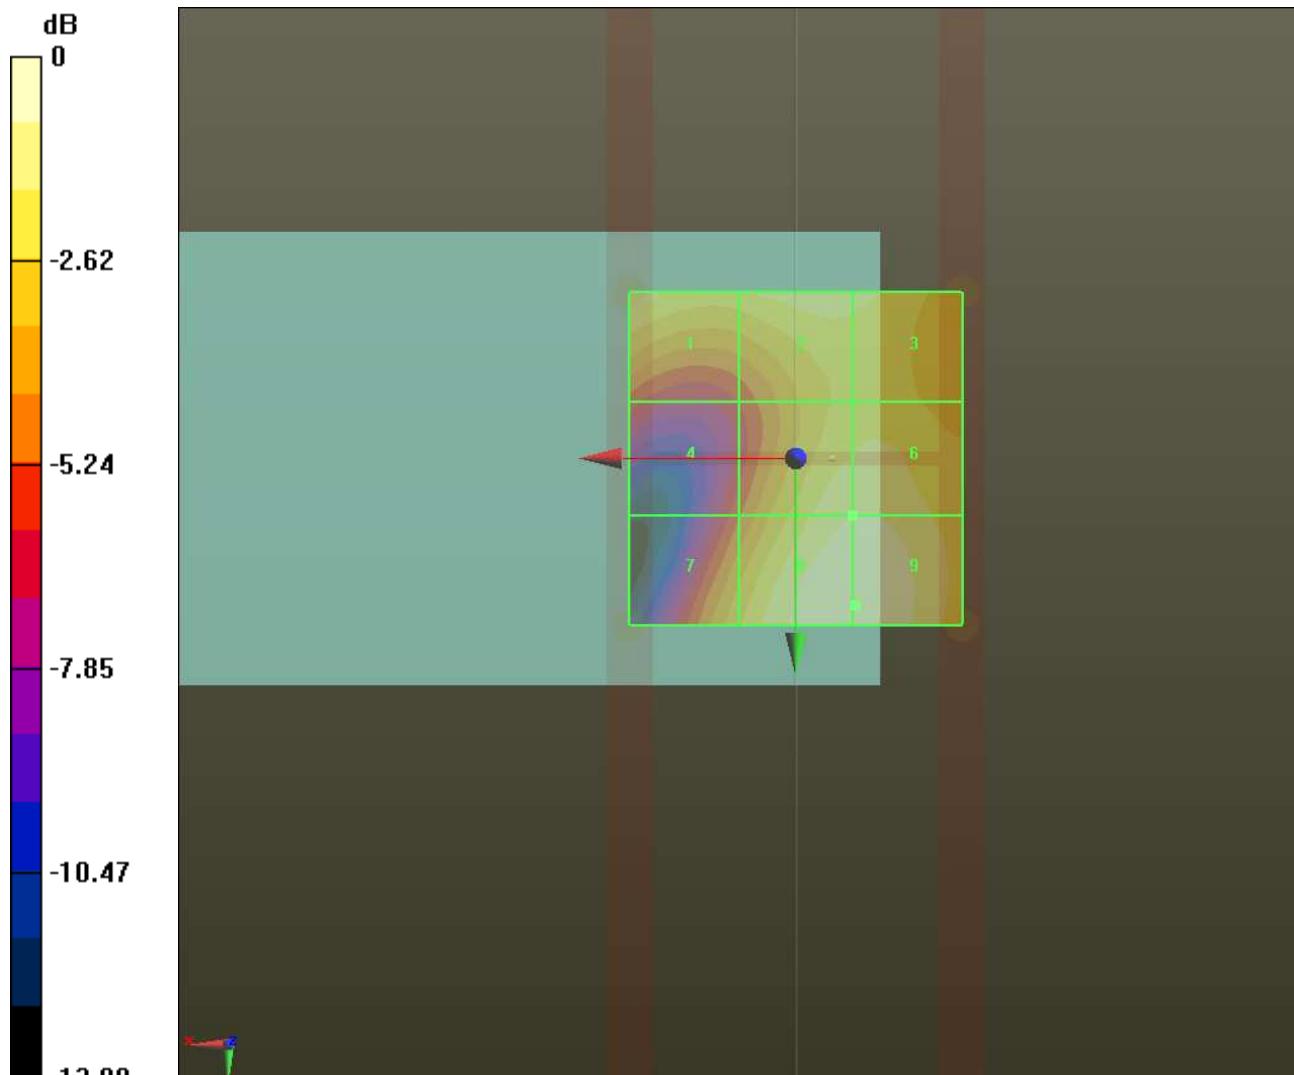

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 34 / 44
--	---	--

Date/Time: 12/6/2012 1:58:07 PM

Test Laboratory: Intertek
 File Name: [HAC RF PCS Band CDMA RC1SO3.da52:3](#)

HAC RF PCS Band CDMA RC1SO3

DUT: Nokia RM-860; Serial: MEID:35410605000905

Communication System: CDMA2000 (1xRTT, RC1, 1/8 Rate); Communication System Band: Band Class 1 (1850.0 - 1910.0 MHz); Frequency: 1851.25 MHz; Duty Cycle: 1:19.8153

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: RF Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: H3DV6 - SN6220; ; Calibrated: 9/21/2012
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY5 52.8.3(988); SEMCAD X 14.6.7(6848)

CDMA 1_8th Rate HAC H-Field Measurement/H Scan - H3DV6: 15 mm from Probe Center to the Device - Low Channel/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: $dx=0.5000 \text{ mm}$, $dy=0.5000 \text{ mm}$

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.03500 A/m; Power Drift = 0.01 dB

PMR calibrated. Calibrated PMF = 2.911 is applied.

H-field emissions = 0.1304 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field


Grid 1 M4 0.130 A/m	Grid 2 M4 0.124 A/m	Grid 3 M4 0.110 A/m
Grid 4 M4 0.106 A/m	Grid 5 M4 0.106 A/m	Grid 6 M4 0.103 A/m
Grid 7 M4 0.107 A/m	Grid 8 M4 0.089 A/m	Grid 9 M4 0.077 A/m

Cursor:

Total = 0.1304 A/m

H Category: M4

Location: 21.5, -25, 8.7 mm

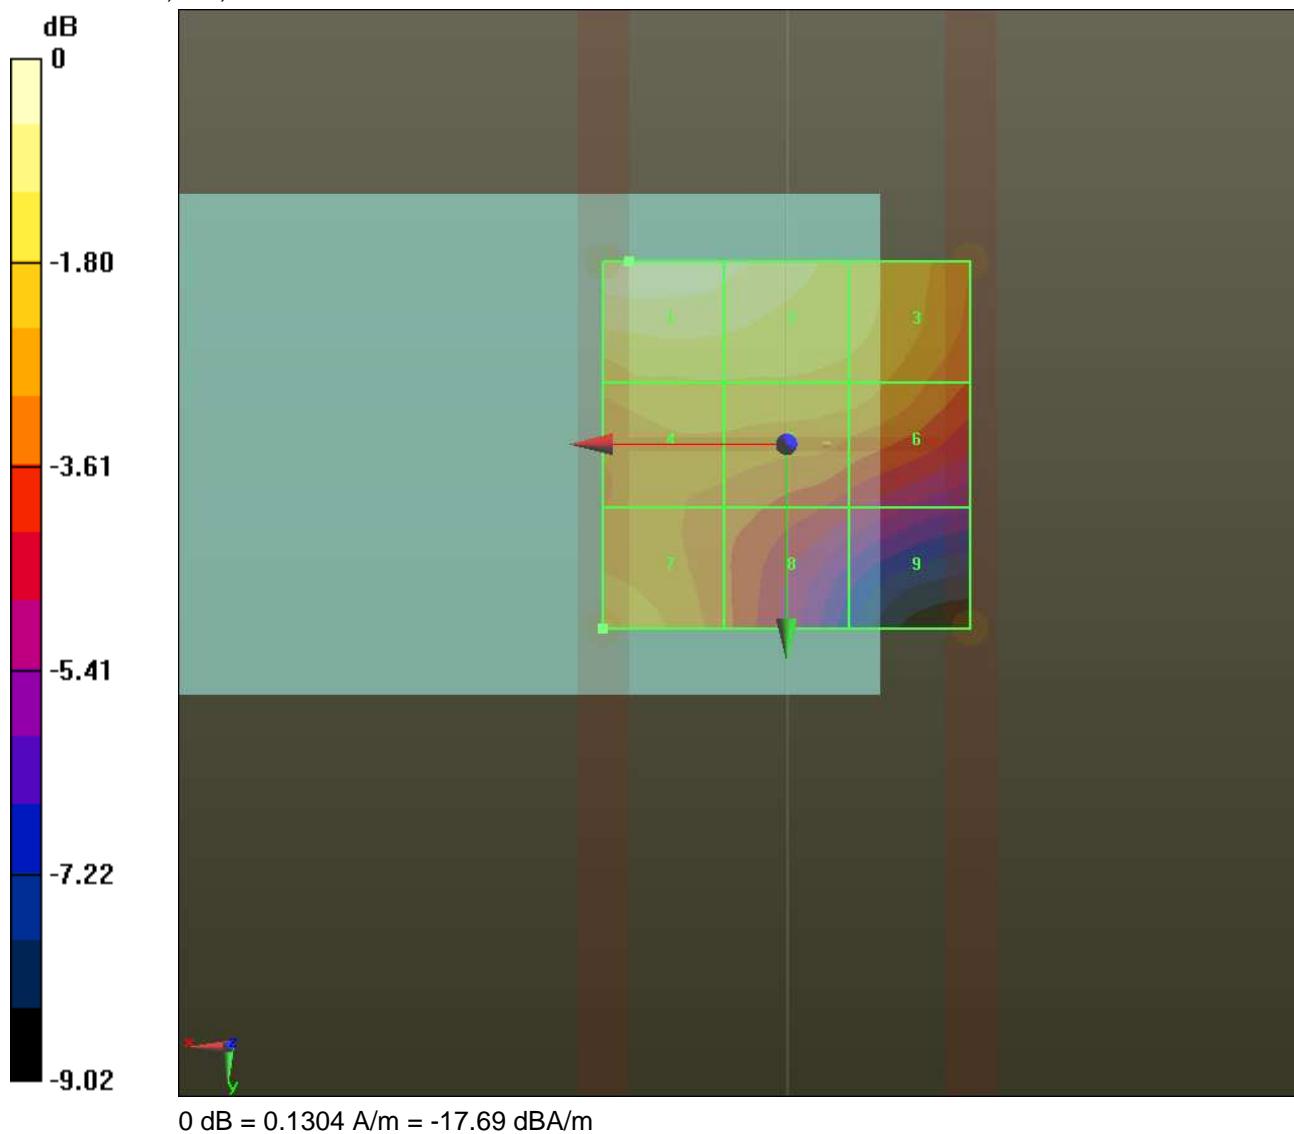

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860	FCC ID QMNRN-860
	INTERTEK REPORT NUMBER 100980503LEX-001	PAGE 36 / 44

SECTION 14: HAC RF EMISSIONS SYSTEM VALIDATION PLOTS

Date/Time: 12/6/2012 3:29:02 PM

Test Laboratory: Intertek

File Name: [HAC Dipole Validation Cell Band.da52:0](#)

HAC Dipole Validation Cell Band

DUT: HAC-Dipole 835 MHz; Serial: 1049

Communication System: CW; Communication System Band: ITD835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ER3DV4R - SN2216; ConvF(1, 1, 1); Calibrated: 9/21/2012;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole E-Field measurement (E-field scan for ANSI C63.19-2007 & -2011 compliance)/E Scan - measurement distance from the probe sensor center to CD835 = 10mm/Hearing Aid Compatibility Test at 10mm distance (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 103.5 V/m; Power Drift = 0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 158.9 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field


Grid 1 M4 146.2 V/m	Grid 2 M4 156.4 V/m	Grid 3 M4 155.8 V/m
Grid 4 M4 80.48 V/m	Grid 5 M4 84.58 V/m	Grid 6 M4 84.03 V/m
Grid 7 M4 151.5 V/m	Grid 8 M4 158.9 V/m	Grid 9 M4 154.6 V/m

Cursor:

Total = 158.9 V/m

E Category: M4

Location: -0.5, 79, 4.7 mm

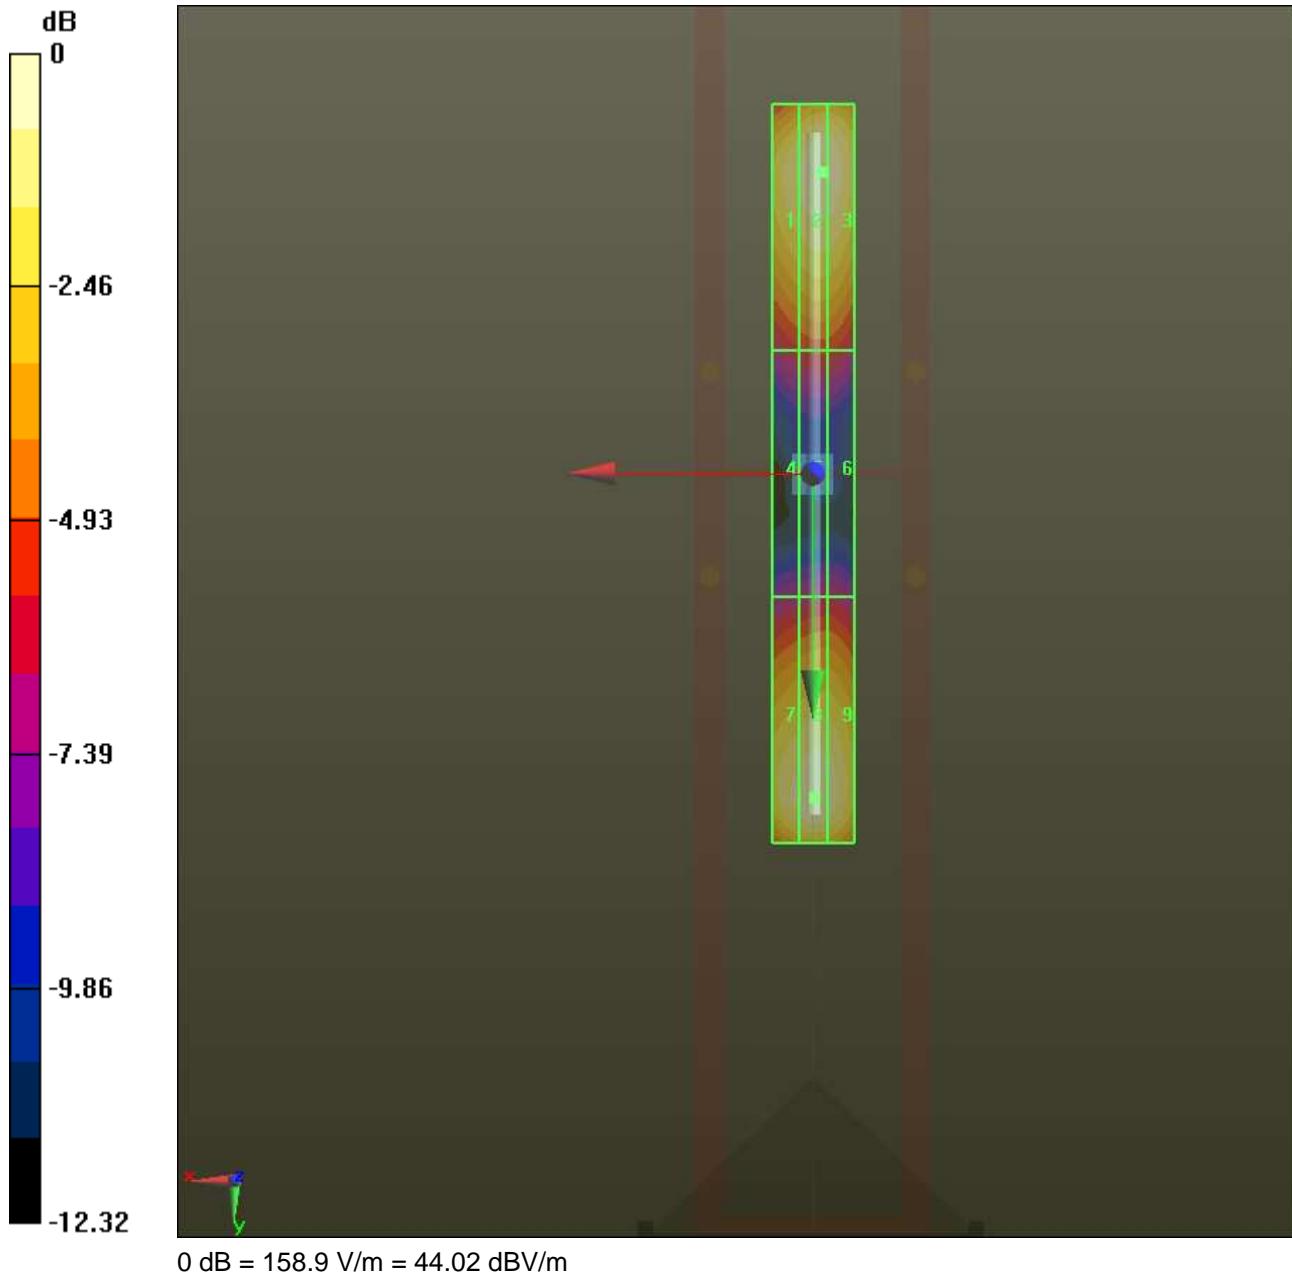

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 38 / 44
--	---	--

Date/Time: 12/6/2012 3:11:39 PM

Test Laboratory: Intertek

File Name: [HAC Dipole Validation Cell Band.da52:1](#)

HAC Dipole Validation Cell Band

DUT: HAC-Dipole 835 MHz; Serial: 1049

Communication System: CW; Communication System Band: CD835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: H3DV6 - SN6220; ; Calibrated: 9/21/2012
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole H-Field measurement with H3DV6 probe (H-field scan for ANSI C63.19-2007 compliance)/H Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid

Compatibility Test (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.4960 A/m; Power Drift = -0.04 dB

PMR not calibrated. PMF = 1.000 is applied.

H-field emissions = 0.4625 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field


Grid 1 M4 0.394 A/m	Grid 2 M4 0.412 A/m	Grid 3 M4 0.387 A/m
Grid 4 M4 0.444 A/m	Grid 5 M4 0.462 A/m	Grid 6 M4 0.432 A/m
Grid 7 M4 0.393 A/m	Grid 8 M4 0.408 A/m	Grid 9 M4 0.379 A/m

Cursor:

Total = 0.4625 A/m

H Category: M4

Location: 0.5, -0.5, 4.7 mm

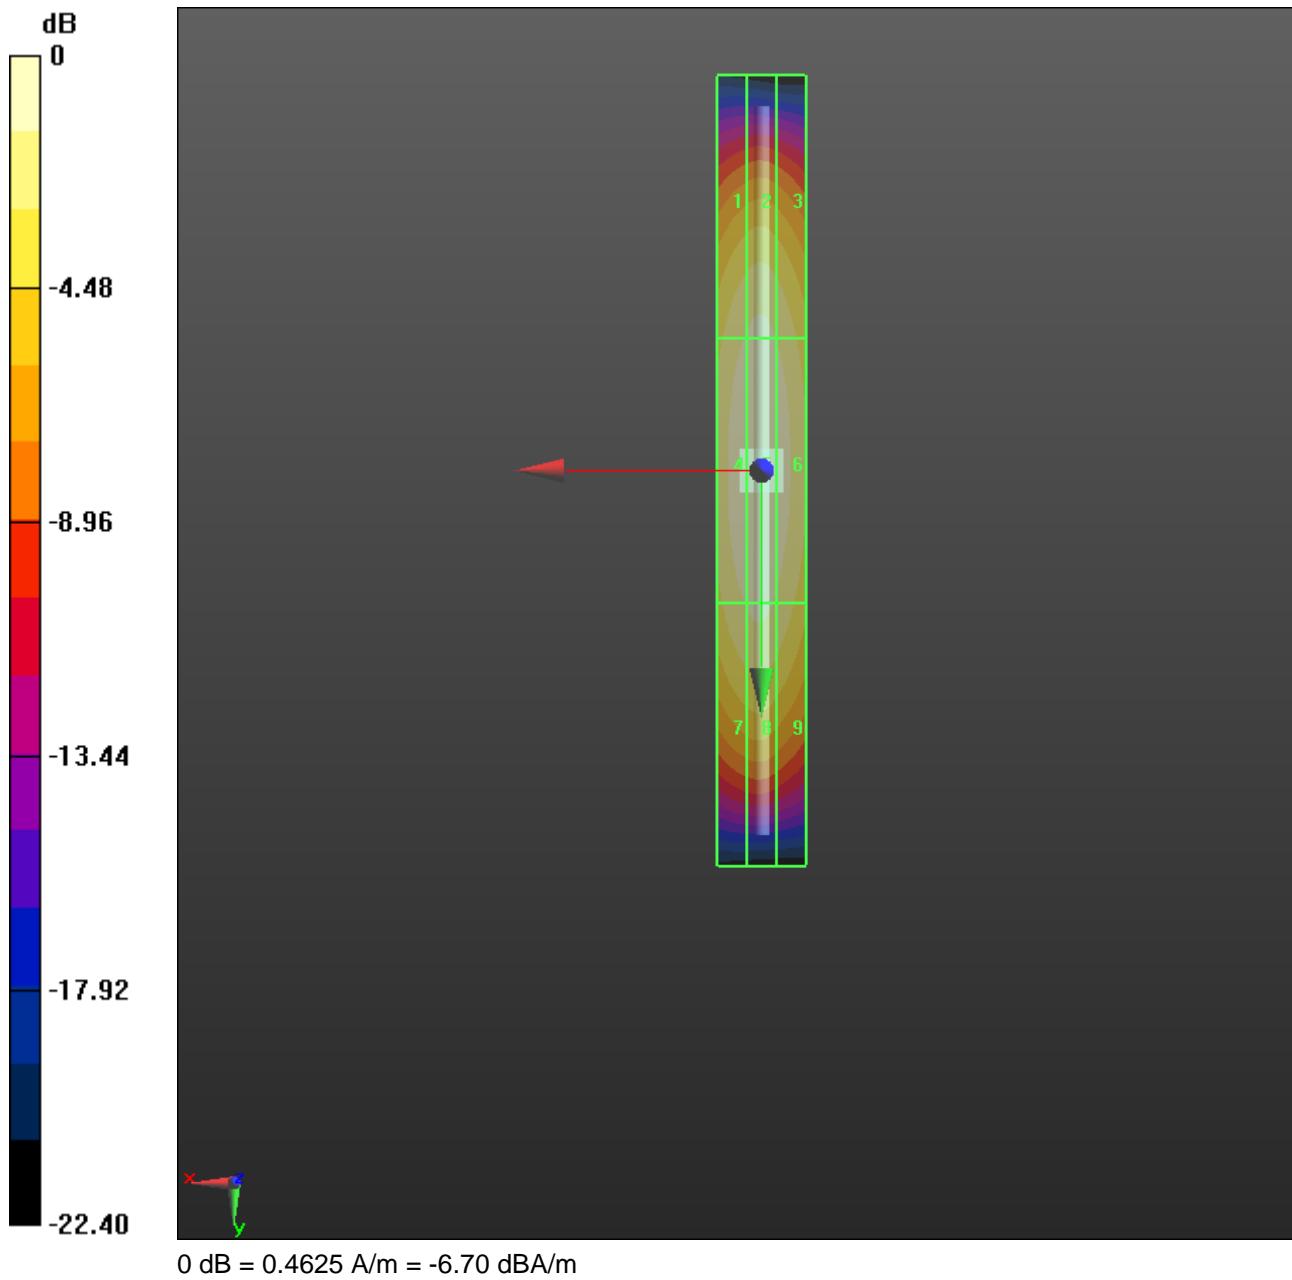

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 40 / 44
--	---	--

Date/Time: 12/6/2012 4:10:41 PM

Test Laboratory: Intertek

File Name: [HAC Dipole Validation PCS Band.da52:0](#)

HAC Dipole Validation PCS Band

DUT: HAC Dipole 1880 MHz; Serial: 1042

Communication System: CW; Communication System Band: CD1880 (1880.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ER3DV4R - SN2216; ConvF(1, 1, 1); Calibrated: 9/21/2012;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole E-Field measurement (E-field scan for ANSI C63.19-2007 & -2011 compliance)/E Scan - measurement distance from the probe sensor center to CD1880 = 10mm/Hearing Aid Compatibility Test at 10mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 140.9 V/m; Power Drift = 0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 127.5 V/m

Near-field category: M2 (AWF 0 dB)

PMF scaled E-field


Grid 1 M2 117.9 V/m	Grid 2 M2 127.0 V/m	Grid 3 M2 126.7 V/m
Grid 4 M3 82.85 V/m	Grid 5 M3 86.06 V/m	Grid 6 M3 84.65 V/m
Grid 7 M2 119.3 V/m	Grid 8 M2 127.5 V/m	Grid 9 M2 126.2 V/m

Cursor:

Total = 127.5 V/m

E Category: M2

Location: -1.5, 38, 4.7 mm

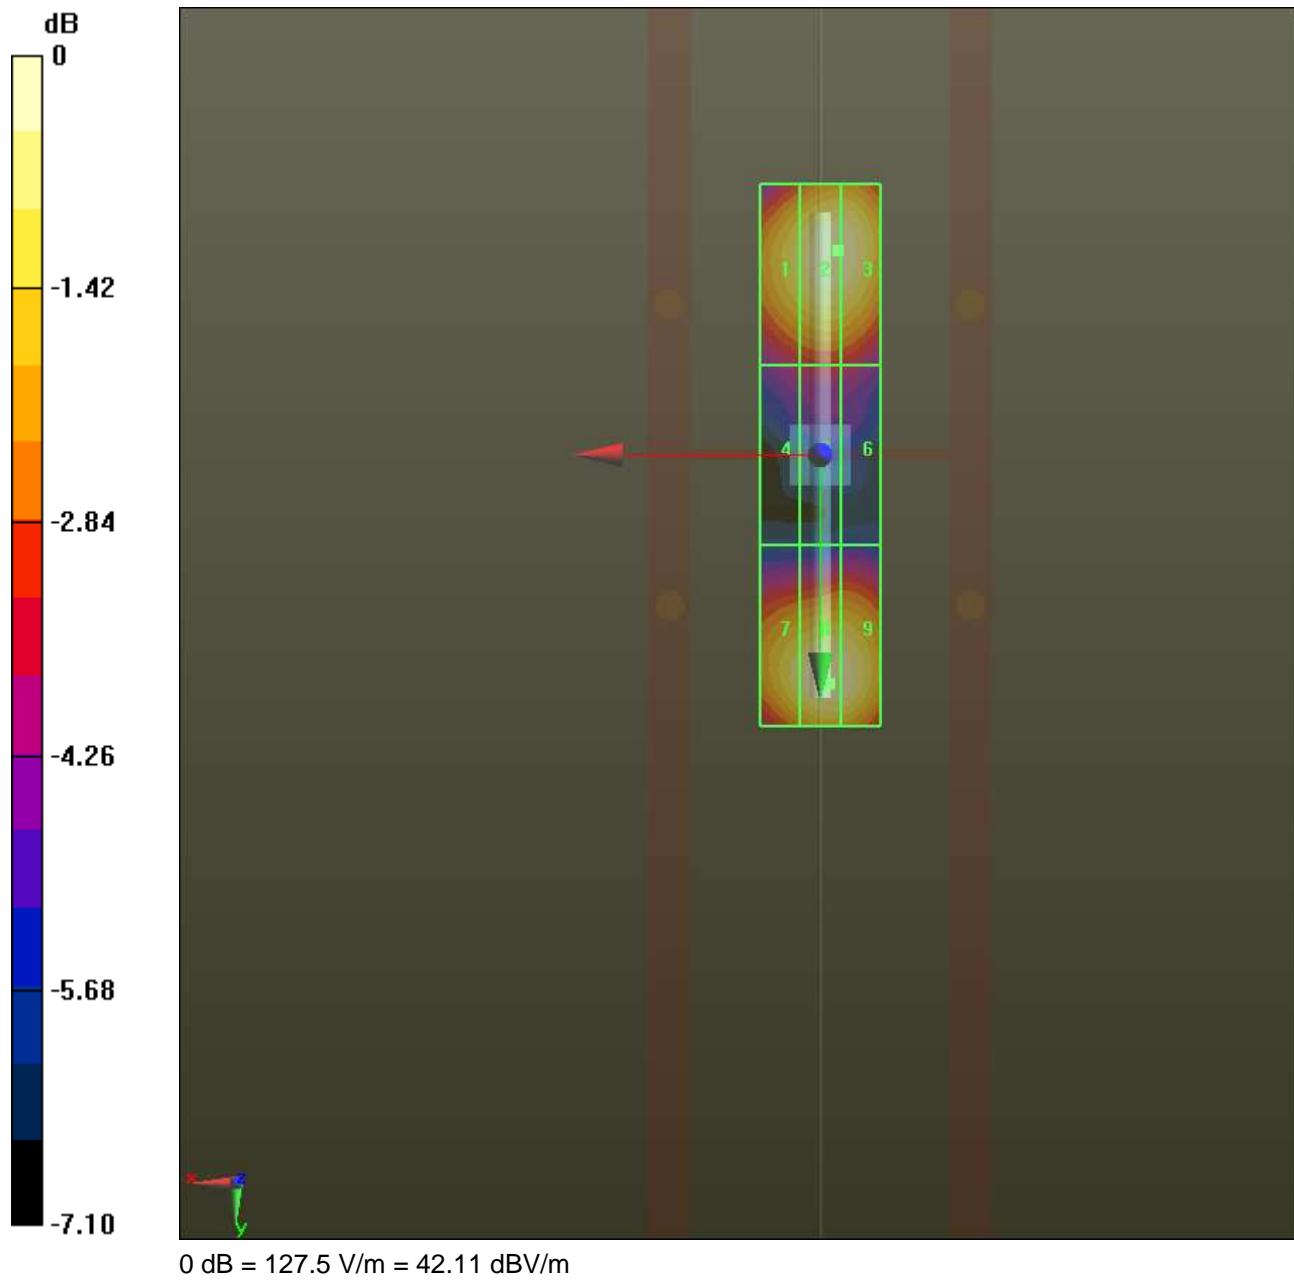

 HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRN-860 PAGE 42 / 44
--	---	--

Date/Time: 12/6/2012 2:59:09 PM

Test Laboratory: Intertek

File Name: [HAC Dipole Validation PCS Band.da52:1](#)

HAC Dipole Validation PCS Band

DUT: HAC Dipole 1880 MHz; Serial: 1042

Communication System: CW; Communication System Band: CD1880 (1880.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: H3DV6 - SN6220; ; Calibrated: 9/21/2012
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole H-Field measurement with H3DV6 probe (H-field scan for ANSI C63.19-2007 compliance)/H Scan

- measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid

Compatibility Test (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.4790 A/m; Power Drift = 0.02 dB

PMR not calibrated. PMF = 1.000 is applied.

H-field emissions = 0.4539 A/m

Near-field category: M2 (AWF 0 dB)

PMF scaled H-field


Grid 1 M2 0.398 A/m	Grid 2 M2 0.412 A/m	Grid 3 M2 0.391 A/m
Grid 4 M2 0.438 A/m	Grid 5 M2 0.454 A/m	Grid 6 M2 0.429 A/m
Grid 7 M2 0.399 A/m	Grid 8 M2 0.413 A/m	Grid 9 M2 0.390 A/m

Cursor:

Total = 0.4539 A/m

H Category: M2

Location: 0.5, 0, 4.7 mm

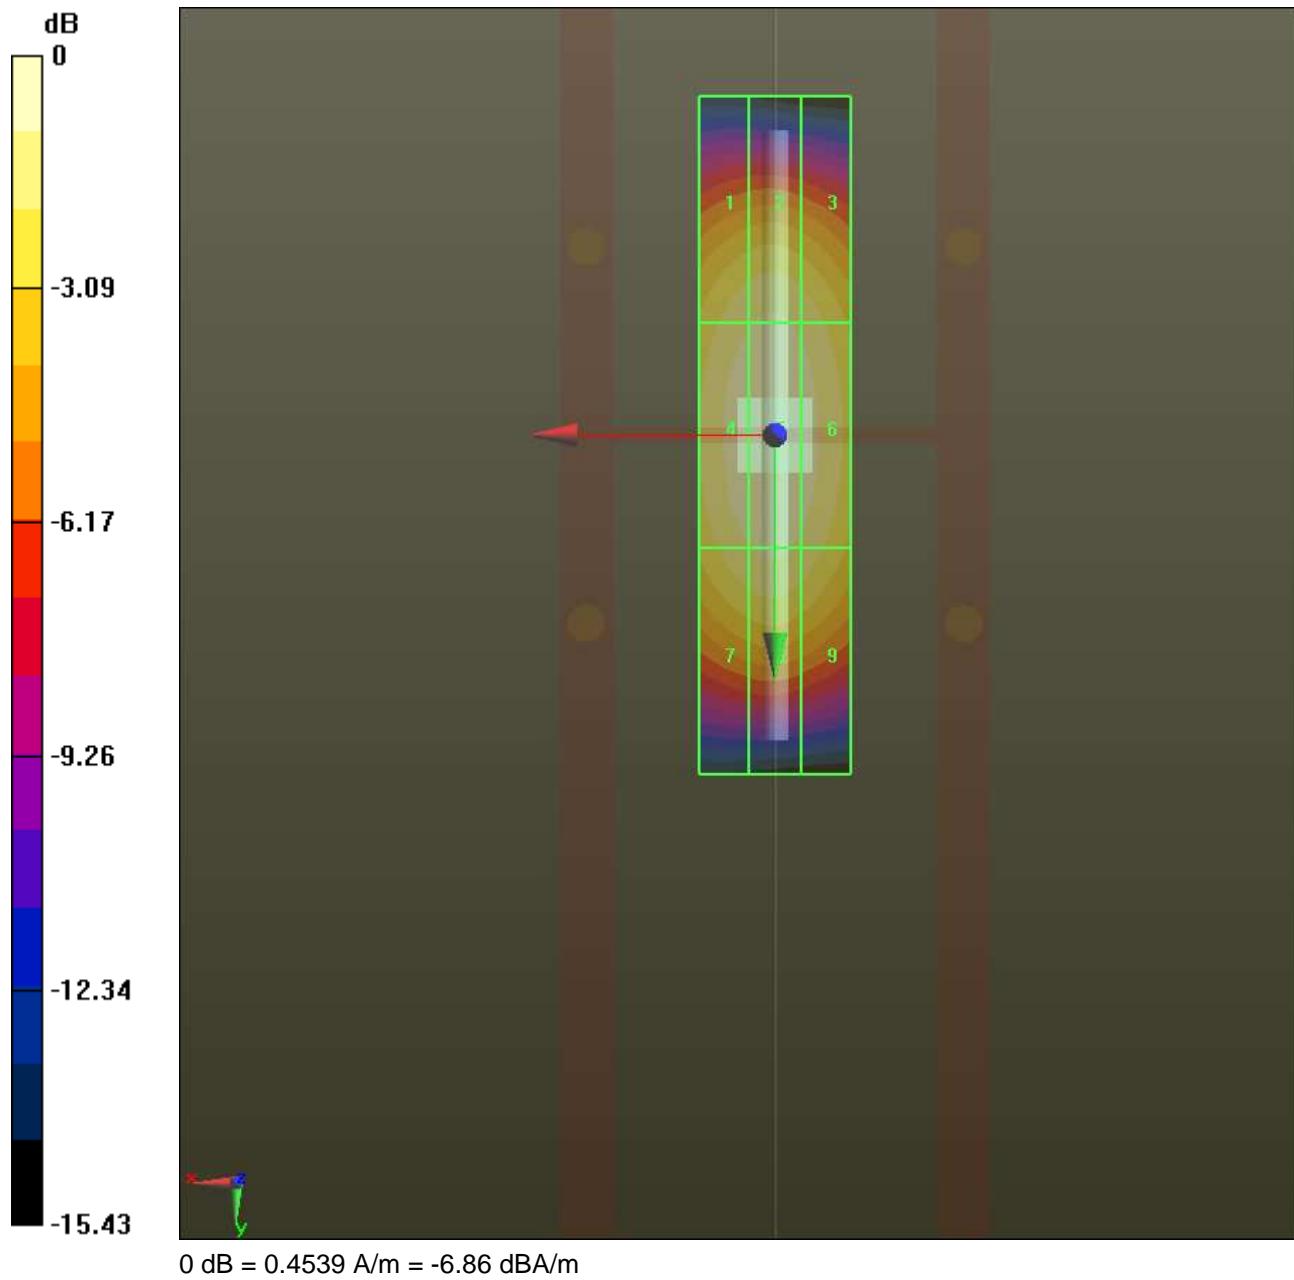

Intertek HAC RF (E AND H FIELD) REPORT	MODEL RM-860 INTERTEK REPORT NUMBER 100980503LEX-001	FCC ID QMNRM-860 PAGE 44 / 44
--	---	--

SECTION 15: CALIBRATION DOCUMENTS

Calibration documents are provided in a separate exhibit.