




### 11A\_Ant1\_5180

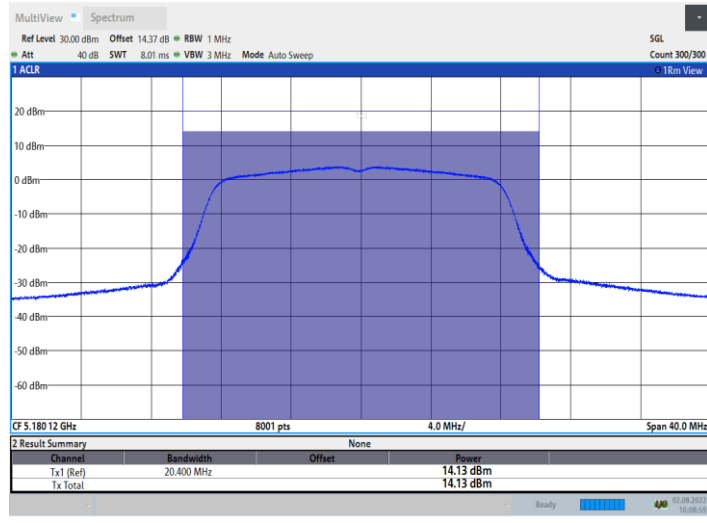


### 11A\_Ant1\_5200

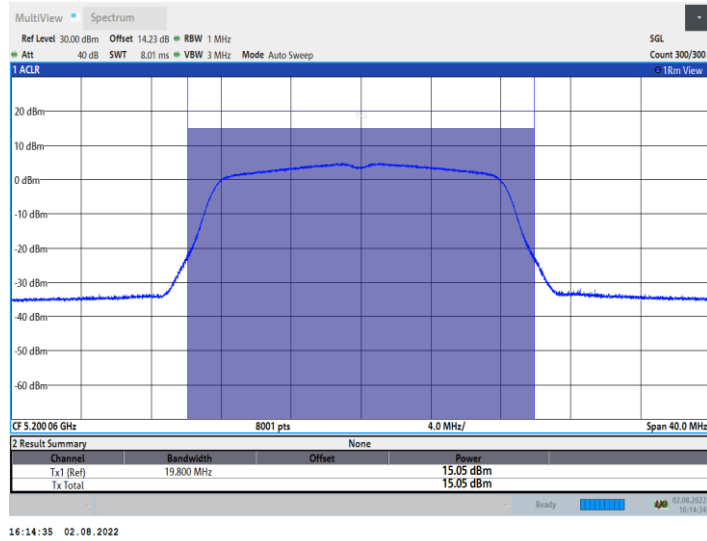


### 11A\_Ant1\_5240

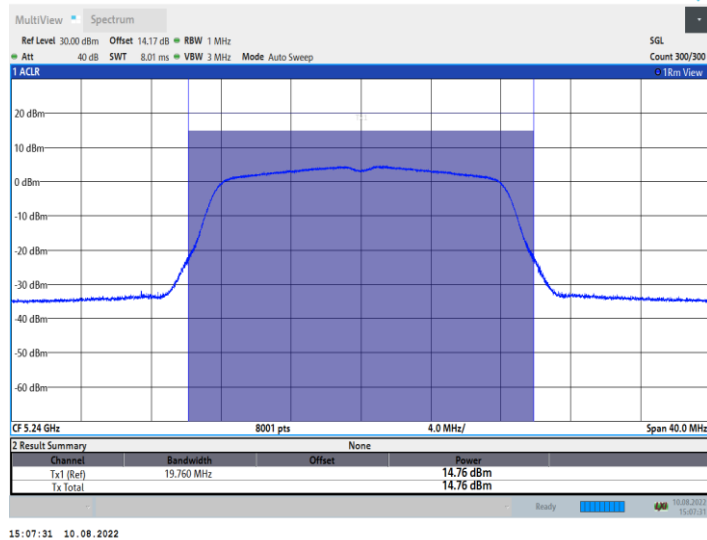


### 11A\_Ant1\_5260

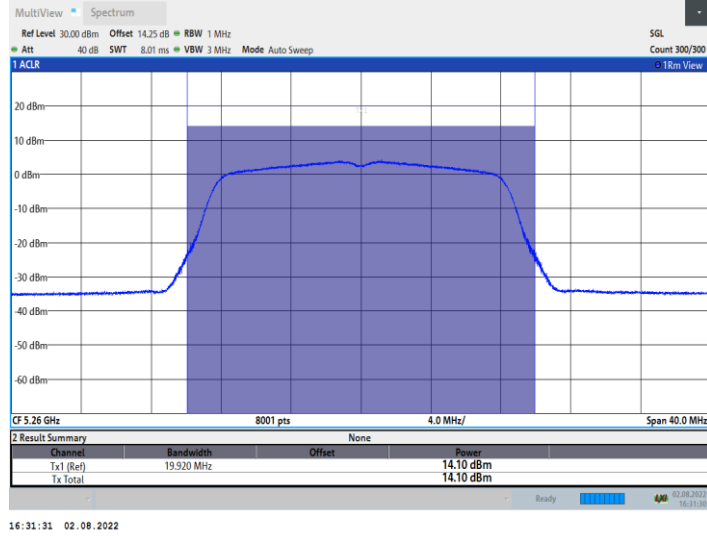


### 11A\_Ant1\_5280

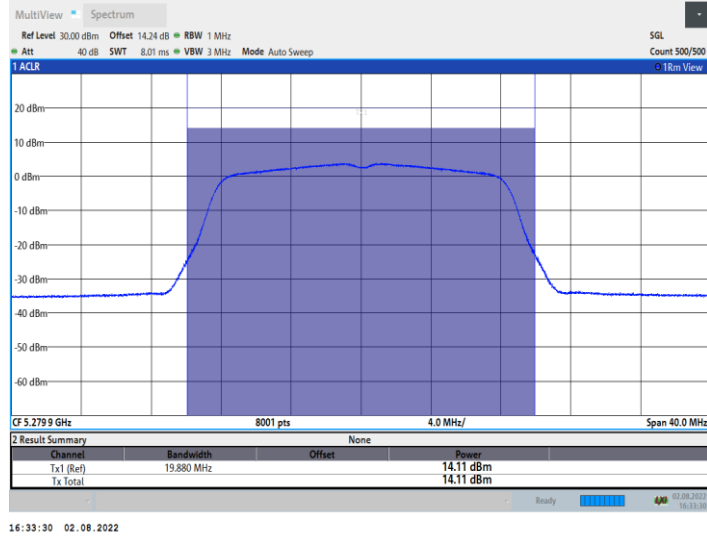

### 11A\_Ant1\_5320

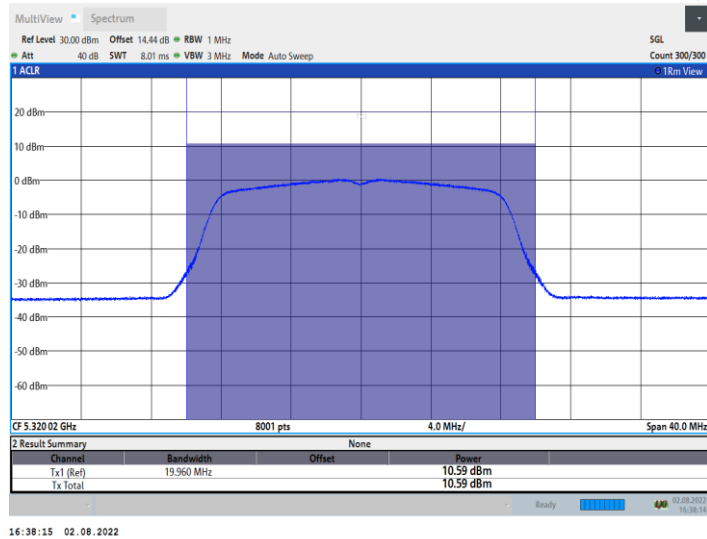


### 11A\_Ant1\_5500

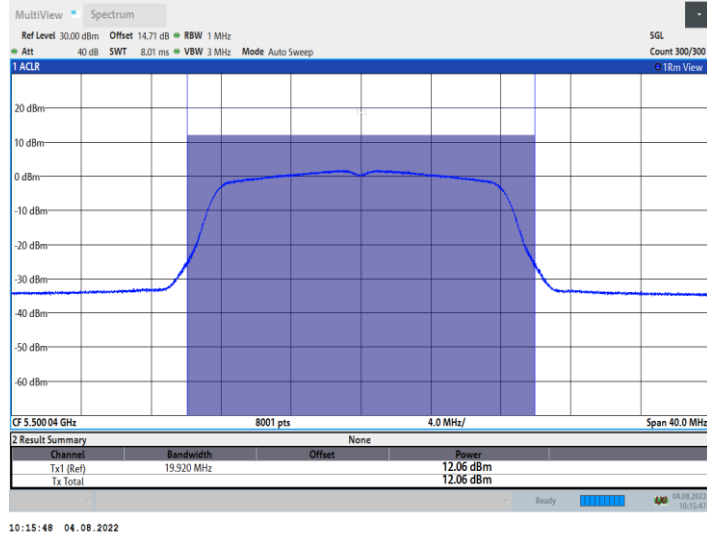


10:15:48 04.08.2022

### 11A\_Ant1\_5600

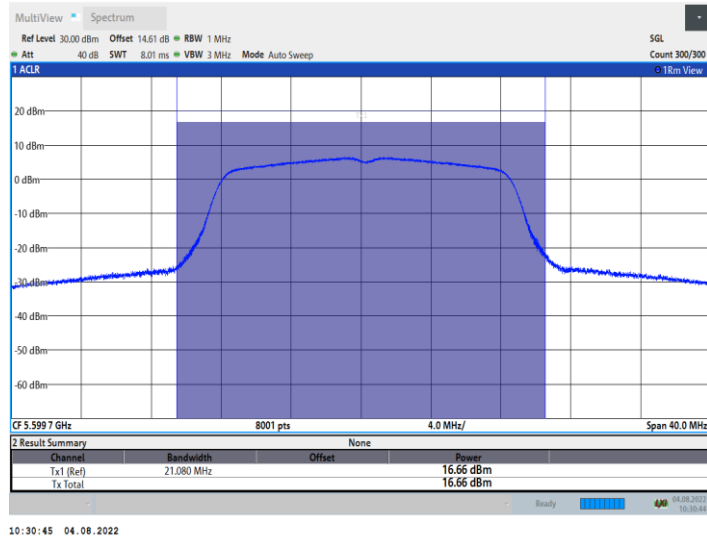


10:30:45 04.08.2022

### 11A\_Ant1\_5700

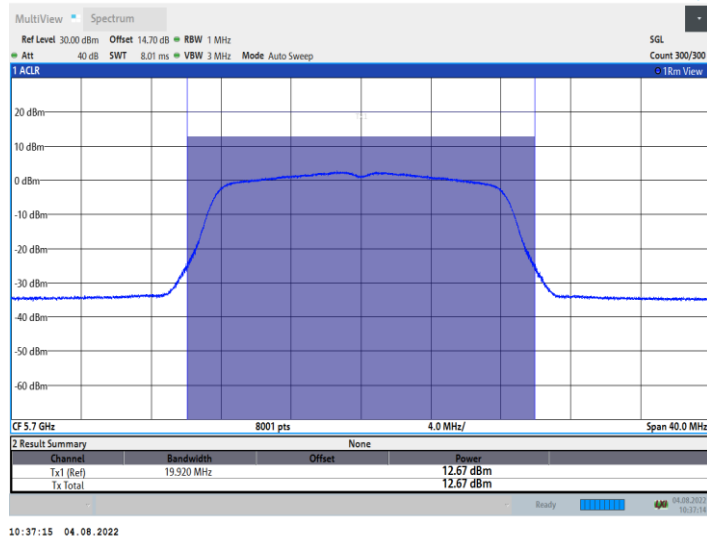


10:37:15 04.08.2022


### 11A\_Ant1\_5745

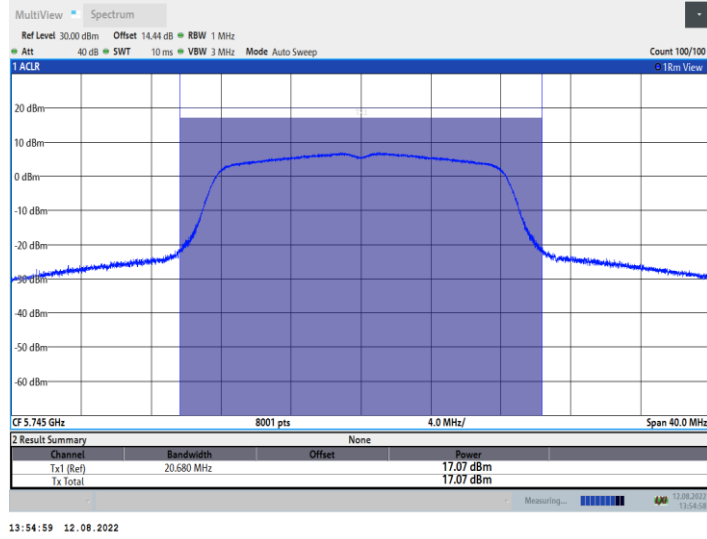


### 11A\_Ant1\_5785

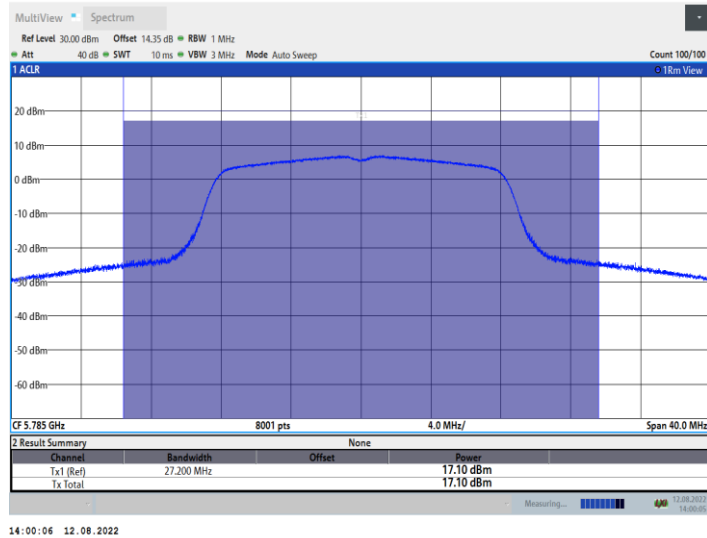


### 11A\_Ant1\_5825

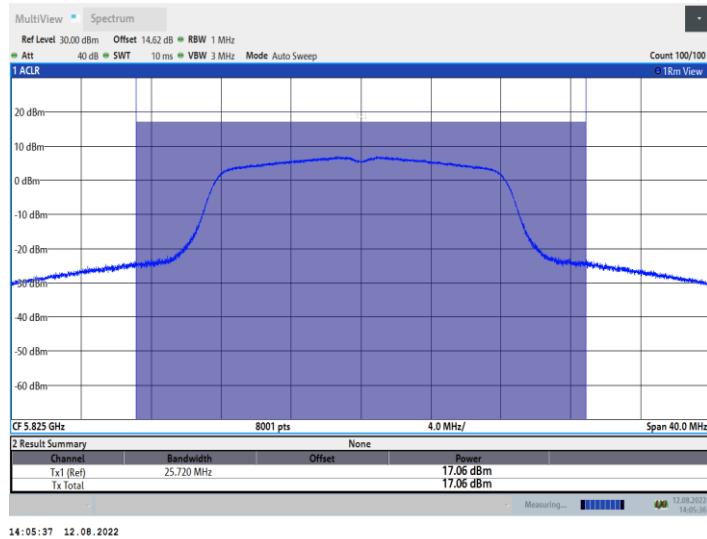


### 11N20SISO\_Ant1\_5180

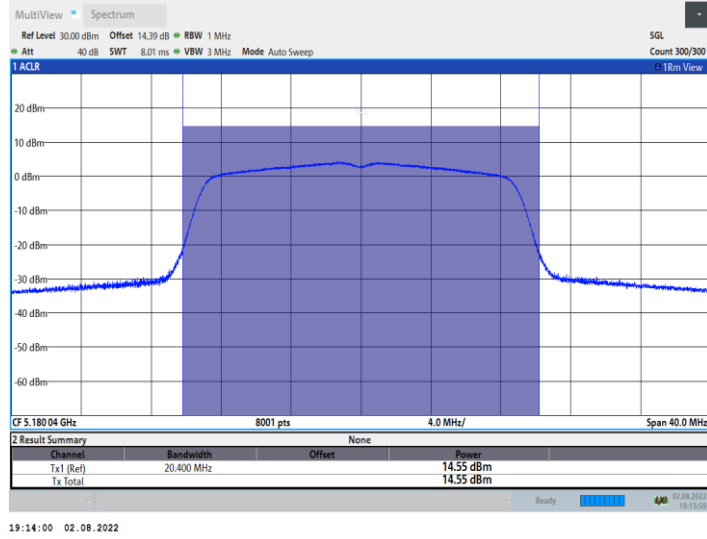


### 11N20SISO\_Ant1\_5200

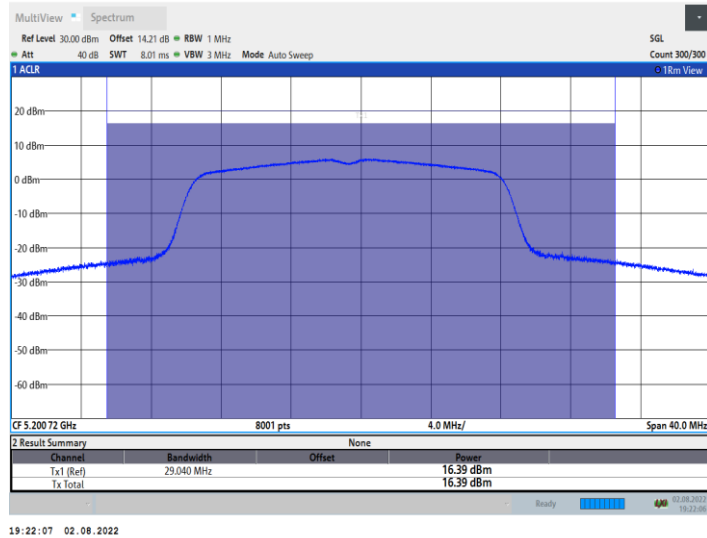

### 11N20SISO\_Ant1\_5240

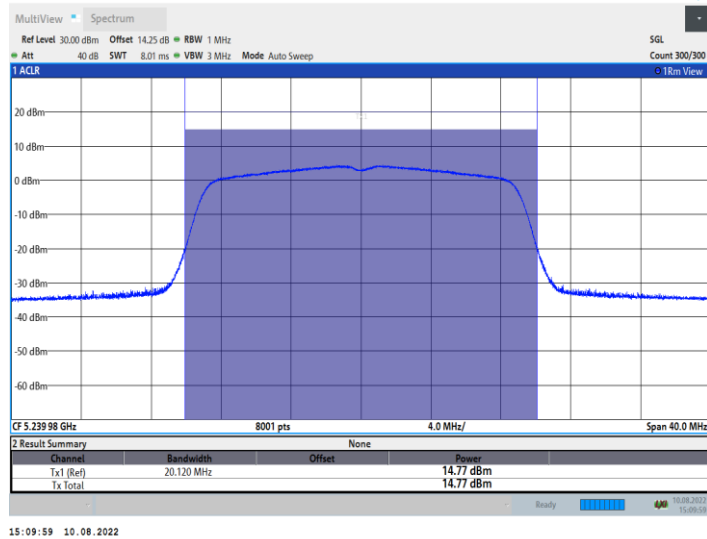


### 11N20SISO\_Ant1\_5260

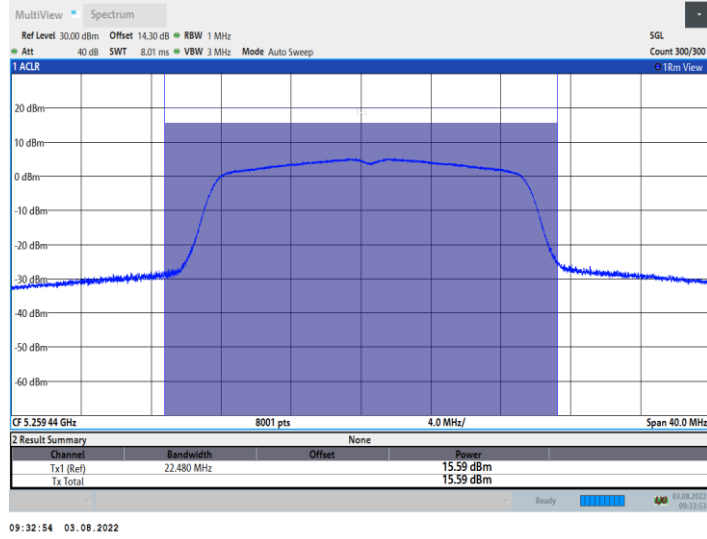


09:32:54 03.08.2022

### 11N20SISO\_Ant1\_5280

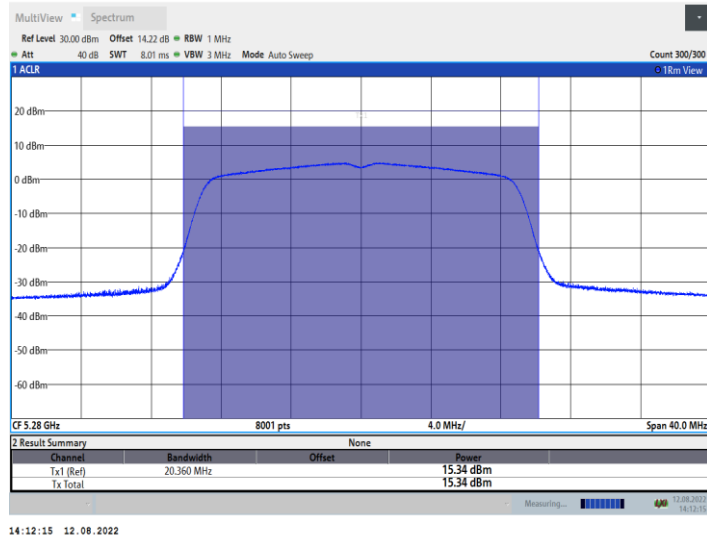


14:12:15 12.08.2022

### 11N20SISO\_Ant1\_5320

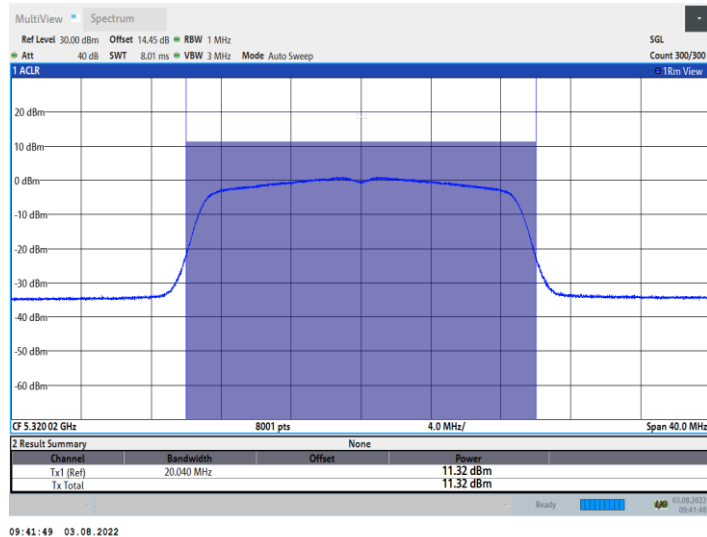


09:41:49 03.08.2022

### 11N20SISO\_Ant1\_5500

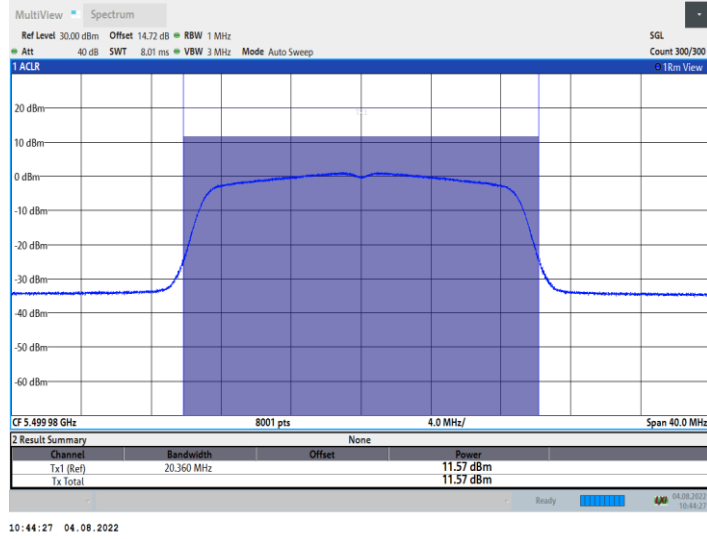


10:44:27 04.08.2022

### 11N20SISO\_Ant1\_5600

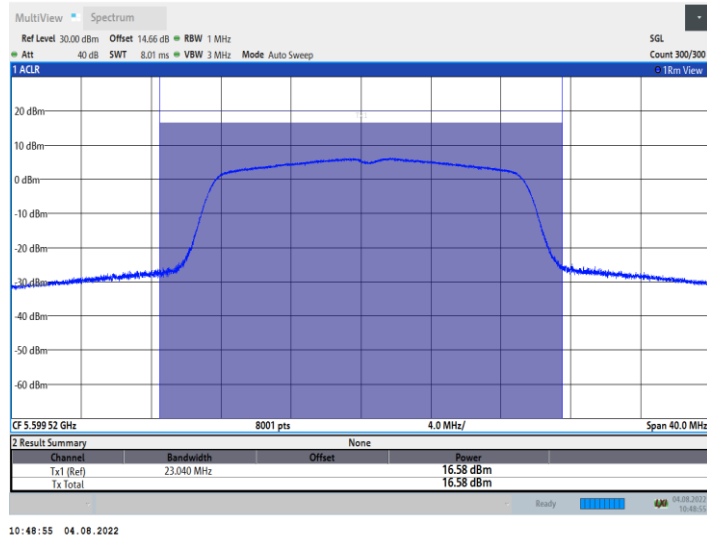


10:48:55 04.08.2022

### 11N20SISO\_Ant1\_5700

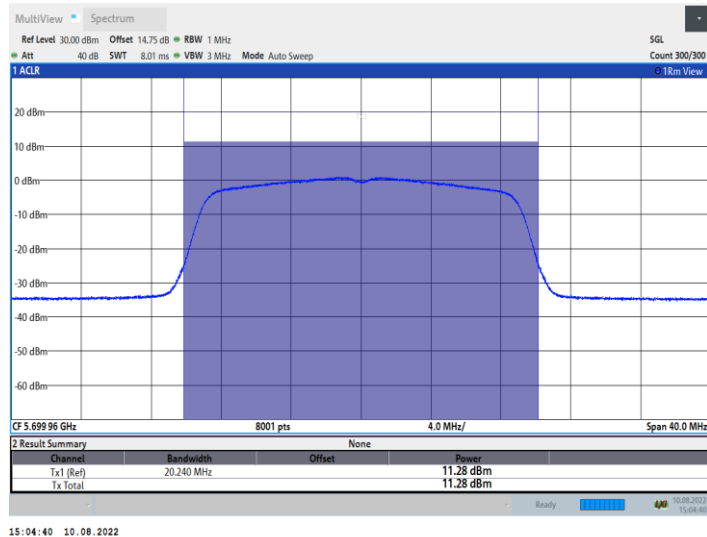


15:04:40 10.08.2022


### 11N20SISO\_Ant1\_5745

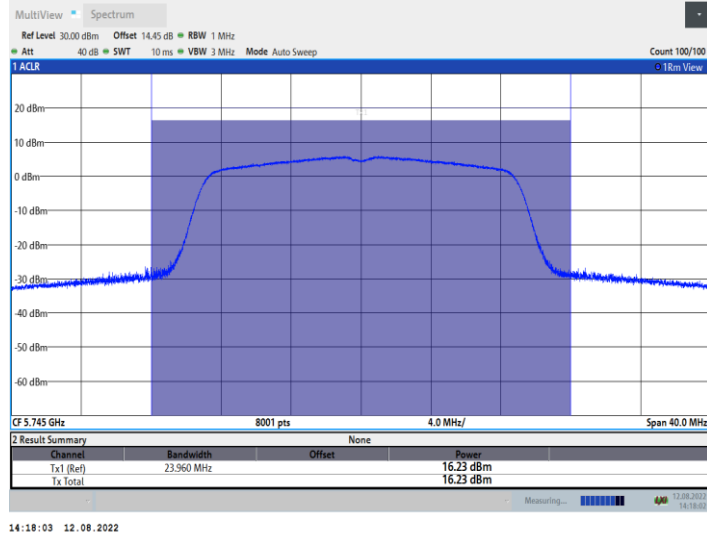

### 11N20SISO\_Ant1\_5785

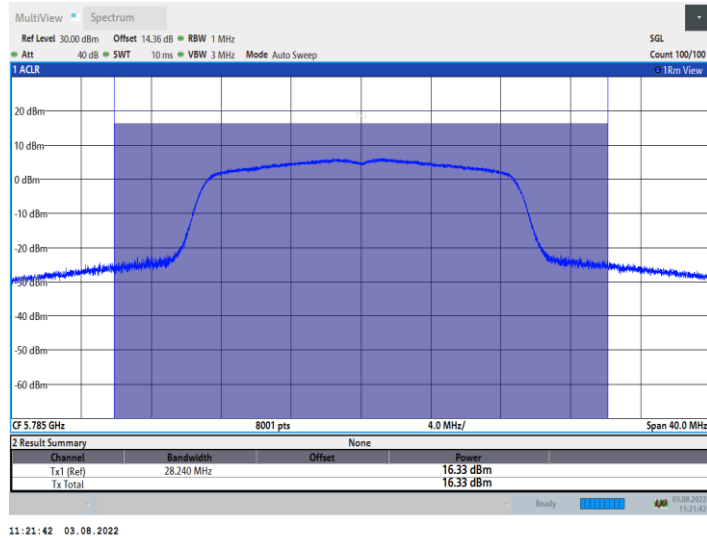


### 11N20SISO\_Ant1\_5825

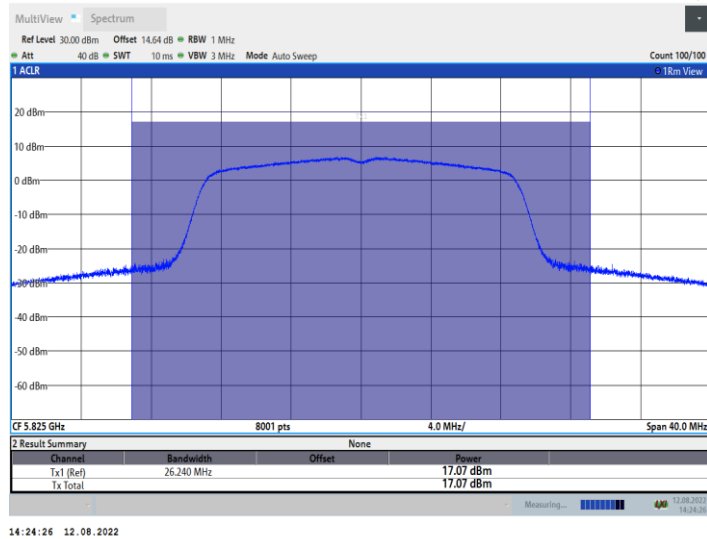





### 11N40SISO\_Ant1\_5190

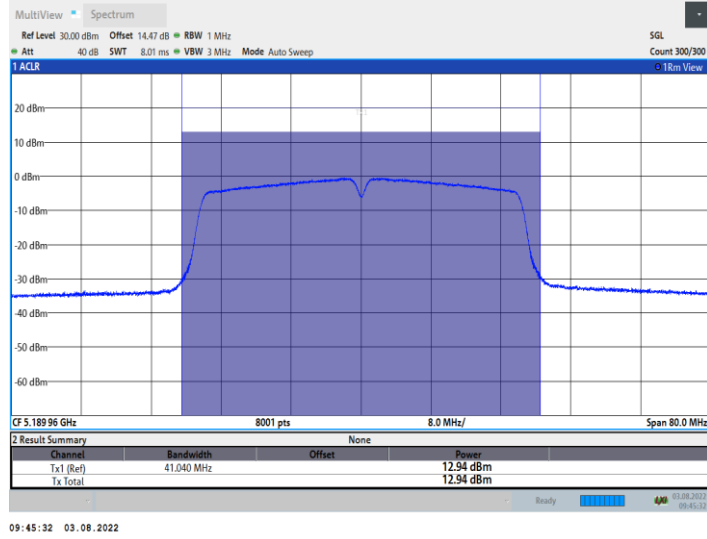


### 11N40SISO\_Ant1\_5230

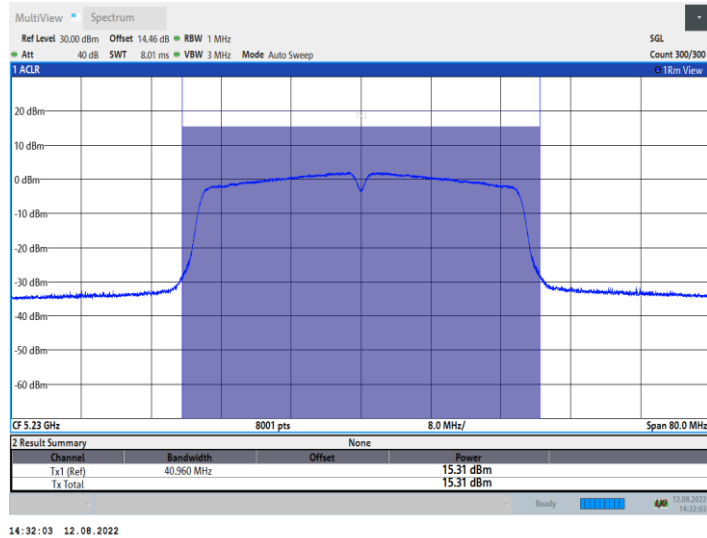


### 11N40SISO\_Ant1\_5270

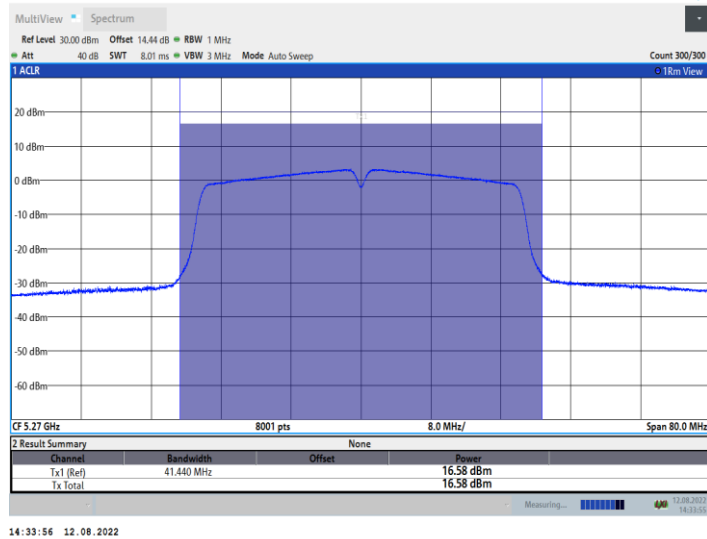


### 11N40SISO\_Ant1\_5310

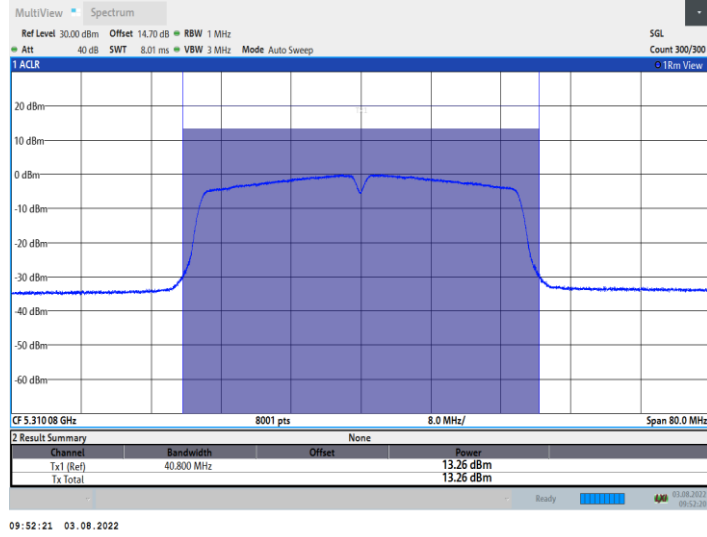


### 11N40SISO\_Ant1\_5510

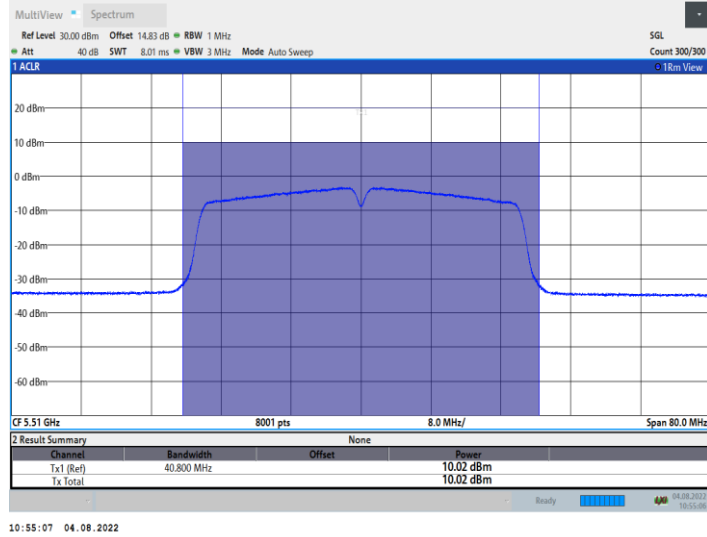


### 11N40SISO\_Ant1\_5590

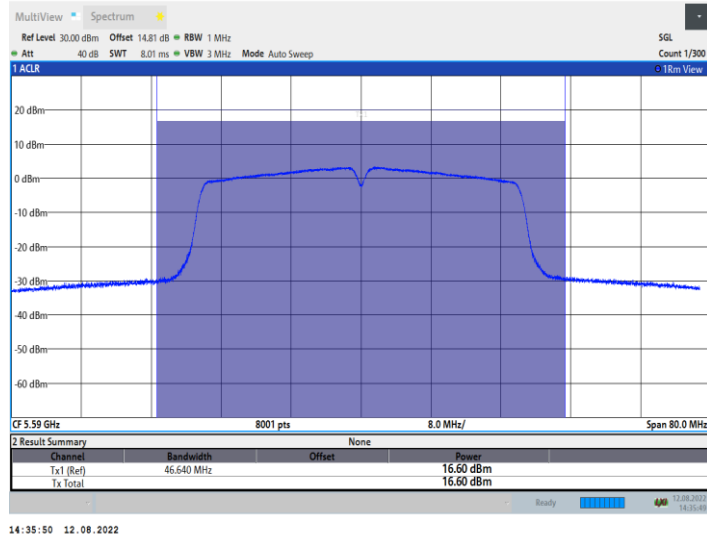


### 11N40SISO\_Ant1\_5670

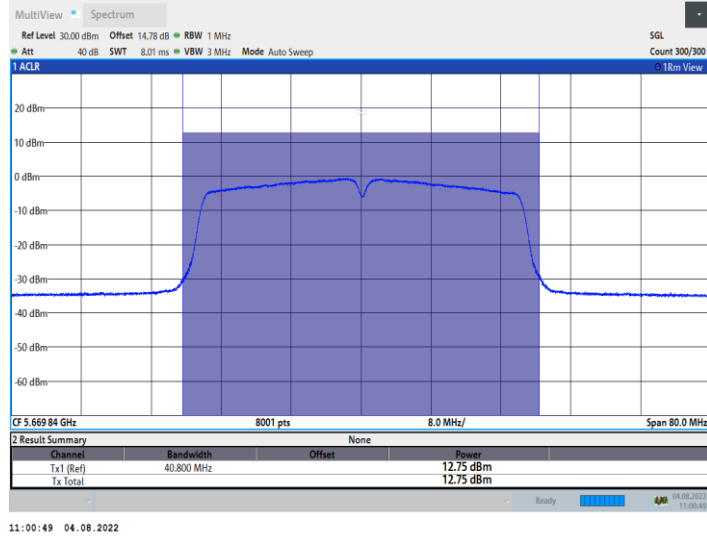


### 11N40SISO\_Ant1\_5755

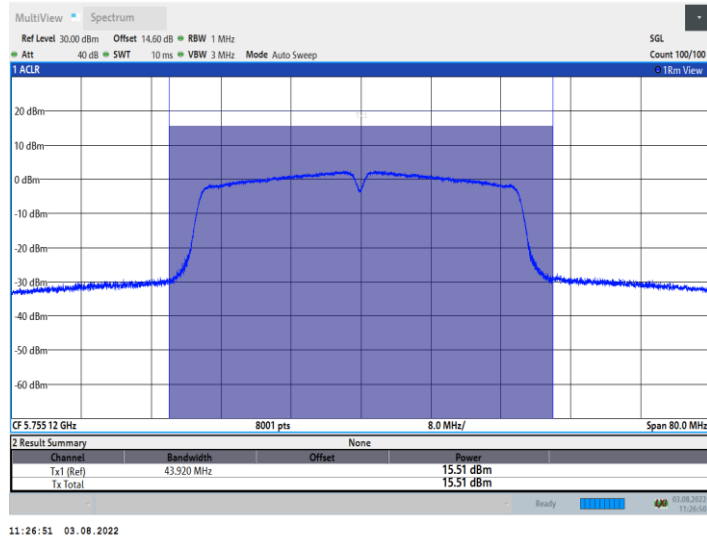


### 11N40SISO\_Ant1\_5795

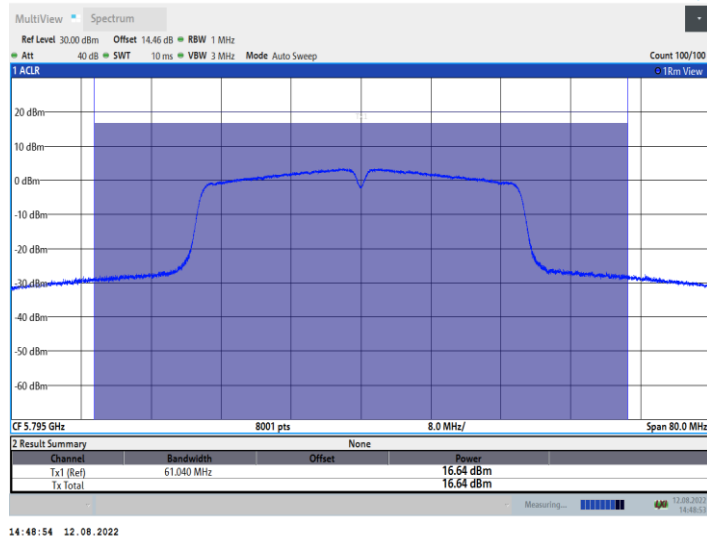


### 11AC20SISO\_Ant1\_5180

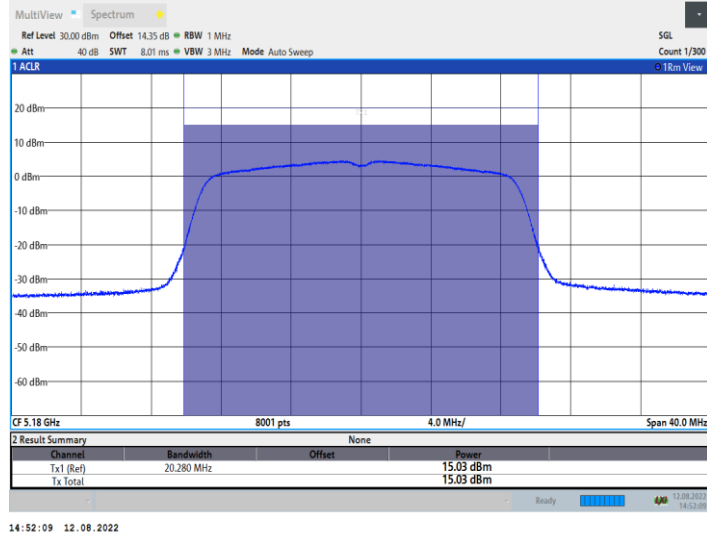


### 11AC20SISO\_Ant1\_5200

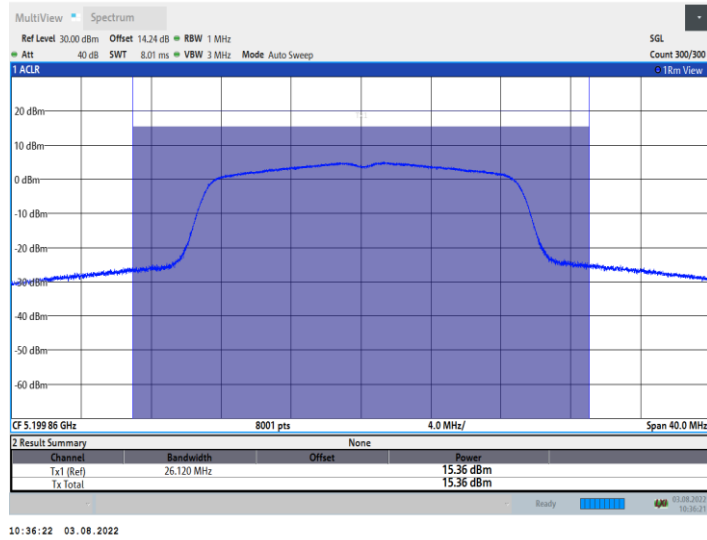


### 11AC20SISO\_Ant1\_5240

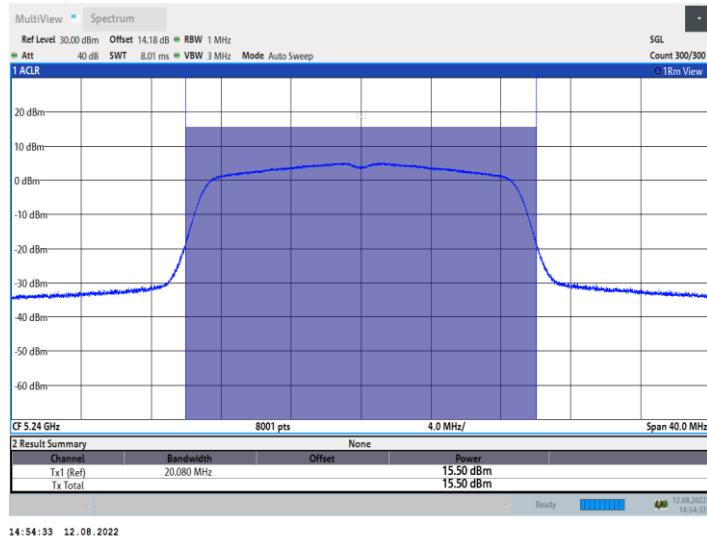


### 11AC20SISO\_Ant1\_5260

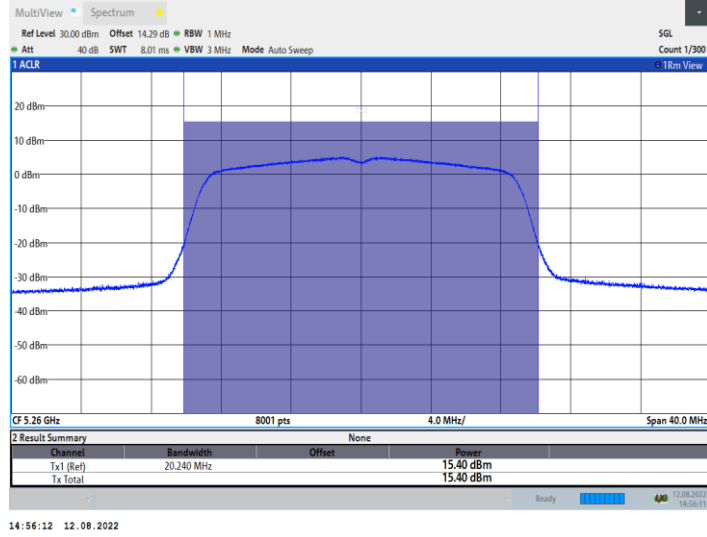


### 11AC20SISO\_Ant1\_5280

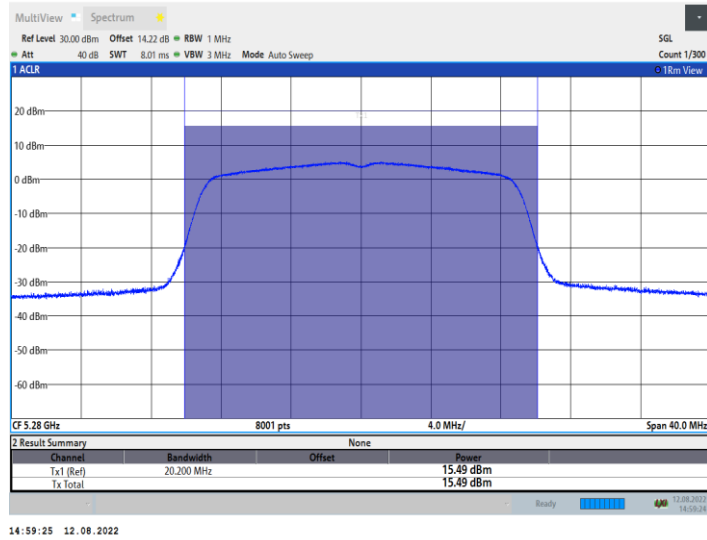


### 11AC20SISO\_Ant1\_5320

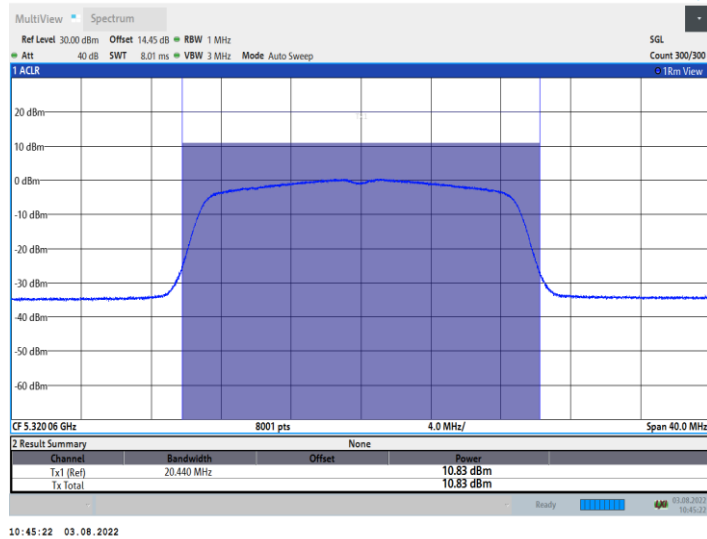


### 11AC20SISO\_Ant1\_5500

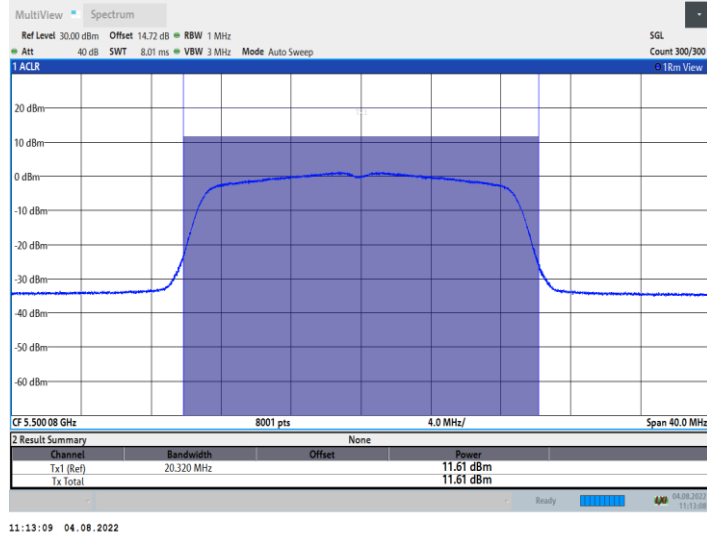


### 11AC20SISO\_Ant1\_5600

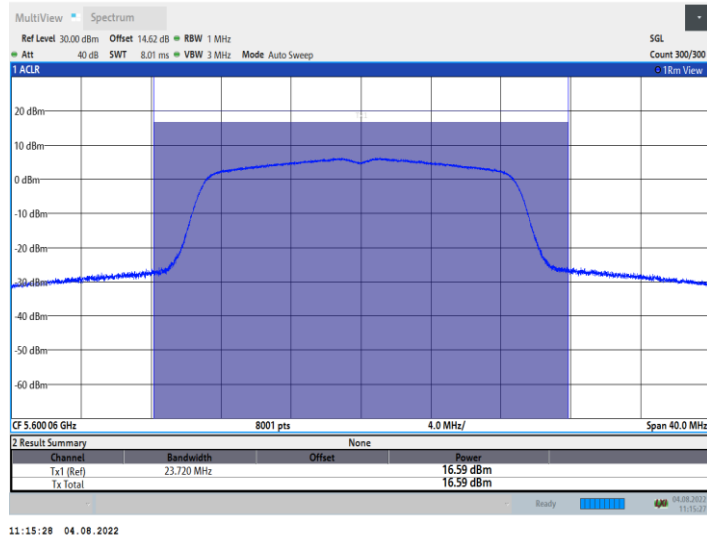


### 11AC20SISO\_Ant1\_5700

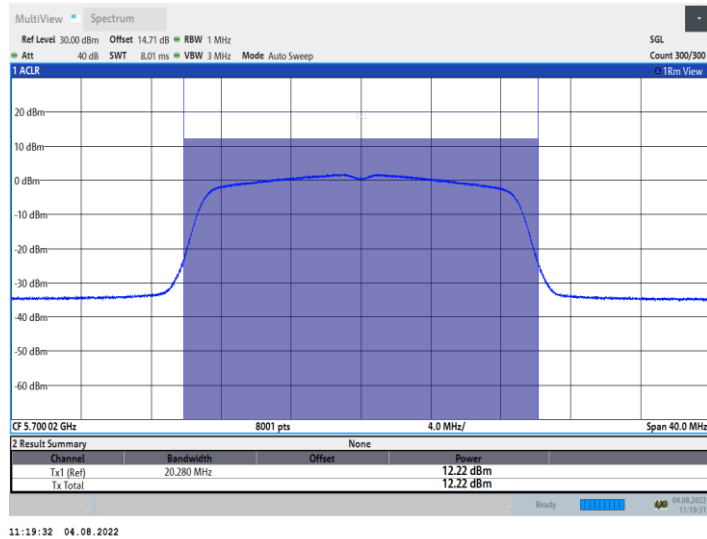


### 11AC20SISO\_Ant1\_5745

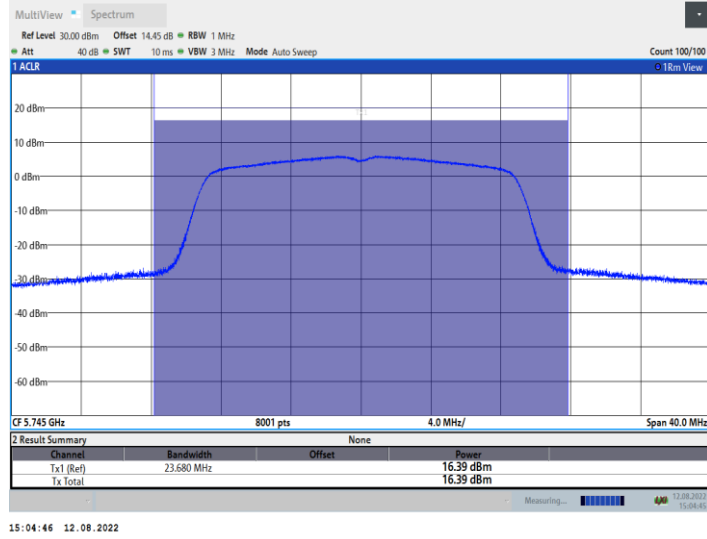


### 11AC20SISO\_Ant1\_5785

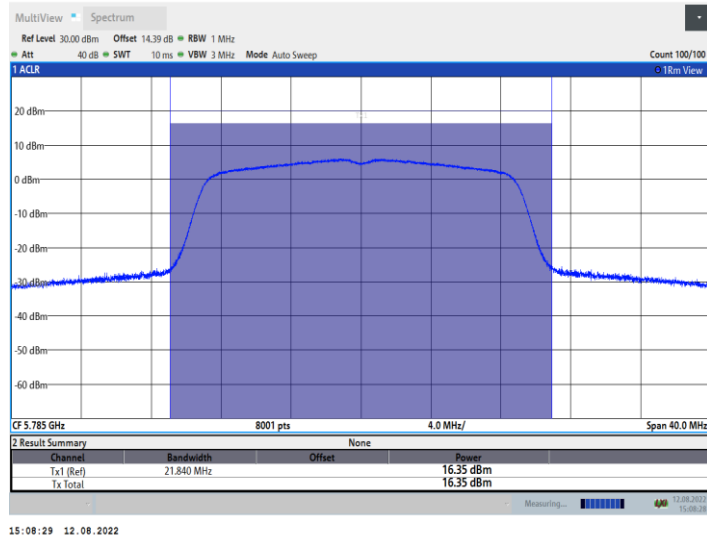


### 11AC20SISO\_Ant1\_5825

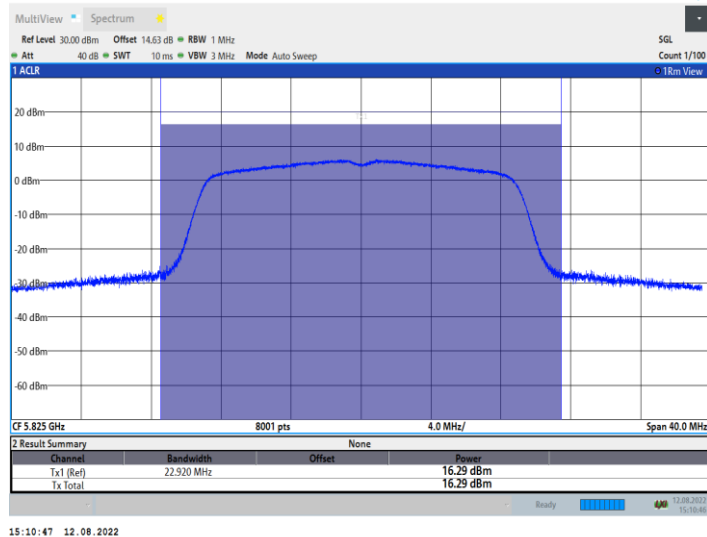


### 11AC40SISO\_Ant1\_5190

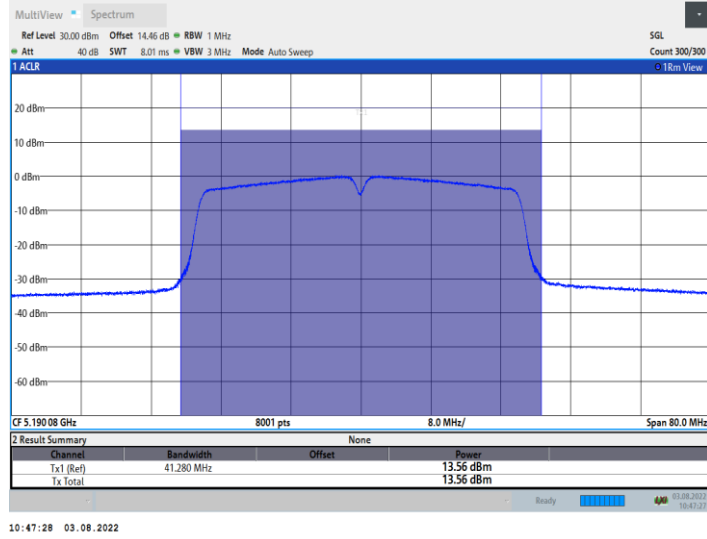

### 11AC40SISO\_Ant1\_5230

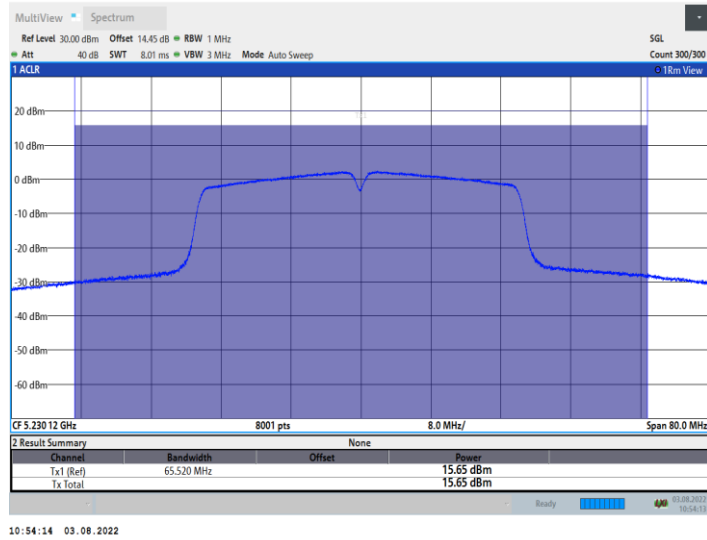


### 11AC40SISO\_Ant1\_5270

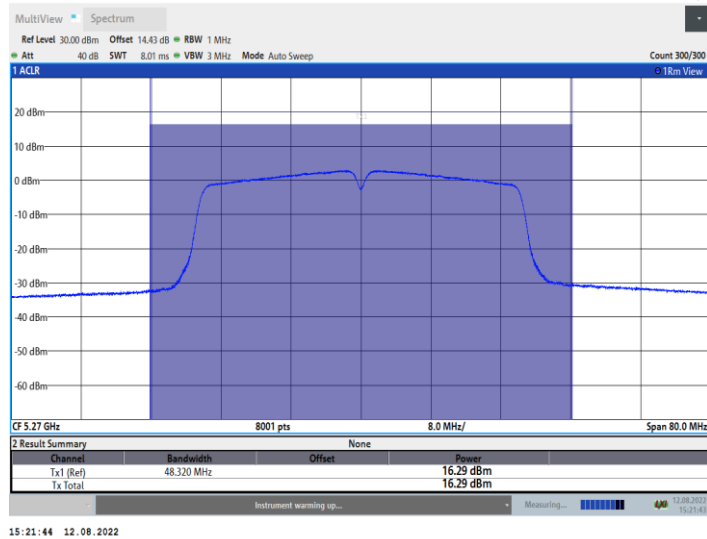





### 11AC40SISO\_Ant1\_5310

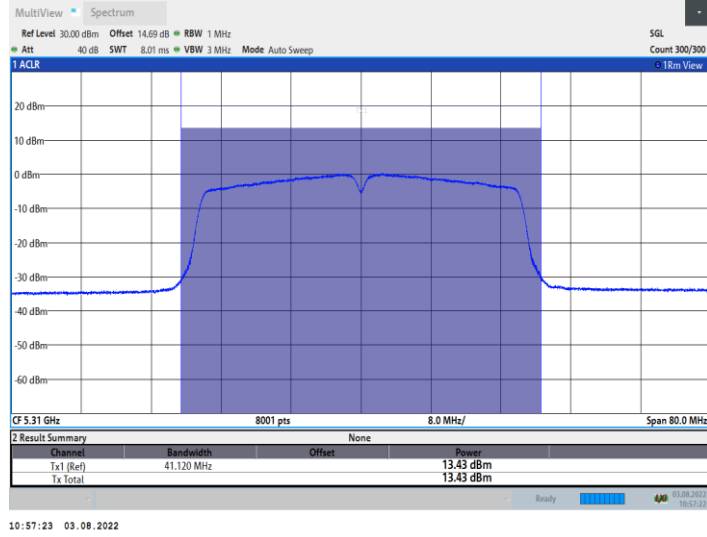


### 11AC40SISO\_Ant1\_5510

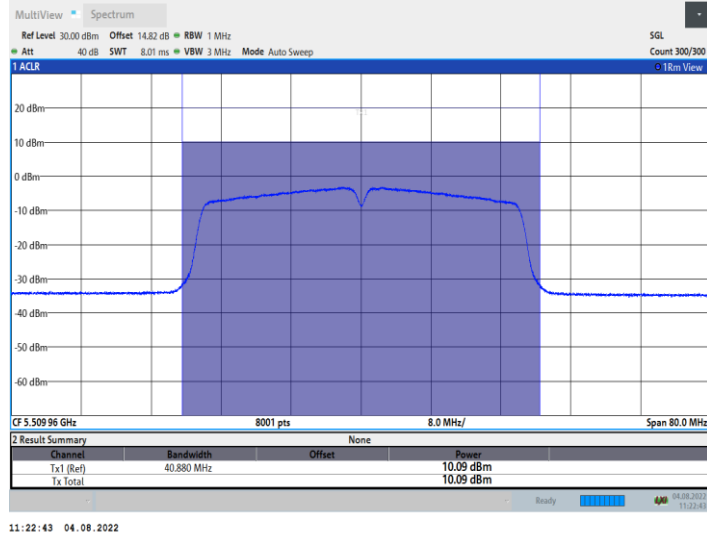


### 11AC40SISO\_Ant1\_5590

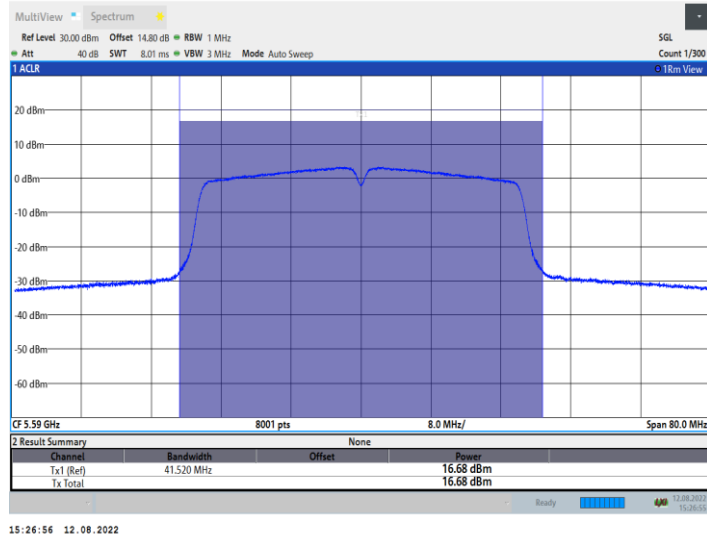


### 11AC40SISO\_Ant1\_5670

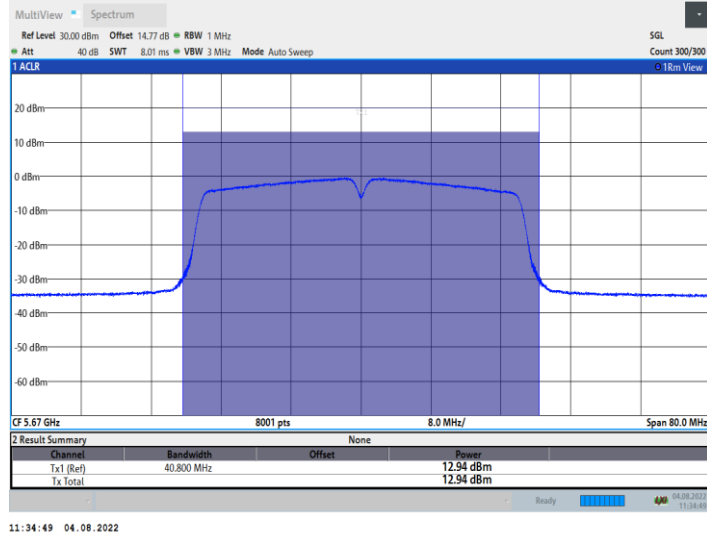


### 11AC40SISO\_Ant1\_5755

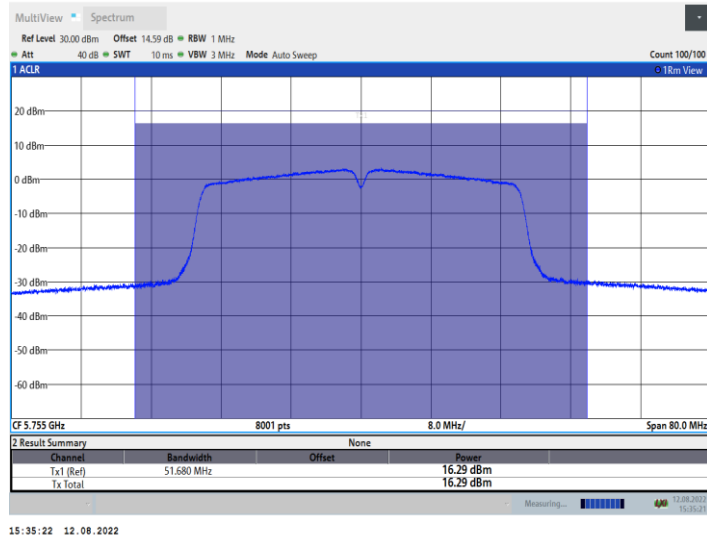


### 11AC40SISO\_Ant1\_5795

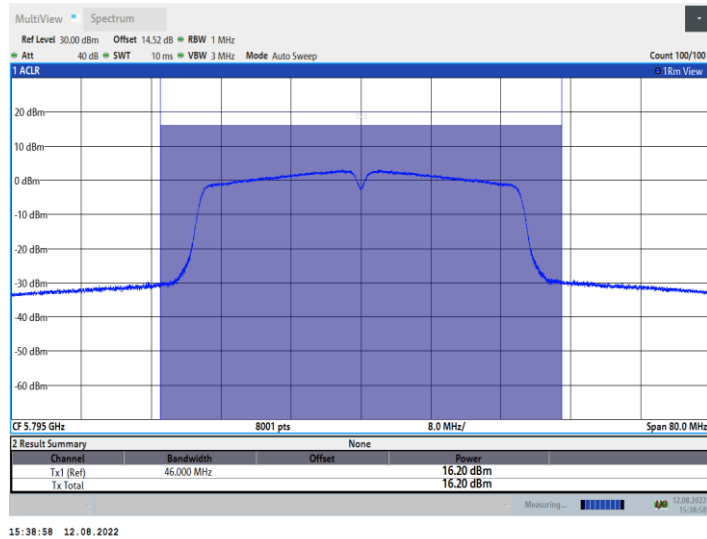


### 11AC80SISO\_Ant1\_5210

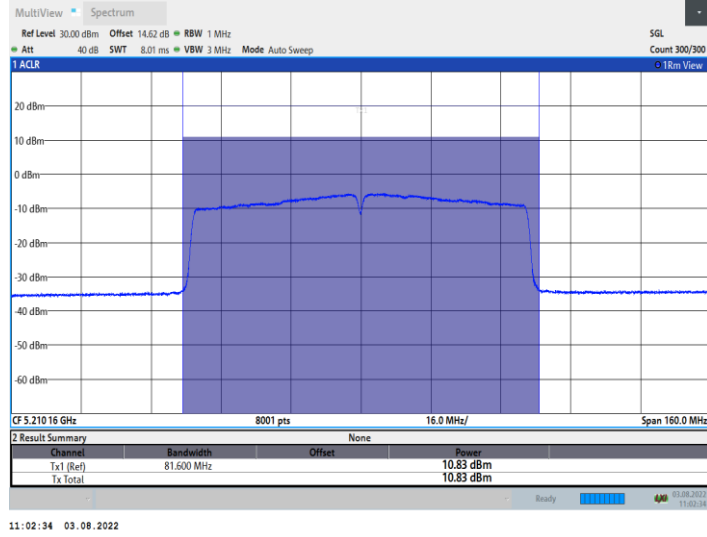


### 11AC80SISO\_Ant1\_5290

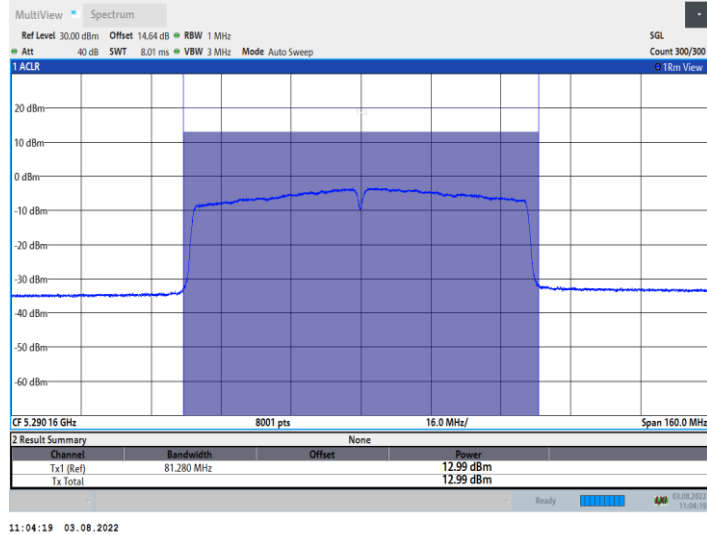


### 11AC80SISO\_Ant1\_5530

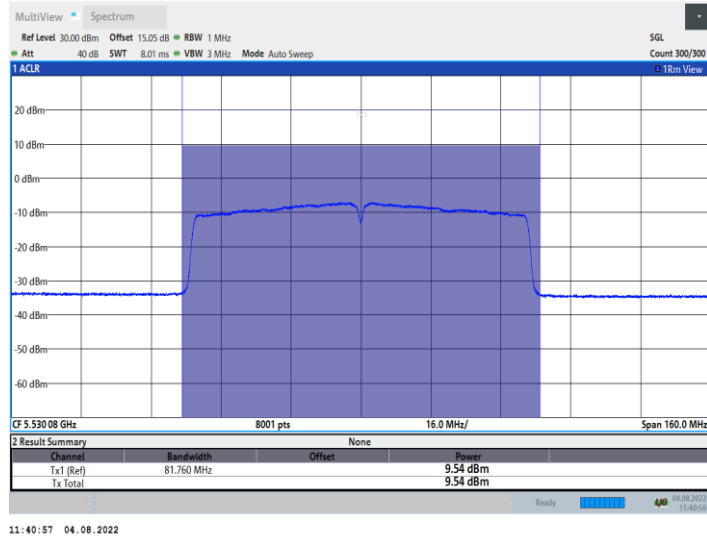

11AC80SISO\_Ant1\_5610

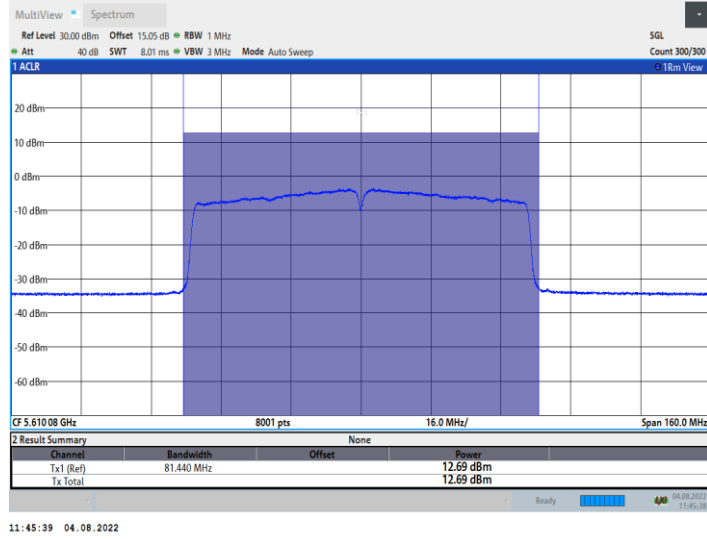

11AC80SISO\_Ant1\_5775

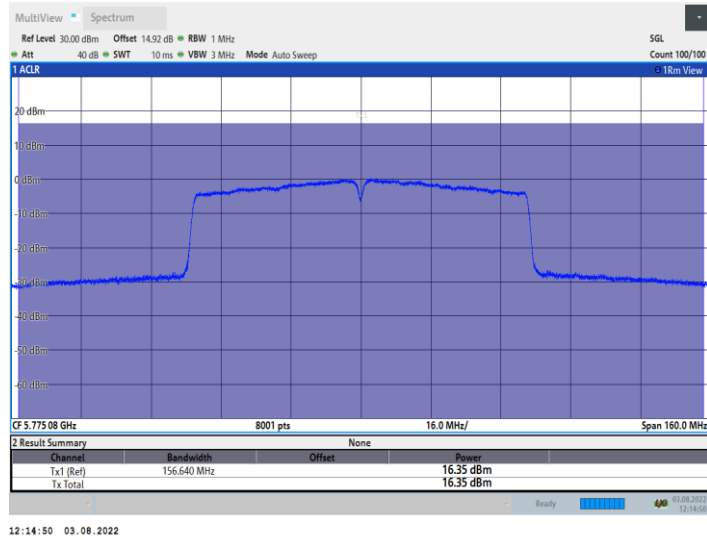

## 9. MAXIMUM POWER SPECTRAL DENSITY LEVEL MEASUREMENT

### 9.1. Limits of Maximum Power Spectral Density Level Measurement

CFR 47 (FCC) part 15.407 (a)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 9.2. Test Procedure

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...." (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)

2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.

3. Make the following adjustments to the peak value of the spectrum, if applicable:  
a) If Method SA-2 or SA-2 Alternative was used, add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the peak of the spectrum.

b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.

4. The result is the Maximum PSD over 1 MHz reference bandwidth.

5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the

above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or

500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and 789033 D02 General UNII Test Procedures New Rules v01r02 Page 10 integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set RBW  $\geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set VBW  $\geq 3$  RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10 log (500 kHz/RBW) to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add 10 log (1MHz/RBW) to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

### 9.3. Test Data


Table 12 Maximum Power Spectral Density Level Test Data

| Test Mode    | Test Channel [MHz] | PSD [dBm/MHz] | Limit [dBm/MHz] | Verdict |
|--------------|--------------------|---------------|-----------------|---------|
| 802.11a      | 5180               | 4.35          | $\leq 11$       | PASS    |
| 802.11a      | 5200               | 5.25          | $\leq 11$       | PASS    |
| 802.11a      | 5240               | 5.48          | $\leq 11$       | PASS    |
| 802.11a      | 5260               | 4.24          | $\leq 11$       | PASS    |
| 802.11a      | 5280               | 4.2           | $\leq 11$       | PASS    |
| 802.11a      | 5320               | 0.87          | $\leq 11$       | PASS    |
| 802.11a      | 5500               | 3.15          | $\leq 11$       | PASS    |
| 802.11a      | 5600               | 6.9           | $\leq 11$       | PASS    |
| 802.11a      | 5700               | 3.34          | $\leq 11$       | PASS    |
| 802.11a      | 5745               | 4.56          | $\leq 30$       | PASS    |
| 802.11a      | 5785               | 4.59          | $\leq 30$       | PASS    |
| 802.11a      | 5825               | 4.68          | $\leq 30$       | PASS    |
| 802.11n HT20 | 5180               | 4.82          | $\leq 11$       | PASS    |
| 802.11n HT20 | 5200               | 6.64          | $\leq 11$       | PASS    |
| 802.11n HT20 | 5240               | 5.1           | $\leq 11$       | PASS    |
| 802.11n HT20 | 5260               | 5.81          | $\leq 11$       | PASS    |
| 802.11n HT20 | 5280               | 5.66          | $\leq 11$       | PASS    |
| 802.11n HT20 | 5320               | 2.56          | $\leq 11$       | PASS    |
| 802.11n HT20 | 5500               | 1.86          | $\leq 11$       | PASS    |
| 802.11n HT20 | 5600               | 6.74          | $\leq 11$       | PASS    |
| 802.11n HT20 | 5700               | 2.05          | $\leq 11$       | PASS    |


|                |      |       |      |      |
|----------------|------|-------|------|------|
| 802.11n HT20   | 5745 | 3.16  | <=30 | PASS |
| 802.11n HT20   | 5785 | 3.66  | <=30 | PASS |
| 802.11n HT20   | 5825 | 3.96  | <=30 | PASS |
| 802.11n HT40   | 5190 | 0.76  | <=11 | PASS |
| 802.11n HT40   | 5230 | 2.76  | <=11 | PASS |
| 802.11n HT40   | 5270 | 3.66  | <=11 | PASS |
| 802.11n HT40   | 5310 | 0.8   | <=11 | PASS |
| 802.11n HT40   | 5510 | -2.6  | <=11 | PASS |
| 802.11n HT40   | 5590 | 3.63  | <=11 | PASS |
| 802.11n HT40   | 5670 | -0.05 | <=11 | PASS |
| 802.11n HT40   | 5755 | -0.34 | <=30 | PASS |
| 802.11n HT40   | 5795 | 0.79  | <=30 | PASS |
| 802.11ac VHT20 | 5180 | 4.97  | <=11 | PASS |
| 802.11ac VHT20 | 5200 | 6.02  | <=11 | PASS |
| 802.11ac VHT20 | 5240 | 5.52  | <=11 | PASS |
| 802.11ac VHT20 | 5260 | 5.53  | <=11 | PASS |
| 802.11ac VHT20 | 5280 | 5.8   | <=11 | PASS |
| 802.11ac VHT20 | 5320 | 1.28  | <=11 | PASS |
| 802.11ac VHT20 | 5500 | 1.92  | <=11 | PASS |
| 802.11ac VHT20 | 5600 | 6.76  | <=11 | PASS |
| 802.11ac VHT20 | 5700 | 2.39  | <=11 | PASS |
| 802.11ac VHT20 | 5745 | 3.19  | <=30 | PASS |
| 802.11ac VHT20 | 5785 | 3.27  | <=30 | PASS |
| 802.11ac VHT20 | 5825 | 3.49  | <=30 | PASS |
| 802.11ac VHT40 | 5190 | 0.81  | <=11 | PASS |
| 802.11ac VHT40 | 5230 | 3.26  | <=11 | PASS |
| 802.11ac VHT40 | 5270 | 3.41  | <=11 | PASS |
| 802.11ac VHT40 | 5310 | 0.69  | <=11 | PASS |
| 802.11ac VHT40 | 5510 | -2.62 | <=11 | PASS |
| 802.11ac VHT40 | 5590 | 3.86  | <=11 | PASS |
| 802.11ac VHT40 | 5670 | 0.11  | <=11 | PASS |
| 802.11ac VHT40 | 5755 | 0.15  | <=30 | PASS |
| 802.11ac VHT40 | 5795 | 0.22  | <=30 | PASS |
| 802.11ac VHT80 | 5210 | -4.99 | <=11 | PASS |
| 802.11ac VHT80 | 5290 | -2.89 | <=11 | PASS |
| 802.11ac VHT80 | 5530 | -6.42 | <=11 | PASS |
| 802.11ac VHT80 | 5610 | -3.15 | <=11 | PASS |
| 802.11ac VHT80 | 5775 | -2.19 | <=30 | PASS |

Note: 1. The Result and Limit Unit is dBm/500 kHz in the band 5.725-5.85 GHz.  
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.


### 11A\_Ant1\_5180

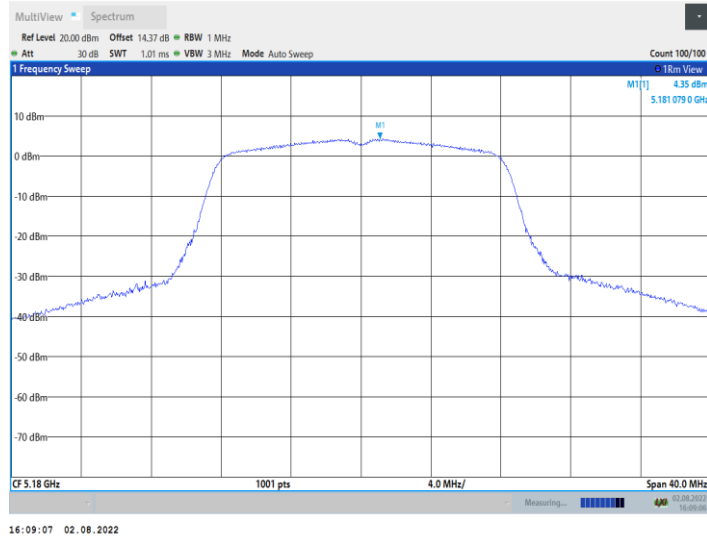

### 11A\_Ant1\_5200

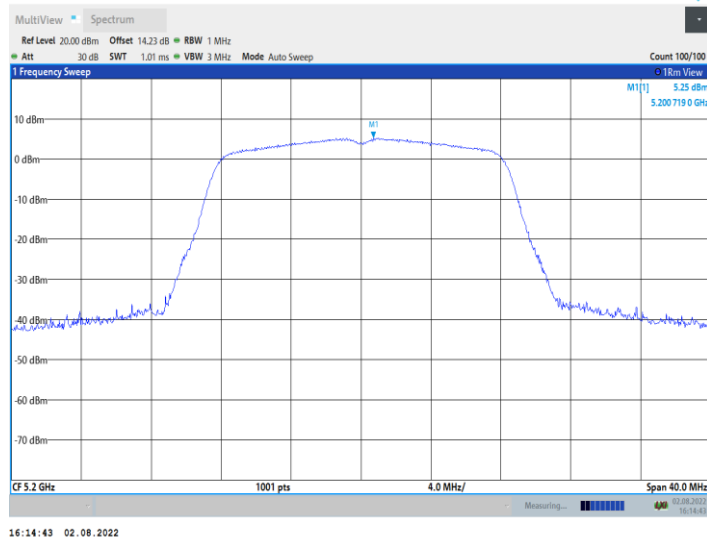


### 11A\_Ant1\_5240

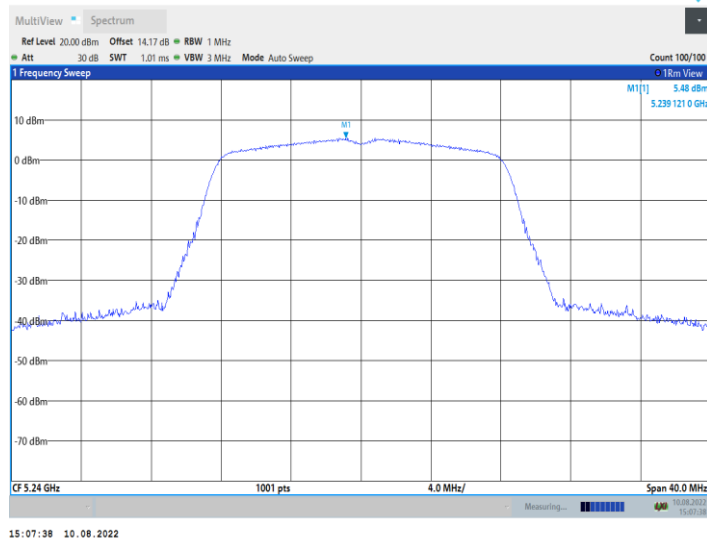





### 11A\_Ant1\_5260

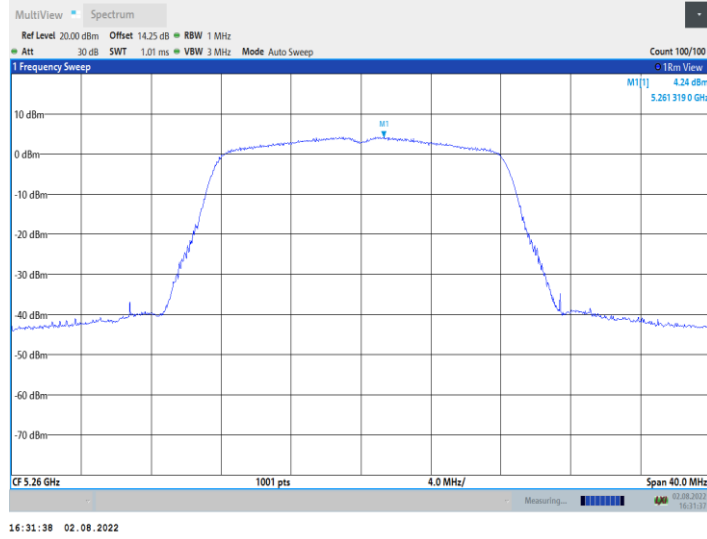


### 11A\_Ant1\_5280

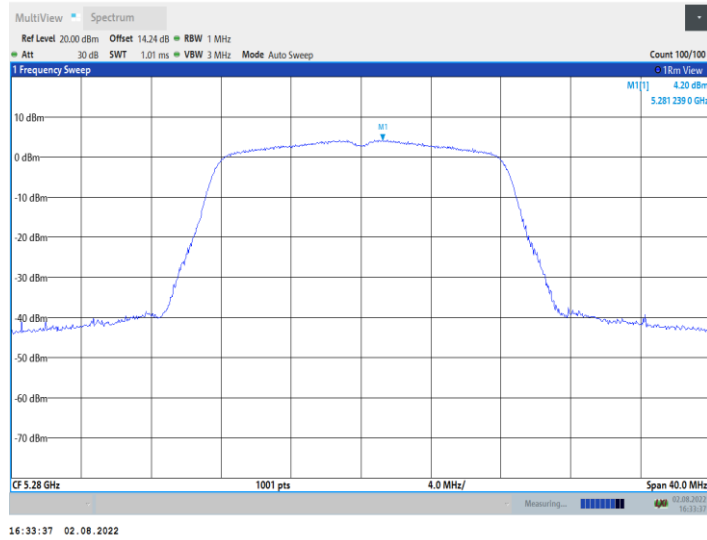


### 11A\_Ant1\_5320

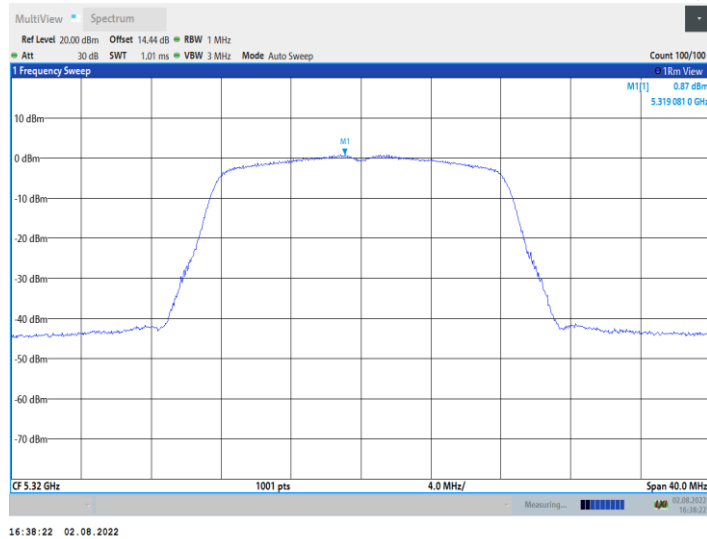


### 11A\_Ant1\_5500

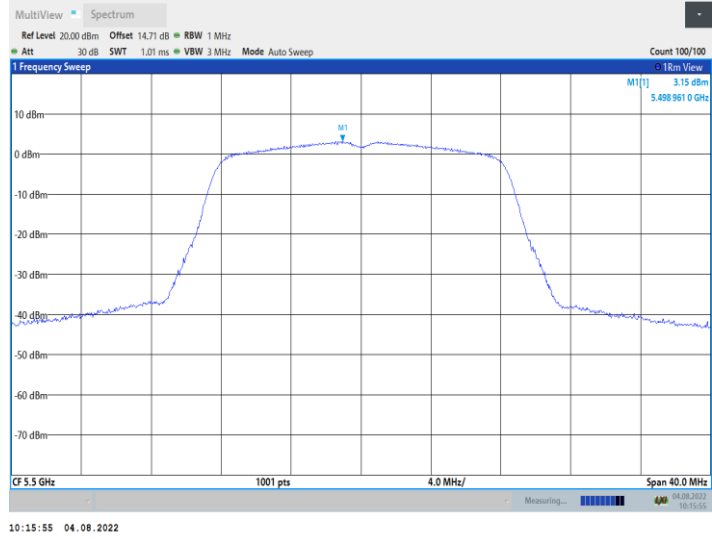


### 11A\_Ant1\_5600

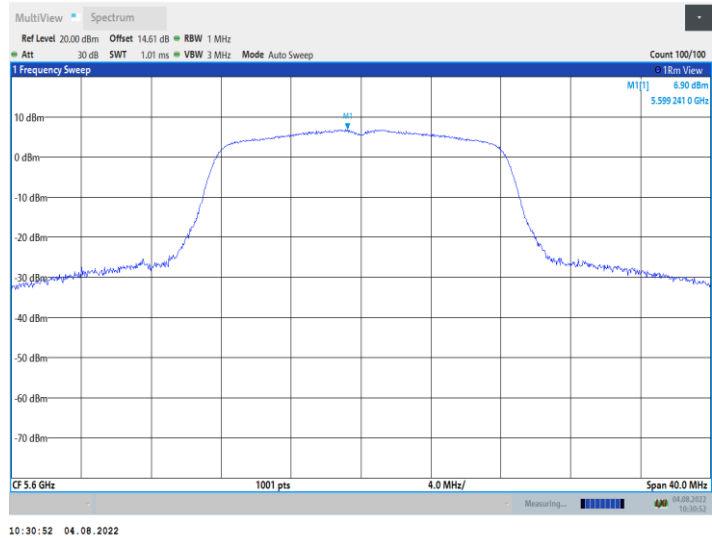


### 11A\_Ant1\_5700

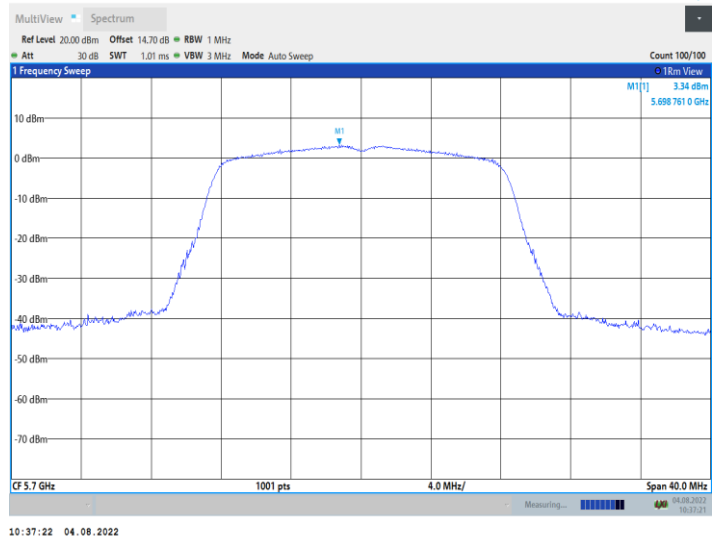


### 11A\_Ant1\_5745

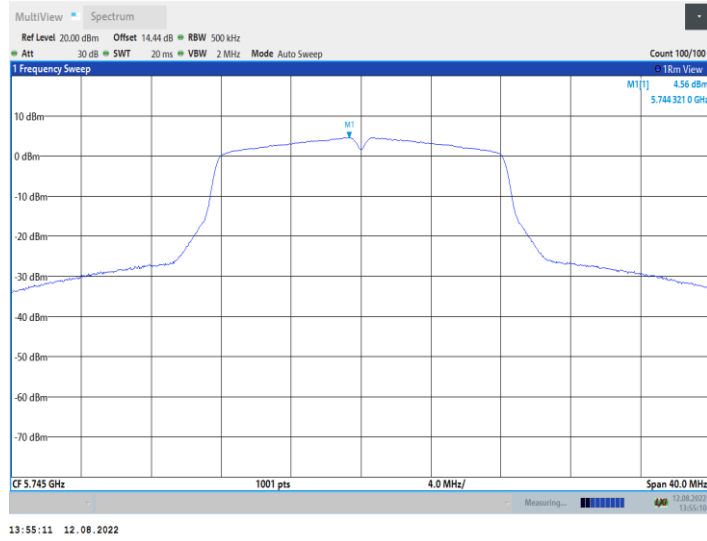


### 11A\_Ant1\_5785

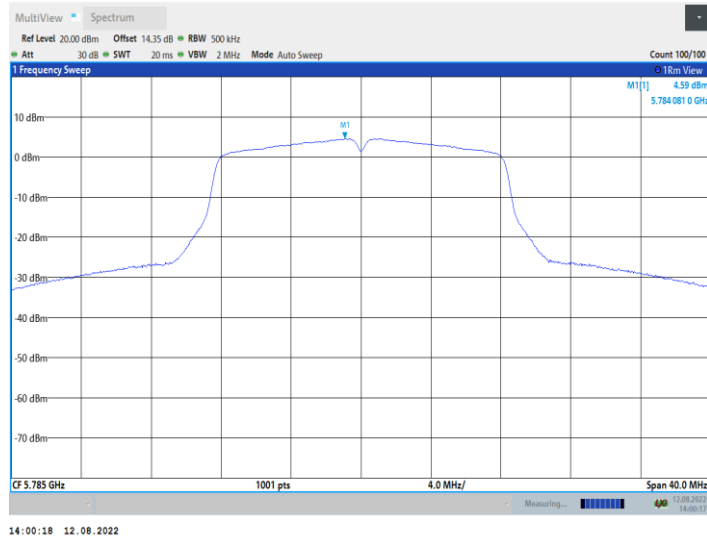


### 11A\_Ant1\_5825

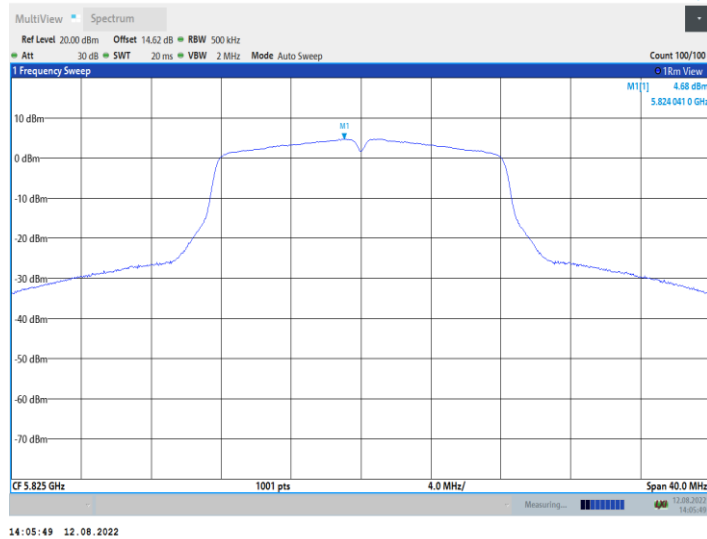


### 11N20SISO\_Ant1\_5180

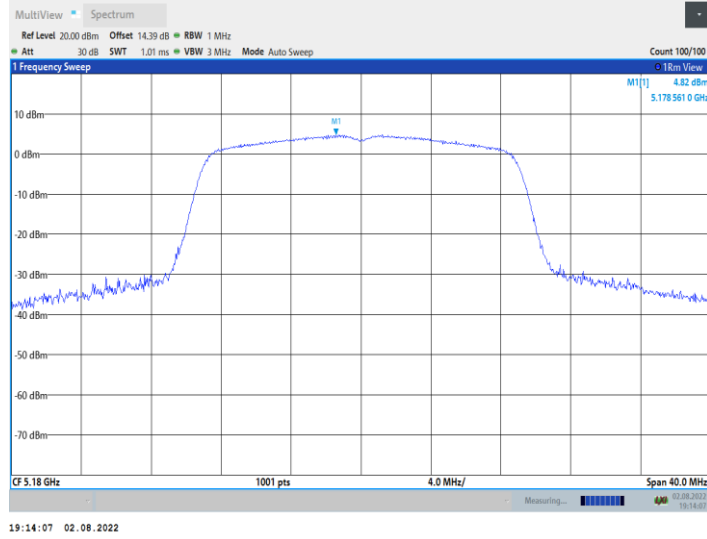


### 11N20SISO\_Ant1\_5200

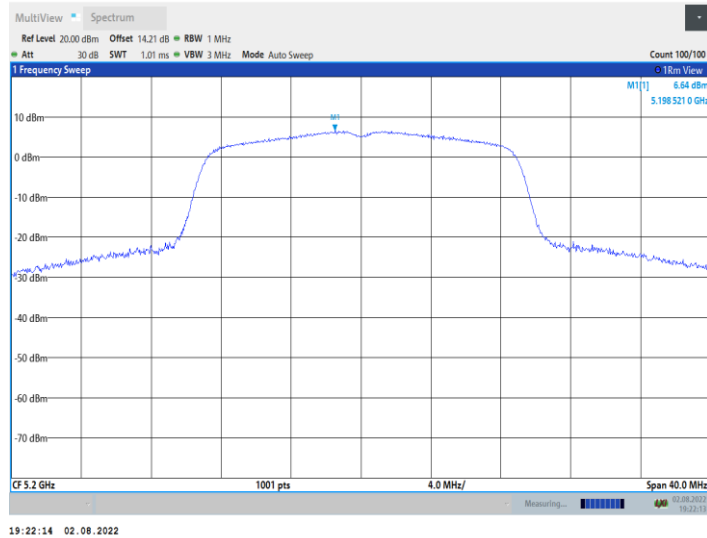


### 11N20SISO\_Ant1\_5240

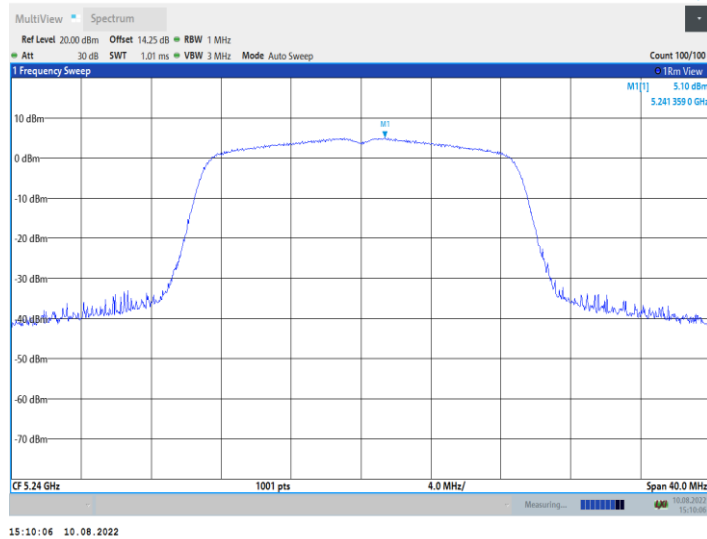


### 11N20SISO\_Ant1\_5260

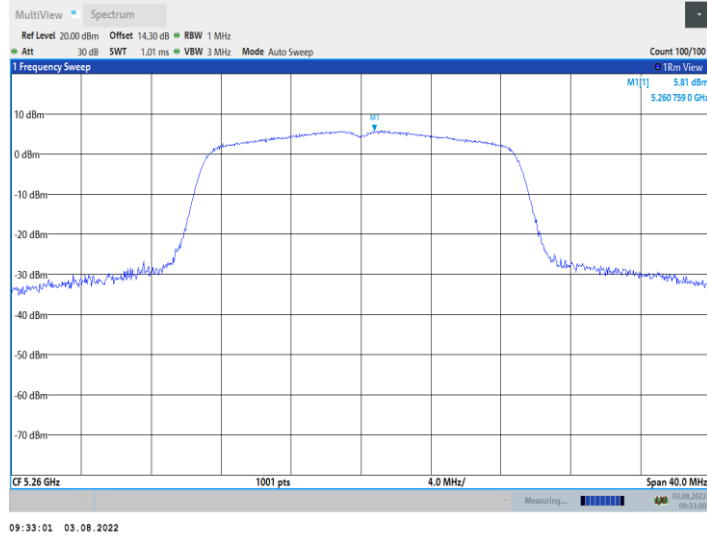


### 11N20SISO\_Ant1\_5280

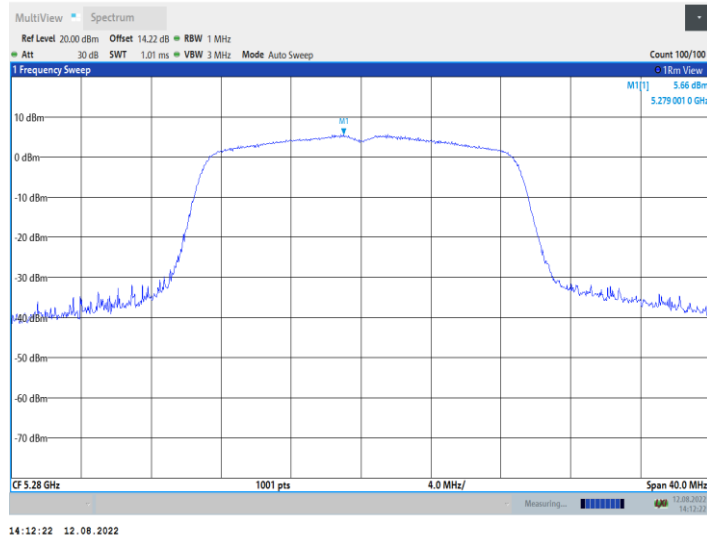


### 11N20SISO\_Ant1\_5320

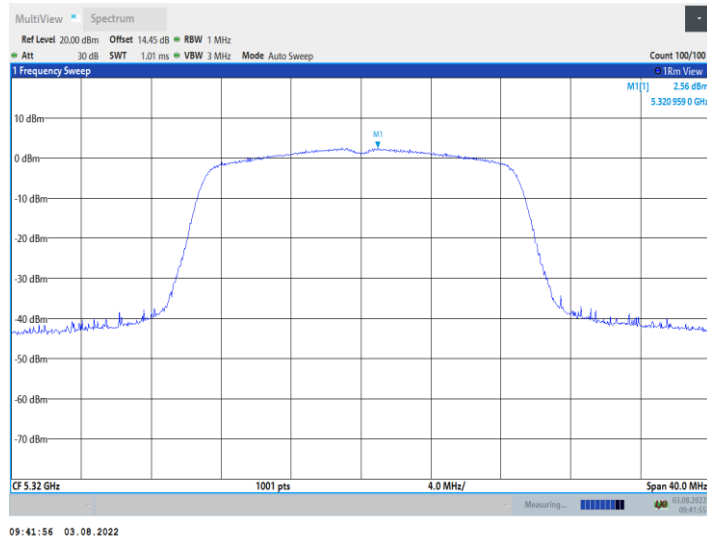


### 11N20SISO\_Ant1\_5500

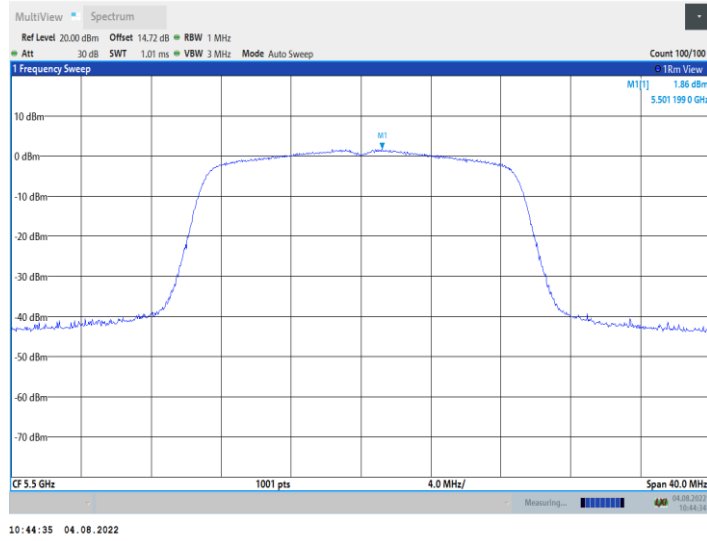


### 11N20SISO\_Ant1\_5600

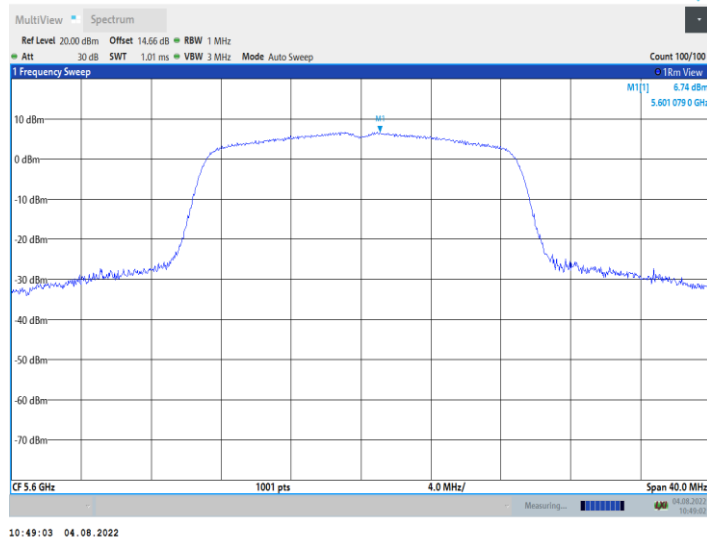


### 11N20SISO\_Ant1\_5700

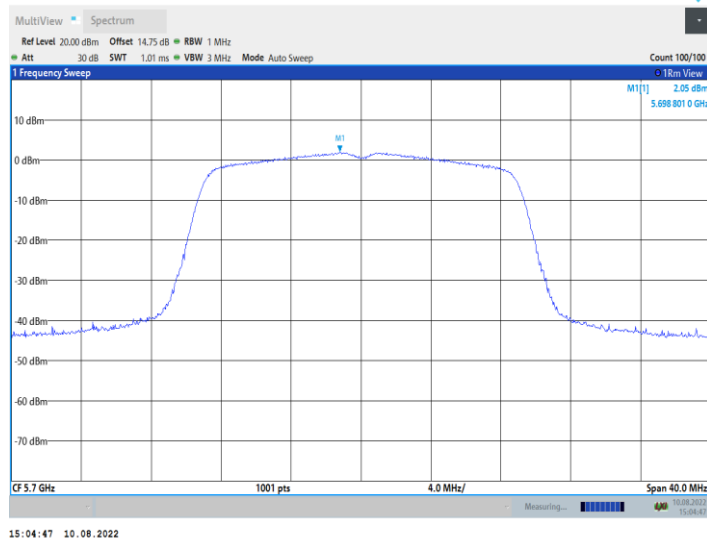


11N20SISO\_Ant1\_5745

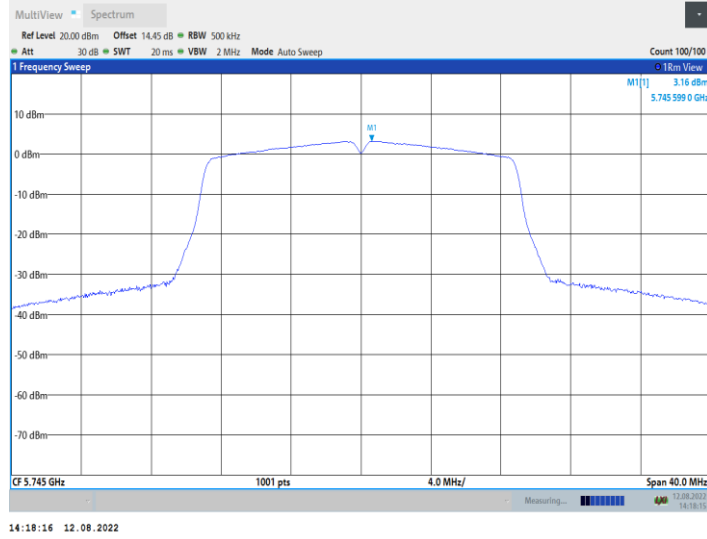


11N20SISO\_Ant1\_5785

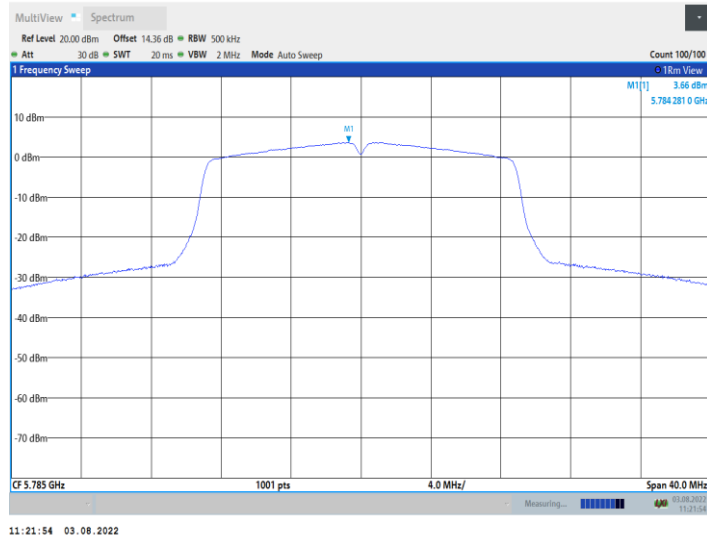


11N20SISO\_Ant1\_5825

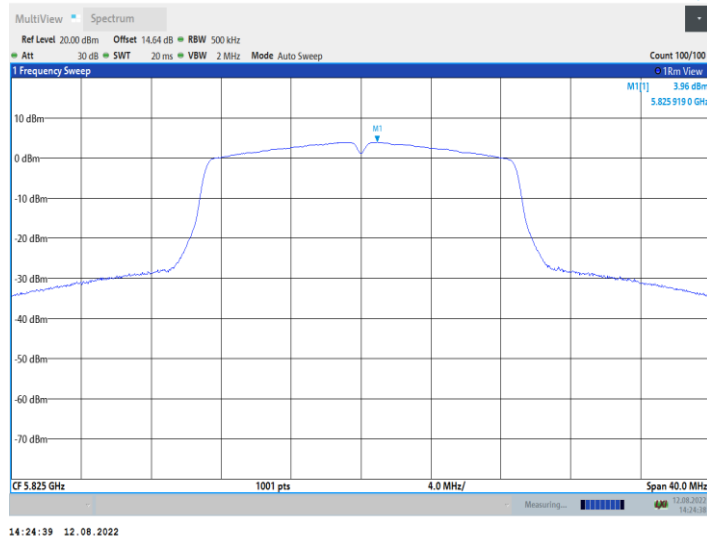


### 11N40SISO\_Ant1\_5190

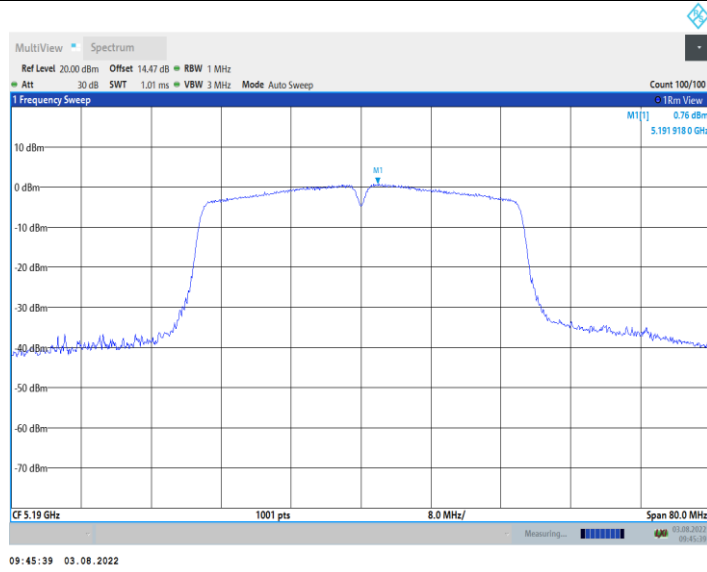

### 11N40SISO\_Ant1\_5230

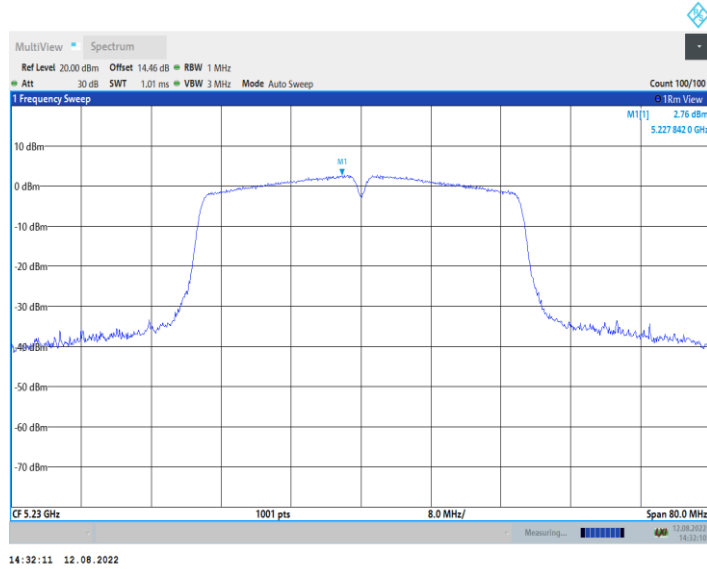


### 11N40SISO\_Ant1\_5270

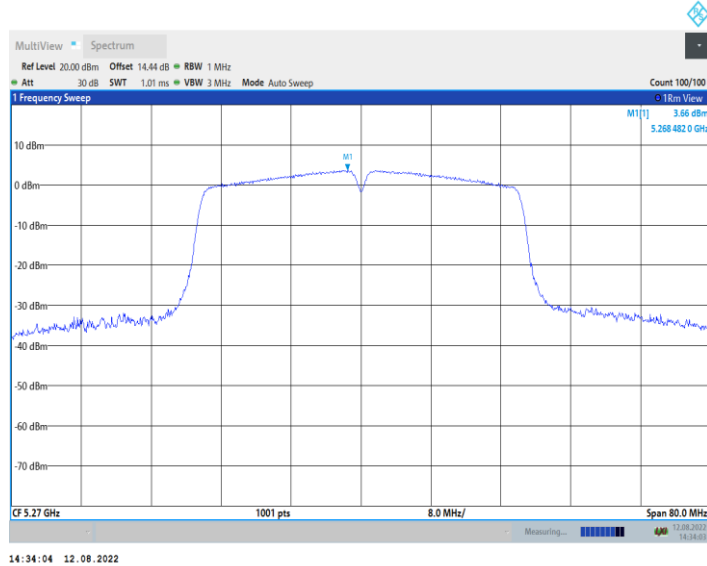





### 11N40SISO\_Ant1\_5310

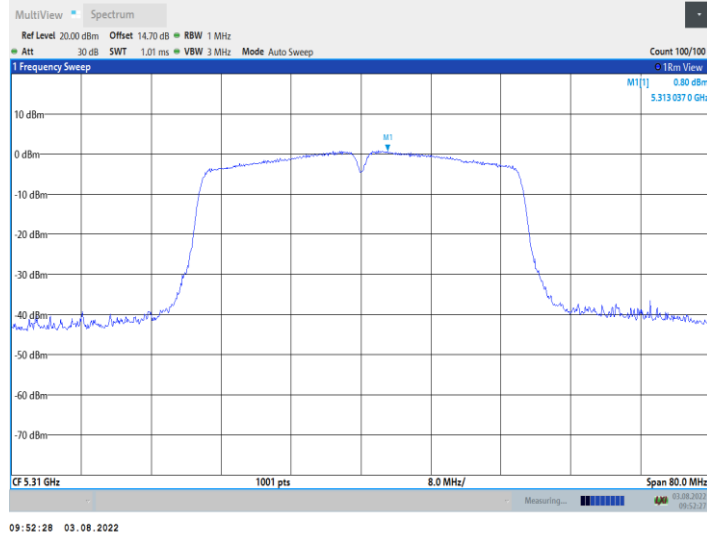


### 11N40SISO\_Ant1\_5510

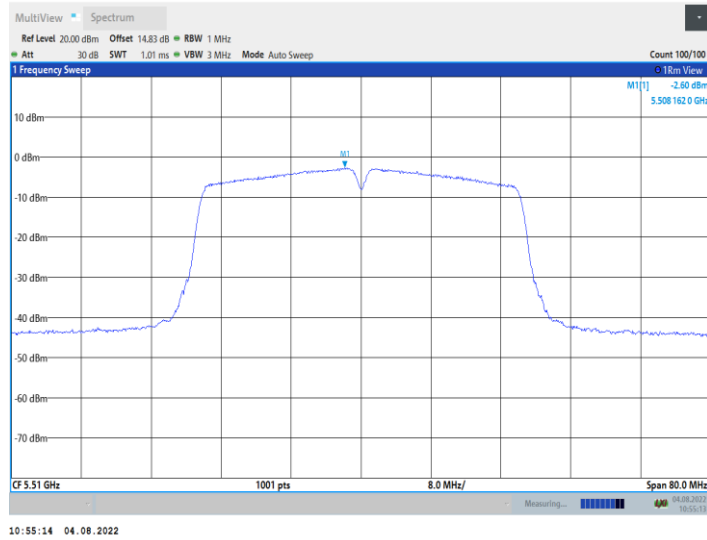


### 11N40SISO\_Ant1\_5590

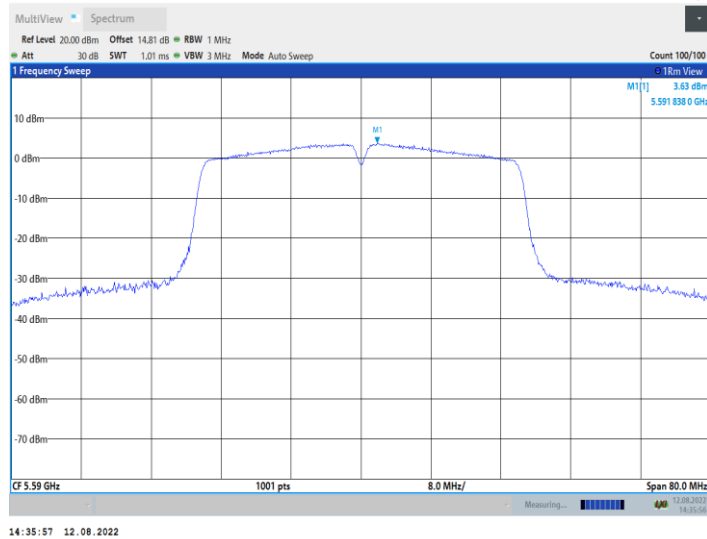


### 11N40SISO\_Ant1\_5670

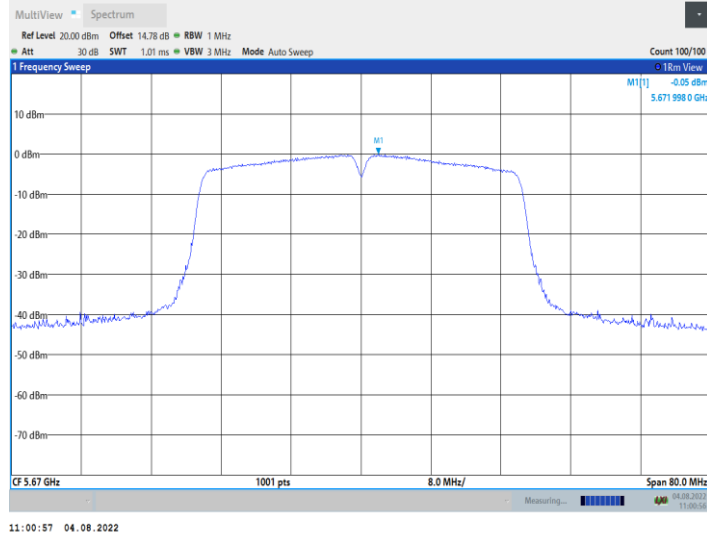


### 11N40SISO\_Ant1\_5755

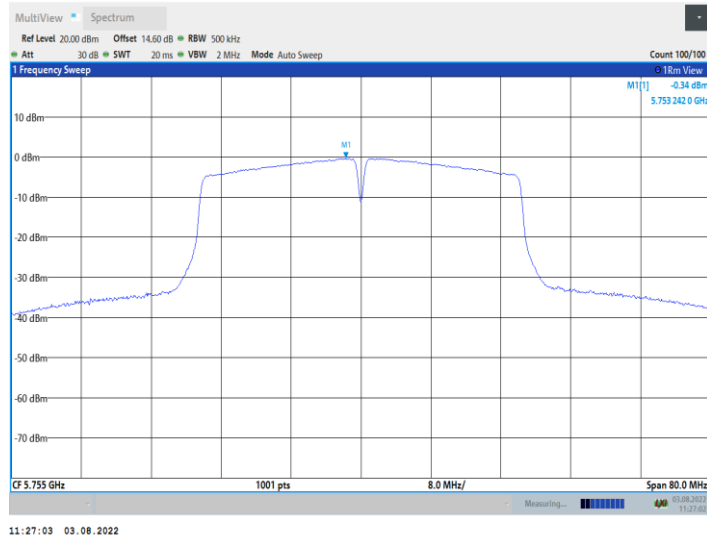


### 11N40SISO\_Ant1\_5795

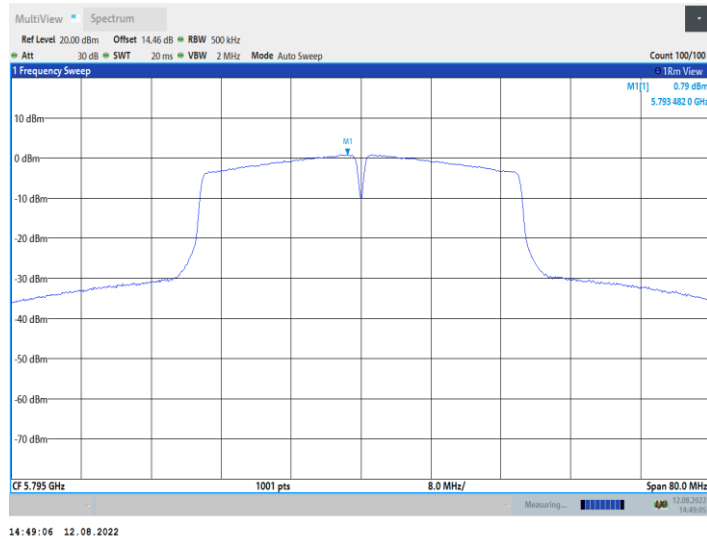


### 11AC20SISO\_Ant1\_5180

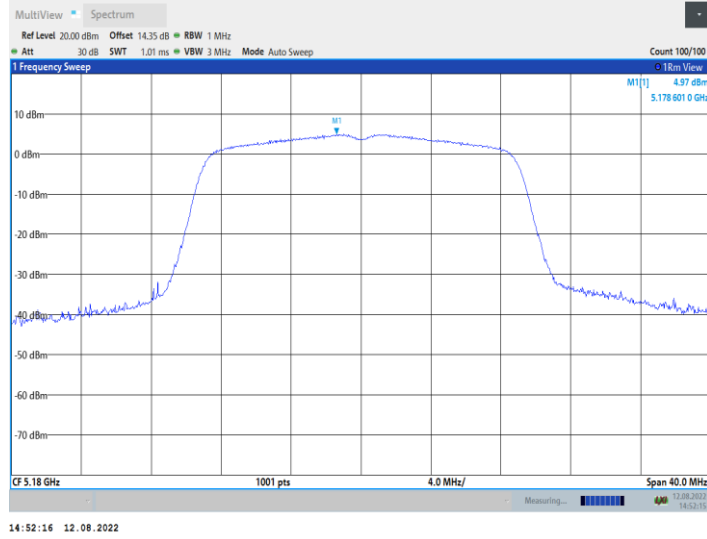


### 11AC20SISO\_Ant1\_5200

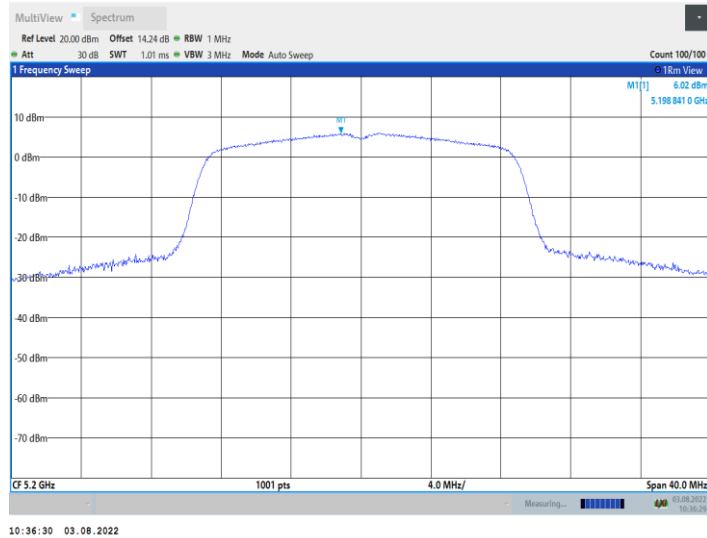


### 11AC20SISO\_Ant1\_5240

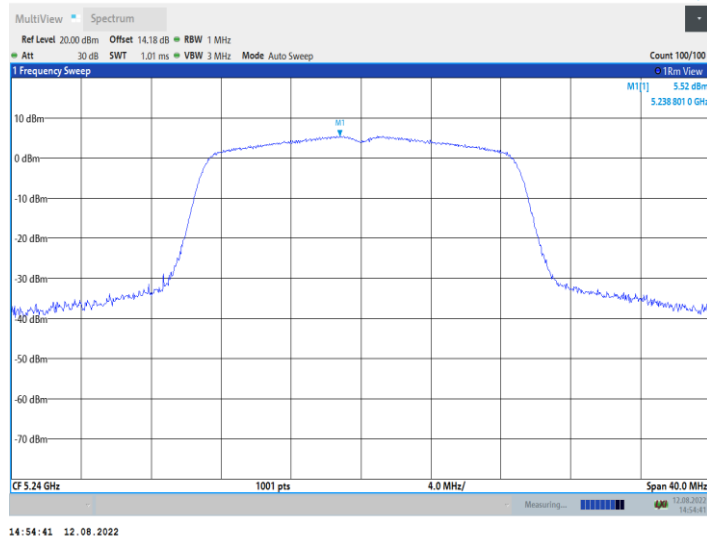


11AC20SISO\_Ant1\_5260

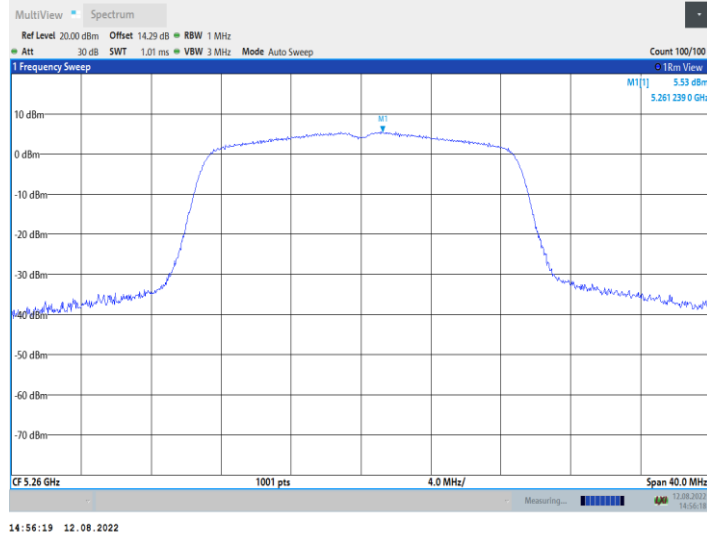


11AC20SISO\_Ant1\_5280

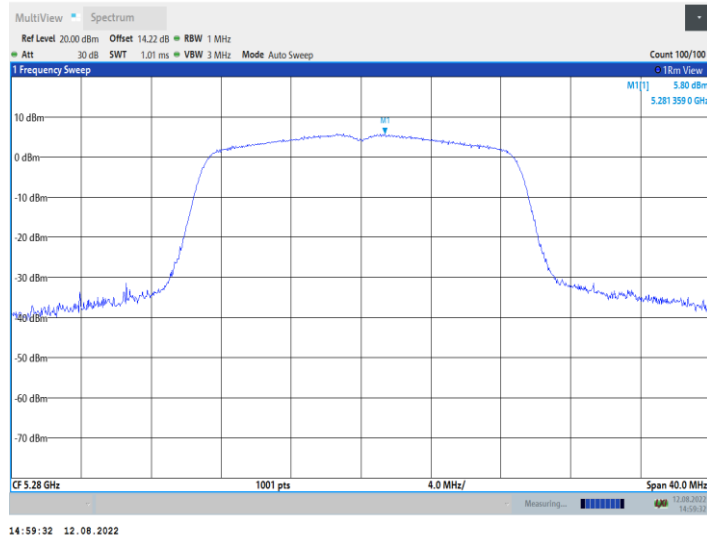


11AC20SISO\_Ant1\_5320

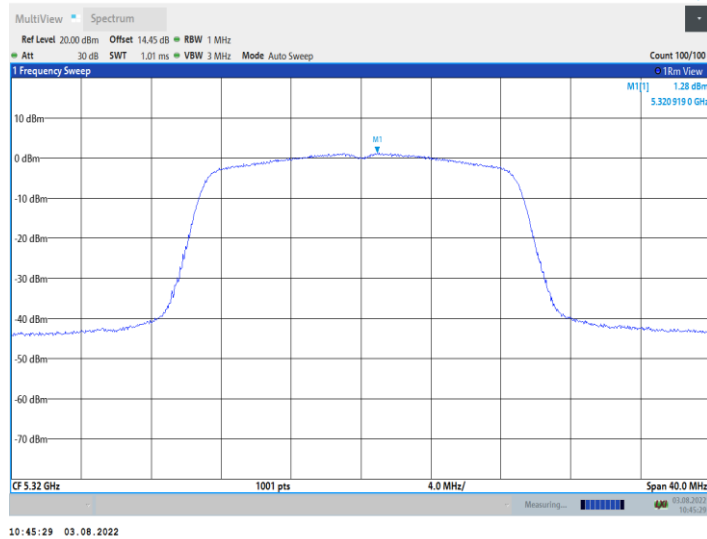


### 11AC20SISO\_Ant1\_5500

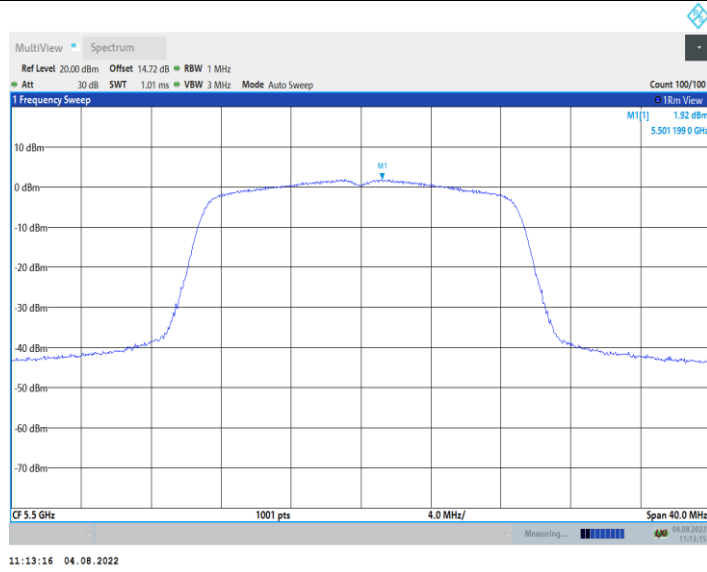


### 11AC20SISO\_Ant1\_5600

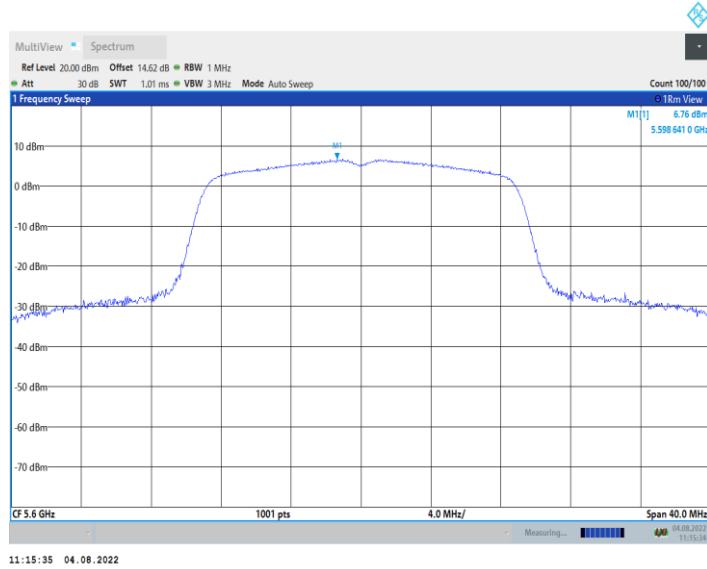


### 11AC20SISO\_Ant1\_5700

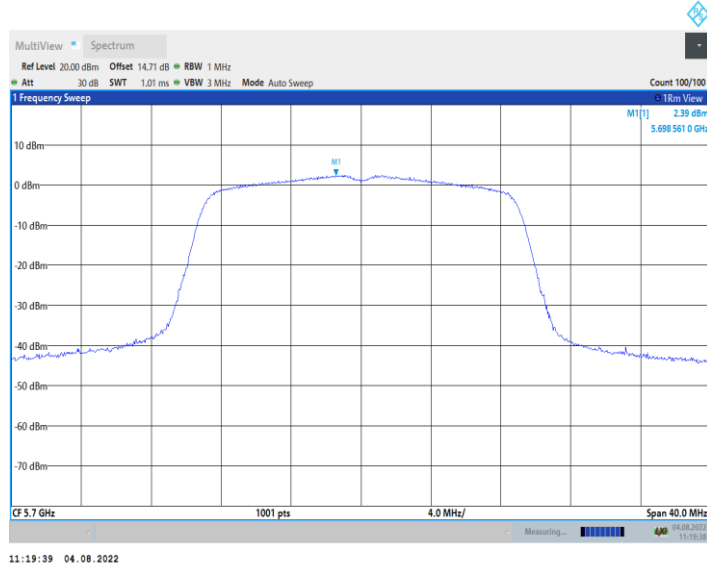


11AC20SISO\_Ant1\_5745

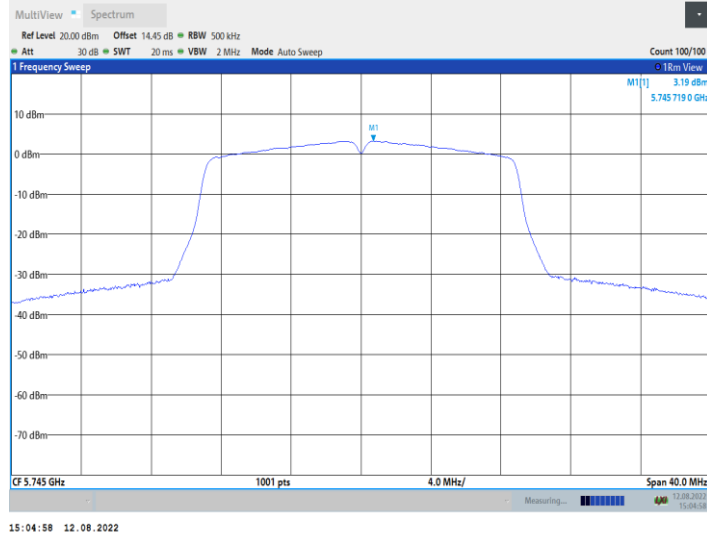


11AC20SISO\_Ant1\_5785

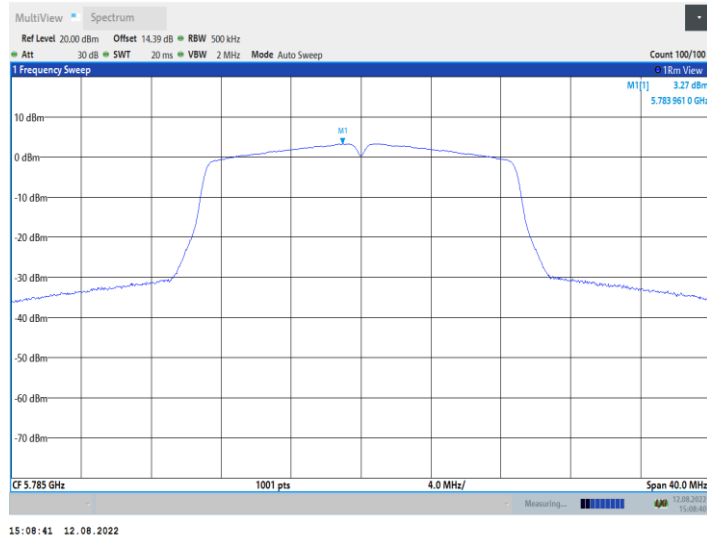


11AC20SISO\_Ant1\_5825

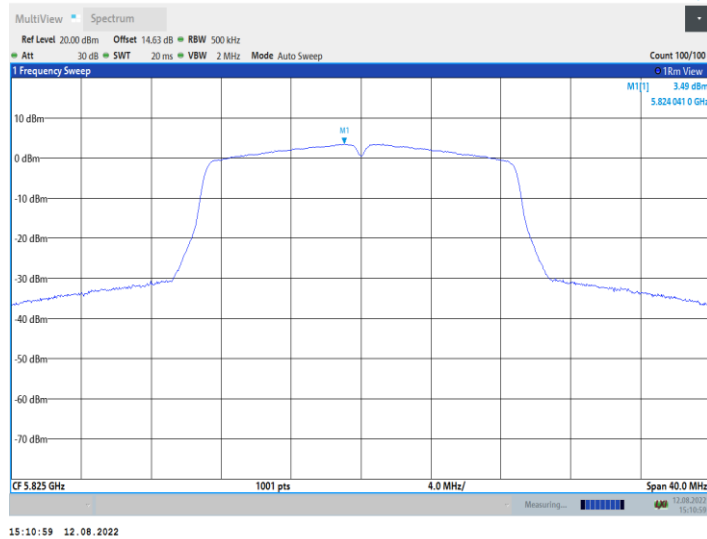

11AC40SISO\_Ant1\_5190

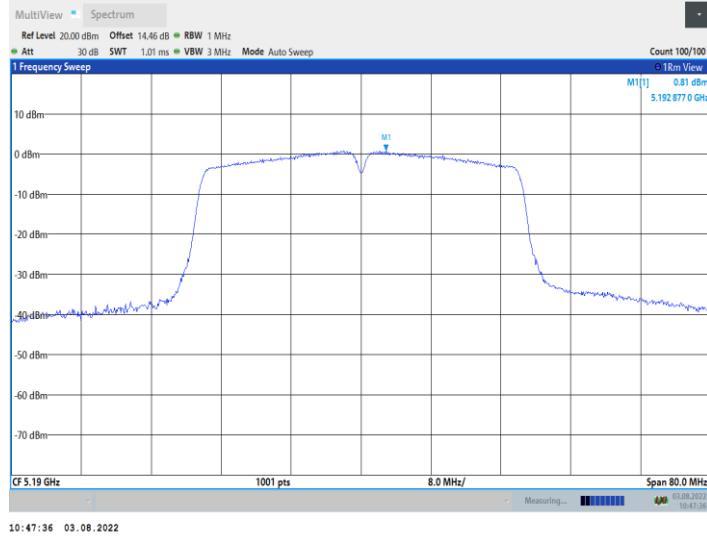

11AC40SISO\_Ant1\_5230

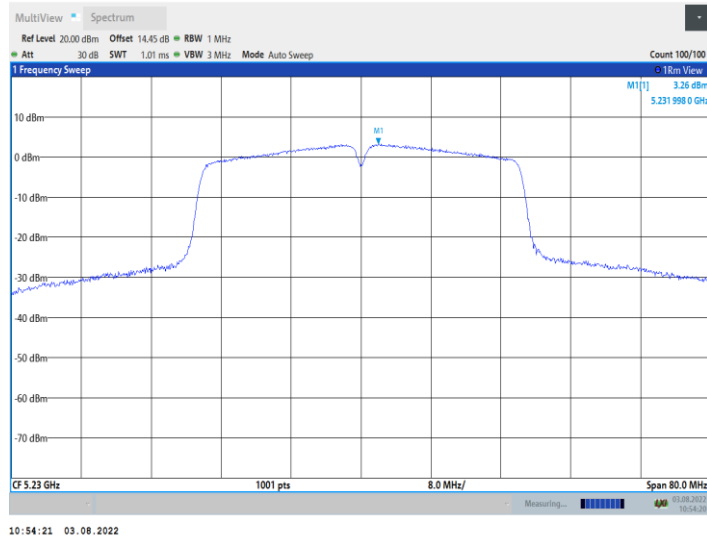

11AC40SISO\_Ant1\_5270

