





Jumping Sumo: 3D radiation pattern

3D radiation pattern: measurement Setup



- The measurement was made at Parrot radio test laboratory, with Diarray3D system
- The antennas were connected to a CW signal generator: signal level @2.4GHz=5dBm; @5GHz=10dBm
- Angular resolution is : 10°
- Measurement uncertainty : ± 1 dB

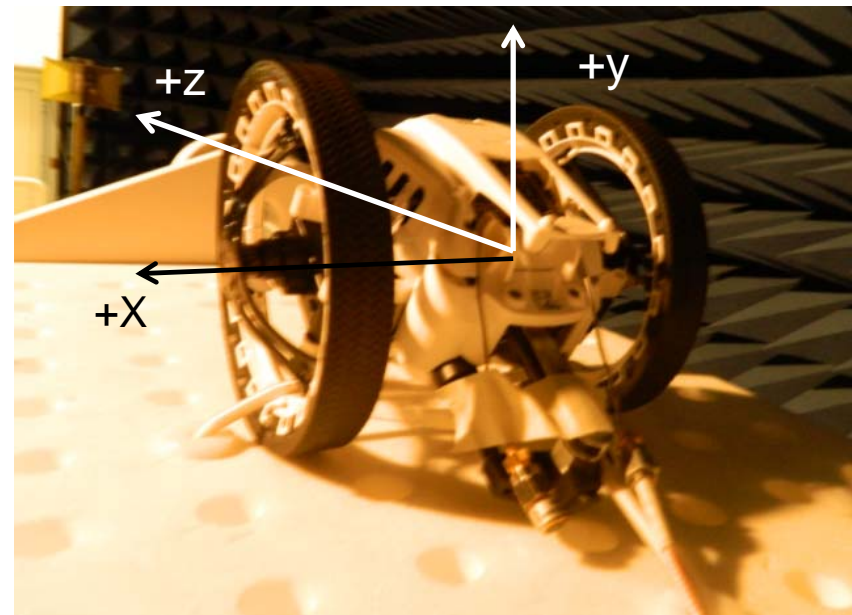
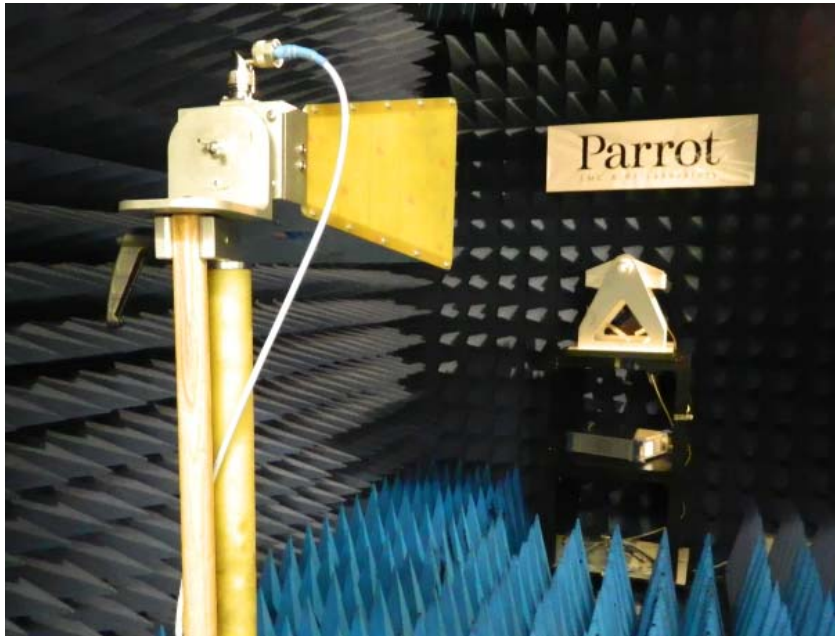


3D radiation pattern: measured antennas



- ❑ Jumping Sumo is integrating 2 Wifi Dual-band antennas

Dual band antennas

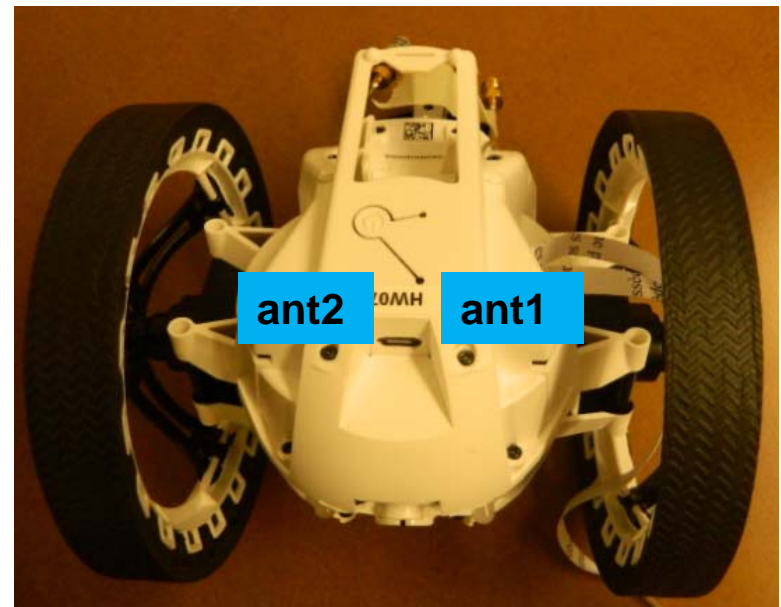
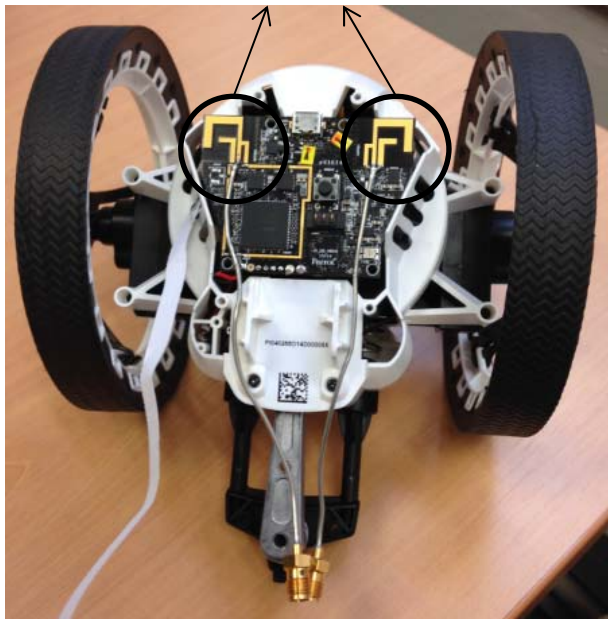


- Antennas dimensions: 12mmx10mm
- Distance between antennas: 33mm
- Space and radiation pattern diversity

Antenna 1: 3D radiation pattern @2440MHz





Max gain @2440MHz= **1.34dBi**
Min gain @2440MHz= -24.8dBi
Mean gain @2440MHz = -4.9dBi

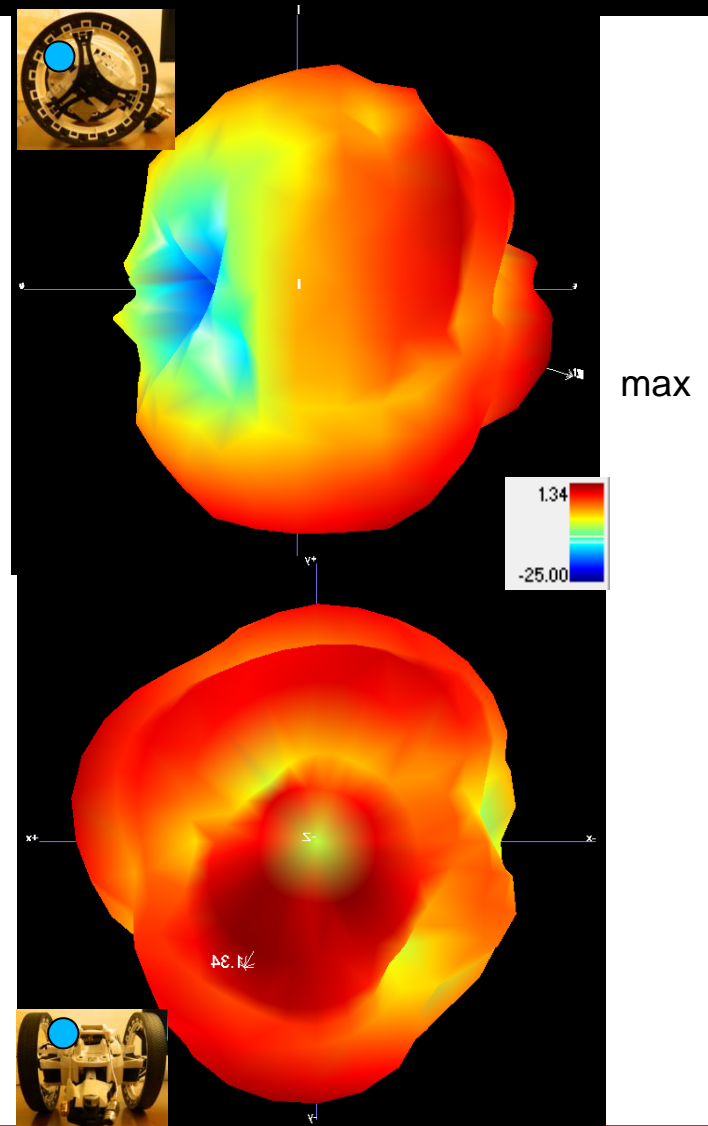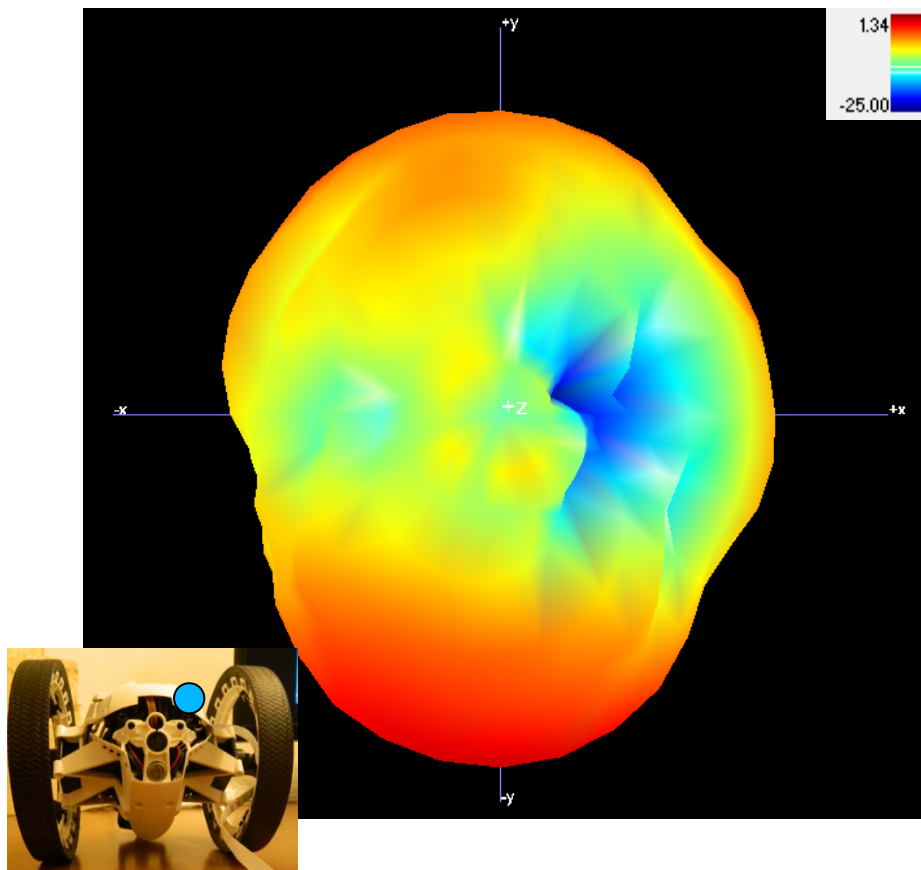

Antenna 1: 3D radiation pattern @5500MHz



Max gain @5500MHz = **2.67dBi**
Min gain @5500MHz = -12.7dBi
Mean gain @5500MHz = -3.92dBi

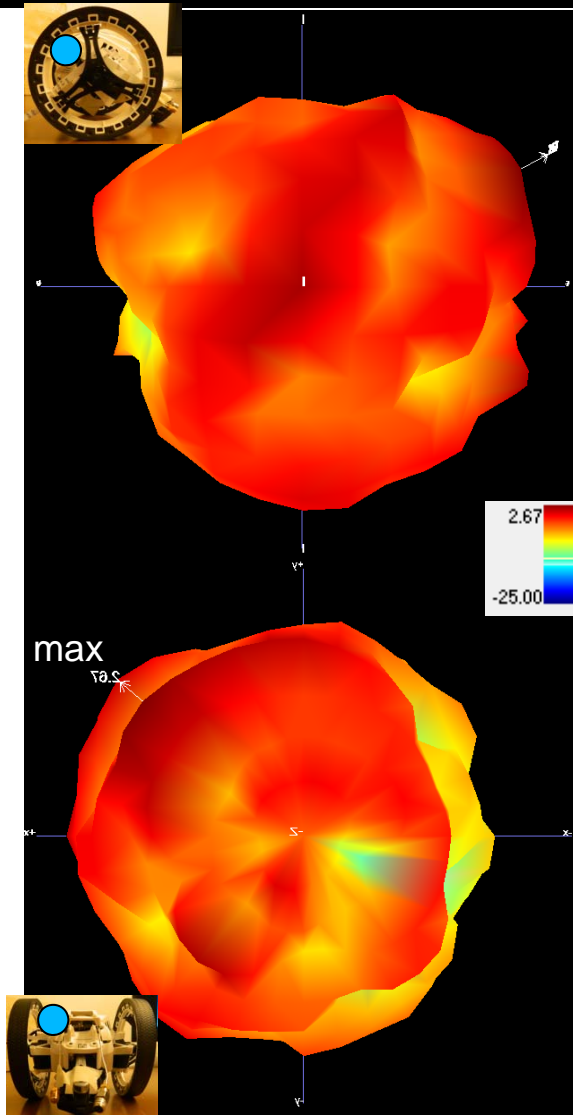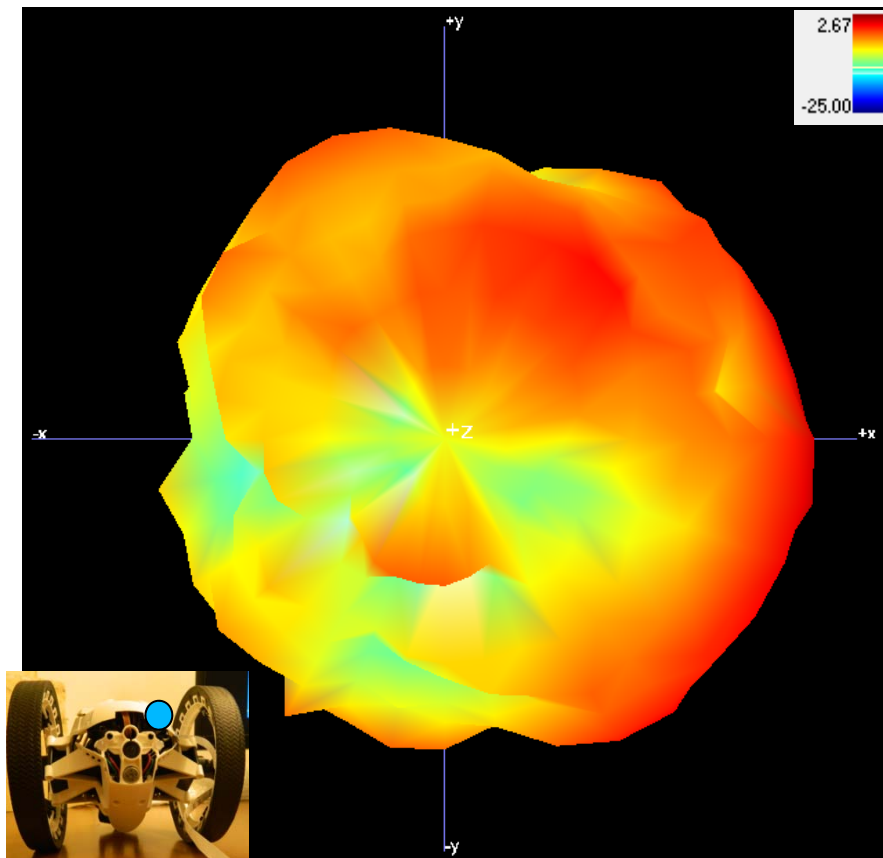


Antenna 1: max gain VS frequency





2.4GHz band

Max gain

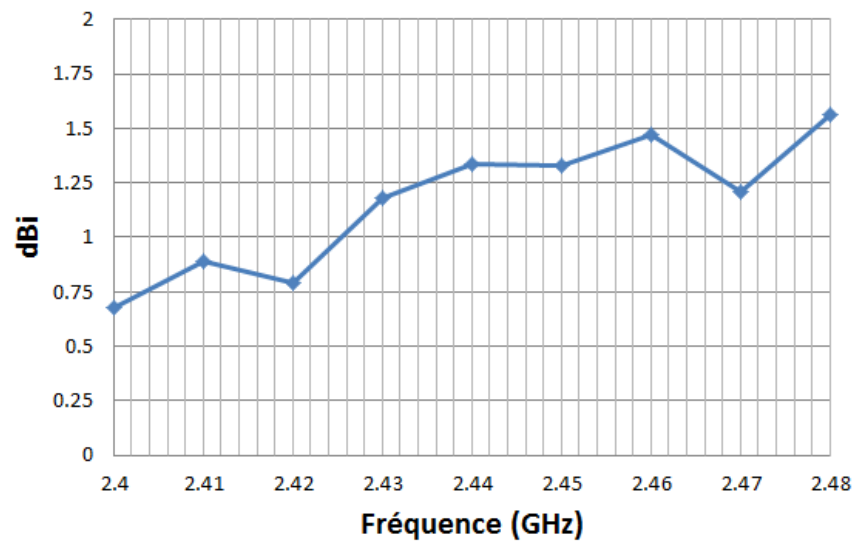

5GHz band



Max gain

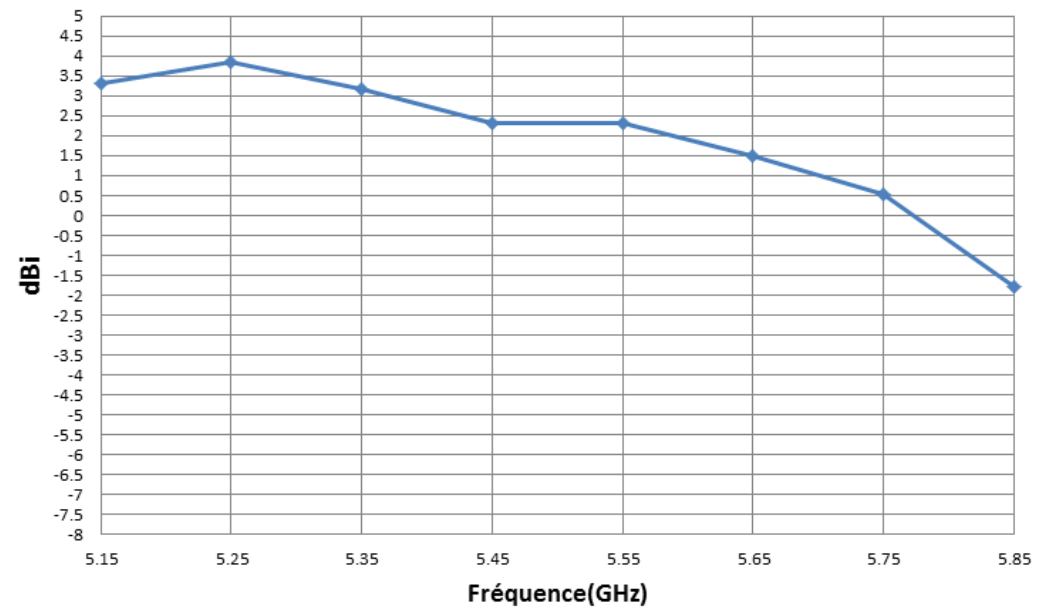

Antenna 2: 3D radiation pattern @2440MHz





Max gain @2440MHz = **2.72dBi**
Min gain @2440MHz = -17.7dBi
Mean gain @2440MHz = -4.94dBi

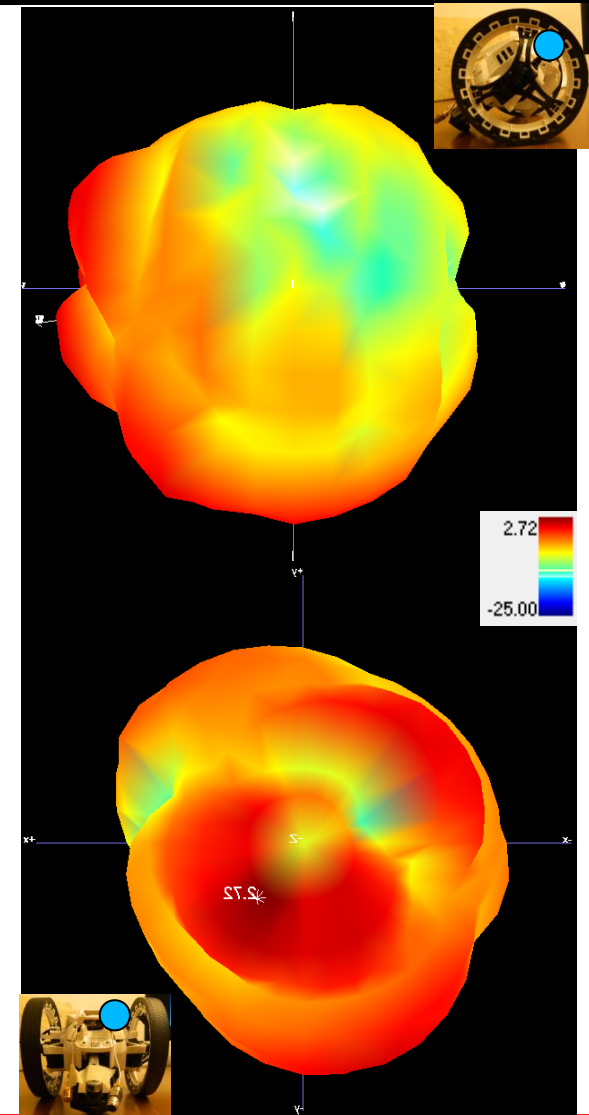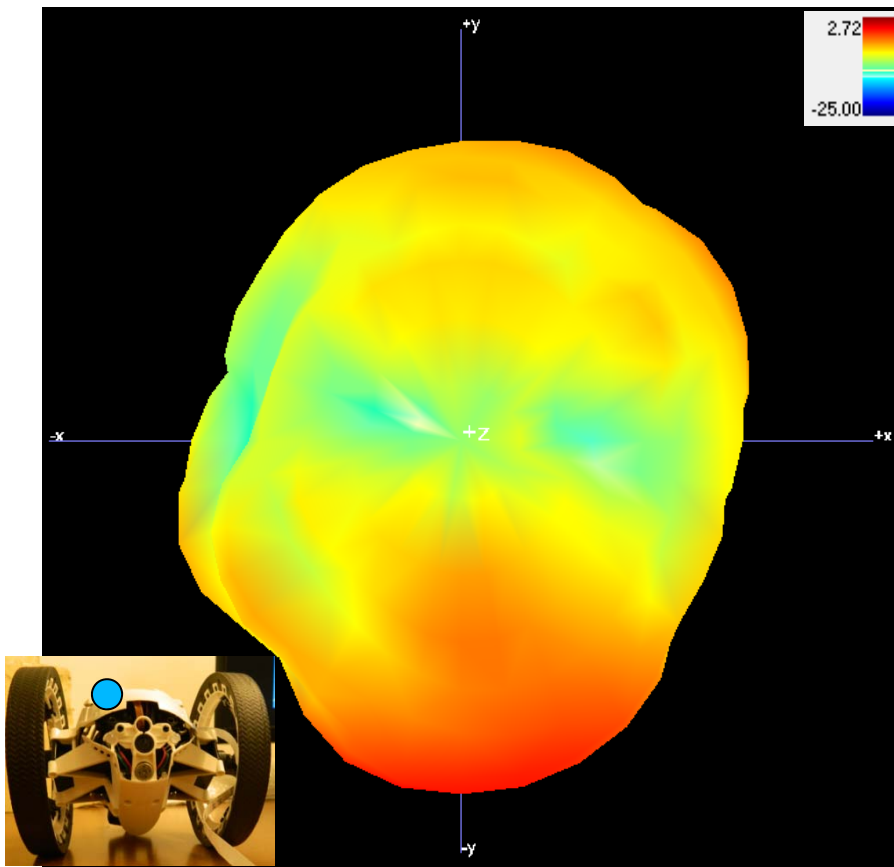

Antenna 2: 3D radiation pattern @5500MHz




Max gain @5500MHz = **3.29dBi**
Min gain @5500MHz = -15.9dBi
Mean gain @5500MHz = -3.43dBi

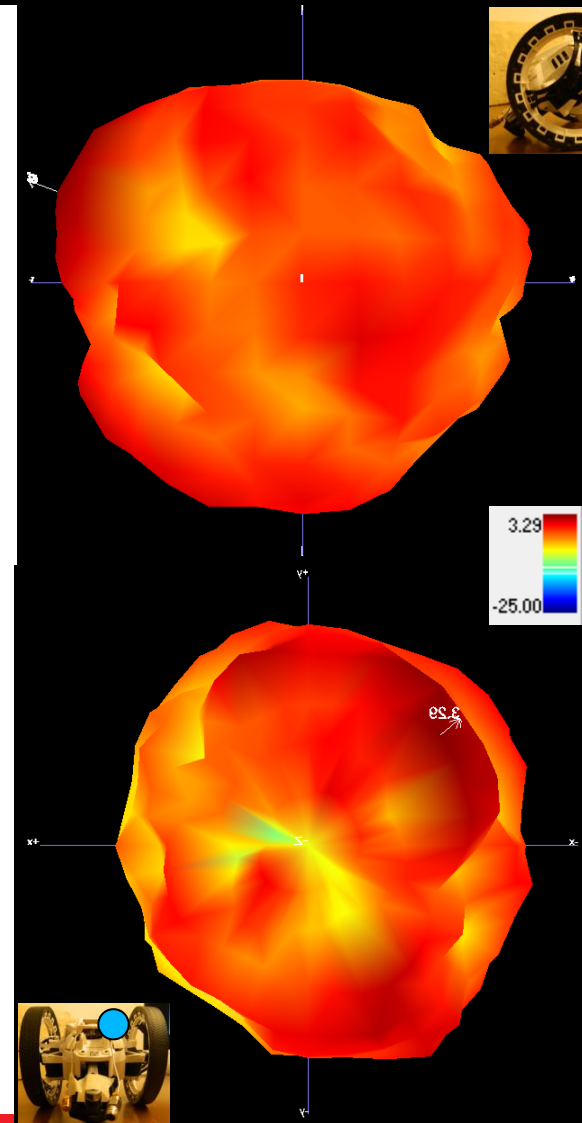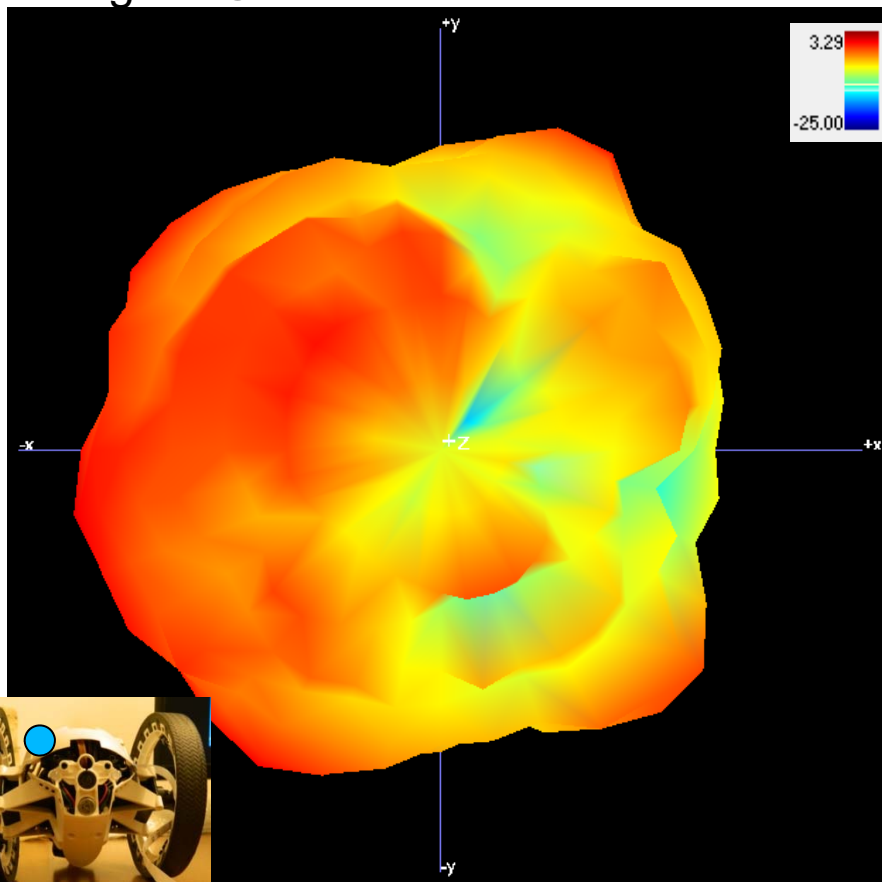



Antenna 2: max gain VS frequency



2.4GHz band

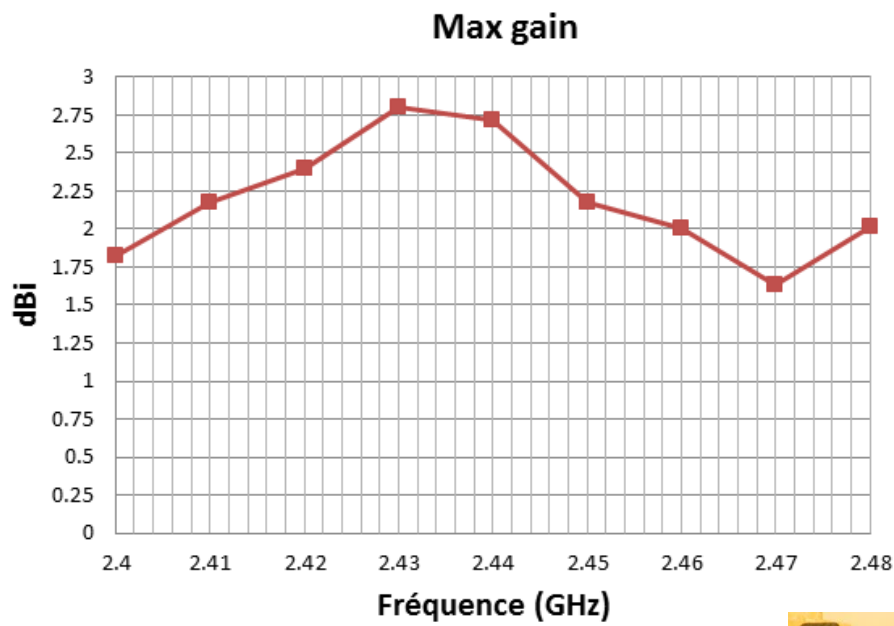

5GHz band

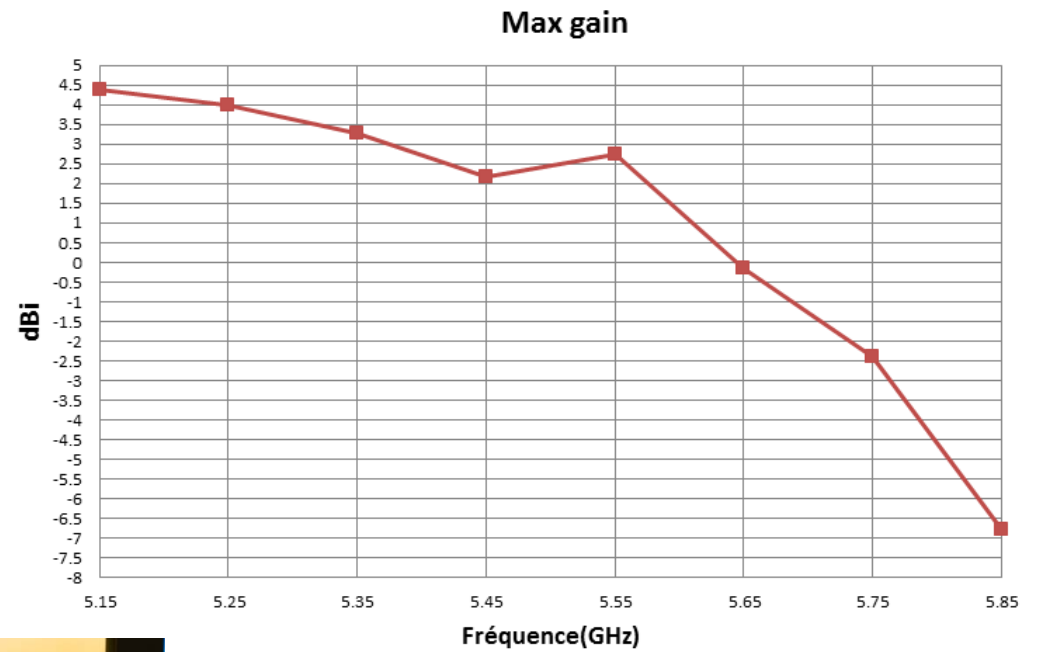



www.parrot.com

PARROT S.A.
174, quai de Jemmapes
F-75010 Paris
T: +33 1 48 03 60 60