

TEST REPORT

Applicant: TONGFA TOYS FACTORY

Address of Applicant: CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, China

Manufacturer: TONGFA TOYS FACTORY

Address of Manufacturer: CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, China

Equipment Under Test (EUT)

Product Name: Remote control series

Model No.: See section 5.1

FCC ID: 2A252FC2005C1

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: March 02, 2023

Date of Test: March 03-23, 2023

Date of report issued: March 23, 2023

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above

Authorized Signature:



The stamp is a red circular seal. The outer ring contains the text 'Global United Technology Services Co., Ltd.' in English and '深圳市环球众一科技有限公司' in Chinese. The inner part of the seal features a red star and the text '检验检测专用章' (Inspection and Testing Special Seal) and 'Inspection/Testing Services'.

Robinson Luo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	March 23, 2023	Original

Prepared By:




Date:

March 23, 2023

Project Engineer

Check By:



Date:

March 23, 2023

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	7
5.7 TEST LOCATION	7
5.8 ADDITIONAL INSTRUCTIONS.....	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT	10
7.2 RADIATED EMISSION METHOD	11
7.2.1 Field Strength of The Fundamental Signal	13
7.2.2 Spurious emissions.....	14
7.2.3 Bandedge emissions.....	26
7.3 20dB OCCUPY BANDWIDTH	30
8 TEST SETUP PHOTO	32
9 EUT CONSTRUCTIONAL DETAILS	32

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	N/A
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Remarks:

1. Test according to ANSI C63.10:2013.
2. Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Remote control series
Model No.:	FC-2005C-1, FC-2001A, FC-2001B, FC-2001C, FC-2001AB, FC-2002A, FC-2002B, FC-2002C, FC-2002AB, FC-2003A, FC-2003B, FC-2003C, FC-2003AB, FC-2004A, FC-2005A, FC-2005B, FC-2005C, FC-2005AB, FC-2005AC, FC-2005BC, FC-2006A, FC-2007A, FC-2007B, FC-2007AB, FC-2007AL, FC-2007BL, FC-2007ABL, FC-2009A, FC-2008A, FC-2010A, FC-2011A, FC-2001A-1, FC-2001B-1, FC-2001C-1, FC-2001AB-1, FC-2002A-1, FC-2002B-1, FC-2002C-1, FC-2002AB-1, FC-2003A-1, FC-2003B-1, FC-2003C-1, FC-2003AB-1, FC-2004A-1, FC-2005A-1, FC-2005B-1, FC-2005AB-1, FC-2005AC-1, FC-2005BC-1, FC-2006A-1, FC-2007A-1, FC-2007B-1, FC-2007AB-1, FC-2007AL-1, FC-2007BL-1, FC-2007ABL-1, FC-2009A-1, FC-2008A-1, FC-2010A-1, FC-2011A-1, FC-2004B, FC-2004B-1, FC-2001D, FC-2001D-1, ODY-1029
Test Model No.:	FC-2005C-1
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Serial No.:	N/A
Test sample(s) ID:	GTS2023030019-1
Sample(s) Status	Engineered sample
Operation Frequency:	2410MHz~2460MHz
Channel numbers:	51
Modulation type:	GFSK
Antenna Type:	Integrate antenna
Antenna gain:	0.17dBi(Declared by applicant)
Power supply:	TX: DC 3.0V (2*1.5V Size "AA" Battery)

Note: The report is only for TX device

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2410	14	2423	27	2436	40	2449
2	2411	15	2424	28	2437	41	2450
3	2412	16	2425	29	2438	42	2451
4	2413	17	2426	30	2439	43	2452
5	2414	18	2427	31	2440	44	2453
6	2415	19	2428	32	2441	45	2454
7	2416	20	2429	33	2442	46	2455
8	2417	21	2430	34	2443	47	2456
9	2418	22	2431	35	2444	48	2457
10	2419	23	2432	36	2445	49	2458
11	2420	24	2433	37	2446	50	2459
12	2421	25	2434	38	2447	51	2460
13	2422	26	2435	39	2448		

The test frequencies are below:

Channel	Frequency
The lowest channel	2410MHz
The middle channel	2435MHz
The Highest channel	2460MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: New battery is used during all test.	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	86.51	87.41	85.36

5.3 Description of Support Units

None.

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC—Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. ● IC —Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).
--

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 02, 2020	July 01, 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 22, 2022	April 21, 2023
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 20, 2023	March 19, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June 12, 2022	June 11, 2023
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 23, 2022	June 22, 2023
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	April 22, 2022	April 21, 2023
9	Coaxial Cable	GTS	N/A	GTS211	April 22, 2022	April 21, 2023
10	Coaxial cable	GTS	N/A	GTS210	April 22, 2022	April 21, 2023
11	Coaxial Cable	GTS	N/A	GTS212	April 22, 2022	April 21, 2023
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	April 22, 2022	April 21, 2023
13	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 23, 2022	June 22, 2023
14	Band filter	Amindeon	82346	GTS219	June 23, 2022	June 22, 2023
15	Power Meter	Anritsu	ML2495A	GTS540	June 23, 2022	June 22, 2023
16	Power Sensor	Anritsu	MA2411B	GTS541	June 23, 2022	June 22, 2023
17	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 22, 2022	April 21, 2023
18	Splitter	Agilent	11636B	GTS237	June 23, 2022	June 22, 2023
19	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 29, 2022	Nov. 28, 2023
20	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 22, 2022	April 21, 2023
21	Breitband hornantenna	SCHWARZBECK	BBHA 9170	GTS579	Oct. 16, 2022	Oct. 15, 2023
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 16, 2022	Oct. 15, 2023
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 16, 2022	Oct. 15, 2023
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June 23, 2022	June 22, 2023
25	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 22, 2022	April 21, 2023

RF Conducted Test:

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 22, 2022	April 21, 2023
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 22, 2022	April 21, 2023
3	Spectrum Analyzer	Agilent	E4440A	GTS536	April 22, 2022	April 21, 2023
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 22, 2022	April 21, 2023
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 22, 2022	April 21, 2023
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 22, 2022	April 21, 2023
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 22, 2022	April 21, 2023
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 22, 2022	April 21, 2023

General used equipment:


Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	April 25, 2022	April 24, 2023
2	Barometer	KUMAO	SF132	GTS647	July 26, 2022	July 25, 2023



7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is integrate antenna, reference to the appendix II for details.	

7.2 Radiated Emission Method

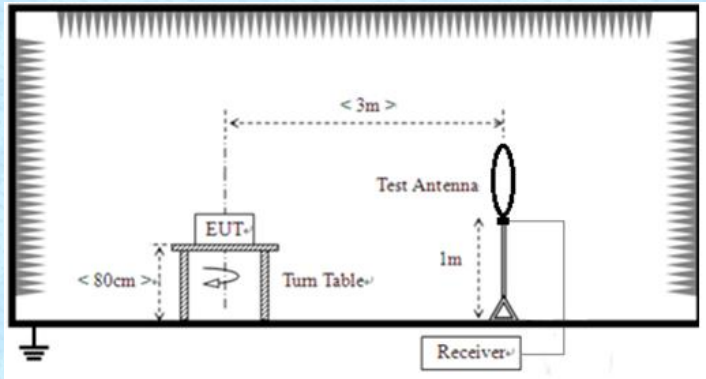Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)		Remark
	0.009MHz-0.490MHz		2400/F(kHz) @300m		Quasi-peak Value
	0.490MHz-1.705MHz		24000/F(kHz) @30m		Quasi-peak Value
	1.705MHz-30.0MHz		30 @30m		Quasi-peak Value
	30MHz-88MHz		100 @3m		Quasi-peak Value
	88MHz-216MHz		150 @3m		Quasi-peak Value
	216MHz-960MHz		200 @3m		Quasi-peak Value
	960MHz-1GHz		500 @3m		Quasi-peak Value
	Above 1GHz		500 @3m		Average Value
			5000 @3m	Peak Value	
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	For radiated emissions from 9kHz to 30MHz  For radiated emissions from 30MHz to1GHz				

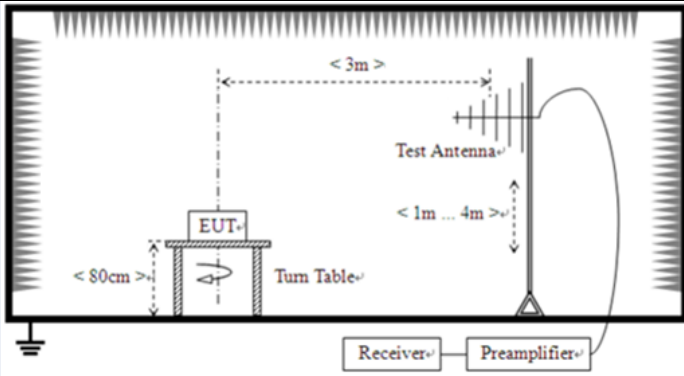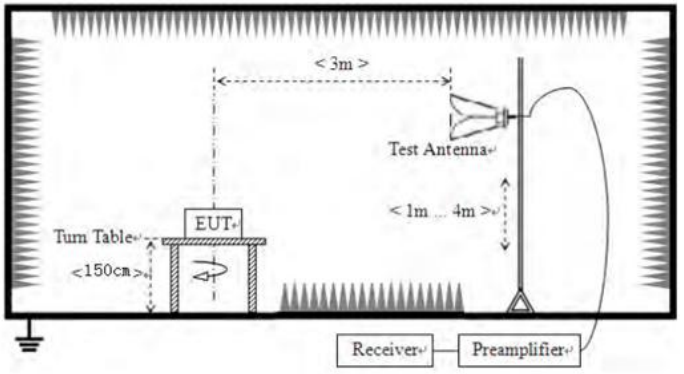	 For radiated emissions above 1GHz 	Report No.: CP02000000101-01				
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	DC 3.0V					
Test results:	Pass					

Measurement data:

7.2.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2410.00	92.44	27.43	2.93	38.88	83.92	114.00	-30.08	Vertical
2410.00	90.59	27.43	2.93	38.88	82.07	114.00	-31.93	Horizontal
2435.00	94.26	27.55	2.96	38.98	85.79	114.00	-28.21	Vertical
2435.00	95.88	27.55	2.96	38.98	87.41	114.00	-26.59	Horizontal
2460.00	93.72	27.64	2.99	39.05	85.30	114.00	-28.70	Vertical
2460.00	94.87	27.64	2.99	39.05	86.45	114.00	-27.55	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2410.00	83.13	27.43	2.93	38.88	74.61	94.00	-19.39	Vertical
2410.00	81.69	27.43	2.93	38.88	73.17	94.00	-20.83	Horizontal
2435.00	85.46	27.55	2.96	38.98	76.99	94.00	-17.01	Vertical
2435.00	86.26	27.55	2.96	38.98	77.79	94.00	-16.21	Horizontal
2460.00	85.30	27.64	2.99	39.05	76.88	94.00	-17.12	Vertical
2460.00	86.05	27.64	2.99	39.05	77.63	94.00	-16.37	Horizontal

Note: RBW>20dB BW, VBW> RBW, PK detector is for PK value, AV detector is for AV value .


7.2.2 Spurious emissions

■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


■ Below 1GHz

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

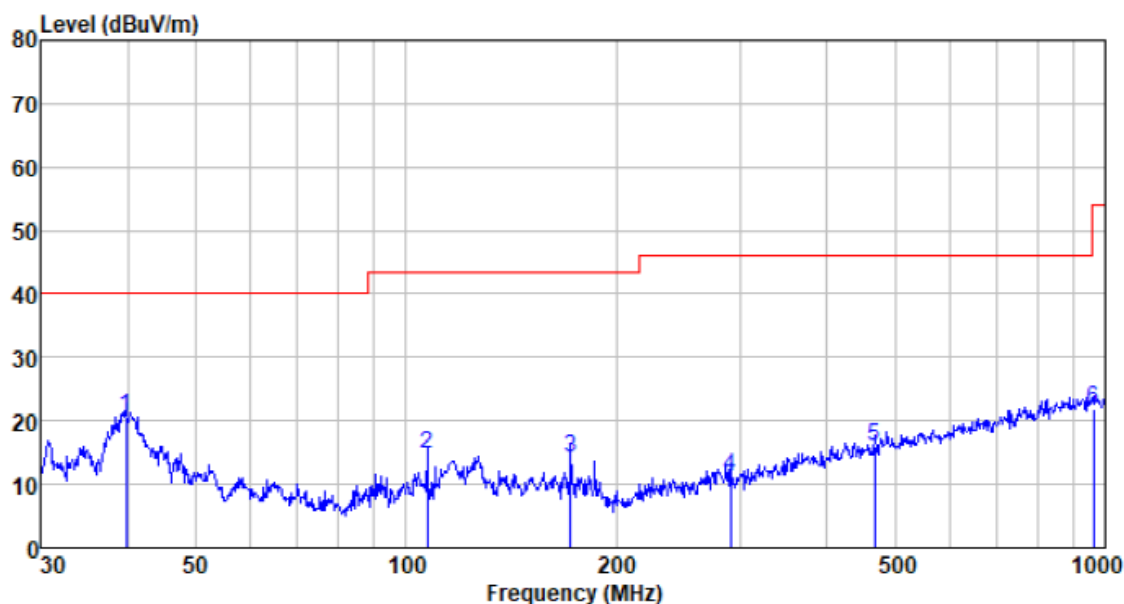


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
39.715	36.62	13.46	0.66	30.00	20.74	40.00	-19.26	QP
107.134	33.20	10.27	1.25	30.00	14.72	43.50	-28.78	QP
171.995	31.41	11.19	1.70	30.00	14.30	43.50	-29.20	QP
291.036	26.25	12.62	2.32	30.00	11.19	46.00	-34.81	QP
467.235	25.65	17.02	3.17	30.00	15.84	46.00	-30.16	QP
962.162	22.43	24.41	5.09	30.00	21.93	54.00	-32.07	QP

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

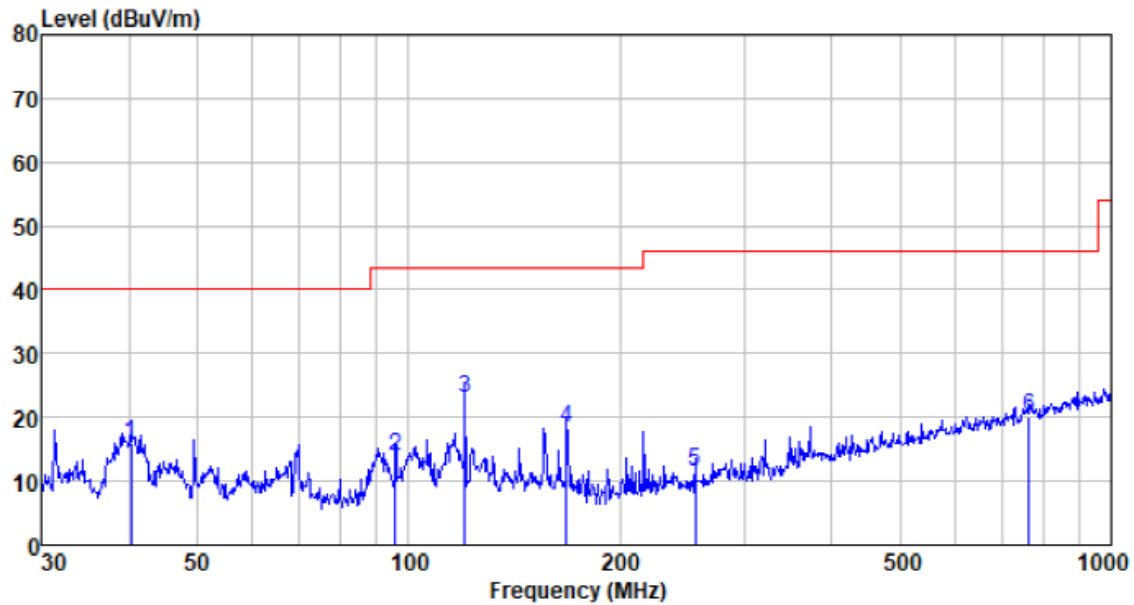


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
40.276	31.69	13.49	0.66	30.00	15.84	40.00	-24.16	QP
95.762	33.57	9.25	1.16	30.00	13.98	43.50	-29.52	QP
120.277	40.44	11.22	1.36	30.00	23.02	43.50	-20.48	QP
167.824	34.86	11.67	1.67	30.00	18.20	43.50	-25.30	QP
255.623	28.00	11.36	2.15	30.00	11.51	46.00	-34.49	QP
763.376	23.68	22.03	4.32	30.00	20.03	46.00	-25.97	QP

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

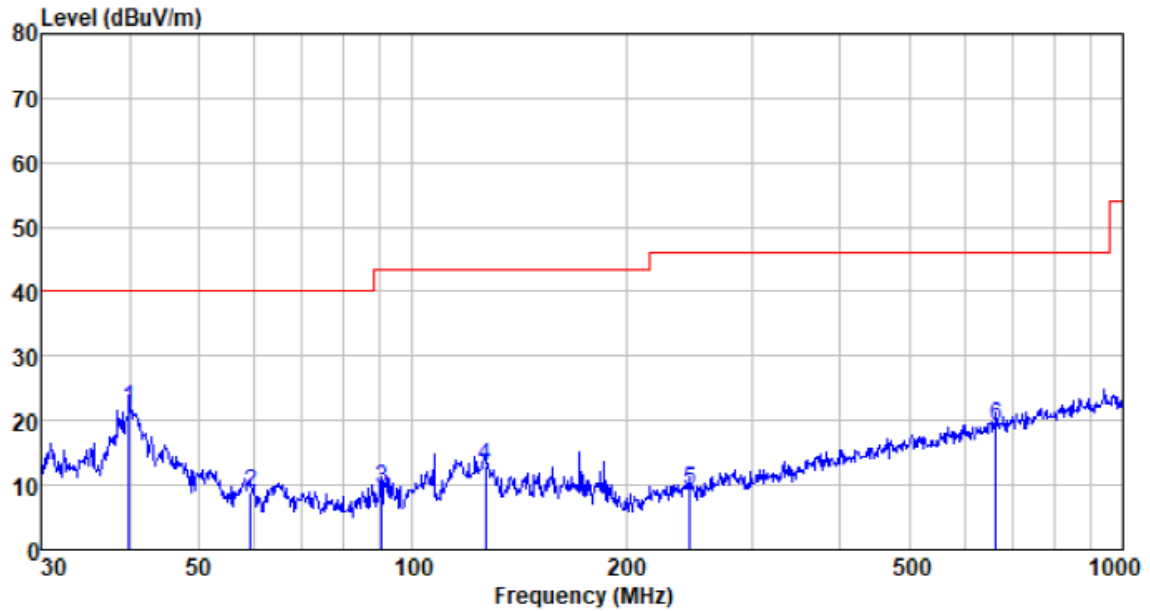


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
39.854	37.78	13.48	0.66	30.00	21.92	40.00	-18.08	QP
59.232	25.26	12.64	0.85	30.00	8.75	40.00	-31.25	QP
90.537	29.59	8.66	1.11	30.00	9.36	43.50	-34.14	QP
126.772	29.85	11.63	1.41	30.00	12.89	43.50	-30.61	QP
245.951	25.57	11.51	2.10	30.00	9.18	46.00	-36.82	QP
663.473	24.89	20.28	3.96	30.00	19.13	46.00	-26.87	QP

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

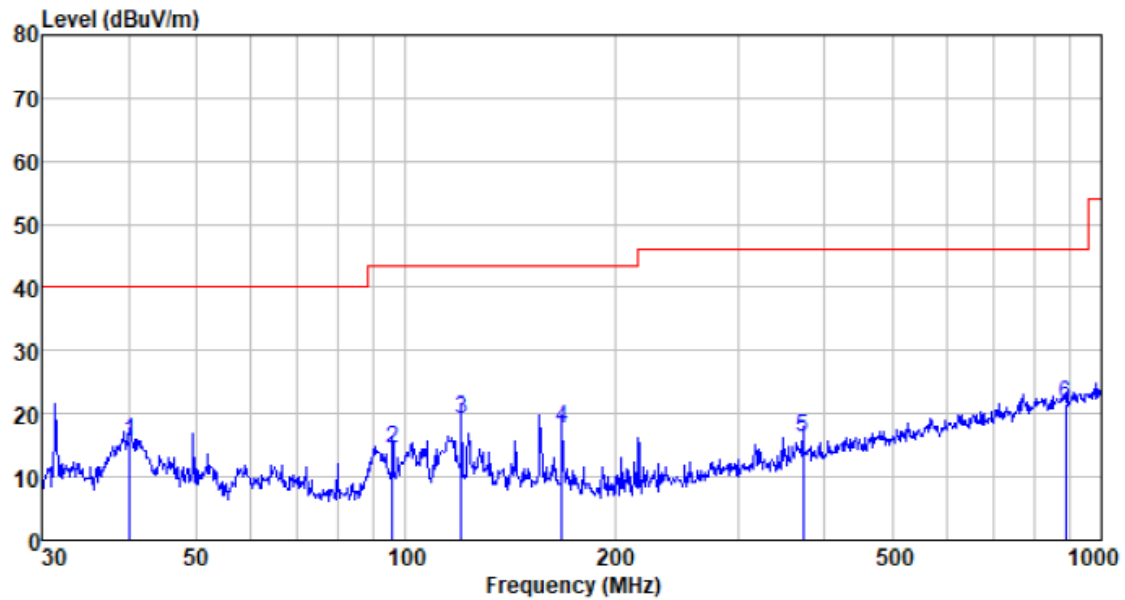


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
40.135	31.58	13.50	0.66	30.00	15.74	40.00	-24.26	QP
95.762	34.13	9.25	1.16	30.00	14.54	43.50	-28.96	QP
120.277	36.54	11.22	1.36	30.00	19.12	43.50	-24.38	QP
167.824	34.48	11.67	1.67	30.00	17.82	43.50	-25.68	QP
372.005	28.54	14.87	2.72	30.00	16.13	46.00	-29.87	QP
887.610	22.90	23.76	4.80	30.00	21.46	46.00	-24.54	QP

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

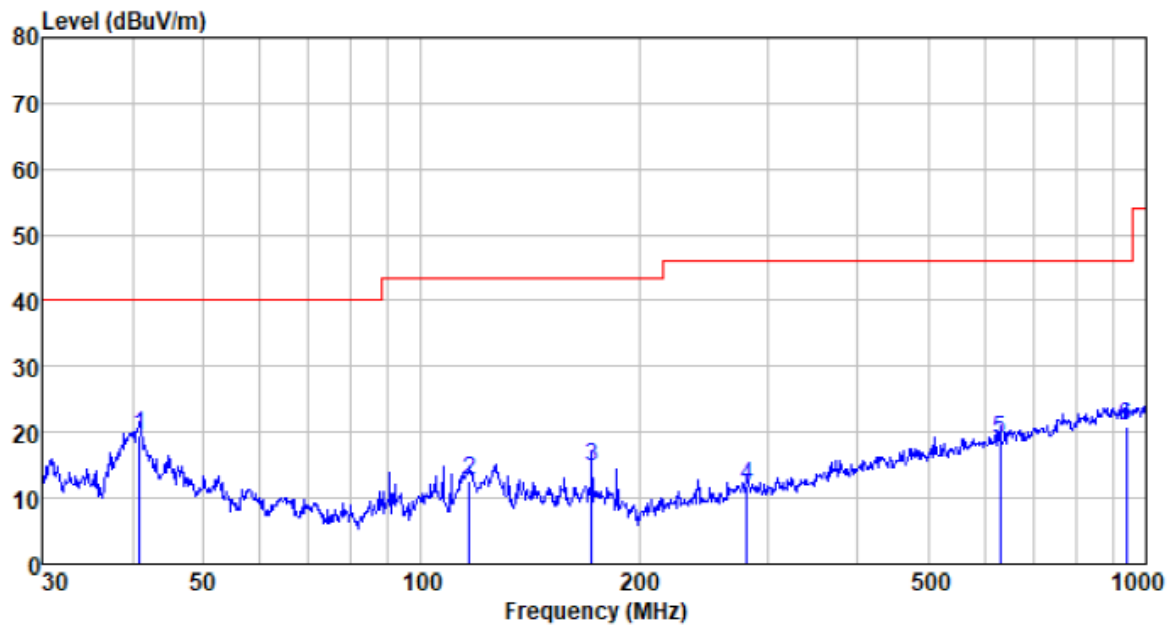

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
40.845	35.44	13.47	0.67	30.00	19.58	40.00	-20.42	QP
116.540	30.49	10.96	1.33	30.00	12.78	43.50	-30.72	QP
171.995	31.91	11.19	1.70	30.00	14.80	43.50	-28.70	QP
281.008	26.57	12.87	2.27	30.00	11.71	46.00	-34.29	QP
629.477	25.30	19.77	3.83	30.00	18.90	46.00	-27.10	QP
938.833	21.87	24.22	4.99	30.00	21.08	46.00	-24.92	QP


Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

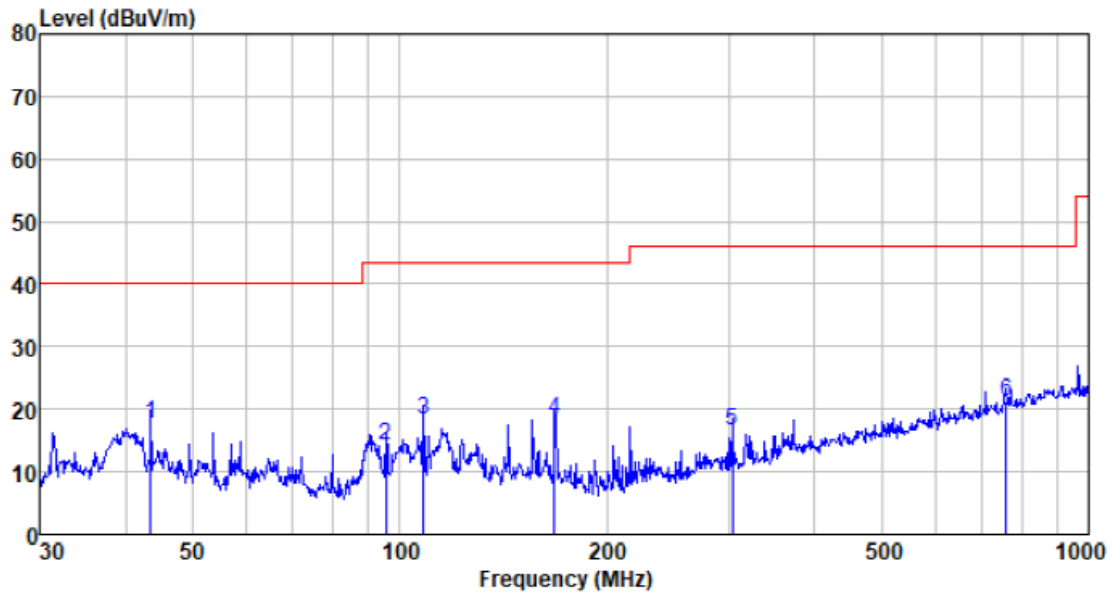

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
43.506	33.73	13.39	0.70	30.00	17.82	40.00	-22.18	QP
95.427	33.93	9.21	1.16	30.00	14.30	43.50	-29.20	QP
108.267	36.74	10.35	1.26	30.00	18.35	43.50	-25.15	QP
167.824	34.84	11.67	1.67	30.00	18.18	43.50	-25.32	QP
303.544	31.75	12.53	2.38	30.00	16.66	46.00	-29.34	QP
758.041	25.08	21.93	4.31	30.00	21.32	46.00	-24.68	QP


■ Above 1GHz

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

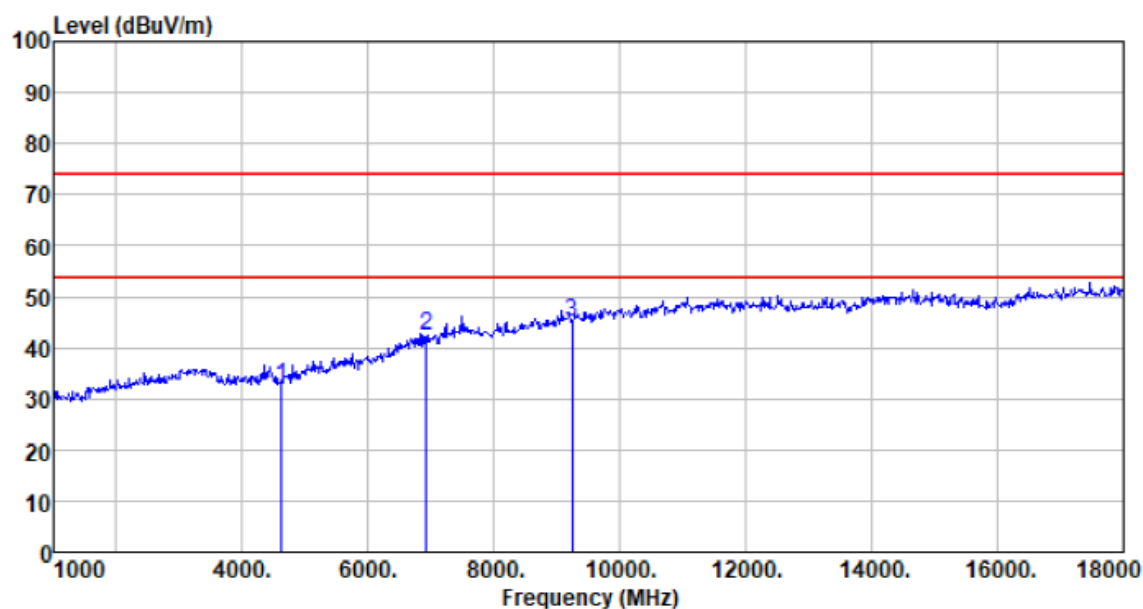


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4620.000	35.90	30.54	4.52	38.32	32.64	74.00	-41.36	Peak
6930.000	39.79	35.33	6.18	38.89	42.41	74.00	-31.59	Peak
9240.000	39.43	37.54	7.75	39.57	45.15	74.00	-28.85	Peak

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

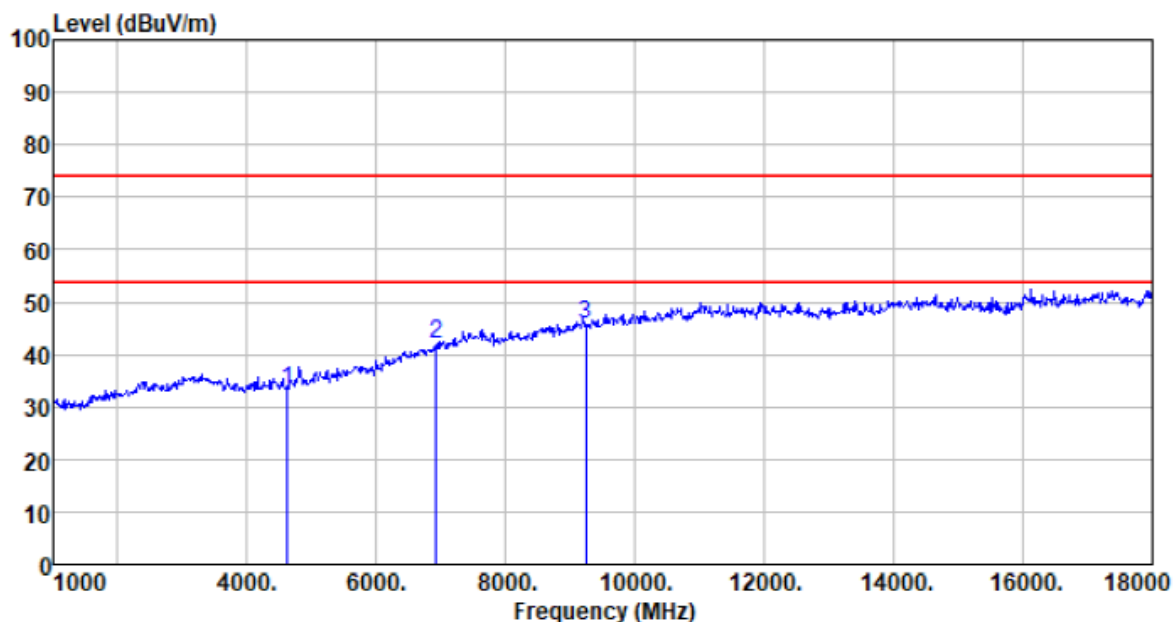


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4620.000	36.46	30.54	4.52	38.32	33.20	74.00	-40.80	Peak
6930.000	39.27	35.33	6.18	38.89	41.89	74.00	-32.11	Peak
9240.000	39.89	37.54	7.75	39.57	45.61	74.00	-28.39	Peak

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

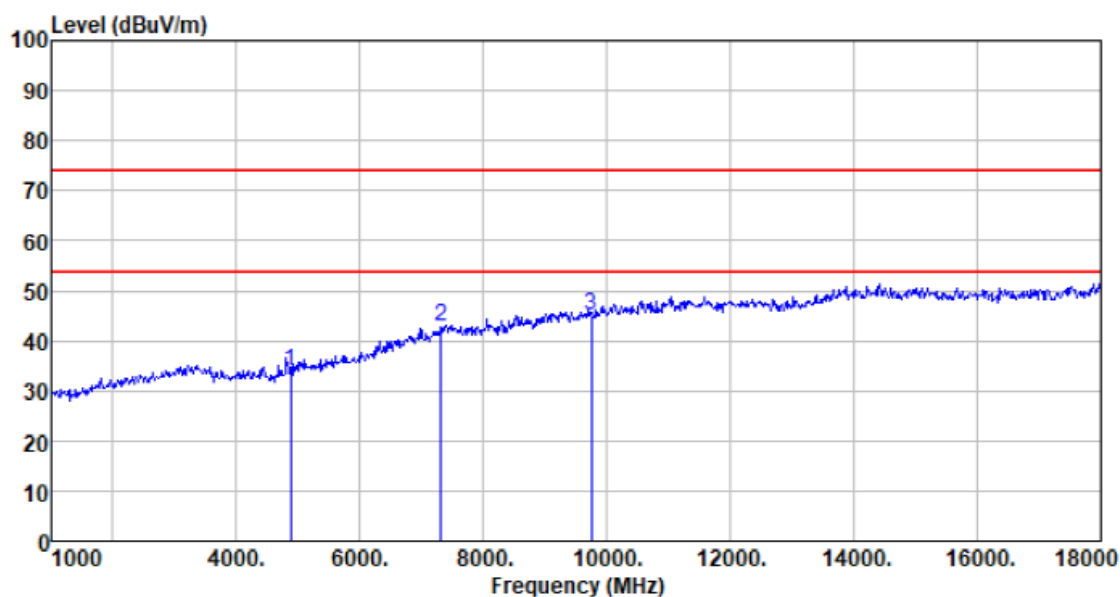


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4870.000	36.26	31.24	4.69	38.37	33.82	74.00	-40.18	Peak
7305.000	38.99	36.11	6.61	38.99	42.72	74.00	-31.28	Peak
9740.000	38.73	38.04	8.02	39.72	45.07	74.00	-28.93	Peak

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

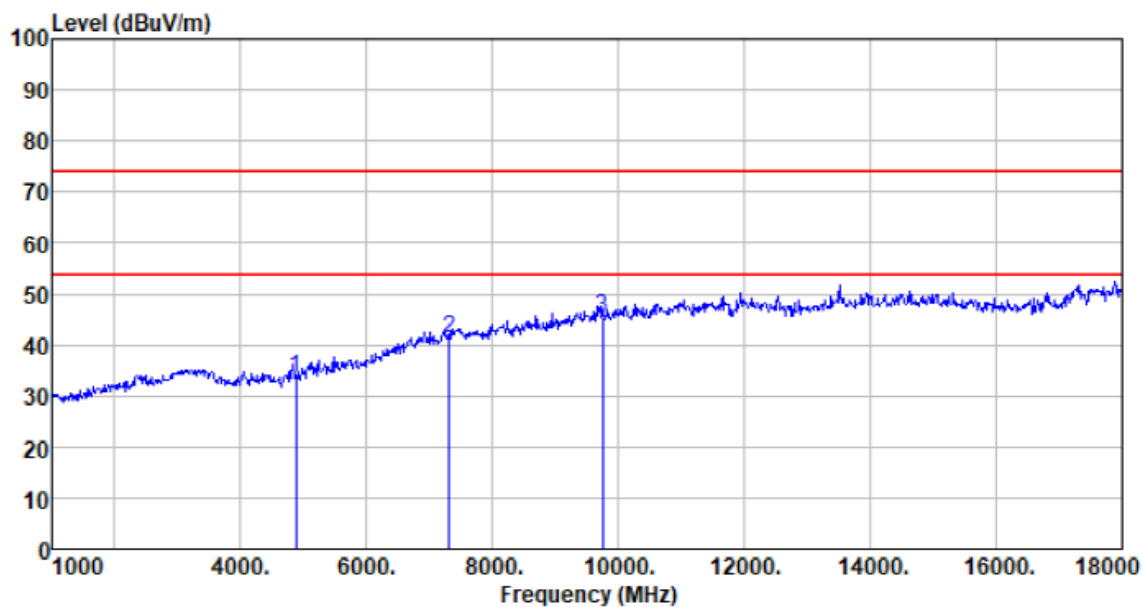


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4870.000	36.11	31.24	4.69	38.37	33.67	74.00	-40.33	Peak
7305.000	37.46	36.11	6.61	38.99	41.19	74.00	-32.81	Peak
9740.000	38.91	38.04	8.02	39.72	45.25	74.00	-28.75	Peak

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

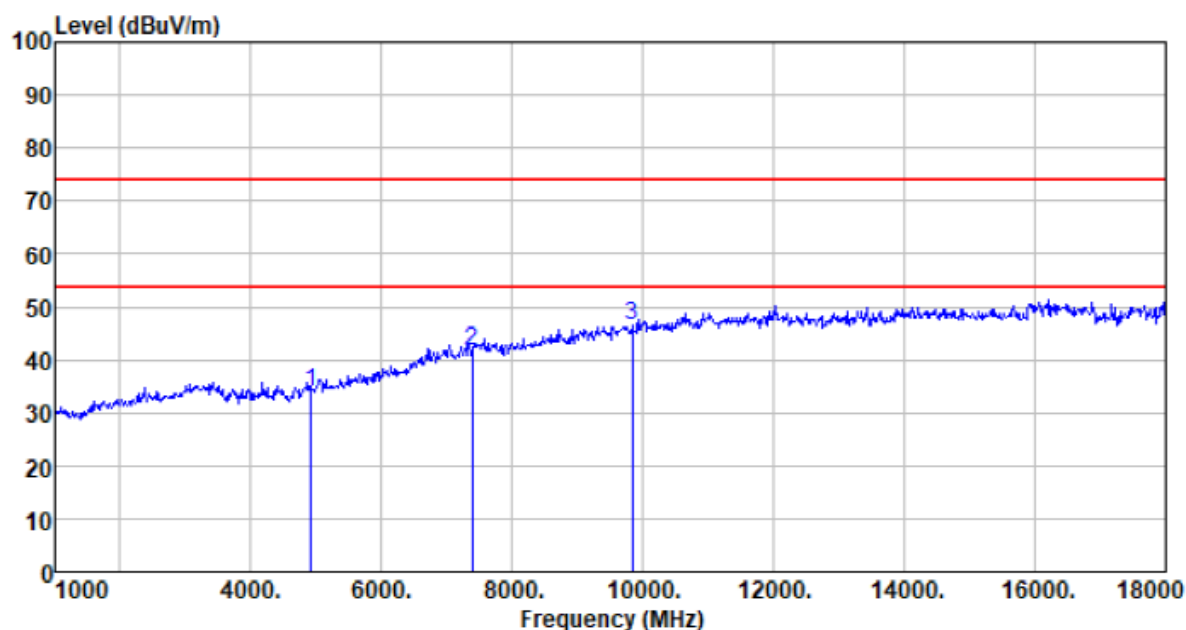

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4920.000	36.08	31.38	4.75	38.38	33.83	74.00	-40.17	Peak
7380.000	37.57	36.26	6.69	39.01	41.51	74.00	-32.49	Peak
9840.000	40.00	38.14	8.06	39.75	46.45	74.00	-27.55	Peak

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

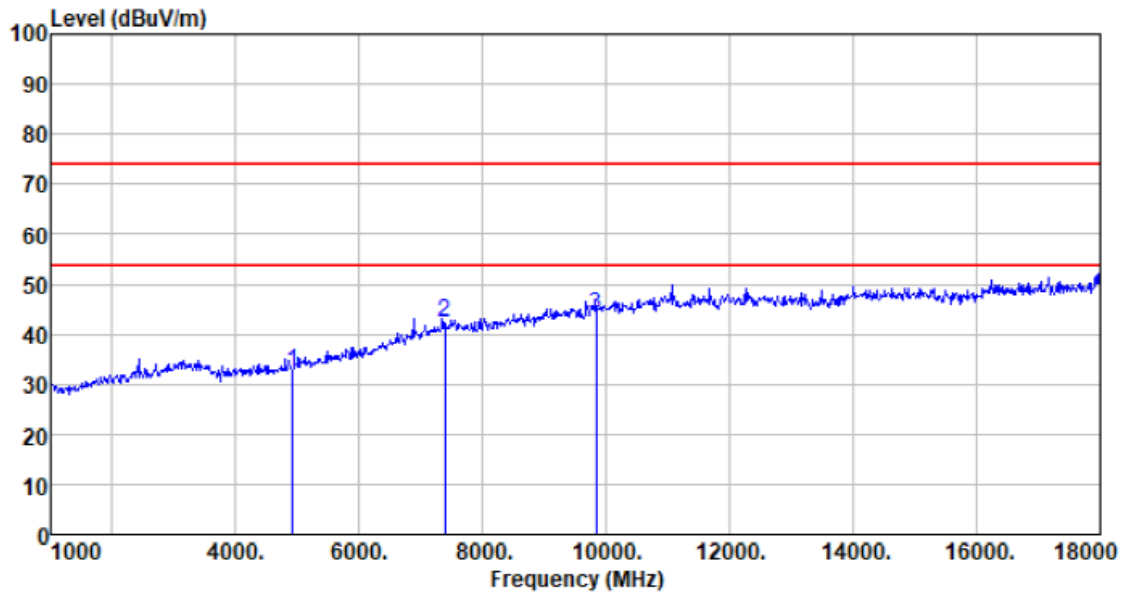

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4920.000	34.75	31.38	4.75	38.38	32.50	74.00	-41.50	Peak
7380.000	38.66	36.26	6.69	39.01	42.60	74.00	-31.40	Peak
9840.000	37.44	38.14	8.06	39.75	43.89	74.00	-30.11	Peak


Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. For above 18GHz, no emission found.


7.2.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

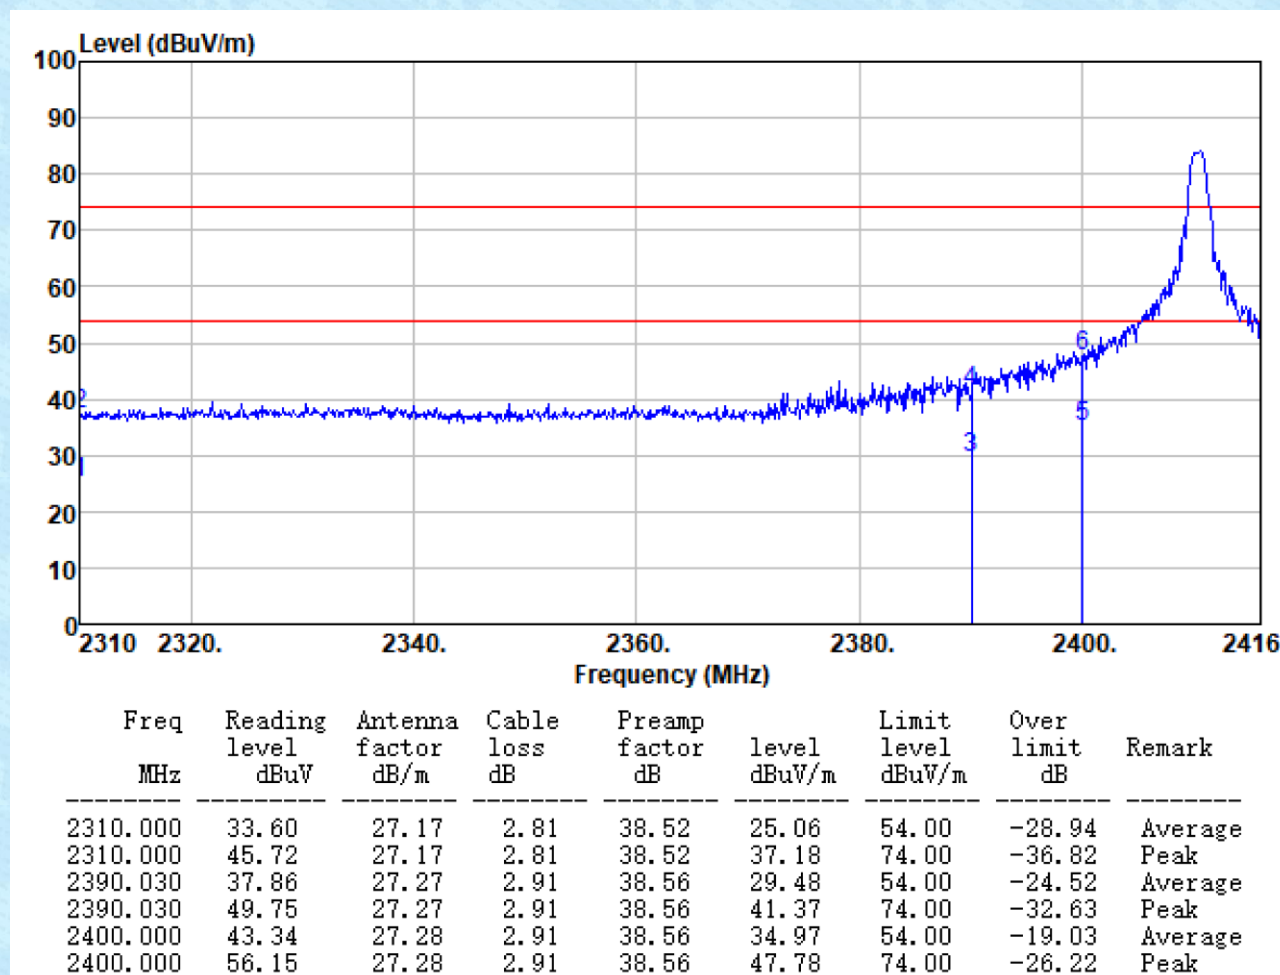


Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

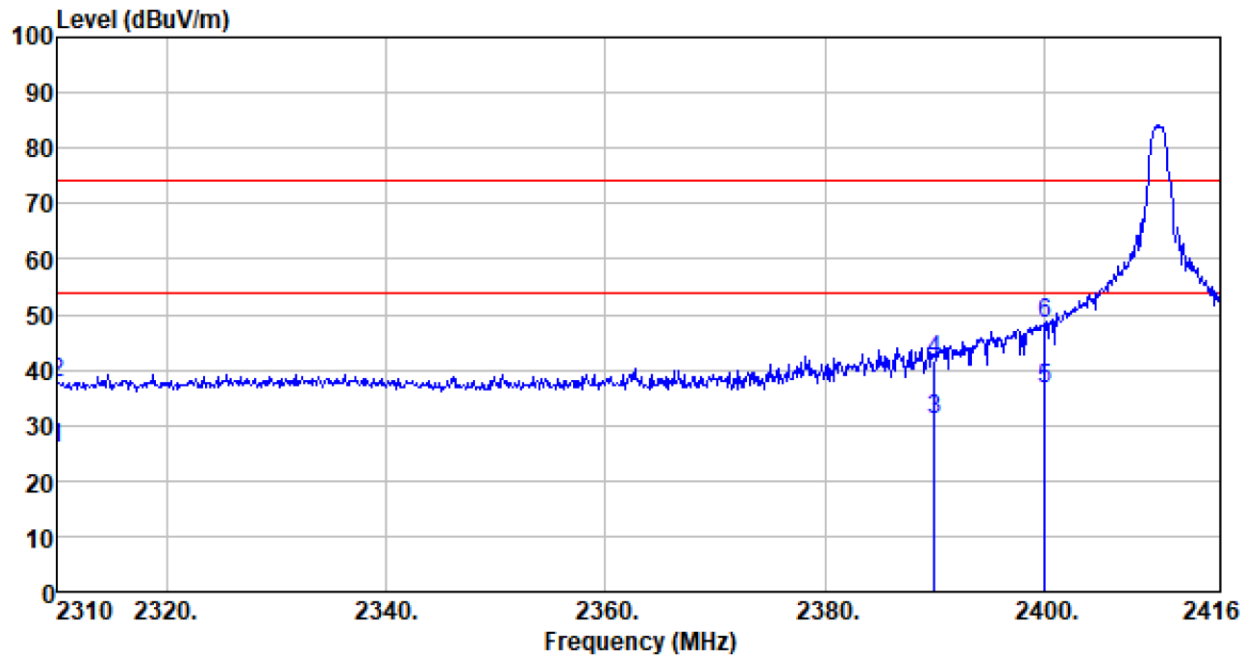


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	34.28	27.17	2.81	38.52	25.74	54.00	-28.26	Average
2310.000	46.01	27.17	2.81	38.52	37.47	74.00	-36.53	Peak
2390.000	39.34	27.27	2.91	38.56	30.96	54.00	-23.04	Average
2390.000	50.20	27.27	2.91	38.56	41.82	74.00	-32.18	Peak
2400.000	44.79	27.28	2.91	38.56	36.42	54.00	-17.58	Average
2400.000	56.84	27.28	2.91	38.56	48.47	74.00	-25.53	Peak

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

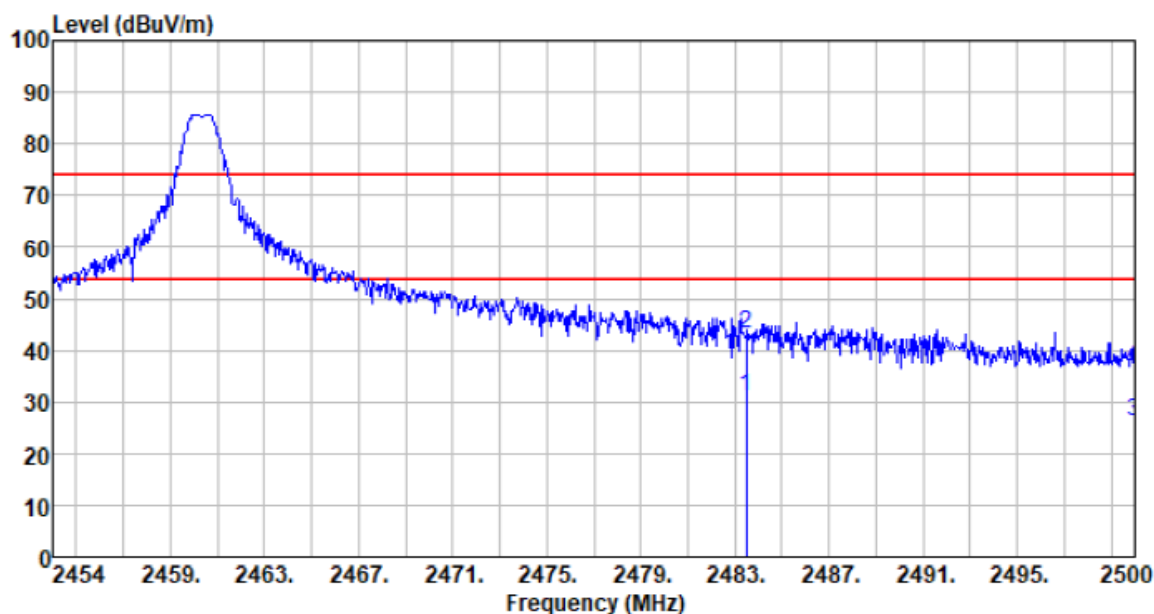

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	39.23	27.38	2.99	38.59	31.01	54.00	-22.99	Average
2483.500	51.52	27.38	2.99	38.59	43.30	74.00	-30.70	Peak
2500.000	34.49	27.40	3.01	38.60	26.30	54.00	-27.70	Average
2500.000	45.23	27.40	3.01	38.60	37.04	74.00	-36.96	Peak

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

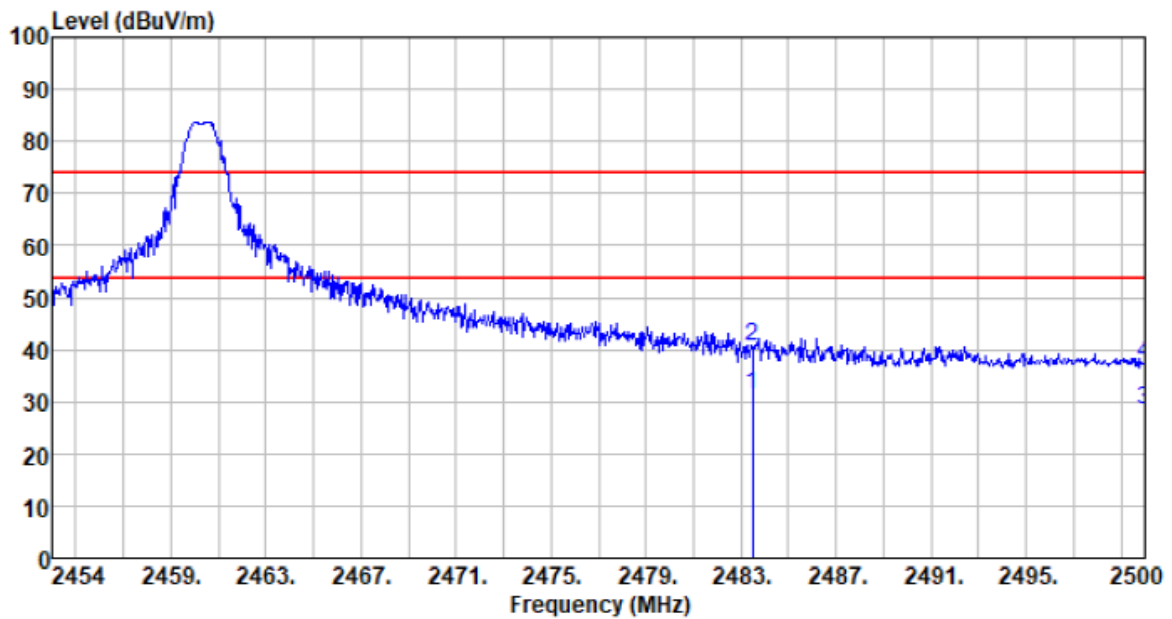


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	39.67	27.38	2.99	38.59	31.45	54.00	-22.55	Average
2483.500	48.67	27.38	2.99	38.59	40.45	74.00	-33.55	Peak
2500.000	36.59	27.40	3.01	38.60	28.40	54.00	-25.60	Average
2500.000	45.33	27.40	3.01	38.60	37.14	74.00	-36.86	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


7.3 20dB Occupy Bandwidth

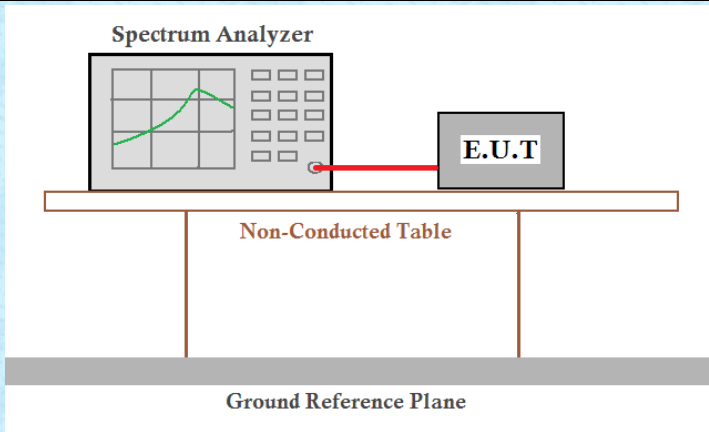Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	1.137	Pass
Middle	1.224	Pass
Highest	1.146	Pass

Test plot as follows:

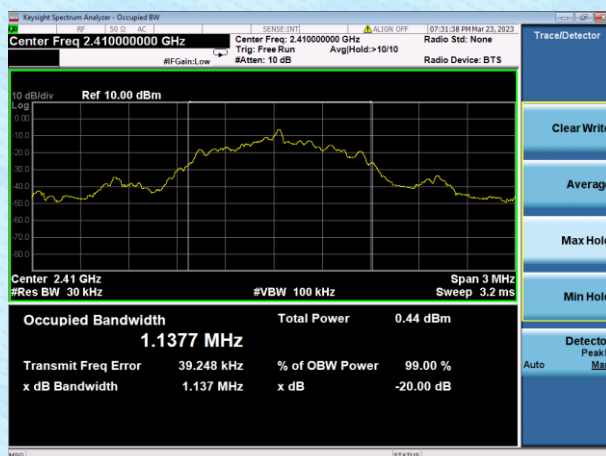

Lowest channel



Middle channel



Highest channel

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----