



WINNF-TS-0122 Test Report

FCC ID : S3KTO48YY
Equipment : LTE Outdoor CPE
Brand Name : Global Telecom, TITAN
Model Name : TITAN4000 B48
Applicant : Global Telecom Corp
17901 Von Karman Ave, Suite 600, Irvine,
California 92614 United States of America
Manufacturer : Global Telecom Corp
17901 Von Karman Ave, Suite 600, Irvine,
California 92614 United States of America
Standard : WINNF-TS-0122 Version V1.0.2

The product was received on Jul. 22, 2021 and testing was started from Jul. 26, 2021 and completed on Sep. 16, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in WINNF-TS-0122 Version V1.0.2 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai
Sporton International Inc. EMC & Wireless Communications Laboratory
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

- 1. Administration Data ----- 5**
 - 1.1 Testing Laboratory ----- 5
- 2. General Information ----- 6**
 - 2.1 Description of Equipment Under Test (EUT)----- 6
 - 2.2 Protocol Test Summary ----- 7
 - 2.3 Time test for getting Grant Summary----- 9
 - 2.4 Support Equipment ----- 9
 - 2.5 Test Equipment List ----- 9
- 3. Measurement Environment -----10**
 - 3.1 Test configuration without Domain Proxy----- 11
 - 3.2 Standards -----12
 - 3.3 Protocol test procedure -----12
 - 3.4 Time test for getting Grant Procedure -----12
- 4. Protocol Test Results -----13**
 - 4.1 [WINNF.FT.C.REG.1] Multi-Step registration -----13
 - 4.2 [WINNF.FT.C.REG.5] Single-Step registration for CBSD with CPI signed data-----14
 - 4.3 [WINNF.FT.C.REG.7] Registration due to change of an installation parameter-----15
 - 4.4 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102) -----16
 - 4.5 [WINNF.FT.C.REG.10] Pending registration (responseCode 200) -----17
 - 4.6 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103) -----18
 - 4.7 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101) -----19
 - 4.8 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100) -----20
 - 4.9 [WINNF.FT.C.REG.18] Group Error (responseCode 201)-----21
 - 4.10 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE) -----22
 - 4.11 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT_CONFLICT) -----23
 - 4.12 [WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response) -----24
 - 4.13 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DEREGISTER)-----26
 - 4.14 [WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED_GRANT) -----27
 - 4.15 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response -----28
 - 4.16 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response -----29
 - 4.17 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM)-----31
 - 4.18 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat) -----32
 - 4.19 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat) -----33



4.20 [WINNF.FT.C.HBT.11] Successful Grant Renewal in Heartbeat Test Case -----34

4.21 [WINNF.FT.C.MES.1] Registration Response contains measReportConfig -----36

4.22 [WINNF.FT.C.MES.3] Grant Response contains measReportConfig -----38

4.23 [WINNF.FT.C.MES.4] Heartbeat Response contains measReportConfig -----40

4.24 [WINNF.FT.C.RLQ.1] Successful Relinquishment-----42

4.25 [WINNF.FT.C.RLQ.3] Unsuccessful Relinquishment, responseCode=102-----43

4.26 [WINNF.FT.C.RLQ.5] Unsuccessful Relinquishment, responseCode=103-----44

4.27 [WINNF.FT.C.DRG.1] Successful Deregistration -----45

4.28 [WINNF.FT.C.DRG.3] Deregistration responseCode=102-----46

4.29 [WINNF.FT.C.DRG.5] Deregistration responseCode=103-----47

4.30 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness -----48

4.31 [WINNF.FT.C.SCS.2] TLS failure due to revoked certificate -----49

4.32 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate-----50

4.33 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA51

4.34 [WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted -----52

4.35 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement-----53

5. Result of Time test for getting Grant -----55

5.1 1 second within any 10-second period -----55

5.2 10 seconds within any 300-second period -----56

5.3 20 seconds within any 3600-second period -----57

6. UUT register with the SAS irrespective of power levels-----58

6.1 Test Procedure-----58

6.2 Result -----58

Appendix A. RF measurement plots

Appendix B. Setup Plot



1. Administration Data

1.1 Testing Laboratory

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. DFS02-HY
Test Engineer	Thomas Chen
Temperature	22 ~ 26 °C
Relative Humidity	52 ~ 57 %

FCC Designation No.: TW1190



2. General Information

2.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT Type	LTE Outdoor CPE
Brand Name	Global Telecom, TITAN
Model Name	TITAN4000 B48
FCC ID	S3KTO48YY
Professional Installation	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Unit Under Test Type	<input type="checkbox"/> BTS-CBSD product (Base Station) <input checked="" type="checkbox"/> CPE-CBSD product (Customer Premises Equipment)
UUT Category	<input type="checkbox"/> Category A <input checked="" type="checkbox"/> Category B
Domain Proxy support	<input type="checkbox"/> UUT with Domain Proxy <input checked="" type="checkbox"/> UUT without Domain Proxy
UUT Antenna Gain	15 dBi
UUT HW Version	V1.0
UUT FW Version	0.3.4.1
UUT SW Version	V1.6.0
UUT Serial Number	GLOBAR14006015

**2.2 Protocol Test Summary**

Section	Test Case ID	Test Case Title	Test Result
6.1.4.1.1	WINNF.FT.C.REG.1	Multi-Step registration	PASS
6.1.4.1.5	WINNF.FT.C.REG.5	Single-Step registration for CBSD with CPI signed data	PASS
6.1.4.1.7	WINNF.FT.C.REG.7	Registration due to change of an installation parameter	PASS
6.1.4.2.1	WINNF.FT.C.REG.8	Missing Required parameters (responseCode 102)	PASS
6.1.4.2.3	WINNF.FT.C.REG.10	Pending registration (responseCode 200)	PASS
6.1.4.2.5	WINNF.FT.C.REG.12	Invalid parameter (responseCode 103)	PASS
6.1.4.2.7	WINNF.FT.C.REG.14	Blacklisted CBSD (responseCode 101)	PASS
6.1.4.2.9	WINNF.FT.C.REG.16	Unsupported SAS protocol version (responseCode 100)	PASS
6.1.4.2.11	WINNF.FT.C.REG.18	Group Error (responseCode 201)	PASS
6.3.4.2.1	WINNF.FT.C.GRA.1	Unsuccessful Grant responseCode=400 (INTERFERENCE)	PASS
6.3.4.2.2	WINNF.FT.C.GRA.2	Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)	PASS
6.4.4.1.1	WINNF.FT.C.HBT.1	Heartbeat Success Case (first Heartbeat Response)	PASS
6.4.4.2.1	WINNF.FT.C.HBT.3	Heartbeat responseCode=105 (DEREGISTER)	PASS
6.4.4.2.2	WINNF.FT.C.HBT.4	Heartbeat responseCode=500 (TERMINATED_GRANT)	PASS
6.4.4.2.3	WINNF.FT.C.HBT.5	Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response	PASS
6.4.4.2.4	WINNF.FT.C.HBT.6	Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response	PASS
6.4.4.2.5	WINNF.FT.C.HBT.7	Heartbeat responseCode=502 (UNSYNC_OP_PARAM)	PASS
6.4.4.3.1	WINNF.FT.C.HBT.9	Heartbeat Response Absent (First Heartbeat)	PASS
6.4.4.3.2	WINNF.FT.C.HBT.10	Heartbeat Response Absent (Subsequent Heartbeat)	PASS
6.4.4.4.1	WINNF.FT.C.HBT.11	Successful Grant Renewal in Heartbeat Test Case	PASS
6.5.4.2.1	WINNF.FT.C.MES.1	Registration Response contains measReportConfig	PASS
6.1.4.1.1	WINNF.FT.C.REG.1	Multi-Step registration	PASS
6.1.4.1.5	WINNF.FT.C.REG.5	Single-Step registration for CBSD with CPI signed data	PASS
6.5.4.2.3	WINNF.FT.C.MES.3	Grant Response contains measReportConfig	PASS
6.5.4.2.4	WINNF.FT.C.MES.4	Heartbeat Response contains measReportConfig	PASS



Section	Test Case ID	Test Case Title	Test Result
6.6.4.1.1	WINNF.FT.C.RLQ.1	Successful Relinquishment	PASS
6.6.4.2.1	WINNF.FT.C.RLQ.3	Unsuccessful Relinquishment, responseCode=102	PASS
6.6.4.3.1	WINNF.FT.C.RLQ.5	Unsuccessful Relinquishment, responseCode=103	PASS
6.7.4.1.1	WINNF.FT.C.DRG.1	Successful Deregistration	PASS
6.7.4.2.1	WINNF.FT.C.DRG.3	Deregistration responseCode=102	PASS
6.7.4.3.1	WINNF.FT.C.DRG.5	Deregistration responseCode=103	PASS
6.1.4.1.1	WINNF.FT.C.SCS.1	Successful TLS connection between UUT and SAS Test Harness	PASS
6.1.4.1.5	WINNF.FT.C.SCS.2	TLS failure due to revoked certificate	PASS
6.1.4.1.7	WINNF.FT.C.SCS.3	TLS failure due to expired server certificate	PASS
6.1.4.2.13	WINNF.FT.C.SCS.4	TLS failure when SAS Test Harness certificate is issue by unknown CA	PASS
6.1.4.2.15	WINNF.FT.C.SCS.5	TLS failure when certificate at the SAS Test Harness is corrupted	PASS
7.1.4.1.1	WINNF.PT.C.HBT	UUT RF Transmit Power Measurement	PASS

**2.3 Time test for getting Grant Summary**

Trail	Time limit	Monitoring time	Measured result	Verdict
1	1 second	10 seconds	9.9999ms	PASS
2	10 seconds	300 seconds	57ms	PASS
3	20 seconds	3600 seconds	2.124s	PASS

2.4 Support Equipment

Name	Manufacturer	Type/Model	Serial Number	FCC ID
Q710	Ruckus	P01-Q710-US02	991929000175	S9GQ710US02

2.5 Test Equipment List

Name	Manufacturer	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101048	Apr. 20, 2021	Apr. 19, 2022
Spectrum Analyzer	Keysight	N9010A	MY57120184	Nov. 17, 2020	Nov. 16, 2021




3. Measurement Environment

Measurement Environment Information	
SAS Test Harness version	1.0.0.3
Operating System	Windows 10
TLS version	V 1.2
Python version	V 2.7.16

Conditional Test Case		
Support (Yes / No)	Condition	Definition
Yes	C1	Mandatory for UUT which supports multi-step registration message
No	C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.
Yes	C3	Mandatory for UUT which supports single-step registration containing CPIsigned data in the registration message.
Yes	C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type
Yes	C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.
Yes	C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration.

3.1 Test configuration without Domain Proxy

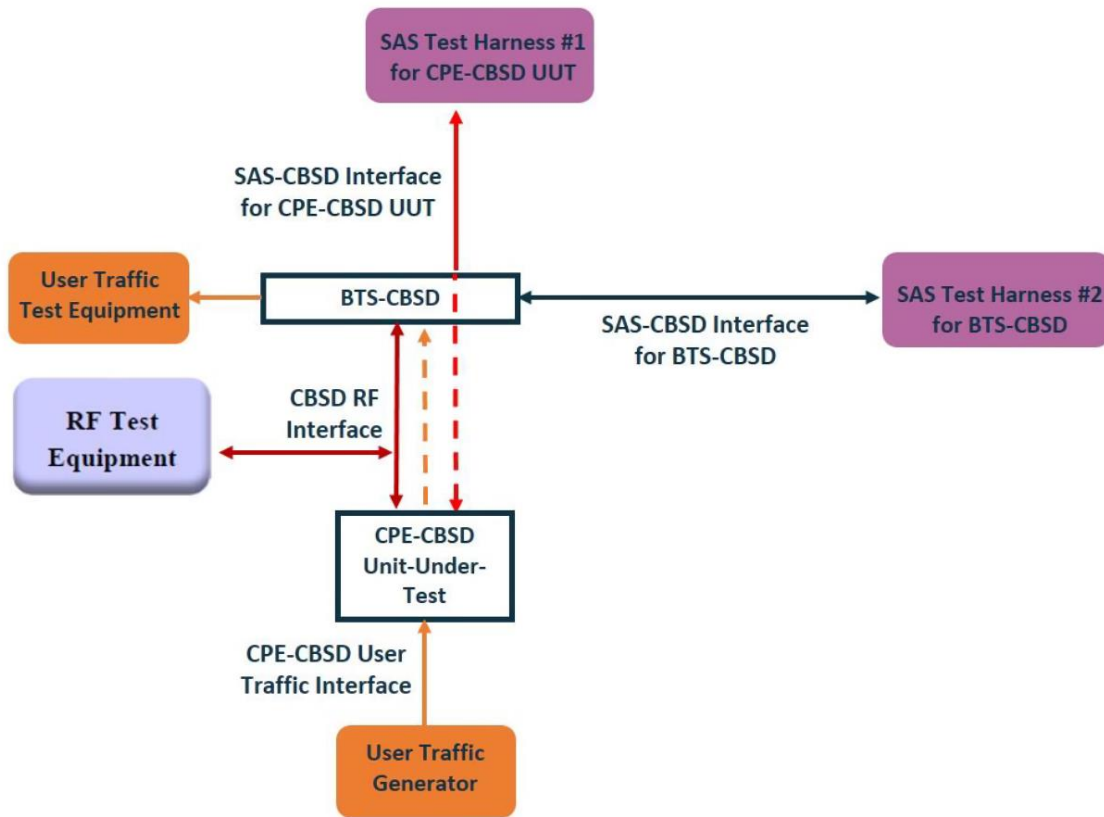

CPE-CBSD as UUT, BTS-CBSD direct communication.



3.2 Standards

- [n.1]. FCC KDB 940660 D02 CPE-CBSD Handshake Procedures v02, 29 October 2020
- [n.2]. WINNF-TS-0122 Version 1.0.2, "Conformance and Performance Test Technical Specification; CBSD/DP as Unit Under Test (UUT)", 25 November 2020
- [n.3]. WINNF-TS-0016 Version 1.2.6, "SAS to CBSD Technical Specification", 25 November 2020

3.3 Protocol test procedure

The test cases for SAS<->CBSD protocol in [n.2] apply for CPE-CBSD device type. Following the [n.1], when running the test cases in [n.2] for CPE-CBSD device type, verify that:

1. CPE-CBSD can begin transmitting its RF only after receiving radio signal from its compatible BTS-CBSD.
2. For all CPE-CBSD RF transmissions, the CPE-CBSD UUT radio frequency range and bandwidth are less or equal to the frequency range and bandwidth of its compatible BTS-CBSD.
3. Judging the last execution step appearing in [n.2] with "User data traffics" instead of "RF transmission."

3.4 Time test for getting Grant Procedure

Use the WinnForum SAS Harness run test case WINNF.FT.C.GRA.1. Without answering the last question in WINNF.FT.C.GRA.1 will keep UUT's grant request being rejected, then measure the time.

4. Protocol Test Results

4.1 [WINNF.FT.C.REG.1] Multi-Step registration

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT is in the Unregistered state 	--
2	CBSD sends correct Registration request information, as specified in [n.5], to the SAS Test Harness: <ul style="list-style-type: none"> • The required <code>userId</code>, <code>fcld</code> and <code>cbsdSerialNumber</code> registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. • Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. Note: It is outside the scope of this document to test the Registration information that is supplied via another means.	PASS
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response as follows: <ul style="list-style-type: none"> – <code>cbsdId = C</code> – <code>measReportConfig</code> shall not be included – <code>responseCode = 0</code> 	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<code>responseCode=0</code>) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	PASS

4.2 [WINNF.FT.C.REG.5] Single-Step registration for CBSD with CPI signed data

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state • All of the required and REG-Conditional parameters shall be configured and CPI signature provided 	--
2	CBSD sends Registration request to the SAS Test Harness: <ul style="list-style-type: none"> • The required <i>userId</i>, <i>fcid</i> and <i>cbsdSerialNumber</i> and REG-Conditional <i>cbsdCategory</i>, <i>airInterface</i>, <i>measCapability</i> and <i>cpiSignatureData</i> registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. • Any optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. 	PASS
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response as follows: <ul style="list-style-type: none"> – <i>cbsdId</i> = C – <i>measReportConfig</i> shall not be included. – <i>responseCode</i> = 0 	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i> =0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	PASS



4.3 [WINNF.FT.C.REG.7] Registration due to change of an installation parameter

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness	--
2	UUT has successfully registered with SAS Test Harness	--
3	Change an installation parameters at the UUT (time T) Tester needs to record the current time at which the parameter change is executed.	--
4	Monitor the SAS-CBSD interface. UUT sends a deregistrationRequest to the SAS Test Harness The deregistration request shall be sent within (T + 60 seconds) from step 3.	PASS

4.4 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"> – SAS response does not include <i>csdId</i> – <i>responseCode</i> = R 	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i> =0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	PASS

4.5 [WINNF.FT.C.REG.10] Pending registration (responseCode 200)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"> – SAS response does not include <i>cbsdId</i> – <i>responseCode</i> = R 	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i> =200) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	PASS

4.6 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"> – SAS response does not include <i>cbsdId</i> – <i>responseCode</i> = R 	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i> =103) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	PASS

**4.7 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101)**

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT is in the Unregistered state	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none">– SAS response does not include <i>cbsdId</i>– <i>responseCode</i> = R	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i> =101) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.8 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT is in the Unregistered state	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none">– SAS response does not include <i>cbsdId</i>– <i>responseCode</i> = R	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i> =100) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.9 [WINNF.FT.C.REG.18] Group Error (responseCode 201)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT is in the Unregistered state	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none">– SAS response does not include <i>cbsdId</i>– <i>responseCode</i> = R	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i> =201) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.10 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness, with <i>cbsdId = C</i>	--
2	UUT sends valid Grant Request.	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none">• <i>cbsdId=C</i>• <i>responseCode = R</i>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode=0</i>) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.11 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401
(GRANT_CONFLICT)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness, with <i>cbsdId = C</i>	--
2	UUT sends valid Grant Request.	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none">• <i>cbsdId=C</i>• <i>responseCode = R</i>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode=401</i>) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.12 [WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness, with <i>cbsdId = C</i>	--
2	UUT sends a message: <ul style="list-style-type: none">• If message is type Spectrum Inquiry Request, go to step 3, or• If message is type Grant Request, go to step 5	--
3	UUT sends Spectrum Inquiry Request. Validate: <ul style="list-style-type: none">• <i>cbsdId = C</i>• List of frequencyRange objects sent by UUT are within the CBRS frequency range	PASS
4	SAS Test Harness sends a Spectrum Inquiry Response message, including the following parameters: <ul style="list-style-type: none">• <i>cbsdId = C</i>• availableChannel is an array of availableChannel objects• <i>responseCode = 0</i>	--
5	UUT sends Grant Request message. Validate: <ul style="list-style-type: none">• <i>cbsdId = C</i>• maxEIRP is at or below the limit appropriate for CBSD category as defined by Part 96• operationFrequencyRange, F, sent by UUT is a valid range within the CBRS band	PASS
6	SAS Test Harness sends a Grant Response message, including the parameters: <ul style="list-style-type: none">• <i>cbsdId = C</i>• <i>grantId = G = a valid grant ID</i>• <i>grantExpireTime = UTC time greater than duration of the test</i>• <i>responseCode = 0</i>	--
7	UUT sends a first Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including: <ul style="list-style-type: none">• <i>cbsdId = C</i>• <i>grantId = G</i>• <i>operationState = "GRANTED"</i>	PASS



8	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>transmitExpireTime</i> = current UTC time + 200 seconds• <i>responseCode</i> = 0	--
9	<p>For further Heartbeat Request messages sent from UUT after completion of step 8, validate message is sent within latest specified heartbeatInterval, and:</p> <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>operationState</i> = "AUTHORIZED" <p>and SAS Test Harness responds with a Heartbeat Response message including the following parameters:</p> <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>transmitExpireTime</i> = current UTC time + 200 seconds• <i>responseCode</i> = 0	PASS
10	<p>Monitor the RF output of the UUT from start of test until UUT transmission commences. Verify:</p> <ul style="list-style-type: none">• UUT does not transmit at any time prior to completion of the first heartbeat response• UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range F.	PASS

4.13 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DEREGISTER)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid <i>cbsdId</i> = C ○ valid <i>grantId</i> = G ○ grant is for frequency range F, power P ○ <i>grantExpireTime</i> = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "AUTHORIZED" 	PASS
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>transmitExpireTime</i> = T = Current UTC time • <i>responseCode</i> = 105 (DEREGISTER) 	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> • UUT shall stop transmission within (T + 60 seconds) of completion of step 3 	PASS

4.14 [WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED_GRANT)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid <i>cbsdId</i> = C ○ valid <i>grantId</i> = G ○ grant is for frequency range F, power P ○ <i>grantExpireTime</i> = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified <i>heartbeatInterval</i> , and is formatted correctly, including: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "AUTHORIZED" 	PASS
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>transmitExpireTime</i> = T = current UTC time • <i>responseCode</i> = 500 (TERMINATED_GRANT) 	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> • UUT shall stop transmission within (T + 60 seconds) of completion of step 3 	PASS

4.15 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid <i>cbsdId</i> = C ○ valid <i>grantId</i> = G ○ grant is for frequency range F, power P ○ <i>grantExpireTime</i> = UTC time greater than duration of the test • UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request) 	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "GRANTED" 	PASS
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>transmitExpireTime</i> = T = current UTC time • <i>responseCode</i> = 501 (SUSPENDED_GRANT) 	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "GRANTED" <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> • <i>cbdsId</i> = C • <i>grantId</i> = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT does not transmit at any time 	PASS

4.16 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid <i>cbsdId</i> = C ○ valid <i>grantId</i> = G ○ grant is for frequency range F, power P ○ <i>grantExpireTime</i> = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "AUTHORIZED" 	PASS
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>transmitExpireTime</i> = T = current UTC time • <i>responseCode</i> = 501 (SUSPENDED_GRANT) 	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--



5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>operationState</i> = "GRANTED" <p>B. UUT sends a Relinquishment Request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none">• UUT shall stop transmission within (<i>T</i> + 60 seconds) of completion of step 3	PASS
---	---	------

4.17 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid <i>cbsdId</i> = C ○ valid <i>grantId</i> = G ○ grant is for frequency range F, power P ○ <i>grantExpireTime</i> = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within latest specified <i>heartbeatInterval</i> , and is formatted correctly, including: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "AUTHORIZED" 	PASS
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>transmitExpireTime</i> = T = Current UTC Time • <i>responseCode</i> = 502 (UNSYNC_OP_PARAM) 	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	Monitor the SAS-CBSD interface. Verify: <ul style="list-style-type: none"> • UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters: <ul style="list-style-type: none"> ○ <i>cbdsId</i> = C ○ <i>grantId</i> = G Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"> • UUT shall stop transmission within (T+60) seconds of completion of step 3. 	PASS



4.18 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness• UUT has a valid single grant as follows:<ul style="list-style-type: none">○ valid <i>cbsdId</i> = C○ valid <i>grantId</i> = G○ grant is for frequency range F, power P○ <i>grantExpireTime</i> = UTC time greater than duration of the test• UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified <i>heartbeatInterval</i> , and is formatted correctly, including: <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>operationState</i> = "GRANTED"	PASS
3	After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection	--
4	Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify: <ul style="list-style-type: none">• At any time during the test, UUT shall not transmit on RF interface	PASS

4.19 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid <i>cbsdId</i> = C ○ valid <i>grantId</i> = G ○ grant is for frequency range F, power P ○ <i>grantExpireTime</i> = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within the latest specified <i>heartbeatInterval</i>, and is formatted correctly, including:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "AUTHORIZED" 	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>transmitExpireTime</i> = current UTC time + 200 seconds • <i>responseCode</i> = 0 	--
4	<p>After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT</p>	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT shall stop all transmission on RF interface within (<i>transmitExpireTime</i> + 60 seconds), using the <i>transmitExpireTime</i> sent in Step 3. 	PASS



4.20 [WINNF.FT.C.HBT.11] Successful Grant Renewal in Heartbeat Test Case

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness• UUT has a valid single grant as follows:<ul style="list-style-type: none">○ valid <i>cbsdId</i> = C○ valid <i>grantId</i> = G○ grant is for frequency range F, power P• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface.• Grant has the following parameters at the start of the test:<ul style="list-style-type: none">○ <i>grantExpireTime</i> =UTC time equal to time at start of test + 300 seconds = Tgrant_expire○ <i>transmitExpireTime</i> = UTC time equal to time at start of test + 200 seconds○ <i>heartbeatInterval</i> = 60 seconds	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>If Heartbeat Request message contains grantRenew = TRUE, go to Step 6, else go to Step 3.</p>	--
3	<p>Verify Heartbeat Request message is sent within the latest specified <i>heartbeatInterval</i>, and is formatted correctly, including:</p> <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>operationState</i> = "AUTHORIZED"	PASS
4	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>transmitExpireTime</i> = current UTC + 200 seconds• <i>grantExpireTime</i> = same as Step 1• <i>responseCode</i> = 0	--
5	<p>Go to Step 2</p>	--



6	Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including: <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>operationState</i> = "AUTHORIZED"• <i>grantRenew</i> = TRUE	PASS
7	SAS Test Harness sends a Heartbeat Response message, with the following parameters: <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>grantExpireTime</i> = UTC time set far in the future• <i>transmitExpireTime</i> = current UTC time + 200 seconds• <i>responseCode</i> = 0	--
8	Continue to respond to any subsequentHeartbeat Request from CBSD with Heartbeat Response with the following parameters: <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>transmitExpireTime</i> = same as Step 7• <i>responseCode</i> = 0	--
9	Monitor RF transmission of UUT from start of test until Tgrant_expire + 60 seconds and ensure UUT continues to transmit throughout the time period.	PASS

4.21 [WINNF.FT.C.MES.1] Registration Response contains measReportConfig

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness 	--
2	UUT sends a Registration Request message. Validate the Registration Request message is formatted correctly, including: <ul style="list-style-type: none"> • <i>userId</i> is present and correct • <i>fcid</i> is present and correct • <i>cbsdSerialNumber</i> is present and correct • <i>measCapability</i> = "RECEIVED_POWER_WITHOUT_GRANT" 	PASS
3	SAS Test Harness sends a Registration Response message, with the following parameters: <ul style="list-style-type: none"> • <i>cbsdId</i> = C = valid cbsdId for this UUT • <i>measReportConfig</i>= "RECEIVED_POWER_WITHOUT_GRANT" • <i>responseCode</i> = 0 	--
4	UUT sends a message: <ul style="list-style-type: none"> • If message is type Spectrum Inquiry Request, go to step 5, or • If message is type Grant Request, go to step 7 	--
5	UUT sends message type Spectrum Inquiry Request. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>measReport</i> is present, and is a properly formatted <i>rcvdPowerMeasReport</i>. 	PASS
6	SAS Test Harness sends a Spectrum Inquiry Response, with the following parameters: <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>availableChannel</i> is an array of <i>availableChannel</i> objects • <i>responseCode</i> = 0 	--



7	UUT sends message type Grant Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none">• <i>cbsdId = C</i>• <i>measReport</i> is present, and is a properly formatted <i>rcvdPowerMeasReport</i>.	PASS
---	---	------

4.22 [WINNF.FT.C.MES.3] Grant Response contains measReportConfig

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i> and <i>measCapability = "RECEIVED_POWER_WITH_GRANT"</i> 	--
2	UUT sends a Grant Request message. Verify Grant Request message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"> • <i>cbsdId = C</i> • <i>operationParam</i> is present and format is valid 	PASS
3	SAS Test Harness sends a Grant Response message, with the following parameters: <ul style="list-style-type: none"> • <i>cbsdId = C</i> • <i>grantId = G = valid grant ID</i> • <i>grantExpireTime = UTC time in the future</i> • <i>heartbeatInterval = 60 seconds</i> • <i>measReportConfig = "RECEIVED_POWER_WITH_GRANT"</i> • <i>operationParam</i> is set to valid operating parameters • <i>channelType = "GAA"</i> • <i>responseCode = 0</i> 	--
4	UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"> • <i>cbsdId = C</i> • <i>grantId = G</i> • <i>operationState = "GRANTED"</i> 	PASS



5	<p>If Heartbeat Request message (step 4) contains <i>measReport</i> object, then:</p> <ul style="list-style-type: none">• verify <i>measReport</i> is properly formatted as object <i>rcvdPowerMeasReport</i>• end test, with PASS result <p>else, if Heartbeat Request message (step 4) does not contain <i>measReport</i> object, then:</p> <p style="padding-left: 40px;">If number of Heartbeat Requests sent by UUT after Step 3 is = 5, then stop test with result of FAIL</p>	PASS
6	<p>SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>transmitExpireTime</i> = current UTC time + 200 seconds• <i>responseCode</i> = 0 <p>Go to Step 4, above</p>	--

4.23 [WINNF.FT.C.MES.4] Heartbeat Response contains measReportConfig

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i> and <i>measCapability = "RECEIVED_POWER_WITH_GRANT"</i> • UUT has received a valid grant with <i>grantId = G</i> • UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. • Grant has <i>heartbeatInterval = 60</i> seconds 	--
2	<p>UUT sends a Heartbeat Request message. Verify Heartbeat Request message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> • <i>cbsdId = C</i> • <i>grantId = G</i> • <i>operationState = "AUTHORIZED"</i> 	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> • <i>cbsdId = C</i> • <i>grantId = G</i> • <i>measReportConfig= "RECEIVED_POWER_WITH_GRANT"</i> • <i>responseCode = 0</i> 	--
4	<p>UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> • <i>cbsdId = C</i> • <i>grantId = G</i> • <i>operationState = "AUTHORIZED"</i> 	PASS



5	<p>If Heartbeat Request message (step 4) contains <i>measReport</i> object, then:</p> <ul style="list-style-type: none">• verify <i>measReport</i> is properly formatted as object <i>rcvdPowerMeasReport</i>• end test, with PASS result <p>else, if Heartbeat Request message (step 4) does not contain <i>measReport</i> object, then:</p> <ul style="list-style-type: none">• If number of Heartbeat Requests sent by UUT after Step 3 is = 5, then stop test with result of FAIL	PASS
6	<p>SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none">• <i>cbsdId</i> = C• <i>grantId</i> = G• <i>responseCode</i> = 0 <p>Go to Step 4, above</p>	--



4.24 [WINNF.FT.C.RLQ.1] Successful Relinquishment

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i>• UUT has received a valid grant with <i>grantId = G</i>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to relinquish UUT Grant from the SAS Test Harness	--
2	UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none">• <i>cbsdId = C</i>• <i>grantId = G</i>	PASS
3	SAS Test Harness shall approve the request with a Relinquishment Response message with parameters: <ul style="list-style-type: none">– <i>cbsdId = C</i>– <i>grantId = G</i>– <i>responseCode = 0</i>	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (<i>responseCode=0</i>) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall stop RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request	PASS



4.25 [WINNF.FT.C.RLQ.3] Unsuccessful Relinquishment, responseCode=102

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i>• UUT has received a valid grant with <i>grantId = G</i>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. <p>Invoke trigger to Relinquish UUT Grant from the SAS Test Harness</p>	--
2	<p>UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none">• <i>cbsdId = C</i>• <i>grantId = G</i>	--
3	<p>SAS Test Harness shall send a Relinquishment Response message with parameters:</p> <ul style="list-style-type: none">• <i>cbsdId = C</i>• No <i>grantId</i>• <i>responseCode = R</i>	--
4	<p>After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode=0</i>) to further request messages from the UUT.</p>	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none">• UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request	PASS



4.26 [WINNF.FT.C.RLQ.5] Unsuccessful Relinquishment, responseCode=103

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i>• UUT has received a valid grant with <i>grantId = G</i>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to Relinquish UUT Grant from the SAS Test Harness	--
2	UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none">• <i>cbsdId = C</i>• <i>grantId = G</i>	--
3	SAS Test Harness shall send a Relinquishment Response message with parameters: <ul style="list-style-type: none">• <i>cbsdId = C</i>• No <i>grantId</i>• <i>responseCode = R</i>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode=103</i>) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request	PASS

4.27 [WINNF.FT.C.DRG.1] Successful Deregistration

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i> • UUT has received a valid grant with <i>grantId = G</i> • UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode=0</i>	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId = C</i> .	PASS
4	<p>SAS Test Harness shall approve the request with a Deregistration Response message with parameters:</p> <ul style="list-style-type: none"> • <i>cbsdId = C</i> • <i>responseCode = 0</i> 	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response (<i>responseCode=0</i>) to further request messages from the UUT.	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> • UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: <ul style="list-style-type: none"> A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message 	PASS



4.28 [WINNF.FT.C.DRG.3] Deregistration responseCode=102

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i>• UUT has received a valid grant with <i>grantId = G</i>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to deregister UUT from the SAS Test Harness	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode=0</i>	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId = C</i>	--
4	The SAS Test Harness sends the Deregistration Response Message to UUT with: <ul style="list-style-type: none">• No <i>cbsdId</i>• <i>responseCode = 102</i>	--
5	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode=0</i>) to further request messages from the UUT.	--
6	Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:<ul style="list-style-type: none">A. UUT sending a Registration Request message, as this is not mandatoryB. UUT sending a Deregistration Request message	PASS



4.29 [WINNF.FT.C.DRG.5] Deregistration responseCode=103

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT has successfully registered with SAS Test Harness, with <i>cbsdId=C</i>• UUT has received a valid grant with <i>grantId = G</i>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to deregister UUT from the SAS Test Harness	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode=0</i>	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId = C</i>	--
4	The SAS Test Harness sends the Deregistration Response Message to UUT with: <ul style="list-style-type: none">• No <i>cbsdId</i>• <i>responseCode = 103</i>	--
5	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode=0</i>) to further request messages from the UUT.	--
6	Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:<ul style="list-style-type: none">A. UUT sending a Registration Request message, as this is not mandatoryB. UUT sending a Deregistration Request message	PASS



4.30 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness

#	Test Execution Steps	Results
1	<ul style="list-style-type: none">UUT shall start CBSD-SAS communication with the security procedureThe UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate.Configure the SAS Test Harness to accept the security procedure and establish the connection	PASS
2	<ul style="list-style-type: none">Make sure that Mutual authentication happens between UUT and the SAS Test Harness.Make sure that UUT uses TLS v1.2Make sure that cipher suites from one of the following is selected,<ul style="list-style-type: none">TLS_RSA_WITH_AES_128_GCM_SHA256TLS_RSA_WITH_AES_256_GCM_SHA384TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	PASS
3	<p>A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability.</p> <ul style="list-style-type: none">UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with <i>responseCode = 0</i> and <i>cbsdId</i>.	PASS
4	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none">UUT shall not transmit RF	PASS



4.31 [WINNF.FT.C.SCS.2] TLS failure due to revoked certificate

#	Test Execution Steps	Results
1	<ul style="list-style-type: none">UUT shall start CBSD-SAS communication with the security procedures	PASS
2	<ul style="list-style-type: none">Make sure that UUT uses TLS v1.2 for security establishment.Make sure UUT selects the correct cipher suite.UUT shall use CRL or OCSP to verify the validity of the server certificate.Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	PASS
3	UUT may retry for the security procedure which shall fail	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">UUT shall not transmit RF	PASS



4.32 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate

#	Test Execution Steps	Results
1	<ul style="list-style-type: none">UUT shall start CBSD-SAS communication with the security procedures	PASS
2	<ul style="list-style-type: none">Make sure that UUT uses TLS v1.2 for security establishment.Make sure UUT selects the correct cipher suite.UUT shall use CRL or OCSP to verify the validity of the server certificate.Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">UUT shall not transmit RF	PASS



4.33 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA

#	Test Execution Steps	Results
1	<ul style="list-style-type: none">• UUT shall start CBSD-SAS communication with the security procedures	PASS
2	<ul style="list-style-type: none">• Make sure that UUT uses TLS v1.2 for security establishment.• Make sure UUT selects the correct cipher suite.• UUT shall use CRL or OCSP to verify the validity of the server certificate• Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.34 [WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted

#	Test Execution Steps	Results
1	<ul style="list-style-type: none">• UUT shall start CBSD-SAS communication with the security procedures	PASS
2	<ul style="list-style-type: none">• Make sure that UUT uses TLS v1.2 for security establishment.• Make sure UUT selects the correct cipher suite.• UUT shall use CRL or OCSP to verify the validity of the server certificate.• Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.35 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness• UUT has registered with the SAS, with CBSID ID = C• UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case <p><i>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters.</i></p>	--
2	<p>UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows:</p> <ul style="list-style-type: none">• UUT sends Heartbeat Request, including:<ul style="list-style-type: none">○ cbsdId = C○ grantId = G• SAS Test Harness responds with Heartbeat Response, including:<ul style="list-style-type: none">○ cbsdId = C○ grantId = G○ transmitExpireTime = current UTC time + 200 seconds○ responseCode = 0	--




3	<p>Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, P_i. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfil the requirements of the power measurement method.</p> <p><i>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</i></p>	PASS
---	--	------

Note: For test 4.35, please find the Appendix B for RF measurement plots.


5. Result of Time test for getting Grant

5.1 1 second within any 10-second period

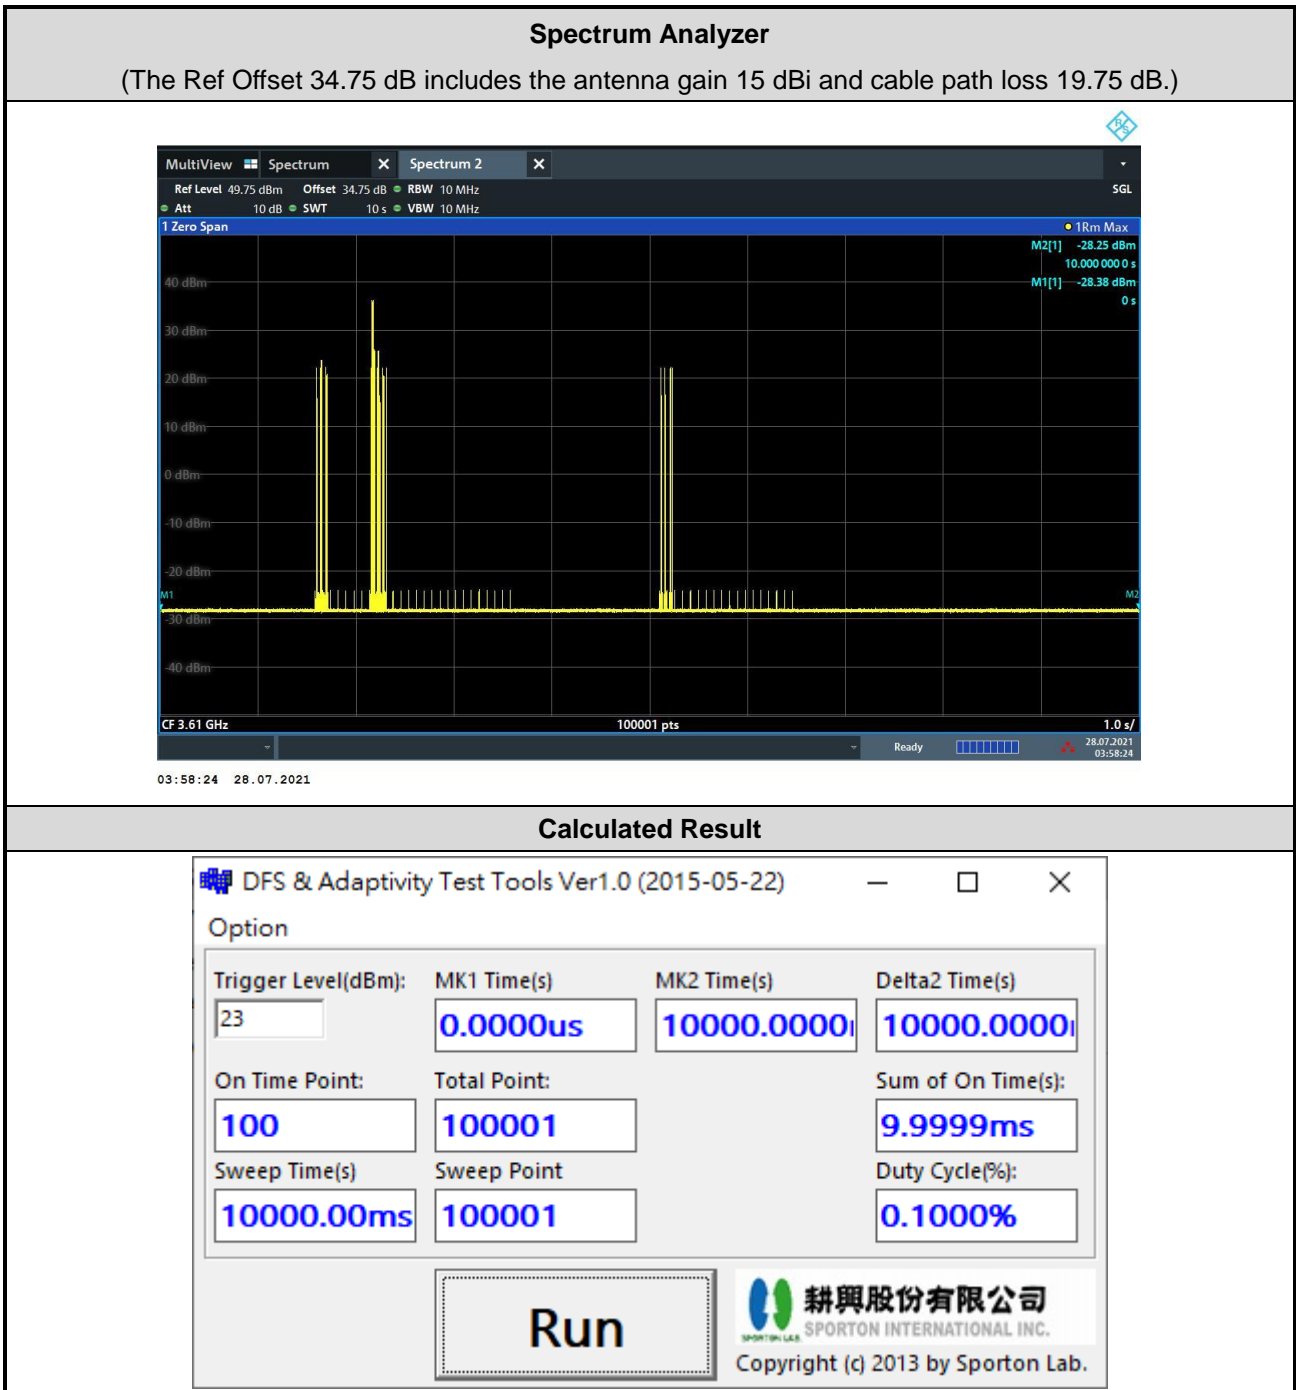

The sum of On Time (aggregated time from marker 1 to 2): 9.9999ms < 1s, Pass.

5.2 10 seconds within any 300-second period

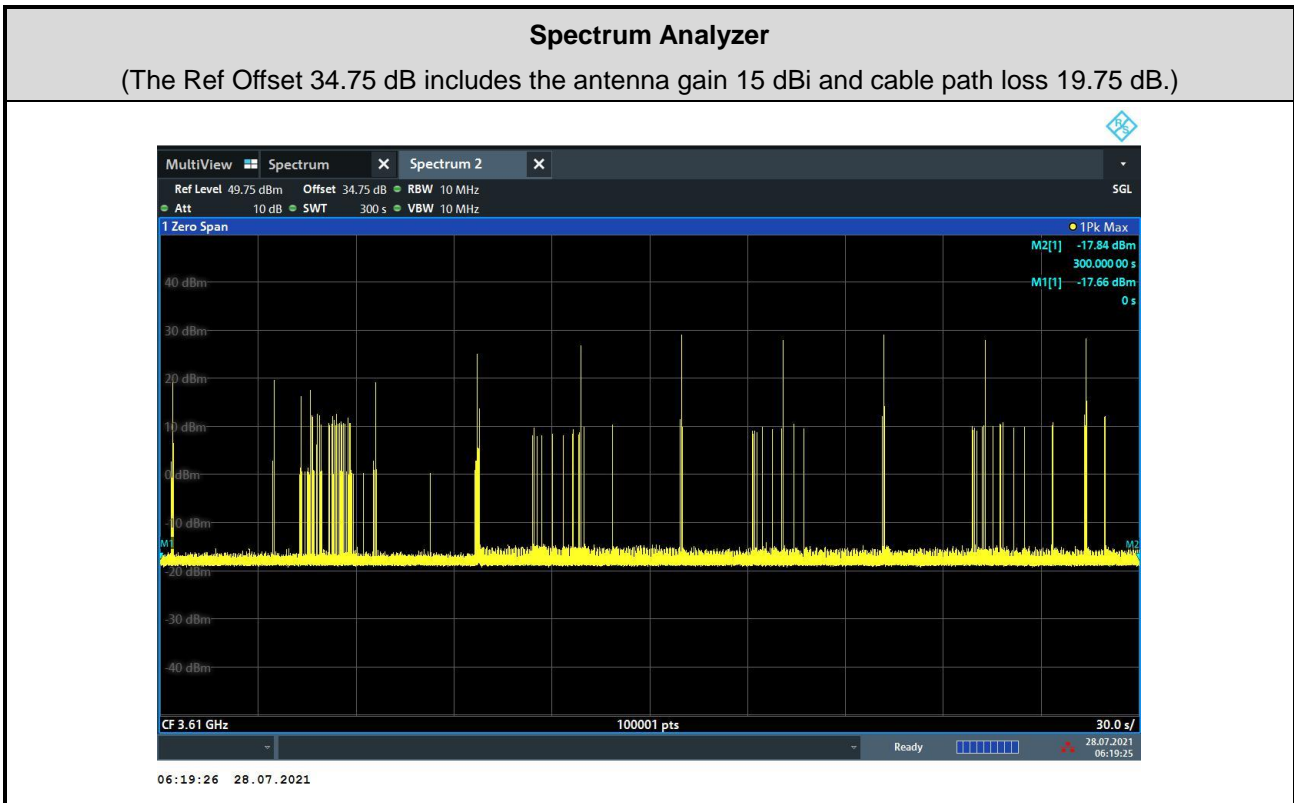


Calculated Result

DFS & Adaptivity Test Tools Ver1.0 (2015-05-22)

Option


Trigger Level(dBm):	MK1 Time(s)	MK2 Time(s)	Delta2 Time(s)
23	0.0000us	300000.0000	300000.0000
On Time Point:	Total Point:	Sum of On Time(s):	
19	100000	57.0000ms	
Sweep Time(s)	Sweep Point	Duty Cycle(%):	
300000.000m	100001	0.0190%	

Run



耕興股份有限公司
 SPORTON INTERNATIONAL INC.
 Copyright (c) 2013 by Sporton Lab.

The sum of On Time (aggregated time from marker 1 to 2): 57ms < 10s, Pass.

5.3 20 seconds within any 3600-second period

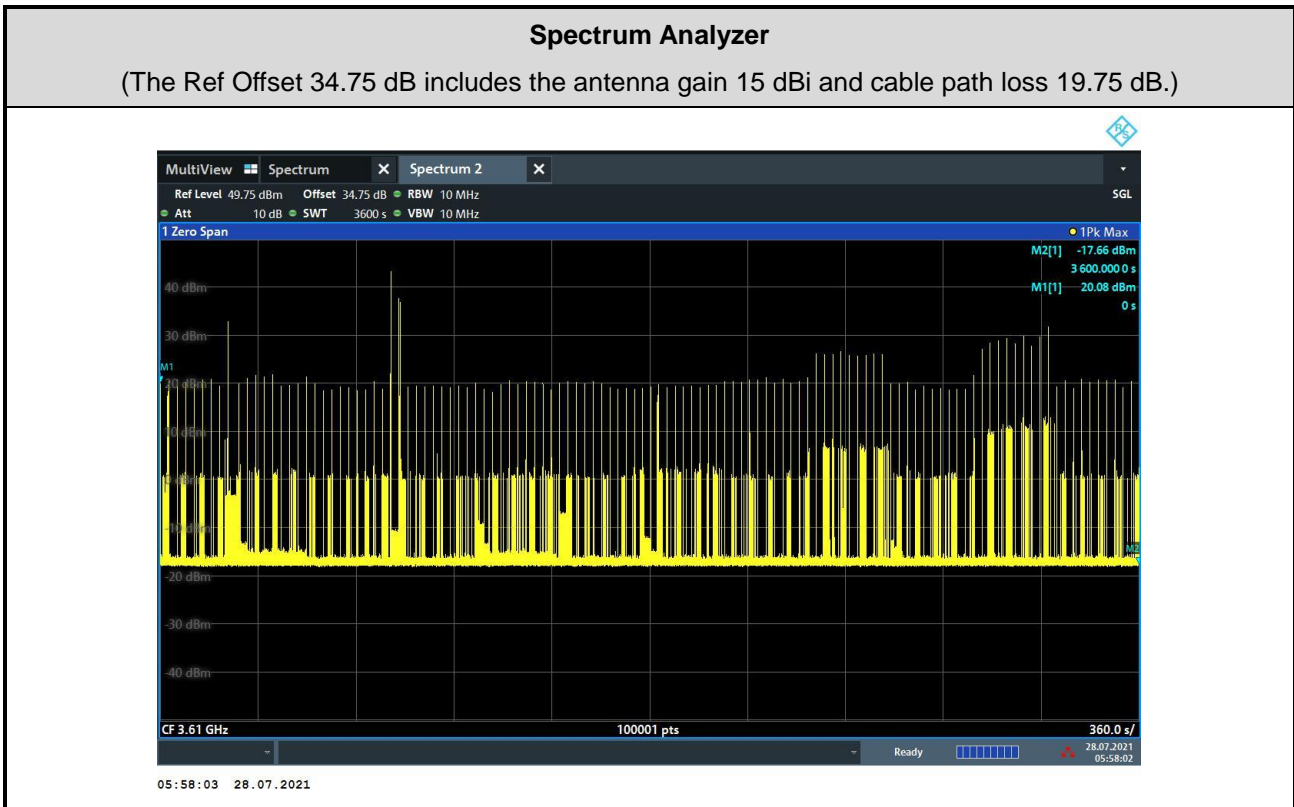


Calculated Result

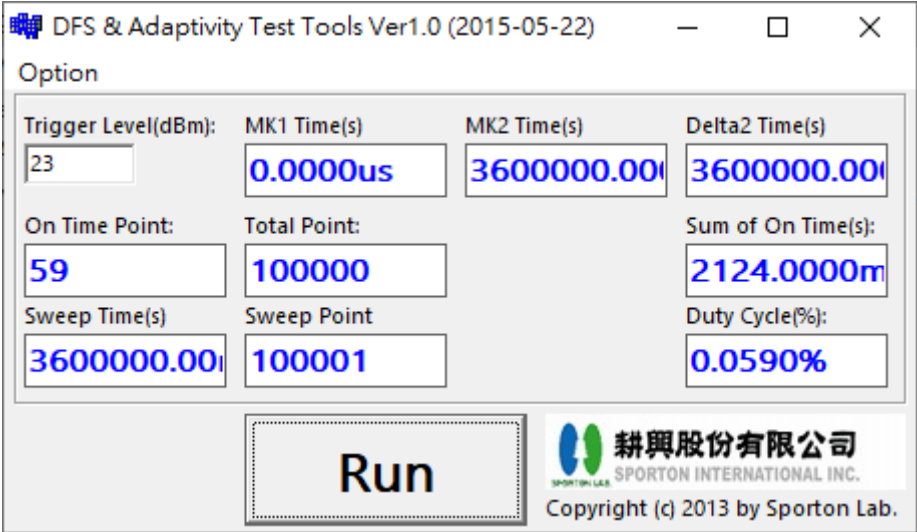

Option	Value
Trigger Level(dBm):	23
MK1 Time(s)	0.0000us
MK2 Time(s)	3600000.00
Delta2 Time(s)	3600000.00
On Time Point:	59
Total Point:	100000
Sum of On Time(s):	2124.0000m
Sweep Time(s)	3600000.00
Sweep Point	100001
Duty Cycle(%)	0.0590%

Run


耕興股份有限公司
 SPORTON INTERNATIONAL INC.
 Copyright (c) 2013 by Sporton Lab.

The sum of On Time (aggregated time from marker 1 to 2): 2.124s < 20s, Pass.


6. UUT register with the SAS irrespective of power levels

6.1 Test Procedure

1. Set the SAS test harness to grant UUT with the highest EIRP higher than 23dBm.
2. Check if UUT has successfully registered with SAS Test Harness, when operating EIRP less than 23 dBm.
3. After the UUT granted/authorized by the SAS, it can transmit with power less than the maxEIRP granted from SAS.

6.2 Result

The UUT can register with SAS under above operating conditions to meet the FCC criteria that the UUT will register with the SAS irrespective of power levels at which the device is set to operate – even below 23 dBm.

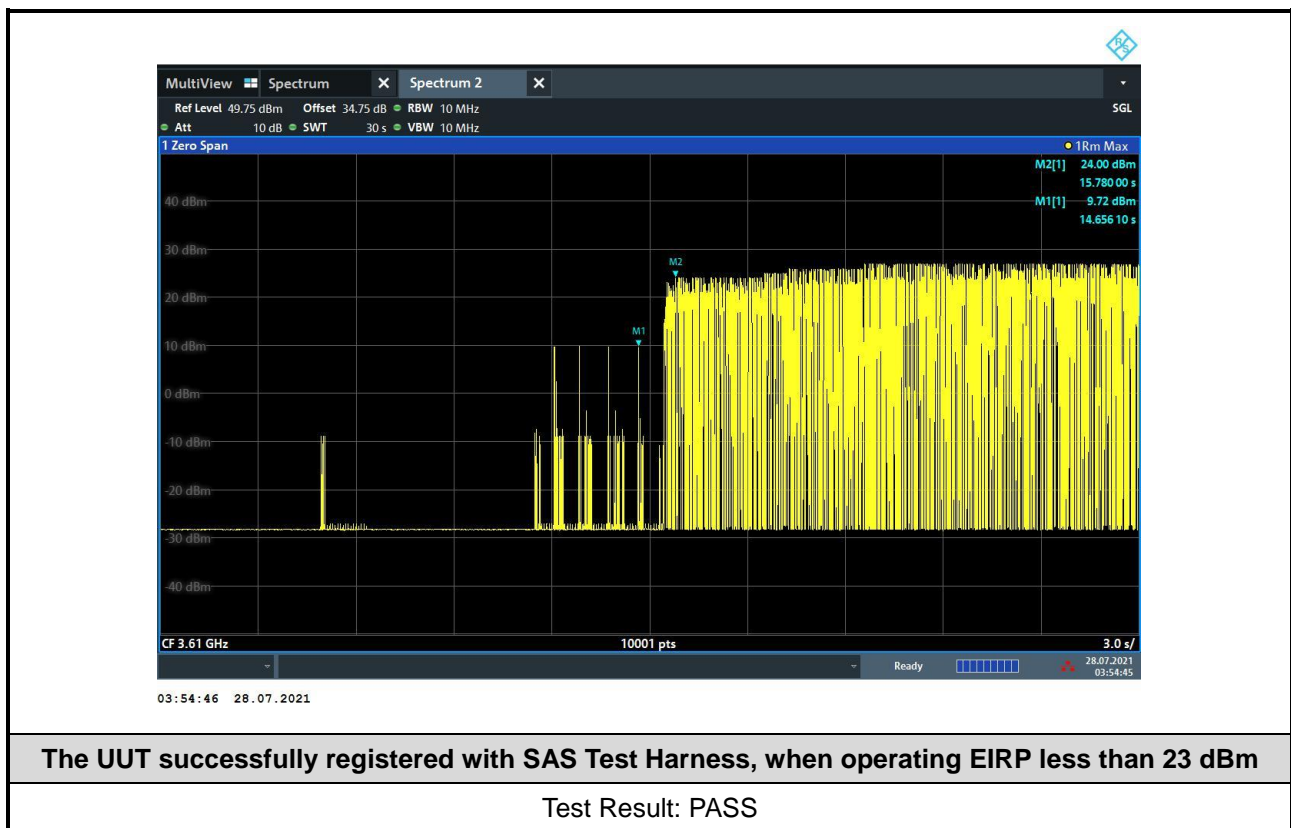

Note: The total offset 34.75 dB includes the antenna gain 15 dBi and cable path loss 19.75 dB.

Marker 1: The UUT successfully registered with SAS Test Harness, when operating 9.72 dBm EIRP.

Marker 2: After the UUT granted/authorized by the SAS, it can transmit with power less than the maxEIRP granted from SAS.

Appendix A. RF measurement plots


Appendix A.1 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement

Report Clause 4.35 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement

Center Frequency [MHz]	Bandwidth [MHz]	Granted MaxEIRP [dBm/MHz]	Conducted PSD [dBm/MHz]		Antenna Gain [dBi]	UUT total MaxEIRP [dBm/MHz]
			TX 0	TX 2		
3610	20	20	-1.501	-2.496	18.01	19.05
		24	3.306	1.613		23.56
		26	5.099	3.618		25.44
		28	7.153	5.936		27.61
		30	9.412	7.935		29.76
		32	11.318	10.061		31.76

Note : The total path loss is offset with 20.73 dB, includes cable path loss 16.75 dB and duty cycle factor 3.98 dB. The antenna gain is 18.01 dBi.

Duty cycle factor:

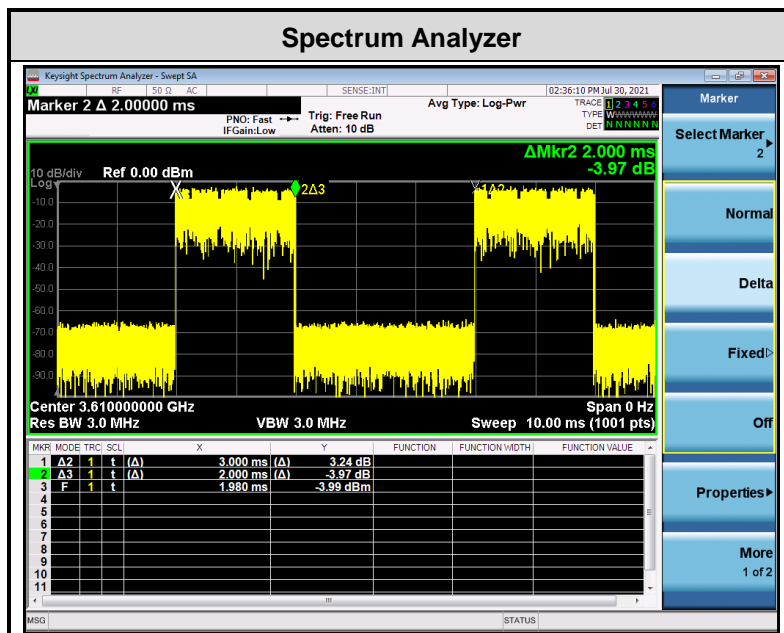



Note: The duty cycle value is 40%, add 10log(1/duty cycle) to the measured power level to compute the average power during continuous transmission.



Appendix A.1.1 Test Procedure

[WINNF.PT.C.HBT] UUT RF Transmit Power Measurement defined in clause 4.35 of this test report.

Appendix A.1.2 Test Result

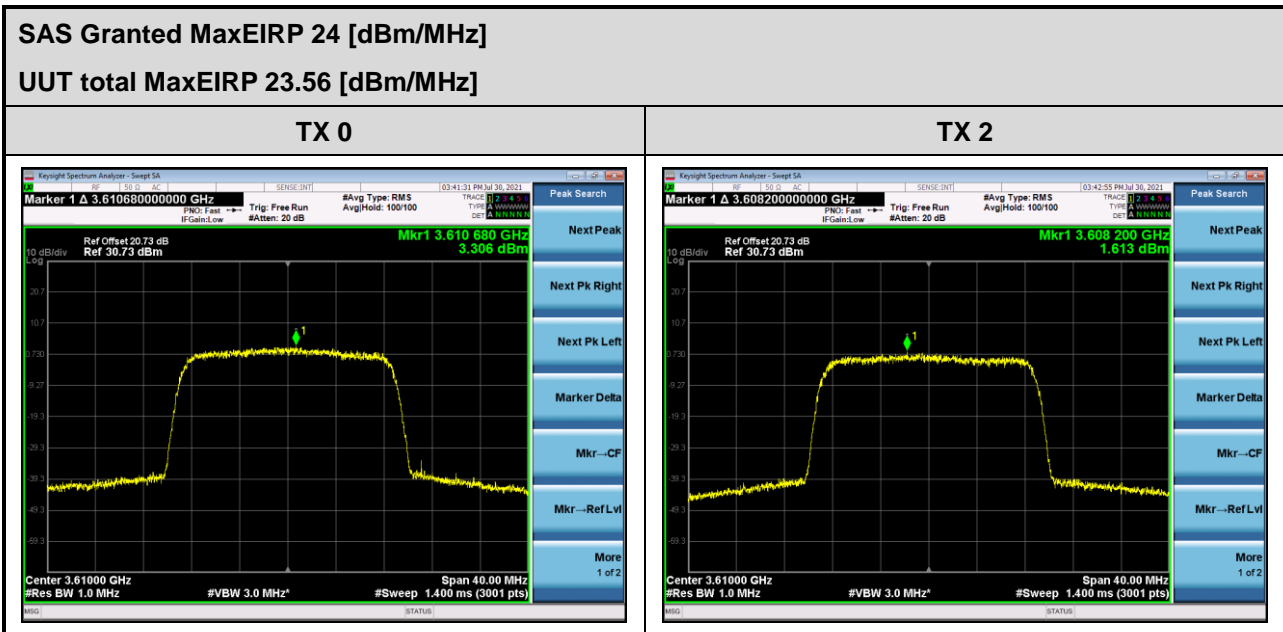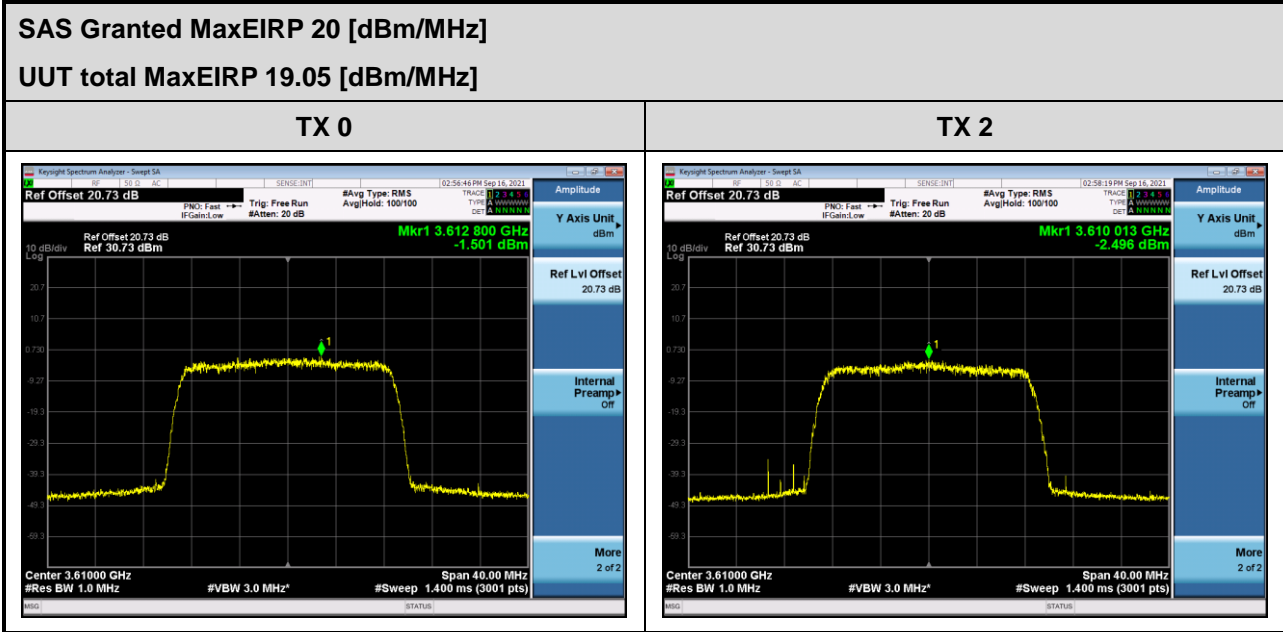





SAS Granted MaxEIRP 26 [dBm/MHz]

UUT total MaxEIRP 25.44 [dBm/MHz]

TX 0

TX 2

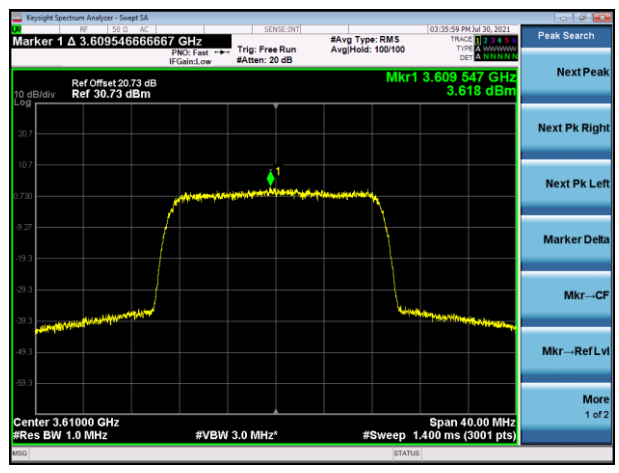
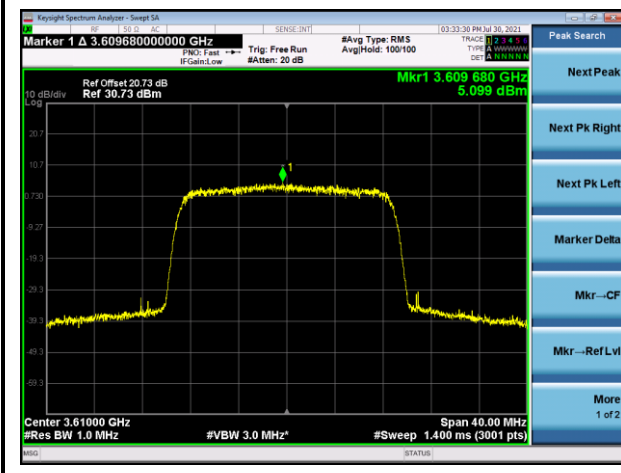


SAS Granted MaxEIRP 28 [dBm/MHz]

UUT total MaxEIRP 27.61 [dBm/MHz]

TX 0

TX 2

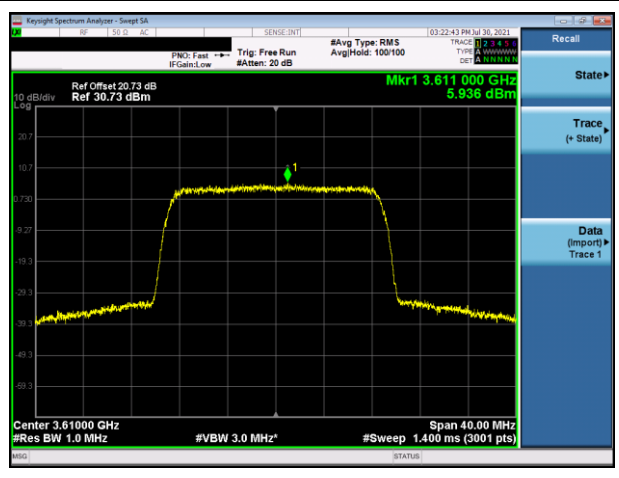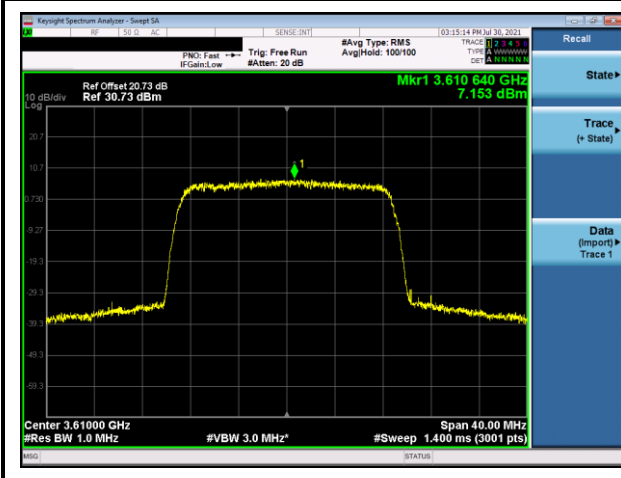





SAS Granted MaxEIRP 30 [dBm/MHz]

UUT total MaxEIRP 29.76 [dBm/MHz]

TX 0

TX 2

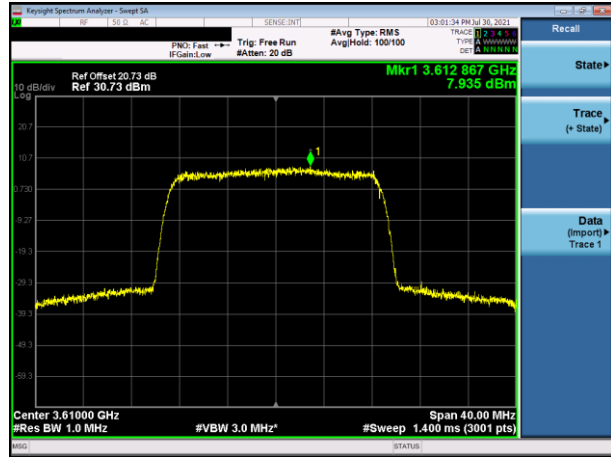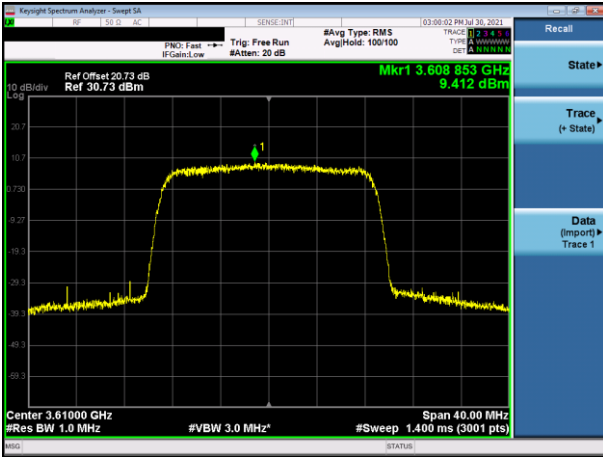

SAS Granted MaxEIRP 32 [dBm/MHz]

UUT total MaxEIRP 31.76 [dBm/MHz]

TX 0

TX 2

