

**JBHW-0706
PORTABLE BLUETOOTH
HANDSFREE KIT
BLUE J EASY**

**Installation and
User Guide**

(Please read this manual before installing and using)




Table of Contents

In the Box	4
Charging Handsfree	5
1. Connecting cable	5
2. Charging Indication	5
User Guide	6
1. Installation	6
2.. Using Handsfree	6
Specifications	9

In the Box

When you buy this handsfree kit, please check that all components are in the box.

- Hands free Main Body
- Sun visor Clip
- User Guide
- Charger and Charging Cable

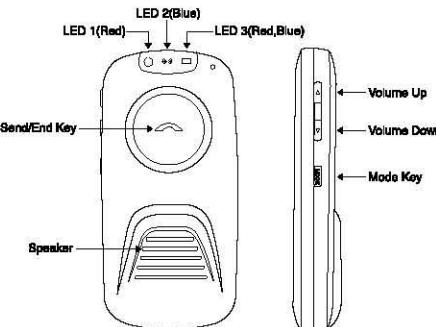

LED 1 : Bluetooth Status
LED 2 : Bluetooth Status
LED 3 : Charging indication

Charging Handsfree

1. Connecting cable

- : Connect the vehicle charger to power socket and then to handsfree
- The LED of vehicle charger is red on
- Specification of vehicle charger

2. Charging Indication

- Low battery: The LED 1 will be blinking every 500ms(LED 2 and LED 3 is Off).
- On charging: The LED 3 is on Red.
- Full charging: The LED 3 is on Blue.

User Guide

1. Installation

- 1) Assemble the sun visor clip on hands free main body.
- 2) Mount hands free on a sun visor of car.



2. Using Handsfree

1) POWER ON/OFF

- Press SEND key for 3 seconds to power on
- Press SEND key for 5 seconds to power off.(Both LED is off)



2) PAIRING

- Press SEND Key + Volume Up key for 3 seconds
- Blinking LED 2 (Blue) at every 800ms
- After Pairing, LED 1 is on red.
- If pairing is not completed within 1 minute, please try again.




3) CONNECTION : After paring at first, It will be connected automatically.

- Password : 0000
- After connecting with phone, LED 1 and LED 2 is on for 5 second.

And then the LEDs is blinking(on : 500msec, off : 5sec)

4) DISCONNECTION

- Press VOL_UP and VOL_DOWN key for 3 seconds
- LED 1 is blinking.
(on : 500msec, off : 5sec)



5) ANSWER CALL

- To answer a call, press send key shortly.

6) END CALL


- To end a call, press send key shortly.

7) LAST NUMBER REDIAL

- To redial the last number, press send key shortly.

8) AUTO CONNECTION / REJECT CALL / AUDIO TRANSFER

- AUTO CONNECTION
: To connect to the last phone, press mode key shortly.
- REJECT CALL
: To reject call on incoming call, press mode key shortly.
- AUDIO TRANSFER
: To transfer audio to phone on calling, press mode key shortly.




9) VOICE DIAL / 3WAY CALL

- VOICE DIAL
: After connecting with phone, press mode button for 3 seconds
- 3WAY CALL
: For 3 way call, press mode button for 3 seconds on calling.


10) SPEAKER VOLUME UP/DOWN

- VOLUME UP : Press VOL_UP button shortly.

- VOLUME DOWN : Press VOL_DOWN button shortly.
- 11) MIC VOLUME UP/DOWN
 - MIC VOLUME UP : Press MODE and VOL_UP button shortly.
 - MIC VOLUME DOWN : Press MODE and VOL_DOWN button shortly.



- 12) CLEAR PAIRING INFORMATION
 - To clear pairing Information, press SEND and MODE button for 3 seconds
 - LED 2 is blinking.(on : 150msec, off : 3sec)



Specifications

Bluetooth Compliance: Bluetooth version 2.0

Supported Bluetooth Profiles: Supports headset and handsfree profiles with automatics detection

Operating Range: Up to 10 meters

Operating Temperature: -22°C ~ 55°C

Frequency: 2.4 GHz

Talk Time: 15 hour

Stand -by Time: 900 hour

Charging Time: 3 hour and 30 minutes

Battery Type: Rechargeable Lithium Ion

Speaker: 2W, 4 Ω

Features:

Full Duplex

Voice Recognition Dialing (if phone supports)

Last Call Redial

Reject Incoming Call

Can also be charged directly from a PC via USB cable

Compact Size

Installation: Quick installation on sun visor

Warning

FCC compliance Information

This device complies with part 15 of FCC Rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference and
2. This device must accept any interference received.
Including interference that may cause undesired operation.

Information to User

This equipment has been tested and found to comply with the limits for a Class B digital device, Pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio Frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC WARNING

This equipment may generate or use radio frequency energy. Changes or modifications to this equipment may cause harmful interference unless the modifications are expressly approved in the instruction manual. The user could lose the authority to operate this equipment if an unauthorized change or modification is made.

CE 1177

User information Statement

Jaty electronics co., ltd Declares that this JBHW-0706 is in compliance with the essential requirements and other relevant provisions of directive 1999/5/EC.