

"High Frequency Ceramic Solutions"

2.4 GHz Mini Antenna, SMT

P/N 2450AT18A100


Detail Specification: 7/9/2018

Page 1 of 5

Let us help you with the antenna design, optimization, and tuning!

General Specifications

Part Number	2450AT18A100		
Frequency (MHz)	2400 - 2500		
Avg. Rad Efficiency*	76%		
Peak Gain (dBi typ.)	0.5		
Average Gain (dBi typ.)	-0.5		
Return Loss (dB)	9.5 min.	Storage Period	18 months max.
		Storage Temperature	-40 to +125°C
Impedance	50 Ω	Operating Temperature	-40 to +125°C
Input Power	2 Watts max. (CW)	Reel Quantity	3000

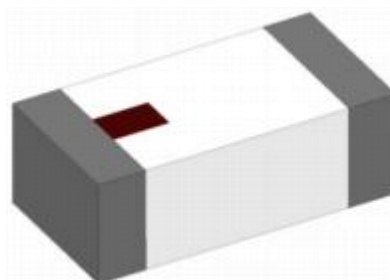


*Efficiency based on Johanson's standard evaluation board

Part Number Explanation

P/N Suffix	Packing Style	Bulk (loose)	Suffix = S	e.g. 2450AT18A100S
		T & R	Suffix = E	e.g. 2450AT18A100E
		100% Tin	Suffix = E or S	e.g. 2450AT18A100(E or S)
	Evaluation Board	2450AT18A100-EBSMA (see page 2&3 for details)		

Mechanical Dimensions


	In	mm
L	0.126 ± 0.008	3.20 ± 0.2
W	0.063 ± 0.008	1.60 ± 0.2
T	0.051 +.004/-.008	1.30 +0.1/-0.2
a	0.020 ± 0.012	0.50 ± 0.3

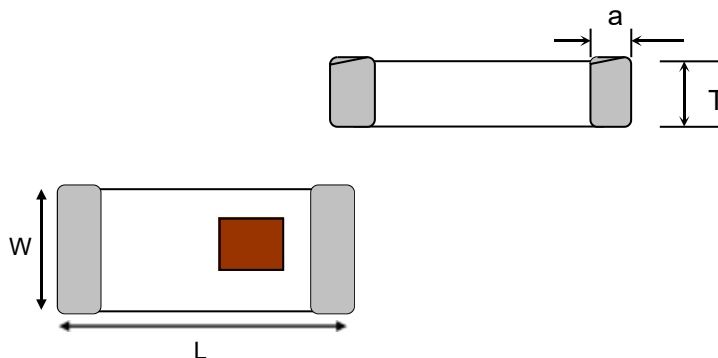

Want the layout file? Request it at: www.johansontechnology.com/ask-a-question

Terminal Configuration

No.	Function
1	FEED
2	NC

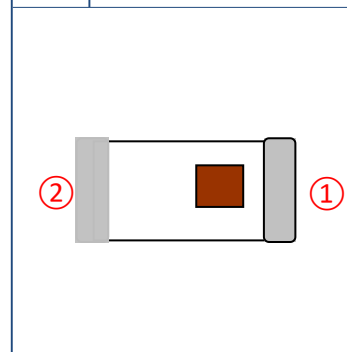

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 3.0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2018 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"



2.4GHz Mini Antenna, SMT

P/N 2450AT18A100

Detail Specification: 7/9/2018

Page 2 of 5

Mounting Considerations 1 : Evaluation Board

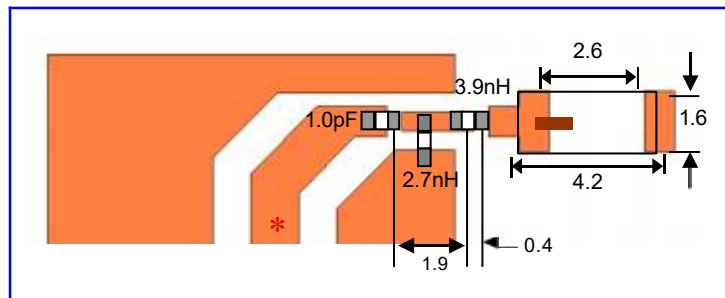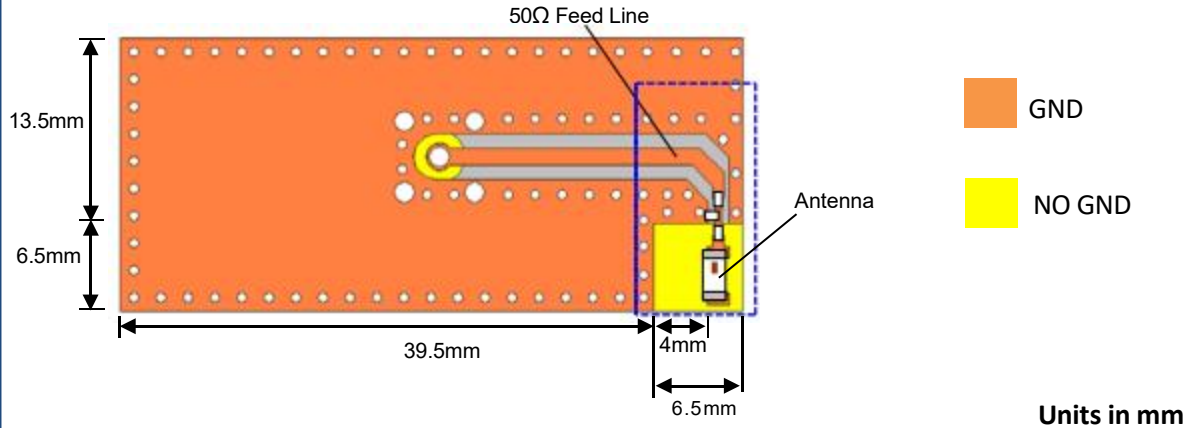

JTI P/N for Matching Circuit: Cap
(1.0pF): 500R07S1R0BV4T
Inductor (2.7nH): L-07C2N7SV6T
Inductor (3.9nH): L-07C3N9SV6T

To order a pre-tuned 50Ω EVB with a female SMA connector click
here: www.johansontechnology.com/request-a-sample

Reference p/n: 2450AT18A100-EBSMA

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 3.0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2018 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.4GHz Mini Antenna, SMT




P/N 2450AT18A100

Detail Specification: 7/9/2018

Page 3 of 5

Mounting Considerations 1: Typical Electrical Performance (T=25°C)

Return Loss with matching circuit @ +25C VSWR with matching circuit @ +25C and +125C

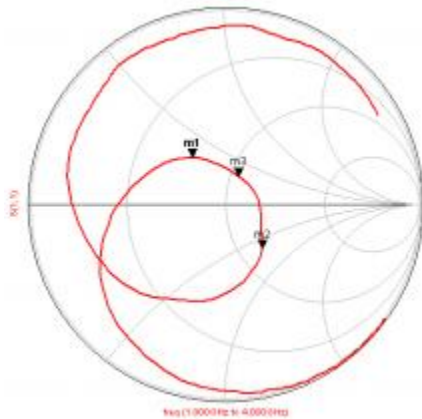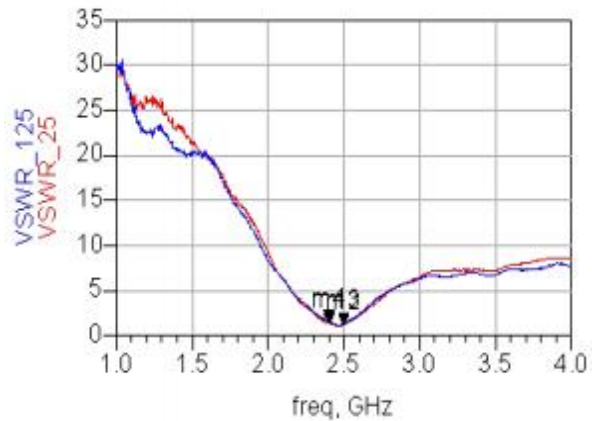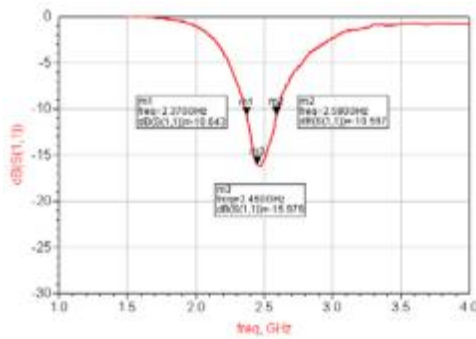

m1
freq=2.400GHz
VSWR_25=1.386
m2
freq=2.500GHz
VSWR_25=1.219
m4
freq=2.400GHz
VSWR_125=1.606
m3
freq=2.500GHz
VSWR_125=1.332

	2400MHz	2450MHz	2500MHz
Gain(dBi)	-0.86	0.5	0.3

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 3.0

2018 Johanson Technology, Inc. All Rights Reserved




"High Frequency Ceramic Solutions"

2.4GHz Mini Antenna, SMT
 Detail Specification: 7/9/2018

P/N 2450AT18A100
 Page 4 of 5

Mounting Considerations 1: Antenna Performance

Typical 2D radiation patterns @ 2.44GHz

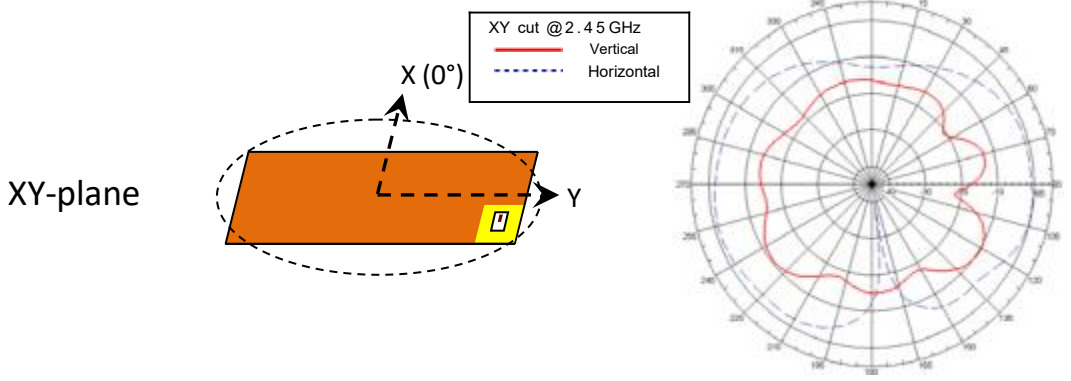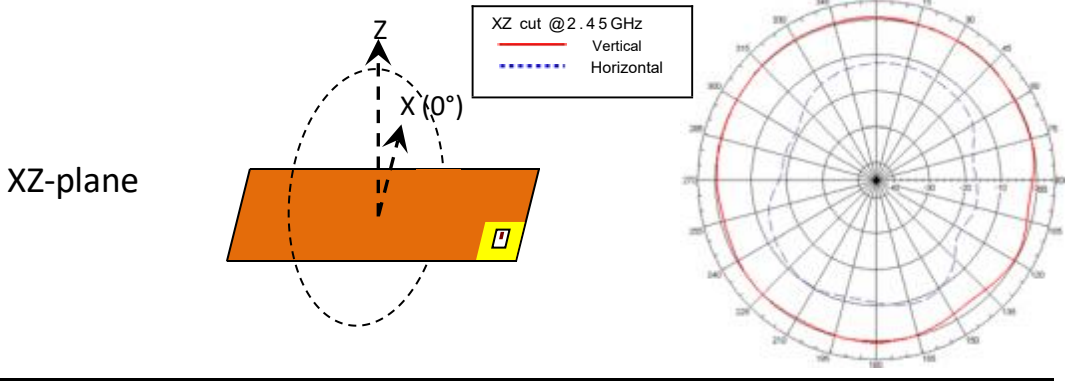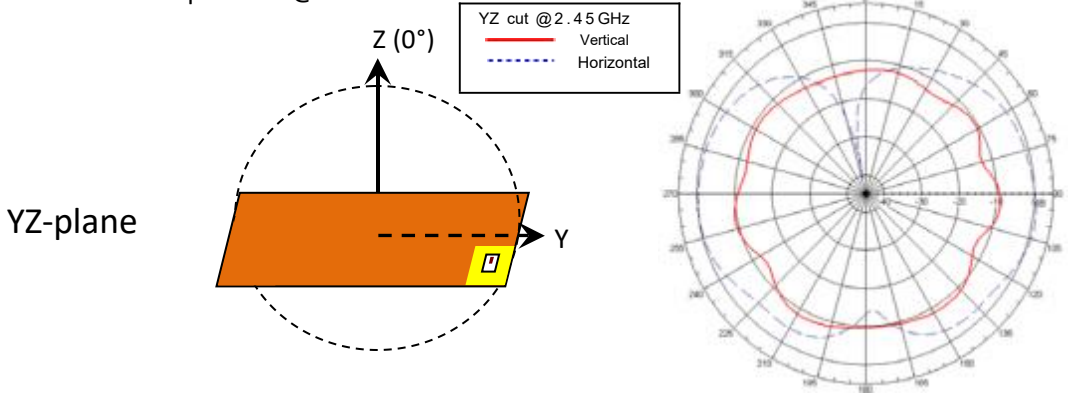

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



"High Frequency Ceramic Solutions"

2.4GHz Mini Antenna, SMT

P/N 2450AT18A100

Detail Specification: 7/9/2018

Page 5 of 5

Antenna tuning, optimization, and validation services:

www.johansontechnology.com/ipc-antenna-services

For more antennas and to download measured S- parameters, go to:

www.johansontechnology.com/antennas

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

MSL Info

www.johansontechnology.com/msl-rating

Packaging information

www.johansontechnology.com/tape-reel-packaging

For layout review contact our Applications Team at:

www.johansontechnology.com/ask-a-question

RoHS Compliance

www.johansontechnology.com/rohs-compliance

Need help designing the antenna in? Use our antenna design services!

www.johansontechnology.com/ipc-antenna-services

We provide 2 free layout reviews and if you need us to tune and characterize the antenna on your product (inside anechoic chamber) we can do that too. Small lab fee may apply for the latter.

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 3.0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2018 Johanson Technology, Inc. All Rights Reserved