

Instructions for SB-700-2 or SB-700-3

You will use the included *Set Screws* and *Splice Kit* (components shown below) to connect the solar panels.



1. Cut the included *PV Cable* to the two lengths needed for making positive (+) and negative (-) polarity connections from the *Splice Blocks* to the electronics compartment.
2. On the main solar panel, perform the following steps:
 - a. Feed the *PV Cables* through the grommet.



- b. Wire the positive (+) *PV Cable* to the positive (+) input of the *PV terminal block*.



WARNING: You must connect a single *PV Cable* at a time because the cables carry electricity and could short if you connect both *PV Cables* at the same time.


- c. Wire the negative (-) *PV Cable* to the negative (-) input.

3. Refer to the polarity diagram for your specific model. Then proceed to the *Splicing the PV Cabling* section.

SB-700-2 (Positive or Negative Polarity)



SB-700-3 (Positive or Negative Polarity)



Splicing the PV Cabling

These instructions show the SB-700-2; however, they apply to the SB-700-3 as well. For specifics, refer to the polarity diagram above for your model.



Note: Ensure that you use *PV Cables* of a single polarity for each *Splice Block*.

1. Cut the *Polyolefin Tubing* to a length of 88 mm minimum.



2. Cut the *PV Cable* to the length you require for your installation. Then strip its jacket to expose 13 mm of conductor wire.



3. Feed the included *PV Cable* from the electronics compartment of the main solar panel through the *Polyolefin Tubing*.




4. Feed the *Attached PV Cables* from all of the solar panels through the *Grommet* and insert them into the *Splice Block*.




5. Feed the included *PV Cable* through the *Grommet* and insert it into the *Splice Block*.




6. Insert three *Set Screws* into the *Splice Block* and tighten them.

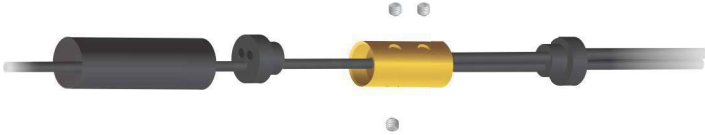

7. Insert the *Plugs* into any unused holes of the *Grommets* to prevent water ingress.



8. Push the *Grommets* into both ends of the *Splice Block*.



9. Slide the *Polyolefin Tubing* and center it over the *Splice Block* to completely cover it. Apply heat to the *Polyolefin Tubing* and shrink to fit.



10. Repeat these steps for the *PV Cables* of the other polarity.


Accessing the Configuration Interface

Access the SolarBeam Configuration Interface to configure settings and monitor power information, including PV input, battery status, and 24VDC output statistics.

1. Ensure that your host system is connected via Ethernet to your local network.
2. Configure the Ethernet adapter on your host system with a static IP address on the 192.168.1.x subnet.
3. Launch your web browser and type **https://192.168.1.40** in the address field. Press **enter** (PC) or **return** (Mac).



4. The login screen will appear. Enter **ubnt** in the *Username* and *Password* fields. Read the Ubiquiti License Agreement, and select *I agree to the terms of this License Agreement* to accept it. Click **Login**.

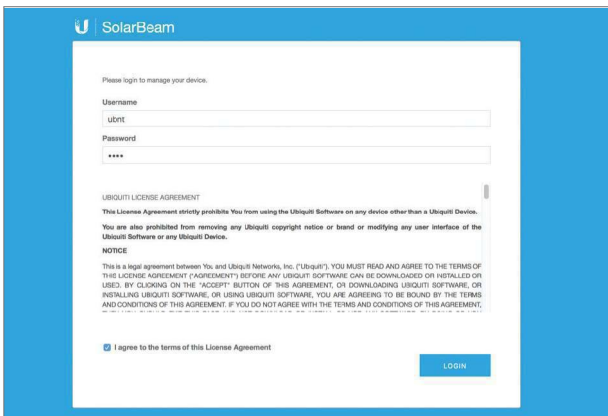A screenshot of the SolarBeam login interface. The page has a blue header with the SolarBeam logo and name. Below the header, the text "Please login to manage your device." is displayed. There are two input fields: "Username" with the value "ubnt" and "Password" with masked characters "****". Below the input fields is a section titled "UBIQUITI LICENSE AGREEMENT" containing a scrollable text area with the following content:


UBIQUITI LICENSE AGREEMENT
This License Agreement strictly prohibits You from using the Ubiquiti Software on any device other than a Ubiquiti Device. You are also prohibited from removing any Ubiquiti copyright notice or brand or modifying any user interface of the Ubiquiti Software or any Ubiquiti Device.

NOTICE
This is a legal agreement between You, and Ubiquiti Networks, Inc. ("Ubiquiti"). YOU MUST READ AND AGREE TO THE TERMS OF THIS LICENSE AGREEMENT ("AGREEMENT") BEFORE ANY UBIQUITI SOFTWARE CAN BE DOWNLOADED OR INSTALLED OR USED. BY CLICKING ON THE "ACCEPT" BUTTON OF THIS AGREEMENT, OR DOWNLOADING UBIQUITI SOFTWARE, OR INSTALLING UBIQUITI SOFTWARE, OR USING UBIQUITI SOFTWARE, YOU ARE AGREEING TO BE BOUND BY THE TERMS AND CONDITIONS OF THIS AGREEMENT. IF YOU DO NOT AGREE WITH THE TERMS AND CONDITIONS OF THIS AGREEMENT,

I agree to the terms of this License Agreement

LOGIN

5. The SolarBeam *Dashboard* screen will appear. Click **Services**.

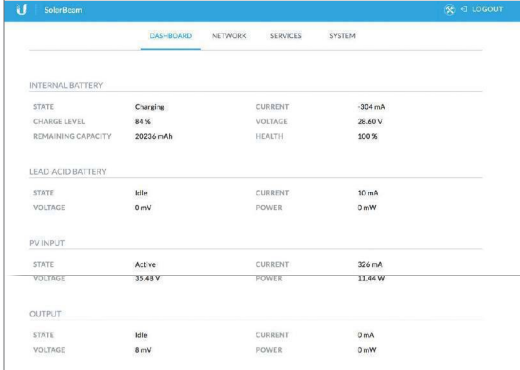

The screenshot shows the SolarBeam Dashboard with the following data:

INTERNAL BATTERY			
STATE	Charging	CURRENT	324 mA
CHARGE LEVEL	84%	VOLTAGE	26.60 V
REMAINING CAPACITY	20256 mAh	HEALTH	100%

LEAD ACID BATTERY			
STATE	Idle	CURRENT	10 mA
VOLTAGE	0 mV	POWER	0 mW


PIV INPUT			
STATE	Active	CURRENT	326 mA
VOLTAGE	35.43 V	POWER	11.64 W

OUTPUT			
STATE	Idle	CURRENT	0 mA
VOLTAGE	0 mV	POWER	0 mW

6. To enable 24VDC output, select **Output Voltage (24V DC)**.



WARNING: Before enabling 24VDC output, ensure that the connected device supports the supplied voltage.

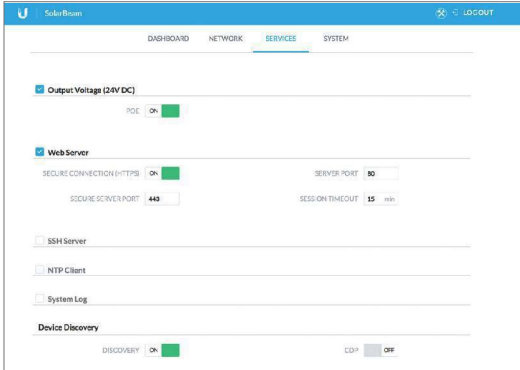

The screenshot shows the SolarBeam Services configuration page with the following settings:

- Output Voltage (24V DC)**
 - POE: ON
- Web Server**
 - SECURE CONNECTION (HTTPS): ON
 - SERVER PORT: 80
 - SECURE SERVER PORT: 443
 - SESSION TIMEOUT: 15 min
- SSH Server**
- NTP Client**
- System Log**
- Device Discovery**
 - DISCOVERY: ON
 - CDP: OFF

7. To output 24V passive PoE on the *LAN* port(s), select **Output Voltage (24V DC)** and then click **POE ON**.



Note: If your network device supports direct DC input, then we recommend using the *24VDC Out* port instead of PoE output on the *LAN* port(s).

8. Click **Save Changes**.

Specifications

SB-700-1, SB-700-2, SB-700-3	
Dimensions (per Panel)	1005 x 670 x 200 mm (39.57 x 26.38 x 7.87")
Weight	
SB-700	14.1 kg (42.11 lb)
SB-700-1	19.1 kg (42.11 lb)
SB-700-2	30.5 kg (67.24 lb)
SB-700-3	41.9 kg (92.37 lb)
Enclosure	UV Resistant Polycarbonate
Solar Module Output Power (STC)	
SB-700-1	100W
SB-700-2	200W
SB-700-3	300W
Networking Interface	(2) 10/100 Ethernet Ports
Processor	Atheros SoC
Memory	64 MB SDRAM
Storage	8 MB Flash
Button	Reset
Max. Power Consumption	5W
Power Source	PV Panel or Battery
PV Input Max. Voltage/Current	60V/10A
External Battery Charger Output	25.1 - 30.6V (Power-on Default: 27.9V) or 27.2V (Gel)
DC Output Voltage/Current	24V/1.7A
Wind Survivability	200 km/h (125 mph)
Snow Load Rating	5400 Pa
Vibration Test	IEC 68-2-6
Operating Temperature	-10 to 50° C (14 to 122° F)
Operating Humidity	5 to 95% Noncondensing
Mounting	Pole-Mount (Kit Included)
ESD/EMP Protection	± 24kV Contact/Air
Certifications	CE, FCC, IC, UL

Safety Notices

1. Read, follow, and keep these instructions.
2. Heed all warnings.
3. Only use attachments/accessories specified by the manufacturer.



WARNING: Do not use this product in location that can be submerged by water.



WARNING: Avoid using this product during an electrical storm. There may be a remote risk of electric shock from lightning.

Electrical Safety Information

1. Compliance is required with respect to voltage, frequency, and current requirements indicated on the manufacturer's label. Connection to a different power source than those specified may result in improper operation, damage to the equipment or pose a fire hazard if the limitations are not followed.
2. There are no operator serviceable parts inside this equipment. Service should be provided only by a qualified service technician.

Limited Warranty

UBIQUITI NETWORKS, Inc (“UBIQUITI NETWORKS”) warrants that the product(s) furnished hereunder (the “Product(s)”) shall be free from defects in material and workmanship for a period of one (1) year from the date of shipment by UBIQUITI NETWORKS under normal use and operation. UBIQUITI NETWORKS’ sole and exclusive obligation and liability under the foregoing warranty shall be for UBIQUITI NETWORKS, at its discretion, to repair or replace any Product that fails to conform to the above warranty during the above warranty period. The expense of removal and reinstallation of any Product is not included in this warranty. The warranty period of any repaired or replaced Product shall not extend beyond its original term.

Warranty Conditions

The above warranty does not apply if the Product:

- (I) has been modified and/or altered, or an addition made thereto, except by Ubiquiti Networks, or Ubiquiti Networks’ authorized representatives, or as approved by Ubiquiti Networks in writing;
- (II) has been painted, rebranded or physically modified in any way;
- (III) has been damaged due to errors or defects in cabling;
- (IV) has been subjected to misuse, abuse, negligence, abnormal physical, electromagnetic or electrical stress, including lightning strikes, or accident;
- (V) has been damaged or impaired as a result of using third party firmware;
- (VI) has no original Ubiquiti MAC label, or is missing any other original Ubiquiti label(s); or
- (VII) has not been received by Ubiquiti within 30 days of issuance of the RMA.

In addition, the above warranty shall apply only if: the product has been properly installed and used at all times in accordance, and in all material respects, with the applicable Product documentation; all Ethernet cabling runs use CAT5 (or above), and for outdoor installations, shielded Ethernet cabling is used, and for indoor installations, in cabling requirements are followed.

Returns

No Products will be accepted for replacement or repair without obtaining a Return Materials Authorization (RMA) number from UBIQUITI NETWORKS during the warranty period, and the Products being received at UBIQUITI NETWORKS' facility freight prepaid in accordance with the RMA process of UBIQUITI NETWORKS. Products returned without an RMA number will not be processed and will be returned freight collect or subject to disposal. Information on the RMA process and obtaining an RMA number can be found at: www.ubnt.com/support/warranty

Disclaimer

EXCEPT FOR ANY EXPRESS WARRANTIES PROVIDED HEREIN, UBIQUITI NETWORKS, ITS AFFILIATES, AND ITS AND THEIR THIRD PARTY DATA, SERVICE, SOFTWARE AND HARDWARE PROVIDERS HEREBY DISCLAIM AND MAKE NO OTHER REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, REPRESENTATIONS, GUARANTEES, OR WARRANTIES OF MERCHANTABILITY, ACCURACY, QUALITY OF SERVICE OR RESULTS, AVAILABILITY, SATISFACTORY QUALITY, LACK OF VIRUSES, QUIET ENJOYMENT, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT AND ANY WARRANTIES ARISING FROM ANY COURSE OF DEALING, USAGE OR TRADE PRACTICE IN CONNECTION WITH SUCH PRODUCTS AND SERVICES. BUYER ACKNOWLEDGES THAT NEITHER UBIQUITI NETWORKS NOR ITS THIRD PARTY PROVIDERS CONTROL BUYER'S EQUIPMENT OR THE TRANSFER OF DATA OVER COMMUNICATIONS FACILITIES, INCLUDING THE INTERNET, AND THAT THE PRODUCTS AND SERVICES MAY BE SUBJECT TO LIMITATIONS, INTERRUPTIONS, DELAYS, CANCELLATIONS AND OTHER PROBLEMS INHERENT IN THE USE OF COMMUNICATIONS FACILITIES. UBIQUITI NETWORKS, ITS AFFILIATES AND ITS AND THEIR THIRD PARTY PROVIDERS ARE NOT RESPONSIBLE FOR ANY INTERRUPTIONS, DELAYS, CANCELLATIONS, DELIVERY FAILURES, DATA LOSS, CONTENT CORRUPTION, PACKET LOSS, OR OTHER DAMAGE RESULTING FROM ANY OF THE FOREGOING. In addition, UBIQUITI NETWORKS does not warrant that the operation of the Products will be error-free or that operation will be uninterrupted. In no event shall UBIQUITI NETWORKS be responsible for damages or claims of any nature or description relating to system performance, including coverage, buyer's selection of products (including the Products) for buyer's application and/or failure of products (including the Products) to meet government or regulatory requirements.

Limitation of Liability

EXCEPT TO THE EXTENT PROHIBITED BY LOCAL LAW, IN NO EVENT WILL UBIQUITI OR ITS SUBSIDIARIES, AFFILIATES OR SUPPLIERS BE LIABLE FOR DIRECT, SPECIAL, INCIDENTAL, CONSEQUENTIAL OR OTHER DAMAGES (INCLUDING LOST PROFIT, LOST DATA, OR DOWNTIME COSTS), ARISING OUT OF THE USE, INABILITY TO USE, OR THE RESULTS OF USE OF THE PRODUCT, WHETHER BASED IN WARRANTY, CONTRACT, TORT OR OTHER LEGAL THEORY, AND WHETHER OR NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Note

Some countries, states and provinces do not allow exclusions of implied warranties or conditions, so the above exclusion may not apply to you. You may have other rights that vary from country to country, state to state, or province to province. Some countries, states and provinces do not allow the exclusion or limitation of liability for incidental or consequential damages, so the above limitation may not apply to you. EXCEPT TO THE EXTENT ALLOWED BY LOCAL LAW, THESE WARRANTY TERMS DO NOT EXCLUDE, RESTRICT OR MODIFY, AND ARE IN ADDITION TO, THE MANDATORY STATUTORY RIGHTS APPLICABLE TO THE LICENSE OF ANY SOFTWARE (EMBEDDED IN THE PRODUCT) TO YOU. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to any transactions regarding the sale of the Products.

Compliance

FCC

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operations of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

This radio transmitter (FCC ID: SWX-SB700 / IC: 6545A-SB700) has been approved by FCC/ISED to operate with the pcb antenna with the maximum 2dBi gain and 50 Ohm antenna impedance. Different type of antenna, which has a gain greater than the maximum gain, are strictly prohibited for use with this device.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Industry Canada

CAN ICES-3(A)/NMB-3(A)

This Class A digital apparatus complies with Canadian CAN ICES-003. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

CAN ICES-3(A)/NMB-3(A)

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

Pour réduire le risque d'interférence aux autres utilisateurs, le type d'antenne et son gain doivent être choisis de façon que la puissance isotrope rayonnée équivalente (PIRE) ne dépasse pas ce qui est nécessaire pour une communication réussie.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IMPORTANT NOTE:

IC Radiation Exposure Statement:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps

Australia and New Zealand



Warning: This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

CE Marking

CE marking on this product represents the product is in compliance with all directives that are applicable to it.



RoHS/WEEE Compliance Statement



English

European Directive 2012/19/EU requires that the equipment bearing this symbol on the product and/or its packaging must not be disposed of with unsorted municipal waste. The symbol indicates that this product should be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electric and electronic equipment via designated collection facilities appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about the disposal of your old equipment, please contact your local authorities, waste disposal service, or the shop where you purchased the product.

Deutsch

Die Europäische Richtlinie 2012/19/EU verlangt, dass technische Ausrüstung, die direkt am Gerät und/oder an der Verpackung mit diesem Symbol versehen ist, nicht zusammen mit unsortiertem Gemeindeabfall entsorgt werden darf. Das Symbol weist darauf hin, dass das Produkt von regulärem Hausaltmüll getrennt entsorgt werden sollte. Es liegt in Ihrer Verantwortung, dieses Gerät und andere elektrische und elektronische Geräte über die dafür zuständigen und von der Regierung oder örtlichen Behörden dazu bestimmten Sammelstellen zu entsorgen. Ordnungsgemäßes Entsorgen und Recyceln trägt dazu bei, potentielle negative Folgen für Umwelt und die menschliche Gesundheit zu vermeiden. Wenn Sie weitere Informationen zur Entsorgung Ihrer Altgeräte benötigen, wenden Sie sich bitte an die örtlichen Behörden oder städtischen Entsorgungsdienste oder an den Händler, bei dem Sie das Produkt erworben haben.

Español

La Directiva 2012/19/UE exige que los equipos que lleven este símbolo en el propio aparato y/o en su embalaje no deben eliminarse junto con otros residuos urbanos no seleccionados. El símbolo indica que el producto en cuestión debe separarse de los residuos domésticos convencionales con vistas a su eliminación. Es responsabilidad suya desechar este y cualesquiera otros aparatos eléctricos y electrónicos a través de los puntos de recogida que ponen a su disposición el gobierno y las autoridades locales. Al desechar y reciclar correctamente estos aparatos estará contribuyendo a evitar posibles consecuencias negativas para el medio ambiente y la salud de las personas. Si desea obtener información más detallada sobre la eliminación segura de su aparato usado, consulte a las autoridades locales, al servicio de recogida y eliminación de residuos de su zona o pregunte en la tienda donde adquirió el producto.

Français

La directive européenne 2012/19/UE exige que l'équipement sur lequel est apposé ce symbole sur le produit et/ou son emballage ne soit pas jeté avec les autres ordures ménagères. Ce symbole indique que le produit doit être éliminé dans un circuit distinct de celui pour les déchets des ménages. Il est de votre responsabilité de jeter ce matériel ainsi que tout autre matériel électrique ou électronique par les moyens de collecte indiqués par le gouvernement et les pouvoirs publics des collectivités territoriales. L'élimination et le recyclage en bonne et due forme ont pour but de lutter contre l'impact néfaste potentiel de ce type de produits sur l'environnement et la santé publique. Pour plus d'informations sur le mode d'élimination de votre ancien équipement, veuillez prendre contact avec les pouvoirs publics locaux, le service de traitement des déchets, ou l'endroit où vous avez acheté le produit.

Italiano

La direttiva europea 2012/19/UE richiede che le apparecchiature contrassegnate con questo simbolo sul prodotto e/o sull'imballaggio non siano smaltite insieme ai rifiuti urbani non differenziati. Il simbolo indica che questo prodotto non deve essere smaltito insieme ai normali rifiuti domestici. È responsabilità del proprietario smaltire sia questi prodotti sia le altre apparecchiature elettriche ed elettroniche mediante le specifiche strutture di raccolta indicate dal governo o dagli enti pubblici locali. Il corretto smaltimento ed il riciclaggio aiuteranno a prevenire conseguenze potenzialmente negative per l'ambiente e per la salute dell'essere umano. Per ricevere informazioni più dettagliate circa lo smaltimento delle vecchie apparecchiature in Vostro possesso, Vi invitiamo a contattare gli enti pubblici di competenza, il servizio di smaltimento rifiuti o il negozio nel quale avete acquistato il prodotto.

Declaration of Conformity

български [Bulgarian]	С настоящото UBIQUITI NETWORKS декларира, че този тип радиосъоръжение това устройство UBIQUITI NETWORKS е в съответствие с Директива 2014/53/ЕС. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: www.ubnt.com/compliance
Hrvatski [Croatian]	UBIQUITI NETWORKS ovime izjavljuje da je radijska oprema tipa ovaj UBIQUITI NETWORKS uređaj u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi: www.ubnt.com/compliance
Čeština [Czech]	Tímto UBIQUITI NETWORKS prohlašuje, že typ rádiového zařízení že toto UBIQUITI NETWORKS zařízení je v souladu se směrnici 2014/53/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese: www.ubnt.com/compliance
Dansk [Danish]	Hermed erklærer UBIQUITI NETWORKS, at radioudstyrstypen denne UBIQUITI NETWORKS enhed er i overensstemmelse med direktiv 2014/53/EU. EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: www.ubnt.com/compliance
Nederlands [Dutch]	Hierbij verklaar ik, UBIQUITI NETWORKS, dat het type radioapparatuur UBIQUITI NETWORKS apparaat conform is met Richtlijn 2014/53/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: www.ubnt.com/compliance
English	Hereby, UBIQUITI NETWORKS declares that the radio equipment type this UBIQUITI NETWORKS device is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.ubnt.com/compliance
Eesti keel [Estonian]	Käesolevaga deklareerib UBIQUITI NETWORKS, et käesolev raadioseadme tüüp antud UBIQUITI NETWORKS seade vastab direktiivi 2014/53/EL nõuetele. ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: www.ubnt.com/compliance
Suomi [Finnish]	UBIQUITI NETWORKS vakuuttaa, että radiolaitetyyppi että tämä UBIQUITI NETWORKS laite on direktiivin 2014/53/EU mukainen. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: www.ubnt.com/compliance
Français [French]	Le soussigné, UBIQUITI NETWORKS, déclare que l'équipement radioélectrique du type l'appareil UBIQUITI NETWORKS est conforme à la directive 2014/53/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante: www.ubnt.com/compliance
Deutsch [German]	Hiermit erklärt UBIQUITI NETWORKS, dass der Funkanlagentyp dieses UBIQUITI NETWORKS Gerät der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: www.ubnt.com/compliance
Ελληνικά [Greek]	Με την παρούσα ο/η UBIQUITI NETWORKS, δηλώνει ότι ο ραδιοεξοπλισμός αυτή η συσκευή UBIQUITI NETWORKS πληροί την οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: www.ubnt.com/compliance
Magyar [Hungarian]	UBIQUITI NETWORKS igazolja, hogy a UBIQUITI NETWORKS készülék típusú rádióberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen: www.ubnt.com/compliance
Íslenska [Icelandic]	Hér með lýsir UBIQUITI NETWORKS yfir því að þetta UBIQUITI NETWORKS tæki er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 2014/53/EU. Fullur texti ESB samræmisýfirlýsing er að finna á eftirfarandi netfangi: www.ubnt.com/compliance

Italiano [Italian]	Il fabbricante, UBIQUITI NETWORKS, dichiara che il tipo di apparecchiatura radio questo dispositivo UBIQUITI NETWORKS è conforme alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: www.ubnt.com/compliance
Latvių kalba [Latvian]	Ar šio UBIQUITI NETWORKS deklarė, ka radioiekārta ka UBIQUITI NETWORKS ierice atbilst Direktīvai 2014/53/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: www.ubnt.com/compliance
Lietuvių kalba [Lithuanian]	Aš, UBIQUITI NETWORKS, patvirtinu, kad radijo įrenginys šio UBIQUITI NETWORKS įrenginys atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu: www.ubnt.com/compliance
Malti [Maltese]	B'dan, UBIQUITI NETWORKS, niddikjara li dan it-tip ta' taghmir tar-radju dan il-mezz UBIQUITI NETWORKS huwa konformi mad-Direttiva 2014/53/UE. Id-dikjarazzjoni tal-konformità tista' tiġi kkonsultata minn www.ubnt.com/compliance
Norsk [Norwegian]	UBIQUITI NETWORKS erklærer herved at utstyret denne UBIQUITI NETWORKS enheten er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 2014/53/EU. Den fulle teksten til EU-samsvarserklæringen er tilgjengelig på følgende internetadresse: www.ubnt.com/compliance
Polski [Polish]	UBIQUITI NETWORKS niniejszym oświadcza, że typ urządzenia radiowego urządzenie UBIQUITI NETWORKS, jest zgodny z dyrektywą 2014/53/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: www.ubnt.com/compliance
Português [Portuguese]	O(a) abaixo assinado(a) UBIQUITI NETWORKS declara que o presente tipo de equipamento de rádio este dispositivo UBIQUITI NETWORKS está em conformidade com a Diretiva 2014/53/UE. O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: www.ubnt.com/compliance
Română [Romanian]	Prin prezenta, UBIQUITI NETWORKS declară că tipul de echipamente radio acest dispozitiv UBIQUITI NETWORKS este în conformitate cu Directiva 2014/53/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet: www.ubnt.com/compliance
Slovenčina [Slovak]	UBIQUITI NETWORKS týmto vyhlasuje, že rádiové zariadenie typu toto UBIQUITI NETWORKS zariadenie je v súlade so smernicou 2014/53/EÚ. Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: www.ubnt.com/compliance
Slovenščina [Slovenian]	UBIQUITI NETWORKS potrjuje, da je tip radijske opreme ta naprava UBIQUITI NETWORKS skladen z Direktivo 2014/53/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: www.ubnt.com/compliance
Español [Spanish]	Por la presente, UBIQUITI NETWORKS declara que el tipo de equipo radioeléctrico este dispositivo UBIQUITI NETWORKS es conforme con la Directiva 2014/53/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: www.ubnt.com/compliance
Svenska [Swedish]	Härmed försäkras UBIQUITI NETWORKS att denna typ av radioutrustning denna UBIQUITI NETWORKS enhet överensstämmer med direktiv 2014/53/EU. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: www.ubnt.com/compliance

Online Resources

Support help.ubnt.com

Community community.ubnt.com

Downloads downloads.ubnt.com



www.ubnt.com

Ubiquiti Networks, Inc.
685 Third Avenue, 27th Floor
New York, NY 10017
USA

©2017 Ubiquiti Networks, Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, the Ubiquiti beam logo, SolarBeam, and TOUGH Cable are trademarks or registered trademarks of Ubiquiti Networks, Inc. in the United States and in other countries. All other trademarks are the property of their respective owners.



640-00293-03