



Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	8.56	0.17	8.73	24	Pass
NVNT	a	5200	Ant1	8.27	0.17	8.44	24	Pass
NVNT	a	5240	Ant1	8.5	0.17	8.67	24	Pass
NVNT	a	5745	Ant1	9.02	0.17	9.19	30	Pass
NVNT	a	5785	Ant1	9.29	0.17	9.46	30	Pass
NVNT	a	5825	Ant1	8.54	0.17	8.71	30	Pass
NVNT	a	5180	Ant2	8.82	0	8.82	24	Pass
NVNT	a	5200	Ant2	8.45	0	8.45	24	Pass
NVNT	a	5240	Ant2	8.29	0	8.29	24	Pass
NVNT	a	5745	Ant2	9.29	0	9.29	30	Pass
NVNT	a	5785	Ant2	9.52	0	9.52	30	Pass
NVNT	a	5825	Ant2	9.06	0	9.06	30	Pass
NVNT	a	5180	Ant3	8.8	0.17	8.97	24	Pass
NVNT	a	5200	Ant3	8.88	0.17	9.05	24	Pass
NVNT	a	5240	Ant3	9.34	0.17	9.51	24	Pass
NVNT	a	5745	Ant3	8.22	0.17	8.39	30	Pass
NVNT	a	5785	Ant3	8.43	0.17	8.6	30	Pass
NVNT	a	5825	Ant3	7.44	0.17	7.61	30	Pass
NVNT	n20	5180	Ant1	8.01	0.18	8.19	24	Pass
NVNT	n20	5200	Ant1	7.77	0.18	7.95	24	Pass
NVNT	n20	5240	Ant1	7.9	0.18	8.08	24	Pass
NVNT	n20	5745	Ant1	7.8	0.18	7.98	30	Pass
NVNT	n20	5785	Ant1	8.08	0.18	8.26	30	Pass
NVNT	n20	5825	Ant1	7.37	0.18	7.55	30	Pass
NVNT	n20	5180	Ant2	8.11	0.18	8.29	24	Pass
NVNT	n20	5200	Ant2	7.72	0.18	7.9	24	Pass
NVNT	n20	5240	Ant2	7.73	0.18	7.91	24	Pass
NVNT	n20	5745	Ant2	8.71	0.18	8.89	30	Pass
NVNT	n20	5785	Ant2	8.95	0.18	9.13	30	Pass
NVNT	n20	5825	Ant2	8.46	0.18	8.64	30	Pass
NVNT	n20	5180	Ant3	8.26	0.18	8.44	24	Pass
NVNT	n20	5200	Ant3	8.26	0.18	8.44	24	Pass
NVNT	n20	5240	Ant3	8.74	0.18	8.92	24	Pass
NVNT	n20	5745	Ant3	7.78	0.18	7.96	30	Pass
NVNT	n20	5785	Ant3	7.85	0.18	8.03	30	Pass
NVNT	n20	5825	Ant3	6.92	0.18	7.1	30	Pass
NVNT	n20	5180	Ant1	8.78	0.18	8.96	/	Pass
NVNT	n20	5180	Ant2	8.59	0.18	8.77	/	Pass
NVNT	n20	5180	Ant3	8.37	0.18	8.55	/	Pass
NVNT	n20	5180	Sum	13.35	0.18	13.53	19.72	Pass
NVNT	n20	5200	Ant1	8.55	0.18	8.73	/	Pass
NVNT	n20	5200	Ant2	8.26	0.18	8.44	/	Pass
NVNT	n20	5200	Ant3	8.4	0.18	8.58	/	Pass
NVNT	n20	5200	Sum	13.18	0.18	13.36	19.72	Pass
NVNT	n20	5240	Ant1	8.43	0.18	8.61	/	Pass
NVNT	n20	5240	Ant2	8.33	0.18	8.51	/	Pass
NVNT	n20	5240	Ant3	8.95	0.18	9.13	/	Pass
NVNT	n20	5240	Sum	13.35	0.18	13.53	19.72	Pass
NVNT	n20	5745	Ant1	8.14	0.18	8.32	/	Pass
NVNT	n20	5745	Ant2	9.16	0.18	9.34	/	Pass
NVNT	n20	5745	Ant3	7.79	0.18	7.97	/	Pass
NVNT	n20	5745	Sum	13.17	0.18	13.35	25.72	Pass
NVNT	n20	5785	Ant1	8.56	0.18	8.74	/	Pass
NVNT	n20	5785	Ant2	9.18	0.18	9.36	/	Pass
NVNT	n20	5785	Ant3	7.87	0.18	8.05	/	Pass
NVNT	n20	5785	Sum	13.34	0.18	13.52	25.72	Pass
NVNT	n20	5825	Ant1	7.72	0.18	7.9	/	Pass



NVNT	n20	5825	Ant2	8.75	0.18	8.93	/	Pass
NVNT	n20	5825	Ant3	7.1	0.18	7.28	/	Pass
NVNT	n20	5825	Sum	12.68	0.18	12.86	25.72	Pass
NVNT	n40	5190	Ant1	7.99	0.35	8.34	24	Pass
NVNT	n40	5230	Ant1	7.93	0.35	8.28	24	Pass
NVNT	n40	5755	Ant1	7.86	0.36	8.22	30	Pass
NVNT	n40	5795	Ant1	7.91	0.36	8.27	30	Pass
NVNT	n40	5190	Ant2	7.92	0.36	8.28	24	Pass
NVNT	n40	5230	Ant2	7.65	0.36	8.01	24	Pass
NVNT	n40	5755	Ant2	8.55	0.35	8.9	30	Pass
NVNT	n40	5795	Ant2	8.48	0.36	8.84	30	Pass
NVNT	n40	5190	Ant3	8.17	0.36	8.53	24	Pass
NVNT	n40	5230	Ant3	8.42	0.35	8.77	24	Pass
NVNT	n40	5755	Ant3	7.47	0.35	7.82	30	Pass
NVNT	n40	5795	Ant3	6.97	0.35	7.32	30	Pass
NVNT	n40	5190	Ant1	8.51	0.36	8.87	/	Pass
NVNT	n40	5190	Ant2	8.25	0.36	8.61	/	Pass
NVNT	n40	5190	Ant3	8.28	0.36	8.64	/	Pass
NVNT	n40	5190	Sum	13.12	0.36	13.48	19.72	Pass
NVNT	n40	5230	Ant1	8.36	0.36	8.72	/	Pass
NVNT	n40	5230	Ant2	8.2	0.36	8.56	/	Pass
NVNT	n40	5230	Ant3	8.58	0.36	8.94	/	Pass
NVNT	n40	5230	Sum	13.15	0.36	13.51	19.72	Pass
NVNT	n40	5755	Ant1	8.06	0.36	8.42	/	Pass
NVNT	n40	5755	Ant2	8.74	0.36	9.1	/	Pass
NVNT	n40	5755	Ant3	7.41	0.36	7.77	/	Pass
NVNT	n40	5755	Sum	12.88	0.36	13.24	25.72	Pass
NVNT	n40	5795	Ant1	8.06	0.36	8.42	/	Pass
NVNT	n40	5795	Ant2	8.58	0.36	8.94	/	Pass
NVNT	n40	5795	Ant3	7.02	0.36	7.38	/	Pass
NVNT	n40	5795	Sum	12.71	0.36	13.07	25.72	Pass
NVNT	ac80	5210	Ant1	6.53	1.39	7.92	24	Pass
NVNT	ac80	5775	Ant1	6.46	1.38	7.84	30	Pass
NVNT	ac80	5210	Ant2	6.4	1.38	7.78	24	Pass
NVNT	ac80	5775	Ant2	7.22	1.38	8.6	30	Pass
NVNT	ac80	5210	Ant3	6.79	1.36	8.15	24	Pass
NVNT	ac80	5775	Ant3	5.93	1.39	7.32	30	Pass
NVNT	ac80	5210	Ant1	6.97	1.38	8.35	/	Pass
NVNT	ac80	5210	Ant2	6.55	1.38	7.93	/	Pass
NVNT	ac80	5210	Ant3	6.72	1.38	8.1	/	Pass
NVNT	ac80	5210	Sum	11.52	1.38	12.9	19.72	Pass
NVNT	ac80	5775	Ant1	6.64	1.38	8.02	/	Pass
NVNT	ac80	5775	Ant2	7.36	1.38	8.74	/	Pass
NVNT	ac80	5775	Ant3	5.83	1.38	7.21	/	Pass
NVNT	ac80	5775	Sum	11.43	1.38	12.81	25.72	Pass
NVNT	ac160	5250	Ant1	8.09	1.75	9.84	24	Pass
NVNT	ac160	5250	Ant2	7.71	1.7	9.41	24	Pass
NVNT	ac160	5250	Ant3	9.42	0.8	10.22	24	Pass
NVNT	ac160	5250	Ant1	8.47	1.75	10.22	/	Pass
NVNT	ac160	5250	Ant2	7.93	1.75	9.68	/	Pass
NVNT	ac160	5250	Ant3	8.3	1.75	10.05	/	Pass
NVNT	ac160	5250	Sum	13.01	1.75	14.76	19.72	Pass
NVNT	ax80	5210	Ant1	8.07	0.33	8.4	24	Pass
NVNT	ax80	5775	Ant1	7.89	0.33	8.22	30	Pass
NVNT	ax80	5210	Ant2	6.99	1.13	8.12	24	Pass
NVNT	ax80	5775	Ant2	7.66	1.13	8.79	30	Pass
NVNT	ax80	5210	Ant3	8	0.55	8.55	24	Pass
NVNT	ax80	5775	Ant3	7.26	0.55	7.81	30	Pass
NVNT	ax80	5210	Ant1	8.32	0.33	8.65	/	Pass
NVNT	ax80	5210	Ant2	7.99	0.33	8.32	/	Pass
NVNT	ax80	5210	Ant3	8.32	0.33	8.65	/	Pass






NVNT	ax80	5210	Sum	12.98	0.33	13.31	19.72	Pass
NVNT	ax80	5775	Ant1	8.19	0.33	8.52	/	Pass
NVNT	ax80	5775	Ant2	8.58	0.33	8.91	/	Pass
NVNT	ax80	5775	Ant3	7.4	0.33	7.73	/	Pass
NVNT	ax80	5775	Sum	12.86	0.33	13.19	25.72	Pass
NVNT	ax160	5250	Ant1	9.75	0.5	10.25	24	Pass
NVNT	ax160	5250	Ant2	8.5	1.25	9.75	24	Pass
NVNT	ax160	5250	Ant3	10.04	0.49	10.53	24	Pass
NVNT	ax160	5250	Ant1	10.14	0.49	10.63	/	Pass
NVNT	ax160	5250	Ant2	9.43	0.49	9.92	/	Pass
NVNT	ax160	5250	Ant3	10.03	0.49	10.52	/	Pass
NVNT	ax160	5250	Sum	14.65	0.49	15.14	19.72	Pass








-26dB Bandwidth




Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	28.952	0.5	Pass
NVNT	a	5200	Ant1	26.704	0.5	Pass
NVNT	a	5240	Ant1	20.306	0.5	Pass
NVNT	a	5180	Ant2	27.363	0.5	Pass
NVNT	a	5200	Ant2	27.195	0.5	Pass
NVNT	a	5240	Ant2	20.138	0.5	Pass
NVNT	a	5180	Ant3	25.95	0.5	Pass
NVNT	a	5200	Ant3	27.272	0.5	Pass
NVNT	a	5240	Ant3	20.268	0.5	Pass
NVNT	n20	5180	Ant1	26.721	0.5	Pass
NVNT	n20	5200	Ant1	28.391	0.5	Pass
NVNT	n20	5240	Ant1	20.552	0.5	Pass
NVNT	n20	5180	Ant2	27.729	0.5	Pass
NVNT	n20	5200	Ant2	28.566	0.5	Pass
NVNT	n20	5240	Ant2	20.942	0.5	Pass
NVNT	n20	5180	Ant3	28.691	0.5	Pass
NVNT	n20	5200	Ant3	24.677	0.5	Pass
NVNT	n20	5240	Ant3	20.473	0.5	Pass
NVNT	n40	5190	Ant1	44.089	0.5	Pass
NVNT	n40	5230	Ant1	40.355	0.5	Pass
NVNT	n40	5190	Ant2	42.966	0.5	Pass
NVNT	n40	5230	Ant2	39.726	0.5	Pass
NVNT	n40	5190	Ant3	41.891	0.5	Pass
NVNT	n40	5230	Ant3	40.158	0.5	Pass
NVNT	ac80	5210	Ant1	99.802	0.5	Pass
NVNT	ac80	5210	Ant2	92.798	0.5	Pass
NVNT	ac80	5210	Ant3	84.732	0.5	Pass
NVNT	ac160	5250	Ant1	172.026	0.5	Pass
NVNT	ac160	5250	Ant2	167.206	0.5	Pass
NVNT	ac160	5250	Ant3	166.68	0.5	Pass
NVNT	ax80	5210	Ant1	79.128	0.5	Pass
NVNT	ax80	5210	Ant2	83.52	0.5	Pass
NVNT	ax80	5210	Ant3	79.277	0.5	Pass
NVNT	ax160	5250	Ant1	161	0.5	Pass
NVNT	ax160	5250	Ant2	167.881	0.5	Pass
NVNT	ax160	5250	Ant3	162.488	0.5	Pass



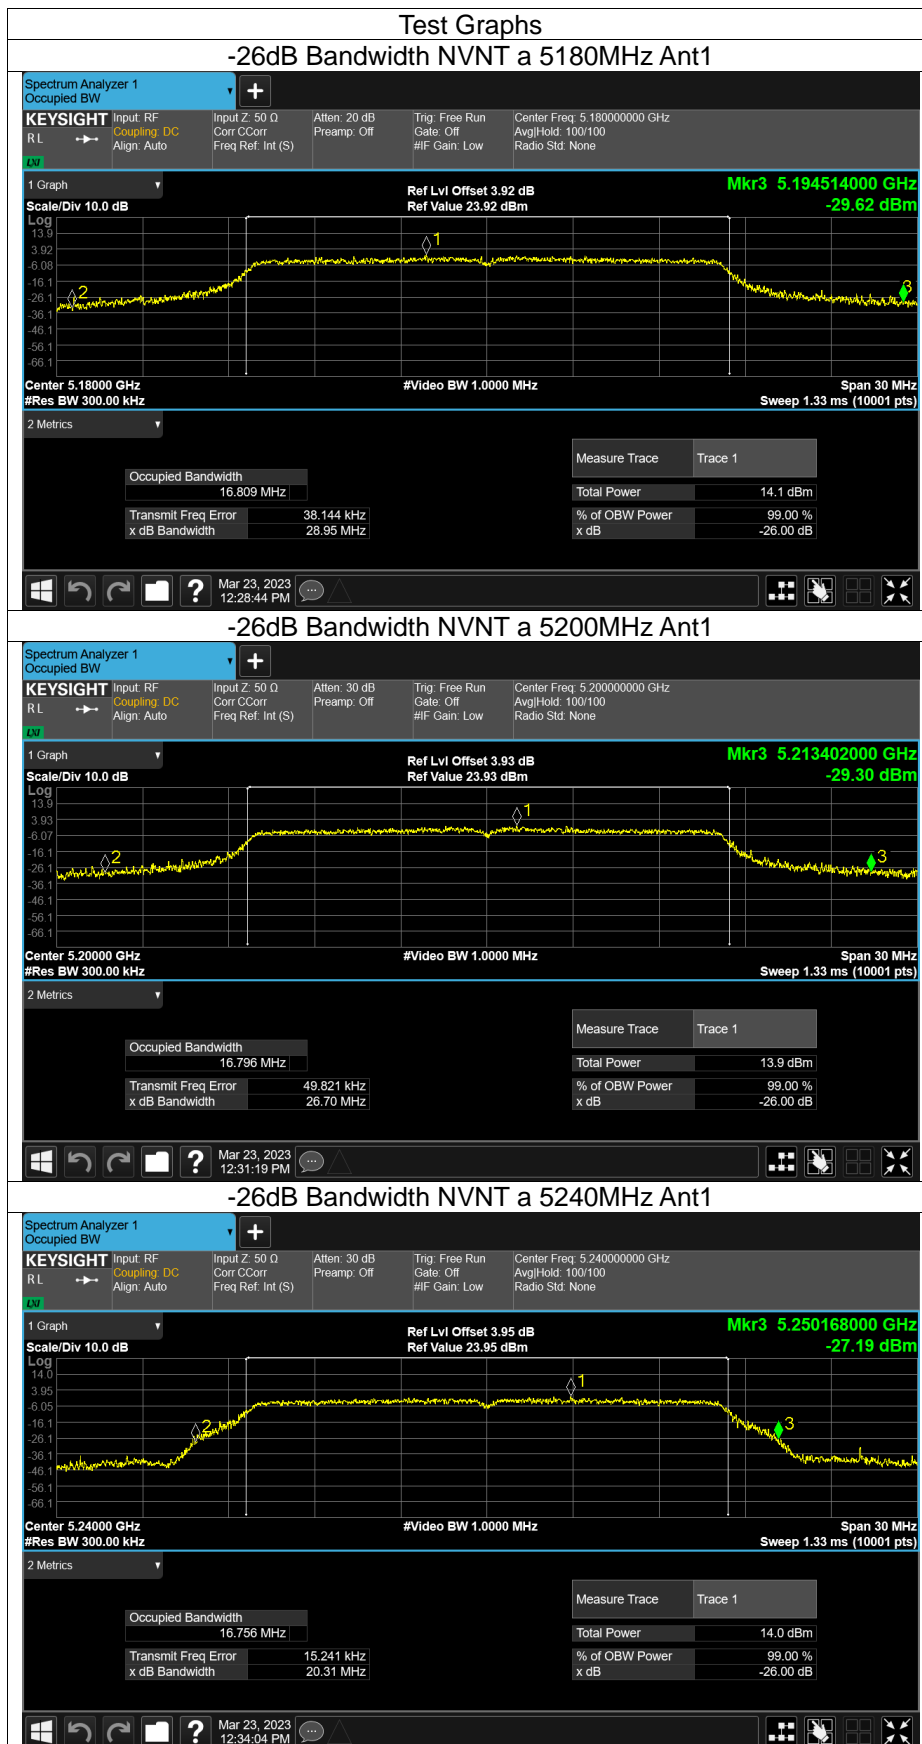



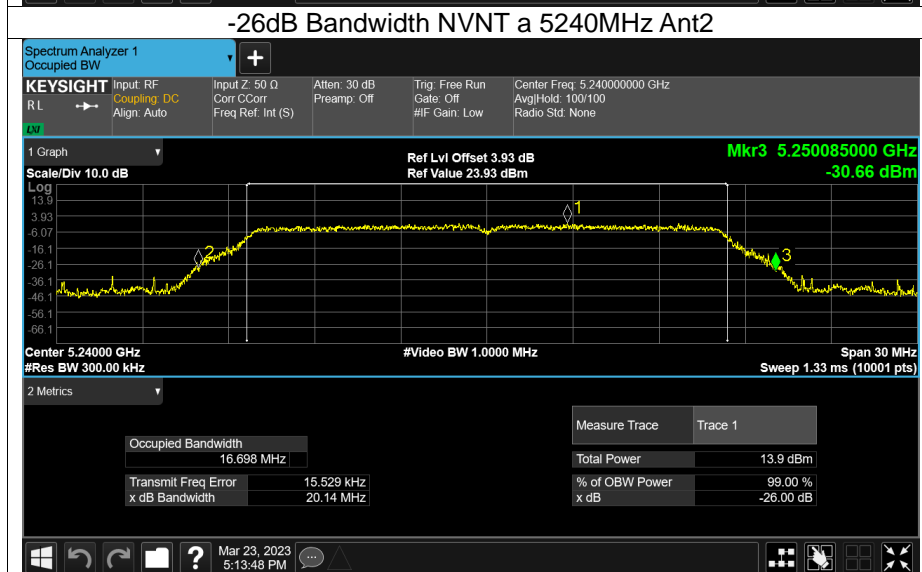
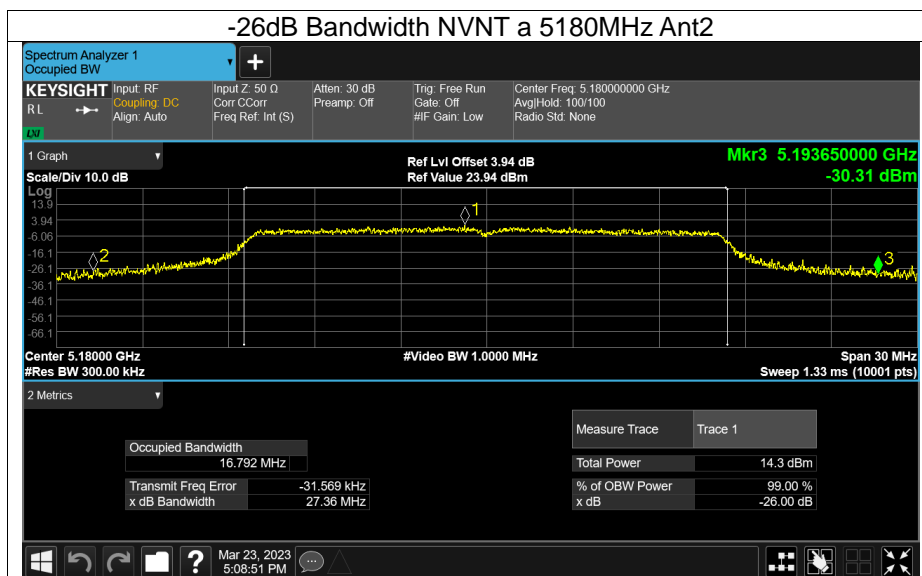



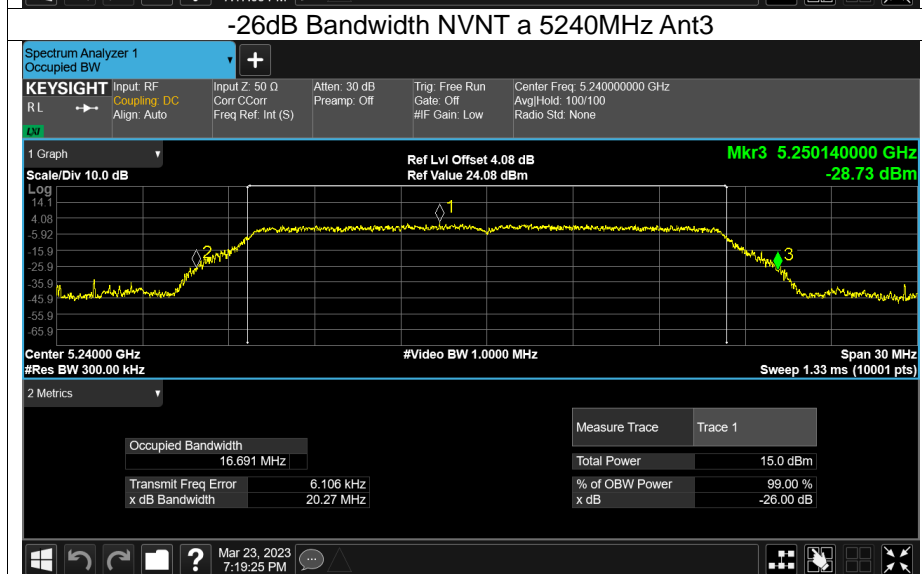
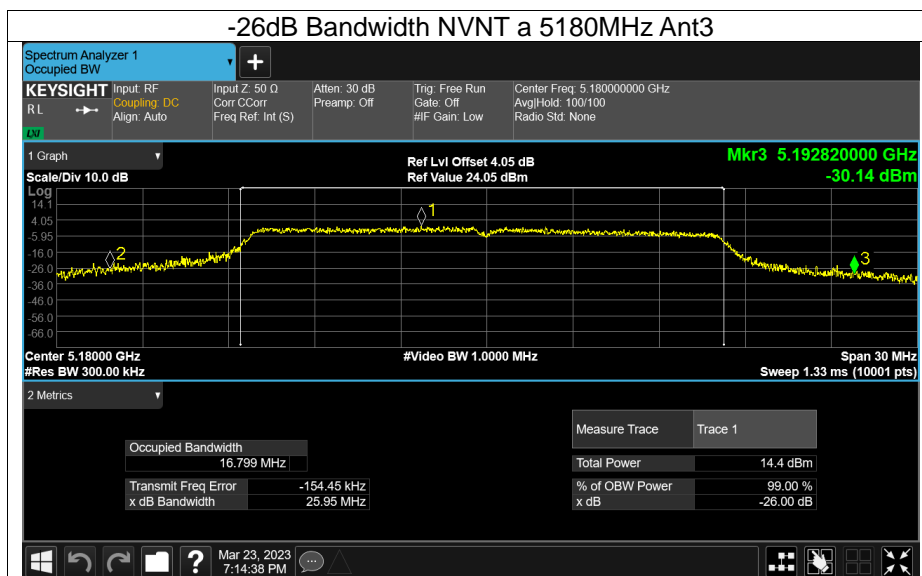


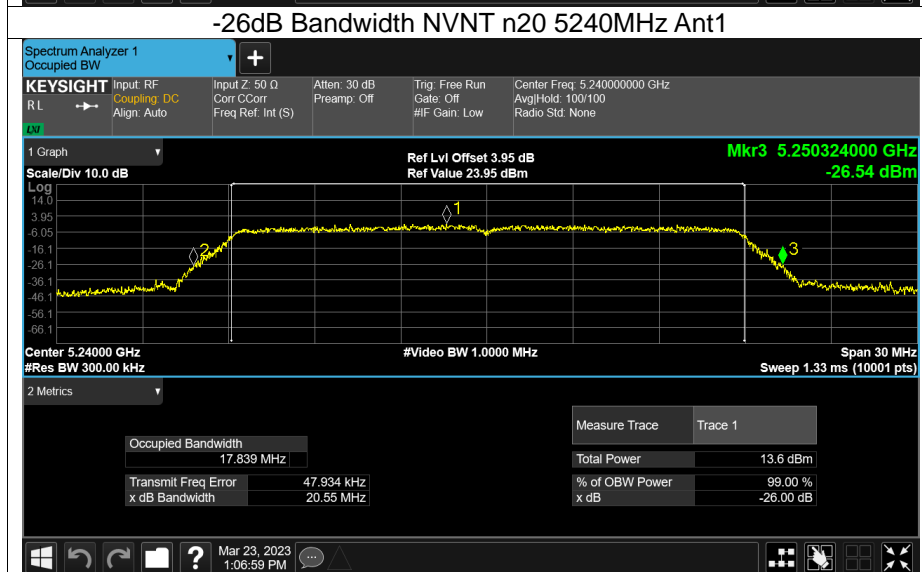
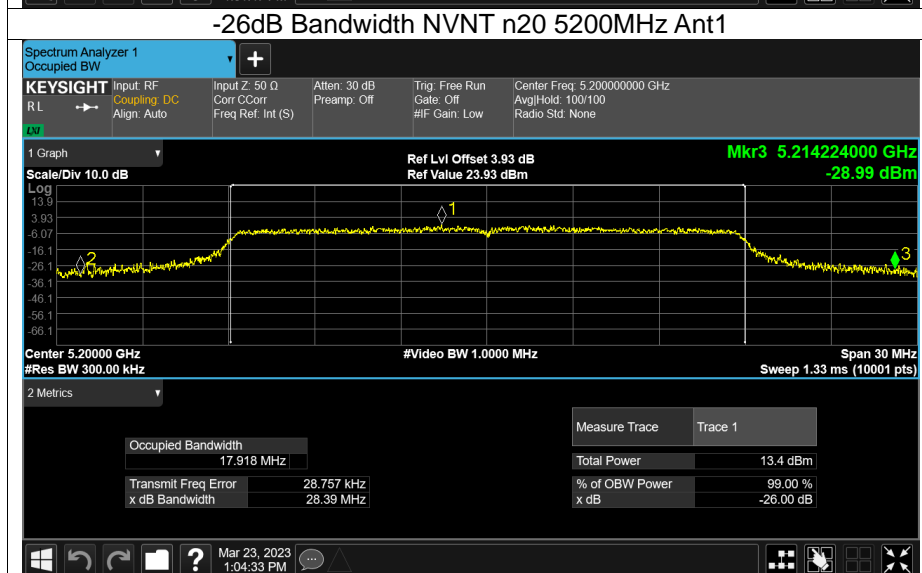
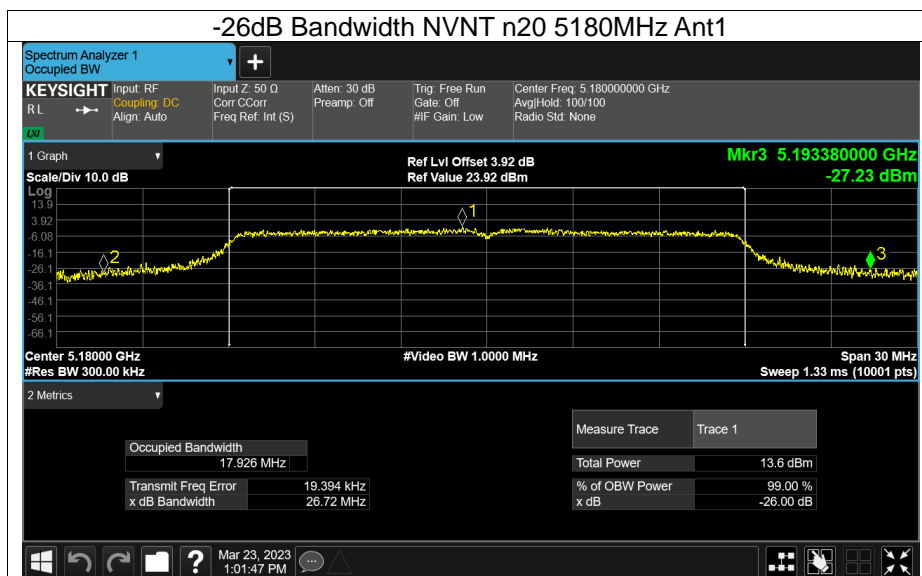


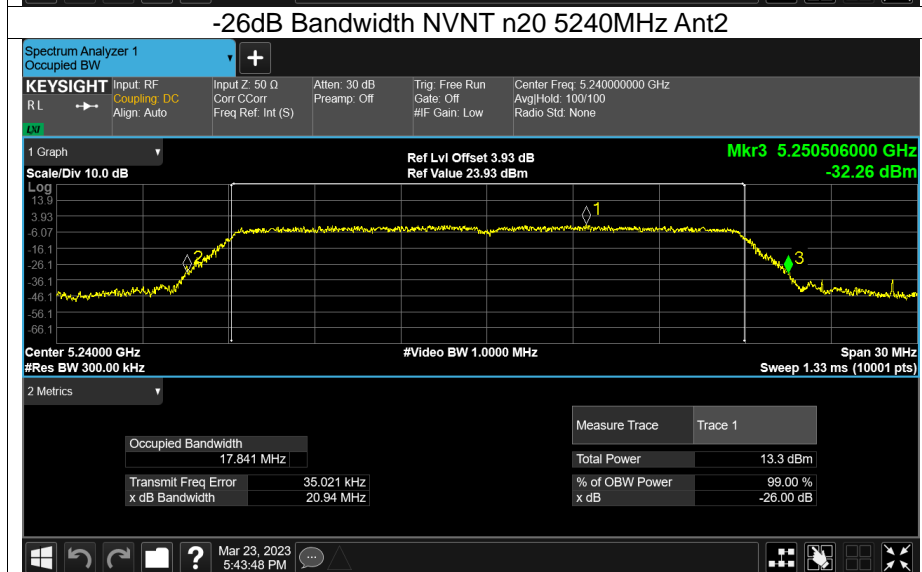
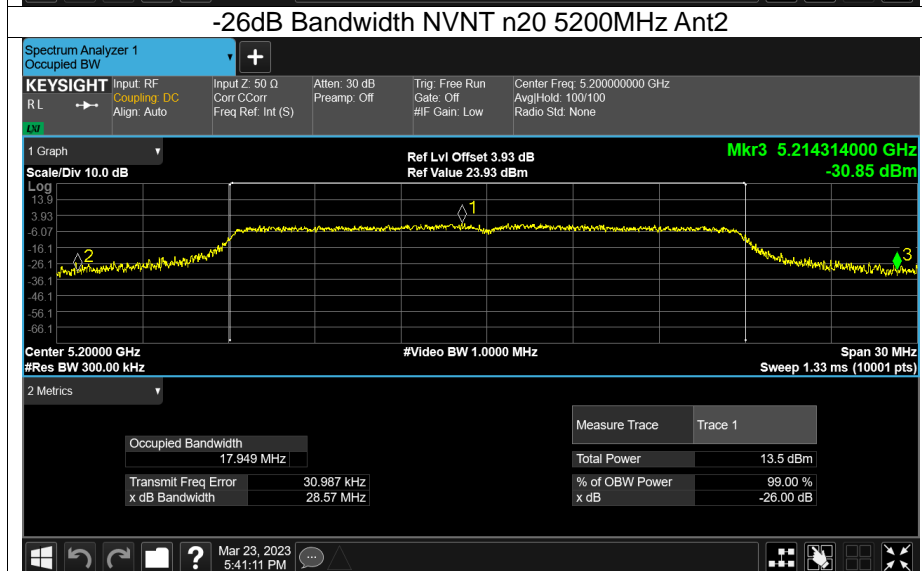
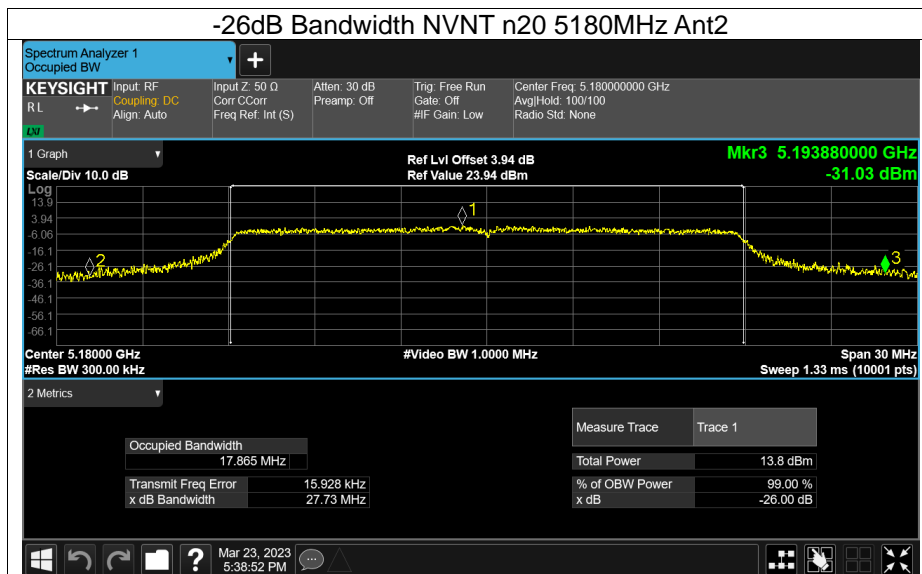


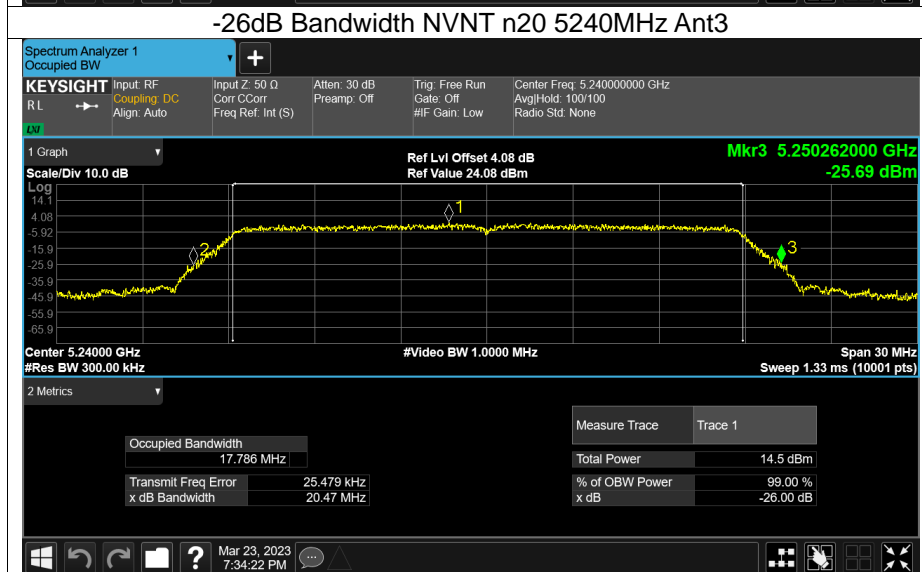
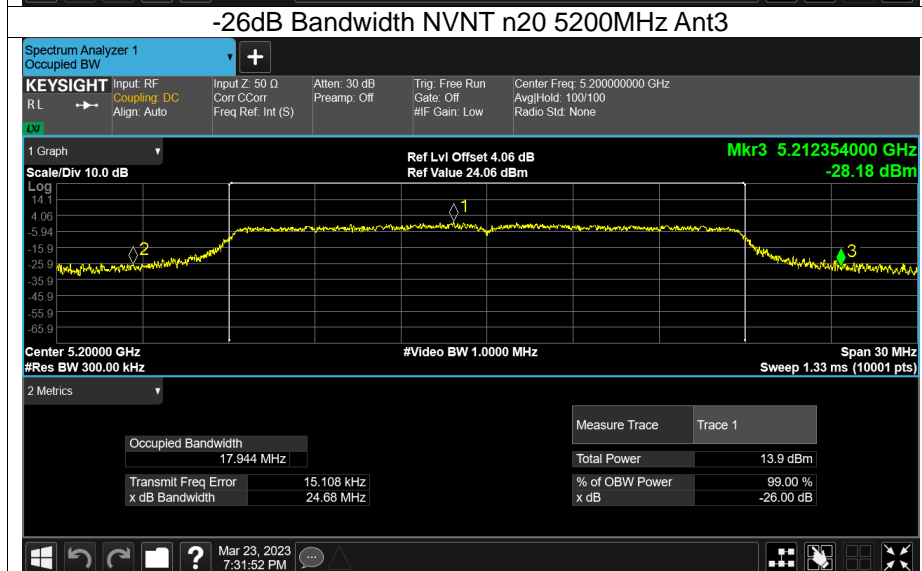
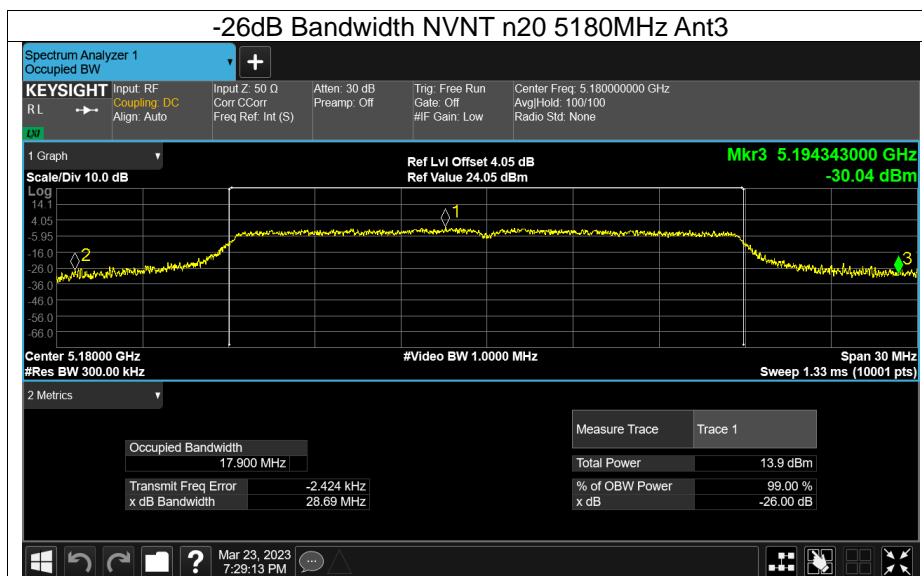


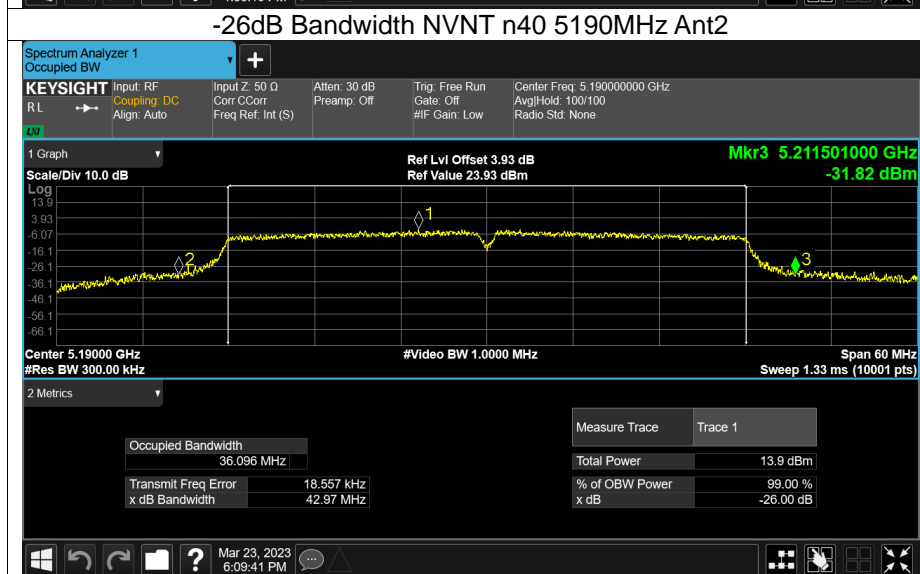
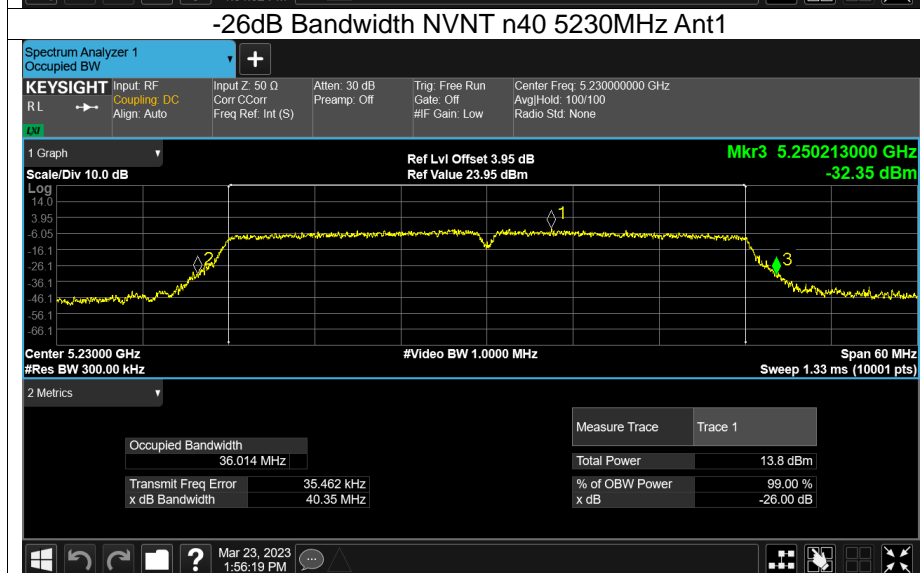
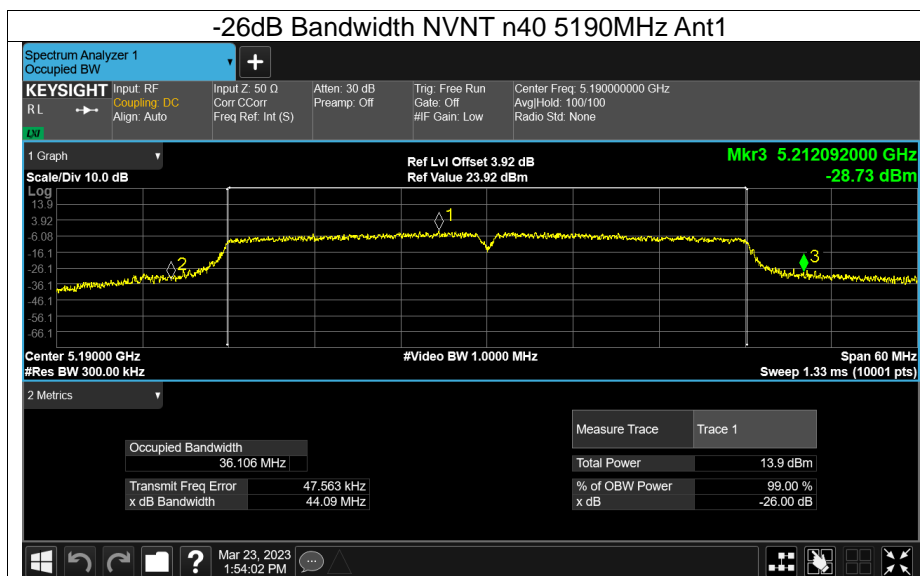


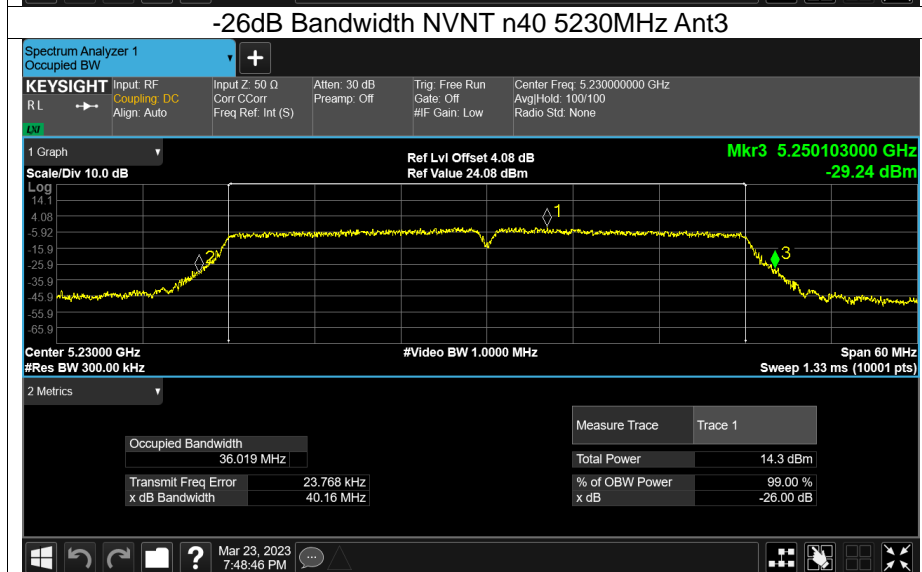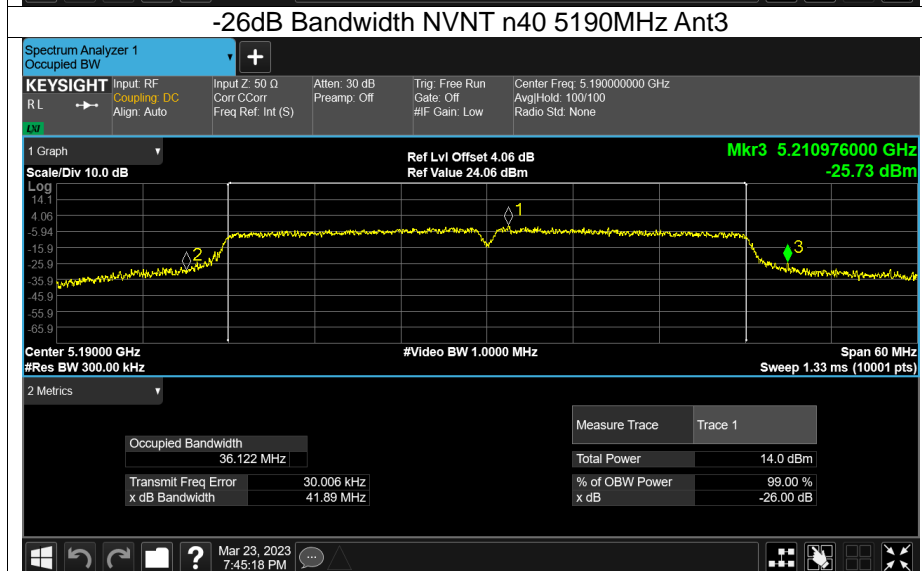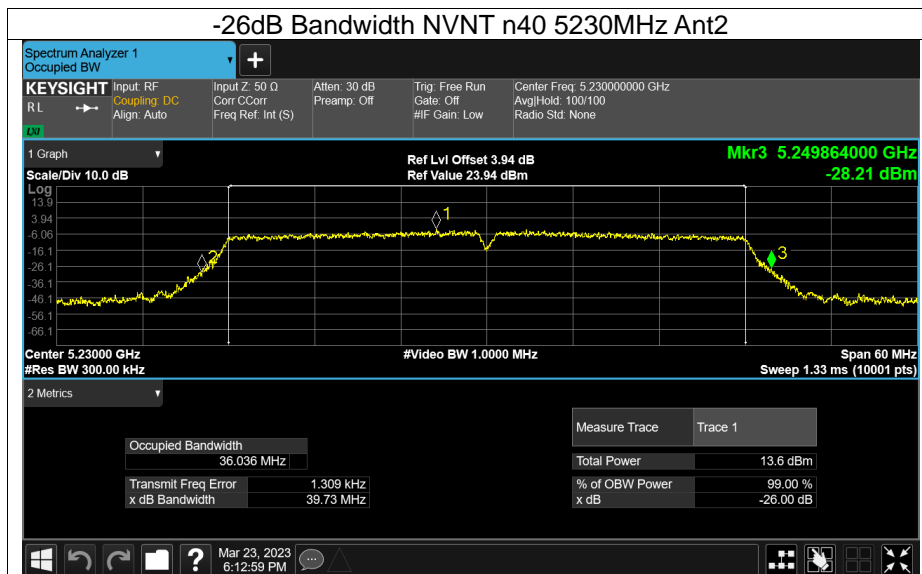

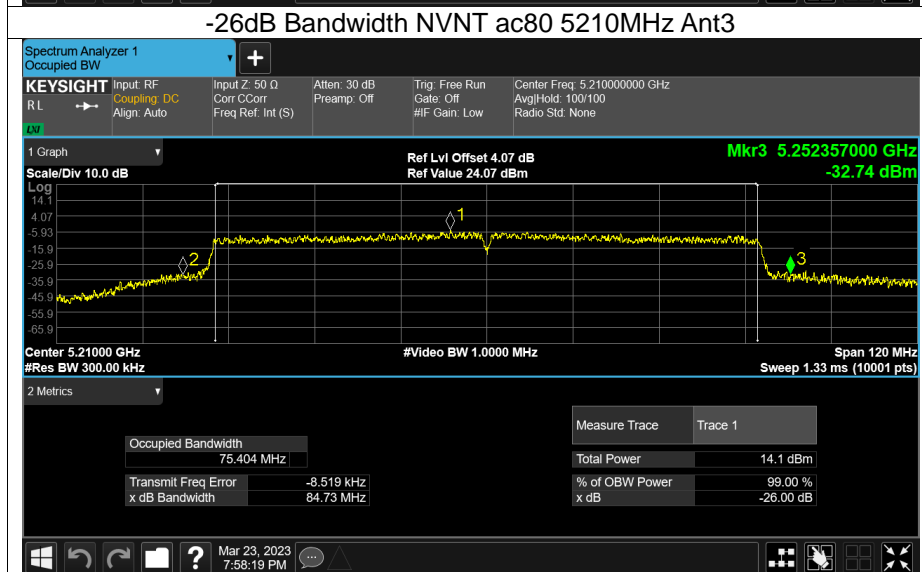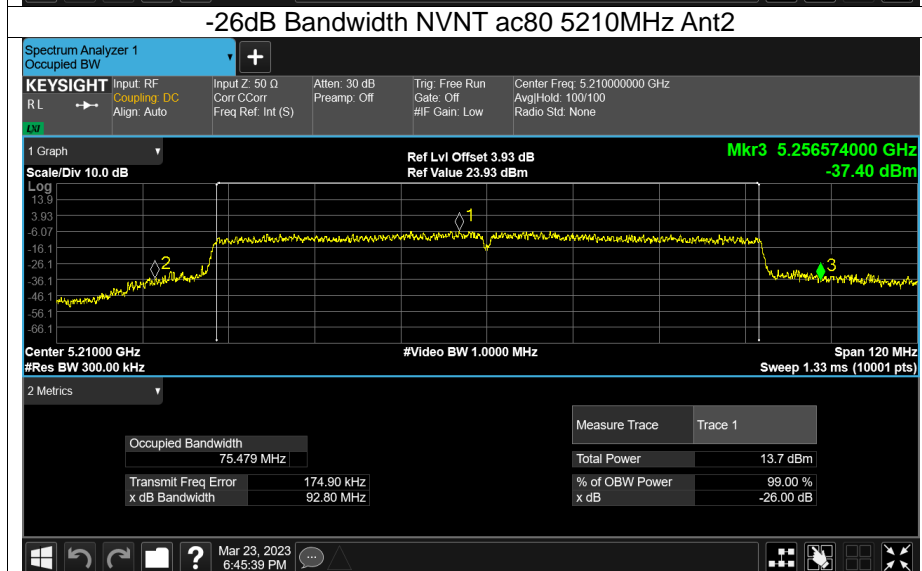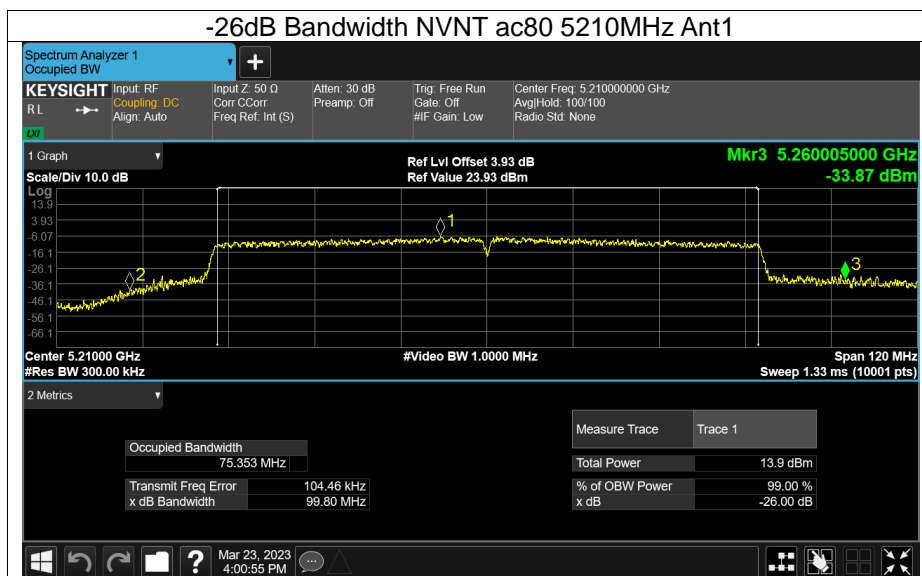

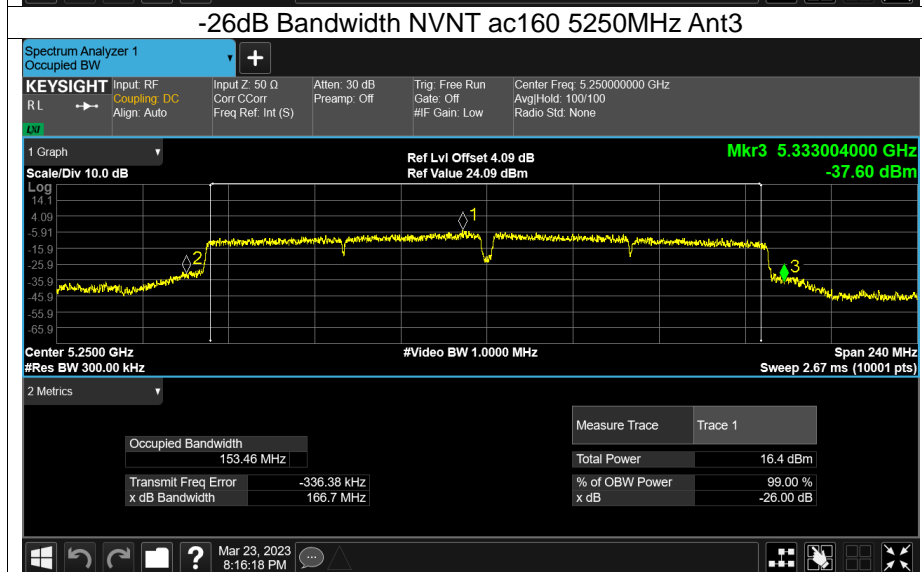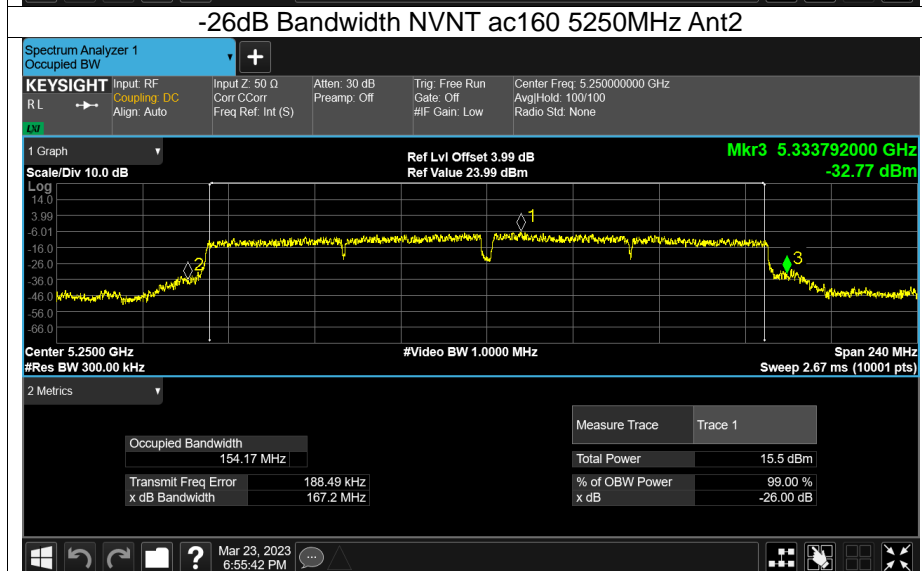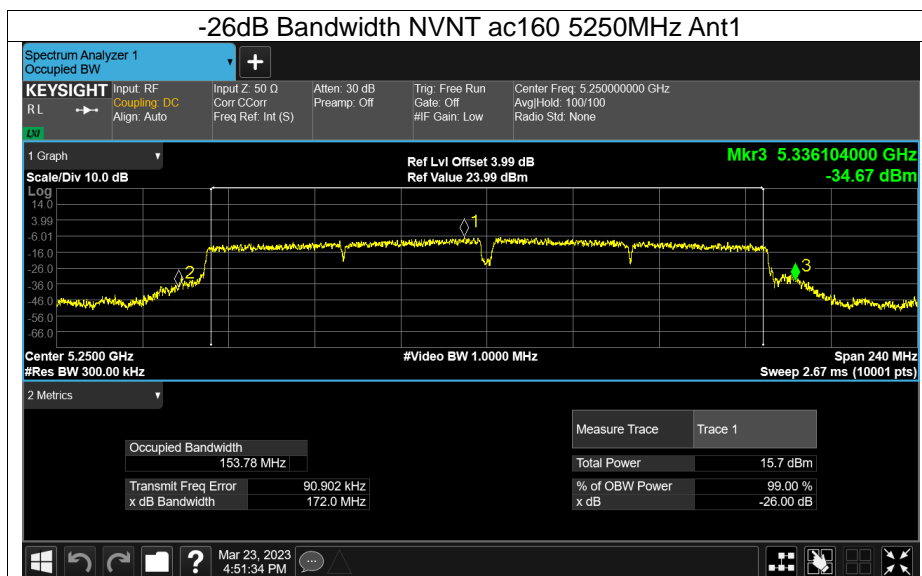

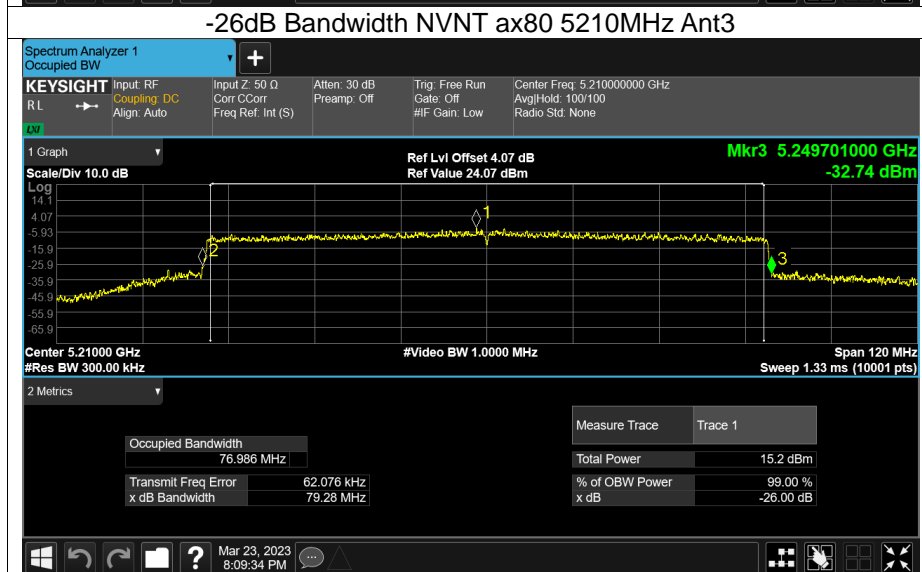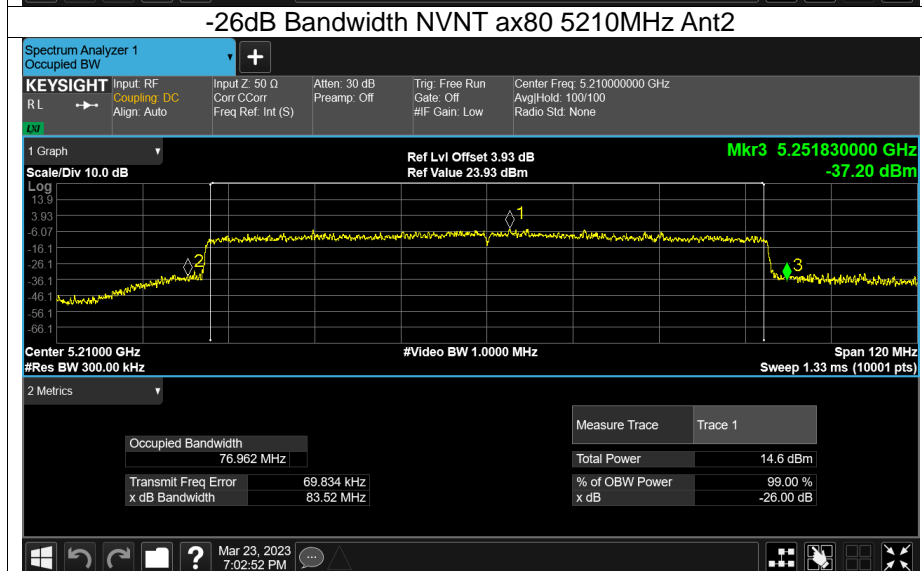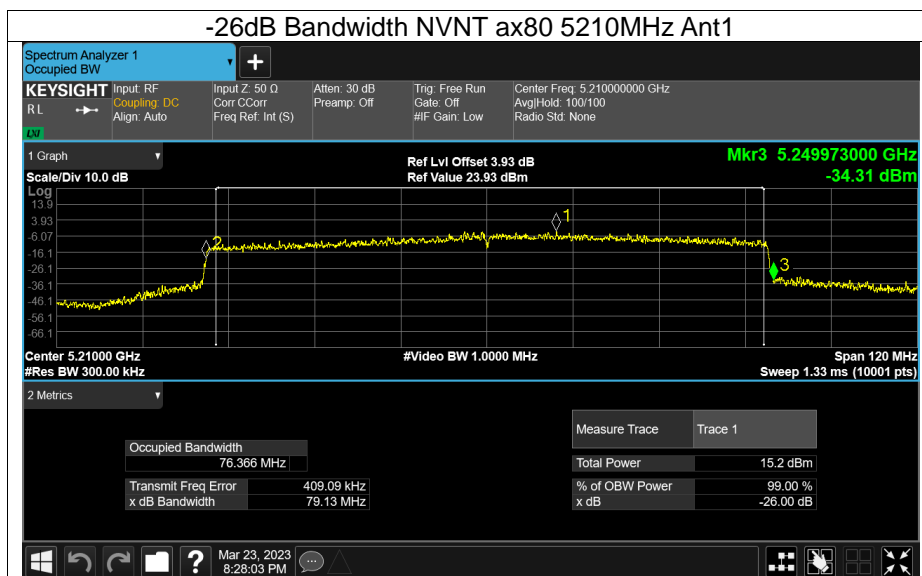

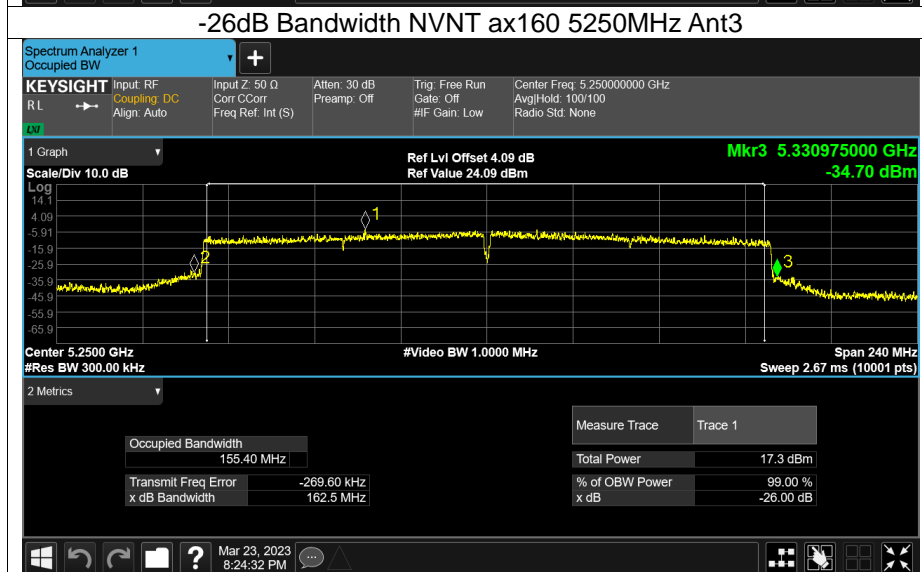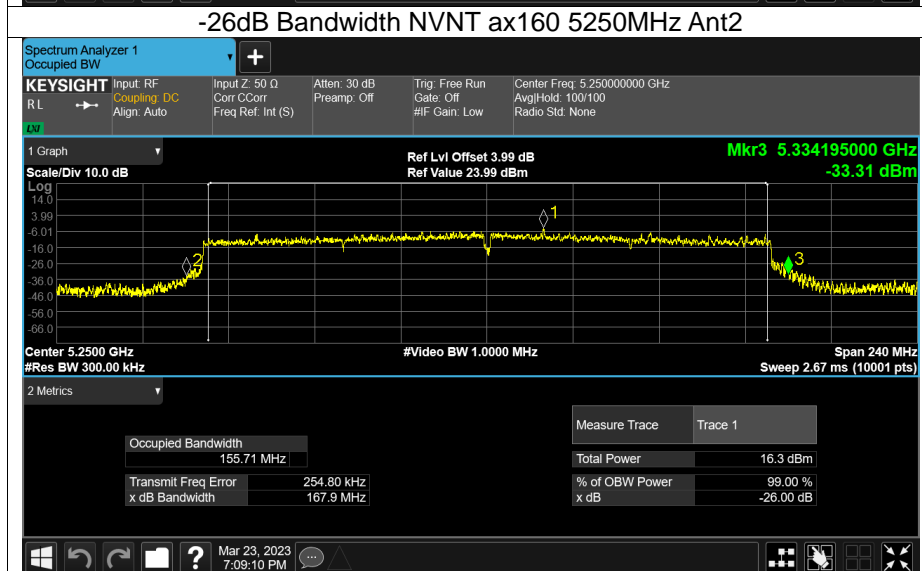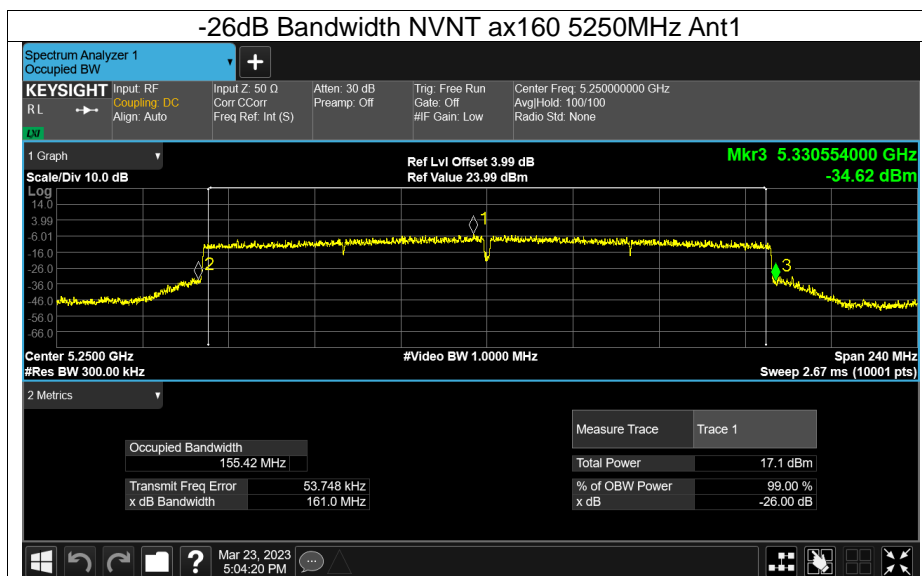



Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.624
NVNT	a	5200	Ant1	16.609
NVNT	a	5240	Ant1	16.534
NVNT	a	5745	Ant1	16.562
NVNT	a	5785	Ant1	16.478
NVNT	a	5825	Ant1	16.566
NVNT	a	5180	Ant2	16.598
NVNT	a	5200	Ant2	16.615
NVNT	a	5240	Ant2	16.54
NVNT	a	5745	Ant2	16.588
NVNT	a	5785	Ant2	16.491
NVNT	a	5825	Ant2	16.566
NVNT	a	5180	Ant3	16.592
NVNT	a	5200	Ant3	16.605
NVNT	a	5240	Ant3	16.557
NVNT	a	5745	Ant3	16.562
NVNT	a	5785	Ant3	16.468
NVNT	a	5825	Ant3	16.545
NVNT	n20	5180	Ant1	17.75
NVNT	n20	5200	Ant1	17.774
NVNT	n20	5240	Ant1	17.678
NVNT	n20	5745	Ant1	17.752
NVNT	n20	5785	Ant1	17.672
NVNT	n20	5825	Ant1	17.727
NVNT	n20	5180	Ant2	17.734
NVNT	n20	5200	Ant2	17.805
NVNT	n20	5240	Ant2	17.688
NVNT	n20	5745	Ant2	17.735
NVNT	n20	5785	Ant2	17.672
NVNT	n20	5825	Ant2	17.724
NVNT	n20	5180	Ant3	17.788
NVNT	n20	5200	Ant3	17.75
NVNT	n20	5240	Ant3	17.649
NVNT	n20	5745	Ant3	17.749
NVNT	n20	5785	Ant3	17.696
NVNT	n20	5825	Ant3	17.73
NVNT	n40	5190	Ant1	36.192
NVNT	n40	5230	Ant1	36.112
NVNT	n40	5755	Ant1	36.123
NVNT	n40	5795	Ant1	36.026
NVNT	n40	5190	Ant2	36.154
NVNT	n40	5230	Ant2	36.061
NVNT	n40	5755	Ant2	36.123
NVNT	n40	5795	Ant2	35.968
NVNT	n40	5190	Ant3	36.215
NVNT	n40	5230	Ant3	36.094
NVNT	n40	5755	Ant3	36.091
NVNT	n40	5795	Ant3	36.071
NVNT	ac80	5210	Ant1	75.455
NVNT	ac80	5775	Ant1	75.095
NVNT	ac80	5210	Ant2	75.482
NVNT	ac80	5775	Ant2	75.203
NVNT	ac80	5210	Ant3	75.407
NVNT	ac80	5775	Ant3	75.098
NVNT	ac160	5250	Ant1	153.826
NVNT	ac160	5250	Ant2	154.371
NVNT	ac160	5250	Ant3	153.532
NVNT	ax80	5210	Ant1	76.352
NVNT	ax80	5775	Ant1	76.688



NVNT	ax80	5210	Ant2	76.962
NVNT	ax80	5775	Ant2	76.685
NVNT	ax80	5210	Ant3	77.088
NVNT	ax80	5775	Ant3	76.806
NVNT	ax160	5250	Ant1	155.26
NVNT	ax160	5250	Ant2	156.529
NVNT	ax160	5250	Ant3	155.245



