


I766 DECT Quick Reference Guide

Front View




Side View

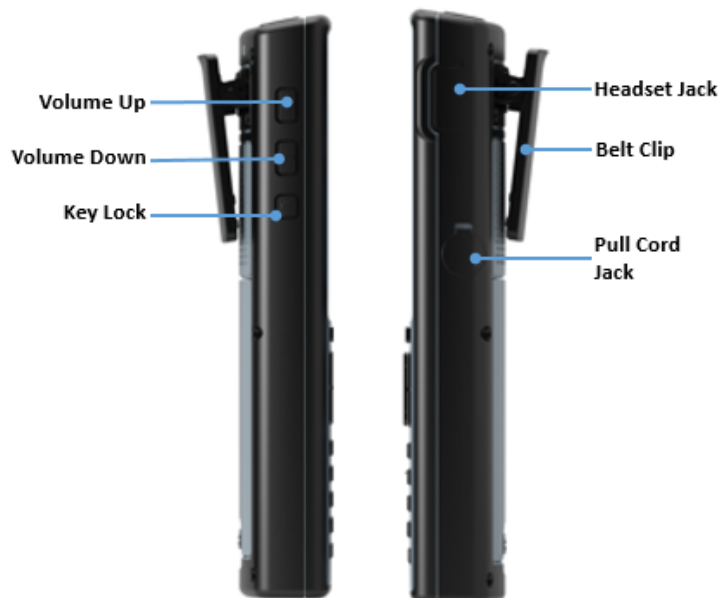


To use the I766 for the first time:

- Open the battery lid;
- Remove the plastic strip from the battery contacts
- Close the battery lid;
- Place the I766 on the charger to fully charge the battery

Main Menu Items

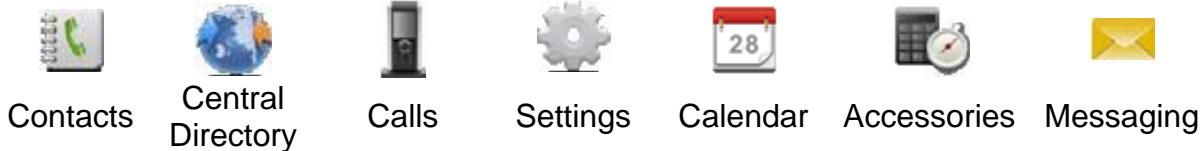

Top Line Icons

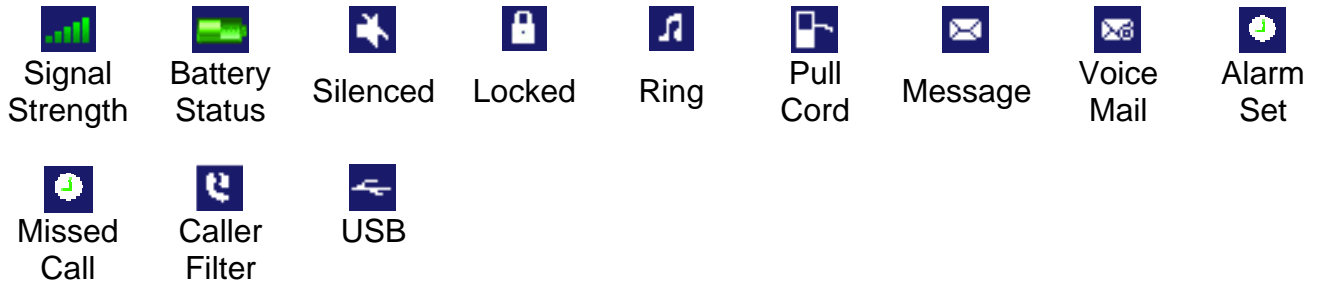

GETTING STARTED

Turning the I766 on and off

Press and hold  for a few seconds.

Activating your phone













When the display of your phone is dark, press any key to activate your phone (phone in **Idle** mode).

Lock/Unlock your phone


In **Idle** mode press  and then  (toggle function) or press “**Key Lock**” on the side of the phone. To unlock your phone press  and then  (toggle function).

Make a call

In **Idle** mode:

1. Press  and then type the number you want to reach. *OR*
2. Press  and then type the number you want to reach (speakerphone call) *OR*
3. Type the number you want to reach and then press  or  *OR*
4. Use a speed dial key (  or ) *OR*
5. Press soft key  or , select the required contact and press soft key , , or .




Answering an incoming call

Press  or, for speakerphone call, .

End a call

Press .


Make an enquiry call

During a call, press  and dial the number of the party you want to consult. Press  to toggle between the two parties. Press  to transfer the call.

Change the volume

During a call, press “**Volume Up**” or “**Volume Down**” on the side of the phone.


Use the Speaker phone

During a call, press ; to de-activate: press  again.

Mute the microphone during a call

Press the soft key **Mute**. To turn the microphone on again, press the soft key **Unmute**.

Mute the microphone during a call

In **Idlemode**, press and hold  for a few seconds.

Note: You may need to enter your voicemail number in the handset settings first.


Write and send a text message

In **Idlemode**, press , use the navigation keys to select  and press the soft key **Select**.




1. Press soft key **New**, then enter the text of your message. **OR**
2. Use the navigation keys to select a stored draft message and press soft key **Select**

Then press soft key **Send**, select the type of the message (normal or urgent) and choose the required destination(s). When “message sent” is given in the display your message has been sent successfully.





Assigning a contact to a speed dialling key

In **Idlemode**, press soft key , select the contact you want to assign a speed dialling key and press soft key **More**. Choose **Speed dial** and press soft key **Select**. Use the navigation keys to scroll to the appropriate number (2..9) and press soft key **Add**.




Make a shortcut

In **Idlemode**, press , use the navigation keys to select  and press soft key **Select**. Use the navigation keys to select  (*Shortcuts*). Now you can assign a function to one of the navigation keys or function keys.











































































Register the handset

In **Idlemode**, press , use the navigation keys to select  and press soft key **Select**. Use the navigation keys to select  (*Connectivity*) and press soft key **Select**. Use the navigation keys to select  (*Register*) and press soft key **Select**. Enter the requested registration information (contact your System Administrator for this). Wait for the registration to be completed.

Using the menu

In **Idlemode**, press  to access the main menu. Use the navigation keys to go to the required menu, menu tab and menu item. Use soft key **Select** (or press ) to select the chosen menu or menu item/tab. Other soft keys may provide additional options. To go back one step in the menu or leave altogether, press .

Menu list

1.  **Contacts**
 - *List of contacts*
2.  **Central Directory**
 - *Select required contact by name*
3.  **Calls**
 -  *All Calls*
 -  *Answered Calls*
 -  *Dialled Calls*
 -  *Missed Calls*
4.  **Settings**
 -  *General Settings*
 -  *Silent*
 -  *Time & Date*
 -  *Language*
(Supported: English, Spanish, German, French, Italian, Dutch, Danish, Swedish, Turkish, Polish, Norwegian, Greek & Russian)
 -  *Shortcuts (for the navigation keys)*
 -  *LED Signal*
 - > *Red LED*
 - > *Green LED*
 - > *Yellow LED*
 - > *Blue LED*
 -  *Security*
 - > *Phone Lock*
 - > *Automatic Key Lock*
 - > *Change PIN*
 - > *Proxy Password*
 -  *Handset Name*
 -  *RFID*
 -  *Reset Settings*
 -  *Status*
 -  *Sounds Normal & Sounds Silent*
 -  *Incoming Call*
 - >  *Ring Volume*
 - >  *Ring External/Internal/Unknown*
 - >  *Group Ring*
 - >  *Intercom Ring*
 - >  *Emergency Ring*
 - >  *Arb. Ring*
 - >  *Increasing Ring*
 - >  *Vibrator*
 -  *Message Notifications*
 - >  *Notification Volume*
 - >  *Notification*
Normal/Urgent/Emergency
 - >  *Increasing Notification*
 - >  *Vibrator*
 -  *Alerts*
 - >  *Alert **Volume***
 - >  ***Alert** Melody*
 - >  *Increasing Alert*
 - >  *Vibrator*
-  **Settings (continued)**
 -  *Feedback*
 - >  *Key Sound*
 - >  *Confirmation Sound*
 - >  *Coverage Warning*
 - >  *Charger Warning*
 -  *Noise Reduction*
-  **Display**
 -  *Wallpaper*
 -  *Startup Screen*
 -  *Power Save*
 -  *Charger Backlight*
-  **Calls**
 -  *Units*
 -  *Answer Mode*
 -  *Caller Filter*
 -  *Emergency Call*
 - > *Number*
 - > *Message*
 - > *SOS Key*
 - > *Man Down*
 - > *Pull Cord*
 -  *Voicemail Number*
 -  *Silent Charging*
 -  *Missed Call Time*
-  **Connectivity**
 -  *Register*
 -  *Deregister*
 -  *Select Network*
 -  *Bluetooth*
 - > *Enabled/Disabled*
 - > *Search for Devices*
 - > *Paired Devices*
5.  **Calendar**
 - *Manage your appointments*
6.  **Accessories**
 -  *Alarms*
 -  *Calculator*
 -  *Stopwatch*
7.  **Messaging**
 -  *Drafts*
 -  *Inbox*
 -  *Sent Messages*
 -  *Settings*

**Additional
Information G266/G566d/G566s/I766/G966
Gx66 Desktop Charger/Gx66 Multi Charger Rack
Gx66/I766 Enh. Desktop Charger and Gx66/I766
Enh. Multi Charger Rack**

Important Safety Information

Only use this product in countries where the relevant authorities have authorised its operation.

Charge the battery only:

1. While installed in the handset in combination with the Gx66 Desktop Charger (or Gx66/I766 Enh. Desktop Charger) powered by USB Power Supply NEC EU917035¹ or EU917036² or EU917098⁴ or EU9170101⁵ or EU917087⁶.
2. In the spare battery charging slot in the Gx66 Desktop Charger (or Gx66/I766 Enh. Desktop Charger) powered by USB Power Supply NEC EU917035¹ or EU917036² or EU917098⁴ or EU9170101⁵ or EU917087⁶.
3. While installed in the handset in combination with the Gx66 Multi Charger Rack (or Gx66/I766 Enh. Multi Charger Rack) powered by Power Supply NEC EU917038³.
4. In one of the spare battery charging slots of the Gx66 Multi Charger Rack (or Gx66/I766 Enh. Multi Charger Rack) powered by Power Supply NEC EU917038³.
5. While installed in the handset and connecting the handset by means of a USB to mini USB cable directly to USB Power Supply NEC EU917035¹ or EU917036² or EU917098⁴ or EU9170101⁵ or EU917087⁶.
6. Only used at altitude not exceeding 2000m.
7. Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions or equivalent.

¹ Original product Friwo FW7713 with EU style mains plug

² Original product Friwo FW7712 with changeable mains plug for USA, UK or AUS

³ Original product Friwo FW7540/05 with changeable mains plug for USA, EU, UK or AUS

⁴ Original product Tenpao S005AYV0500100 with EU style mains plug

⁵ Original product Pihong PSA05E-050Q with EU style mains plug

⁶ Original product Tenpao S008ACM0500100 with changeable mains plug for USA, EU, UK or AUS

Additional Information G266/G566d/G566s/I766/G966 and (Enh.) Desktop Charger or (Enh.) Multi Charger Rack

Prevention of possible hearing damage:

To prevent possible hearing damage, do not listen at high volume levels for long periods.



Important Battery Information

The G266/G566d/G566s/I766/G966, Gx66 Desktop Charger, Gx66/I766 Enh. Desktop Charger, Gx66 Multi Charger Rack or Gx66/I766 Enh. Multi Charger Rack is fitted with a 3.7V/1100mAh/4.1 Wh Lithium-Ion Battery⁴ (or 3.7V/1600mAh/5.92 Wh for G966) which can be charged for 300 – 500 charge cycles (fully charged to fully discharged). A typical life expectancy for the battery is 2 to 3 years.

Always observe the following with respect to the battery:

- Only use the battery delivered with the G266/G566d/G566s/I766/G966 (or a spare battery of the recommended type – NEC article code: 9600 017 87001, or EU917056 in the case of G966).
- Never disassemble, customize or short-circuit batteries.
- Do not expose the battery to temperatures in excess of 60°C (140°F).
- Before placing the G266/G566d/G566s/G966 in the Gx66 Desktop Charger/Gx66 Multi Charger Rack or the G266/G566d/G566s/G966/I766 in the Gx66/I766 Enh. Desktop Charger or Gx66/I766 Enh Multi Charger Rack, make sure the battery is installed properly (see User Manual) and the battery cover is securely in place.
- Do not charge the batteries by any other means! Using any other charger may damage the battery and/or the G266/G566d/G566s/I766/G966 and might even cause the battery to explode.

Sensitive Electronic Equipment

Like any radio-based equipment, the G266/G566d/G566s/I766/G966 can potentially cause interference with other equipment. However due to the very low transmission power level the chances for interference is very small. Research proves that operational DECT phones (and thereby the G266/G566d/G566s/I766/G966) normally don't influence electronic equipment. Even so it is advised not to place the G266/G566d/G566s/I766/G966 near sensitive electronic equipment. When the G266/G566d/G566s/I766/G966 is operated in straight nearness of sensitive electronic equipment incidental influences can appear. You are advised not to place the

⁴Manufacturer: Shenzhen DRN Battery CO. Ltd, supplier model no. RTR001F01.

Additional Information G266/G566d/G566s/I766/G966 and (Enh.) Desktop Charger or (Enh.) Multi Charger Rack

G266/G566d/G566s/I766/G966 on or close (less than 10cm) to this kind of equipment, even in standby mode.

Do not rely on the G266/G566d/G566s/I766/G966 as your only means of communication when making indispensable calls (e.g. an emergency call).

Observe all warnings and instructions contained in the G266/G566d/G566s/I766/G966, Gx66 Desktop Charger, Gx66 Multi Charger Rack, Gx66/I766 Enh. Desktop Charger or Gx66/I766 Enh. Multi Charger Rack User Manual.

When using one of these handsets or chargers G266/G566d/G566s/G966/I766/Gx66 Desktop Charger/Gx66 Multi Charger Rack or Gx66/I766 Enh. Desktop Charger or Gx66/I766 Enh. Multi Charger Rack and its accessories observe the following:

- Do not expose the G266/G566d/G566s/I766/G966, Gx66 Desktop Charger, Gx66 Multi Charger Rack, Gx66/I766 Enh. Desktop Charger or Gx66/I766 Enh. Multi Charger Rack to rain or moisture, nor use the handset/charger near water.
- Do not use the G266/G566d/G566s/I766/G966, Gx66 Desktop Charger, Gx66 Multi Charger Rack, Gx66/I766 Enh. Desktop Charger or Gx66/I766 Enh. Multi Charger Rack on premises subject to explosive hazards.
- Do not expose the G266/G566d/G566s/I766/G966, Gx66 Desktop Charger, Gx66 Multi Charger Rack, Gx66/I766 Enh. Desktop Charger or Gx66/I766 Enh. Multi Charger Rack to high temperatures or direct sunlight for an extended period of time.
- Plug the AC adaptor in a wall outlet socket near the equipment for easy access/removal of the AC adaptor. Take care that the power cord does not cause a trip hazard.

Please also use the other documentation supplied with the various parts of your telephone system.

For countries in the European Union



Be sure to dispose of these products as well as its packing material in an environmentally compatible way.

Electrical equipment, including the battery, should not be disposed of as municipal waste.

These products should be taken to a designated facility where the best available treatment, recovery and recycling techniques are available.

At www.nec-unified.com/weee you can find information about separate disposal and environmentally sound recycling.

Additional Information G266/G566d/G566s/I766/G966 and (Enh.) Desktop Charger or (Enh.) Multi Charger Rack

For countries outside the European Union

Disposal of electrical and electronic products in countries outside the European Union should be done in line with the local regulations. If no arrangement has been made with NEC or your supplier, please contact the local authorities for further information.

Declaration Of Conformity (EU only)

Česky

“NEC Enterprise Solutions” tímto prohlašuje, že tento “G266/G566d/G566s/I766/G966” je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Dansk

Undertegnede “NEC Enterprise Solutions” erklærer herved, at følgende udstyr “G266/G566d/G566s/I766/G966” overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Deutsch

Hiermit erkläre “NEC Enterprise Solutions”, dass sich das Gerät “G266/G566d/G566s/I766/G966” in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Eesti

Käesolevaga kinnitab “NEC Enterprise Solutions” seadme “G266/G566d/G566s/I766/G966” vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

English

Hereby, “NEC Enterprise Solutions”, declares that this “G266/G566d/G566s/I766/G966” is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Español

Por medio de la presente “NEC Enterprise Solutions” declara que el “G266/G566d/G566s/I766/G966” cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Additional Information G266/G566d/G566s/I766/G966 and (Enh.) Desktop Charger or (Enh.) Multi Charger Rack

Ελληνική

ΜΕΤΗΝΠΑΡΟΥΣΑΗ NEC ΕΝΟΠΟΙΗΜΕΝΕΣ ΛΥΣΕΙΣ ΔΗΛΩΝΕΙΟΤΙ
“ G266/G566d/G566s/I766/G966”

ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ Ο
ΔΗΓΙΑΣ 1999/5/ΕΚ.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Français

Par la présente “NEC Enterprise Solutions” déclare que l'appareil
“G266/G566d/G566s/I766/G966” est conforme aux exigences essentielles et aux autres
dispositions pertinentes de la directive 1999/5/CE.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Íslenska

Hér með lýsir “NEC Enterprise Solutions” yfir því að “ G266/G566d/G566s/I766/G966” er
í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Italiano

Con la presente “NEC Enterprise Solutions” dichiara che questo
“G266/G566d/G566s/I766/G966” è conforme ai requisiti essenziali ed alle altre
disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Latviski

Ar šo “NEC Enterprise Solutions” deklarē, ka “G266/G566d/G566s/I766/G966” atbilst
Direktīvas 1999/5/EC būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Lietuvių

Šiuo “NEC Enterprise Solutions” deklaruoja, kad šis “G266/G566d/G566s/I766/G966”
atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Malti

Hawnhekk, “NEC Enterprise Solutions”, jiddikjara li dan “G266/G566d/G566s/I766/G966”
jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-
Dirrettiva 1999/5/EC.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Magyar

Alulírott, “NEC Enterprise Solutions” nyilatkozom, hogy a
“G266/G566d/G566s/I766/G966” megfelel a vonatkozó alapvető követelményeknek és
az 1999/5/EC irányelv egyéb előírásainak.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Additional Information G266/G566d/G566s/I766/G966 and (Enh.) Desktop Charger or
(Enh.) Multi Charger Rack

Nederlands

Hierbij verklaart "NEC Enterprise Solutions" dat het toestel "G266/G566d/G566s/I766/G966" in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Norsk

"NEC Enterprise Solutions" erklærer herved at utstyret "G266/G566d/G566s/I766/G966" er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Polski

Niniejszym, "NEC Enterprise Solutions" deklaruje, że "G266/G566d/G566s/I766/G966" jest zgodny z wymaganiami i innymi warunkami Dyrektywy 1999/5/EC.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Português

"NEC Enterprise Solutions" declara que este "G266/G566d/G566s/I766/G966" está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Slovensko

"NEC Enterprise Solutions" izjavlja, da je ta "G266/G566d/G566s/I766/G966" v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Slovensky

"NEC Enterprise Solutions" týmto vyhlasuje, že "G266/G566d/G566s/I766/G966" spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Suomi

"NEC Enterprise Solutions" vakuuttaa täten että "G266/G566d/G566s/I766/G966" tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

Svenska

Härmed intygar "NEC Enterprise Solutions" att denna "G266/G566d/G566s/I766/G966" står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

<http://www.nec-enterprise.com/Support/Declaration-of-Conformity>

NEC Nederland BV

Olympia 4

1213 NT Hilversum

The Netherlands

Additional Information G266/G566d/G566s/I766/G966 and (Enh.) Desktop Charger or (Enh.) Multi Charger Rack



Interference Information

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Modifications not expressly approved by NEC could void the user's authority to operate the equipment.

Privacy of communications may not be ensured when using this equipment.

Exposure to Radio Frequency (RF) Signals

This wireless phone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission (FCC) of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on the safety standards previously set by both U.S. and international standards bodies. These standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

Additional Information G266/G566d/G566s/I766/G966 and (Enh.) Desktop Charger or (Enh.) Multi Charger Rack

This product has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-2005 and had been tested in accordance with the measurement procedures specified in “KDB447498 and IEEE1528-2013”. For body worn operation, this handset has also been tested and meets the FCC RF exposure guideline when used with the belt clip supplied with this product. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

Hearing Aid Compatibility (HAC/VC)

The G266, G566d/G566s, I766 and G966DECT Handsets meet the FCC standard for Hearing Aid Compatibility.

Regulatory Information Canada

Interference Information

This product meets the applicable Industry Canada technical specifications.

Le présent matériel est conforme aux spécifications techniques applicables d'Industrie Canada.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause interference, and
(2) this device must accept any interference, including interference that may cause undesired operation of the device. Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et
(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Additional Information G266/G566d/G566s/I766/G966 and (Enh.) Desktop Charger or (Enh.) Multi Charger Rack

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

The device is compliance with RF field strength limits, users can obtain Canadian information on RF exposure and compliance.

Le présent appareil est conforme aux limites d'intensité de champ RF, les utilisateurs peuvent sur l'exposition aux radiofréquences et la conformité and compliance d'acquérir les informations correspondantes.

Exposure to Radio Frequency (RF) Signals

This wireless telephone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set the Ministry of Health (Canada), Safety Code 6. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on the safety standards previously set by both U.S. and international standards bodies. These standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health.

This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter. This device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Standard C95.1:2005 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013.

Hearing Aid Compatibility (HAC/VC)

The G266, G566d/G566s, I766 and G966 DECT Handsets meet the IC CS-03 issue 9 Part V standard for Hearing Aid Compatibility.

Additional Information G266/G566d/G566s/I766/G966 and (Enh.) Desktop Charger or (Enh.) Multi Charger Rack