


Test Mode: TX AX-20M Mode 2412 MHz

Horizontal

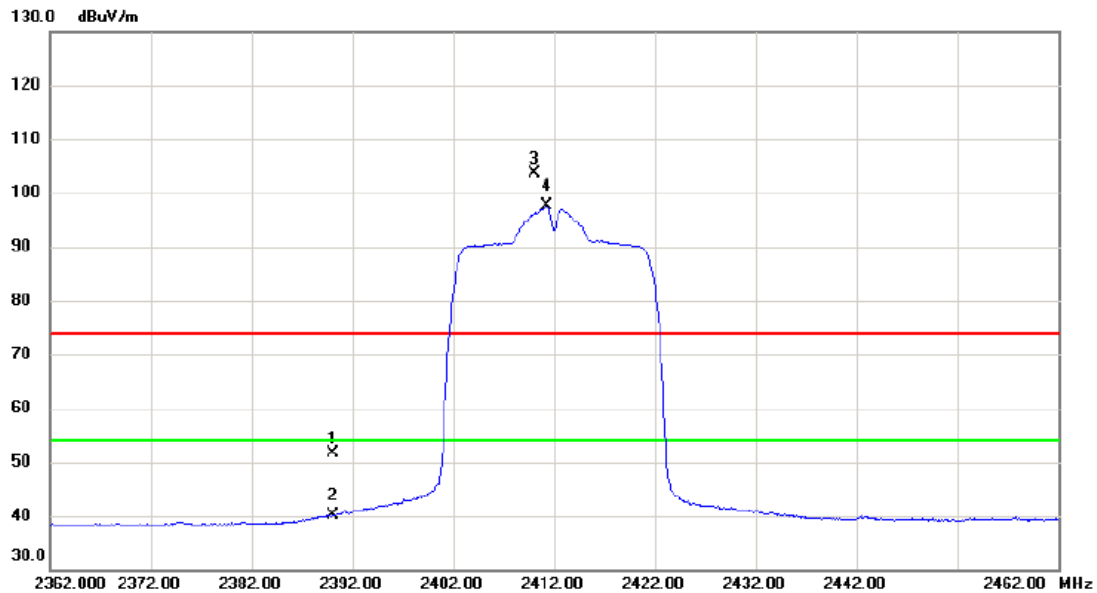


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.000	43.94	7.57	51.51	74.00	-22.49	peak	
2	2390.000	32.44	7.57	40.01	54.00	-13.99	AVG	
3 X	2410.100	96.12	7.63	103.75	74.00	29.75	peak	No Limit
4 *	2411.250	89.91	7.63	97.54	54.00	43.54	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-20M Mode 2412 MHz
------------	-------------------------

Horizontal

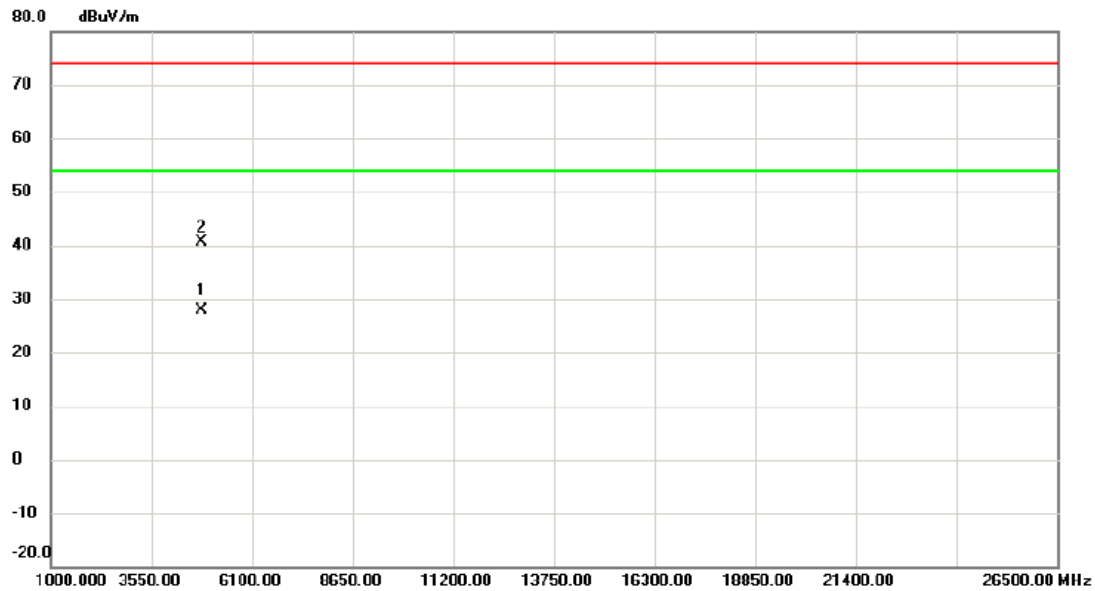


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4822.210	23.73	4.26	27.99	54.00	-26.01	AVG	
2		4825.595	36.47	4.26	40.73	74.00	-33.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz

Vertical

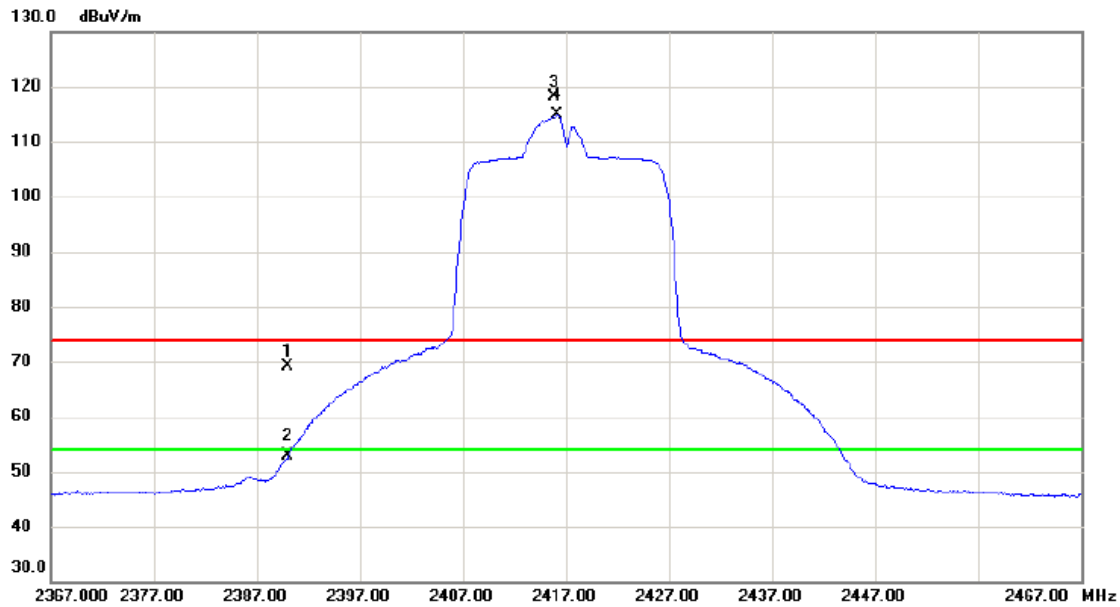


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	61.51	7.57	69.08	74.00	-4.92	peak	
2		2390.000	45.41	7.57	52.98	54.00	-1.02	AVG	
3	X	2415.850	110.60	7.65	118.25	74.00	44.25	peak	No Limit
4	*	2416.200	107.20	7.66	114.86	54.00	60.86	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz

Vertical

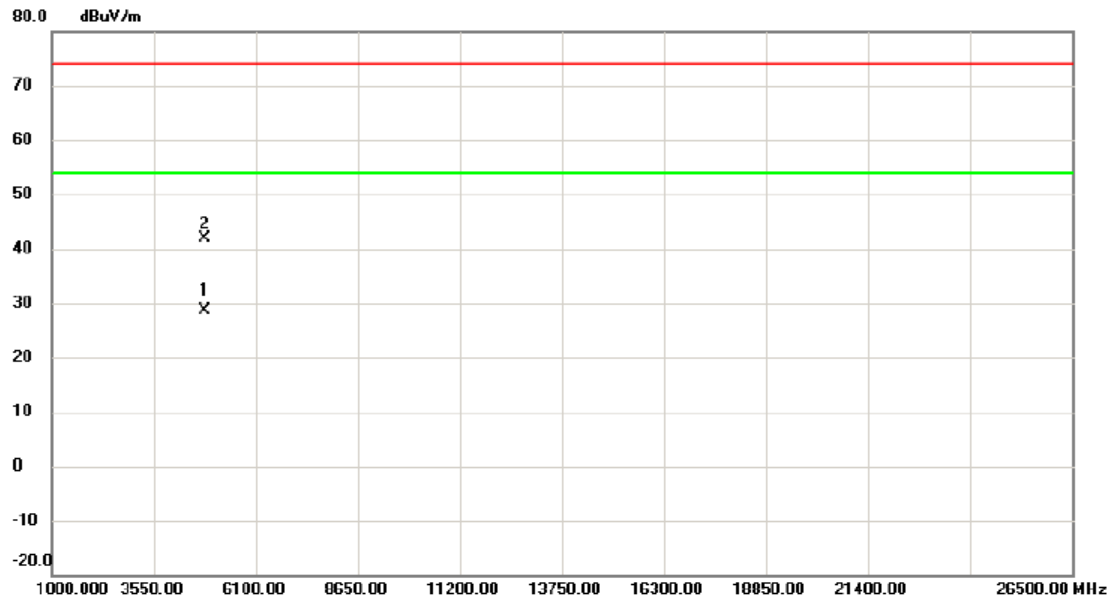


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4835.778	24.45	4.30	28.75	54.00	-25.25	AVG	
2		4835.892	37.65	4.30	41.95	74.00	-32.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz

Horizontal

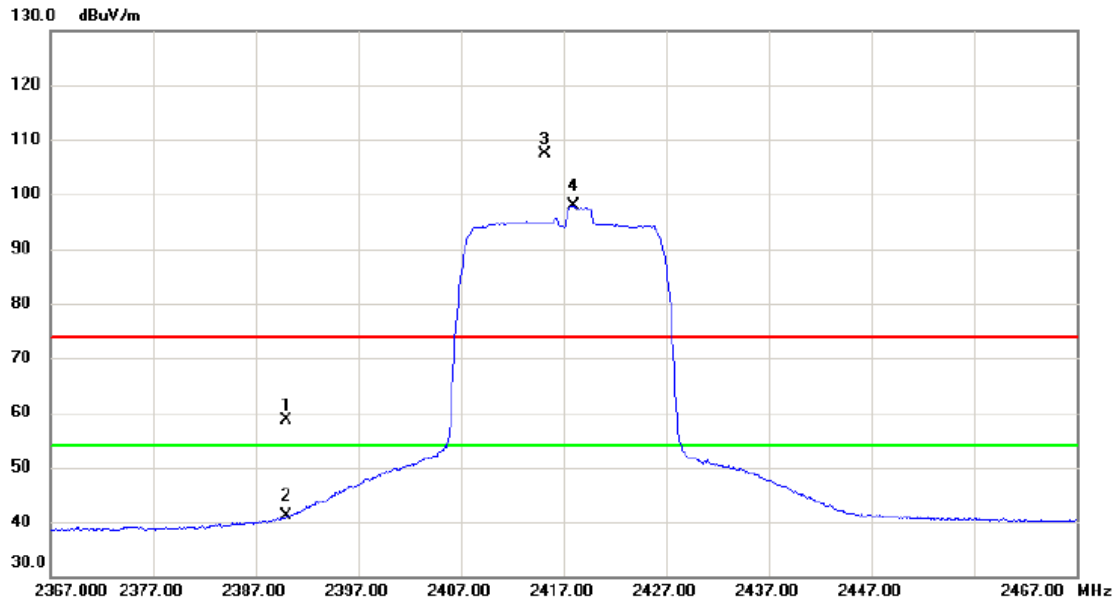

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	51.03	7.57	58.60	74.00	-15.40	peak	
2		2390.000	33.44	7.57	41.01	54.00	-12.99	AVG	
3	X	2415.250	99.67	7.65	107.32	74.00	33.32	peak	No Limit
4	*	2418.050	90.30	7.66	97.96	54.00	43.96	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz

Horizontal

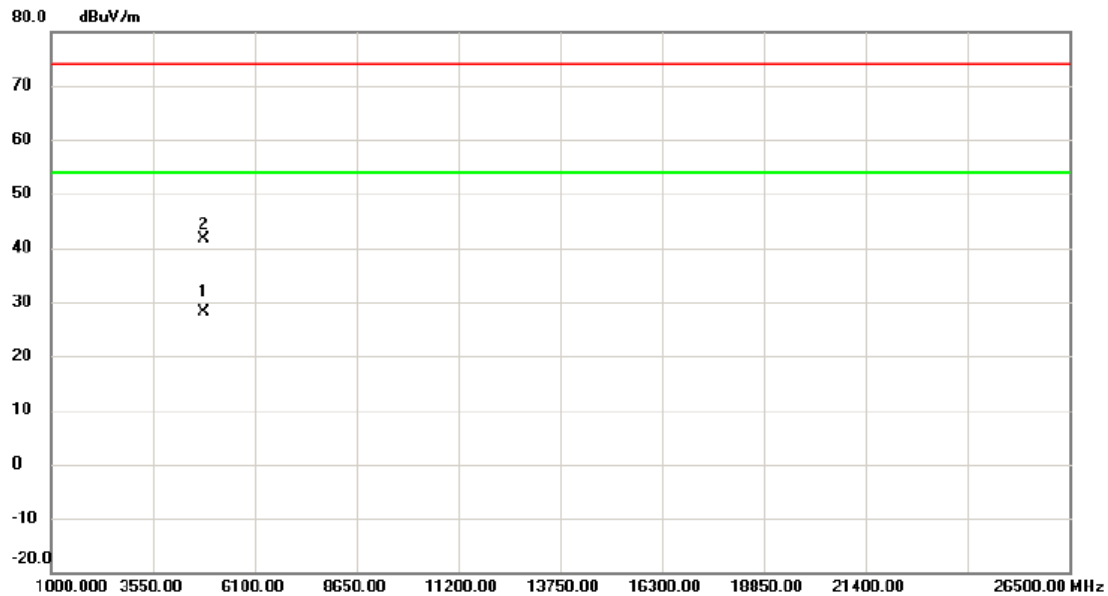


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4832.080	23.86	4.28	28.14	54.00	-25.86	AVG	
2		4833.900	37.46	4.29	41.75	74.00	-32.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz

Vertical

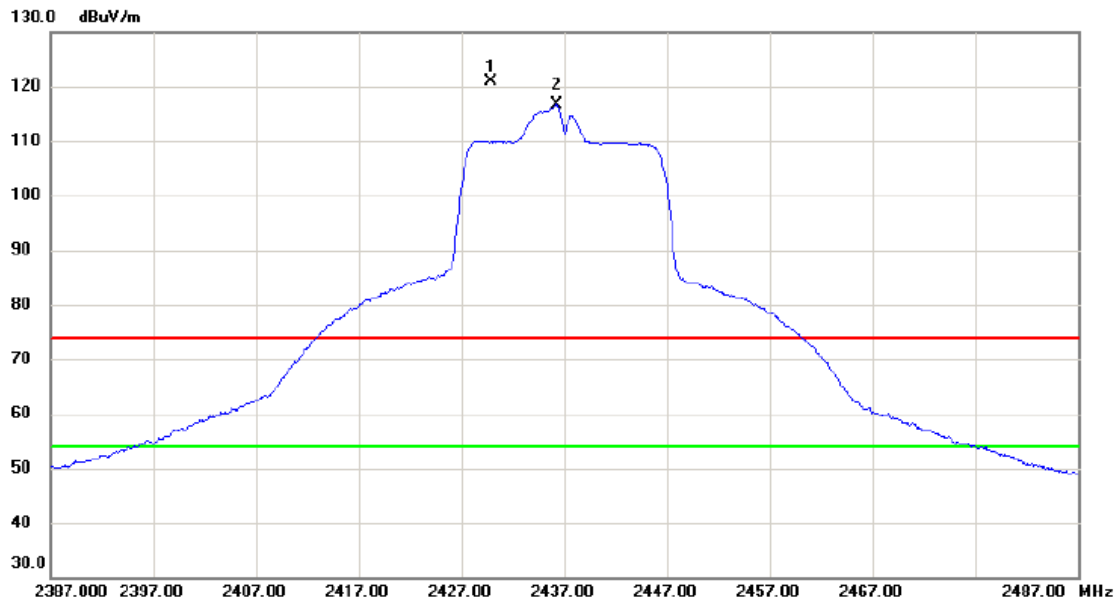


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2429.850	113.30	7.70	121.00	74.00	47.00	peak	No Limit
2	*	2436.250	109.04	7.71	116.75	54.00	62.75	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-20M Mode 2437 MHz
------------	-------------------------

Vertical

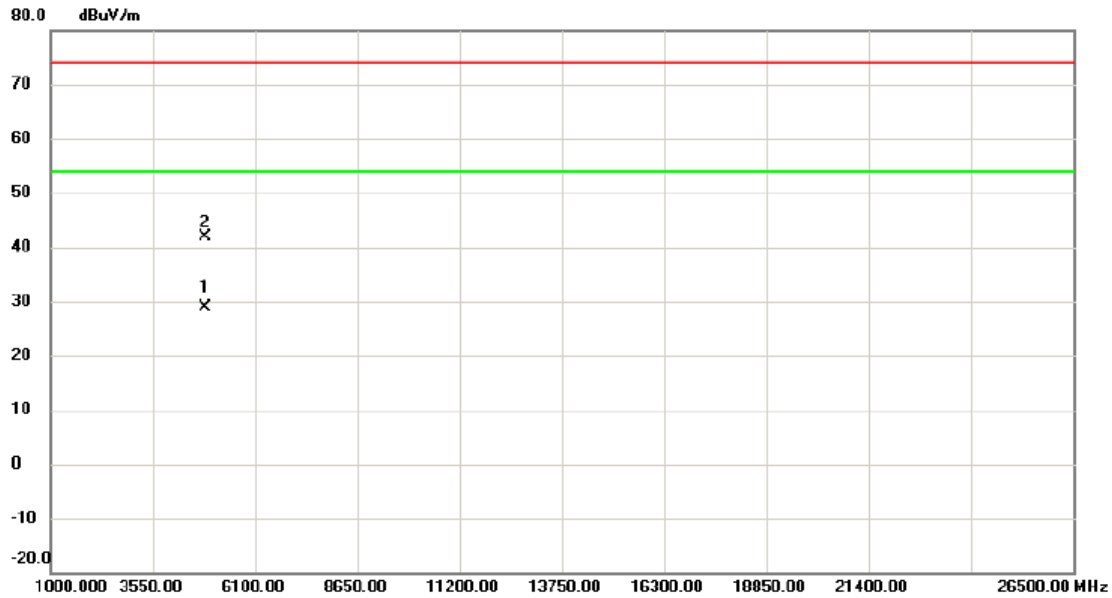


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4871.502	24.35	4.43	28.78	54.00	-25.22	AVG	
2		4873.940	37.48	4.45	41.93	74.00	-32.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz

Horizontal

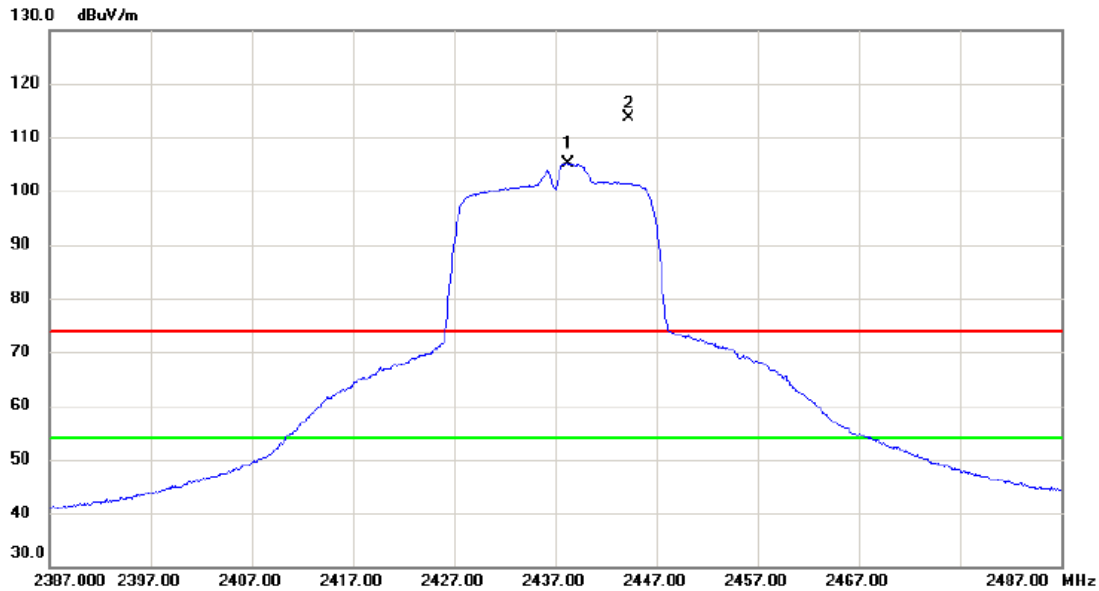

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2438.250	97.29	7.73	105.02	54.00	51.02	AVG	No Limit
2	X	2444.250	105.82	7.75	113.57	74.00	39.57	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-20M Mode 2437 MHz
------------	-------------------------

Horizontal

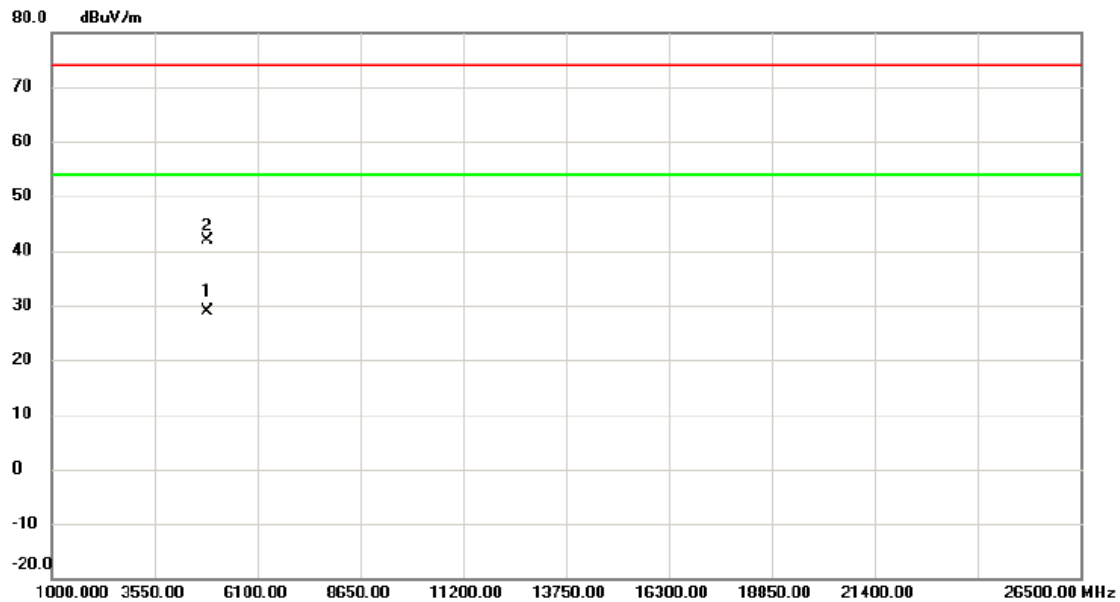


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4871.920	24.52	4.44	28.96	54.00	-25.04	AVG	
2		4872.637	37.36	4.44	41.80	74.00	-32.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz

Vertical

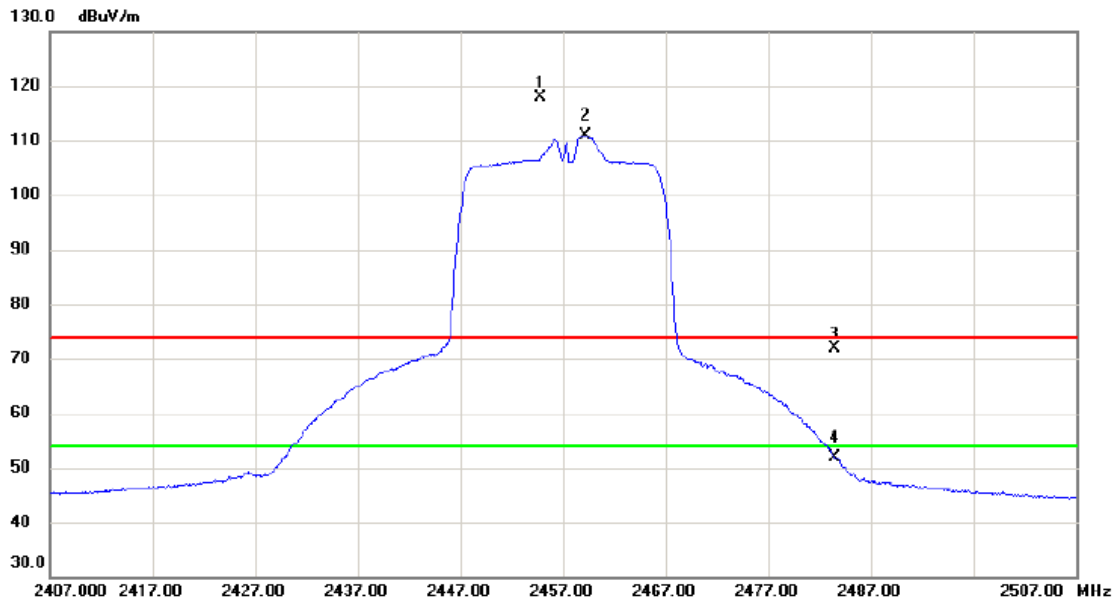


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2454.850	110.05	7.78	117.83	74.00	43.83	peak	No Limit
2	*	2459.200	103.09	7.79	110.88	54.00	56.88	AVG	No Limit
3		2483.500	64.03	7.87	71.90	74.00	-2.10	peak	
4		2483.500	44.08	7.87	51.95	54.00	-2.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz

Vertical

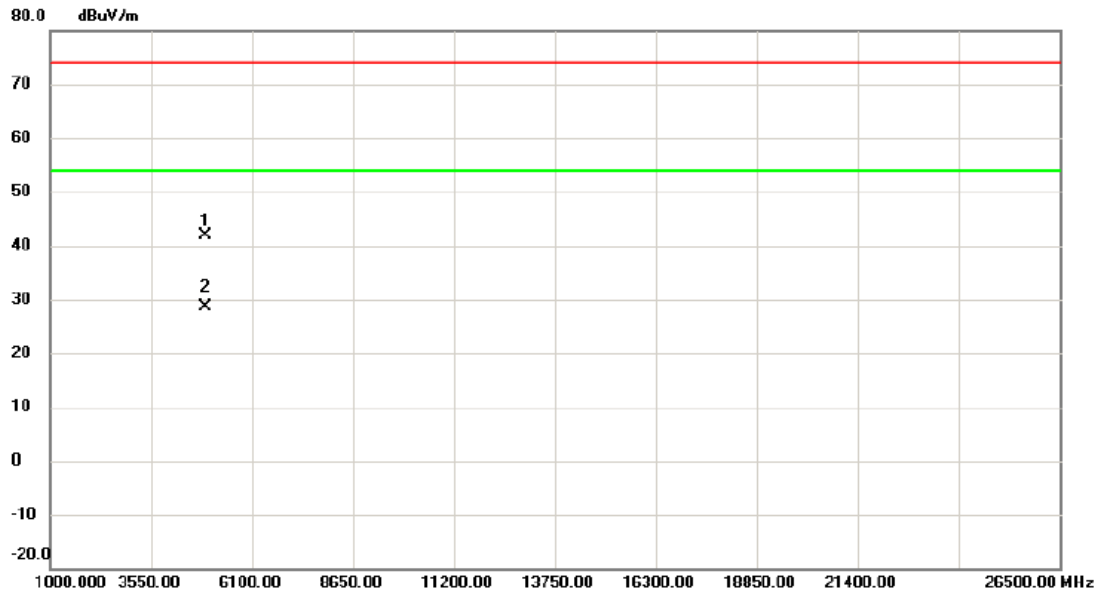


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4911.602	37.23	4.58	41.81	74.00	-32.19	peak	
2	*	4914.828	24.07	4.59	28.66	54.00	-25.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz

Horizontal

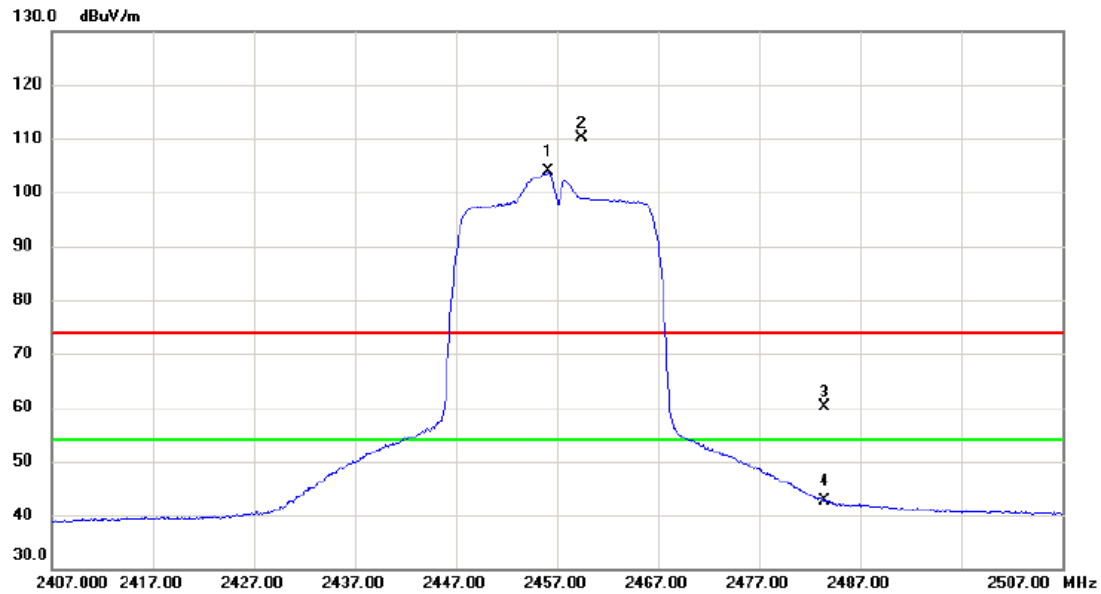

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2456.200	96.10	7.78	103.88	54.00	49.88	AVG	No Limit
2	X	2459.400	102.30	7.79	110.09	74.00	36.09	peak	No Limit
3		2483.500	52.20	7.87	60.07	74.00	-13.93	peak	
4		2483.500	34.79	7.87	42.66	54.00	-11.34	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-20M Mode 2457 MHz
------------	-------------------------

Horizontal

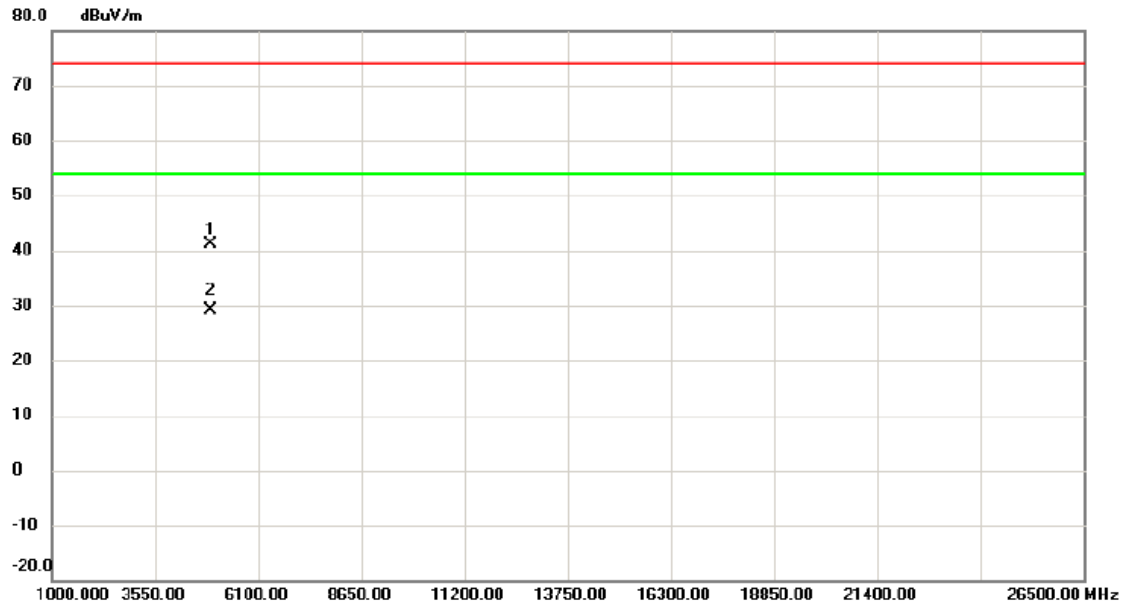


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4911.677	36.60	4.58	41.18	74.00	-32.82	peak	
2	*	4916.125	24.64	4.60	29.24	54.00	-24.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz

Vertical

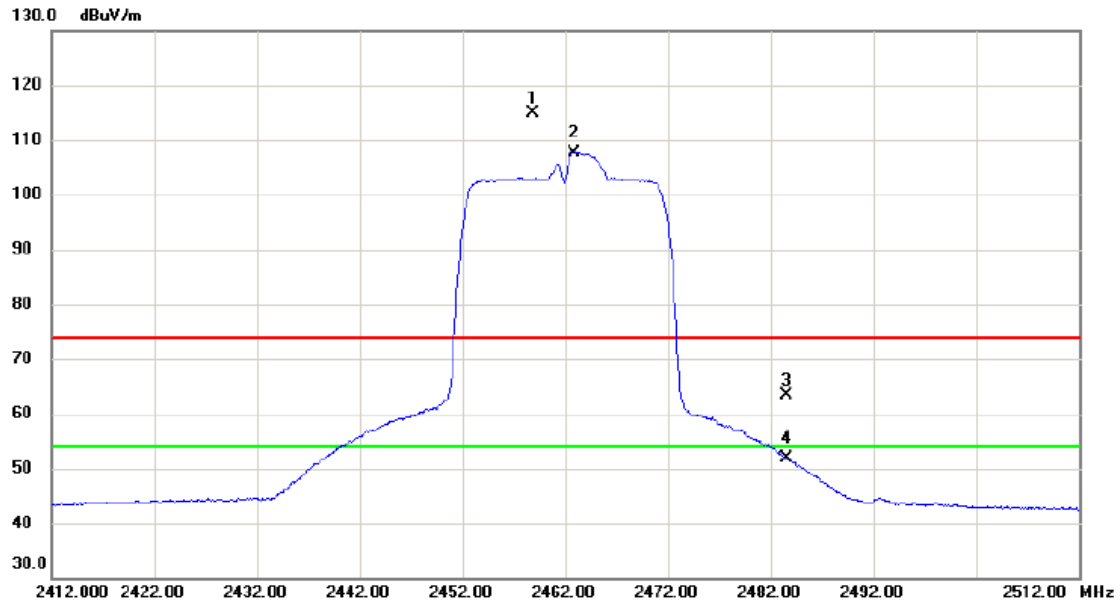


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2458.850	107.18	7.79	114.97	74.00	40.97	peak	No Limit
2	*	2462.850	99.84	7.81	107.65	54.00	53.65	AVG	No Limit
3		2483.500	55.62	7.87	63.49	74.00	-10.51	peak	
4		2483.500	44.09	7.87	51.96	54.00	-2.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz

Vertical

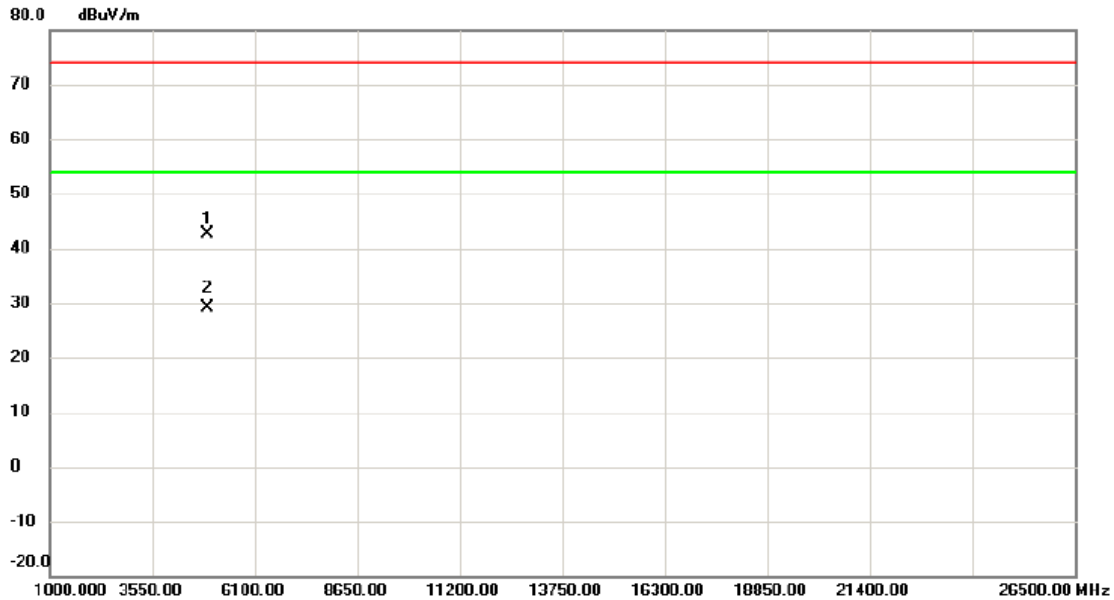

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4922.850	38.01	4.63	42.64	74.00	-31.36	peak	
2	*	4923.180	24.53	4.63	29.16	54.00	-24.84	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz

Horizontal

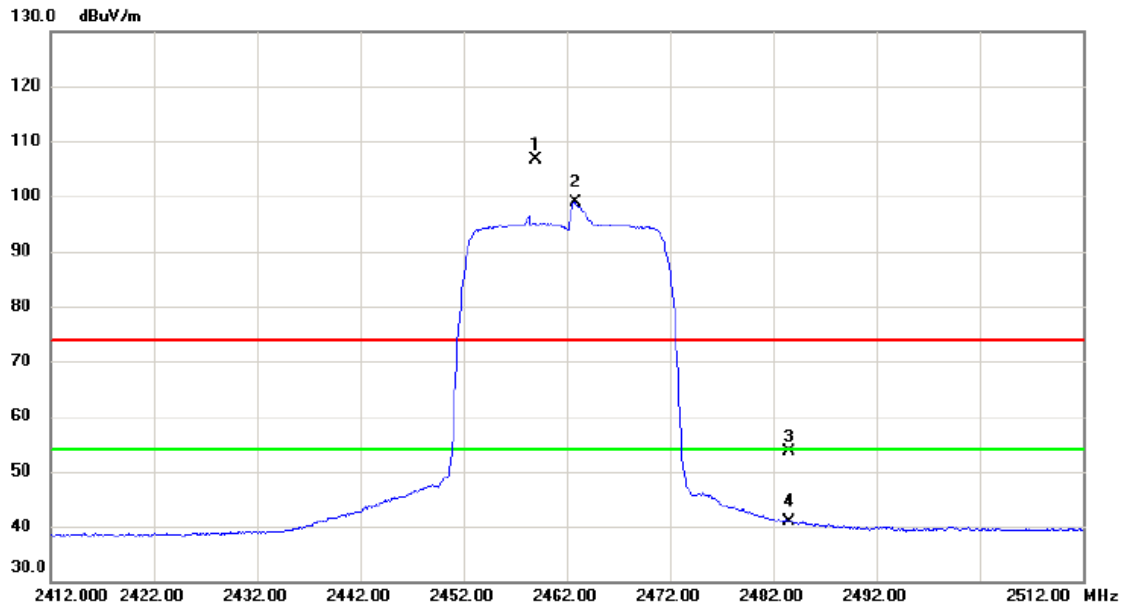


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2459.050	98.94	7.79	106.73	74.00	32.73	peak	No Limit
2	*	2462.800	91.13	7.81	98.94	54.00	44.94	AVG	No Limit
3		2483.500	45.83	7.87	53.70	74.00	-20.30	peak	
4		2483.500	32.98	7.87	40.85	54.00	-13.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-20M Mode 2462 MHz
------------	-------------------------

Horizontal

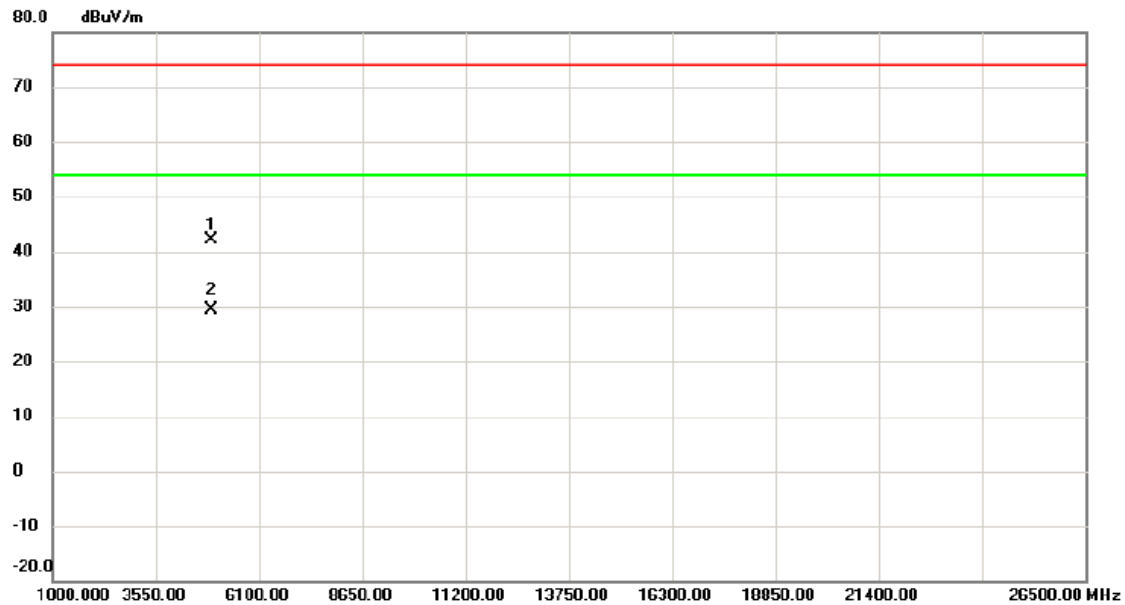


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4921.688	37.47	4.62	42.09	74.00	-31.91	peak	
2	*	4924.563	24.80	4.63	29.43	54.00	-24.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422 MHz

Vertical

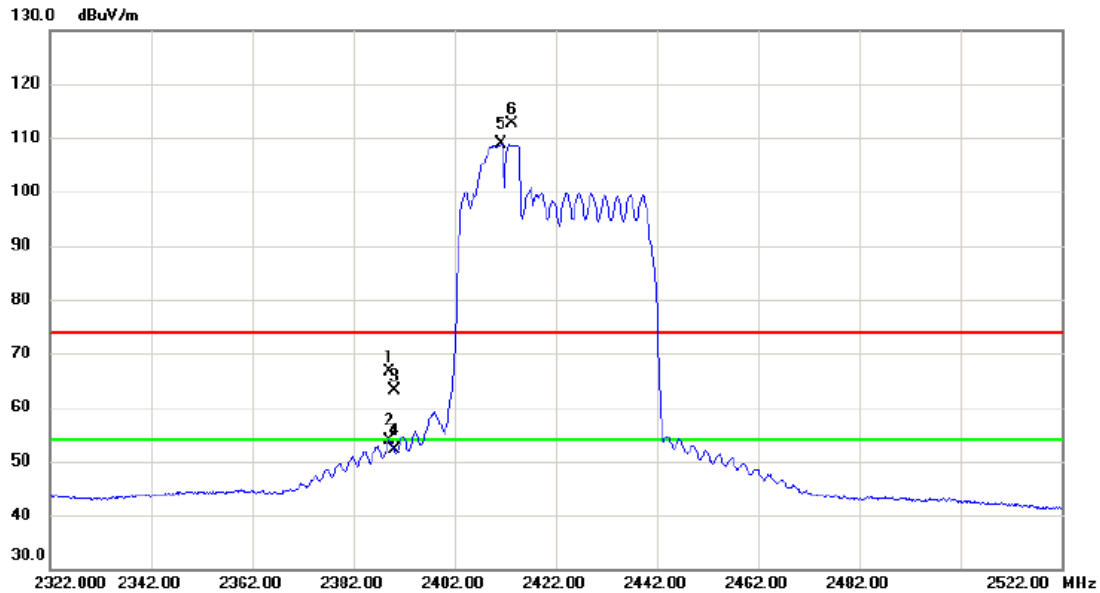

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2389.100	59.08	7.57	66.65	74.00	-7.35	peak	
2		2389.100	46.30	7.57	53.87	54.00	-0.13	AVG	
3		2390.000	55.46	7.57	63.03	74.00	-10.97	peak	
4		2390.000	44.63	7.57	52.20	54.00	-1.80	AVG	
5 *		2411.200	101.34	7.63	108.97	54.00	54.97	AVG	No Limit
6 X		2413.300	105.03	7.65	112.68	74.00	38.68	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422 MHz

Vertical

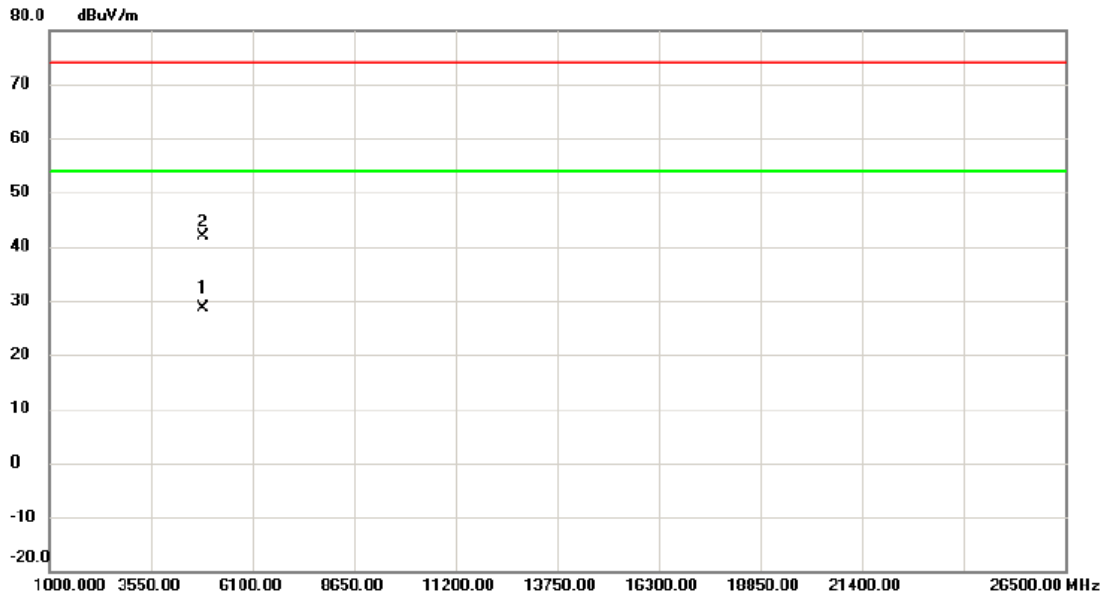


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4842.102	24.32	4.32	28.64	54.00	-25.36	AVG	
2		4843.070	37.61	4.32	41.93	74.00	-32.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422 MHz

Horizontal

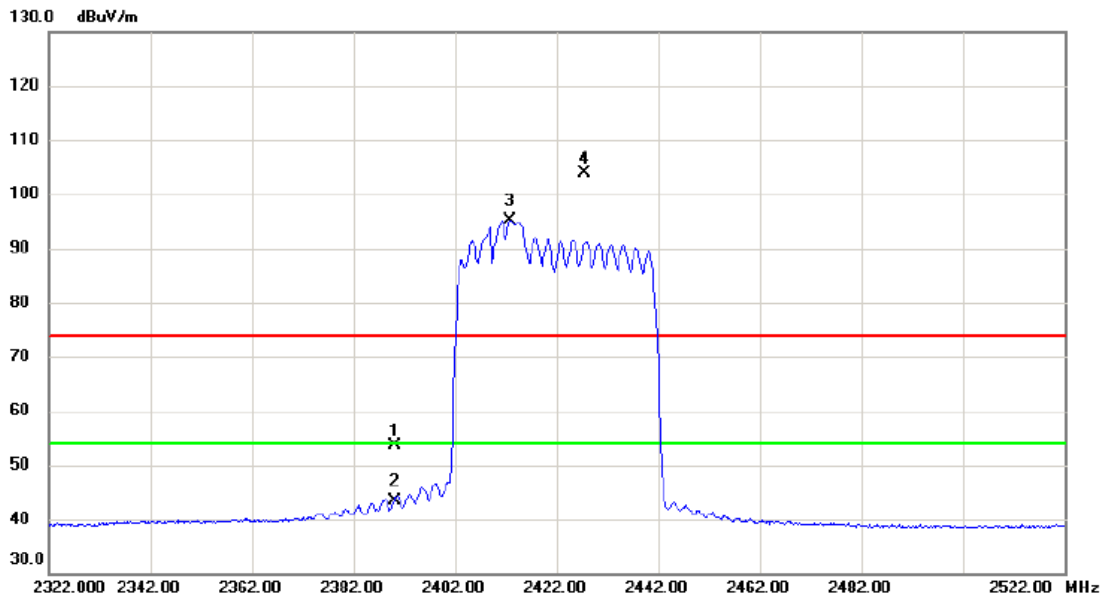

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	46.03	7.57	53.60	74.00	-20.40	peak	
2		2390.000	35.93	7.57	43.50	54.00	-10.50	AVG	
3	*	2412.800	87.48	7.65	95.13	54.00	41.13	AVG	No Limit
4	X	2427.600	96.23	7.69	103.92	74.00	29.92	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-40M Mode 2422 MHz
------------	-------------------------

Horizontal

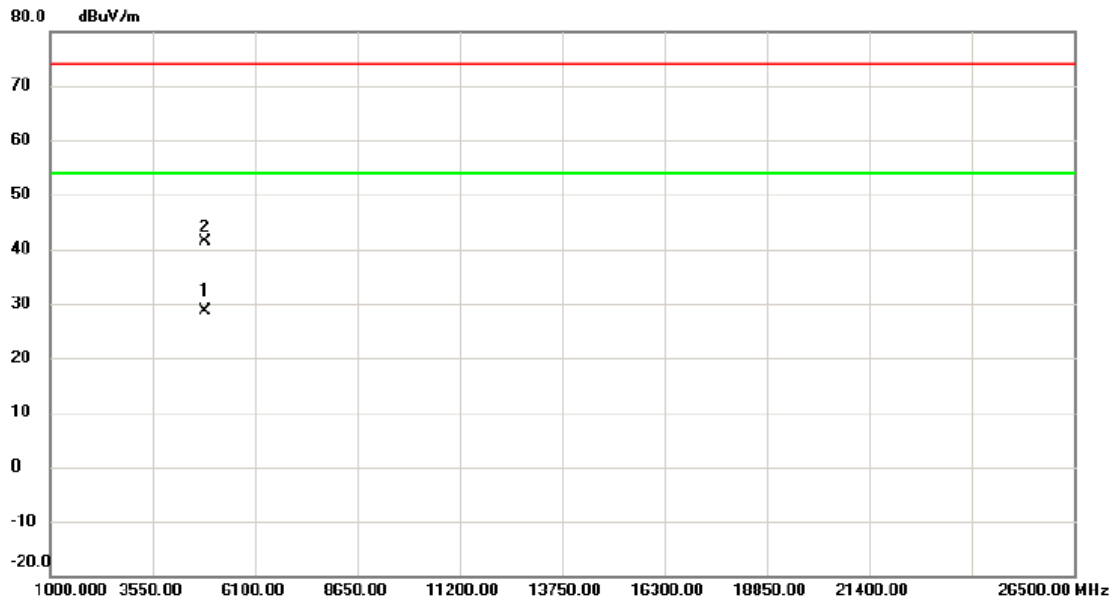


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4842.188	24.20	4.32	28.52	54.00	-25.48	AVG	
2		4844.663	36.98	4.33	41.31	74.00	-32.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz

Vertical

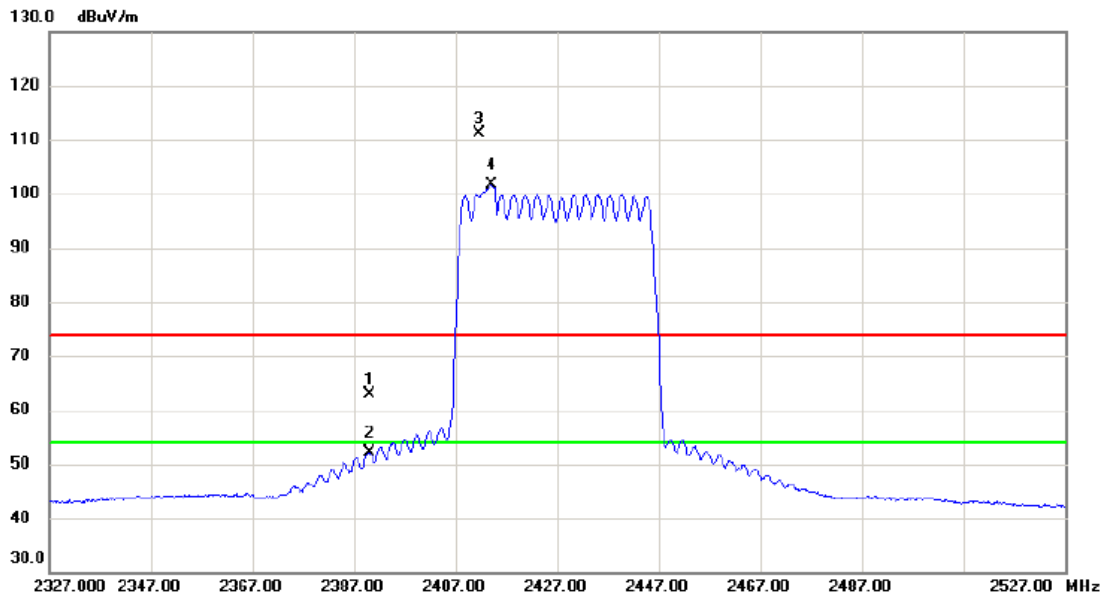

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.26	7.57	62.83	74.00	-11.17	peak	
2		2390.000	44.50	7.57	52.07	54.00	-1.93	AVG	
3	X	2411.600	103.40	7.64	111.04	74.00	37.04	peak	No Limit
4	*	2414.200	93.93	7.65	101.58	54.00	47.58	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz

Vertical

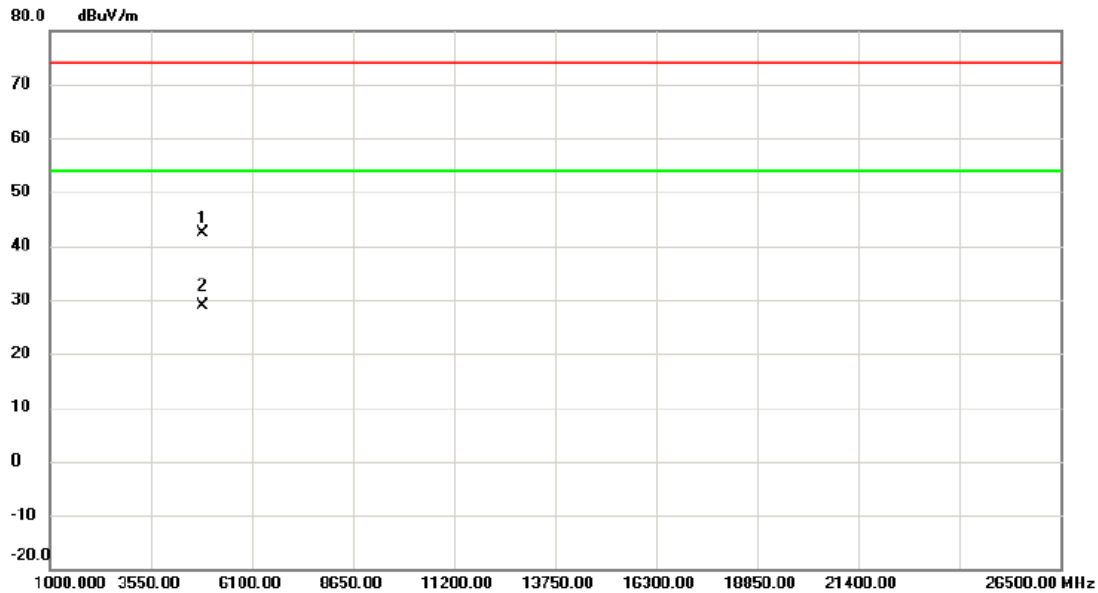


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4853.115	38.01	4.36	42.37	74.00	-31.63	peak	
2	*	4853.680	24.54	4.37	28.91	54.00	-25.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz

Horizontal

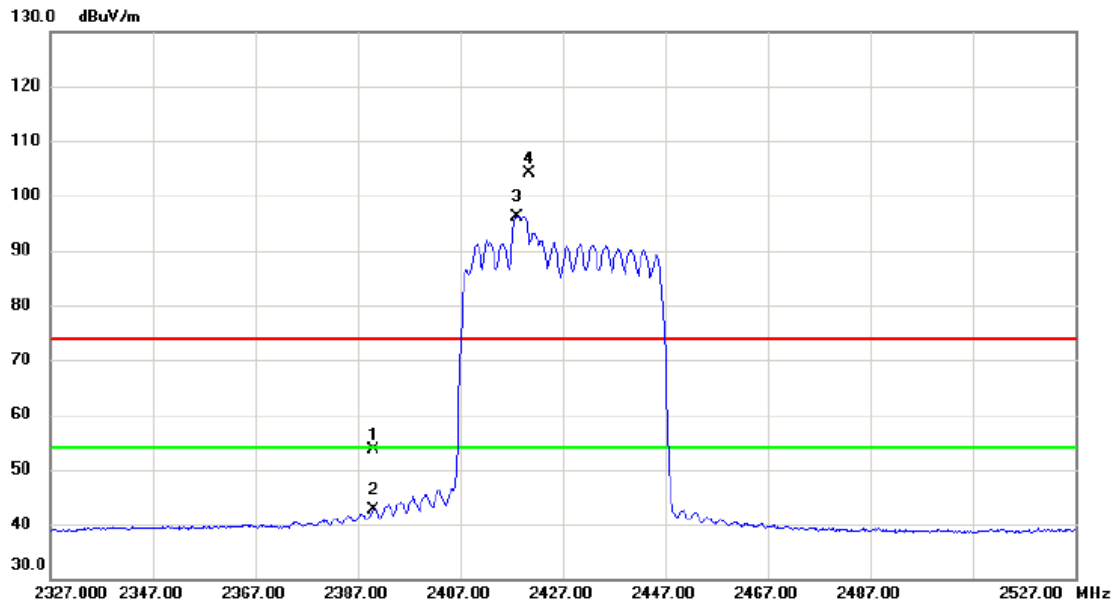

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	46.17	7.57	53.74	74.00	-20.26	peak	
2		2390.000	35.15	7.57	42.72	54.00	-11.28	AVG	
3	*	2418.200	88.51	7.66	96.17	54.00	42.17	AVG	No Limit
4	X	2420.500	96.36	7.67	104.03	74.00	30.03	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-40M Mode 2427 MHz
------------	-------------------------

Horizontal

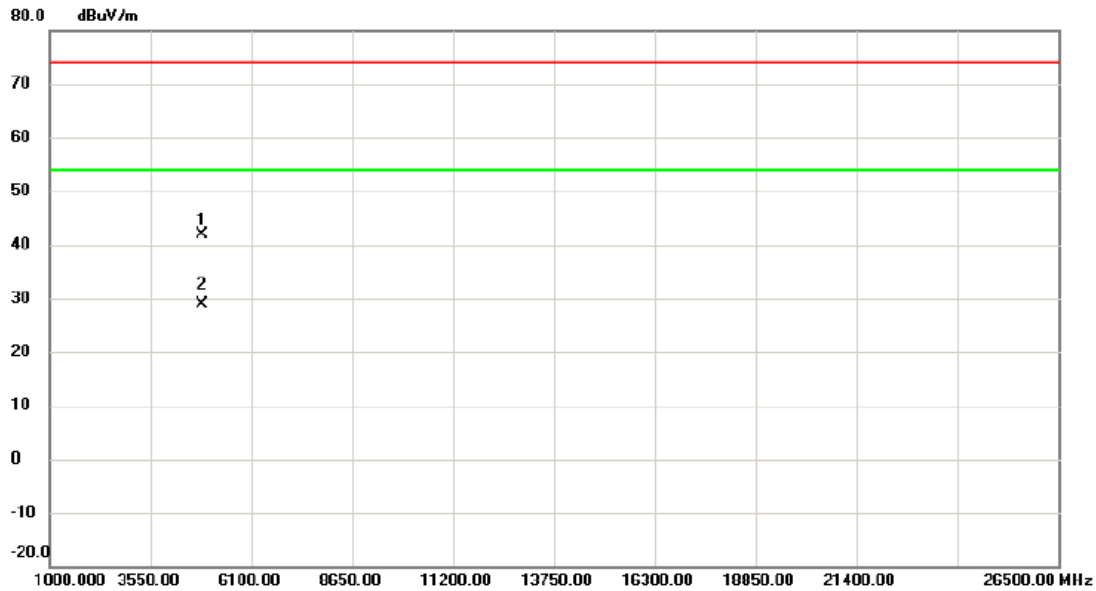


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4852.425	37.40	4.36	41.76	74.00	-32.24	peak	
2	*	4853.717	24.59	4.37	28.96	54.00	-25.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz

Vertical

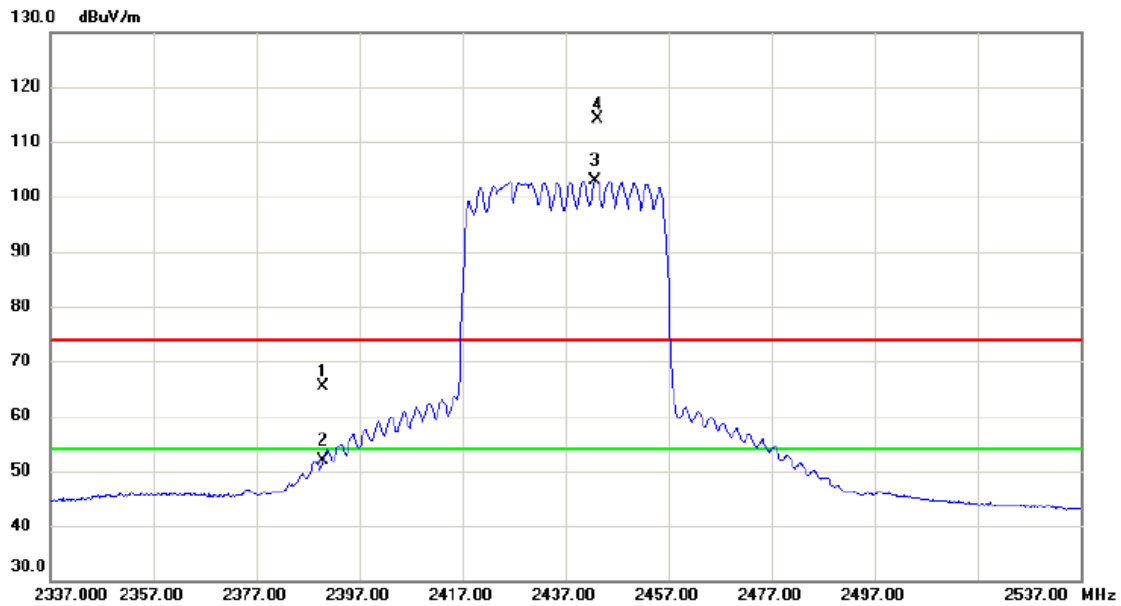


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	57.72	7.57	65.29	74.00	-8.71	peak	
2		2390.000	44.34	7.57	51.91	54.00	-2.09	AVG	
3	*	2442.800	95.20	7.74	102.94	54.00	48.94	AVG	No Limit
4	X	2443.300	106.35	7.75	114.10	74.00	40.10	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-40M Mode 2437 MHz
------------	-------------------------

Vertical

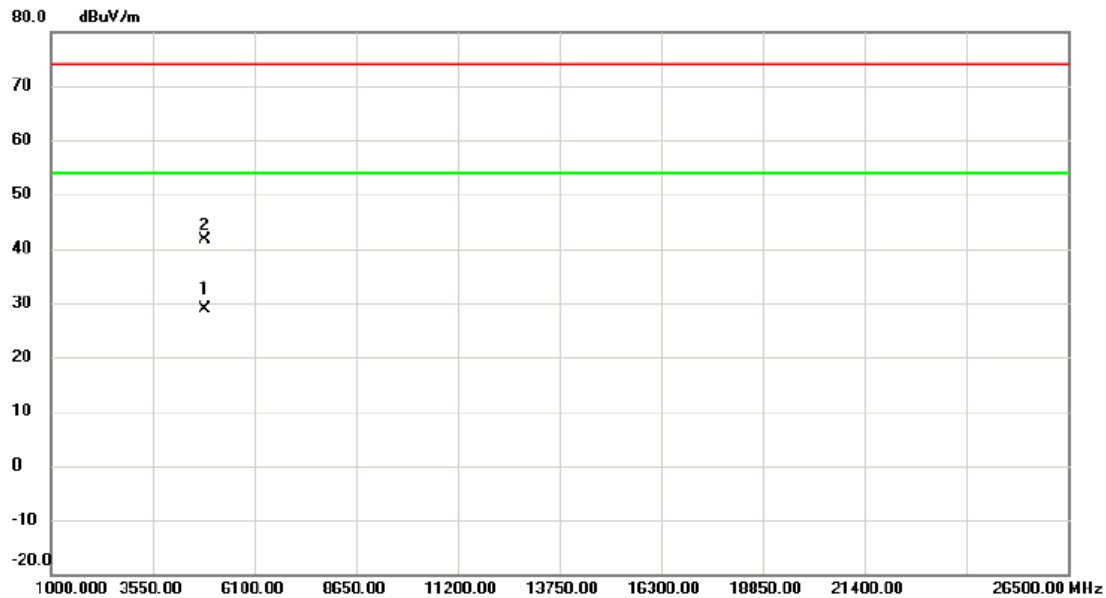


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4871.757	24.43	4.43	28.86	54.00	-25.14	AVG	
2		4874.382	37.17	4.45	41.62	74.00	-32.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz

Horizontal

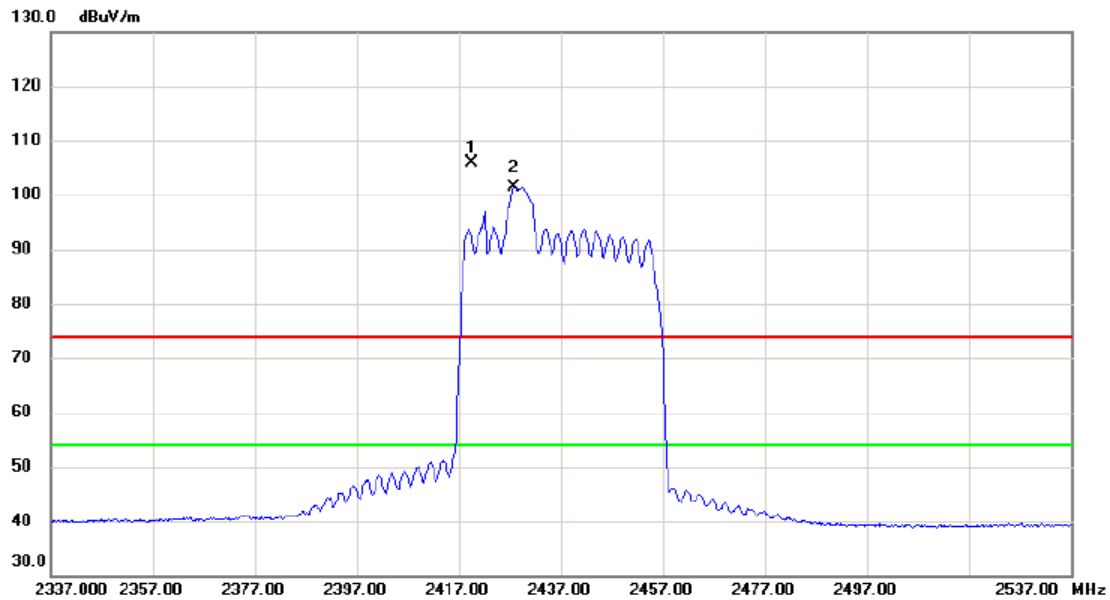

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2419.400	98.21	7.66	105.87	74.00	31.87	peak	No Limit
2	*	2427.800	93.79	7.69	101.48	54.00	47.48	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz

Horizontal

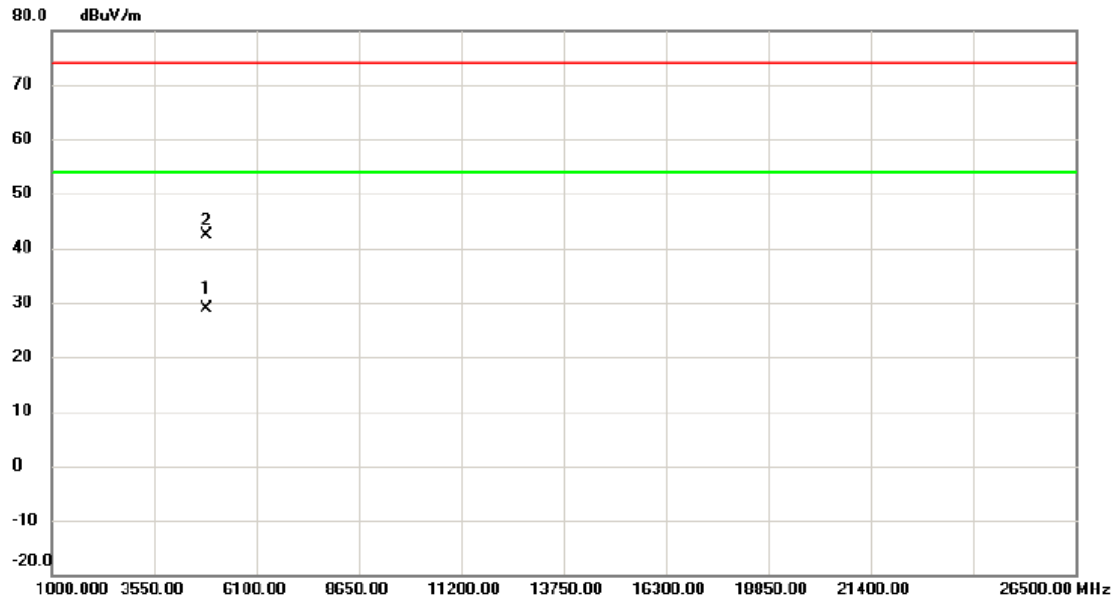


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4871.868	24.43	4.43	28.86	54.00	-25.14	AVG	
2		4874.715	37.96	4.45	42.41	74.00	-31.59	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz

Vertical

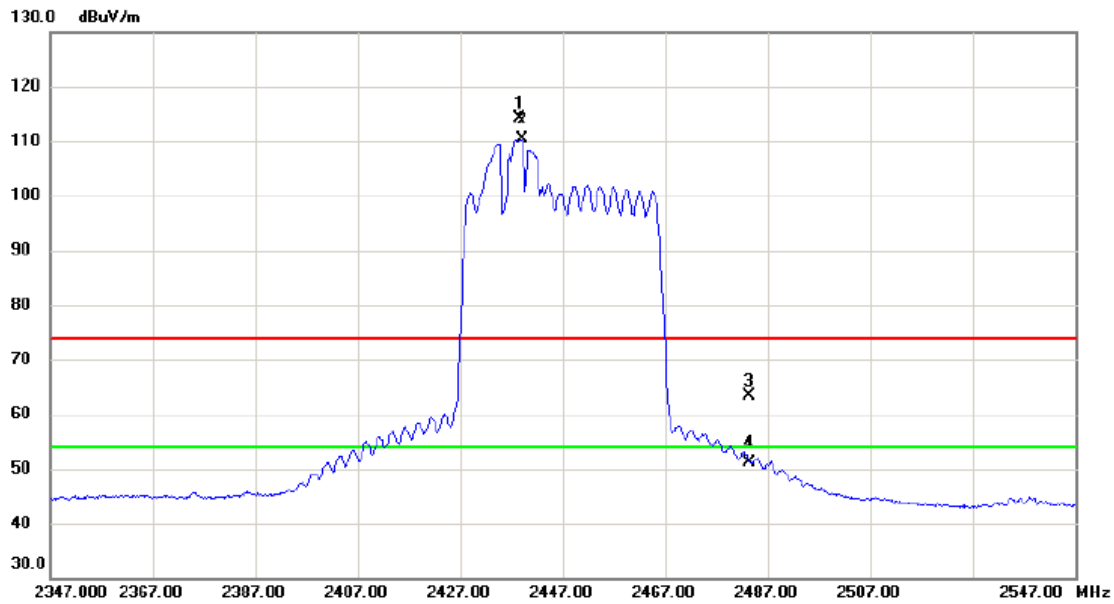

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2438.600	106.29	7.73	114.02	74.00	40.02	peak	No Limit
2	*	2439.200	102.52	7.74	110.26	54.00	56.26	AVG	No Limit
3		2483.500	55.50	7.87	63.37	74.00	-10.63	peak	
4		2483.500	43.24	7.87	51.11	54.00	-2.89	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-40M Mode 2447 MHz
------------	-------------------------

Vertical

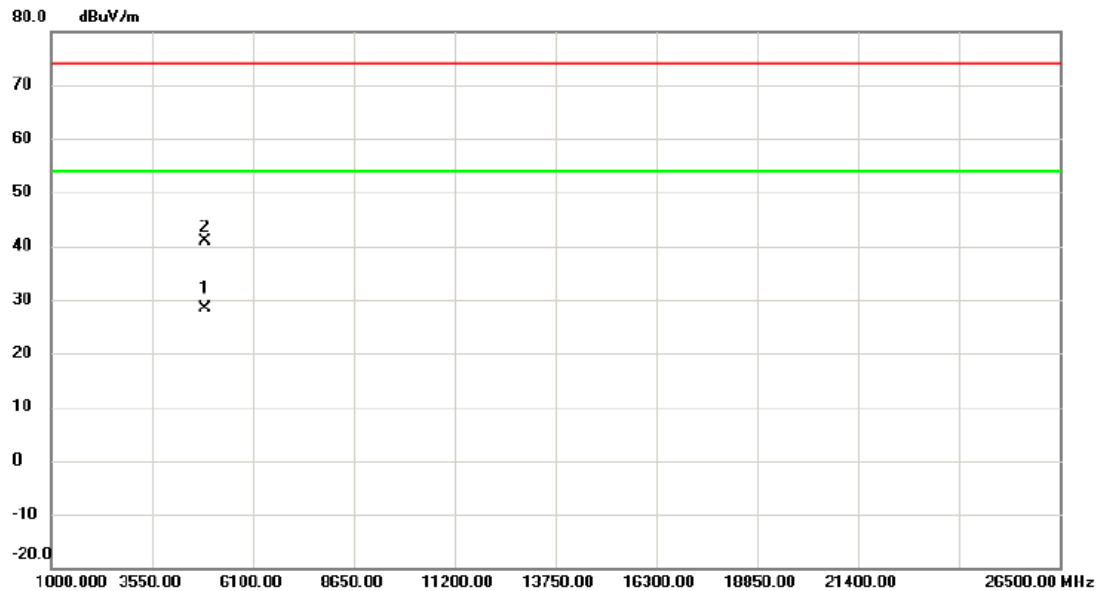


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4892.020	23.96	4.51	28.47	54.00	-25.53	AVG	
2		4892.185	36.26	4.51	40.77	74.00	-33.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz

Horizontal

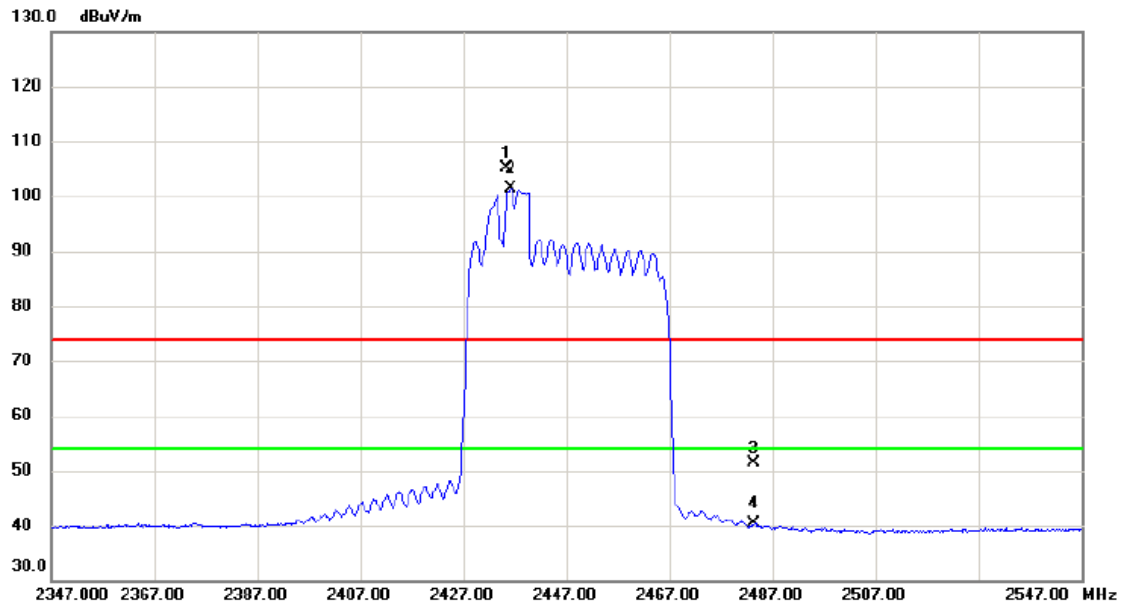


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2435.400	97.34	7.71	105.05	74.00	31.05	peak	No Limit
2	*	2436.200	93.66	7.71	101.37	54.00	47.37	AVG	No Limit
3		2483.500	43.63	7.87	51.50	74.00	-22.50	peak	
4		2483.500	32.40	7.87	40.27	54.00	-13.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz

Horizontal

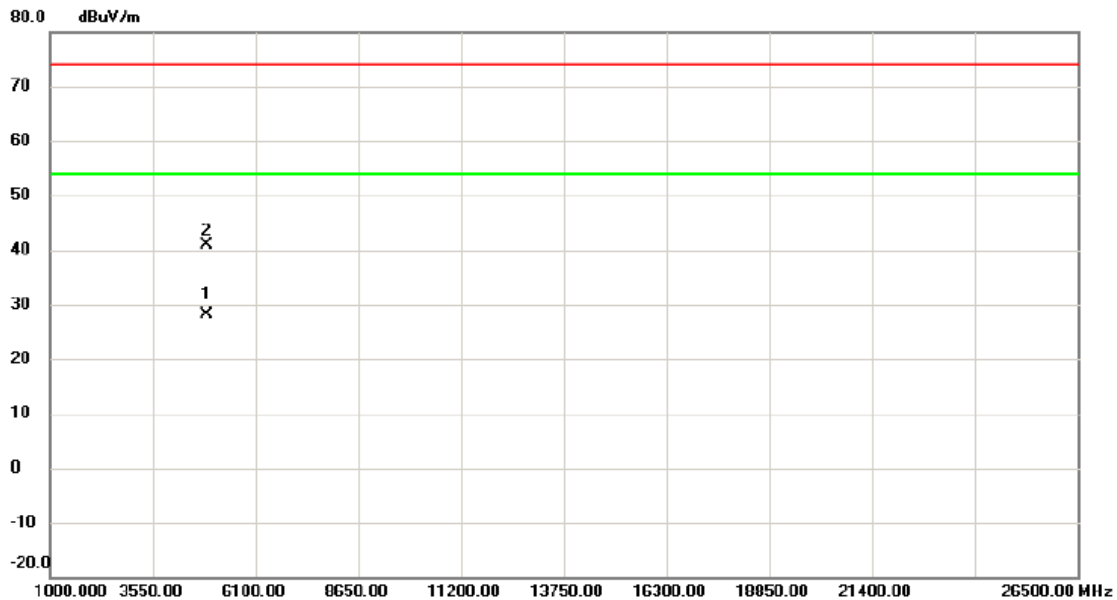

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4892.370	23.68	4.51	28.19	54.00	-25.81	AVG	
2		4896.333	36.28	4.52	40.80	74.00	-33.20	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz

Vertical

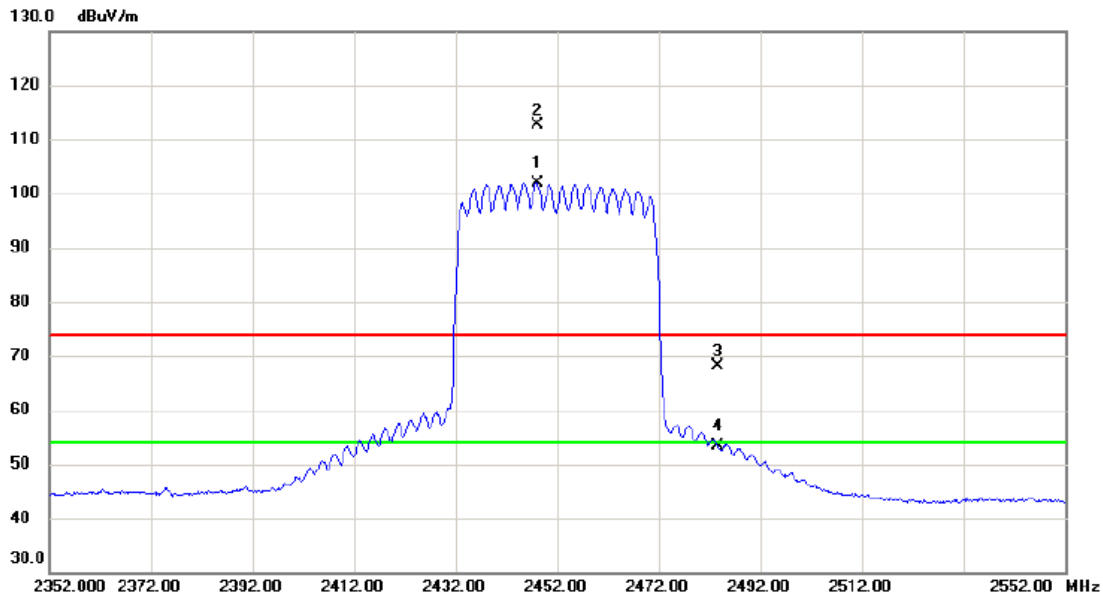

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2448.000	94.17	7.76	101.93	54.00	47.93	AVG	No Limit
2	X	2448.200	104.78	7.76	112.54	74.00	38.54	peak	No Limit
3		2483.500	60.19	7.87	68.06	74.00	-5.94	peak	
4		2483.500	45.62	7.87	53.49	54.00	-0.51	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-40M Mode 2452 MHz
------------	-------------------------

Vertical

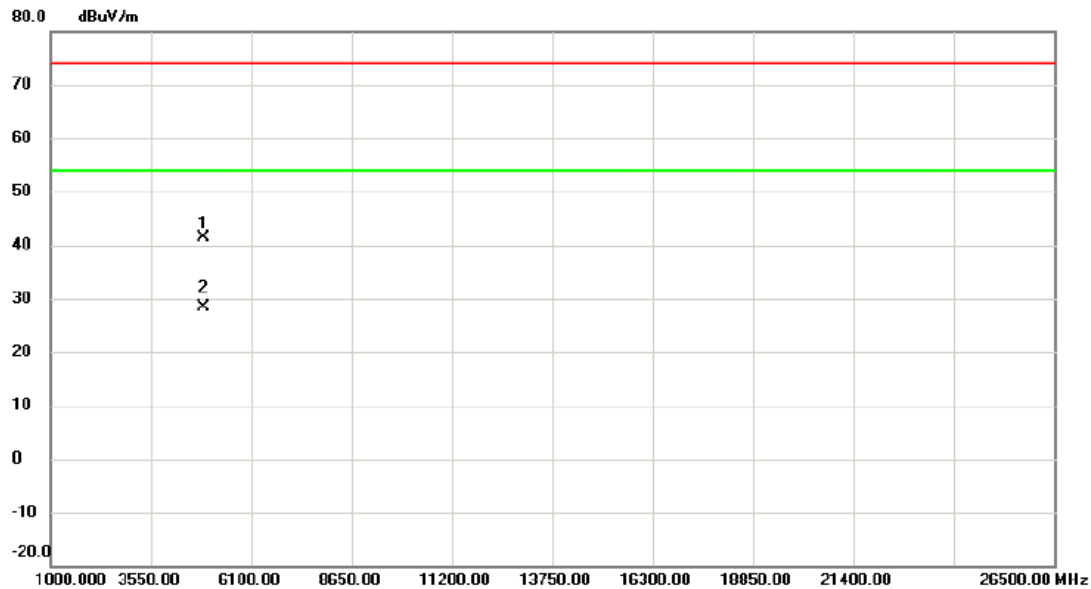

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4901.760	36.83	4.54	41.37	74.00	-32.63	peak	
2	*	4903.347	23.78	4.56	28.34	54.00	-25.66	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz

Horizontal

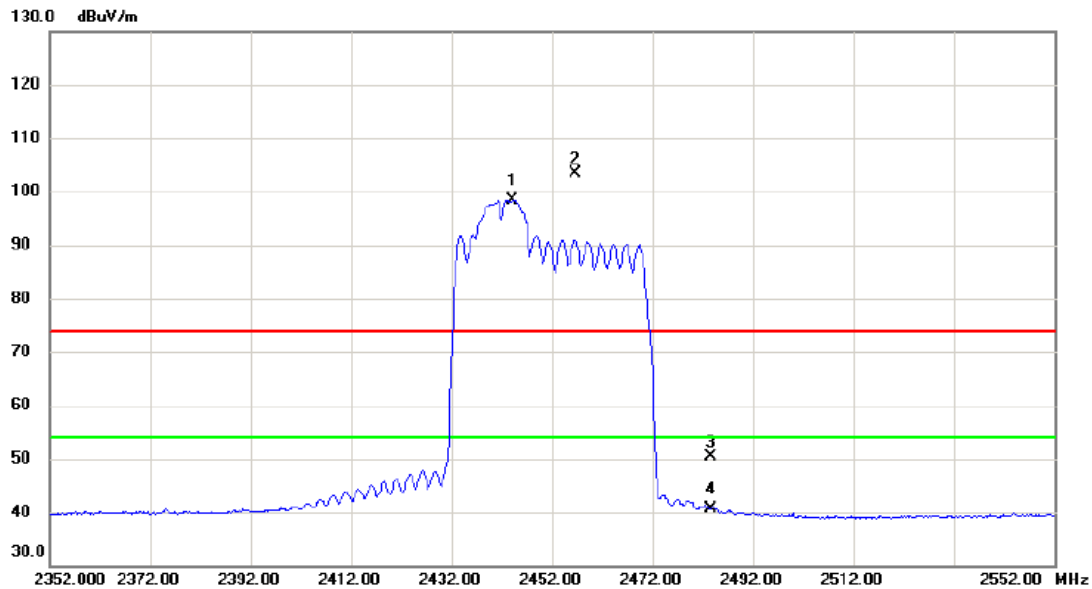

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2444.200	90.70	7.75	98.45	54.00	44.45	AVG	No Limit
2	X	2456.600	95.64	7.78	103.42	74.00	29.42	peak	No Limit
3		2483.500	42.53	7.87	50.40	74.00	-23.60	peak	
4		2483.500	32.87	7.87	40.74	54.00	-13.26	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-40M Mode 2452 MHz
------------	-------------------------

Horizontal

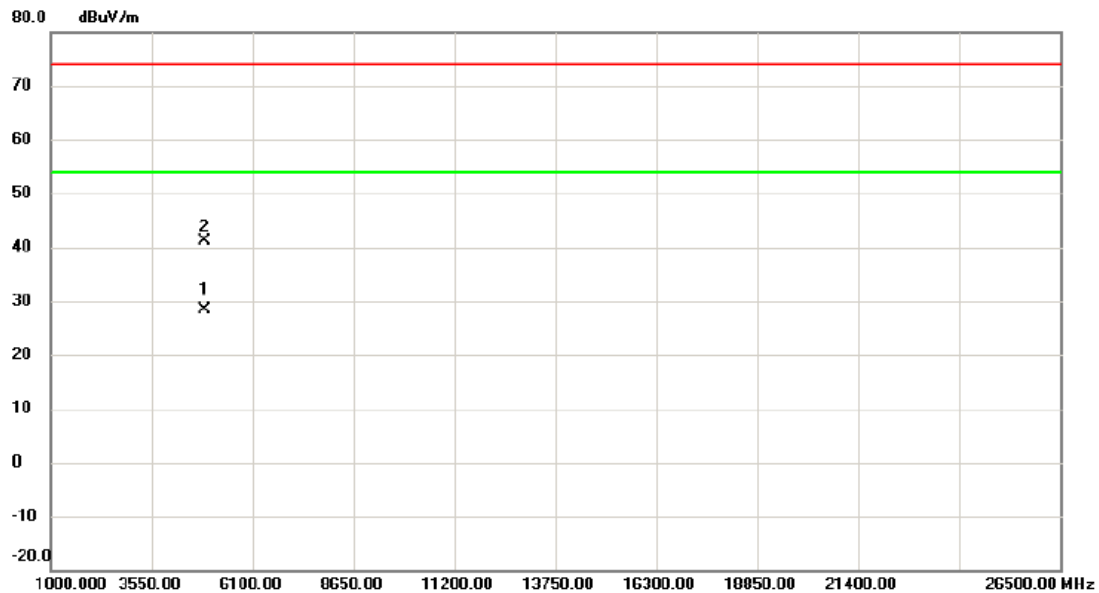

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4902.403	23.75	4.54	28.29	54.00	-25.71	AVG	
2		4902.845	36.70	4.54	41.24	74.00	-32.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	6.59	500	Complies
06	2437	6.56	500	Complies
11	2462	8.06	500	Complies




Date: 16.AUG.2019 12:20:20




Test Mode	TX N-40M Mode
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	36.44	500	Complies
06	2437	36.44	500	Complies
09	2452	36.48	500	Complies

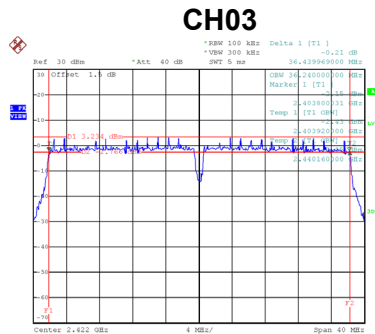

Date: 16.AUG.2019 11:14:44

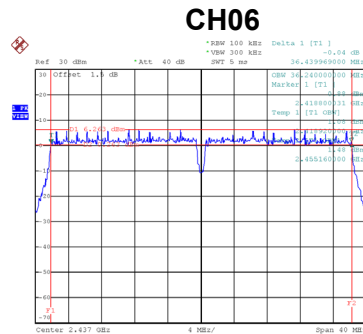


Date: 16.AUG.2019 11:16:21

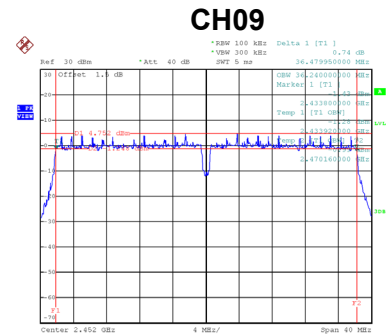


Date: 16.AUG.2019 11:19:14


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	36.80	Complies
06	2437	37.00	Complies
09	2452	36.60	Complies

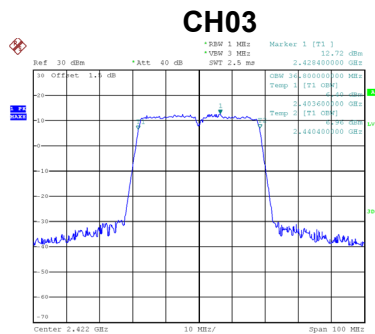

Date: 16.AUG.2019 12:29:45

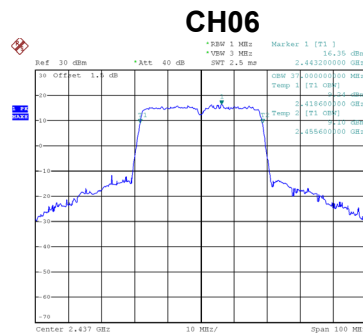


Date: 16.AUG.2019 12:30:18

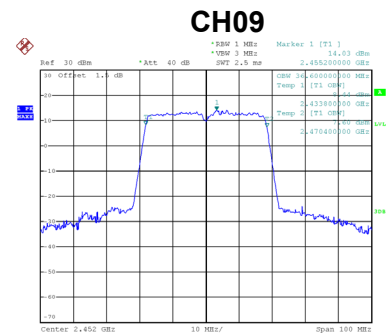


Date: 16.AUG.2019 12:30:55

Test Mode	TX AX-20M Mode
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	19.10	500	Complies
06	2437	18.97	500	Complies
11	2462	19.03	500	Complies

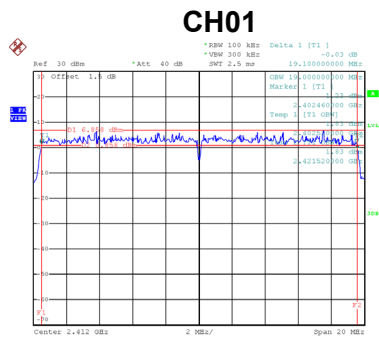

Date: 16.AUG.2019 12:06:57

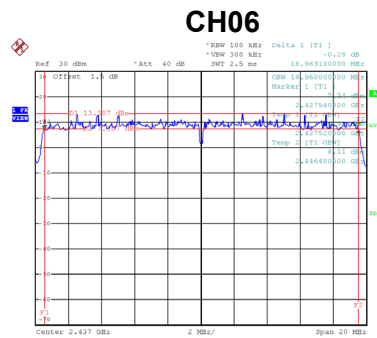


Date: 16.AUG.2019 12:08:32

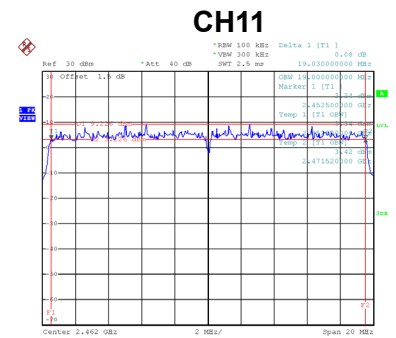


Date: 16.AUG.2019 12:10:06


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	19.30	Complies
06	2437	19.60	Complies
11	2462	19.40	Complies

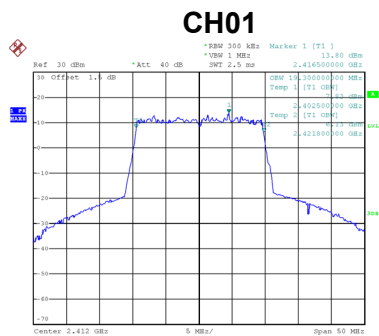

Date: 16.AUG.2019 12:26:56

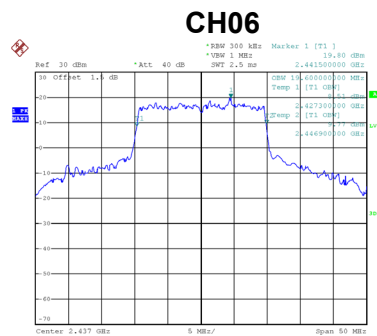


Date: 16.AUG.2019 12:27:50

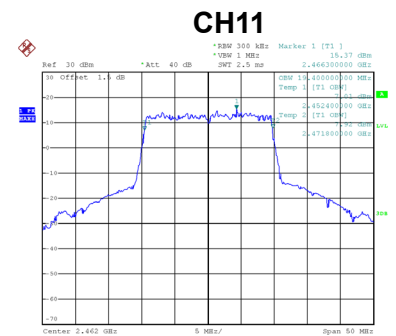


Date: 16.AUG.2019 12:28:49

Test Mode	TX AX-40M Mode
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	37.36	500	Complies
06	2437	37.64	500	Complies
09	2452	37.73	500	Complies

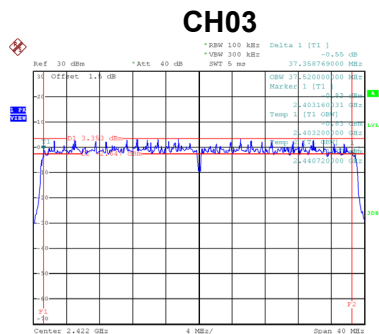

Date: 16.AUG.2019 12:12:12

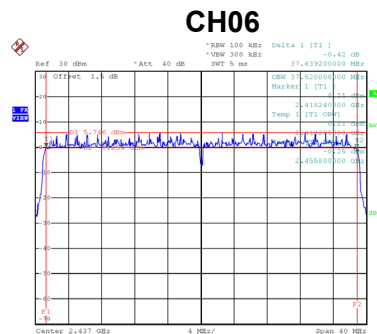


Date: 16.AUG.2019 12:14:41

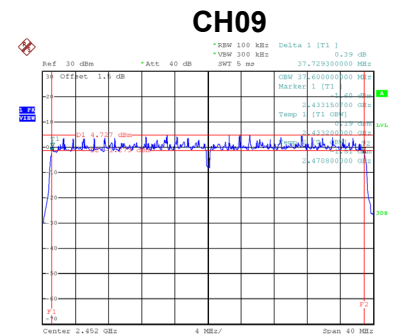


Date: 16.AUG.2019 12:16:02


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	37.80	Complies
06	2437	37.80	Complies
09	2452	37.80	Complies

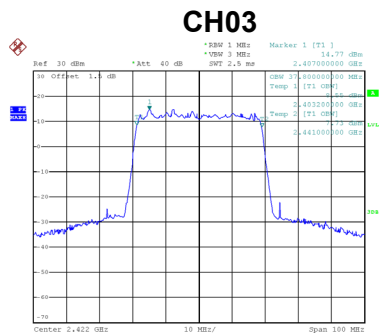

Date: 16.AUG.2019 12:32:43

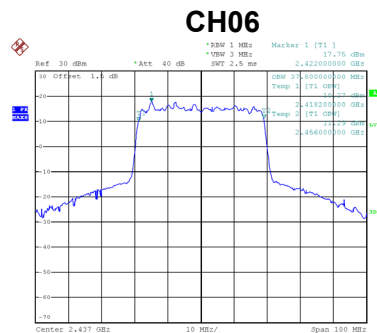

Date: 16.AUG.2019 12:33:20

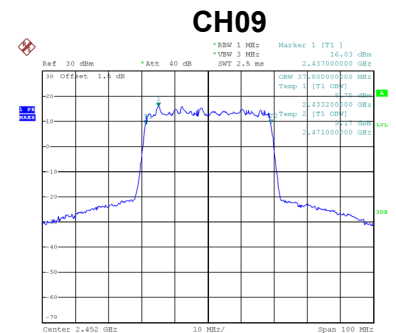

Date: 16.AUG.2019 12:33:55

APPENDIX F - MAXIMUM AVERAGE OUTPUT POWER

Non Beamforming

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.55	0.23	23.78	30.00	1.0000	Complies
06	2437	23.82	0.23	24.05	30.00	1.0000	Complies
11	2462	23.39	0.23	23.62	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.82	0.23	24.05	30.00	1.0000	Complies
06	2437	23.62	0.23	23.85	30.00	1.0000	Complies
11	2462	23.78	0.23	24.01	30.00	1.0000	Complies

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	26.93	0.4927	30.00	1.0000	Complies
06	2437	26.96	0.4966	30.00	1.0000	Complies
11	2462	26.83	0.4817	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.44	0.27	19.71	30.00	1.0000	Complies
06	2437	23.83	0.27	24.10	30.00	1.0000	Complies
11	2462	19.33	0.27	19.60	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.46	0.27	19.73	30.00	1.0000	Complies
06	2437	23.98	0.27	24.25	30.00	1.0000	Complies
11	2462	19.51	0.27	19.78	30.00	1.0000	Complies

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.73	0.1874	30.00	1.0000	Complies
06	2437	27.18	0.5229	30.00	1.0000	Complies
11	2462	22.70	0.1862	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.56	0.25	19.81	30.00	1.0000	Complies
06	2437	23.77	0.25	24.02	30.00	1.0000	Complies
11	2462	19.95	0.25	20.20	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.84	0.25	20.09	30.00	1.0000	Complies
06	2437	23.83	0.25	24.08	30.00	1.0000	Complies
11	2462	20.18	0.25	20.43	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.96	0.1976	30.00	1.0000	Complies
06	2437	27.06	0.5078	30.00	1.0000	Complies
11	2462	23.32	0.2149	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.65	0.48	17.13	30.00	1.0000	Complies
06	2437	19.84	0.48	20.32	30.00	1.0000	Complies
09	2452	17.81	0.48	18.29	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.87	0.48	17.35	30.00	1.0000	Complies
06	2437	19.93	0.48	20.41	30.00	1.0000	Complies
09	2452	17.97	0.48	18.45	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.26	0.1061	30.00	1.0000	Complies
06	2437	23.38	0.2177	30.00	1.0000	Complies
09	2452	21.38	0.1376	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.04	0.12	19.16	30.00	1.0000	Complies
06	2437	23.73	0.12	23.85	30.00	1.0000	Complies
11	2462	20.42	0.12	20.54	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.03	0.12	19.15	30.00	1.0000	Complies
06	2437	23.64	0.12	23.76	30.00	1.0000	Complies
11	2462	20.39	0.12	20.51	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.17	0.1647	30.00	1.0000	Complies
06	2437	26.82	0.4804	30.00	1.0000	Complies
11	2462	23.54	0.2257	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	17.22	0.23	17.45	30.00	1.0000	Complies
06	2437	19.97	0.23	20.20	30.00	1.0000	Complies
09	2452	18.44	0.23	18.67	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	17.05	0.23	17.28	30.00	1.0000	Complies
06	2437	19.84	0.23	20.07	30.00	1.0000	Complies
09	2452	18.16	0.23	18.39	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.38	0.1091	30.00	1.0000	Complies
06	2437	23.15	0.2064	30.00	1.0000	Complies
09	2452	21.54	0.1427	30.00	1.0000	Complies

With Beamforming

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.39	0.25	16.64	29.17	0.8260	Complies
06	2437	23.59	0.25	23.84	29.17	0.8260	Complies
11	2462	17.31	0.25	17.56	29.17	0.8260	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.89	0.25	17.14	29.17	0.8260	Complies
06	2437	24.08	0.25	24.33	29.17	0.8260	Complies
11	2462	17.98	0.25	18.23	29.17	0.8260	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.90	0.0978	29.17	0.8260	Complies
06	2437	27.10	0.5127	29.17	0.8260	Complies
11	2462	20.91	0.1234	29.17	0.8260	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.52	0.48	17.00	29.17	0.8260	Complies
06	2437	19.56	0.48	20.04	29.17	0.8260	Complies
09	2452	17.45	0.48	17.93	29.17	0.8260	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.83	0.48	17.31	29.17	0.8260	Complies
06	2437	19.81	0.48	20.29	29.17	0.8260	Complies
09	2452	17.82	0.48	18.30	29.17	0.8260	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.17	0.1040	29.17	0.8260	Complies
06	2437	23.18	0.2080	29.17	0.8260	Complies
09	2452	21.13	0.1298	29.17	0.8260	Complies

Test Mode	TX AX-20M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.57	0.12	16.69	29.17	0.8260	Complies
06	2437	23.65	0.12	23.77	29.17	0.8260	Complies
11	2462	16.58	0.12	16.70	29.17	0.8260	Complies

Test Mode	TX AX-20M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.93	0.12	17.05	29.17	0.8260	Complies
06	2437	23.97	0.12	24.09	29.17	0.8260	Complies
11	2462	16.96	0.12	17.08	29.17	0.8260	Complies

Test Mode	TX AX-20M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.88	0.0974	29.17	0.8260	Complies
06	2437	26.94	0.4948	29.17	0.8260	Complies
11	2462	19.91	0.0978	29.17	0.8260	Complies

Test Mode	TX AX-40M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.53	0.23	16.76	29.17	0.8260	Complies
06	2437	18.65	0.23	18.88	29.17	0.8260	Complies
09	2452	17.64	0.23	17.87	29.17	0.8260	Complies

Test Mode	TX AX-40M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.85	0.23	17.08	29.17	0.8260	Complies
06	2437	18.98	0.23	19.21	29.17	0.8260	Complies
09	2452	17.93	0.23	18.16	29.17	0.8260	Complies


Test Mode	TX AX-40M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	19.94	0.0985	29.17	0.8260	Complies
06	2437	22.06	0.1607	29.17	0.8260	Complies
09	2452	21.03	0.1268	29.17	0.8260	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS


Test Mode TX B Mode_Ant. 1

Bandedge-CH01

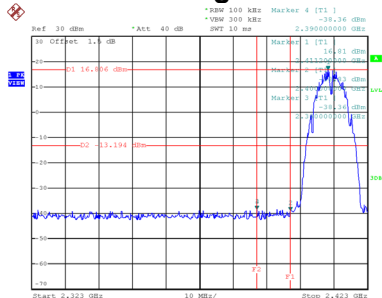


Date: 16.AUG.2019 10:55:55

Bandedge-CH11

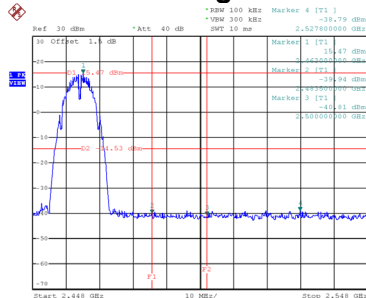


Date: 16.AUG.2019 11:00:17


CH01 – 10th Harmonic of the fundamental frequency

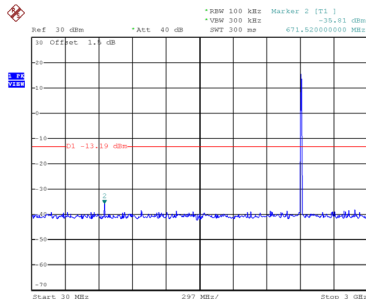

Date: 16.AUG.2019 10:56:08

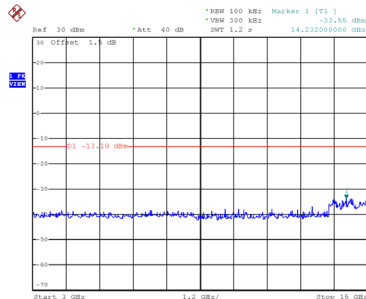


Date: 16.AUG.2019 10:56:15

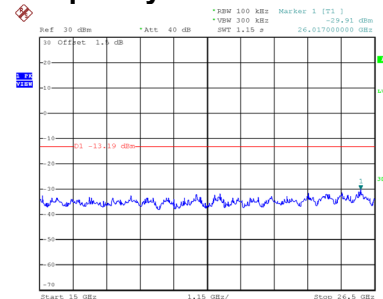


Date: 16.AUG.2019 10:56:22


CH06 – 10th Harmonic of the fundamental frequency

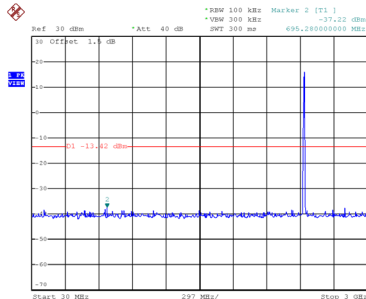

Date: 16.AUG.2019 10:58:39

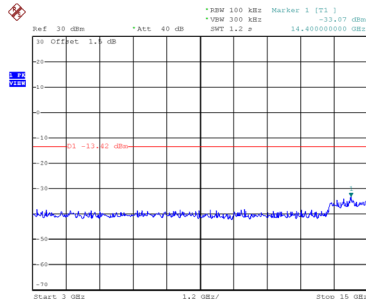


Date: 16.AUG.2019 10:58:47

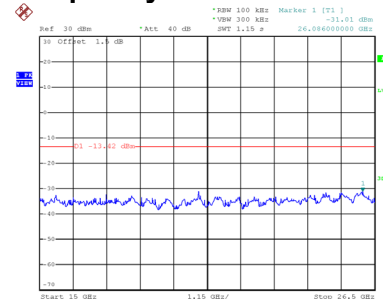


Date: 16.AUG.2019 10:58:53


CH11 – 10th Harmonic of the fundamental frequency

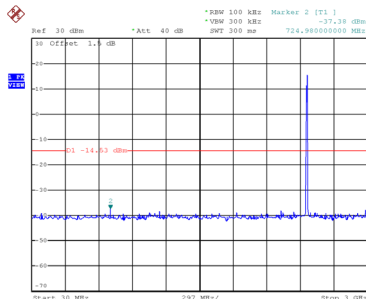

Date: 16.AUG.2019 11:00:29

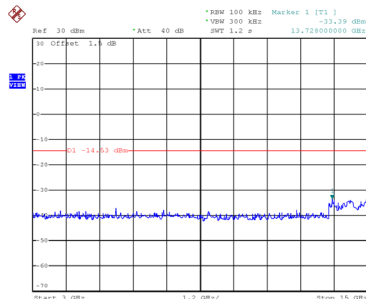


Date: 16.AUG.2019 11:00:36

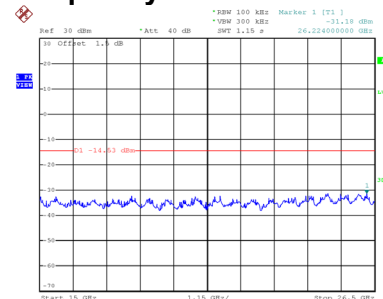

Date: 16.AUG.2019 11:00:43


Test Mode TX B Mode_Ant. 2

Bandedge-CH01

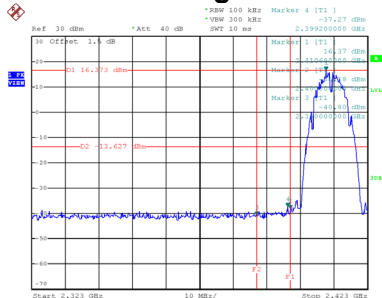


Date: 16.AUG.2019 11:23:11

Bandedge-CH11

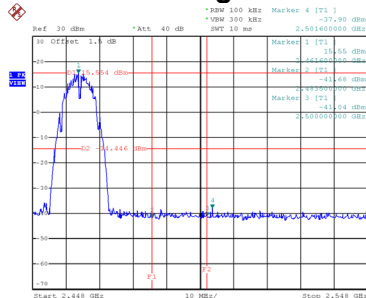


Date: 16.AUG.2019 11:27:05


CH01 – 10th Harmonic of the fundamental frequency

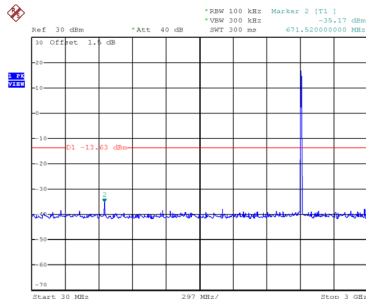

Date: 16.AUG.2019 11:23:24

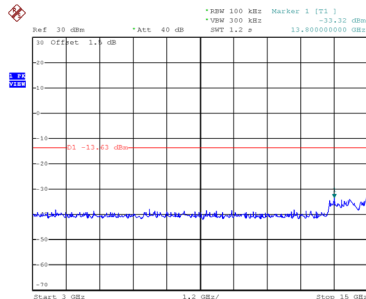


Date: 16.AUG.2019 11:23:31

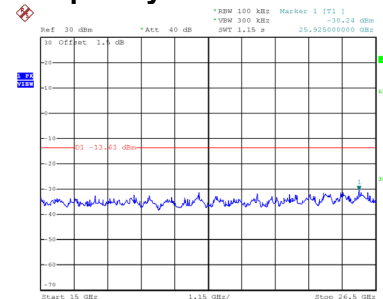


Date: 16.AUG.2019 11:23:39


CH06 – 10th Harmonic of the fundamental frequency

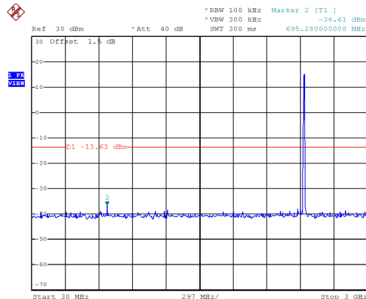

Date: 16.AUG.2019 11:25:11

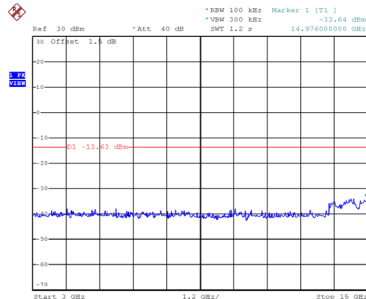


Date: 16.AUG.2019 11:25:18

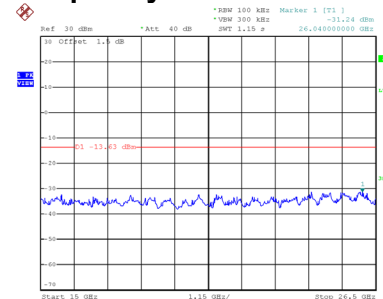


Date: 16.AUG.2019 11:25:24


CH11 – 10th Harmonic of the fundamental frequency

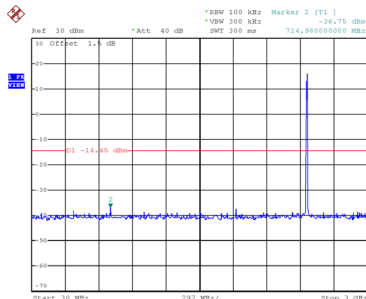

Date: 16.AUG.2019 11:27:17

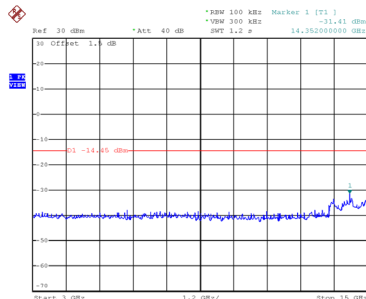


Date: 16.AUG.2019 11:27:24

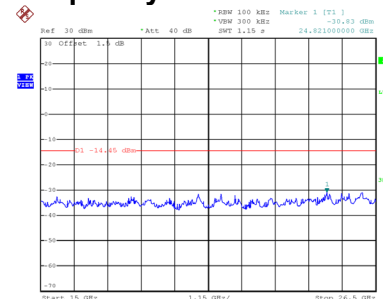

Date: 16.AUG.2019 11:27:31


Test Mode TX G Mode_Ant. 1

Bandedge-CH01

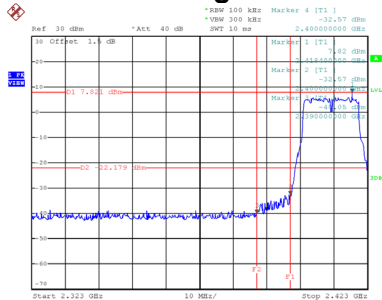


Date: 16.AUG.2019 11:02:37

Bandedge-CH11

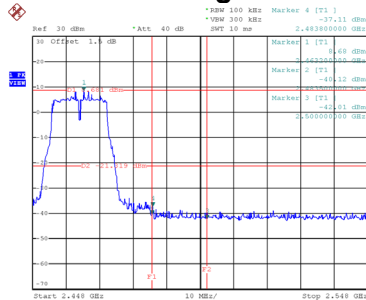


Date: 16.AUG.2019 11:05:41


CH01 – 10th Harmonic of the fundamental frequency

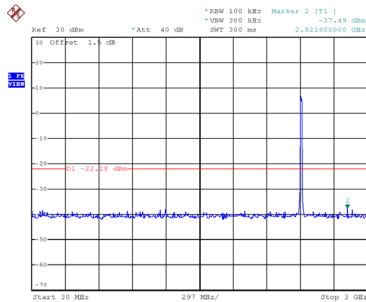

Date: 16.AUG.2019 11:02:50

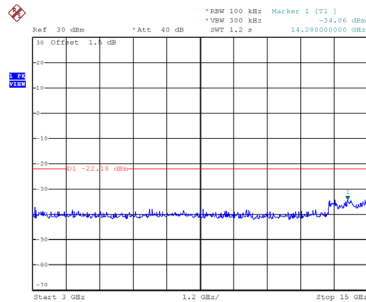


Date: 16.AUG.2019 11:02:57

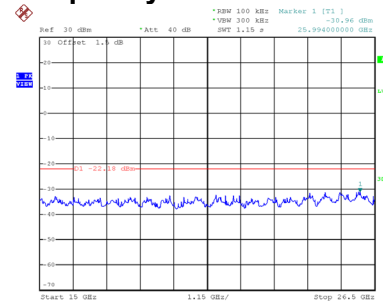


Date: 16.AUG.2019 11:03:03


CH06 – 10th Harmonic of the fundamental frequency

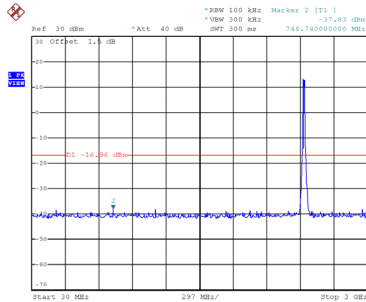

Date: 16.AUG.2019 11:04:12

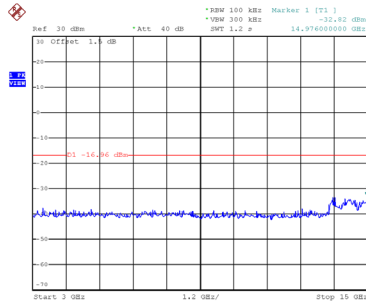


Date: 16.AUG.2019 11:04:19

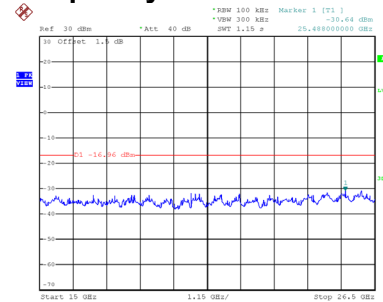


Date: 16.AUG.2019 11:04:26


CH11 – 10th Harmonic of the fundamental frequency

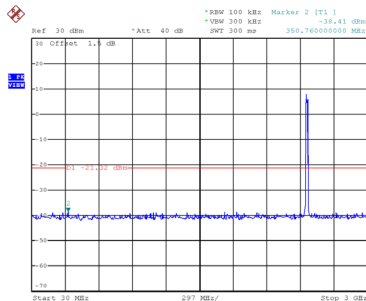

Date: 16.AUG.2019 11:05:54

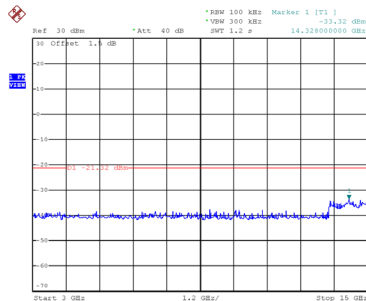


Date: 16.AUG.2019 11:06:00

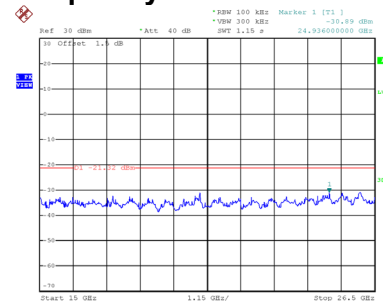

Date: 16.AUG.2019 11:06:07


Test Mode TX G Mode_Ant. 2

Bandedge-CH01

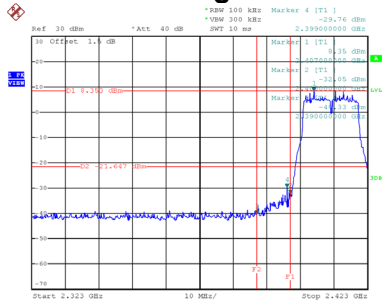


Date: 16.AUG.2019 11:29:05

Bandedge-CH11

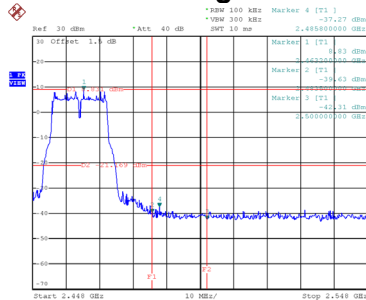


Date: 16.AUG.2019 11:32:44


CH01 – 10th Harmonic of the fundamental frequency

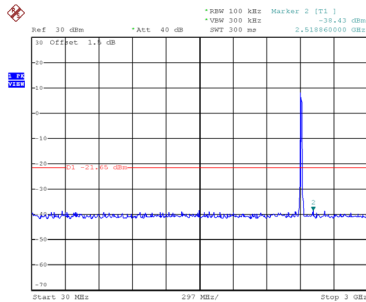

Date: 16.AUG.2019 11:29:18

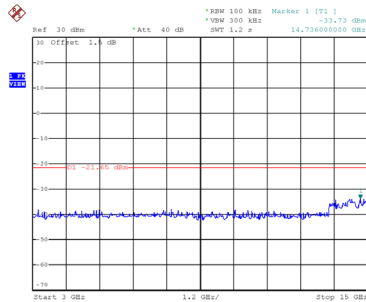


Date: 16.AUG.2019 11:29:25

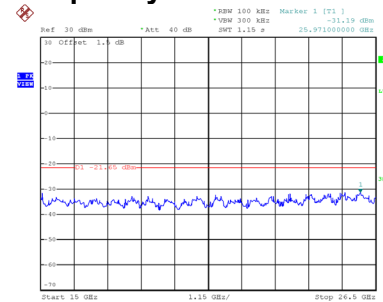


Date: 16.AUG.2019 11:29:31


CH06 – 10th Harmonic of the fundamental frequency

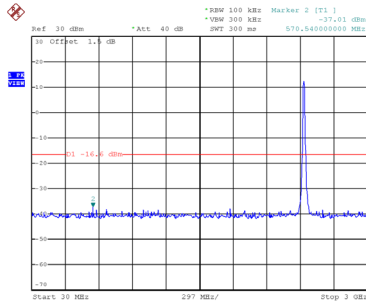

Date: 16.AUG.2019 11:31:08

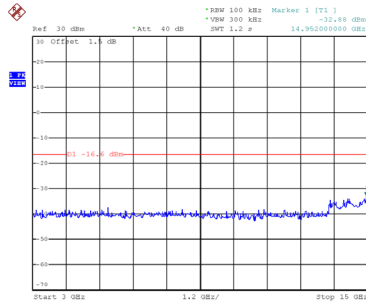


Date: 16.AUG.2019 11:31:15

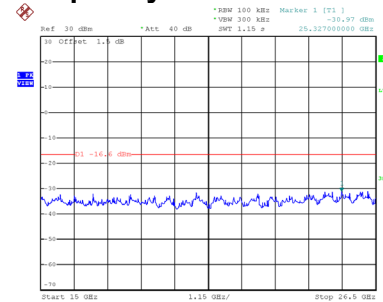


Date: 16.AUG.2019 11:31:22


CH11 – 10th Harmonic of the fundamental frequency

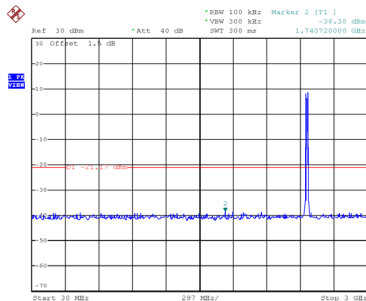

Date: 16.AUG.2019 11:32:57

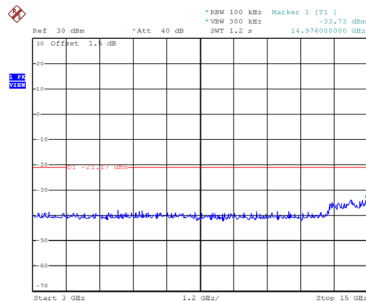


Date: 16.AUG.2019 11:33:03

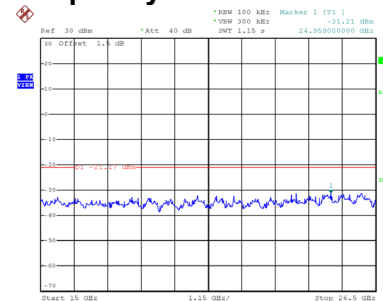

Date: 16.AUG.2019 11:33:10


Test Mode TX N-20M Mode_Ant. 1

Bandedge-CH01

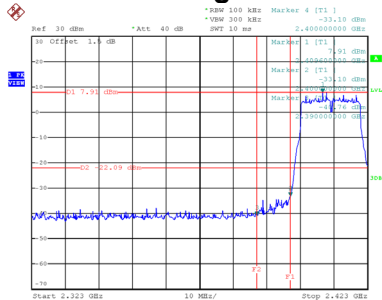


Date: 16.AUG.2019 11:09:36

Bandedge-CH11

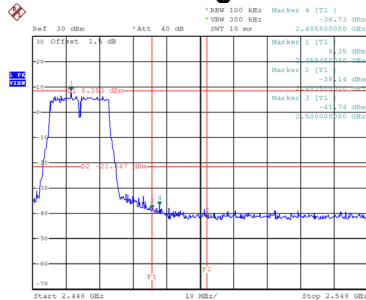


Date: 16.AUG.2019 11:12:46


CH01 – 10th Harmonic of the fundamental frequency

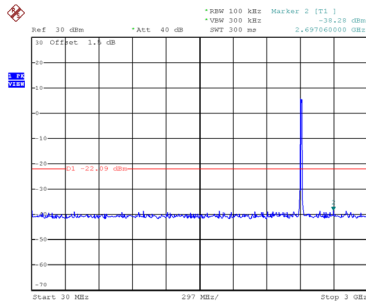

Date: 16.AUG.2019 11:09:49

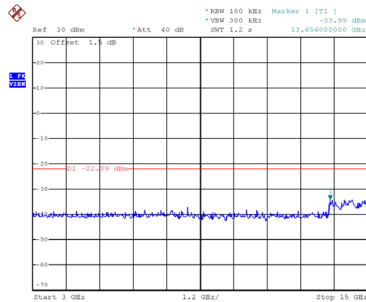


Date: 16.AUG.2019 11:09:56

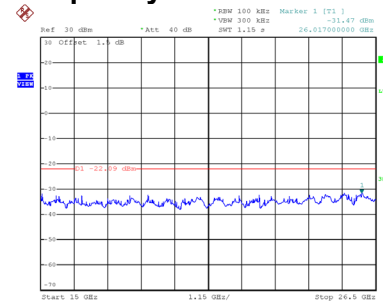


Date: 16.AUG.2019 11:10:03


CH06 – 10th Harmonic of the fundamental frequency

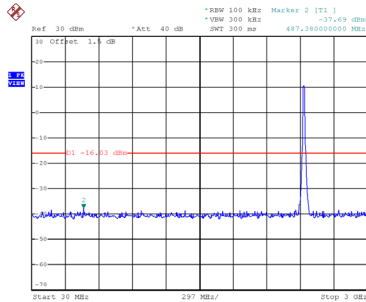

Date: 16.AUG.2019 11:11:38

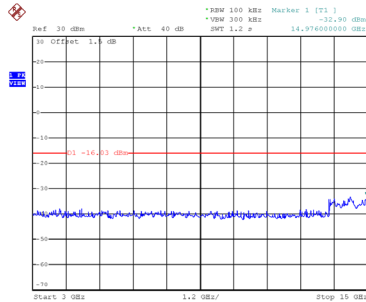


Date: 16.AUG.2019 11:11:45

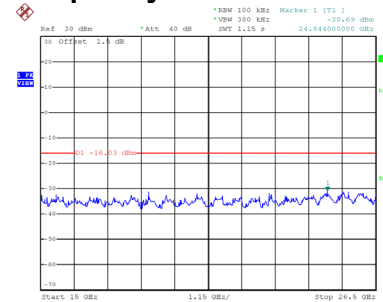


Date: 16.AUG.2019 11:11:52


CH11 – 10th Harmonic of the fundamental frequency

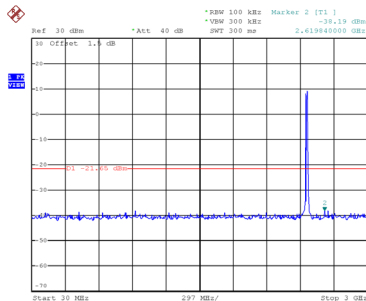

Date: 16.AUG.2019 11:12:58

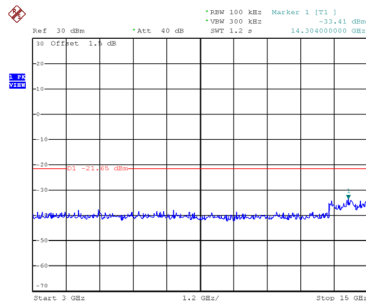


Date: 16.AUG.2019 11:13:05

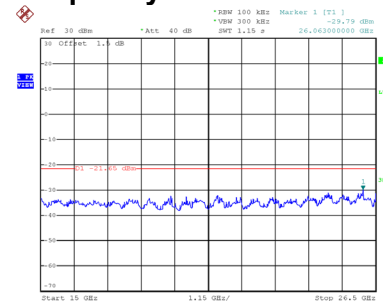

Date: 16.AUG.2019 11:13:12


Test Mode TX N-20M Mode_Ant. 2

Bandedge-CH01

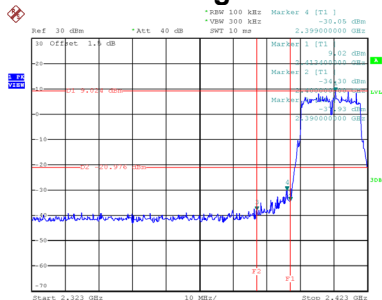


Date: 16.AUG.2019 11:34:00

Bandedge-CH11

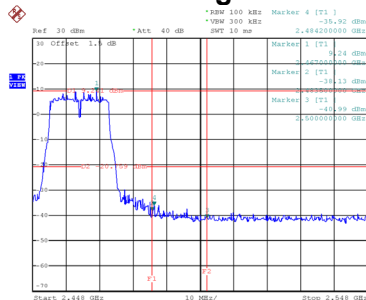


Date: 16.AUG.2019 11:36:45


CH01 – 10th Harmonic of the fundamental frequency

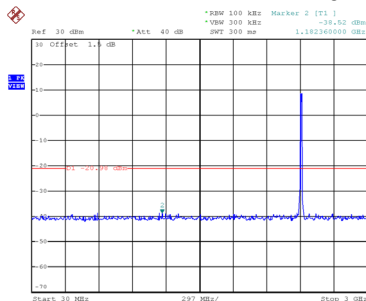

Date: 16.AUG.2019 11:34:13

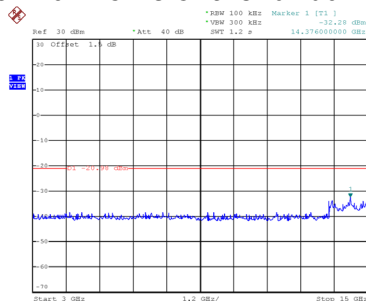


Date: 16.AUG.2019 11:34:20

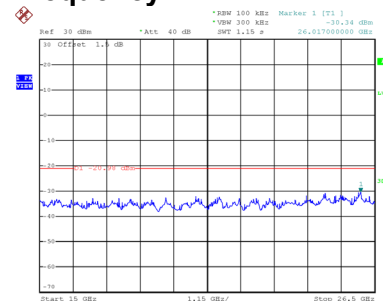


Date: 16.AUG.2019 11:34:27


CH06 – 10th Harmonic of the fundamental frequency

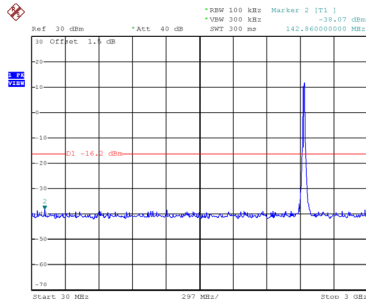

Date: 16.AUG.2019 11:35:37

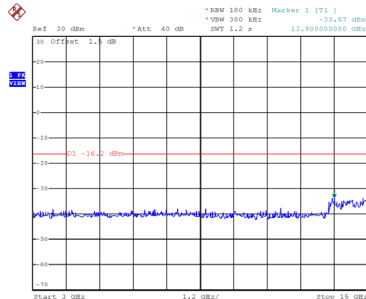


Date: 16.AUG.2019 11:35:44

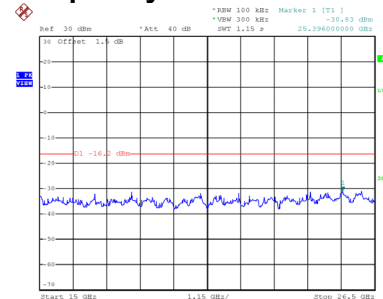


Date: 16.AUG.2019 11:35:51


CH11 – 10th Harmonic of the fundamental frequency

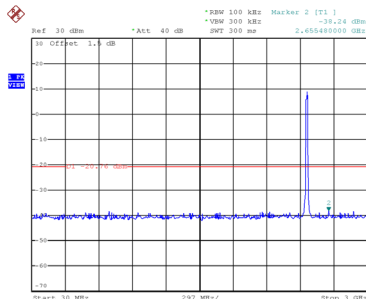

Date: 16.AUG.2019 11:36:58

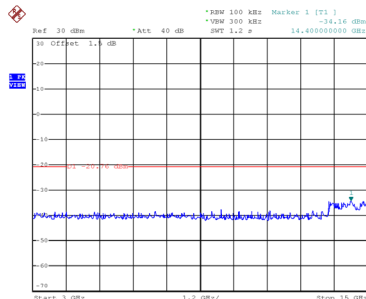

Date: 16.AUG.2019 11:37:05

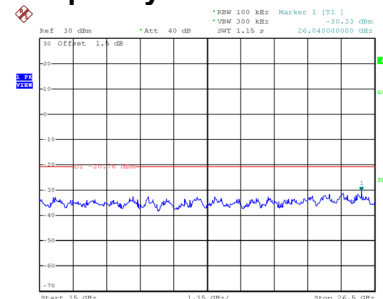

Date: 16.AUG.2019 11:37:12