


1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5845	Ant1	96.63	0.15	0.51
NVNT	a	5865	Ant1	96.16	0.17	0.51
NVNT	a	5885	Ant1	96.53	0.15	0.51
NVNT	ac20	5845	Sum	80.23	0.96	0.18
NVNT	ac20	5865	Sum	80.23	0.96	0.18
NVNT	ac20	5885	Sum	80.23	0.96	0.18
NVNT	ac40	5835	Sum	80.12	0.96	0.18
NVNT	ac40	5875	Sum	80.12	0.96	0.18
NVNT	ac80	5855	Sum	80.02	0.97	0.18
NVNT	ax20	5845	Sum	80.27	0.95	0.18
NVNT	ax20	5865	Sum	80.24	0.96	0.18
NVNT	ax20	5885	Sum	80.13	0.96	0.18
NVNT	ax40	5835	Sum	80.17	0.96	0.18
NVNT	ax40	5875	Sum	80.06	0.97	0.18
NVNT	ax80	5855	Sum	80.03	0.97	0.18
NVNT	n20	5845	Sum	80.19	0.96	0.18
NVNT	n20	5865	Sum	80.08	0.96	0.18
NVNT	n20	5885	Sum	80.33	0.95	0.18
NVNT	n40	5835	Sum	80.05	0.97	0.18
NVNT	n40	5875	Sum	80.12	0.96	0.18

Test Graphs


Duty Cycle NVNT a 5845MHz Sum

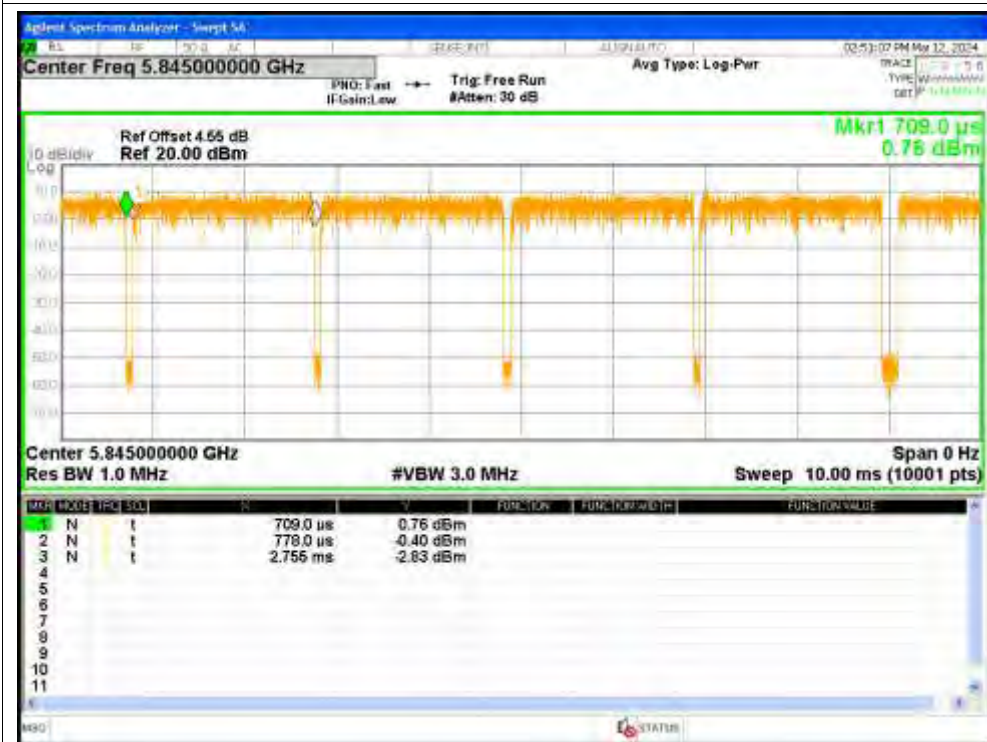

Duty Cycle NVNT a 5865MHz Sum

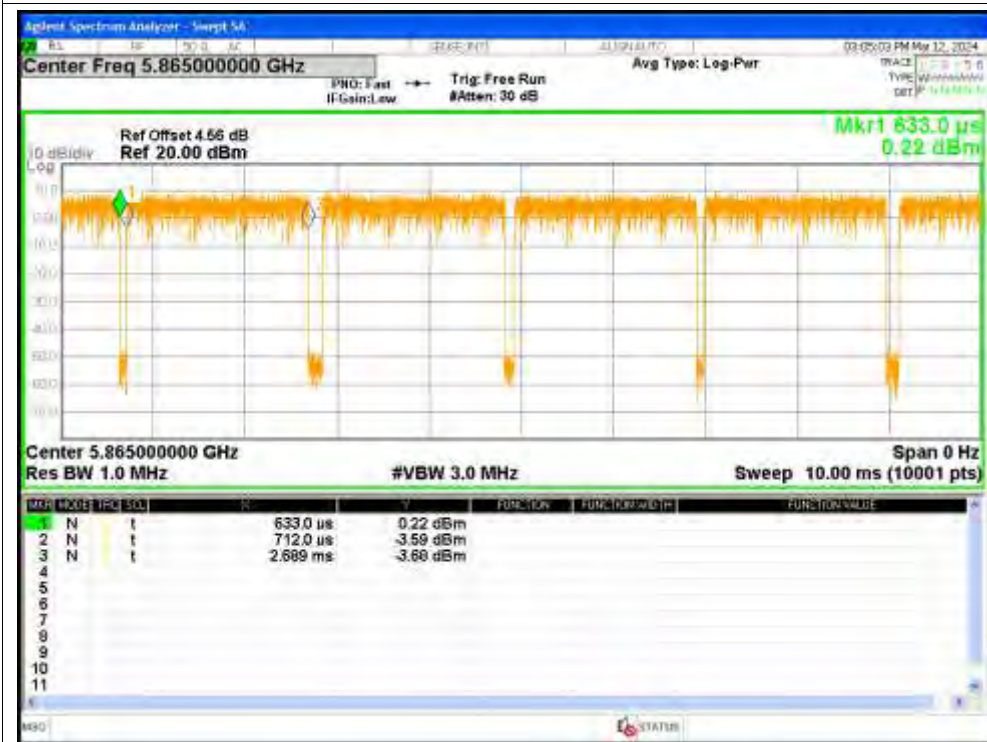


Duty Cycle NVNT a 5885MHz Sum

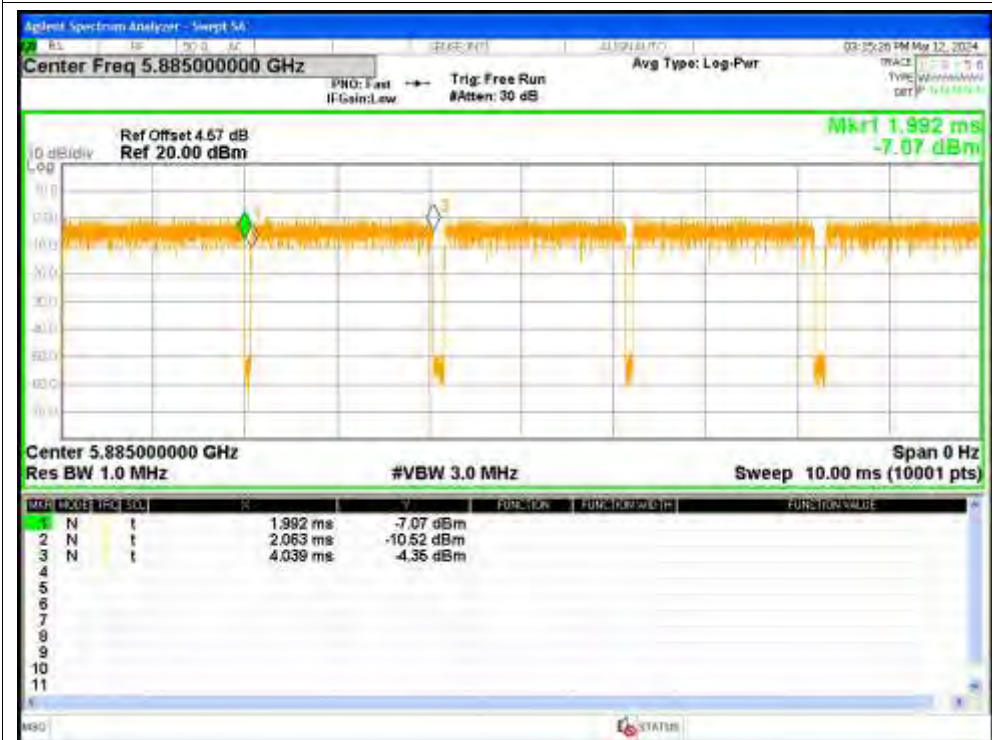

Duty Cycle NVNT ac20 5845MHz Sum



Duty Cycle NVNT ac20 5865MHz Sum

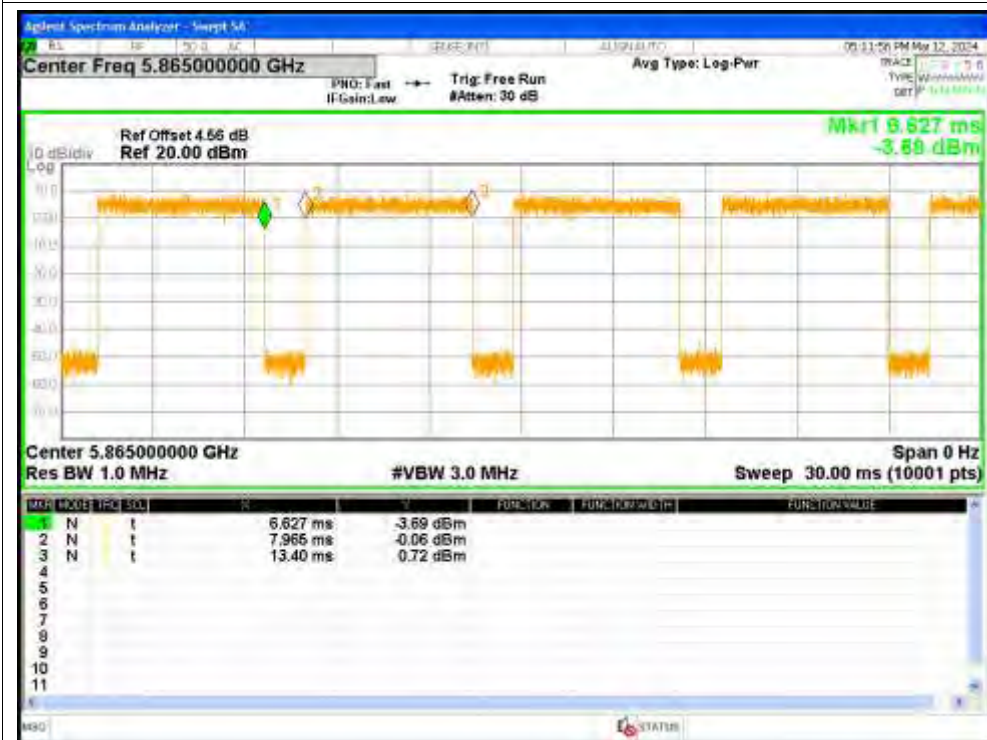

Duty Cycle NVNT ac20 5885MHz Sum




Duty Cycle NVNT ac80 5855MHz Sum



Duty Cycle NVNT ax20 5845MHz Sum



Duty Cycle NVNT ax20 5865MHz Sum

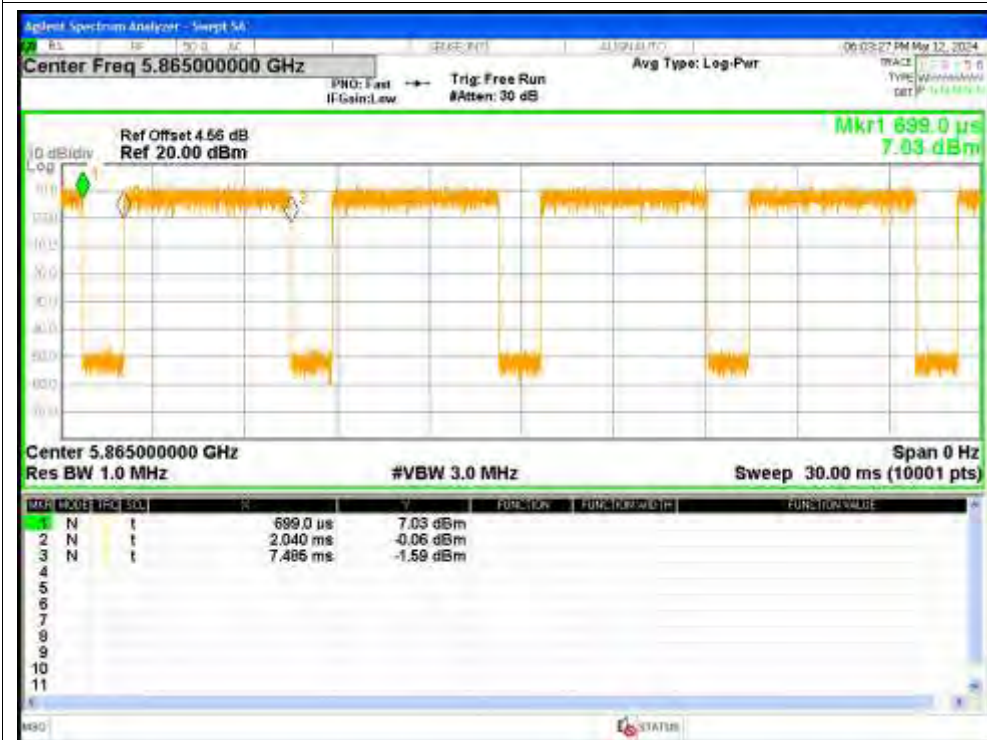

Duty Cycle NVNT ax20 5885MHz Sum




Duty Cycle NVNT ax80 5855MHz Sum




Duty Cycle NVNT n20 5845MHz Sum




Duty Cycle NVNT n20 5865MHz Sum

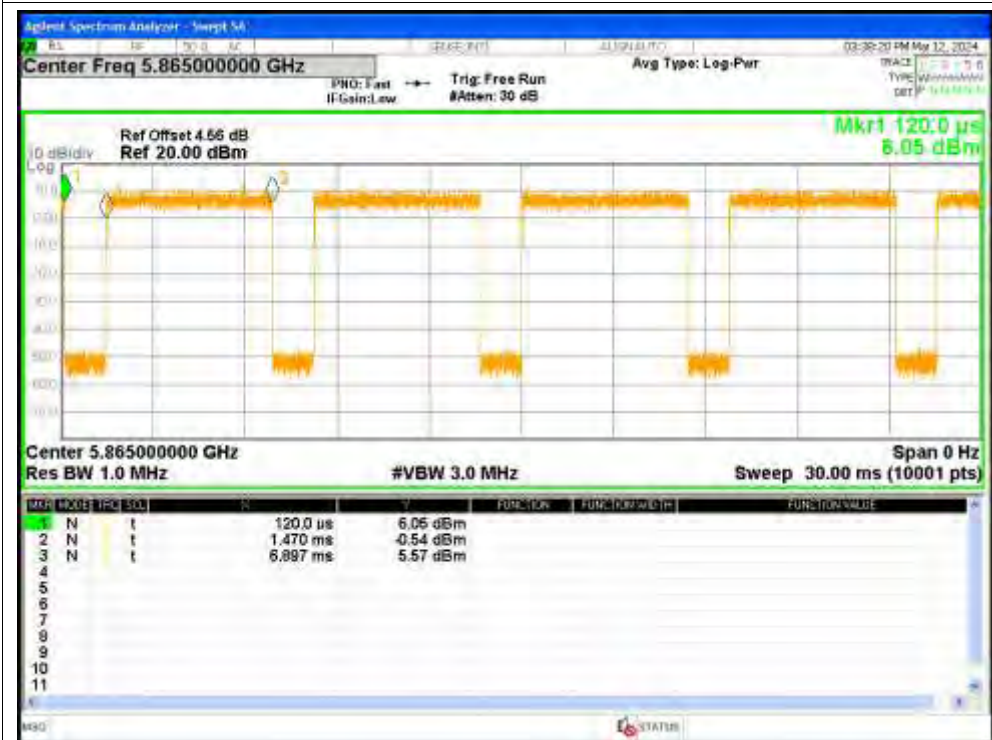

Duty Cycle NVNT n20 5885MHz Sum

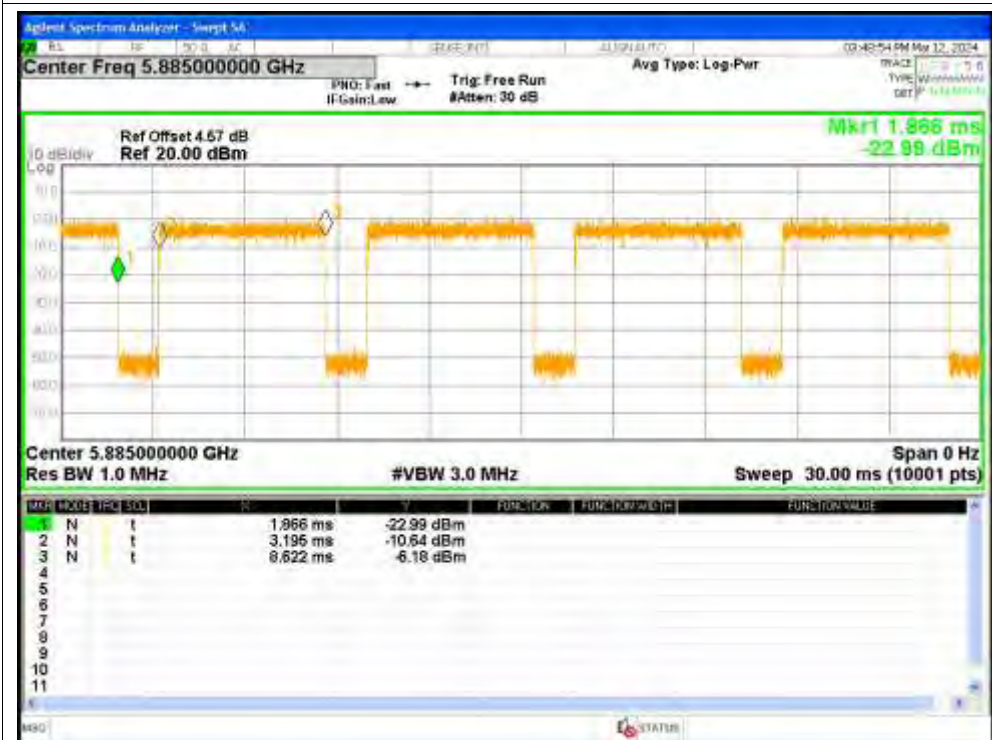

Duty Cycle NVNT n40 5835MHz Sum

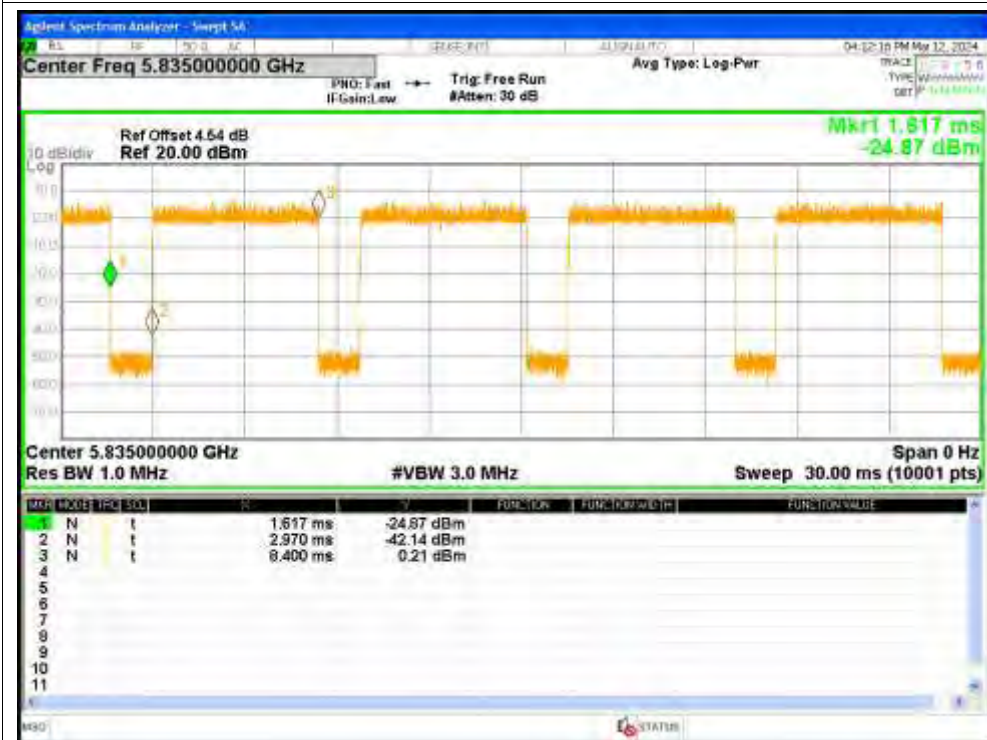

Duty Cycle NVNT n40 5875MHz Sum



2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5845	Ant1	15.42	0.15	15.57	<=30	Pass
NVNT	a	5845	Ant2	14.72	0.15	14.87	<=29.99	Pass
NVNT	a	5845	Ant3	17.64	0.15	17.79	<=30	Pass
NVNT	a	5845	Ant4	16.09	0.15	16.24	<=29.99	Pass
NVNT	a	5865	Ant1	14.72	0.17	14.89	<=30	Pass
NVNT	a	5865	Ant2	13.53	0.17	13.7	<=29.99	Pass
NVNT	a	5865	Ant3	17.75	0.17	17.92	<=30	Pass
NVNT	a	5865	Ant4	15.73	0.17	15.9	<=29.99	Pass
NVNT	a	5885	Ant1	5.81	0.15	5.96	<=30	Pass
NVNT	a	5885	Ant2	4.65	0.15	4.8	<=29.99	Pass
NVNT	a	5885	Ant3	9.38	0.15	9.53	<=30	Pass
NVNT	a	5885	Ant4	7.06	0.15	7.21	<=29.99	Pass
NVNT	ac20	5845	Ant1	15.19	0.96	16.15	<=30	Pass
NVNT	ac20	5845	Ant2	15.19	0.96	16.15	<=29.99	Pass
NVNT	ac20	5845	Ant3	15.99	0.96	16.95	<=30	Pass
NVNT	ac20	5845	Ant4	15.23	0.96	16.19	<=29.99	Pass
NVNT	ac20	5845	Sum	21.43	0.96	22.39	<=24.51	Pass
NVNT	ac20	5865	Ant1	14.4	0.96	15.36	<=30	Pass
NVNT	ac20	5865	Ant2	15.41	0.96	16.37	<=29.99	Pass
NVNT	ac20	5865	Ant3	17.2	0.96	18.16	<=30	Pass
NVNT	ac20	5865	Ant4	14.18	0.96	15.14	<=29.99	Pass
NVNT	ac20	5865	Sum	21.49	0.96	22.45	<=24.51	Pass
NVNT	ac20	5885	Ant1	5.08	0.96	6.04	<=30	Pass
NVNT	ac20	5885	Ant2	6.87	0.96	7.83	<=29.99	Pass
NVNT	ac20	5885	Ant3	8.72	0.96	9.68	<=30	Pass
NVNT	ac20	5885	Ant4	5.49	0.96	6.45	<=29.99	Pass
NVNT	ac20	5885	Sum	12.8	0.96	13.76	<=24.51	Pass
NVNT	ac40	5835	Ant1	15.25	0.96	16.21	<=30	Pass
NVNT	ac40	5835	Ant2	15.25	0.96	16.21	<=29.99	Pass
NVNT	ac40	5835	Ant3	15.89	0.96	16.85	<=30	Pass
NVNT	ac40	5835	Ant4	15.29	0.96	16.25	<=29.99	Pass
NVNT	ac40	5835	Sum	21.45	0.96	22.41	<=24.51	Pass
NVNT	ac40	5875	Ant1	6.46	0.96	7.42	<=30	Pass
NVNT	ac40	5875	Ant2	8.03	0.96	8.99	<=29.99	Pass
NVNT	ac40	5875	Ant3	9.71	0.96	10.67	<=30	Pass
NVNT	ac40	5875	Ant4	7.73	0.96	8.69	<=29.99	Pass
NVNT	ac40	5875	Sum	14.16	0.96	15.12	<=24.51	Pass
NVNT	ac80	5855	Ant1	3.97	0.97	4.94	<=30	Pass
NVNT	ac80	5855	Ant2	5.79	0.97	6.76	<=29.99	Pass

NVNT	ac80	5855	Ant3	6.65	0.97	7.62	<=30	Pass
NVNT	ac80	5855	Ant4	4.66	0.97	5.63	<=29.99	Pass
NVNT	ac80	5855	Sum	11.41	0.97	12.38	<=24.51	Pass
NVNT	ax20	5845	Ant1	14.75	0.95	15.7	<=30	Pass
NVNT	ax20	5845	Ant2	15.95	0.95	16.9	<=29.99	Pass
NVNT	ax20	5845	Ant3	17.08	0.95	18.03	<=30	Pass
NVNT	ax20	5845	Ant4	15.04	0.95	15.99	<=29.99	Pass
NVNT	ax20	5845	Sum	21.82	0.95	22.77	<=24.51	Pass
NVNT	ax20	5865	Ant1	14.29	0.96	15.25	<=30	Pass
NVNT	ax20	5865	Ant2	15.43	0.96	16.39	<=29.99	Pass
NVNT	ax20	5865	Ant3	16.67	0.96	17.63	<=30	Pass
NVNT	ax20	5865	Ant4	15.27	0.96	16.23	<=29.99	Pass
NVNT	ax20	5865	Sum	21.52	0.96	22.48	<=24.51	Pass
NVNT	ax20	5885	Ant1	5.22	0.96	6.18	<=30	Pass
NVNT	ax20	5885	Ant2	6.65	0.96	7.61	<=29.99	Pass
NVNT	ax20	5885	Ant3	9.26	0.96	10.22	<=30	Pass
NVNT	ax20	5885	Ant4	6.23	0.96	7.19	<=29.99	Pass
NVNT	ax20	5885	Sum	13.13	0.96	14.09	<=24.51	Pass
NVNT	ax40	5835	Ant1	15.53	0.96	16.49	<=30	Pass
NVNT	ax40	5835	Ant2	15.62	0.96	16.58	<=29.99	Pass
NVNT	ax40	5835	Ant3	16.62	0.96	17.58	<=30	Pass
NVNT	ax40	5835	Ant4	16.04	0.96	17	<=29.99	Pass
NVNT	ax40	5835	Sum	21.99	0.96	22.95	<=24.51	Pass
NVNT	ax40	5875	Ant1	6.96	0.97	7.93	<=30	Pass
NVNT	ax40	5875	Ant2	8.08	0.97	9.05	<=29.99	Pass
NVNT	ax40	5875	Ant3	9.59	0.97	10.56	<=30	Pass
NVNT	ax40	5875	Ant4	7.63	0.97	8.6	<=29.99	Pass
NVNT	ax40	5875	Sum	14.2	0.97	15.17	<=24.51	Pass
NVNT	ax80	5855	Ant1	4.49	0.97	5.46	<=30	Pass
NVNT	ax80	5855	Ant2	5.65	0.97	6.62	<=29.99	Pass
NVNT	ax80	5855	Ant3	7.46	0.97	8.43	<=30	Pass
NVNT	ax80	5855	Ant4	4.88	0.97	5.85	<=29.99	Pass
NVNT	ax80	5855	Sum	11.8	0.97	12.77	<=24.51	Pass
NVNT	n20	5845	Ant1	14.74	0.96	15.7	<=30	Pass
NVNT	n20	5845	Ant2	13.09	0.96	14.05	<=29.99	Pass
NVNT	n20	5845	Ant3	16.87	0.96	17.83	<=30	Pass
NVNT	n20	5845	Ant4	15.57	0.96	16.53	<=29.99	Pass
NVNT	n20	5845	Sum	21.3	0.96	22.26	<=24.51	Pass
NVNT	n20	5865	Ant1	13.82	0.96	14.78	<=30	Pass
NVNT	n20	5865	Ant2	13.16	0.96	14.12	<=29.99	Pass
NVNT	n20	5865	Ant3	17.23	0.96	18.19	<=30	Pass
NVNT	n20	5865	Ant4	14.53	0.96	15.49	<=29.99	Pass
NVNT	n20	5865	Sum	21	0.96	21.96	<=24.51	Pass
NVNT	n20	5885	Ant1	5.11	0.95	6.06	<=30	Pass

NVNT	n20	5885	Ant2	5.52	0.95	6.47	<=29.99	Pass
NVNT	n20	5885	Ant3	8.73	0.95	9.68	<=30	Pass
NVNT	n20	5885	Ant4	6.18	0.95	7.13	<=29.99	Pass
NVNT	n20	5885	Sum	12.65	0.95	13.6	<=24.51	Pass
NVNT	n40	5835	Ant1	15.56	0.97	16.53	<=30	Pass
NVNT	n40	5835	Ant2	15.54	0.97	16.51	<=29.99	Pass
NVNT	n40	5835	Ant3	16.37	0.97	17.34	<=30	Pass
NVNT	n40	5835	Ant4	15.86	0.97	16.83	<=29.99	Pass
NVNT	n40	5835	Sum	21.87	0.97	22.84	<=24.51	Pass
NVNT	n40	5875	Ant1	6.6	0.96	7.56	<=30	Pass
NVNT	n40	5875	Ant2	7.61	0.96	8.57	<=29.99	Pass
NVNT	n40	5875	Ant3	9.61	0.96	10.57	<=30	Pass
NVNT	n40	5875	Ant4	7.55	0.96	8.51	<=29.99	Pass
NVNT	n40	5875	Sum	14.01	0.96	14.97	<=24.51	Pass

Test Graphs

Power NVNT a 5845MHz Ant1



Power NVNT a 5845MHz Ant2



Power NVNT a 5845MHz Ant3




Power NVNT a 5845MHz Ant4



Power NVNT a 5865MHz Ant1



Power NVNT a 5865MHz Ant2

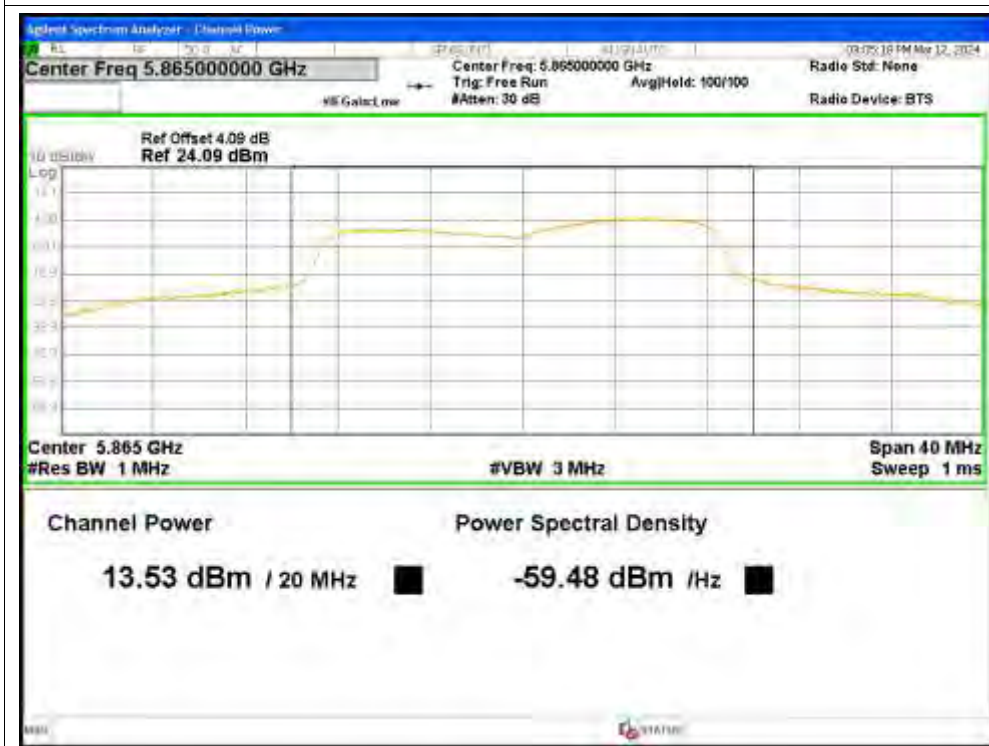


Power NVNT a 5865MHz Ant3




Power NVNT a 5865MHz Ant4



Power NVNT a 5885MHz Ant1

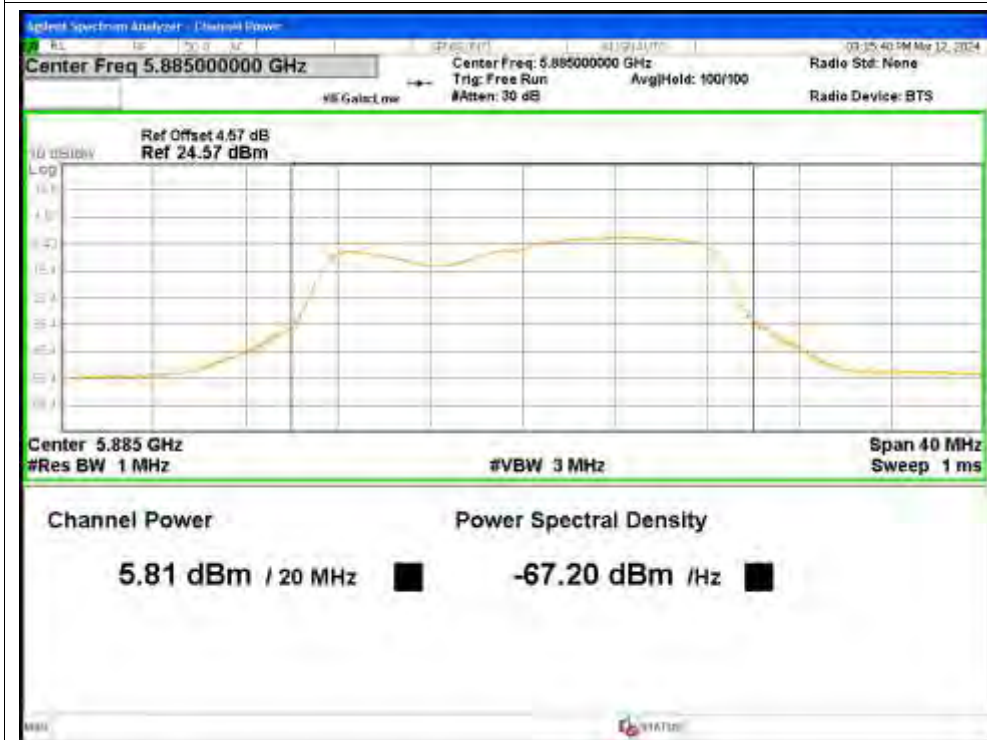

Power NVNT a 5885MHz Ant2

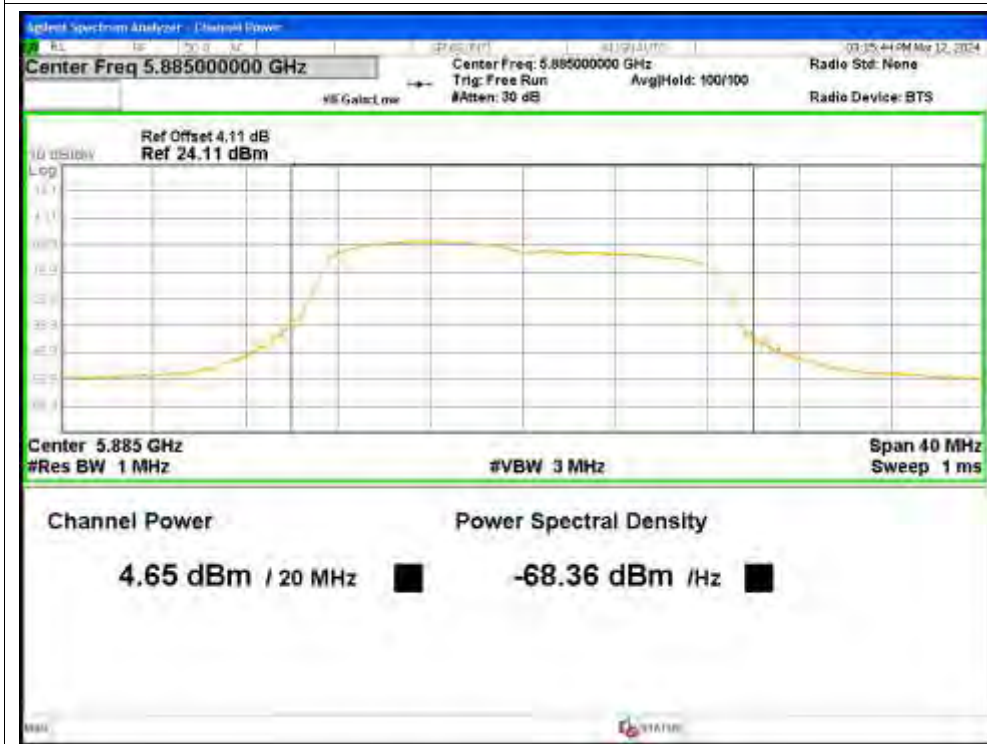

Power NVNT a 5885MHz Ant3




Power NVNT a 5885MHz Ant4



Power NVNT ac20 5845MHz Ant1



Power NVNT ac20 5845MHz Ant2

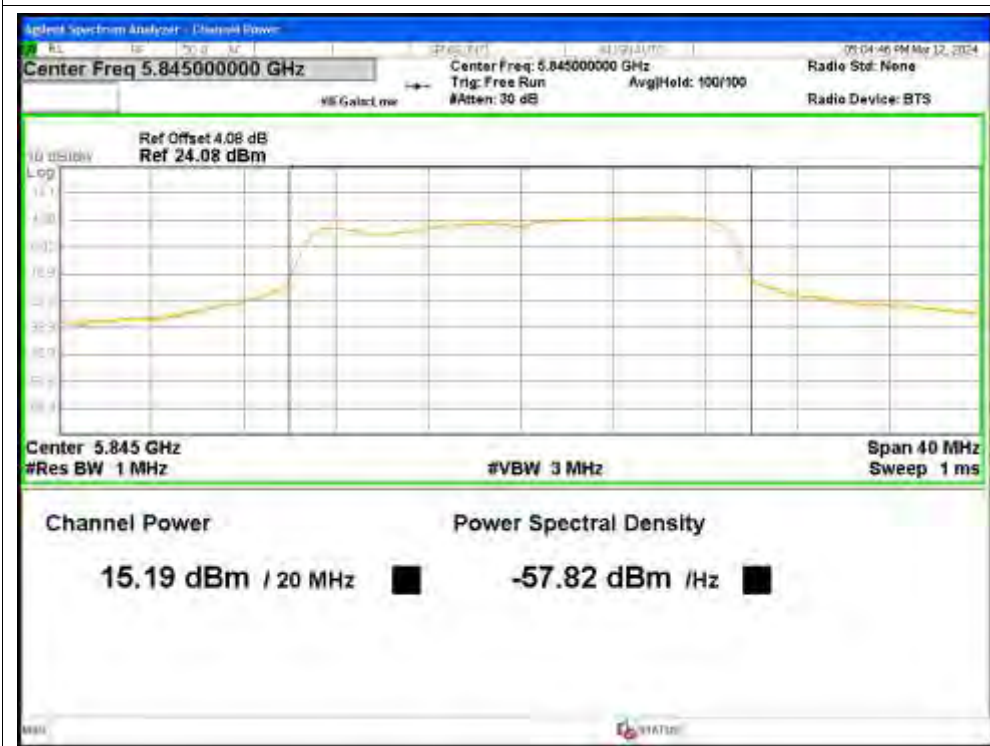


Power NVNT ac20 5845MHz Ant3



Power NVNT ac20 5845MHz Ant4



Power NVNT ac20 5865MHz Ant1

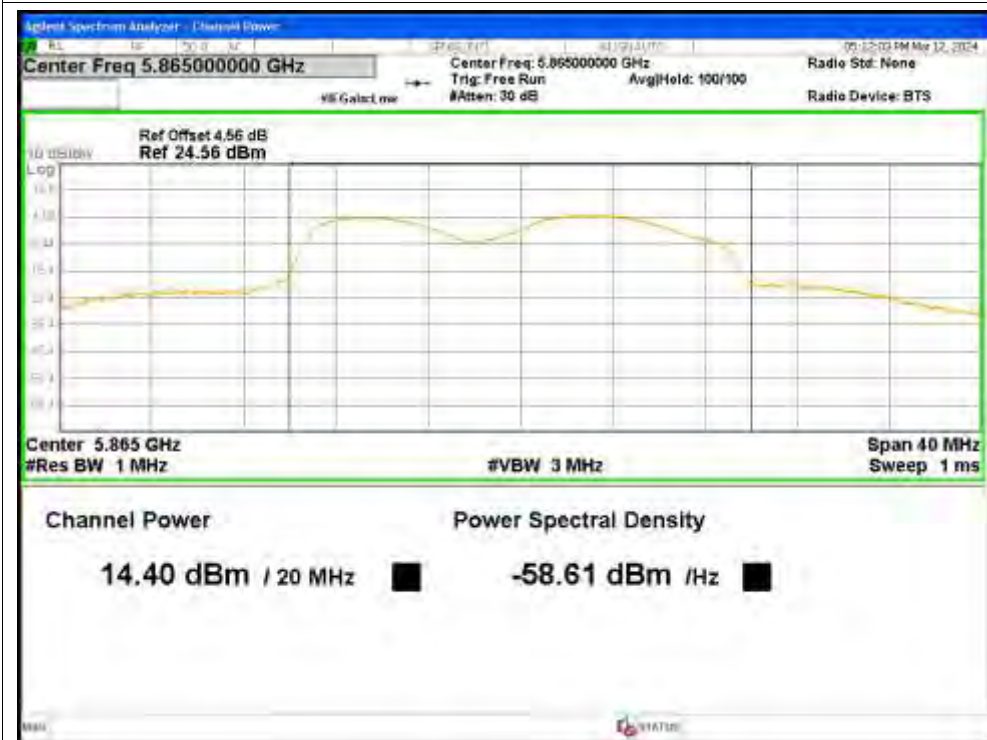

Power NVNT ac20 5865MHz Ant2




Power NVNT ac20 5865MHz Ant3




Power NVNT ac20 5865MHz Ant4



Power NVNT ac20 5885MHz Ant1

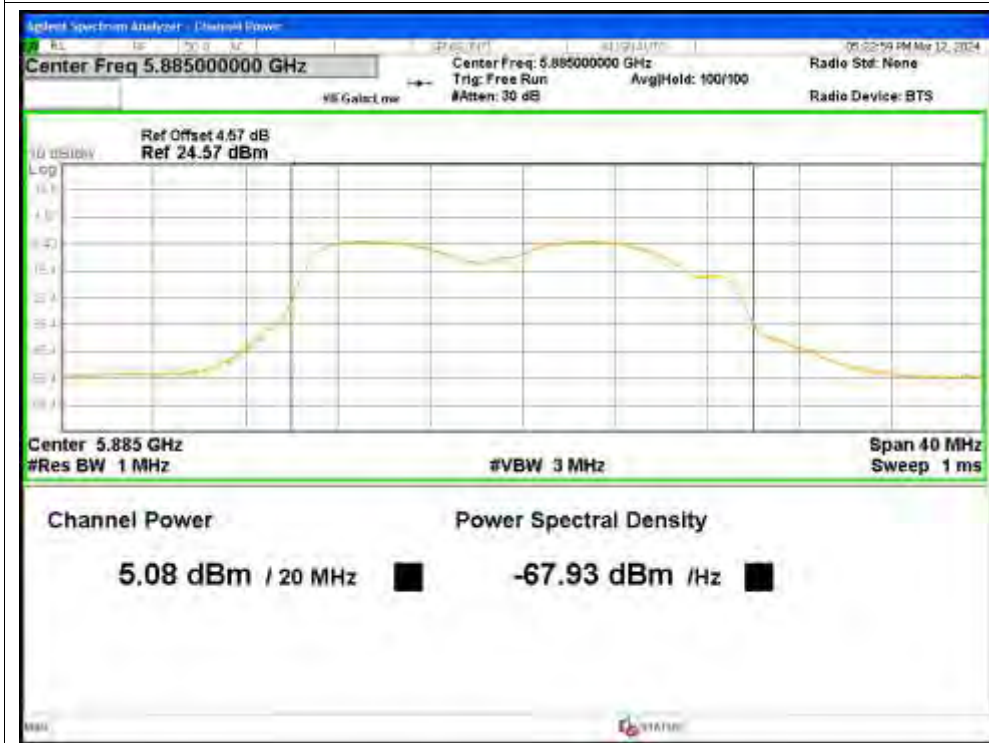


Power NVNT ac20 5885MHz Ant2

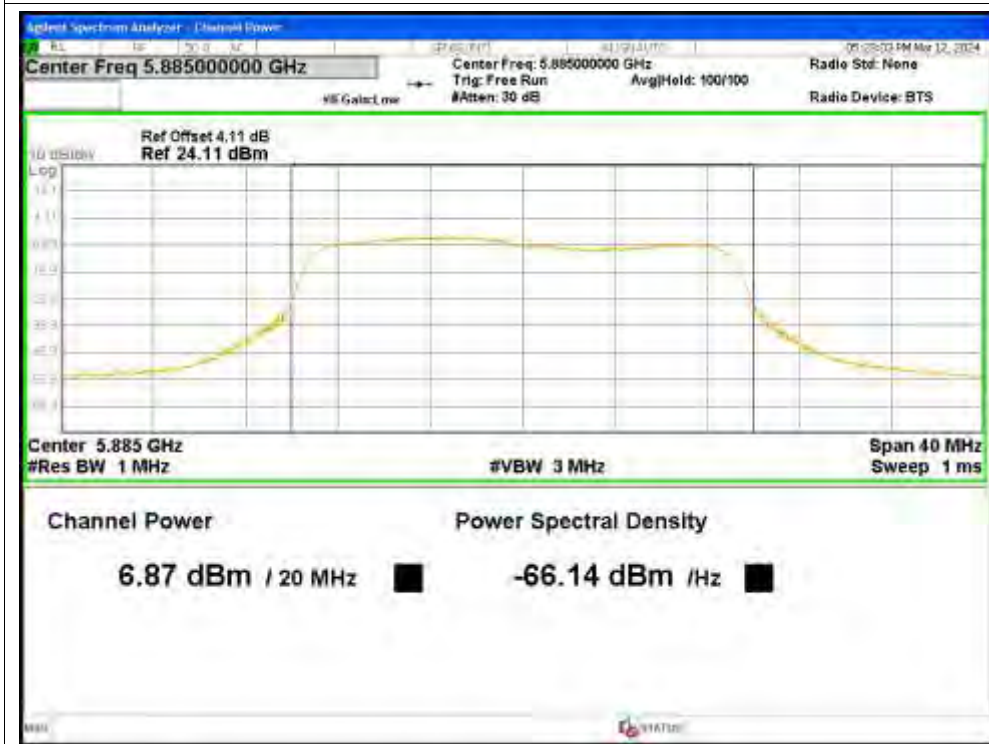


Power NVNT ac20 5885MHz Ant3



Power NVNT ac20 5885MHz Ant4

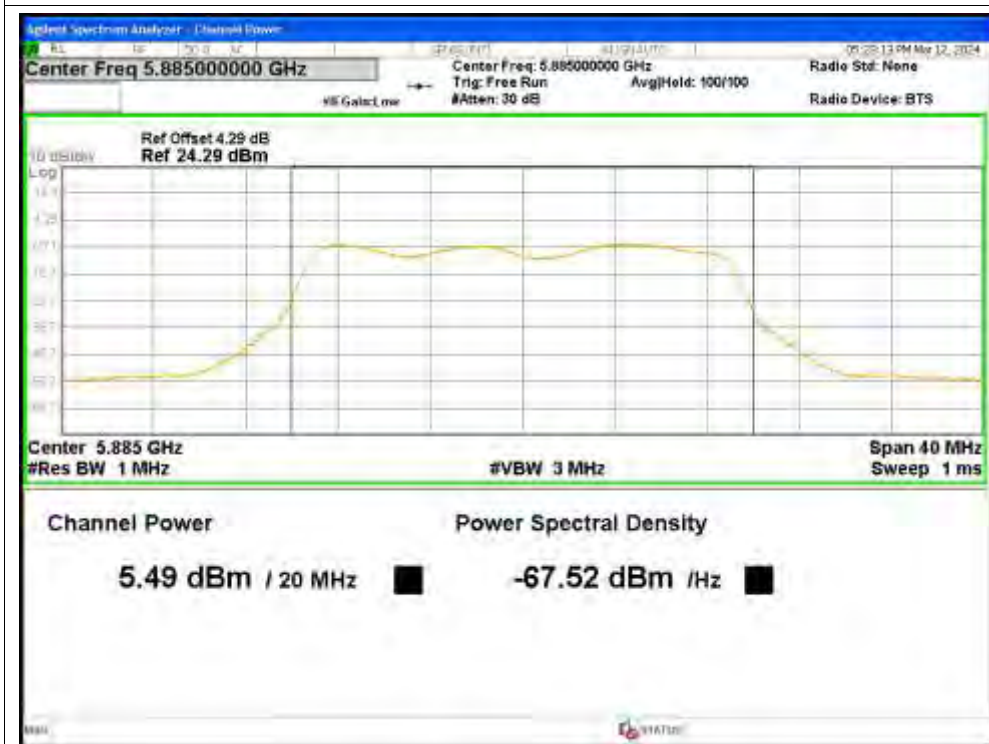

Power NVNT ac40 5835MHz Ant1

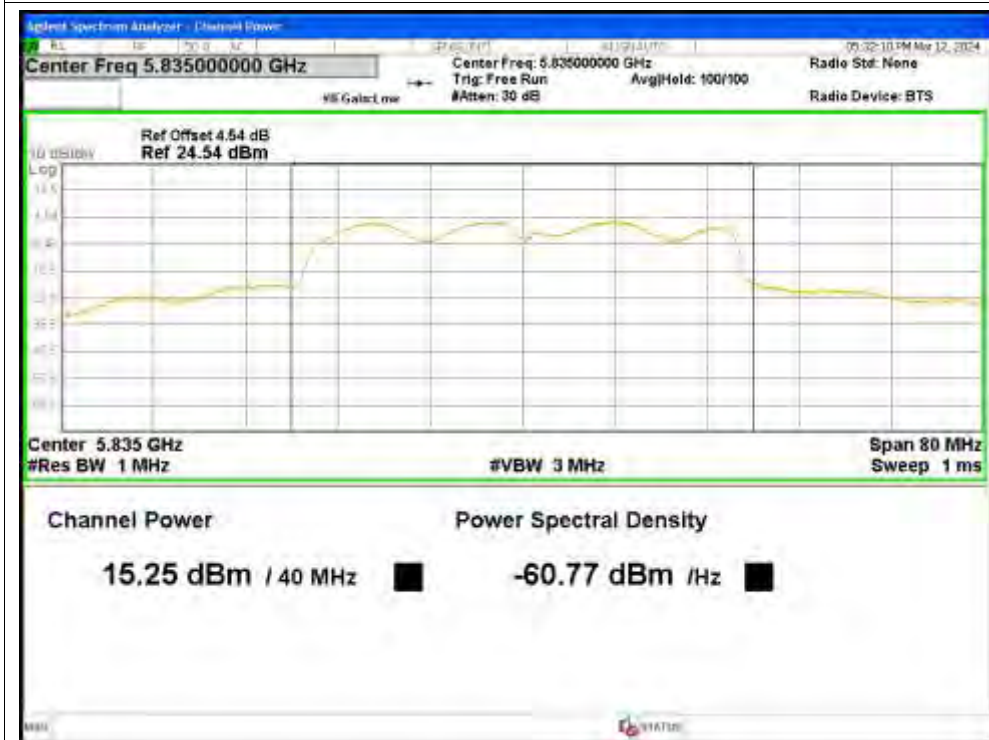

Power NVNT ac40 5835MHz Ant2



Power NVNT ac40 5835MHz Ant3



Power NVNT ac40 5835MHz Ant4




Power NVNT ac40 5875MHz Ant1




Power NVNT ac40 5875MHz Ant2



Power NVNT ac40 5875MHz Ant3

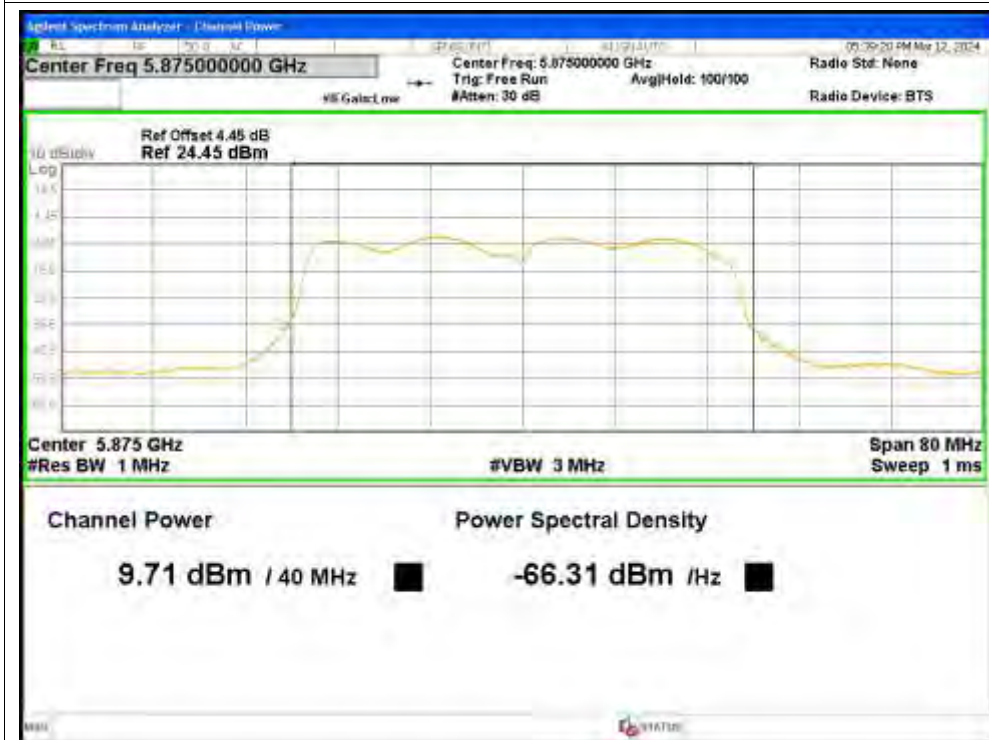

Power NVNT ac40 5875MHz Ant4

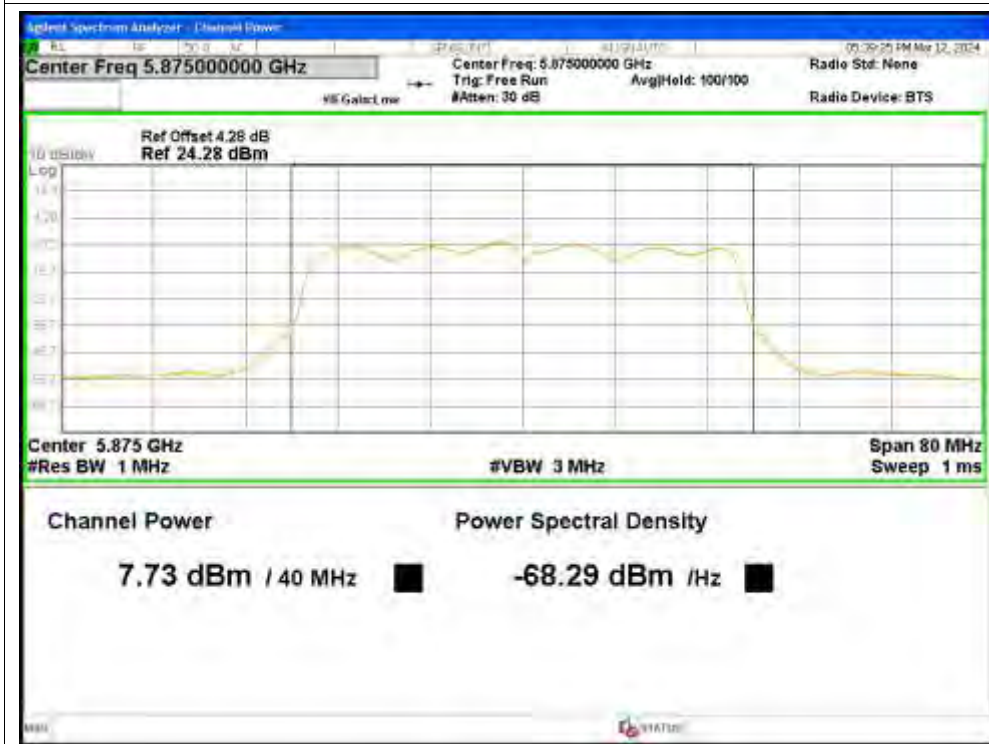

Power NVNT ac80 5855MHz Ant1



Power NVNT ac80 5855MHz Ant2



Power NVNT ac80 5855MHz Ant3




Power NVNT ac80 5855MHz Ant4




Power NVNT ax20 5845MHz Ant1




Power NVNT ax20 5845MHz Ant2

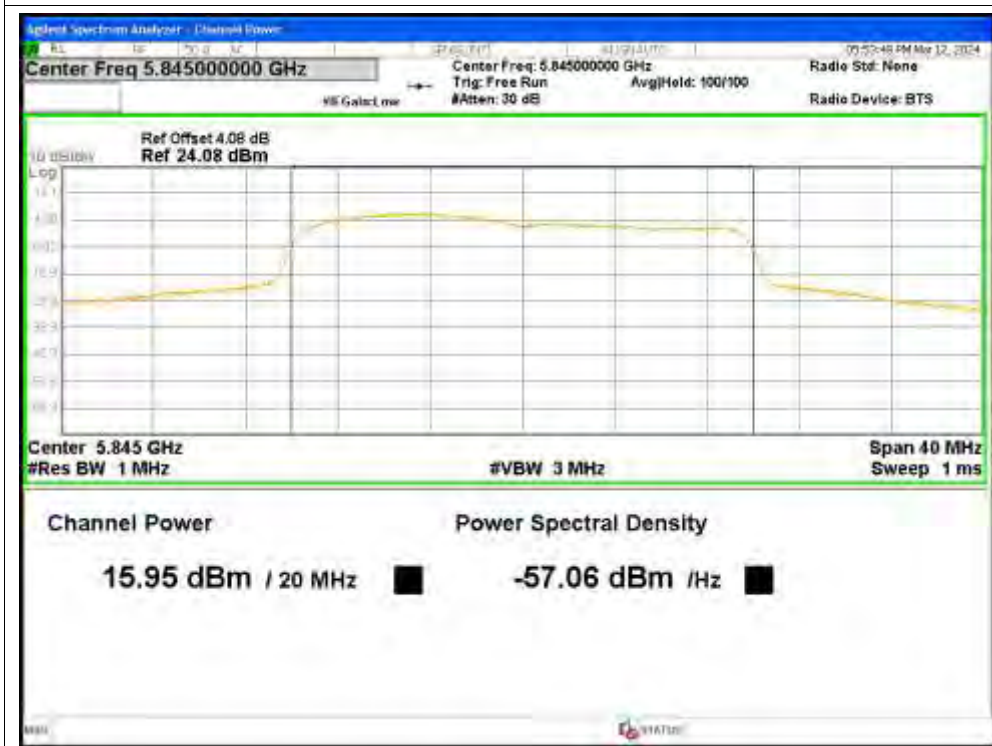

Power NVNT ax20 5845MHz Ant3

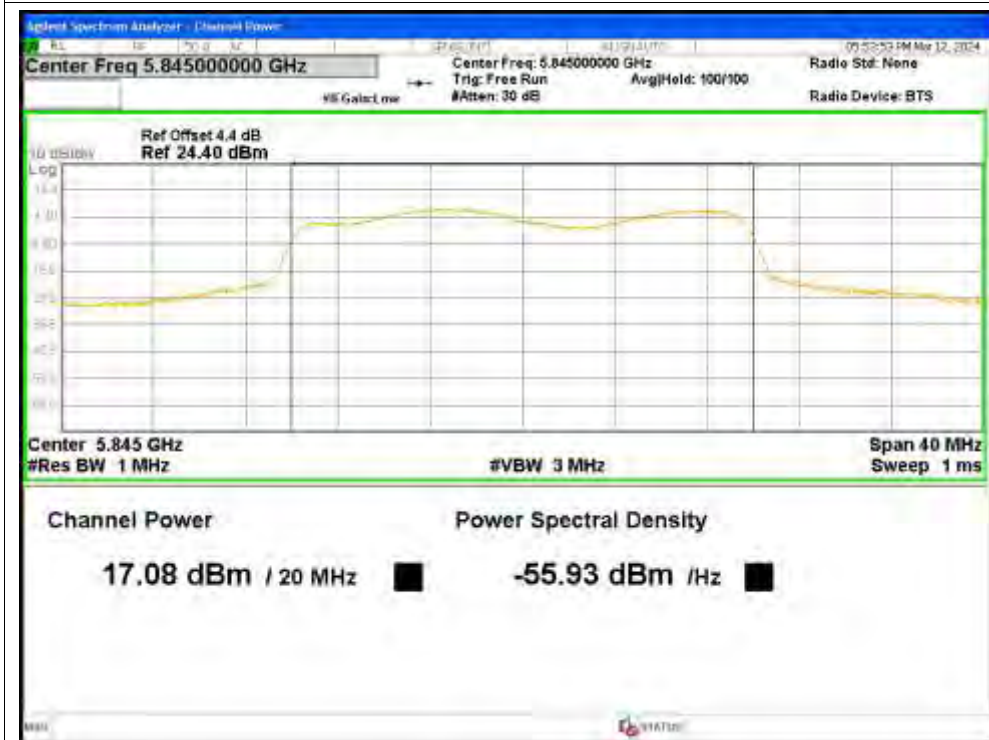


Power NVNT ax20 5845MHz Ant4

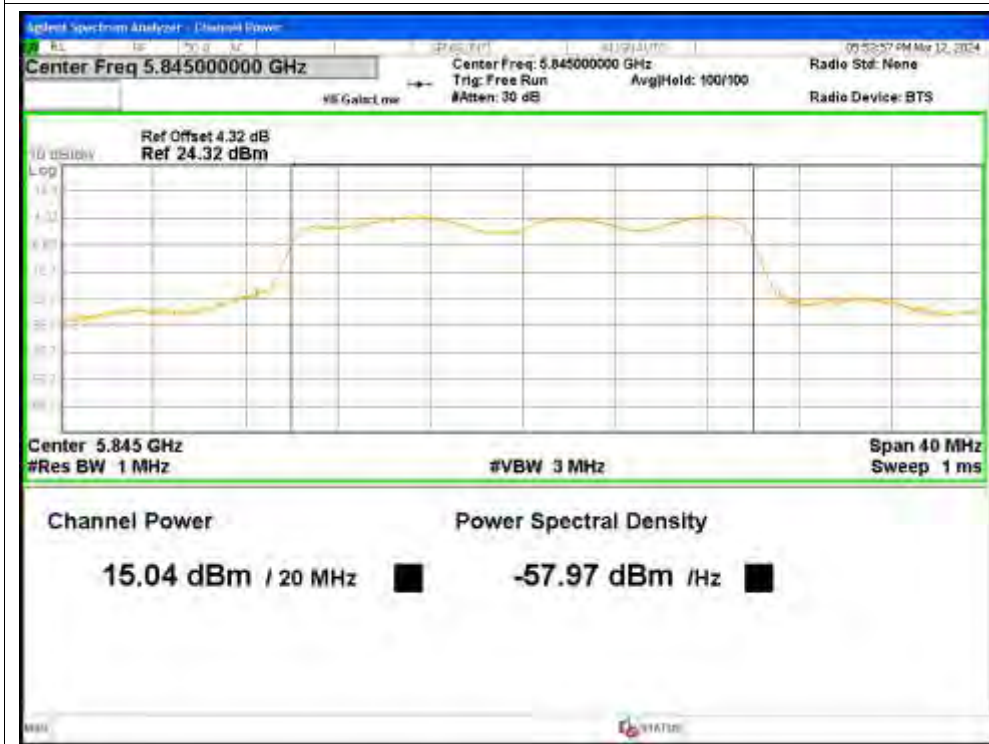


Power NVNT ax20 5865MHz Ant1




Power NVNT ax20 5865MHz Ant2

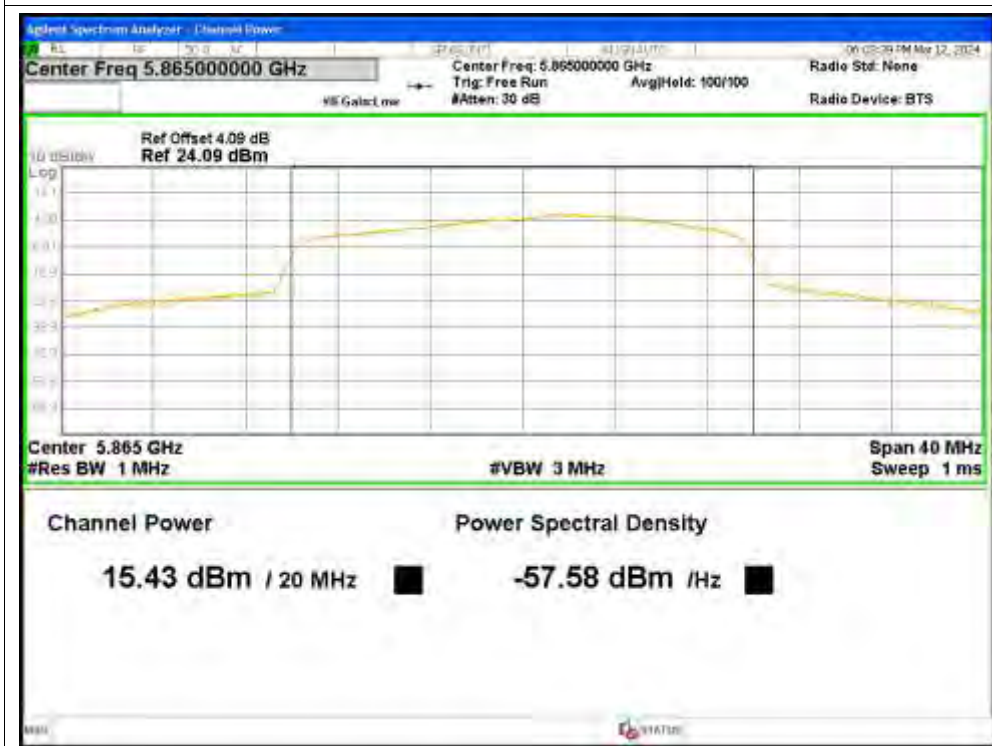


Power NVNT ax20 5865MHz Ant3

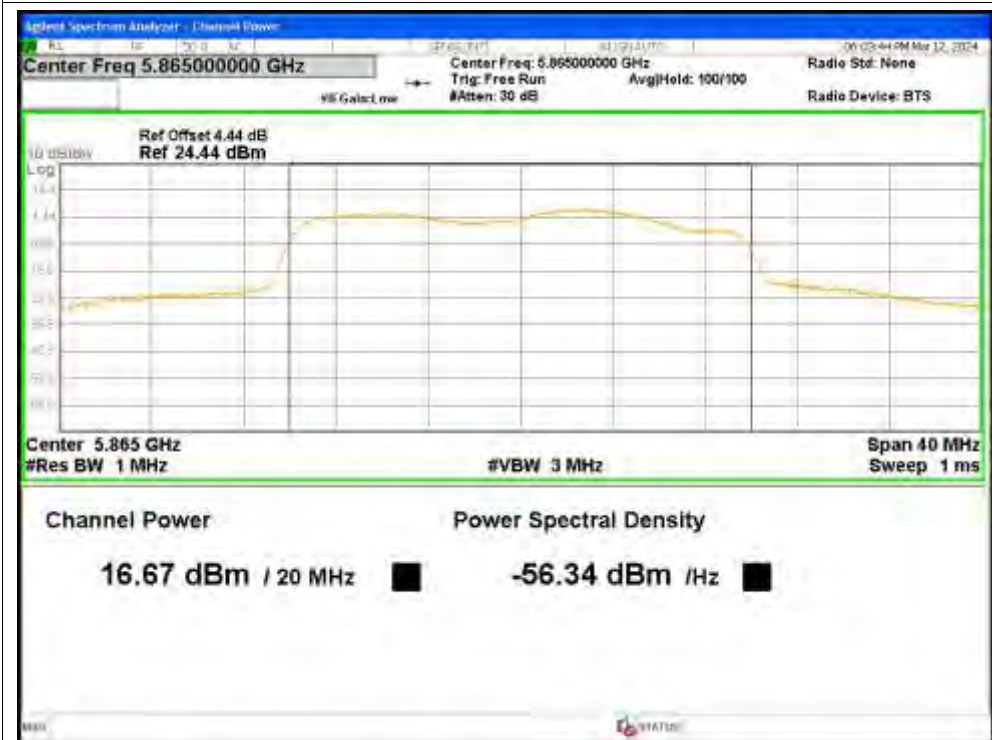

Power NVNT ax20 5865MHz Ant4

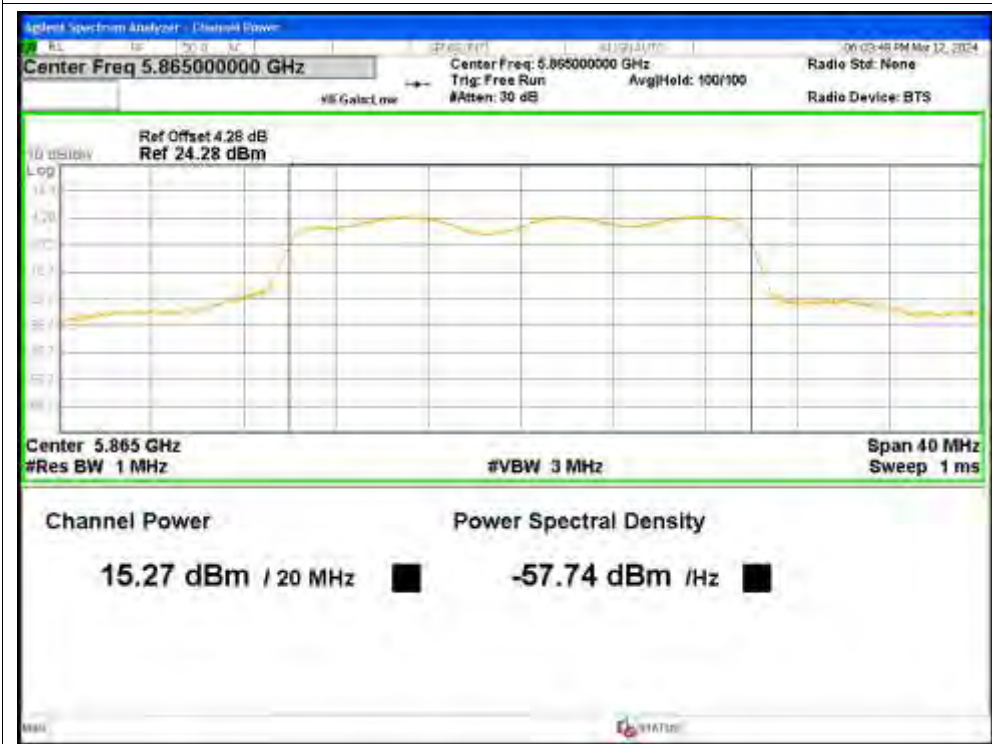


Power NVNT ax20 5885MHz Ant1

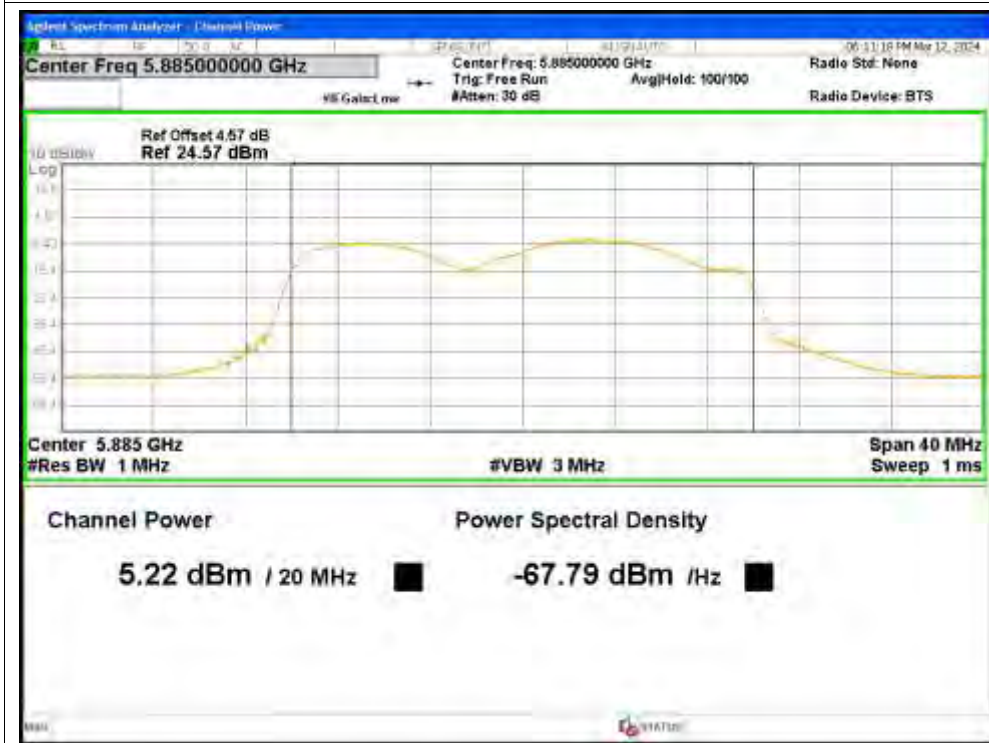

Power NVNT ax20 5885MHz Ant2



Power NVNT ax20 5885MHz Ant3

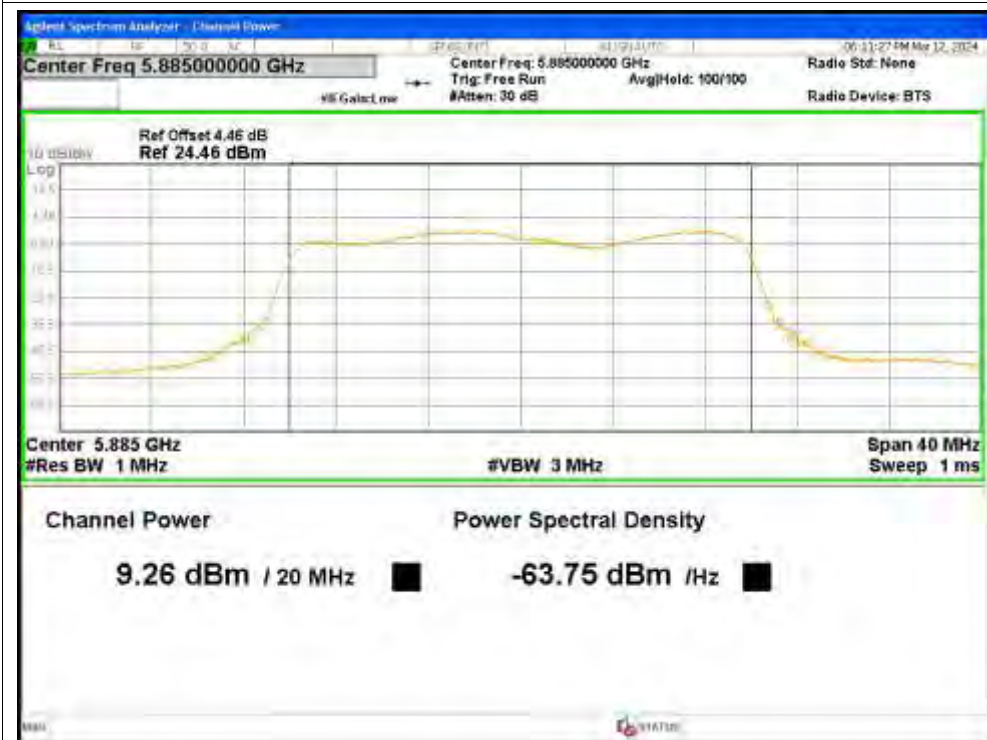

Power NVNT ax20 5885MHz Ant4



Power NVNT ax40 5835MHz Ant1




Power NVNT ax40 5835MHz Ant2



Power NVNT ax40 5835MHz Ant3



Power NVNT ax40 5835MHz Ant4

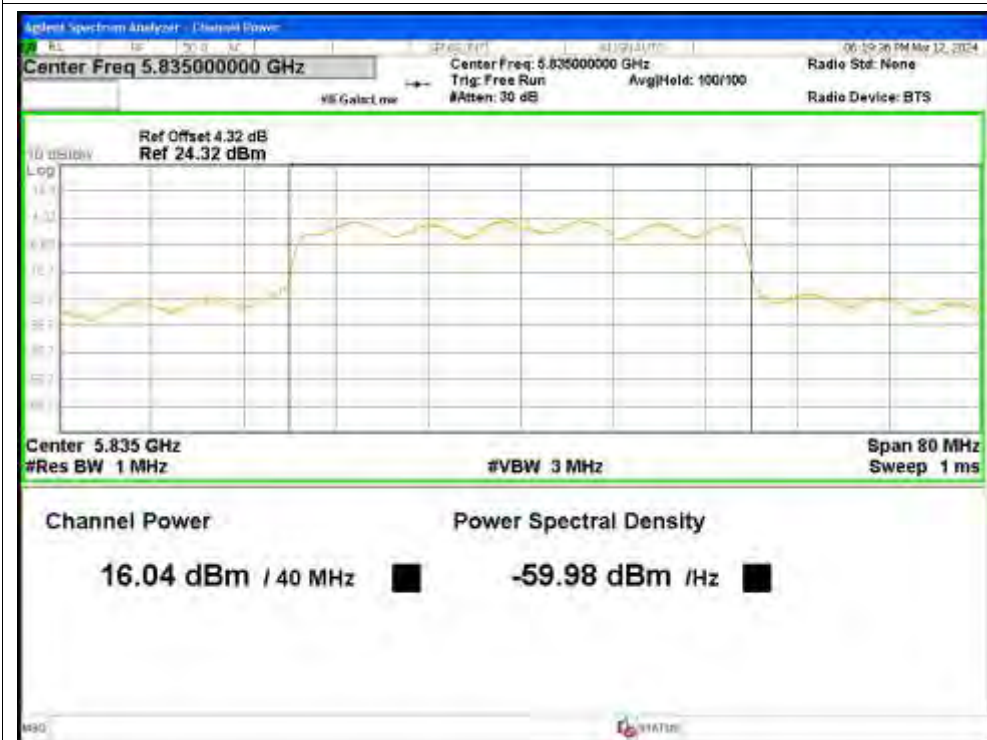


Power NVNT ax40 5875MHz Ant1




Power NVNT ax40 5875MHz Ant2




Power NVNT ax40 5875MHz Ant3

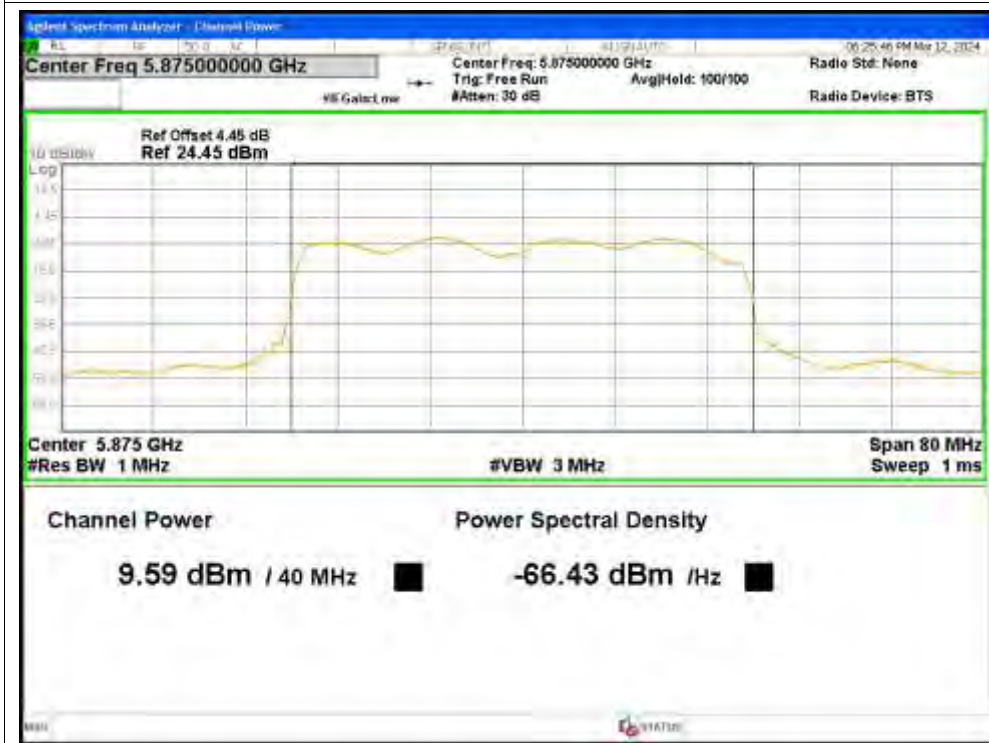

Power NVNT ax40 5875MHz Ant4

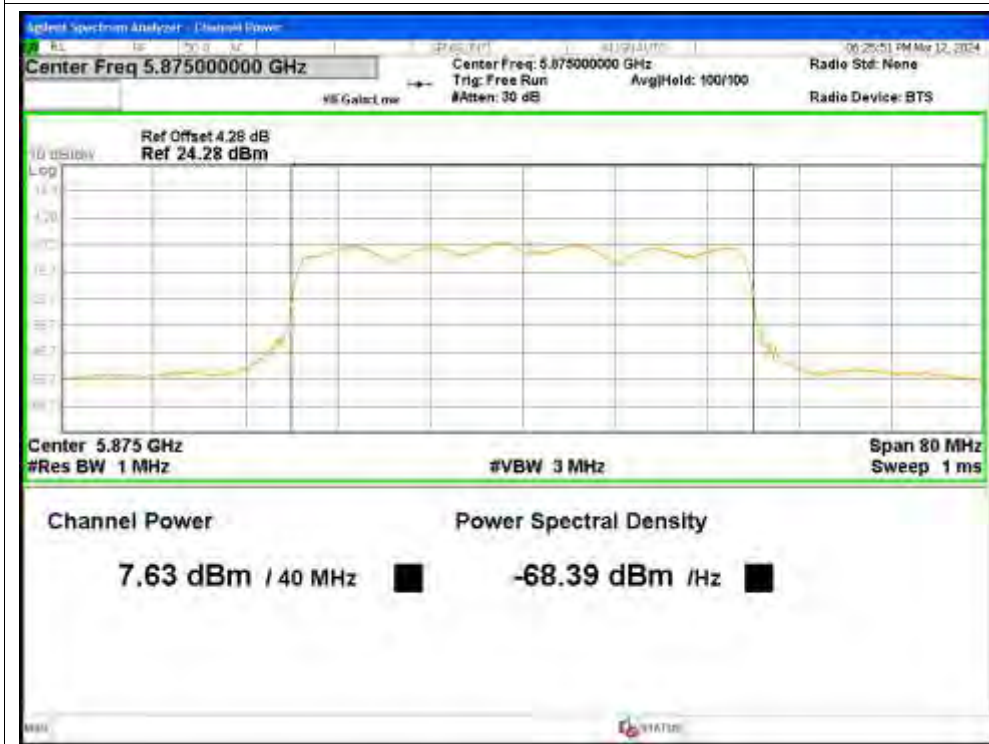

Power NVNT ax80 5855MHz Ant1

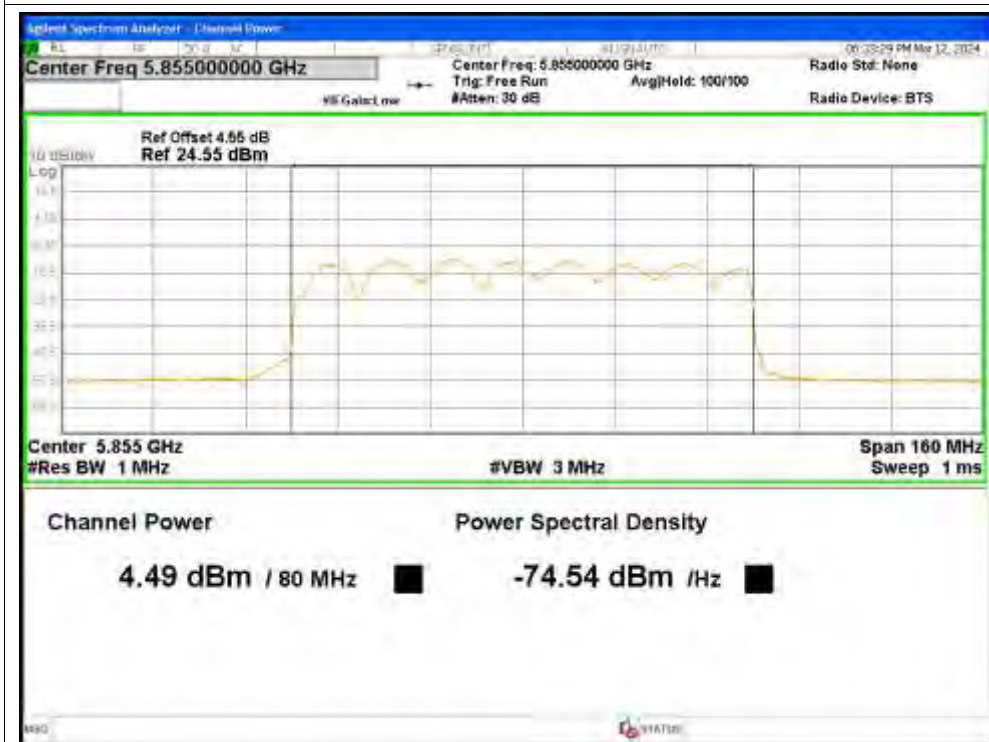

Power NVNT ax80 5855MHz Ant2



Power NVNT ax80 5855MHz Ant3



Power NVNT ax80 5855MHz Ant4




Power NVNT n20 5845MHz Ant1



Power NVNT n20 5845MHz Ant2



Power NVNT n20 5845MHz Ant3

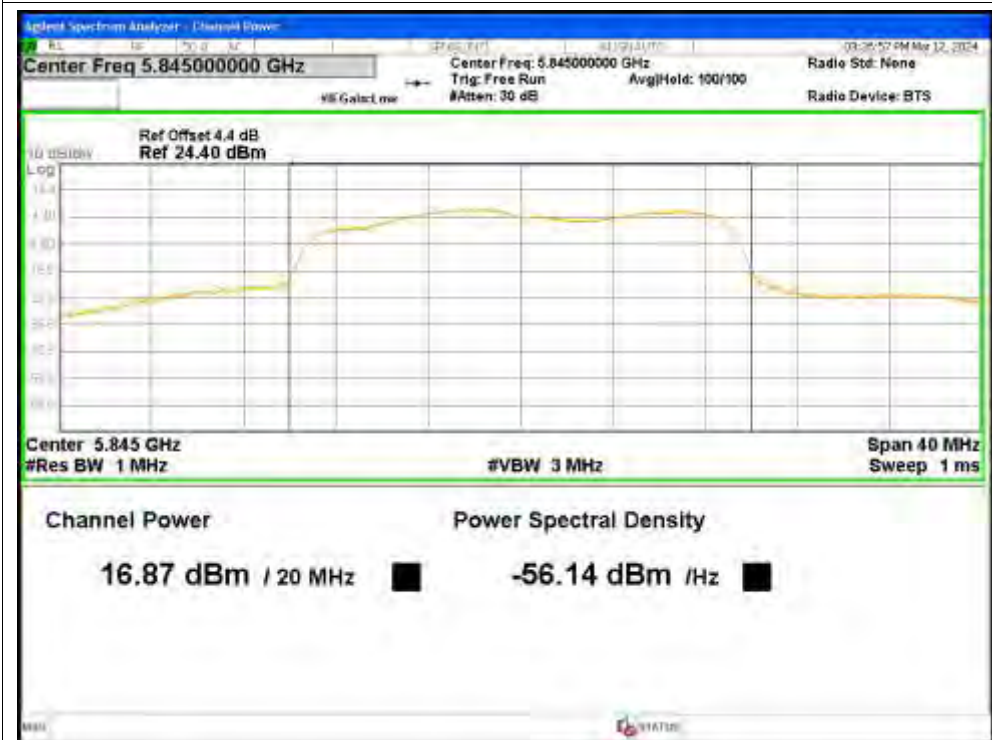

Power NVNT n20 5845MHz Ant4



Power NVNT n20 5865MHz Ant1




Power NVNT n20 5865MHz Ant2




Power NVNT n20 5865MHz Ant3



Power NVNT n20 5865MHz Ant4

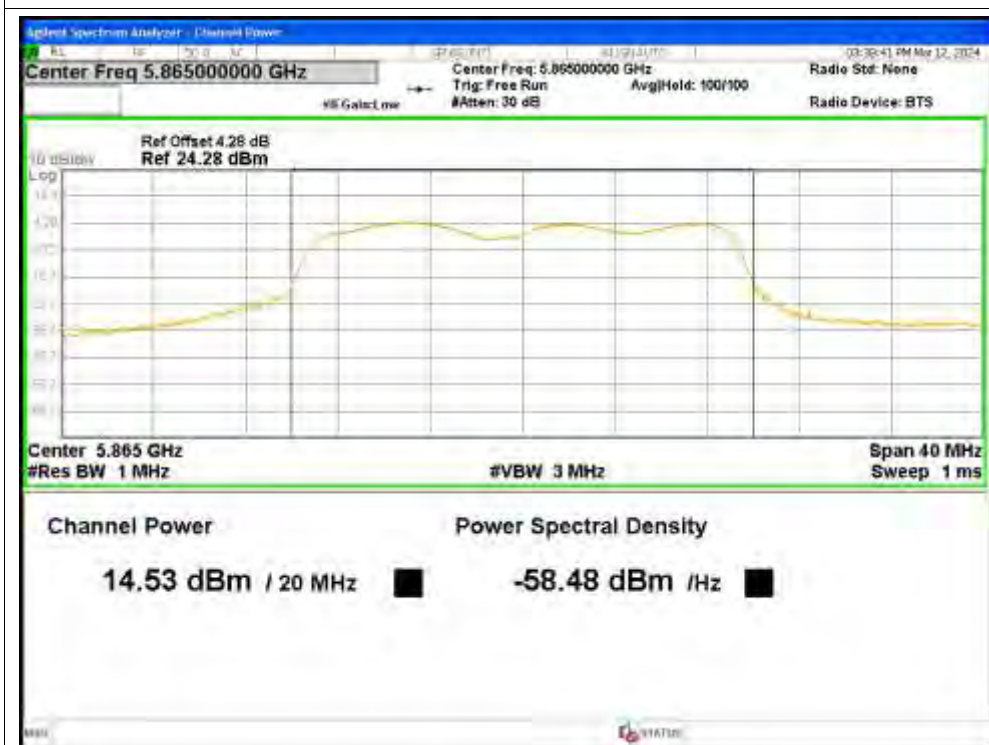

Power NVNT n20 5885MHz Ant1

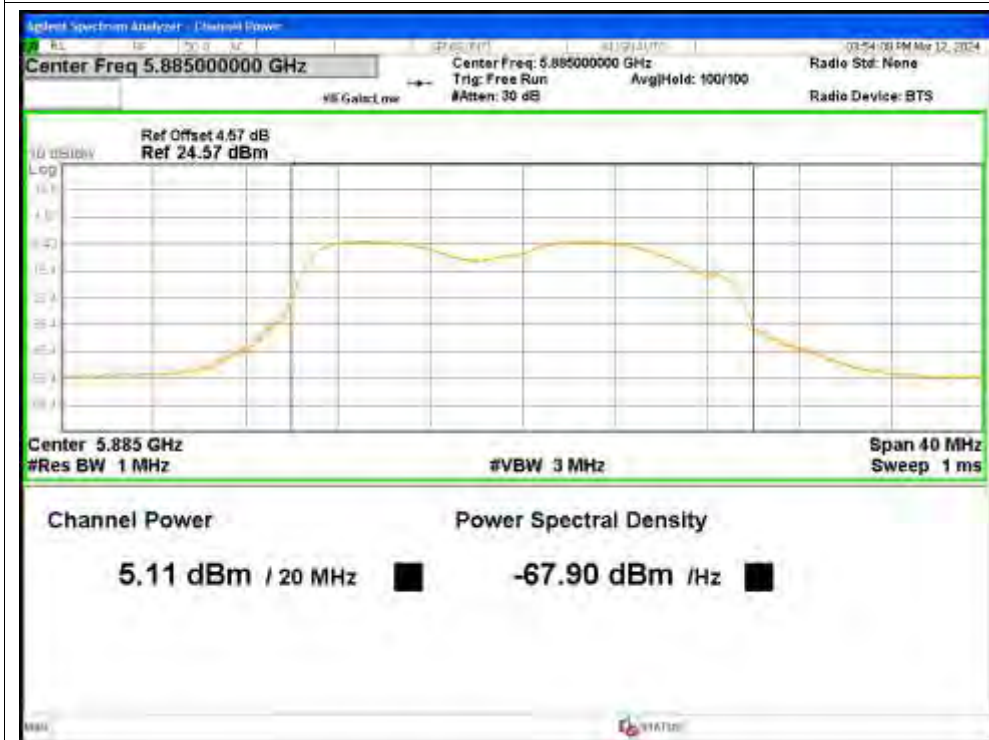

Power NVNT n20 5885MHz Ant2



Power NVNT n20 5885MHz Ant3



Power NVNT n20 5885MHz Ant4



Power NVNT n40 5835MHz Ant1




Power NVNT n40 5835MHz Ant2




Power NVNT n40 5835MHz Ant3




Power NVNT n40 5835MHz Ant4

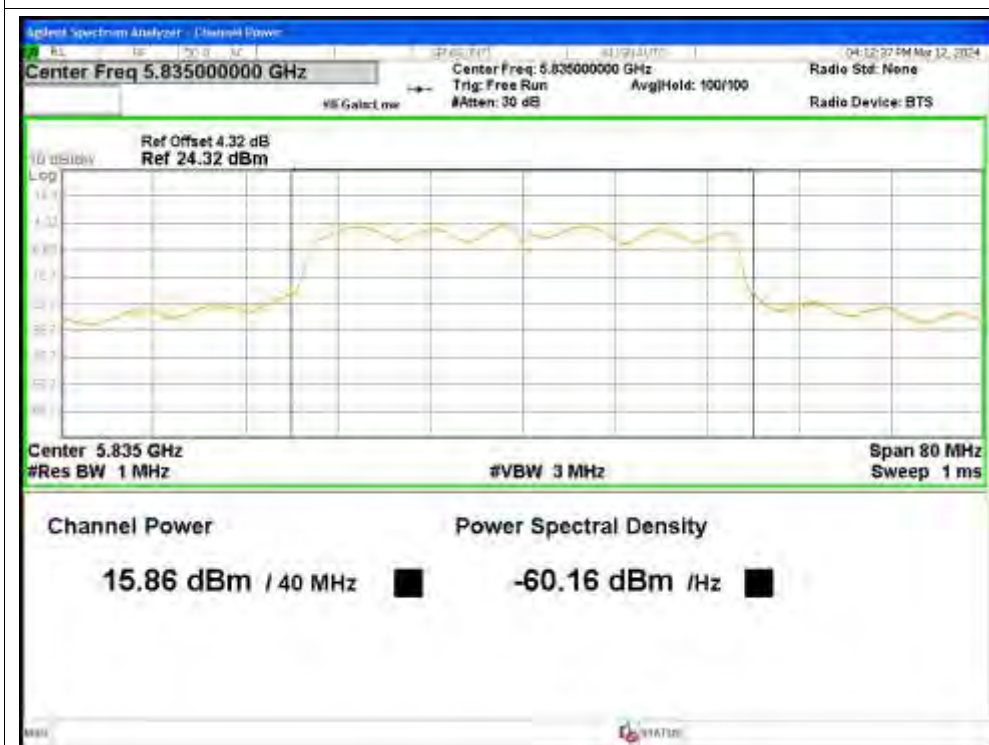

Power NVNT n40 5875MHz Ant1

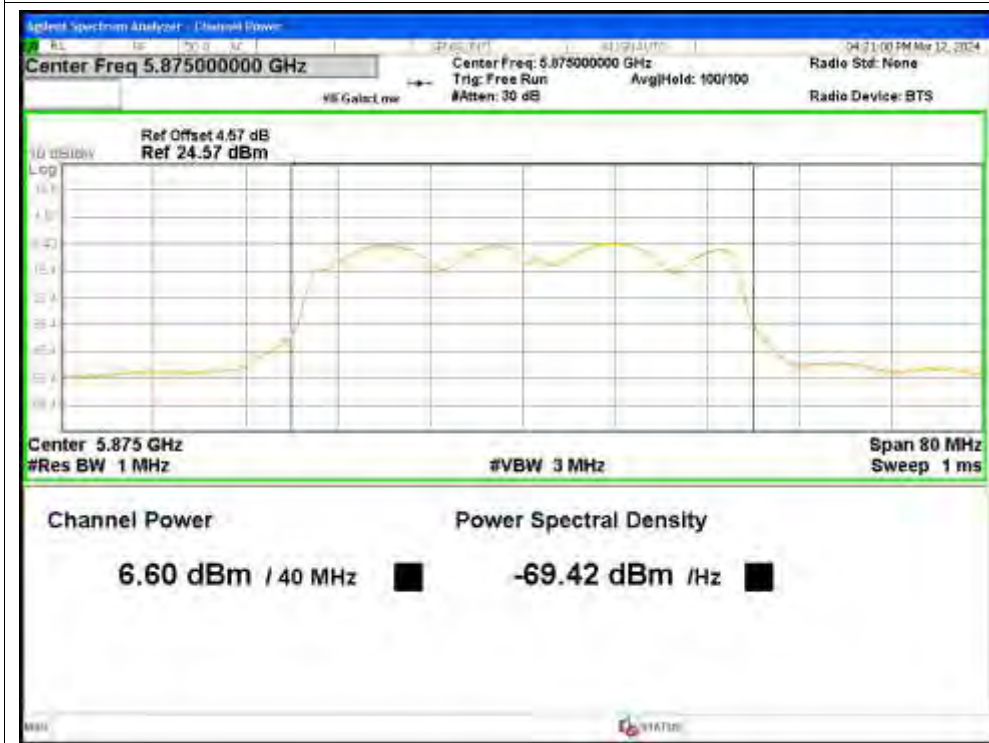

Power NVNT n40 5875MHz Ant2

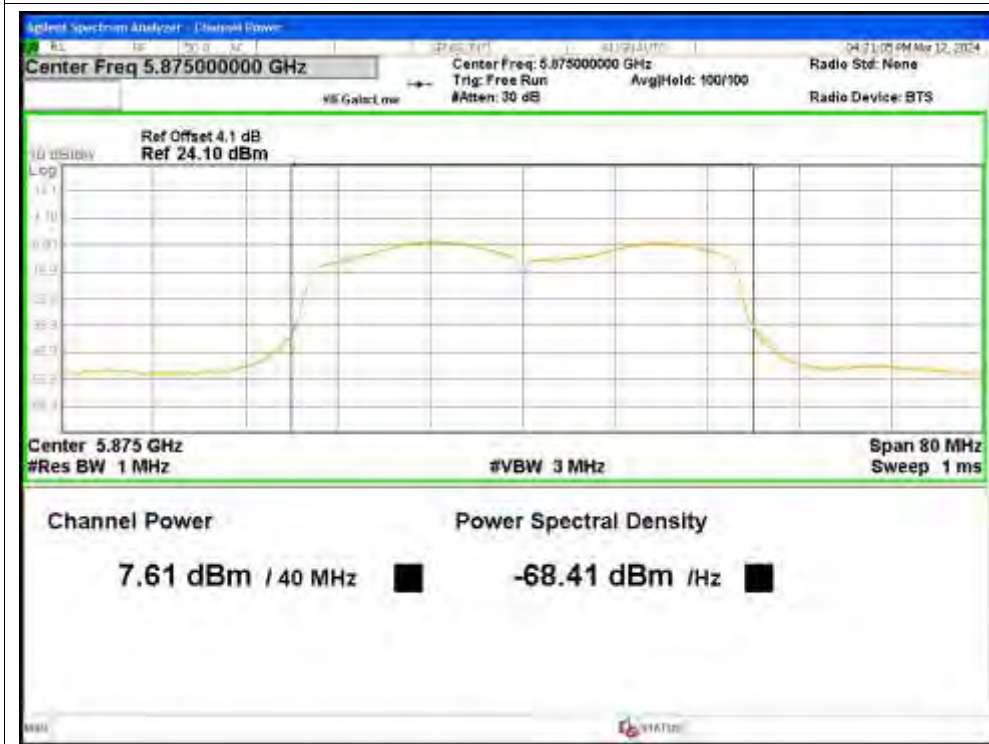

Power NVNT n40 5875MHz Ant3



Power NVNT n40 5875MHz Ant4




3. -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5845	Ant1	15.6996	>=0.5	Pass
NVNT	a	5845	Ant2	15.9679	>=0.5	Pass
NVNT	a	5845	Ant3	10.7724	>=0.5	Pass
NVNT	a	5845	Ant4	15.6878	>=0.5	Pass
NVNT	a	5865	Ant1	10.4236	>=0.5	Pass
NVNT	a	5865	Ant2	15.9319	>=0.5	Pass
NVNT	a	5865	Ant3	14.1916	>=0.5	Pass
NVNT	a	5865	Ant4	16.1159	>=0.5	Pass
NVNT	a	5885	Ant1	15.4603	>=0.5	Pass
NVNT	a	5885	Ant2	14.467	>=0.5	Pass
NVNT	a	5885	Ant3	13.0188	>=0.5	Pass
NVNT	a	5885	Ant4	15.9599	>=0.5	Pass
NVNT	ac20	5845	Ant1	14.1592	>=0.5	Pass
NVNT	ac20	5845	Ant2	11.5519	>=0.5	Pass
NVNT	ac20	5845	Ant3	15.5621	>=0.5	Pass
NVNT	ac20	5845	Ant4	12.6813	>=0.5	Pass
NVNT	ac20	5865	Ant1	15.9806	>=0.5	Pass
NVNT	ac20	5865	Ant2	11.6959	>=0.5	Pass
NVNT	ac20	5865	Ant3	16.3125	>=0.5	Pass
NVNT	ac20	5865	Ant4	16.2179	>=0.5	Pass
NVNT	ac20	5885	Ant1	15.6802	>=0.5	Pass
NVNT	ac20	5885	Ant2	17.5771	>=0.5	Pass
NVNT	ac20	5885	Ant3	16.9793	>=0.5	Pass
NVNT	ac20	5885	Ant4	17.6893	>=0.5	Pass
NVNT	ac40	5835	Ant1	34.217	>=0.5	Pass
NVNT	ac40	5835	Ant2	25.0534	>=0.5	Pass
NVNT	ac40	5835	Ant3	28.1769	>=0.5	Pass
NVNT	ac40	5835	Ant4	34.4764	>=0.5	Pass
NVNT	ac40	5875	Ant1	32.9083	>=0.5	Pass
NVNT	ac40	5875	Ant2	32.2241	>=0.5	Pass
NVNT	ac40	5875	Ant3	32.8637	>=0.5	Pass
NVNT	ac40	5875	Ant4	35.6741	>=0.5	Pass
NVNT	ac80	5855	Ant1	71.1214	>=0.5	Pass
NVNT	ac80	5855	Ant2	72.7931	>=0.5	Pass
NVNT	ac80	5855	Ant3	70.4714	>=0.5	Pass
NVNT	ac80	5855	Ant4	72.5181	>=0.5	Pass
NVNT	ax20	5845	Ant1	16.6614	>=0.5	Pass
NVNT	ax20	5845	Ant2	6.3804	>=0.5	Pass
NVNT	ax20	5845	Ant3	14.6559	>=0.5	Pass
NVNT	ax20	5845	Ant4	18.7056	>=0.5	Pass


NVNT	ax20	5865	Ant1	16.2461	≥ 0.5	Pass
NVNT	ax20	5865	Ant2	10.5259	≥ 0.5	Pass
NVNT	ax20	5865	Ant3	17.2527	≥ 0.5	Pass
NVNT	ax20	5865	Ant4	18.9612	≥ 0.5	Pass
NVNT	ax20	5885	Ant1	15.5809	≥ 0.5	Pass
NVNT	ax20	5885	Ant2	16.3809	≥ 0.5	Pass
NVNT	ax20	5885	Ant3	18.8797	≥ 0.5	Pass
NVNT	ax20	5885	Ant4	15.6368	≥ 0.5	Pass
NVNT	ax40	5835	Ant1	35.7477	≥ 0.5	Pass
NVNT	ax40	5835	Ant2	30.8714	≥ 0.5	Pass
NVNT	ax40	5835	Ant3	31.7487	≥ 0.5	Pass
NVNT	ax40	5835	Ant4	35.1306	≥ 0.5	Pass
NVNT	ax40	5875	Ant1	34.0421	≥ 0.5	Pass
NVNT	ax40	5875	Ant2	30.2292	≥ 0.5	Pass
NVNT	ax40	5875	Ant3	34.7767	≥ 0.5	Pass
NVNT	ax40	5875	Ant4	37.5913	≥ 0.5	Pass
NVNT	ax80	5855	Ant1	73.4765	≥ 0.5	Pass
NVNT	ax80	5855	Ant2	74.0114	≥ 0.5	Pass
NVNT	ax80	5855	Ant3	73.1526	≥ 0.5	Pass
NVNT	ax80	5855	Ant4	77.4016	≥ 0.5	Pass
NVNT	n20	5845	Ant1	15.2703	≥ 0.5	Pass
NVNT	n20	5845	Ant2	17.5593	≥ 0.5	Pass
NVNT	n20	5845	Ant3	15.7445	≥ 0.5	Pass
NVNT	n20	5845	Ant4	16.0716	≥ 0.5	Pass
NVNT	n20	5865	Ant1	15.0431	≥ 0.5	Pass
NVNT	n20	5865	Ant2	13.7162	≥ 0.5	Pass
NVNT	n20	5865	Ant3	13.1916	≥ 0.5	Pass
NVNT	n20	5865	Ant4	16.2932	≥ 0.5	Pass
NVNT	n20	5885	Ant1	16.3856	≥ 0.5	Pass
NVNT	n20	5885	Ant2	17.5358	≥ 0.5	Pass
NVNT	n20	5885	Ant3	14.8096	≥ 0.5	Pass
NVNT	n20	5885	Ant4	14.4026	≥ 0.5	Pass
NVNT	n40	5835	Ant1	33.9157	≥ 0.5	Pass
NVNT	n40	5835	Ant2	35.2708	≥ 0.5	Pass
NVNT	n40	5835	Ant3	33.8192	≥ 0.5	Pass
NVNT	n40	5835	Ant4	34.3996	≥ 0.5	Pass
NVNT	n40	5875	Ant1	32.5604	≥ 0.5	Pass
NVNT	n40	5875	Ant2	27.2593	≥ 0.5	Pass
NVNT	n40	5875	Ant3	33.1614	≥ 0.5	Pass
NVNT	n40	5875	Ant4	35.107	≥ 0.5	Pass

Test Graphs


-6dB Bandwidth NVNT a 5845MHz Ant1

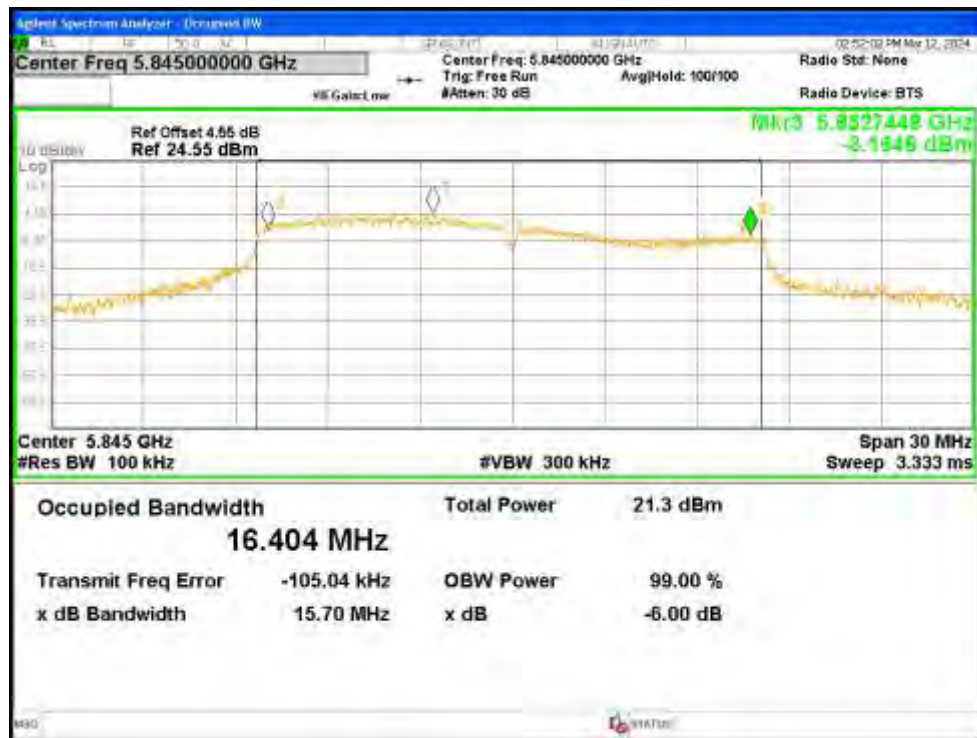


-6dB Bandwidth NVNT a 5845MHz Ant2

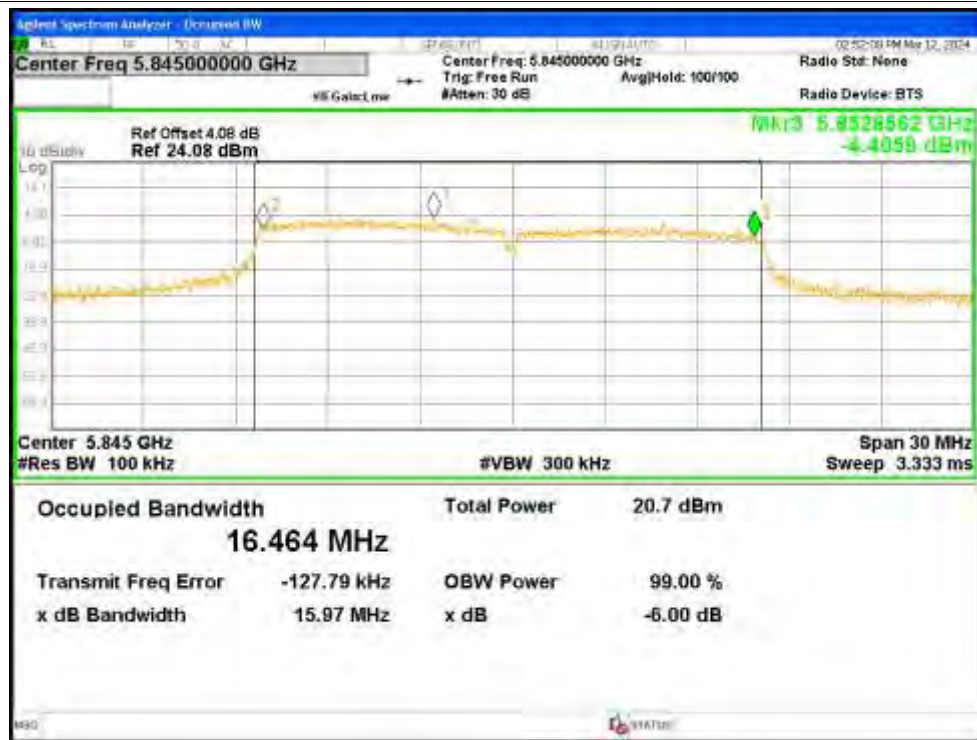

-6dB Bandwidth NVNT a 5845MHz Ant3

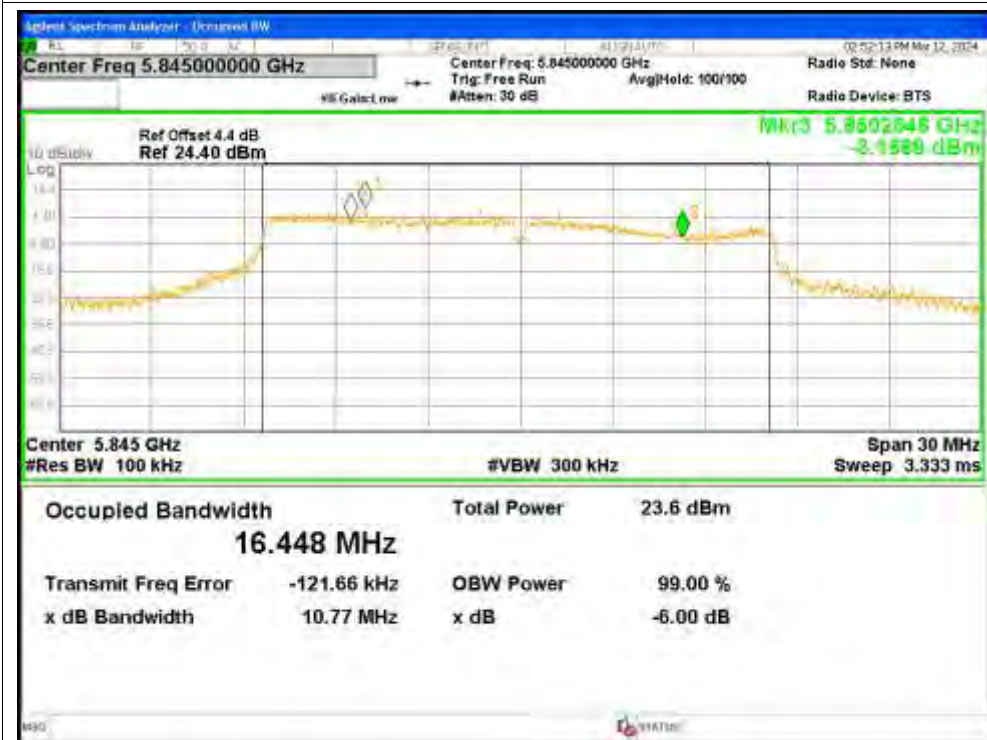


-6dB Bandwidth NVNT a 5845MHz Ant4

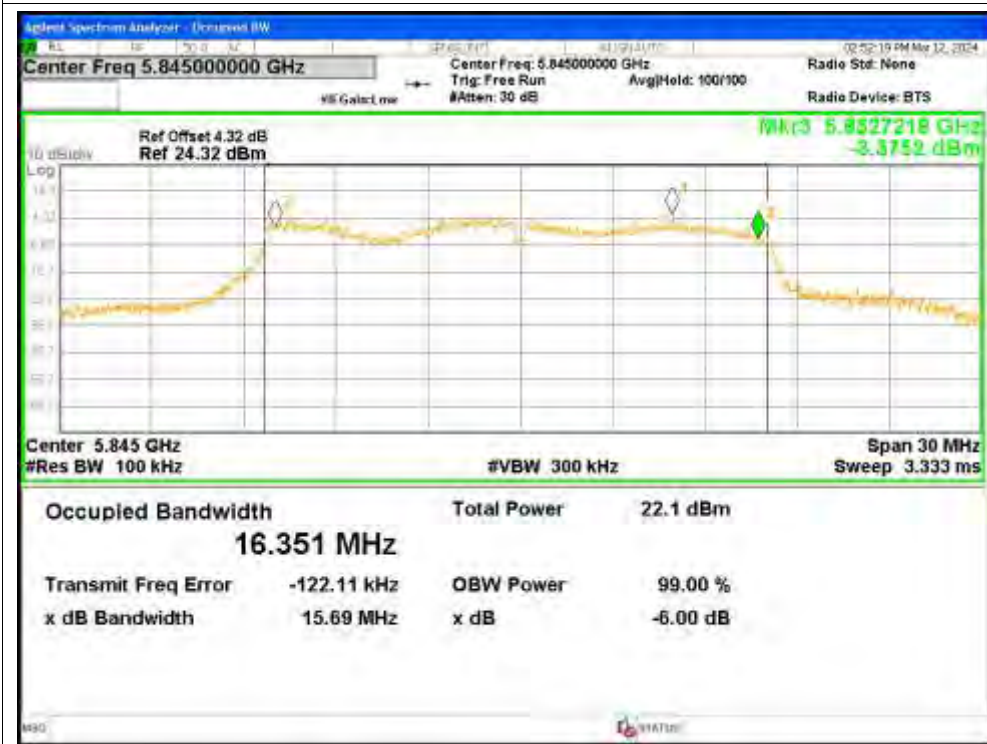


-6dB Bandwidth NVNT a 5865MHz Ant1




-6dB Bandwidth NVNT a 5865MHz Ant2

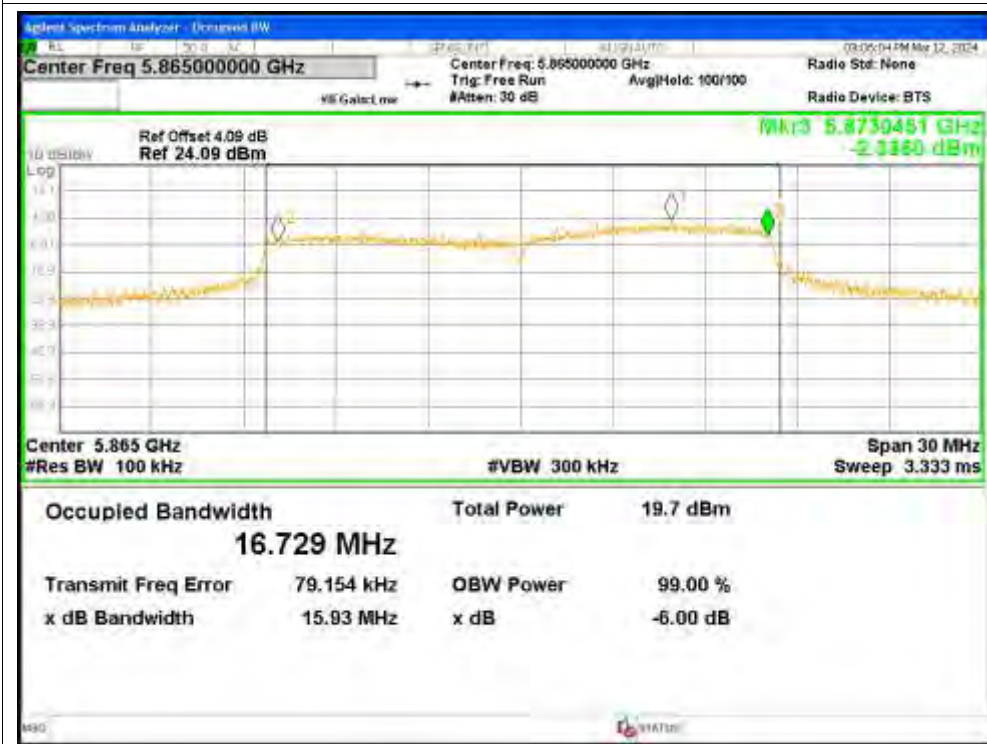

-6dB Bandwidth NVNT a 5865MHz Ant3

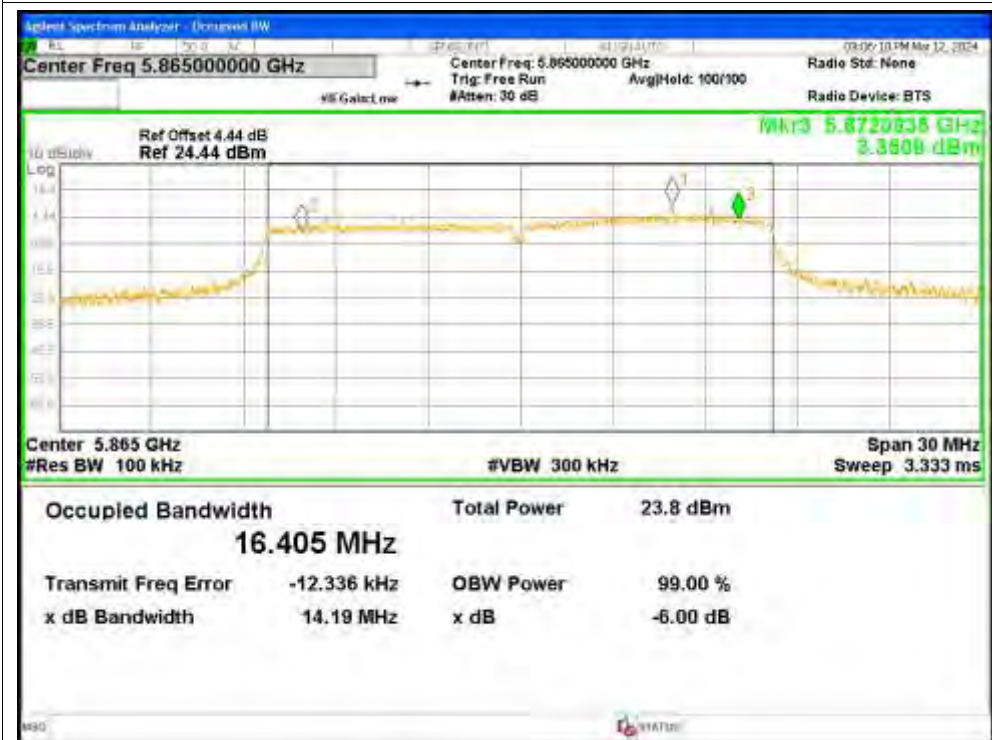


-6dB Bandwidth NVNT a 5865MHz Ant4

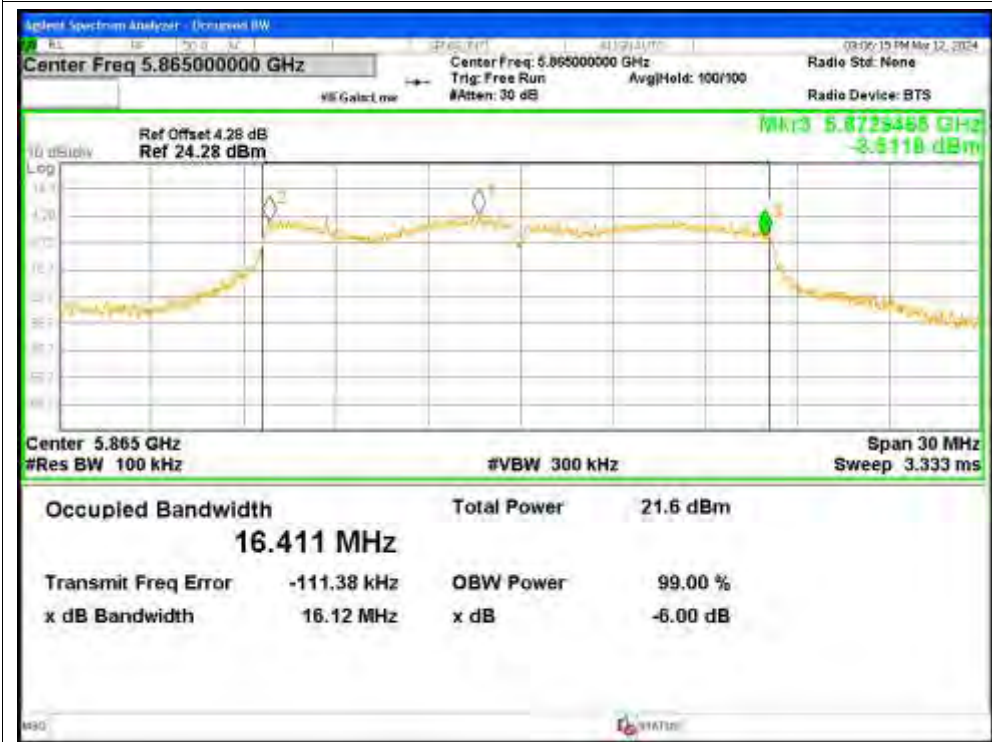


-6dB Bandwidth NVNT a 5885MHz Ant1



-6dB Bandwidth NVNT a 5885MHz Ant2

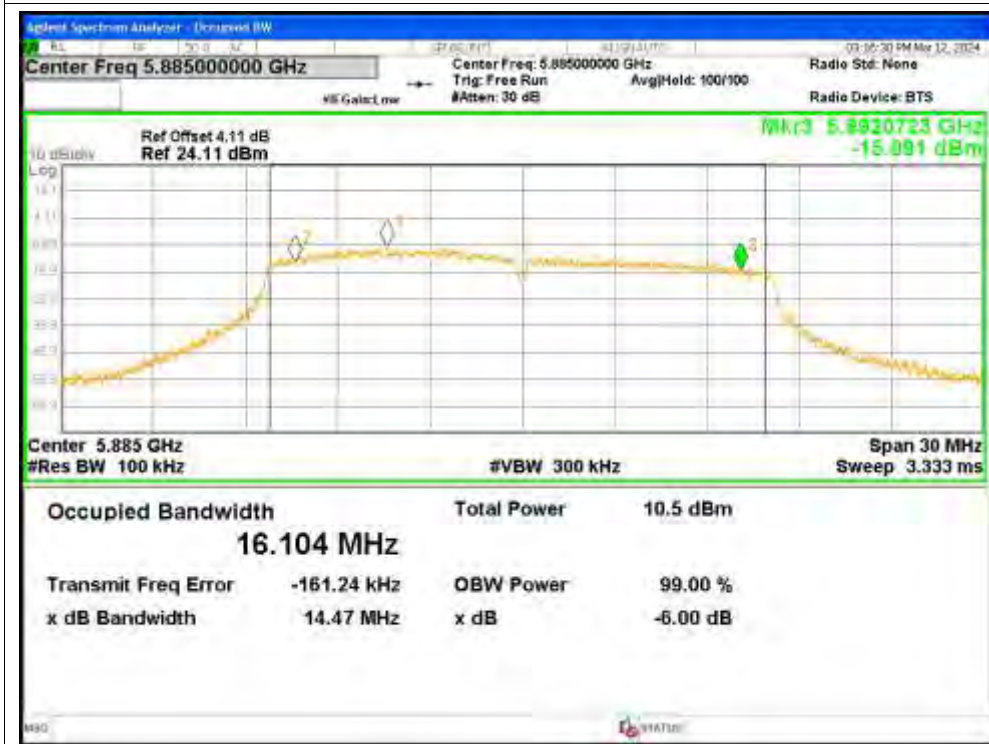

-6dB Bandwidth NVNT a 5885MHz Ant3

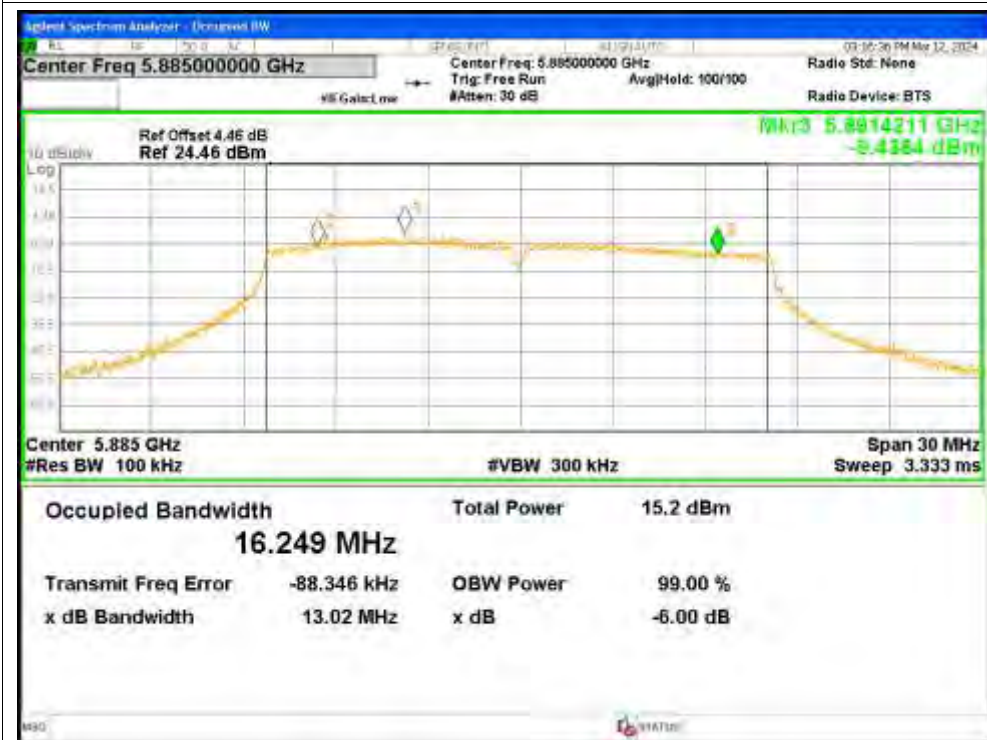


-6dB Bandwidth NVNT a 5885MHz Ant4




-6dB Bandwidth NVNT ac20 5845MHz Ant1




-6dB Bandwidth NVNT ac20 5845MHz Ant2

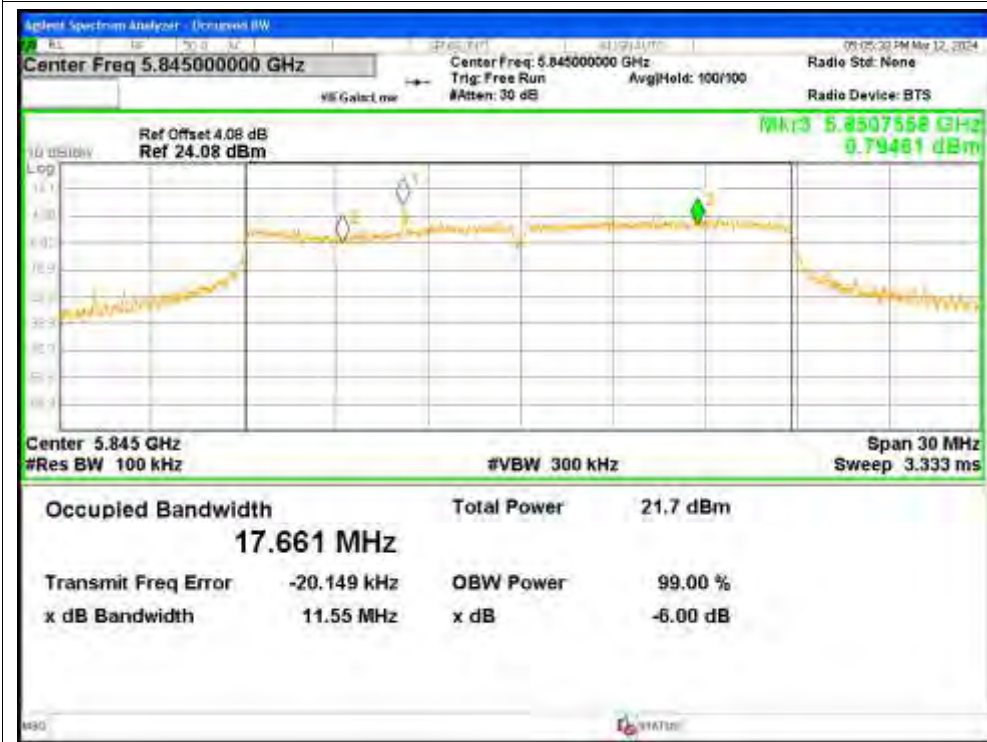

-6dB Bandwidth NVNT ac20 5845MHz Ant3

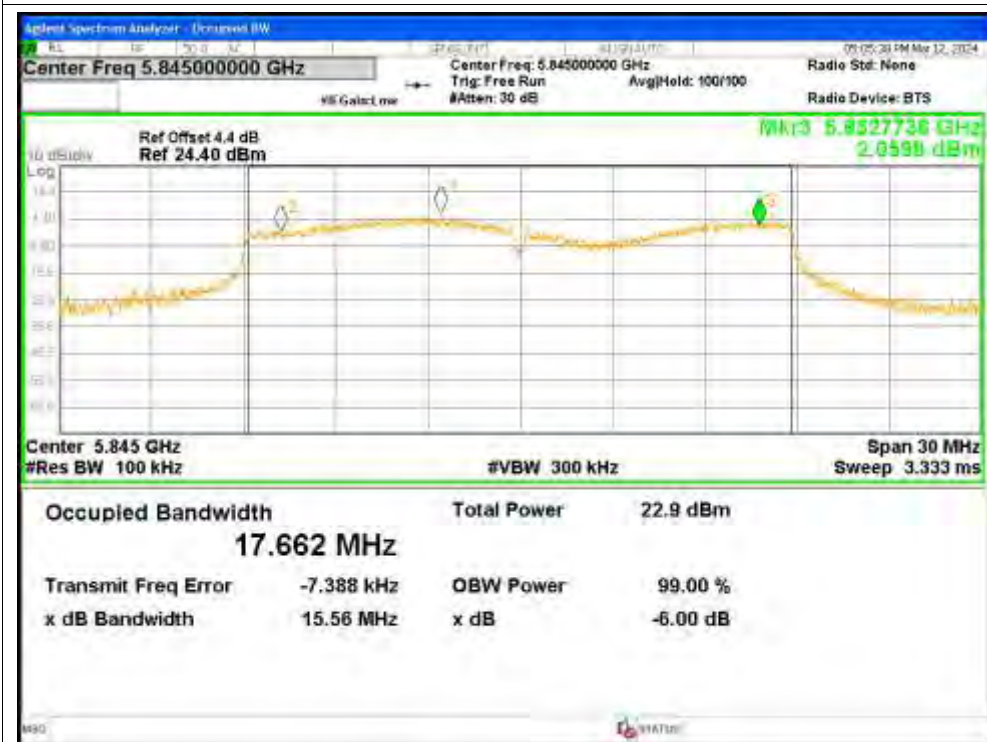


-6dB Bandwidth NVNT ac20 5845MHz Ant4

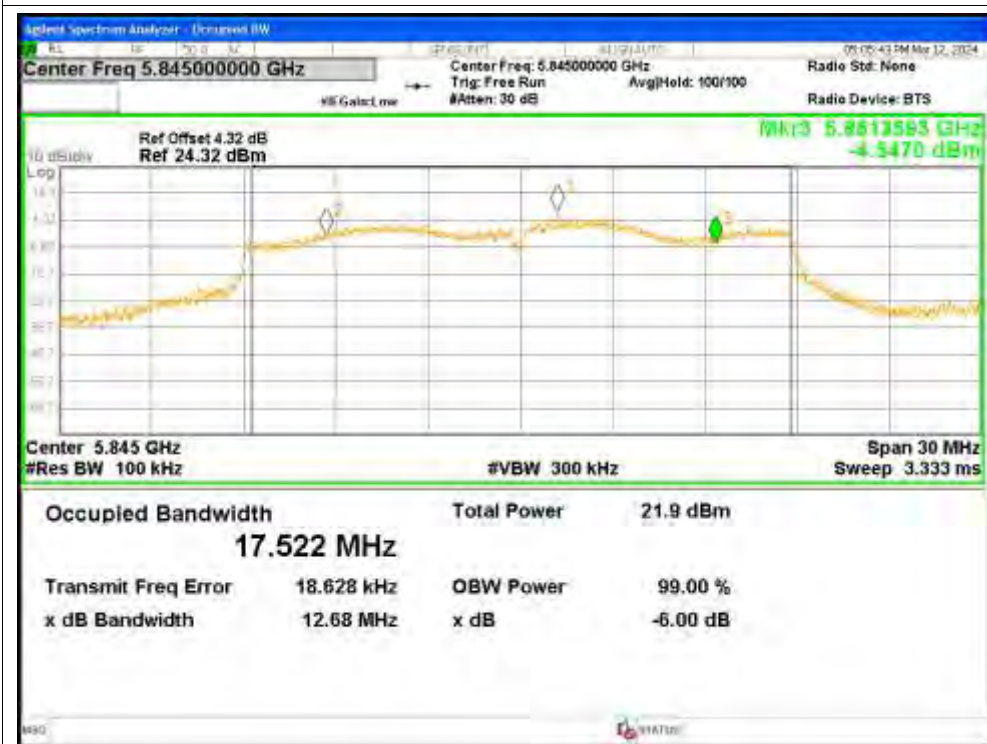

-6dB Bandwidth NVNT ac20 5865MHz Ant1




-6dB Bandwidth NVNT ac20 5865MHz Ant2

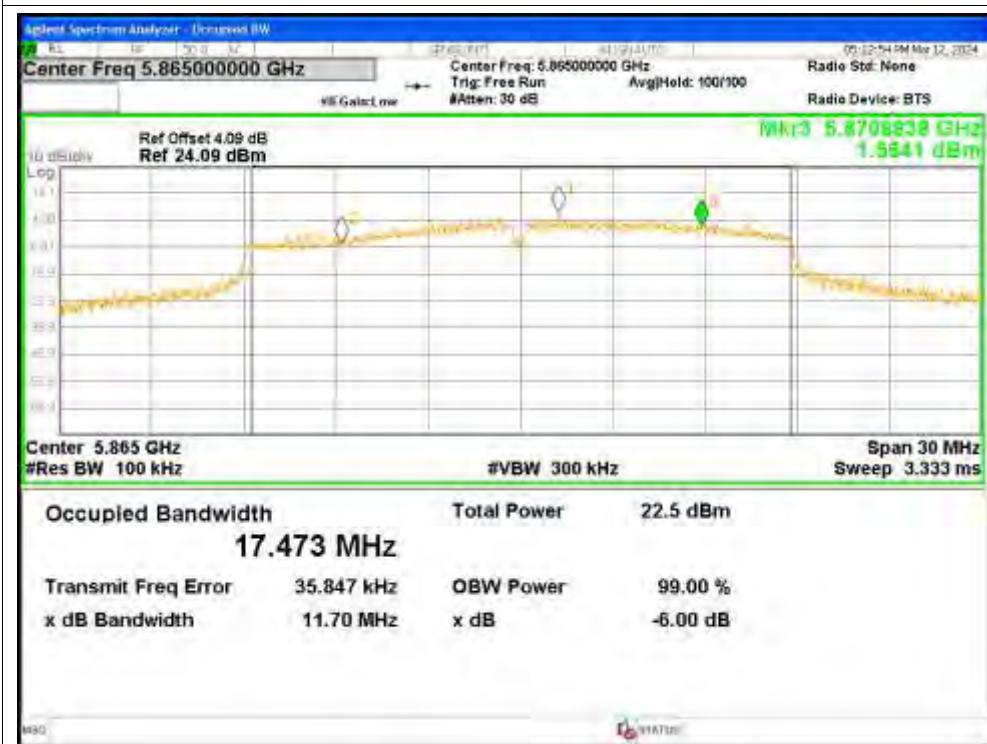


-6dB Bandwidth NVNT ac20 5865MHz Ant3



-6dB Bandwidth NVNT ac20 5865MHz Ant4

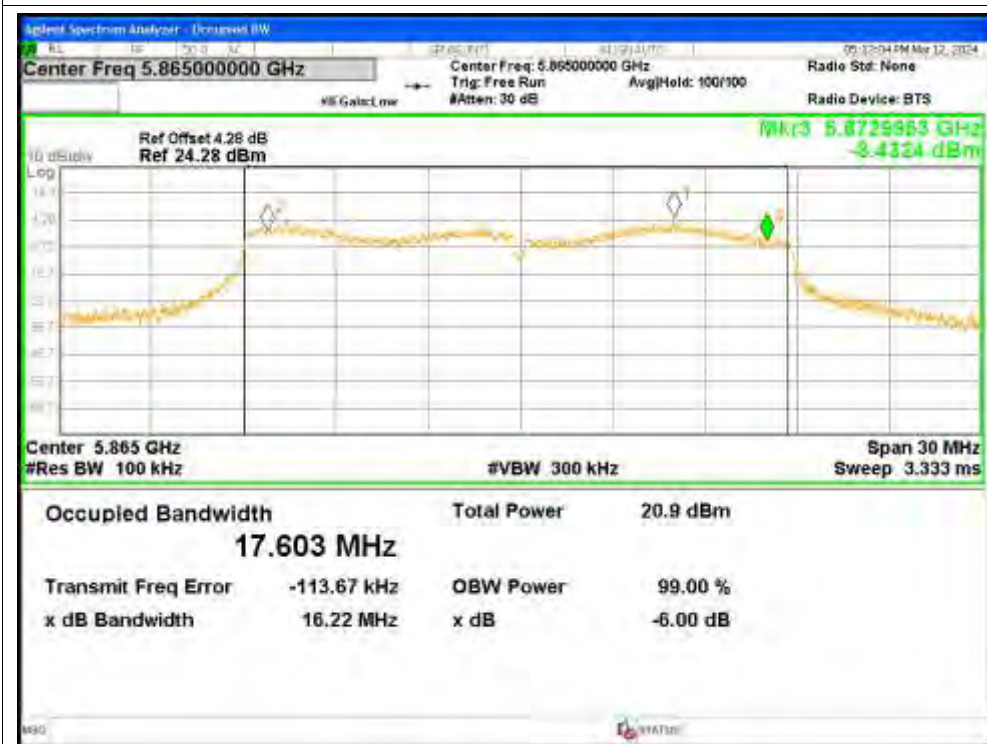


-6dB Bandwidth NVNT ac20 5885MHz Ant1

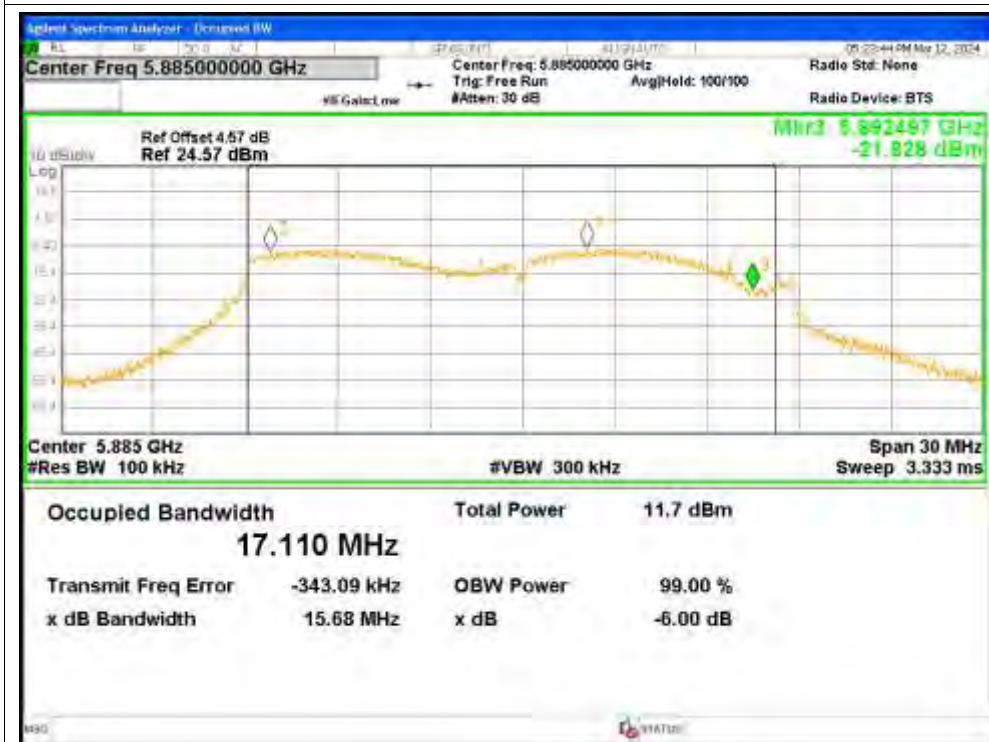


-6dB Bandwidth NVNT ac20 5885MHz Ant2




-6dB Bandwidth NVNT ac20 5885MHz Ant3

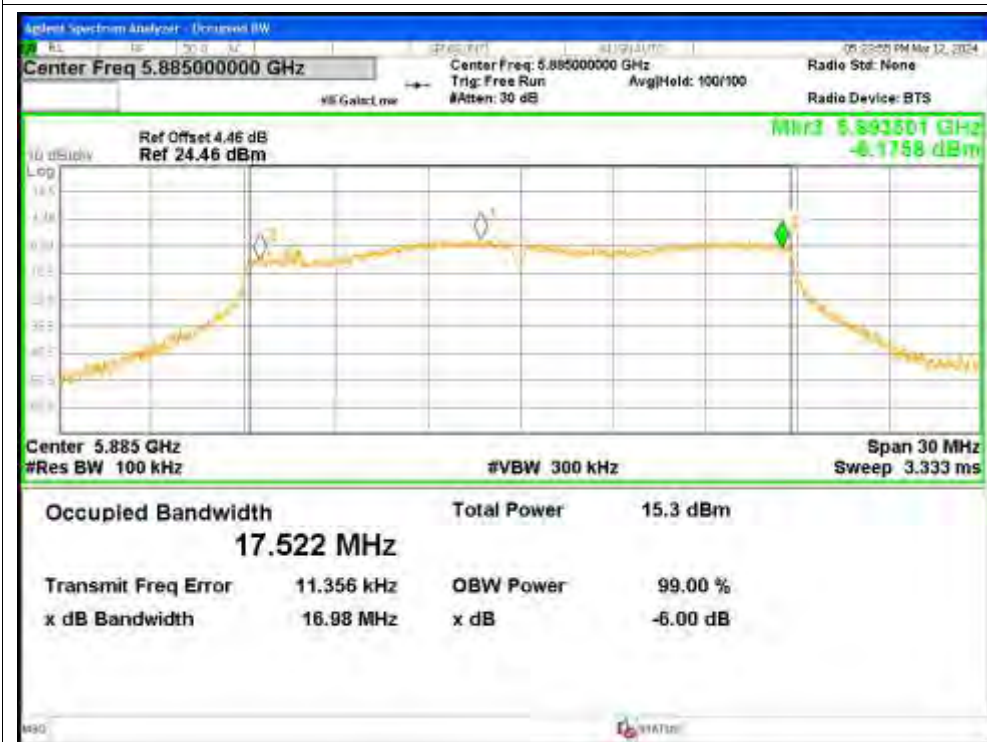


-6dB Bandwidth NVNT ac20 5885MHz Ant4

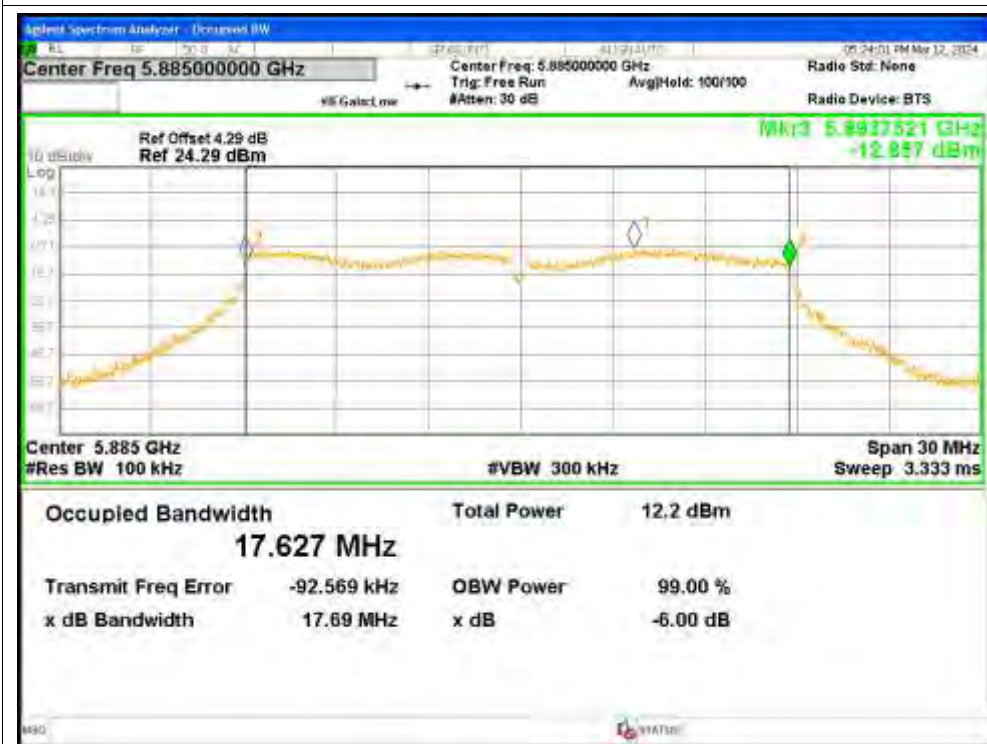


-6dB Bandwidth NVNT ac40 5835MHz Ant1

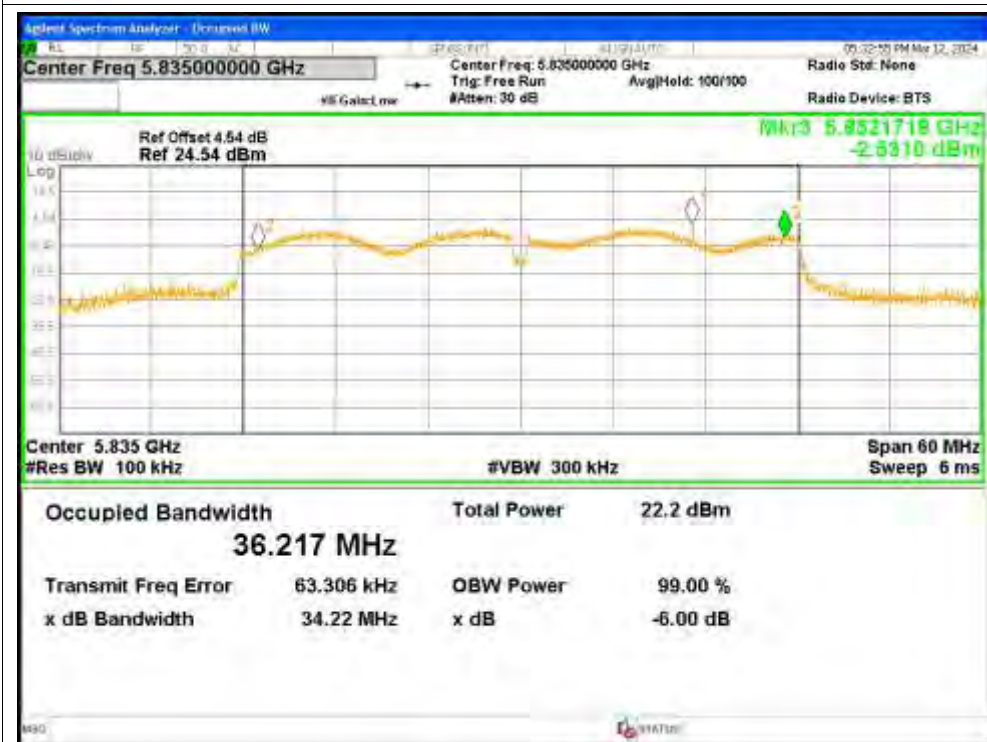


-6dB Bandwidth NVNT ac40 5835MHz Ant2

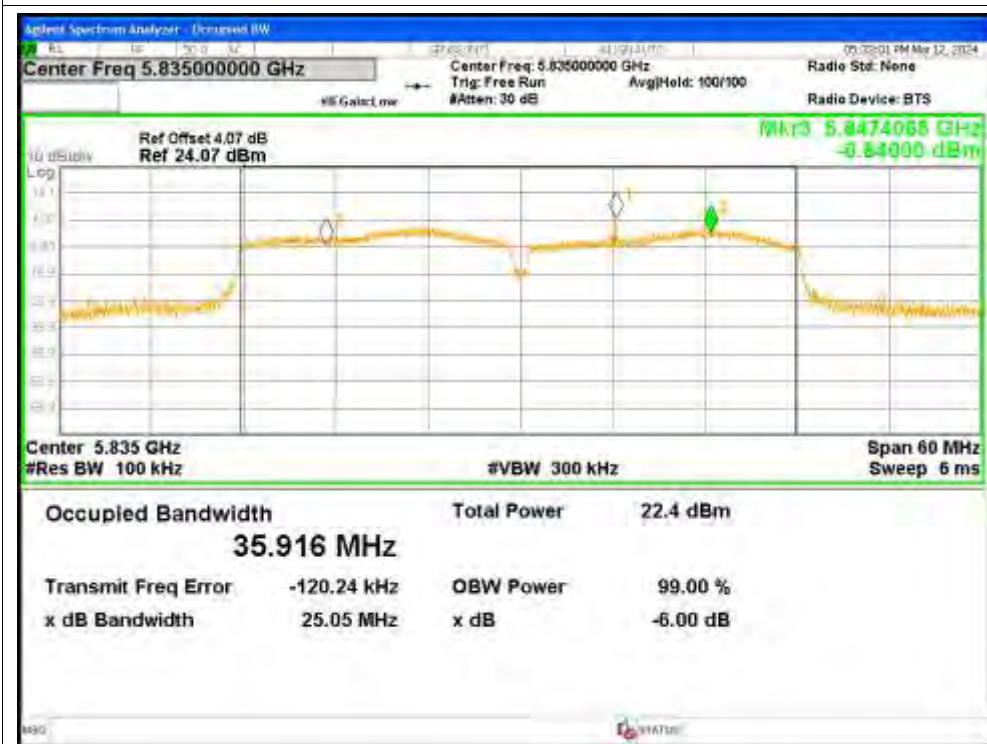


-6dB Bandwidth NVNT ac40 5835MHz Ant3

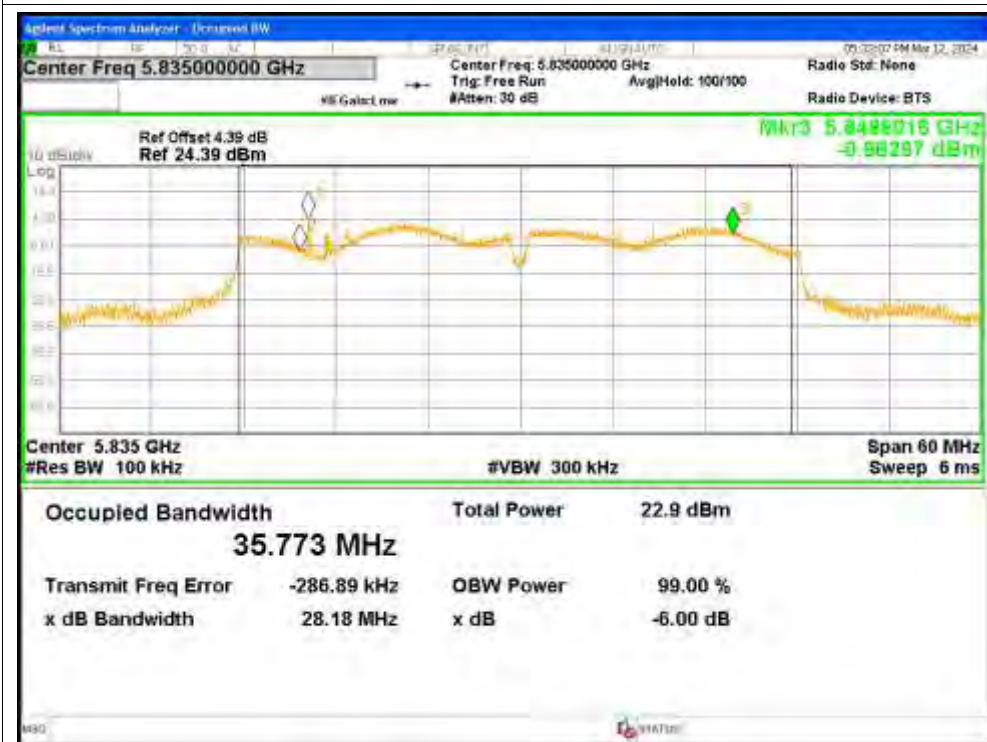

-6dB Bandwidth NVNT ac40 5835MHz Ant4

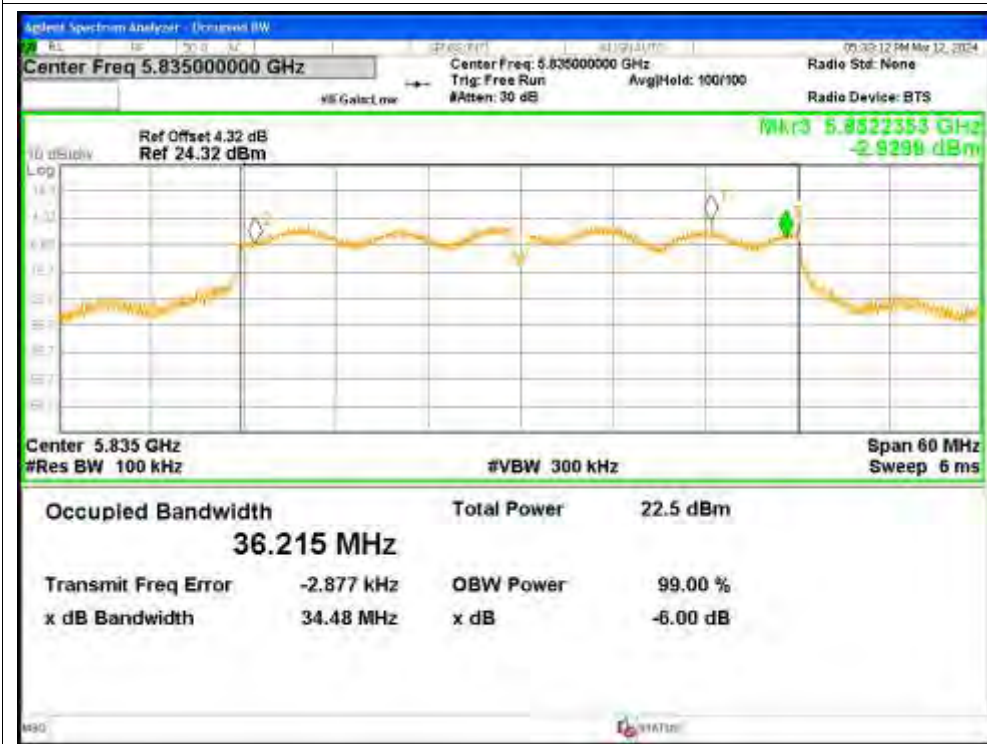


-6dB Bandwidth NVNT ac40 5875MHz Ant1

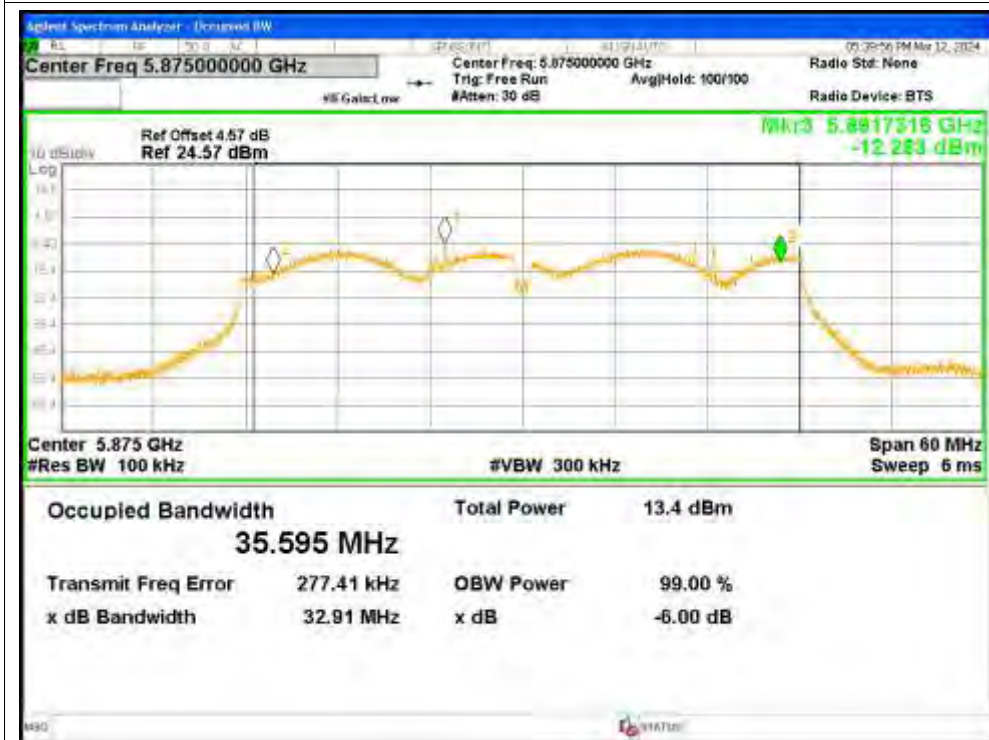


-6dB Bandwidth NVNT ac40 5875MHz Ant2




-6dB Bandwidth NVNT ac40 5875MHz Ant3

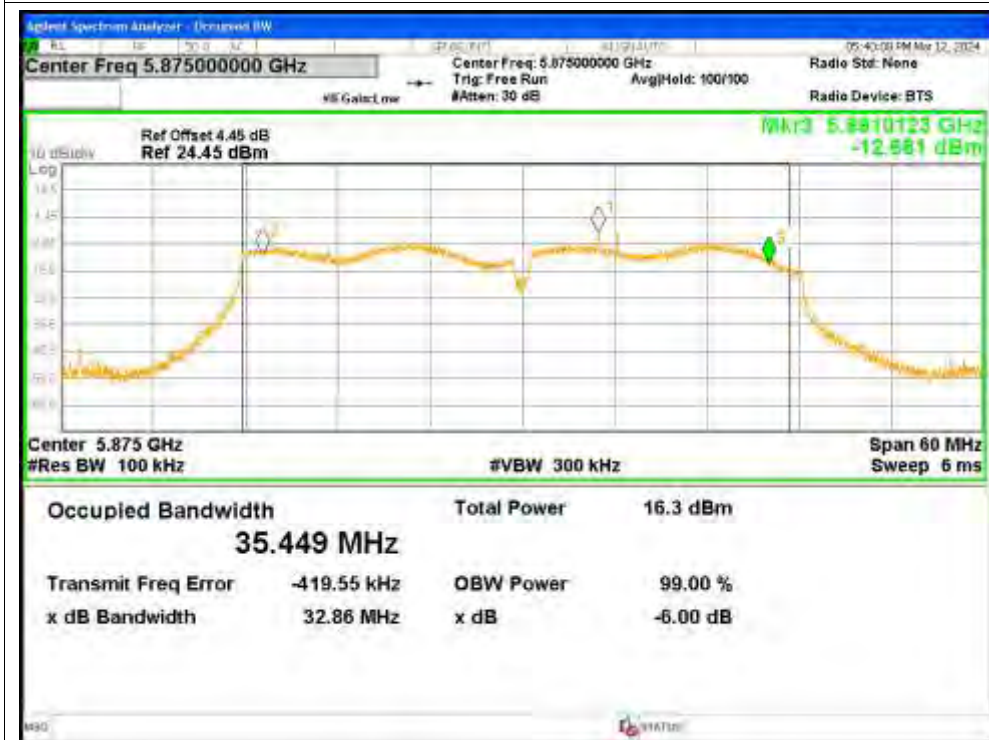


-6dB Bandwidth NVNT ac40 5875MHz Ant4

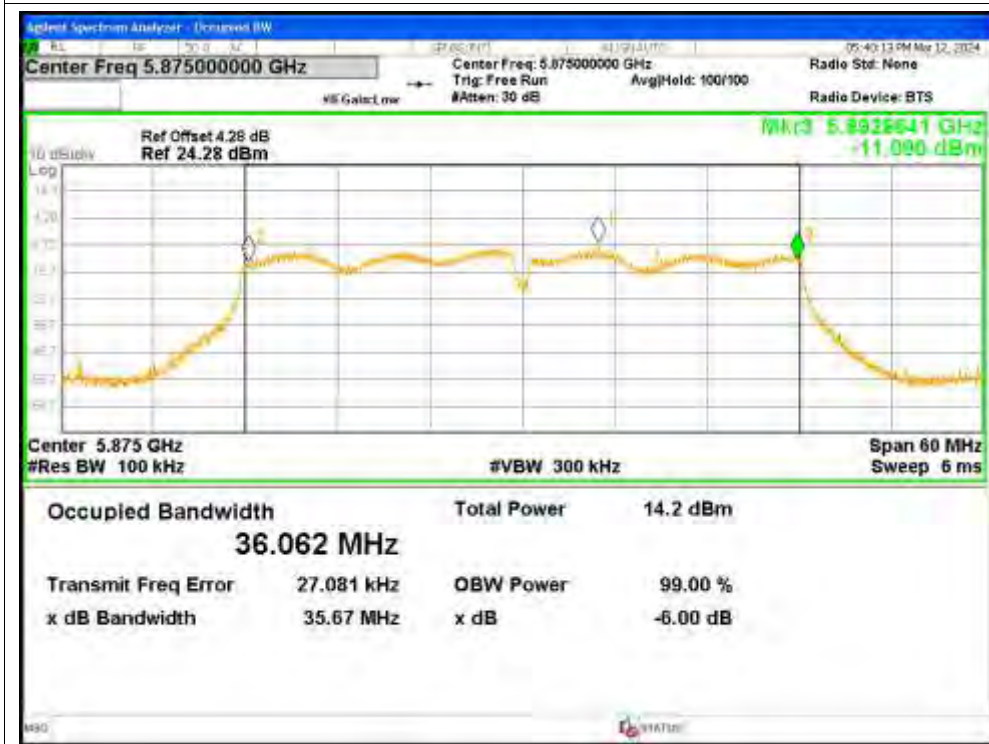


-6dB Bandwidth NVNT ac80 5855MHz Ant1

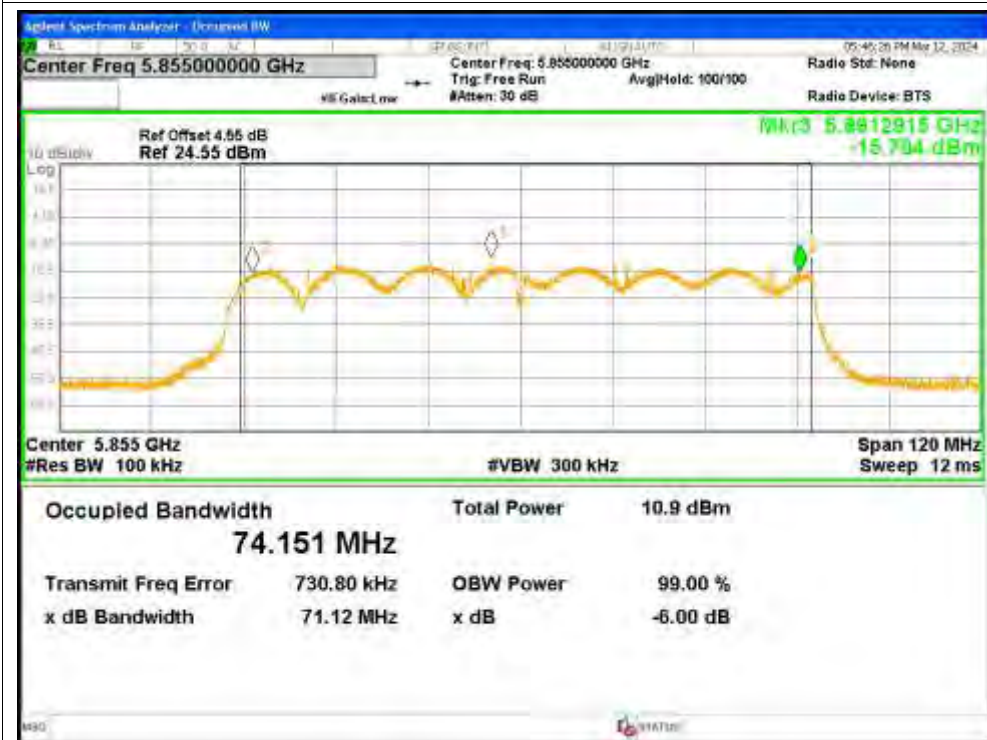


-6dB Bandwidth NVNT ac80 5855MHz Ant2

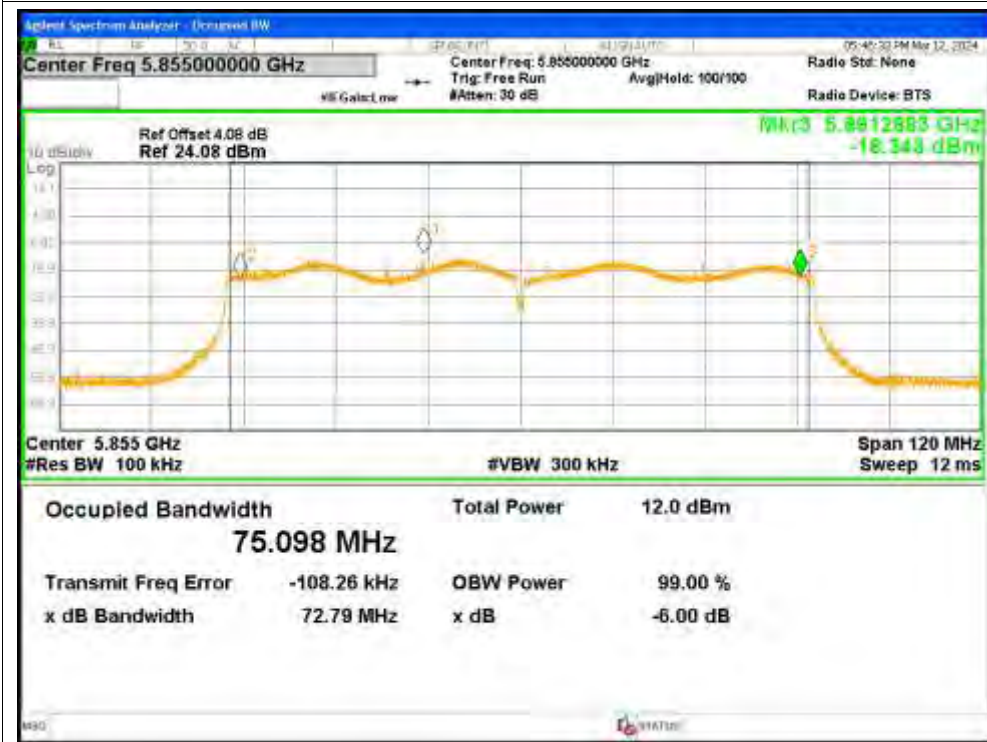


-6dB Bandwidth NVNT ac80 5855MHz Ant3

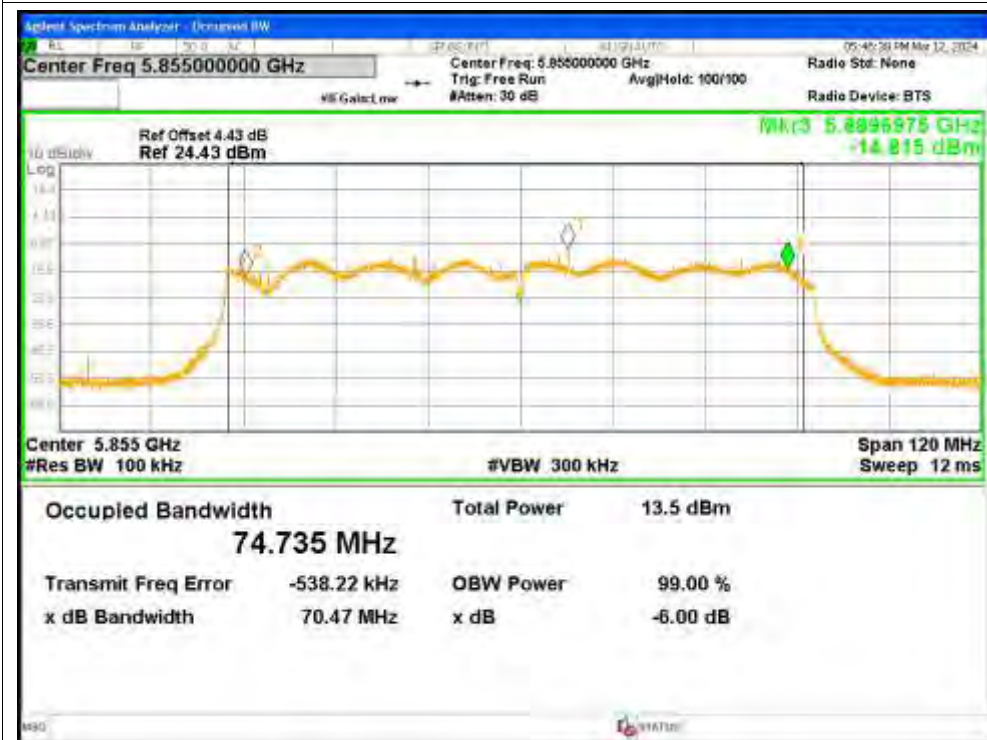


-6dB Bandwidth NVNT ac80 5855MHz Ant4

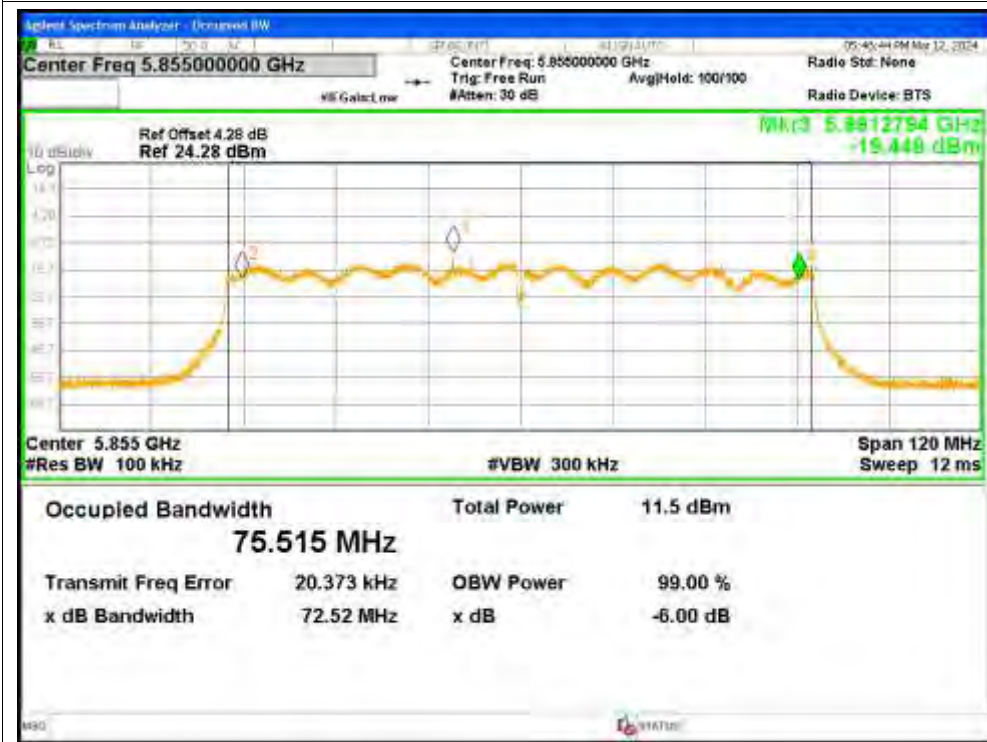

-6dB Bandwidth NVNT ax20 5845MHz Ant1

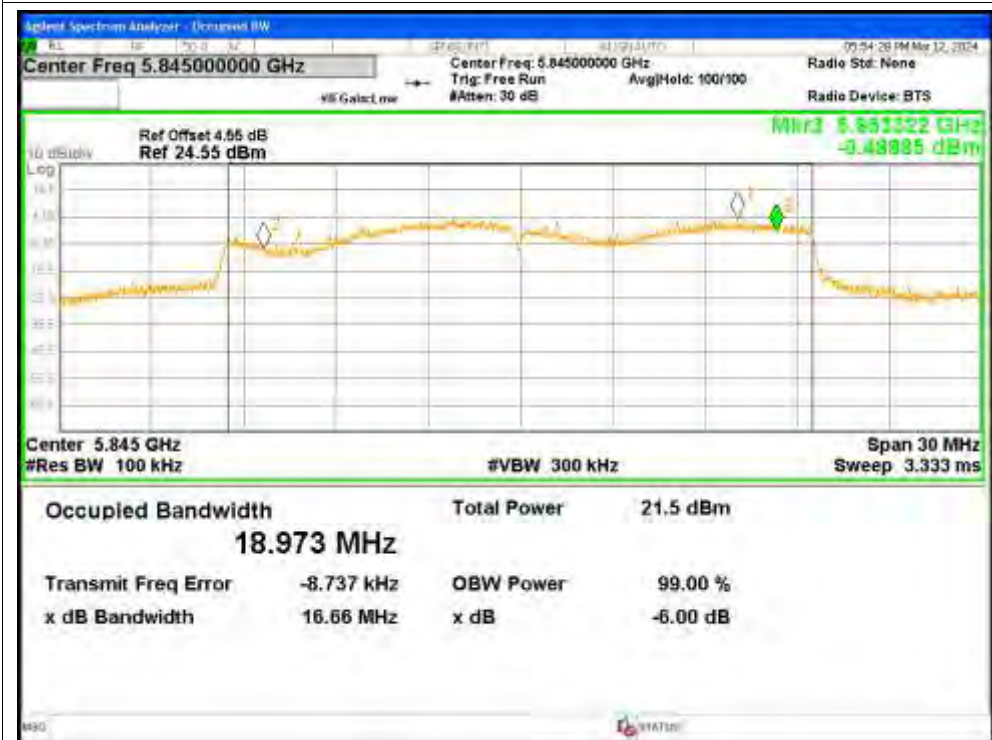


-6dB Bandwidth NVNT ax20 5845MHz Ant2

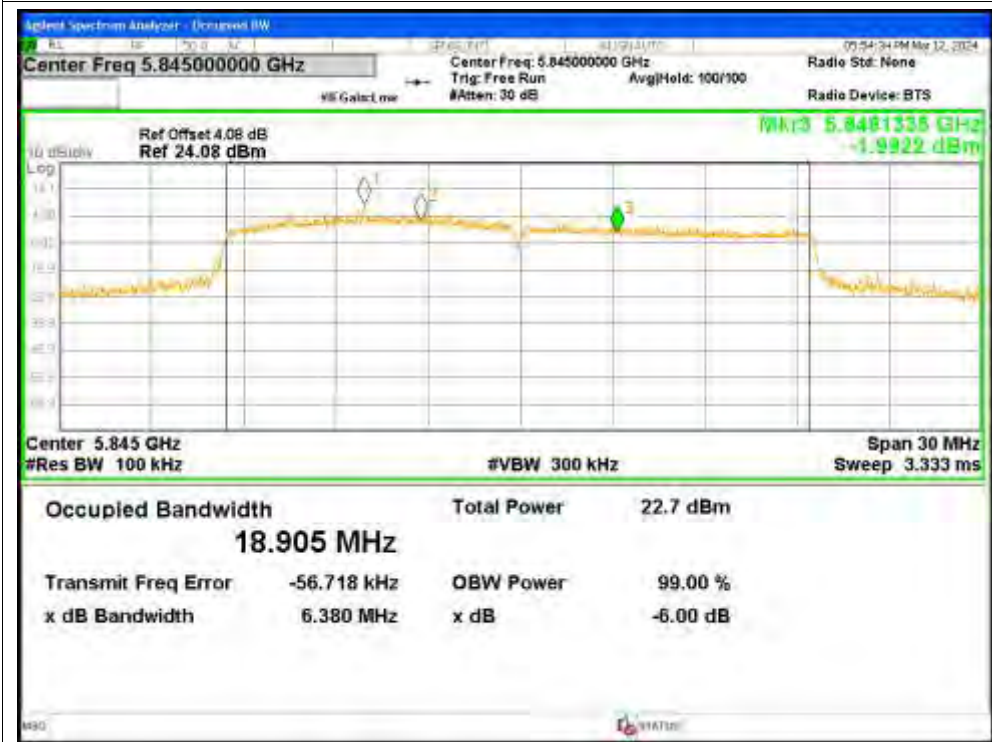

-6dB Bandwidth NVNT ax20 5845MHz Ant3




-6dB Bandwidth NVNT ax20 5845MHz Ant4

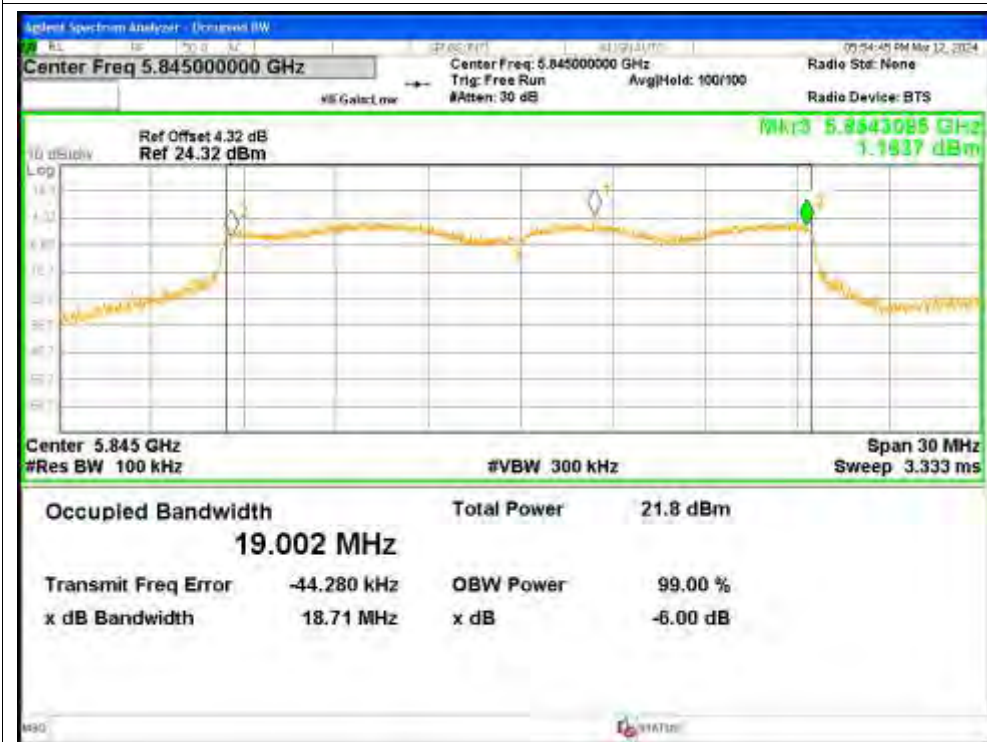

-6dB Bandwidth NVNT ax20 5865MHz Ant1




-6dB Bandwidth NVNT ax20 5865MHz Ant2

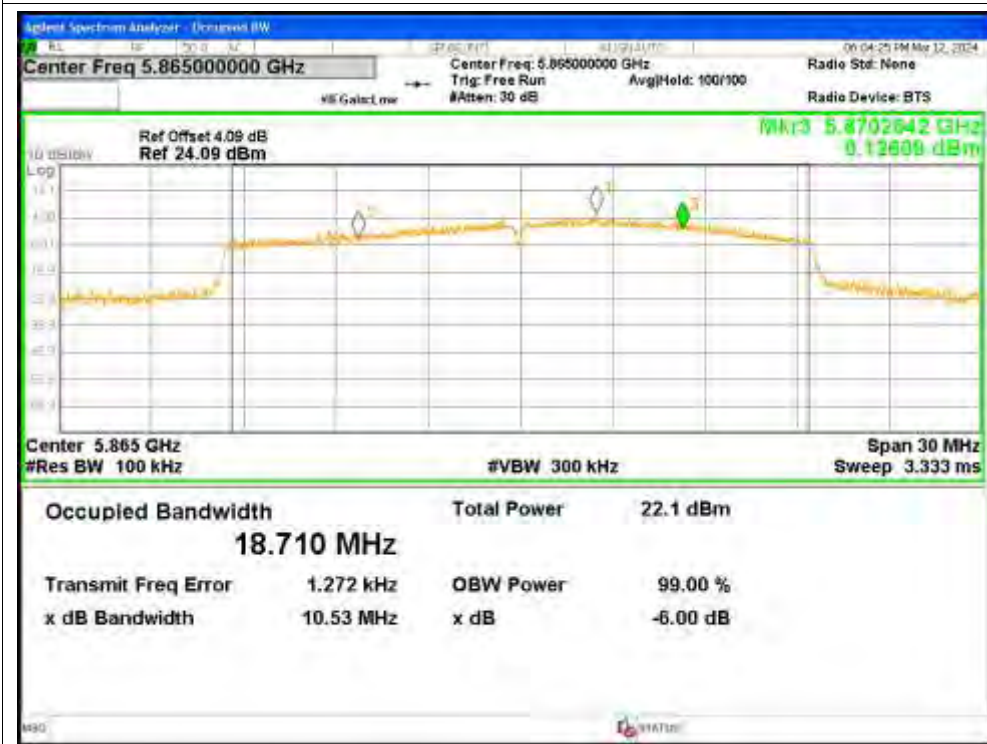

-6dB Bandwidth NVNT ax20 5865MHz Ant3




-6dB Bandwidth NVNT ax20 5865MHz Ant4

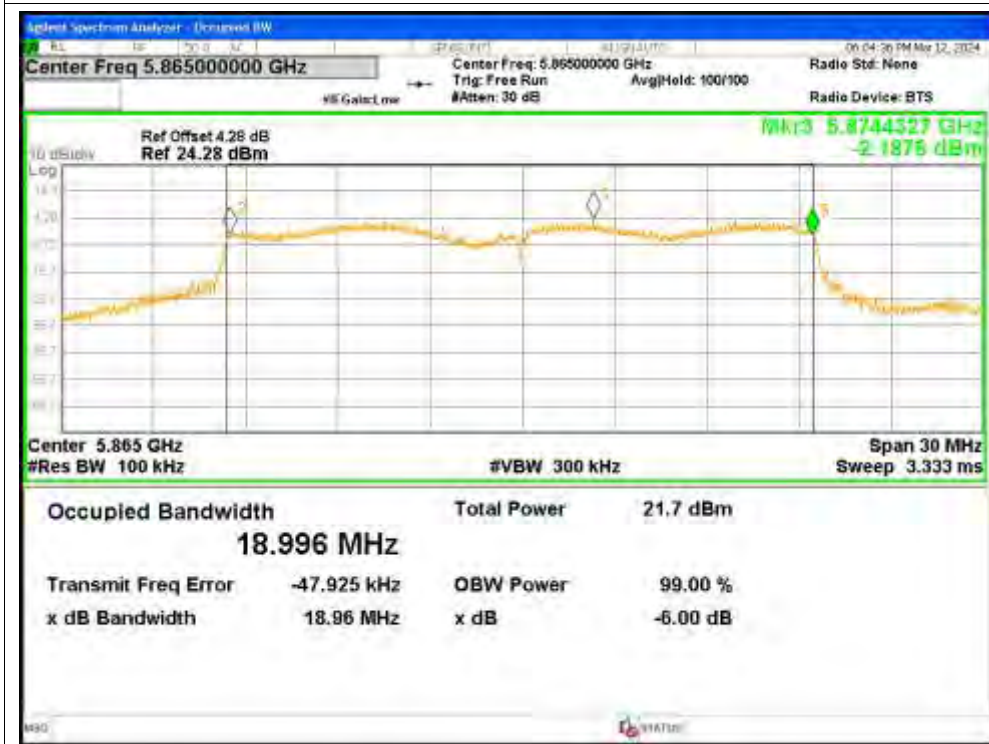


-6dB Bandwidth NVNT ax20 5885MHz Ant1




-6dB Bandwidth NVNT ax20 5885MHz Ant2

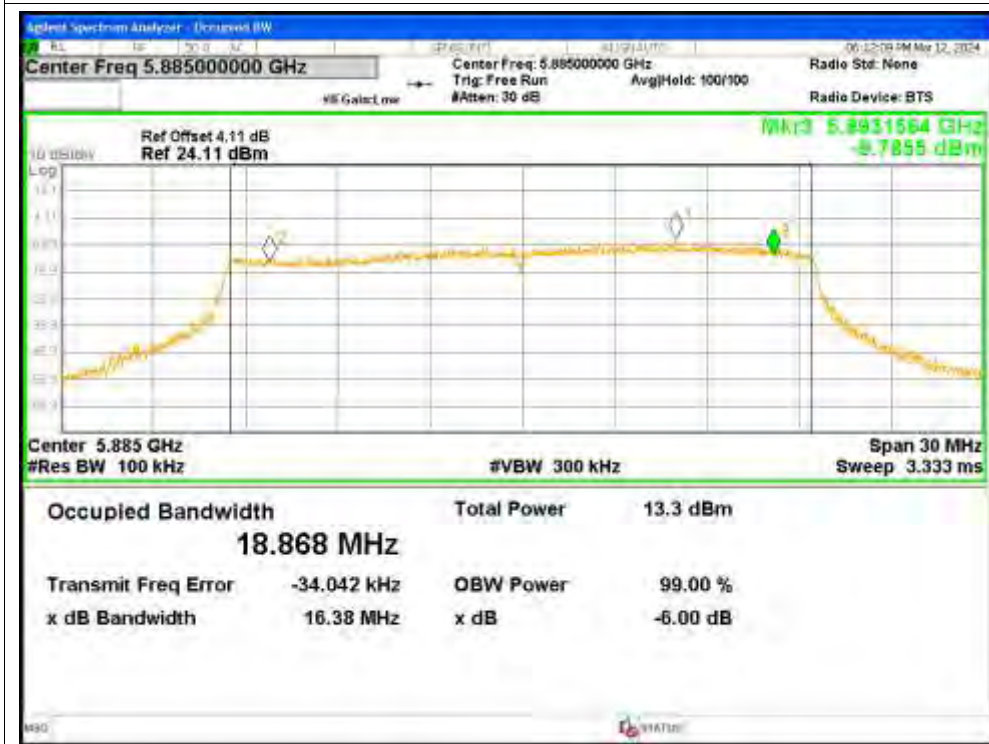


-6dB Bandwidth NVNT ax20 5885MHz Ant3

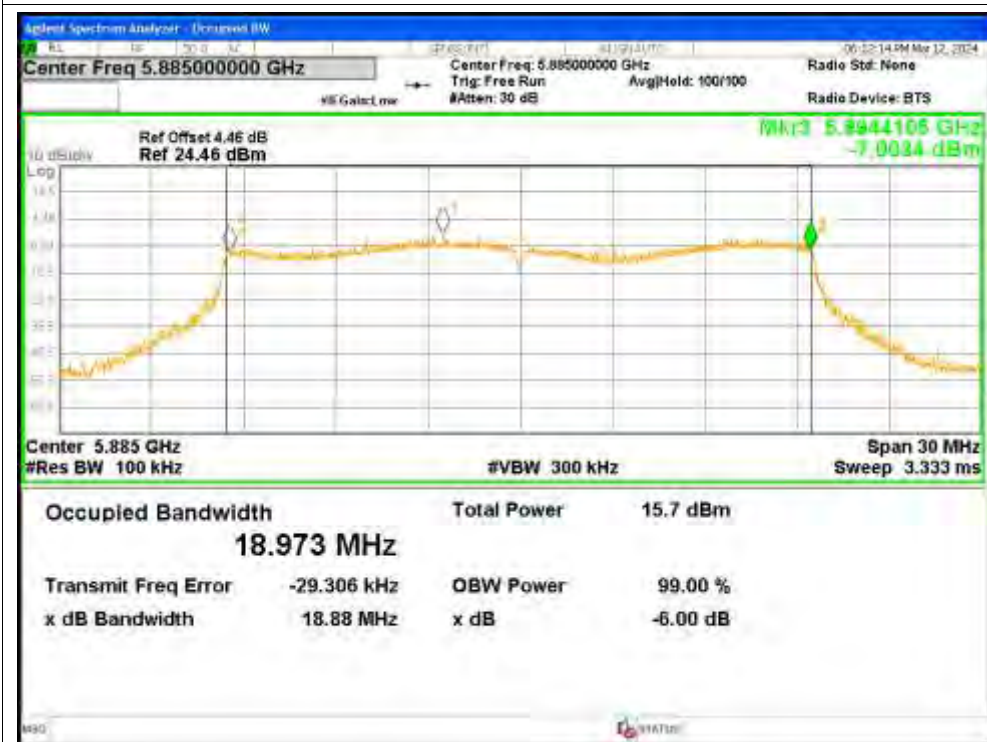


-6dB Bandwidth NVNT ax20 5885MHz Ant4

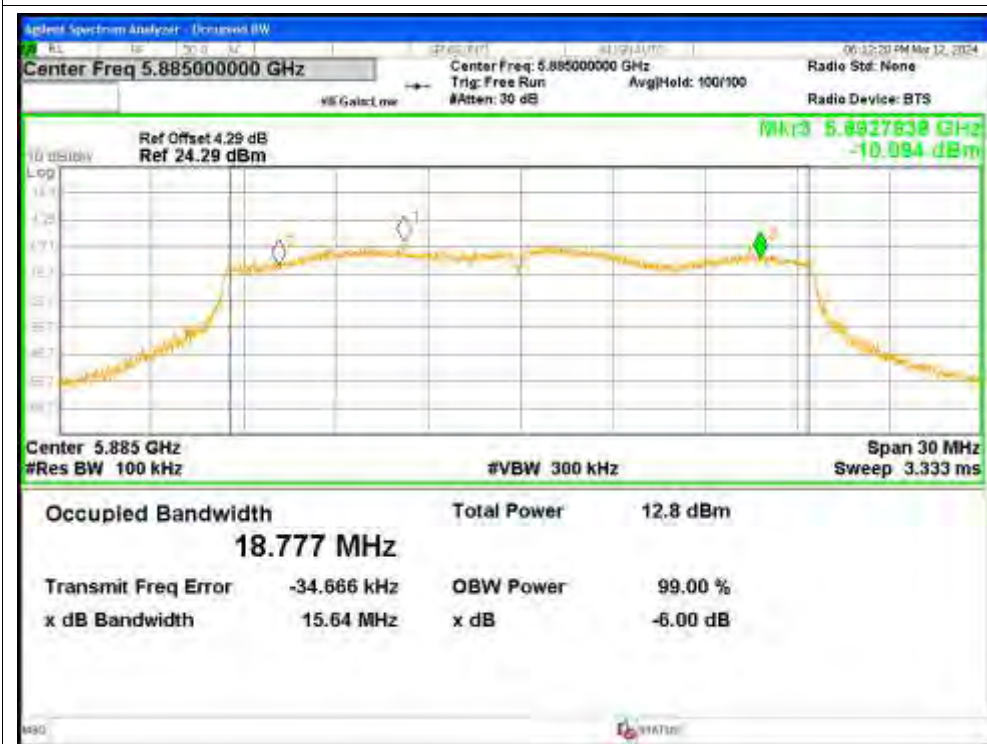


-6dB Bandwidth NVNT ax40 5835MHz Ant1

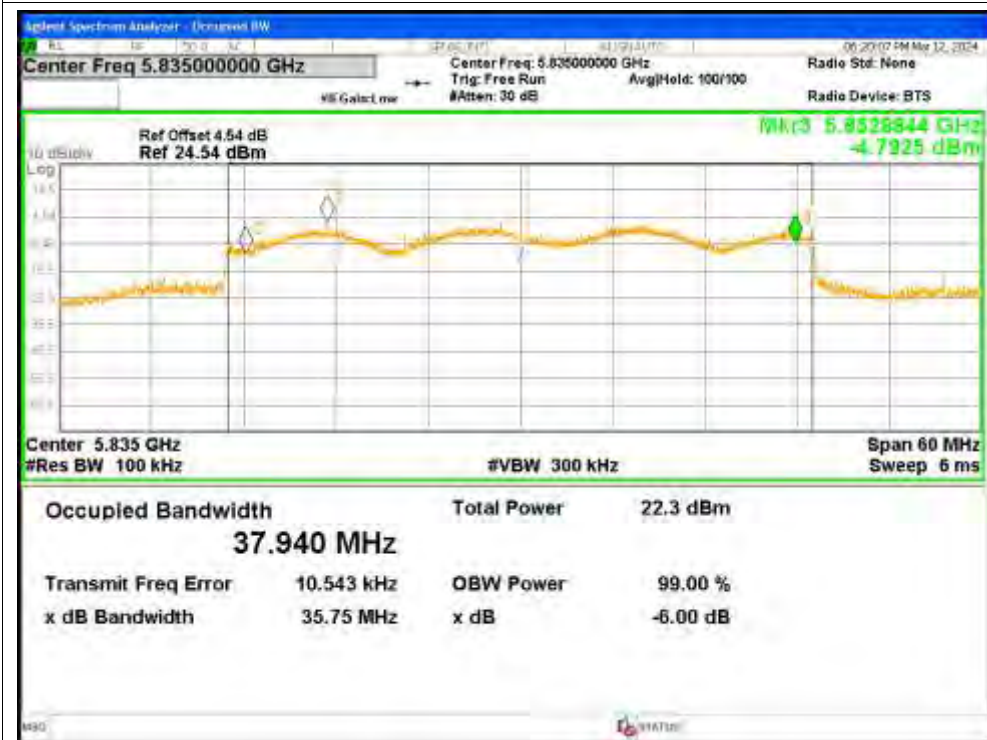


-6dB Bandwidth NVNT ax40 5835MHz Ant2

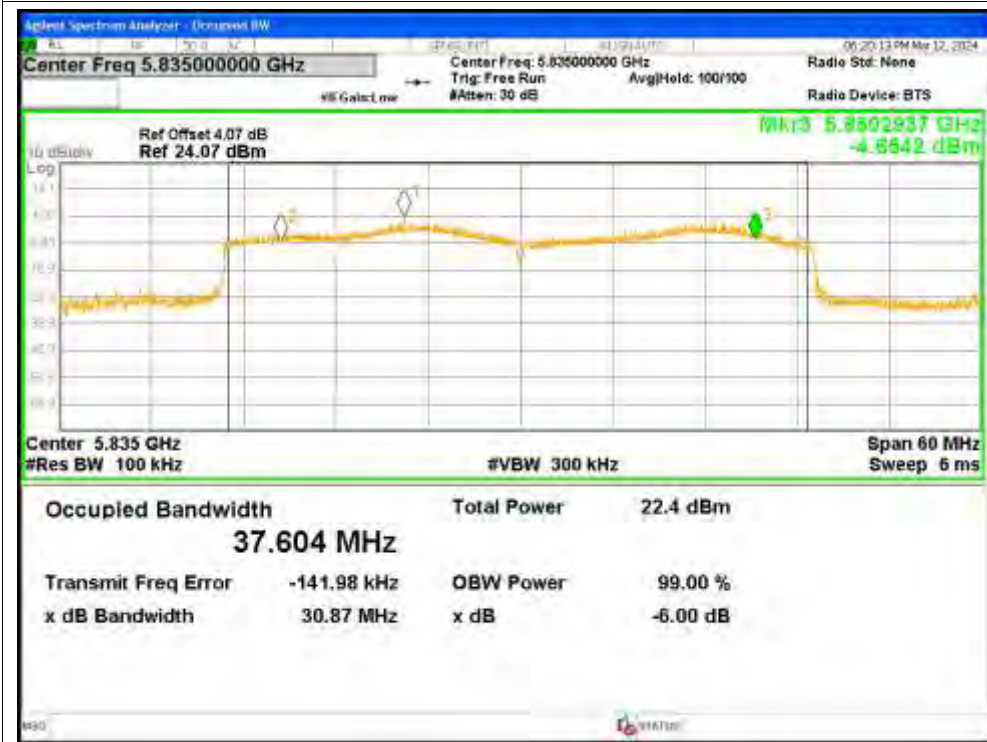


-6dB Bandwidth NVNT ax40 5835MHz Ant3

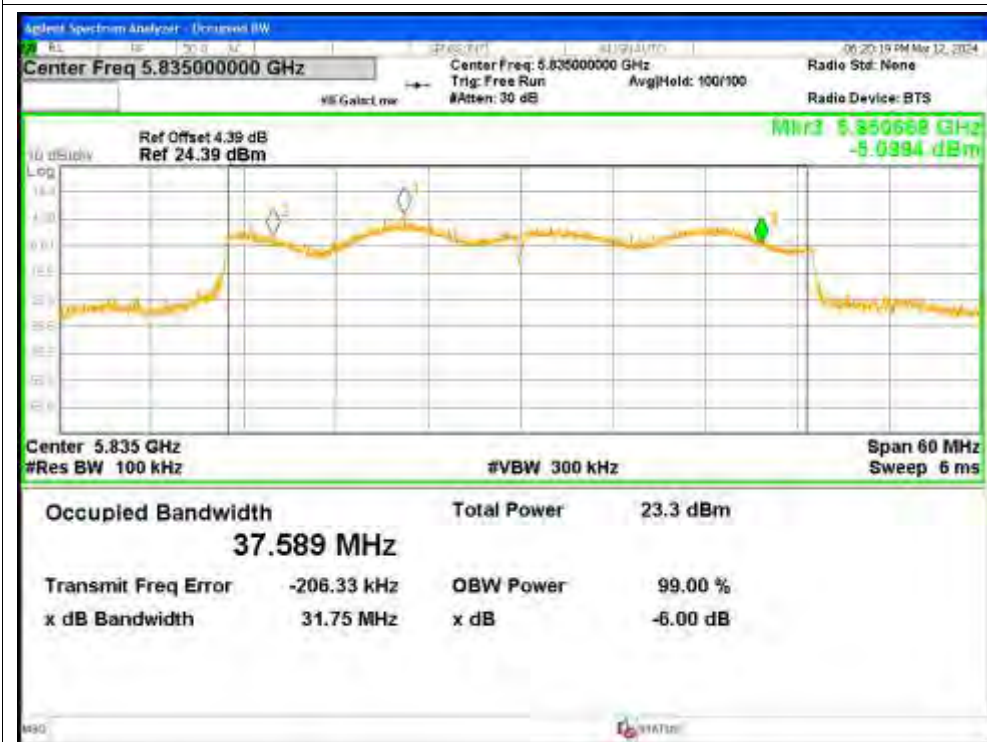

-6dB Bandwidth NVNT ax40 5835MHz Ant4

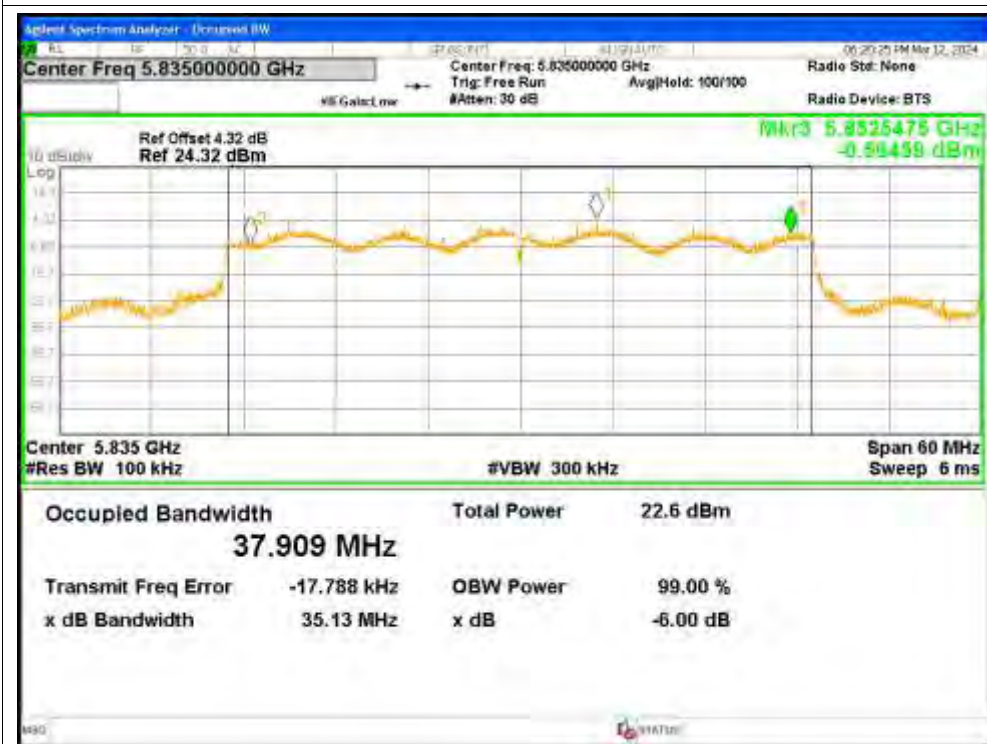

-6dB Bandwidth NVNT ax40 5875MHz Ant1

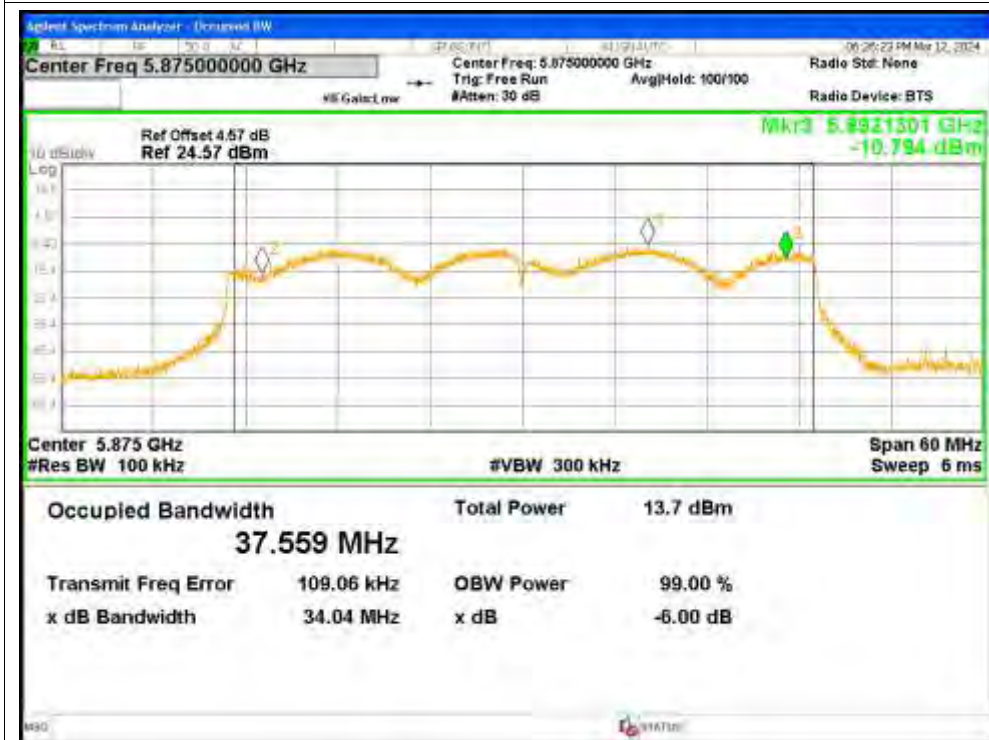


-6dB Bandwidth NVNT ax40 5875MHz Ant2




-6dB Bandwidth NVNT ax40 5875MHz Ant3




-6dB Bandwidth NVNT ax40 5875MHz Ant4

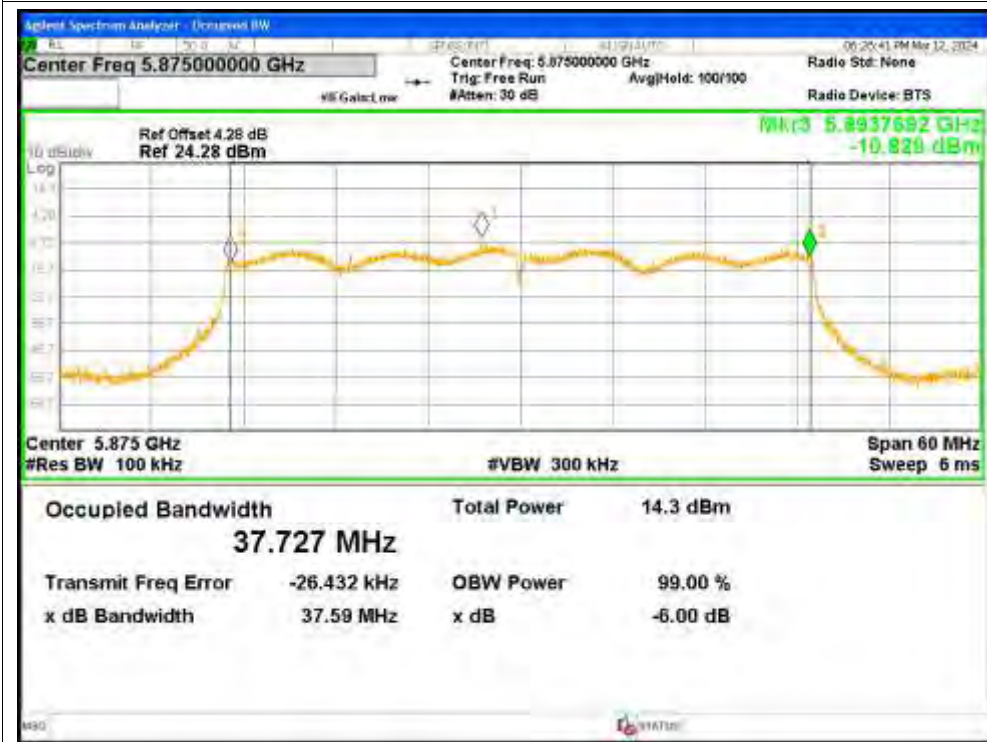


-6dB Bandwidth NVNT ax80 5855MHz Ant1

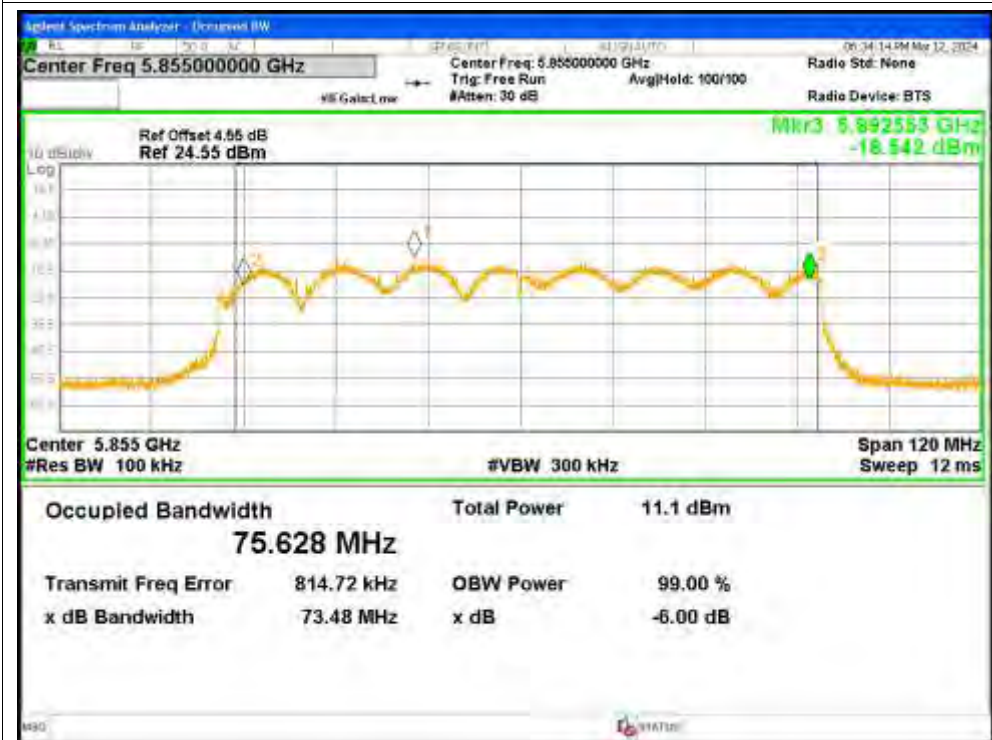


-6dB Bandwidth NVNT ax80 5855MHz Ant2

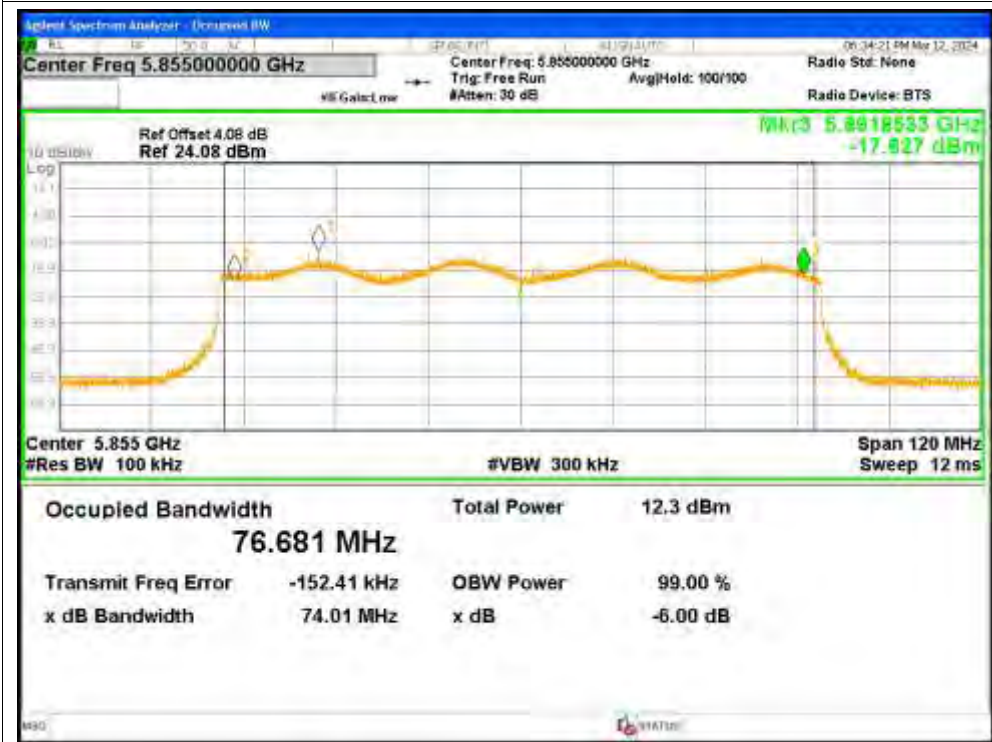

-6dB Bandwidth NVNT ax80 5855MHz Ant3

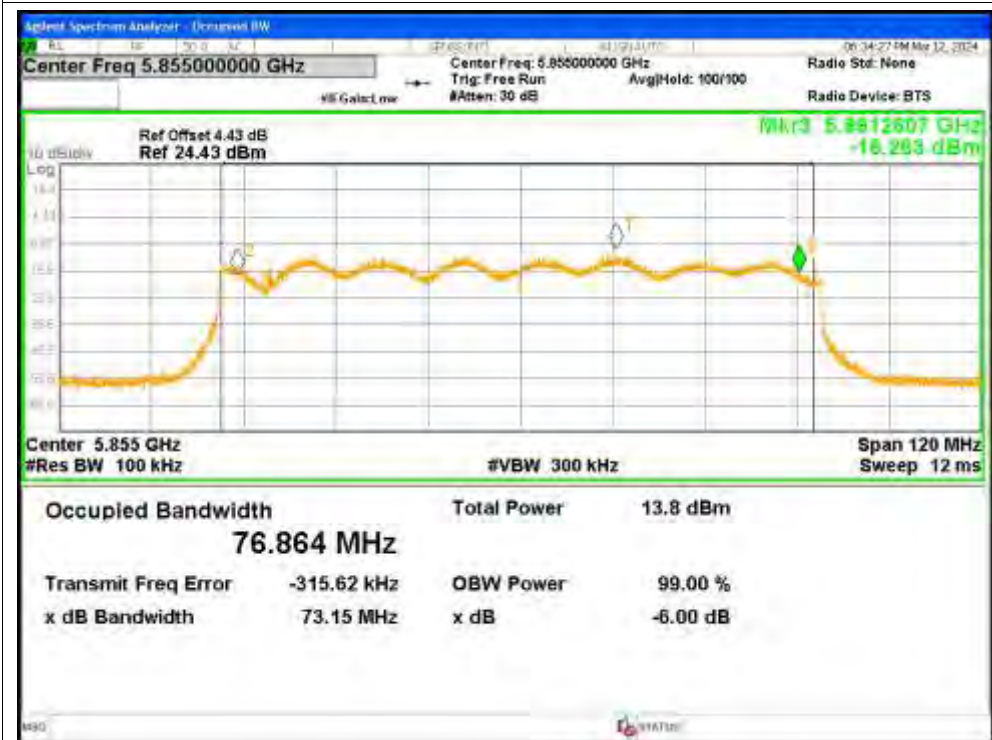

-6dB Bandwidth NVNT ax80 5855MHz Ant4

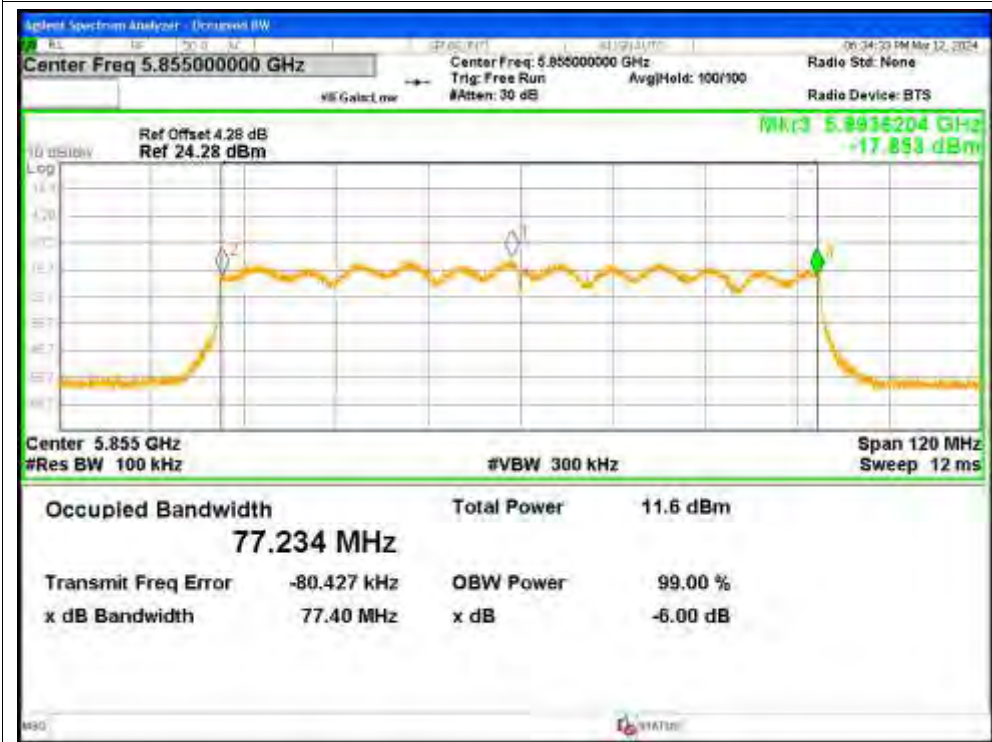


-6dB Bandwidth NVNT n20 5845MHz Ant1




-6dB Bandwidth NVNT n20 5845MHz Ant2



-6dB Bandwidth NVNT n20 5845MHz Ant3

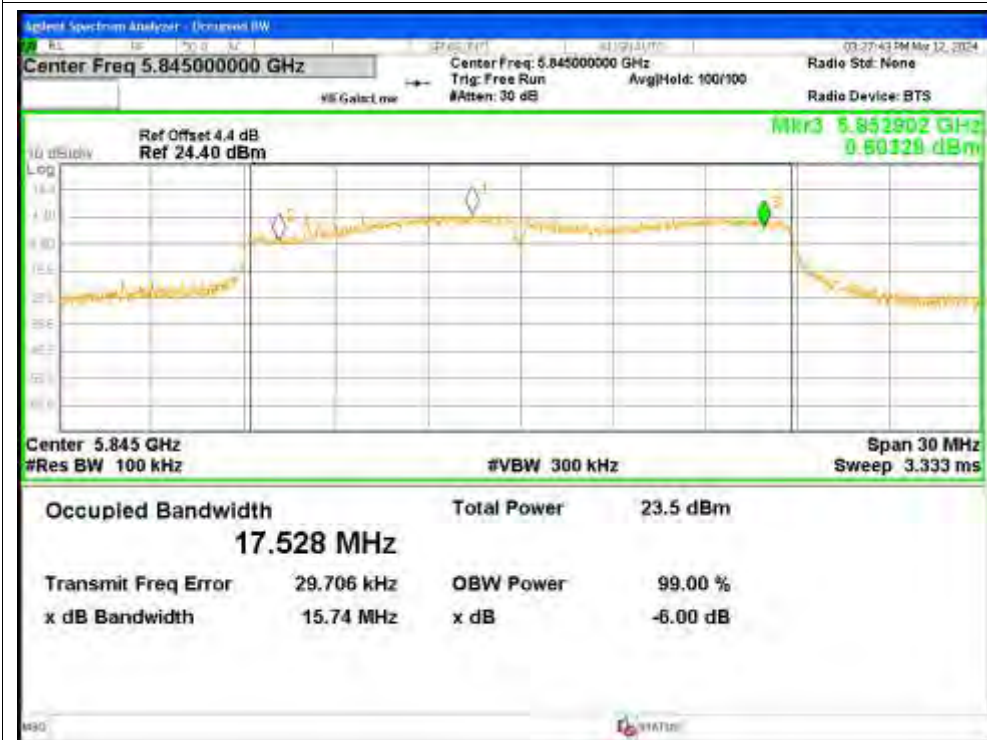


-6dB Bandwidth NVNT n20 5845MHz Ant4

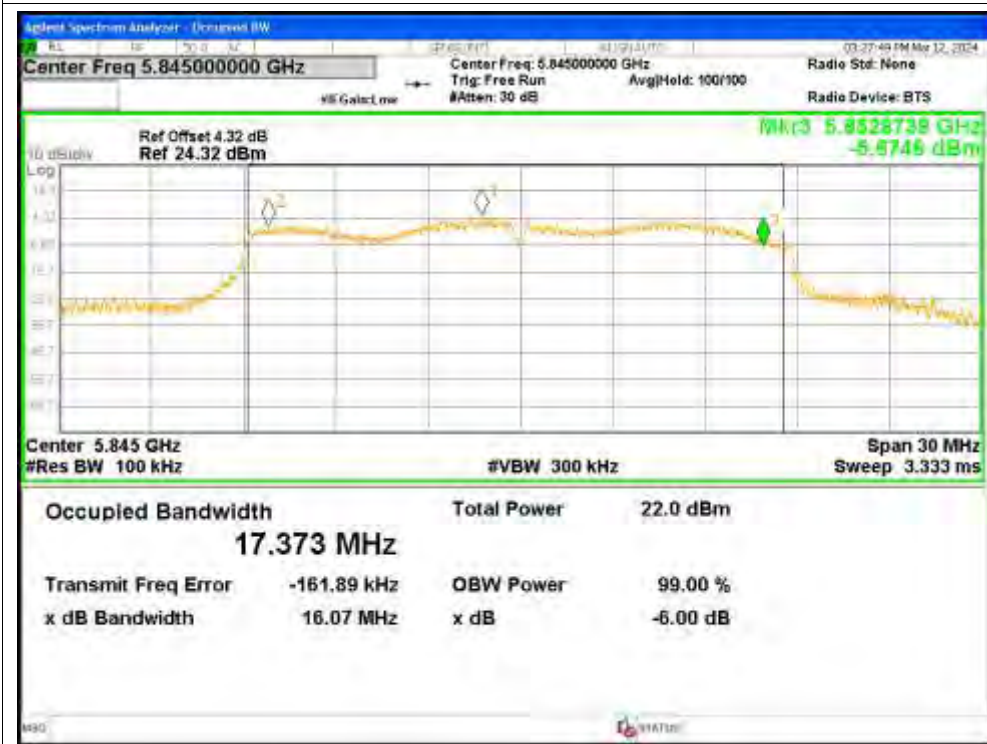

-6dB Bandwidth NVNT n20 5865MHz Ant1




-6dB Bandwidth NVNT n20 5865MHz Ant2

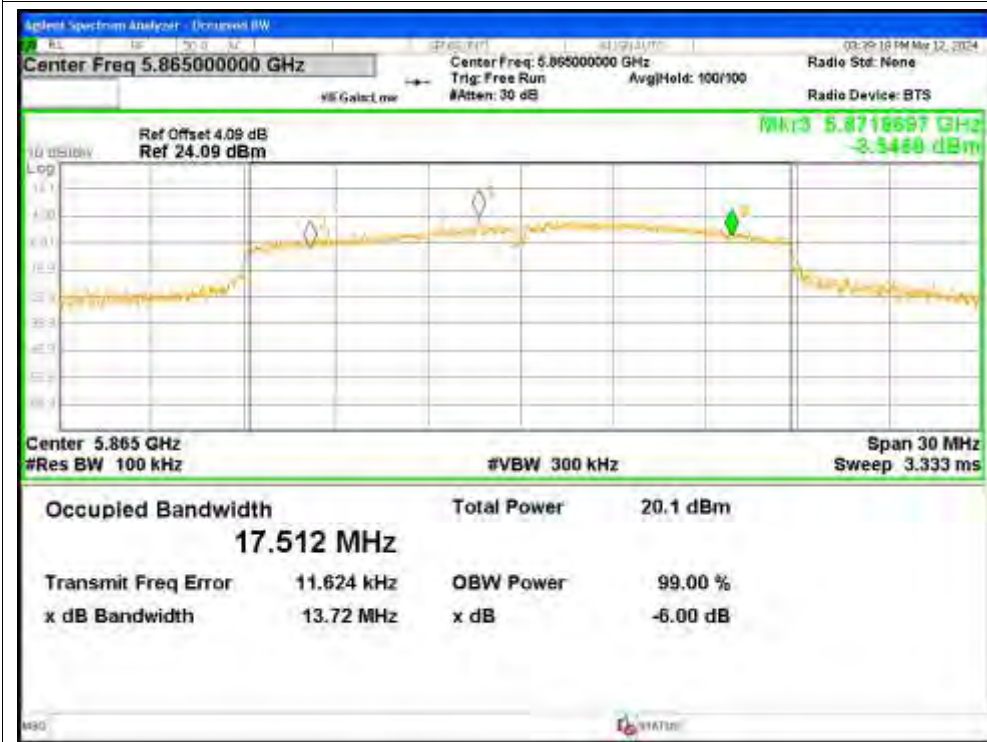

-6dB Bandwidth NVNT n20 5865MHz Ant3




-6dB Bandwidth NVNT n20 5865MHz Ant4

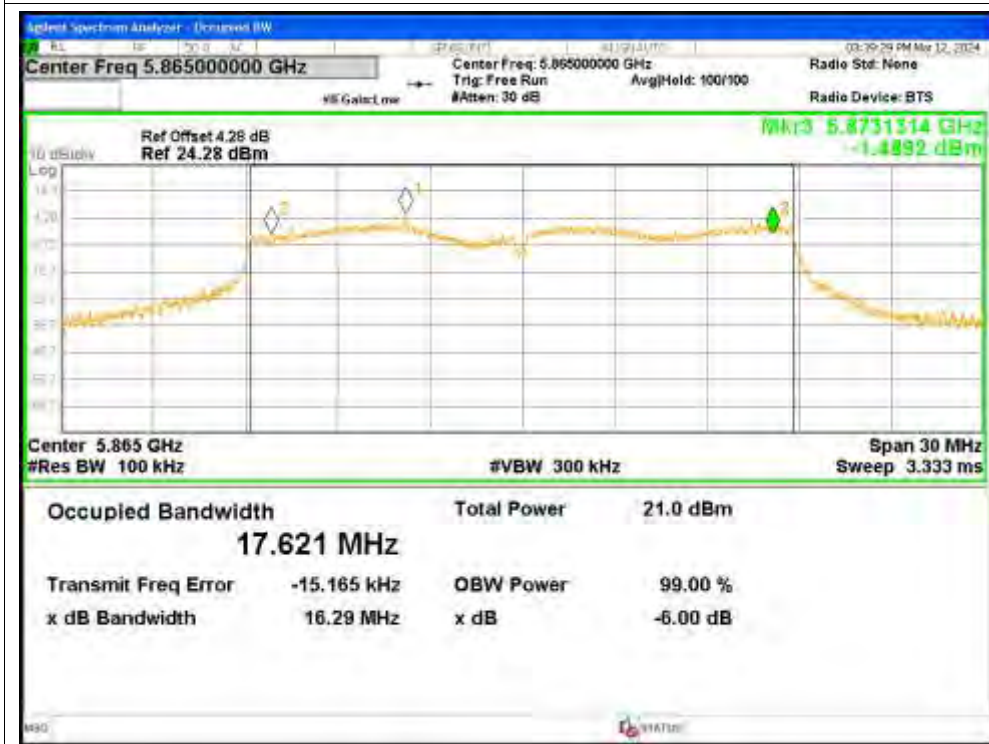

-6dB Bandwidth NVNT n20 5885MHz Ant1




-6dB Bandwidth NVNT n20 5885MHz Ant2

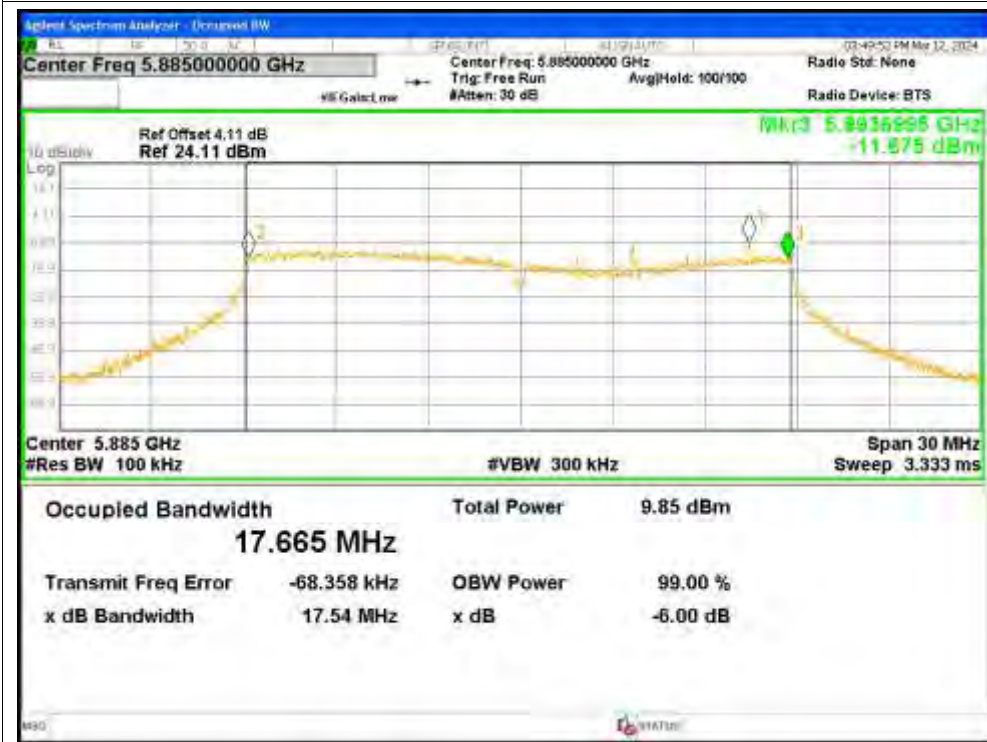


-6dB Bandwidth NVNT n20 5885MHz Ant3




-6dB Bandwidth NVNT n20 5885MHz Ant4

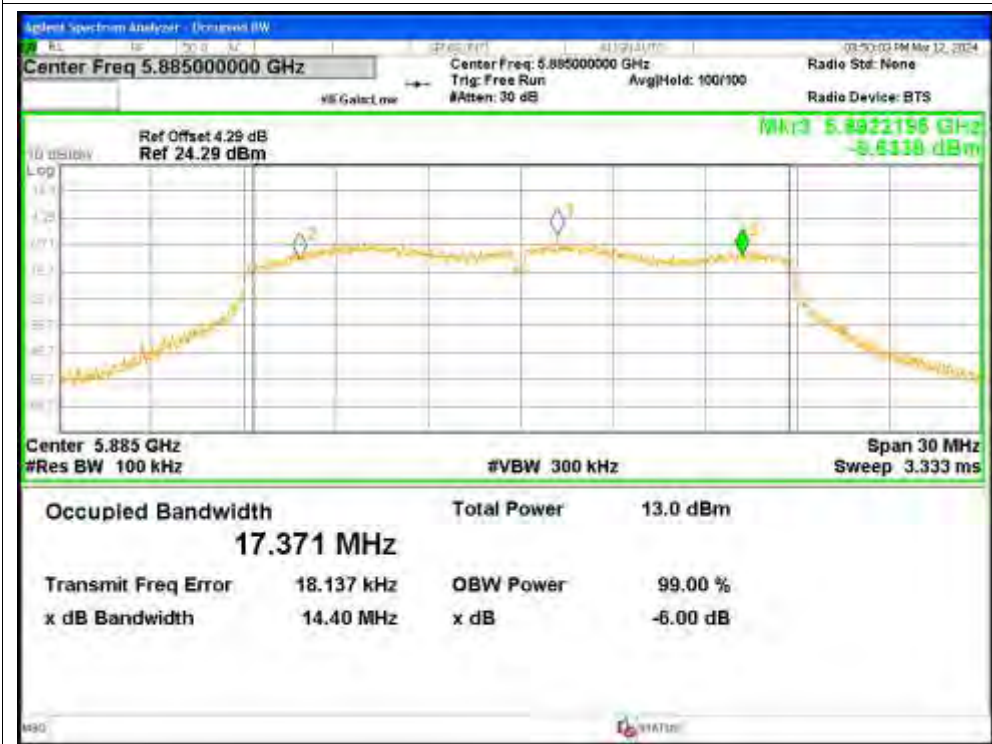

-6dB Bandwidth NVNT n40 5835MHz Ant1

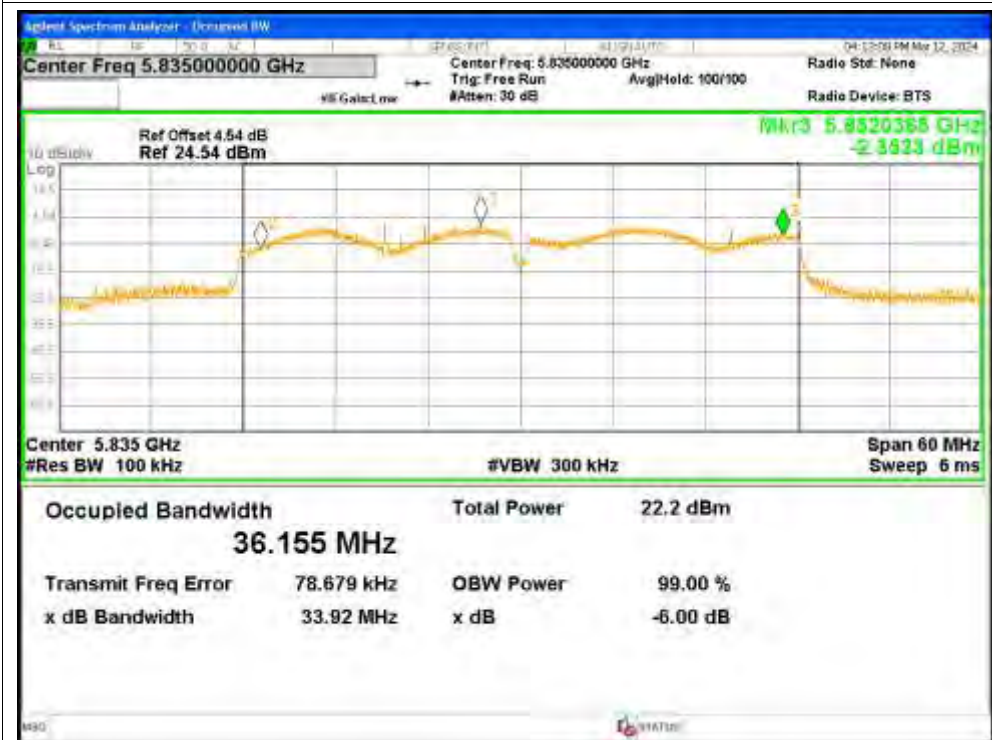


-6dB Bandwidth NVNT n40 5835MHz Ant2

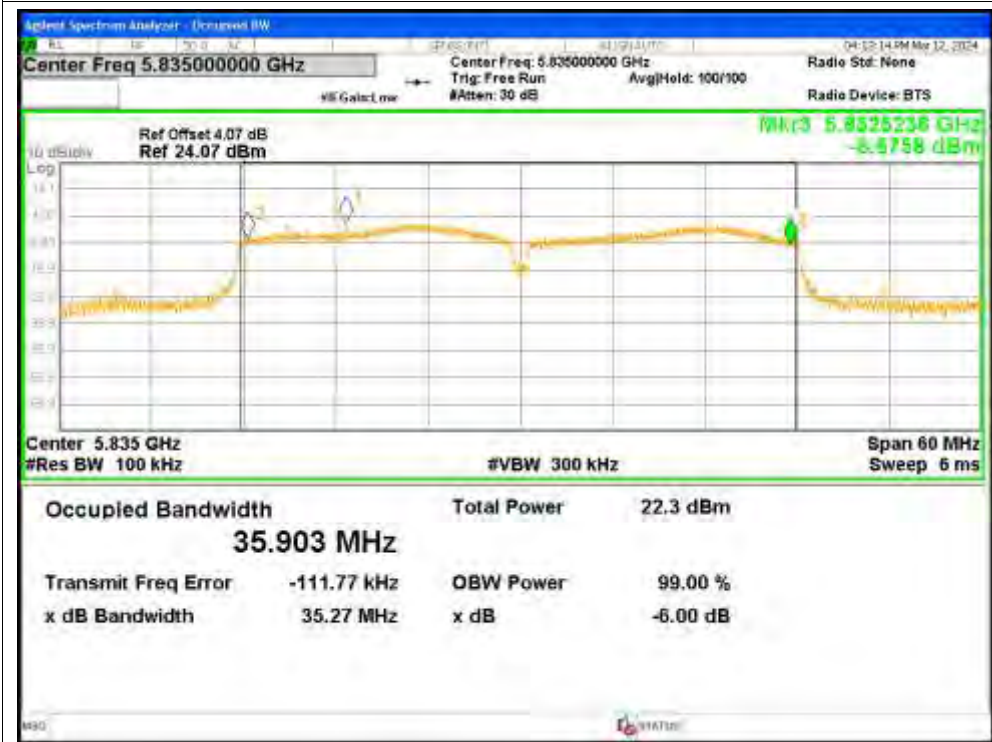


-6dB Bandwidth NVNT n40 5835MHz Ant3




-6dB Bandwidth NVNT n40 5835MHz Ant4

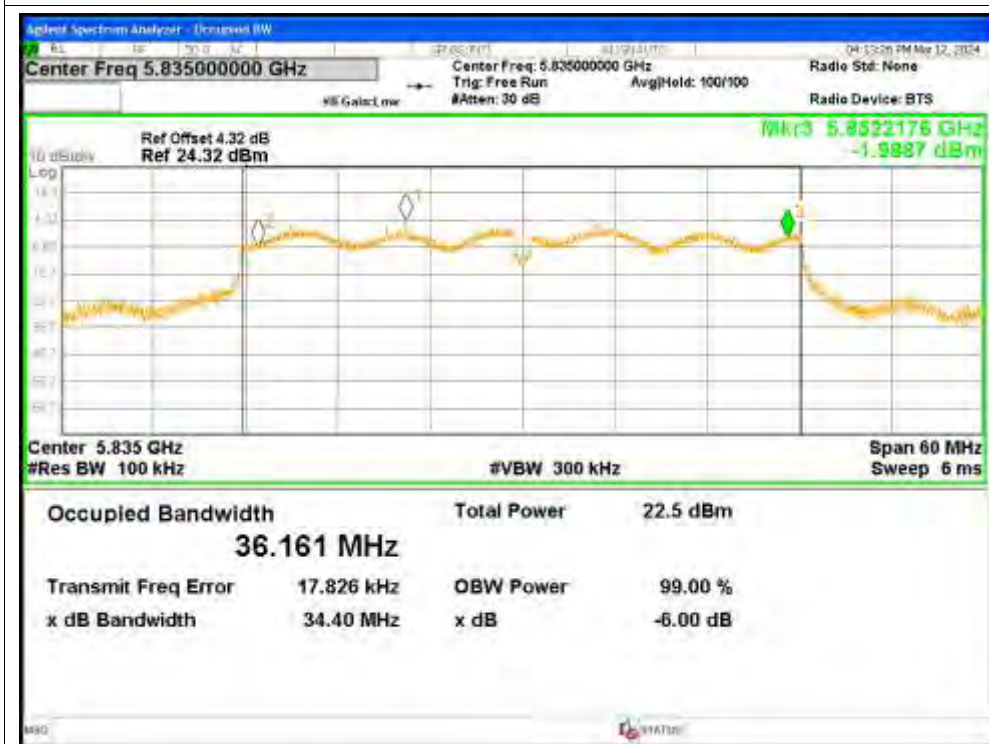


-6dB Bandwidth NVNT n40 5875MHz Ant1

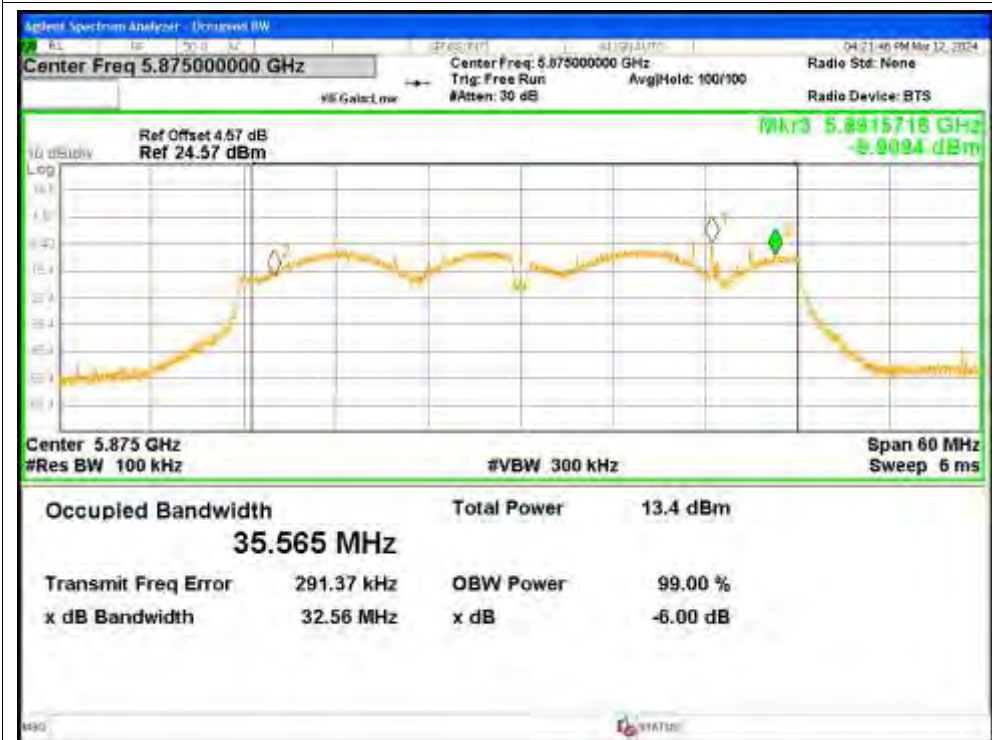


-6dB Bandwidth NVNT n40 5875MHz Ant2

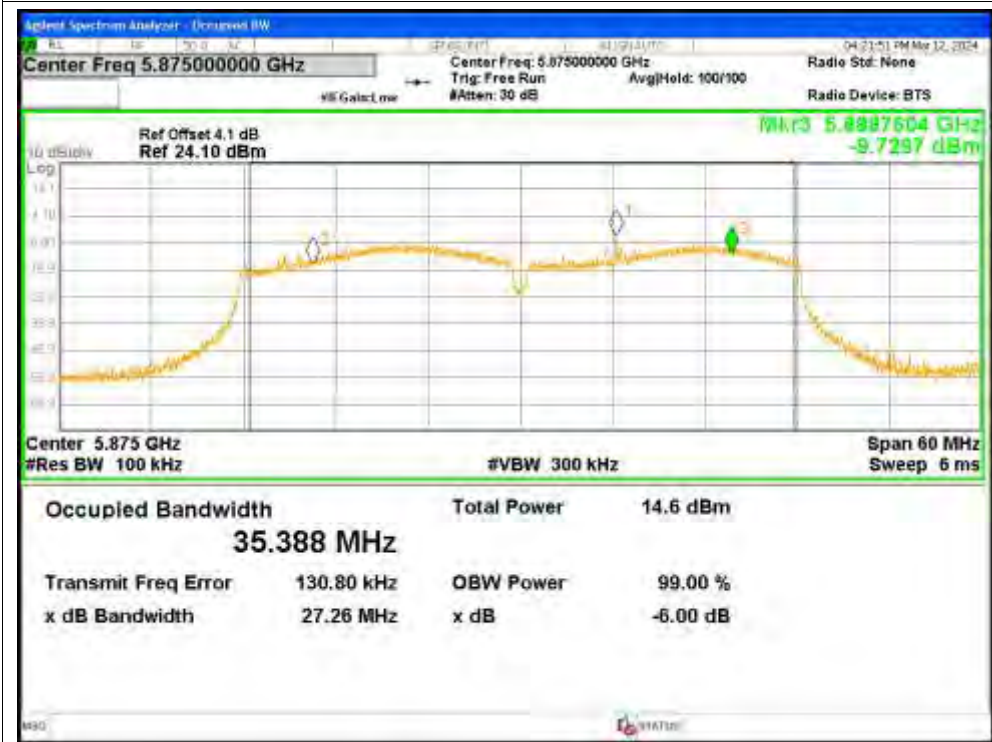

-6dB Bandwidth NVNT n40 5875MHz Ant3

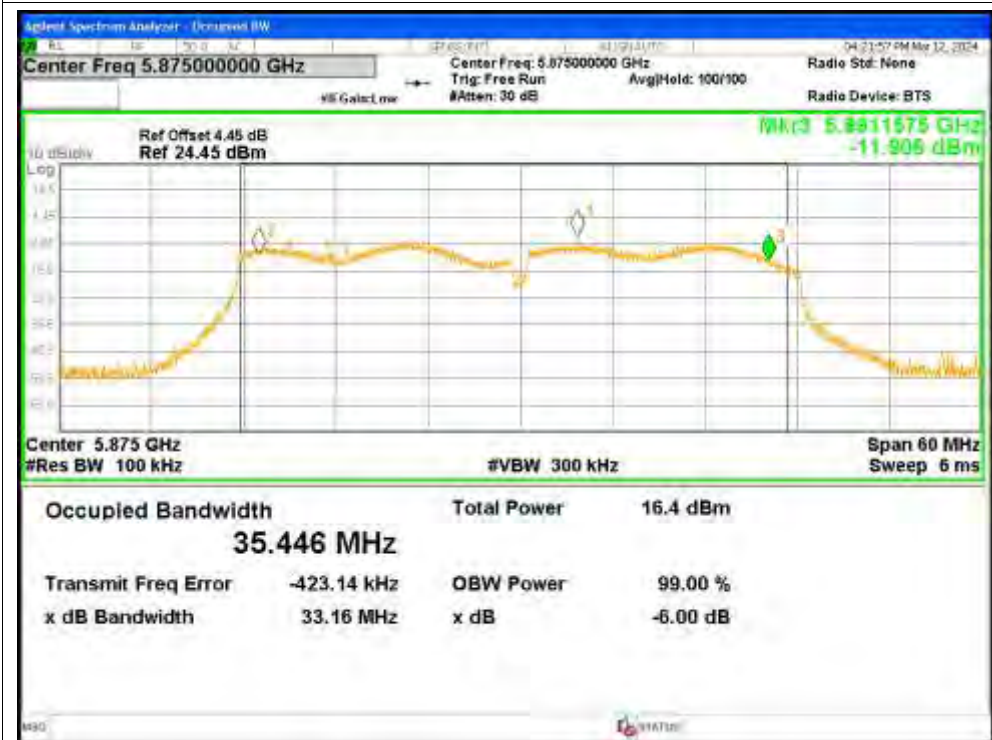

-6dB Bandwidth NVNT n40 5875MHz Ant4

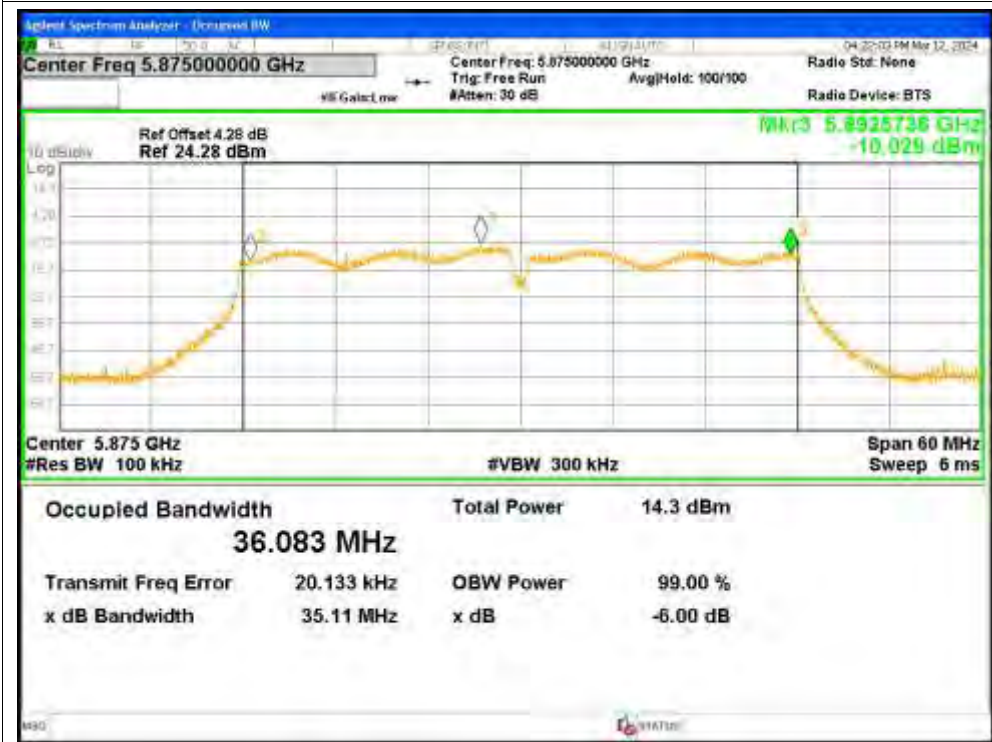


4. Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5845	Ant1	16.4689
NVNT	a	5845	Ant2	16.5797
NVNT	a	5845	Ant3	16.5264
NVNT	a	5845	Ant4	16.3844
NVNT	a	5865	Ant1	16.4468
NVNT	a	5865	Ant2	16.9618
NVNT	a	5865	Ant3	16.4915
NVNT	a	5865	Ant4	16.4645
NVNT	a	5885	Ant1	16.3683
NVNT	a	5885	Ant2	16.1029
NVNT	a	5885	Ant3	16.2263
NVNT	a	5885	Ant4	16.3748
NVNT	ac20	5845	Ant1	17.6152
NVNT	ac20	5845	Ant2	17.7455
NVNT	ac20	5845	Ant3	17.723
NVNT	ac20	5845	Ant4	17.5225
NVNT	ac20	5865	Ant1	17.6873
NVNT	ac20	5865	Ant2	17.4915
NVNT	ac20	5865	Ant3	17.6785
NVNT	ac20	5865	Ant4	17.6576
NVNT	ac20	5885	Ant1	17.0155
NVNT	ac20	5885	Ant2	17.5742
NVNT	ac20	5885	Ant3	17.5161
NVNT	ac20	5885	Ant4	17.6802
NVNT	ac40	5835	Ant1	36.31
NVNT	ac40	5835	Ant2	35.9732
NVNT	ac40	5835	Ant3	35.8694
NVNT	ac40	5835	Ant4	36.2394
NVNT	ac40	5875	Ant1	35.4737
NVNT	ac40	5875	Ant2	35.5385
NVNT	ac40	5875	Ant3	35.4947
NVNT	ac40	5875	Ant4	36.1212
NVNT	ac80	5855	Ant1	74.2886
NVNT	ac80	5855	Ant2	75.1661
NVNT	ac80	5855	Ant3	74.8813
NVNT	ac80	5855	Ant4	75.5245
NVNT	ax20	5845	Ant1	19.0237
NVNT	ax20	5845	Ant2	18.9447
NVNT	ax20	5845	Ant3	19.033
NVNT	ax20	5845	Ant4	19.0705
NVNT	ax20	5865	Ant1	19.0423


NVNT	ax20	5865	Ant2	18.7041
NVNT	ax20	5865	Ant3	18.7847
NVNT	ax20	5865	Ant4	19.0199
NVNT	ax20	5885	Ant1	18.7036
NVNT	ax20	5885	Ant2	18.8762
NVNT	ax20	5885	Ant3	18.9969
NVNT	ax20	5885	Ant4	18.7996
NVNT	ax40	5835	Ant1	38.0066
NVNT	ax40	5835	Ant2	37.5019
NVNT	ax40	5835	Ant3	37.7926
NVNT	ax40	5835	Ant4	37.9308
NVNT	ax40	5875	Ant1	37.6728
NVNT	ax40	5875	Ant2	37.0053
NVNT	ax40	5875	Ant3	37.2122
NVNT	ax40	5875	Ant4	37.8392
NVNT	ax80	5855	Ant1	75.3587
NVNT	ax80	5855	Ant2	76.8193
NVNT	ax80	5855	Ant3	76.4509
NVNT	ax80	5855	Ant4	77.2036
NVNT	n20	5845	Ant1	17.5594
NVNT	n20	5845	Ant2	17.6542
NVNT	n20	5845	Ant3	17.5337
NVNT	n20	5845	Ant4	17.39
NVNT	n20	5865	Ant1	17.6834
NVNT	n20	5865	Ant2	17.5264
NVNT	n20	5865	Ant3	17.579
NVNT	n20	5865	Ant4	17.6669
NVNT	n20	5885	Ant1	16.9521
NVNT	n20	5885	Ant2	17.7327
NVNT	n20	5885	Ant3	17.3582
NVNT	n20	5885	Ant4	17.3475
NVNT	n40	5835	Ant1	36.3006
NVNT	n40	5835	Ant2	35.975
NVNT	n40	5835	Ant3	35.8171
NVNT	n40	5835	Ant4	36.2677
NVNT	n40	5875	Ant1	35.5746
NVNT	n40	5875	Ant2	35.3911
NVNT	n40	5875	Ant3	35.5528
NVNT	n40	5875	Ant4	36.1363

Test Graphs


OBW NVNT a 5845MHz Ant1

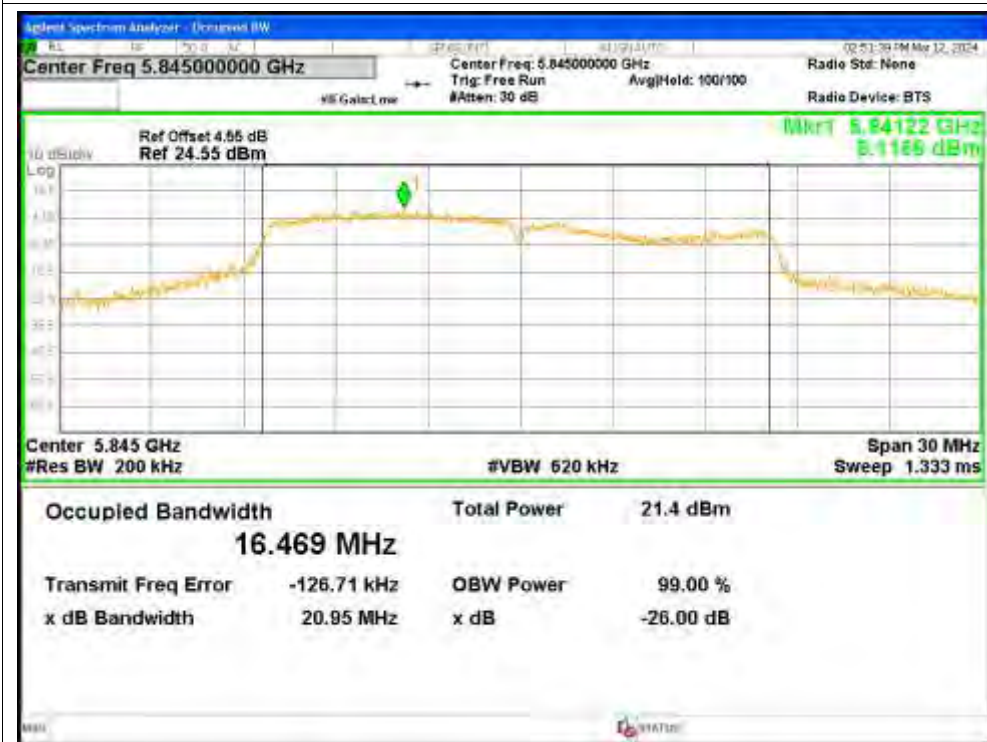


OBW NVNT a 5845MHz Ant2

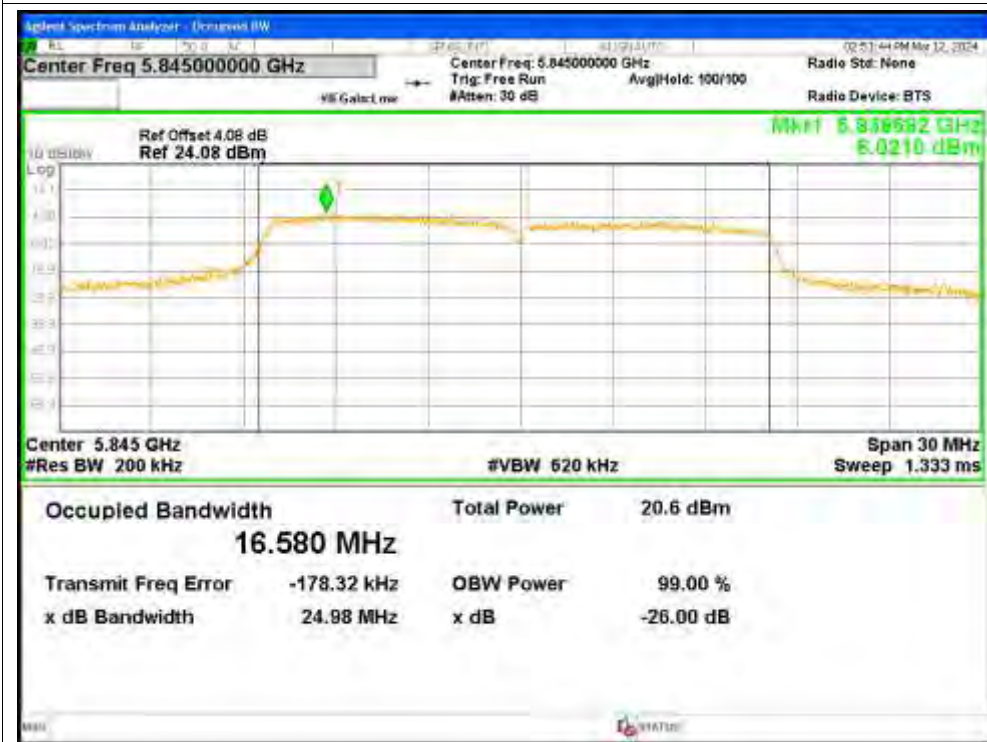


OBW NVNT a 5845MHz Ant3

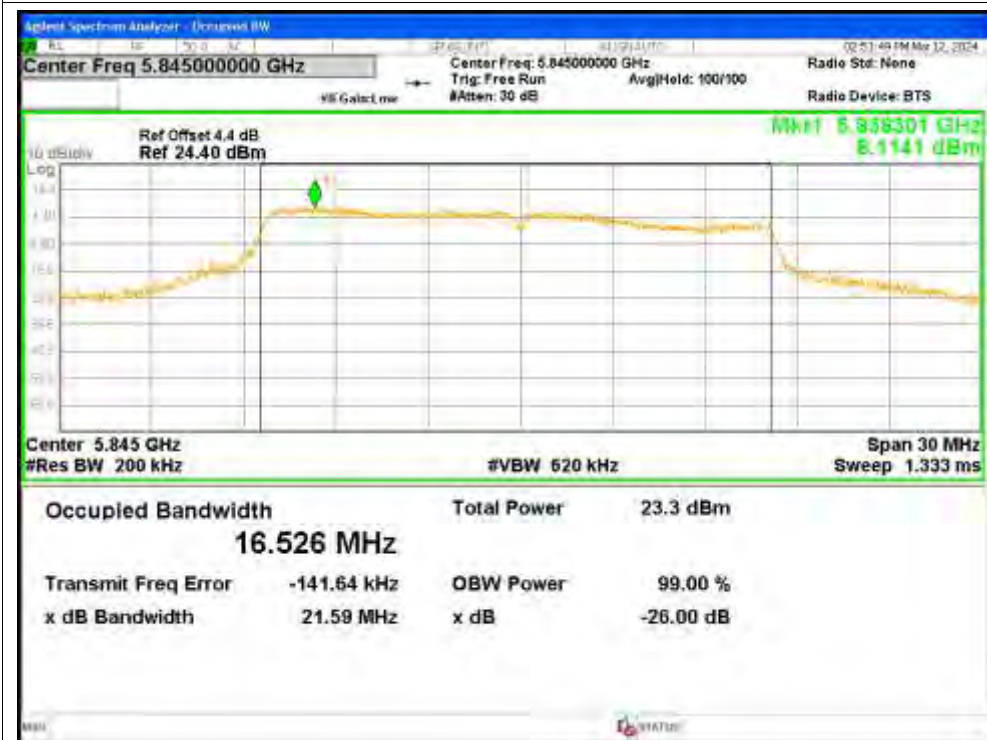


OBW NVNT a 5845MHz Ant4

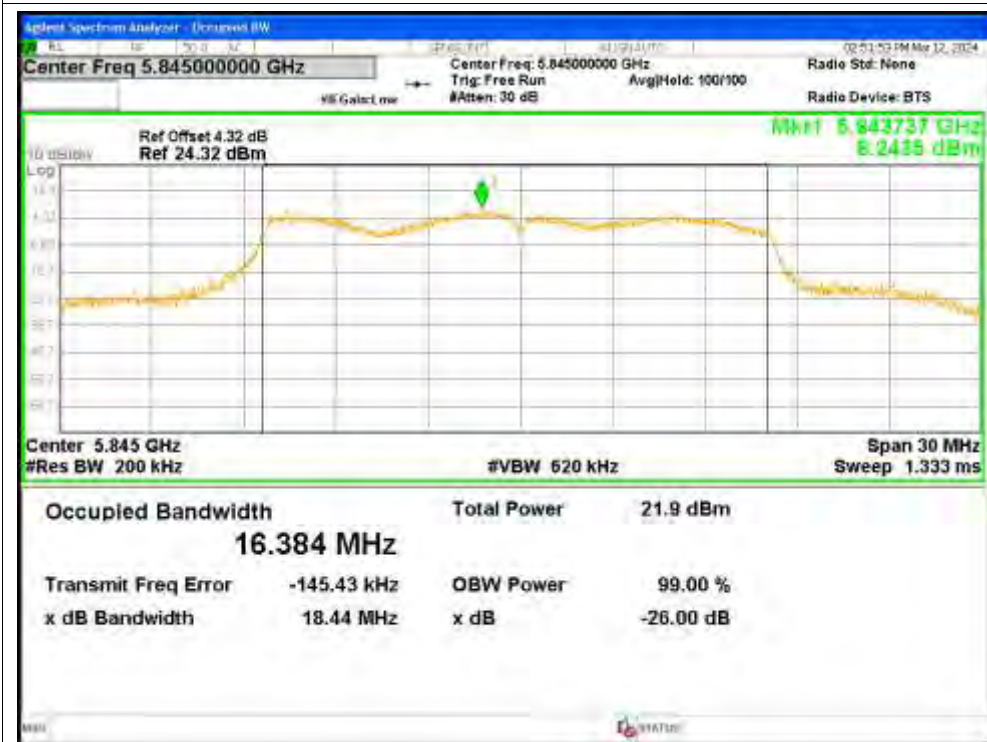


OBW NVNT a 5865MHz Ant1

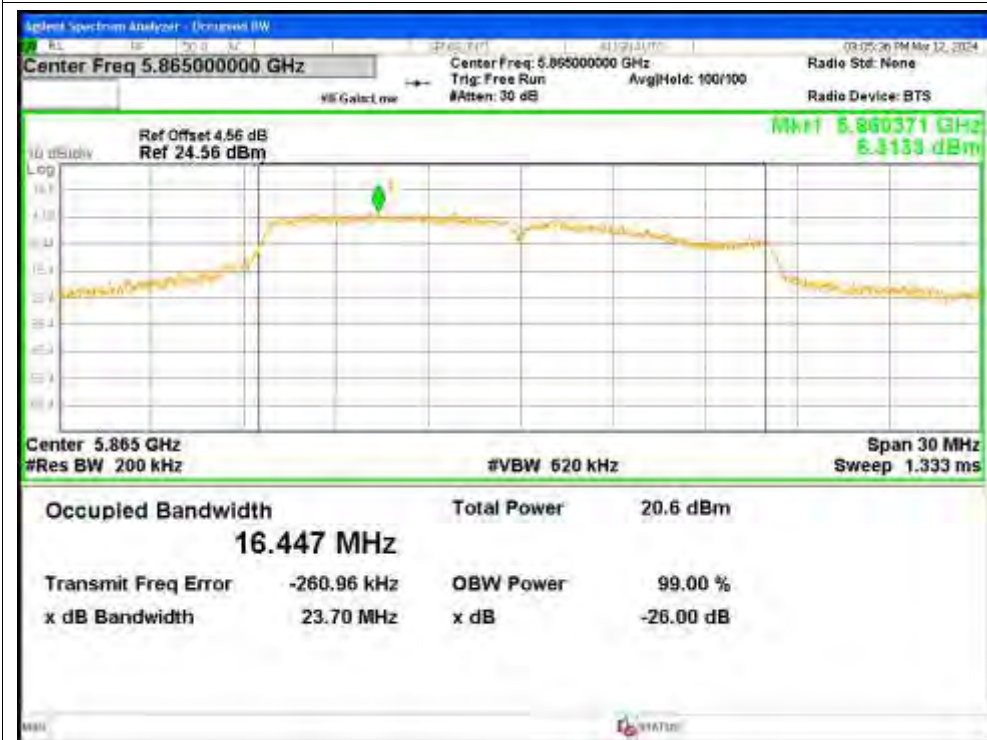

OBW NVNT a 5865MHz Ant2

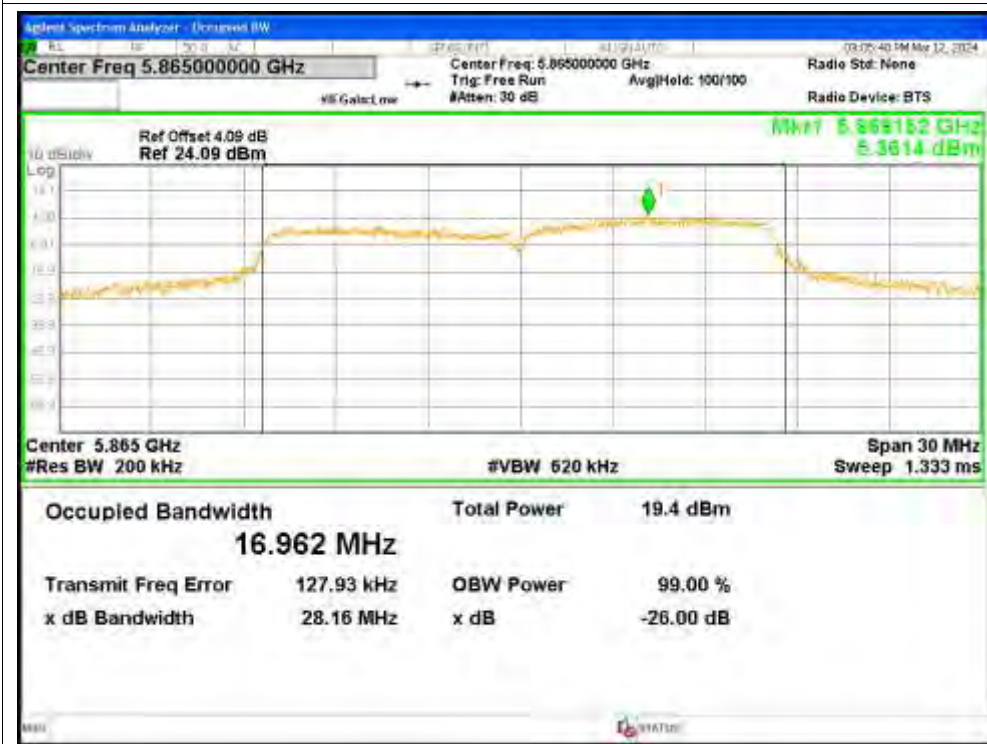


OBW NVNT a 5865MHz Ant3

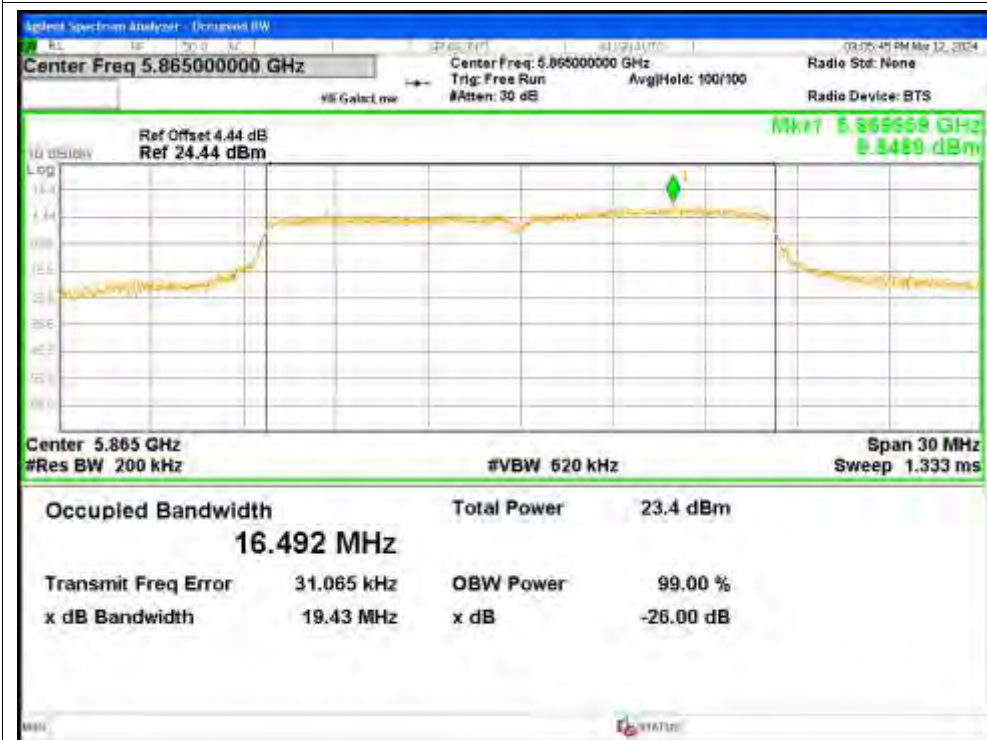


OBW NVNT a 5865MHz Ant4




OBW NVNT a 5885MHz Ant1

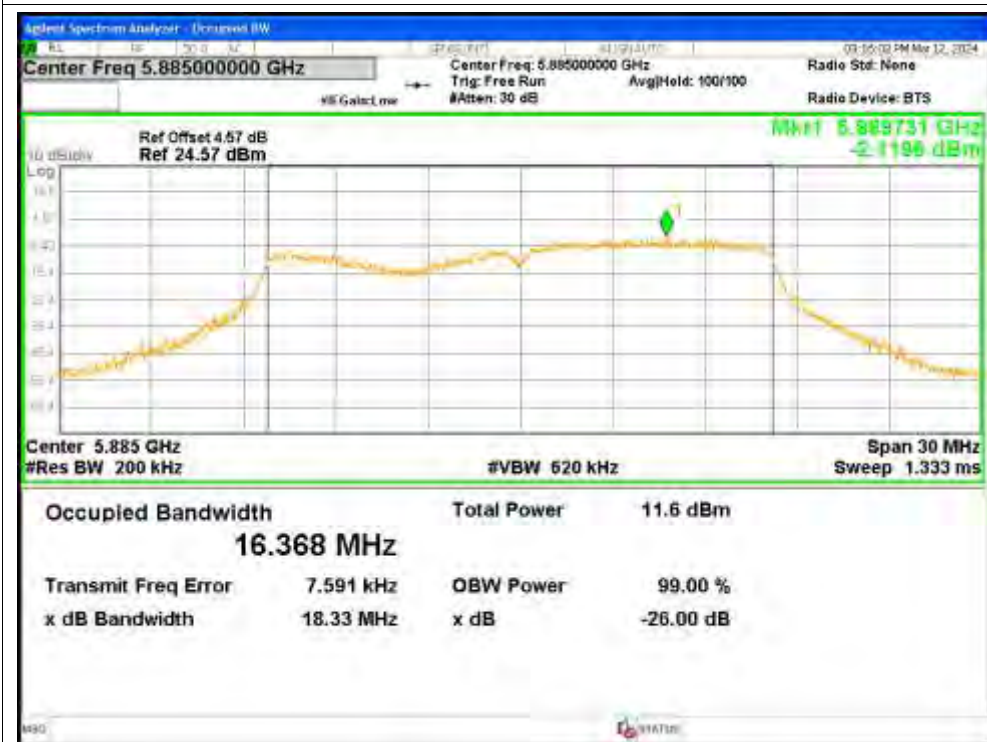


OBW NVNT a 5885MHz Ant2

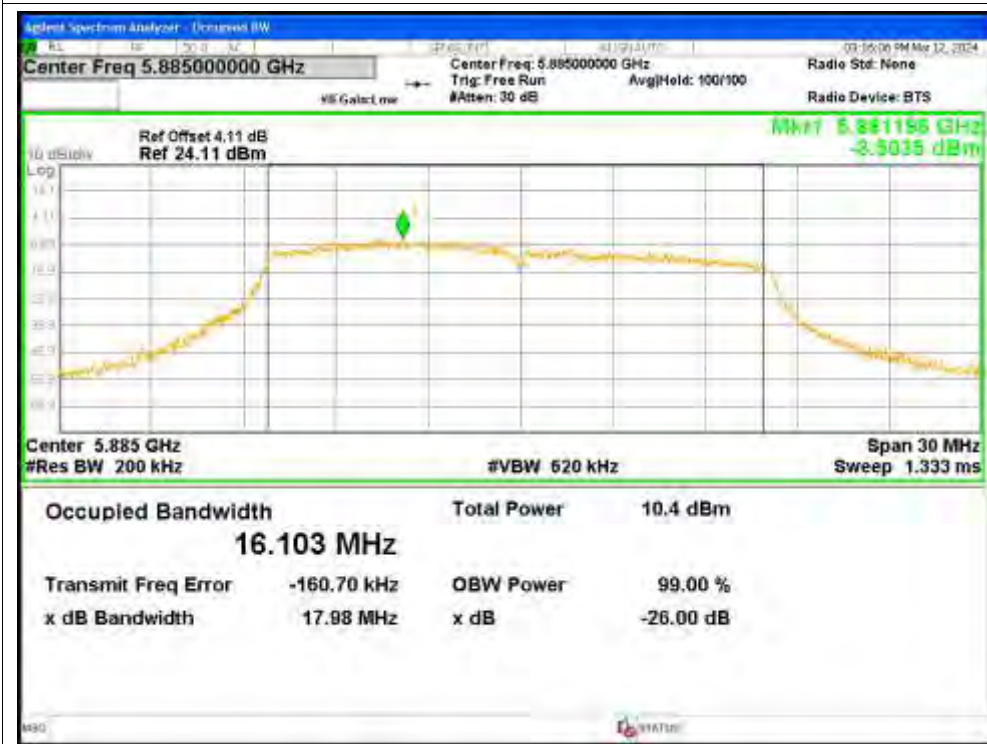

OBW NVNT a 5885MHz Ant3

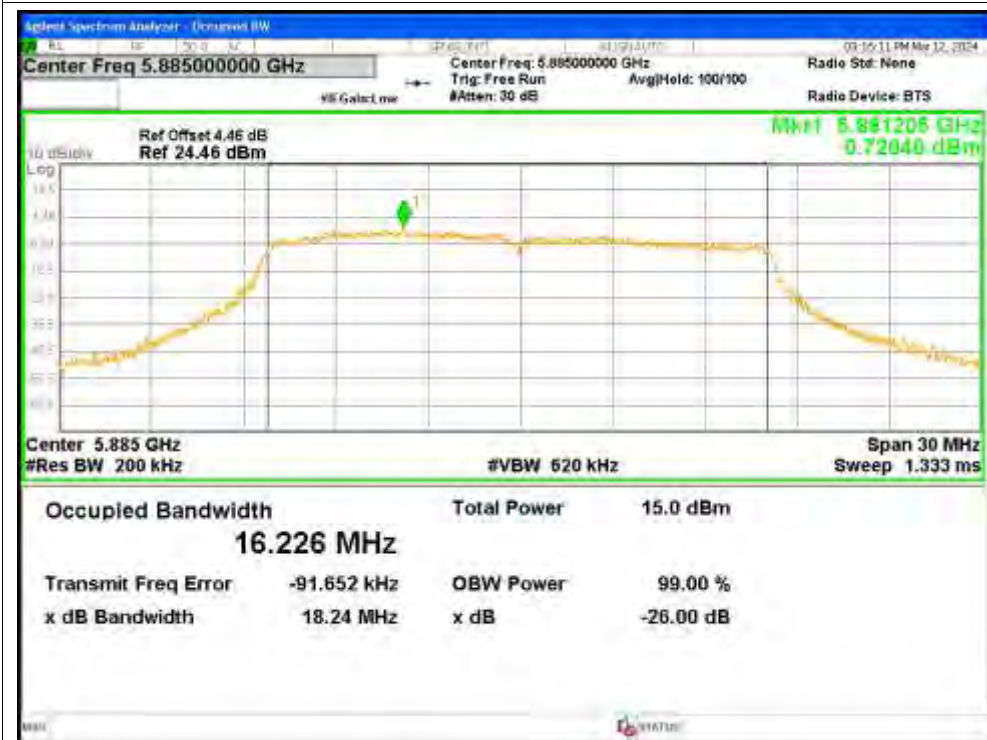


OBW NVNT a 5885MHz Ant4

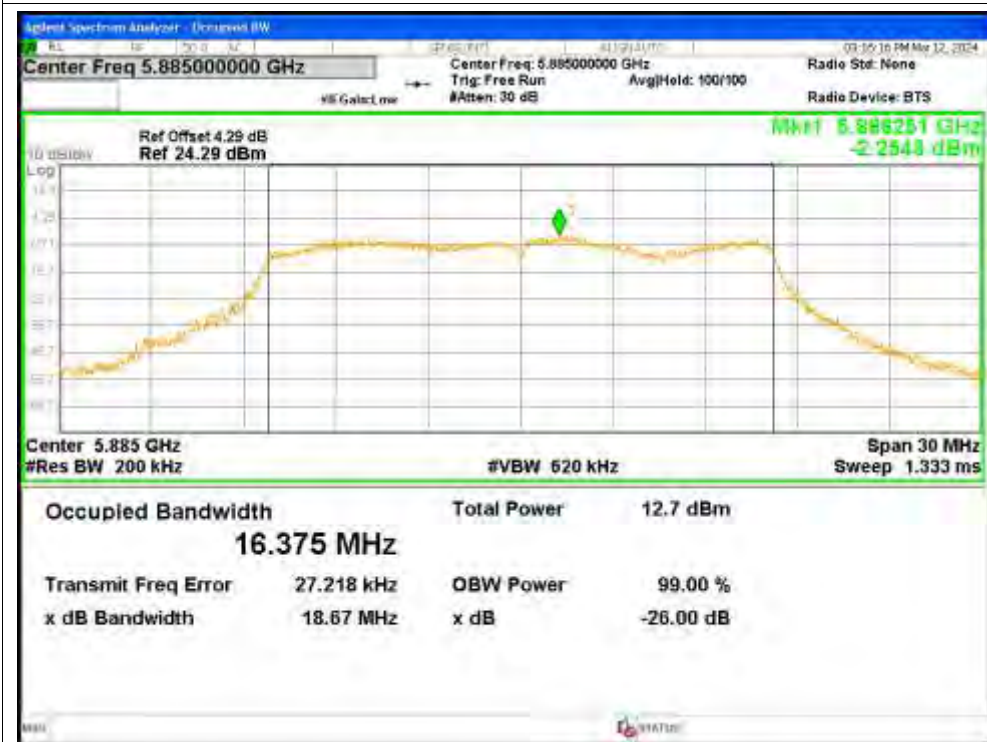


OBW NVNT ac20 5845MHz Ant1




OBW NVNT ac20 5845MHz Ant2

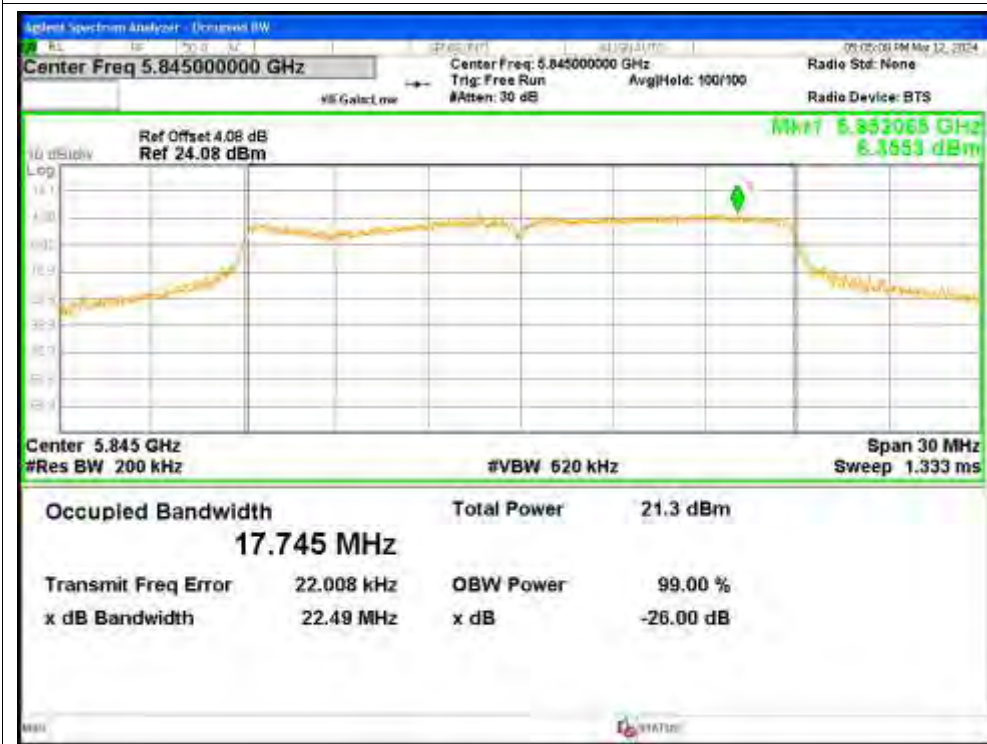


OBW NVNT ac20 5845MHz Ant3

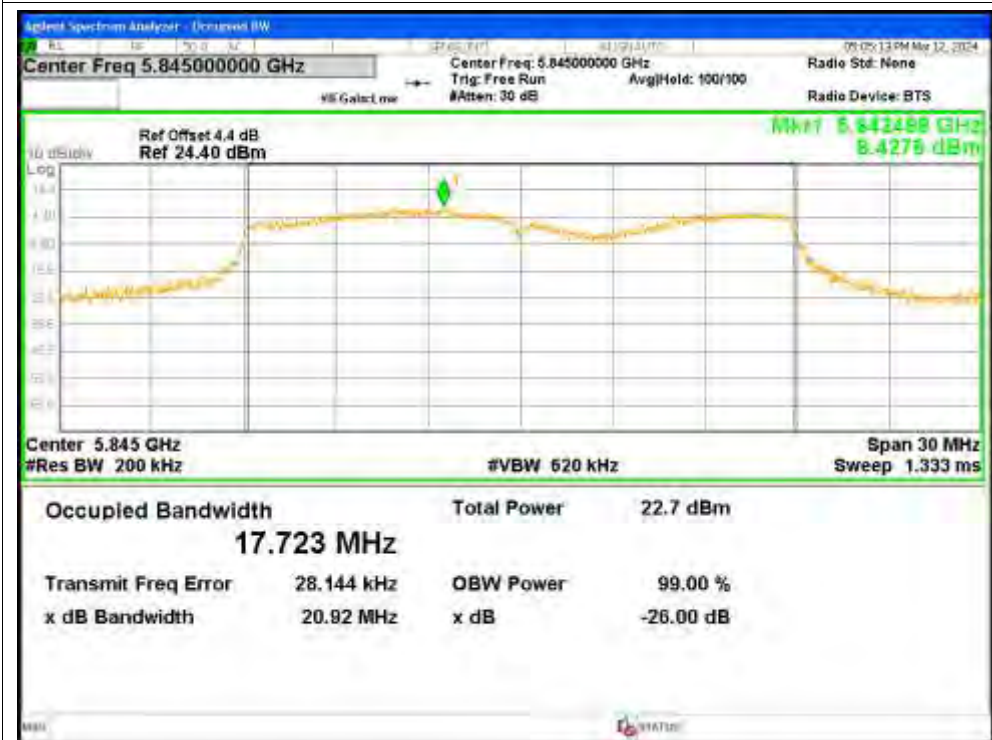

OBW NVNT ac20 5845MHz Ant4

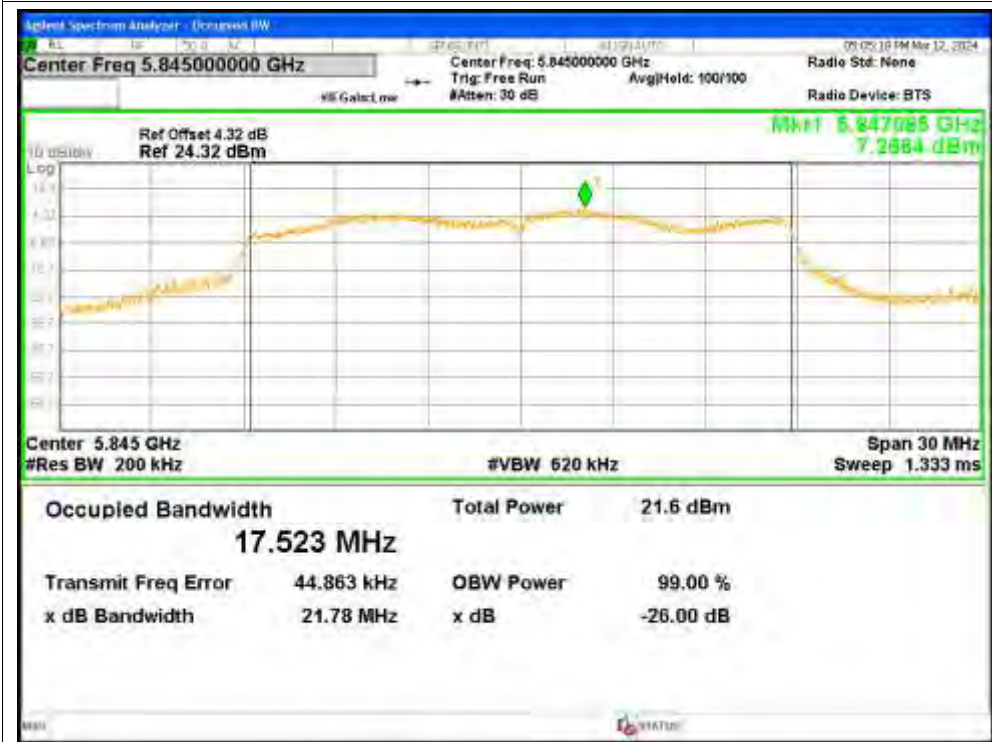


OBW NVNT ac20 5865MHz Ant1

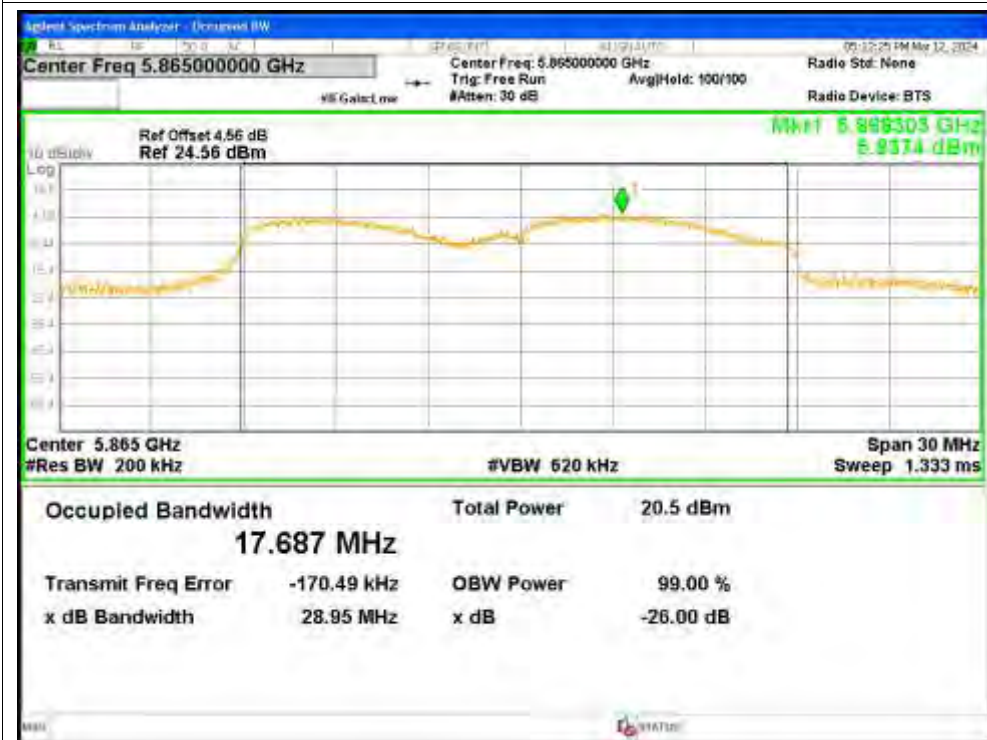


OBW NVNT ac20 5865MHz Ant2




OBW NVNT ac20 5865MHz Ant3

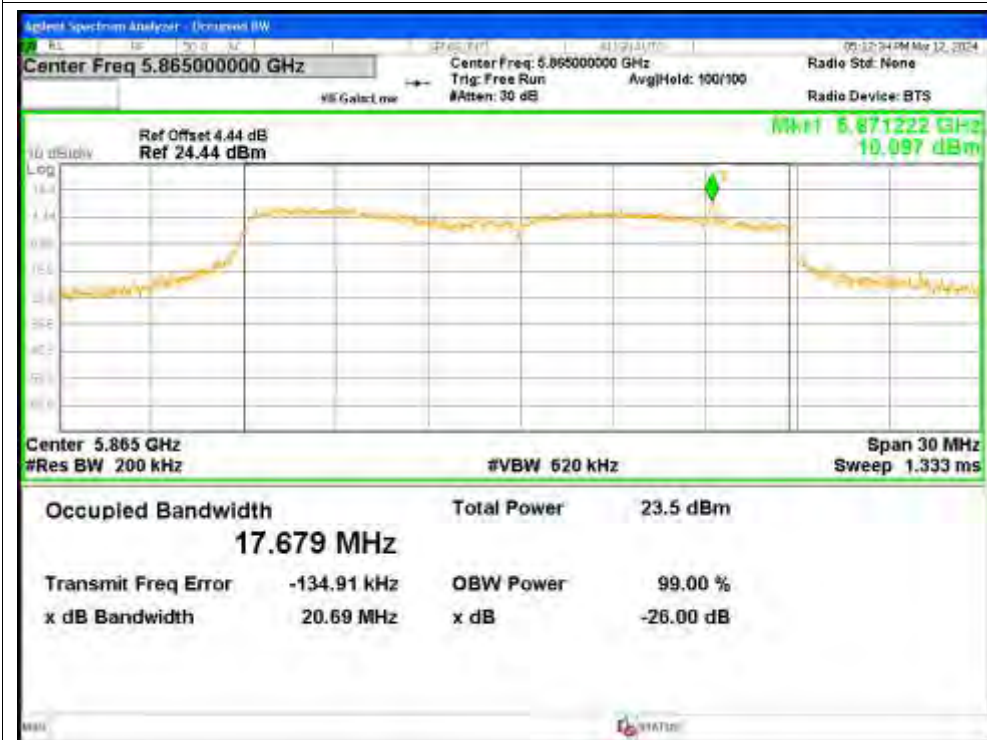


OBW NVNT ac20 5865MHz Ant4

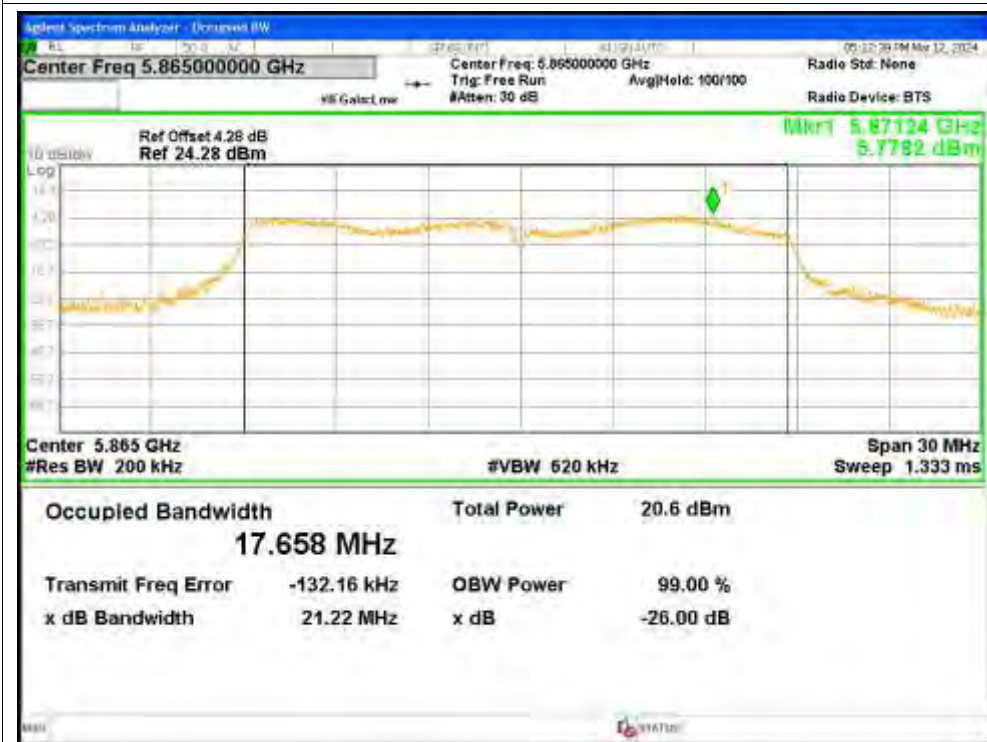


OBW NVNT ac20 5885MHz Ant1

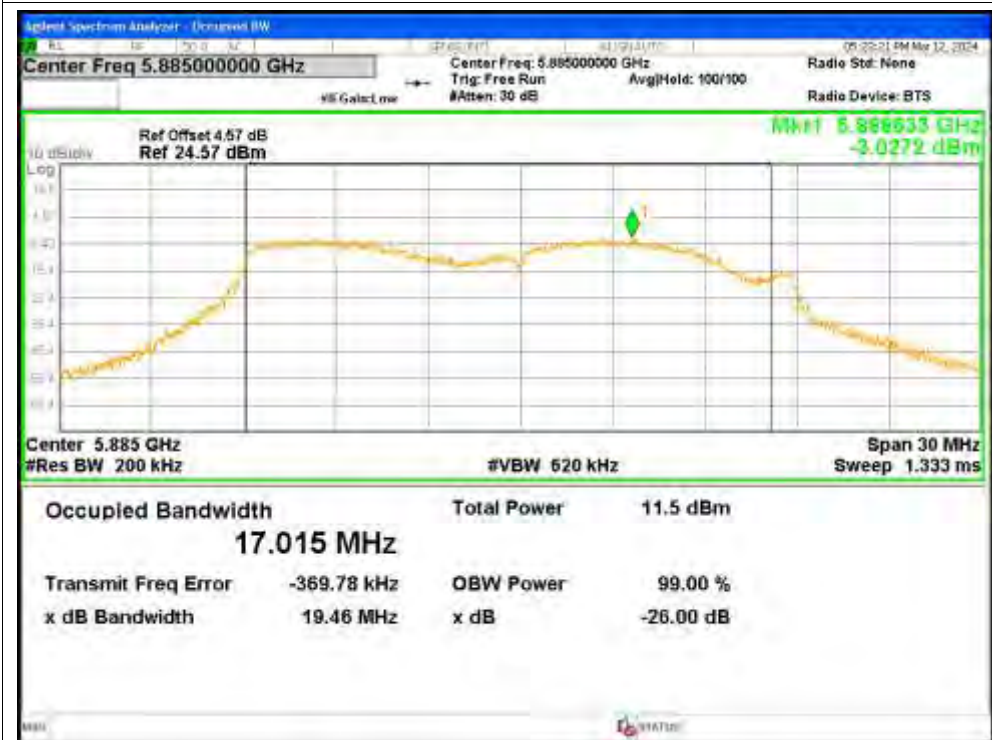

OBW NVNT ac20 5885MHz Ant2

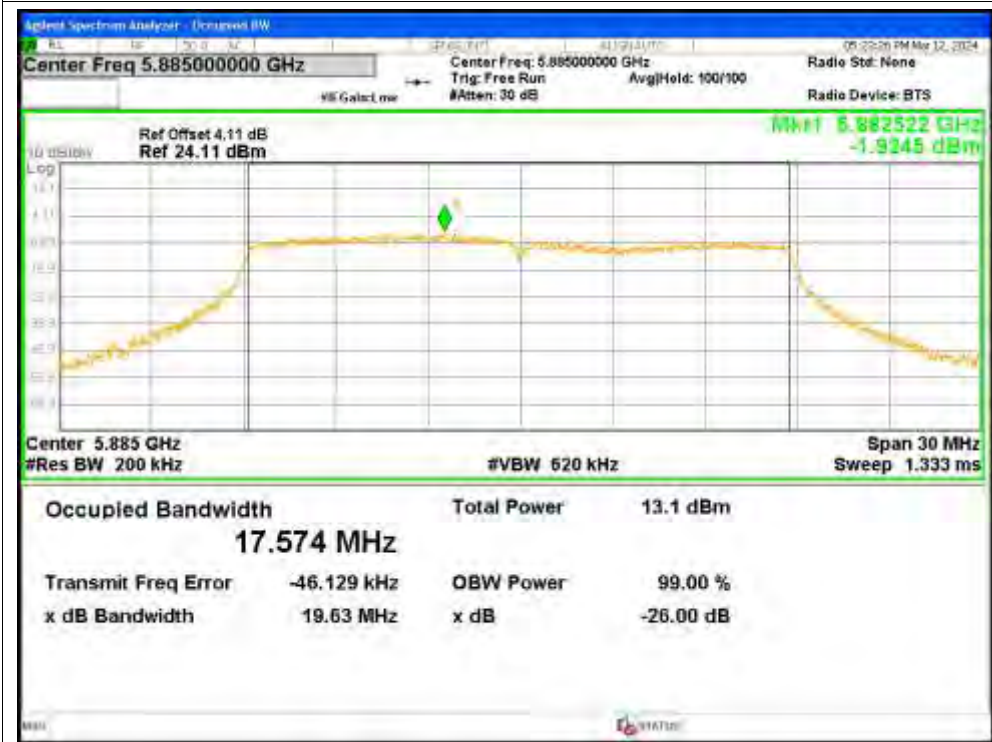


OBW NVNT ac20 5885MHz Ant3

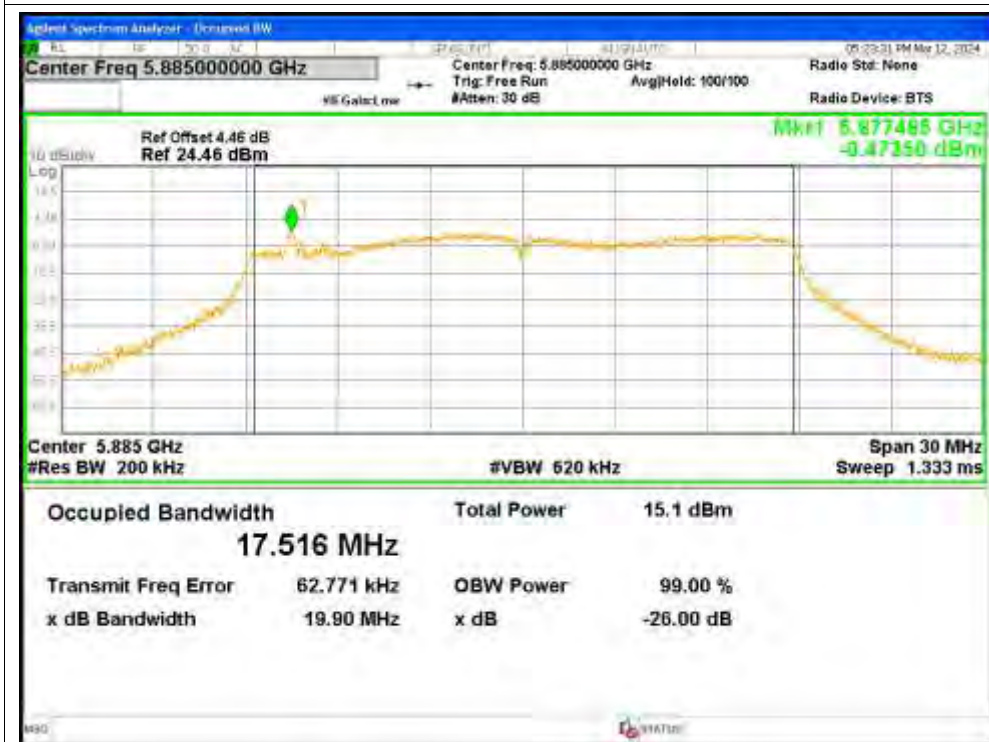


OBW NVNT ac20 5885MHz Ant4




OBW NVNT ac40 5835MHz Ant1

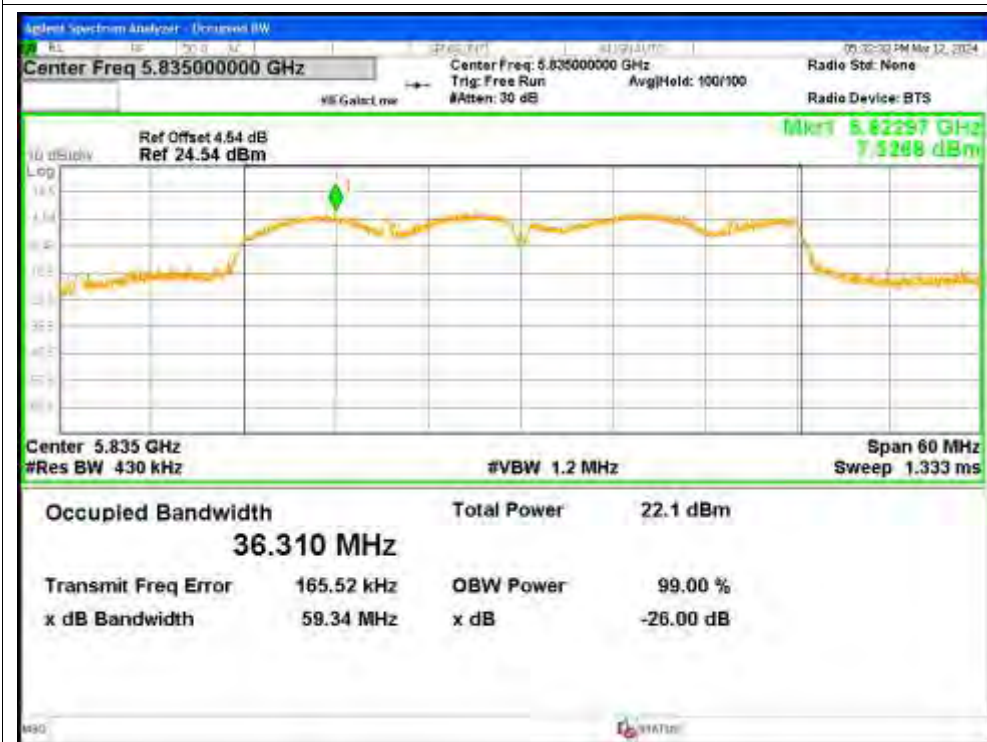


OBW NVNT ac40 5835MHz Ant2

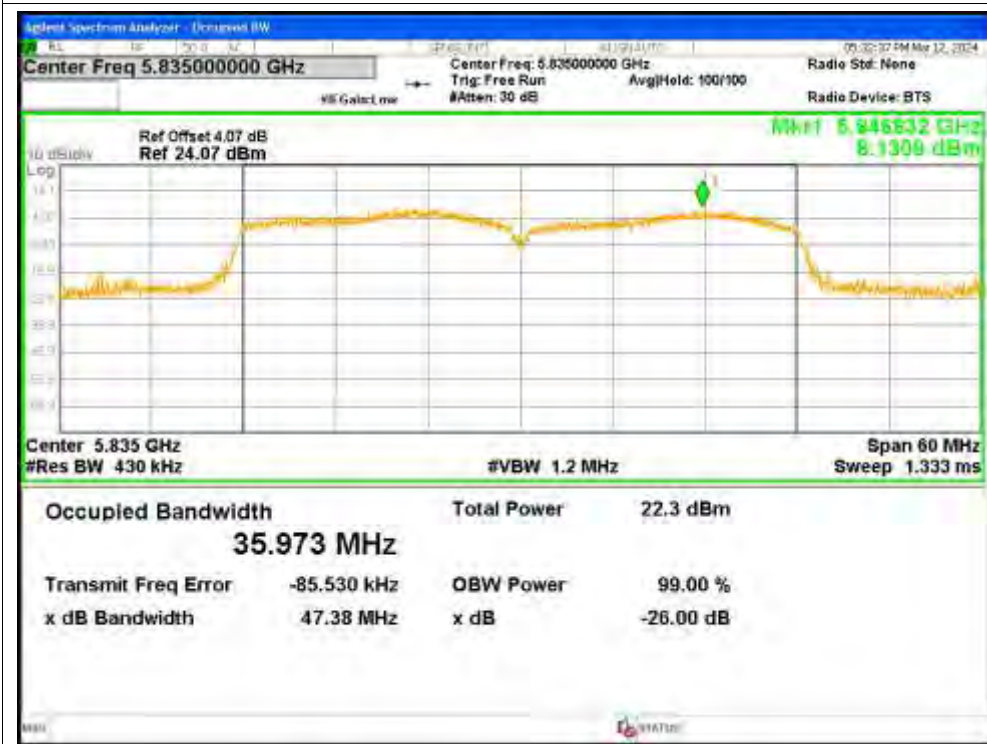


OBW NVNT ac40 5835MHz Ant3

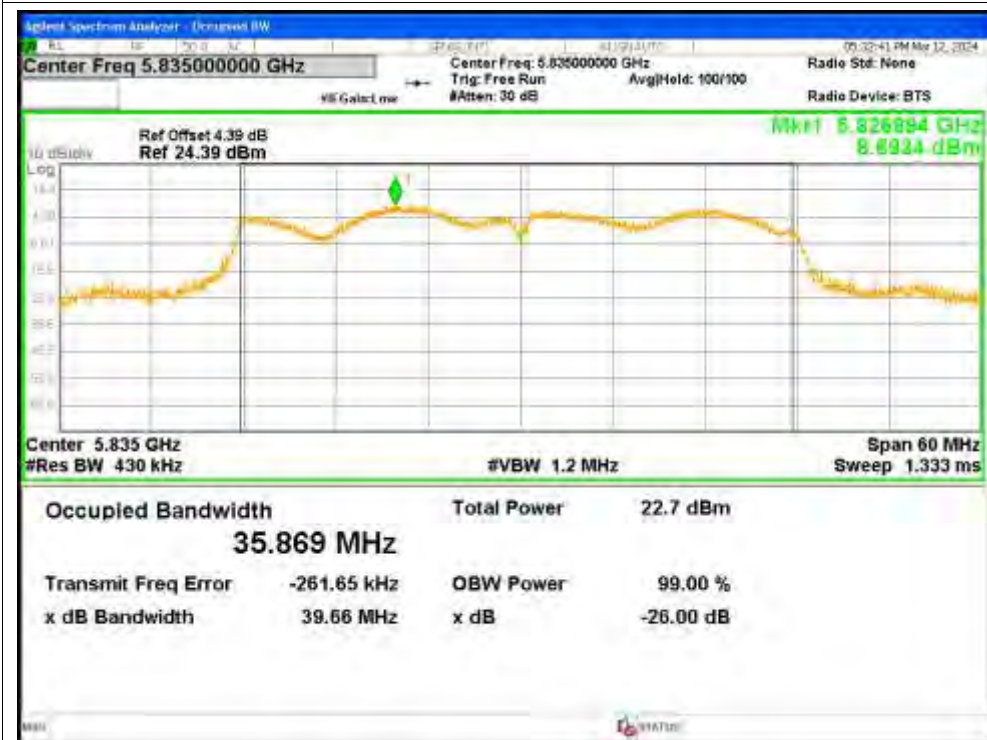

OBW NVNT ac40 5835MHz Ant4

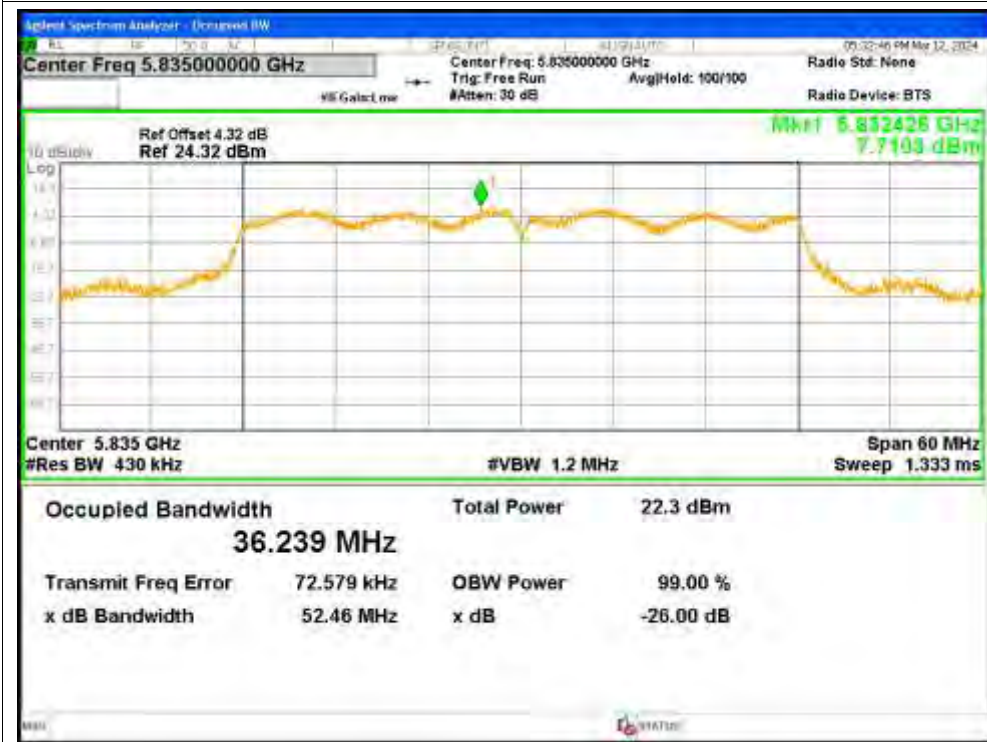


OBW NVNT ac40 5875MHz Ant1

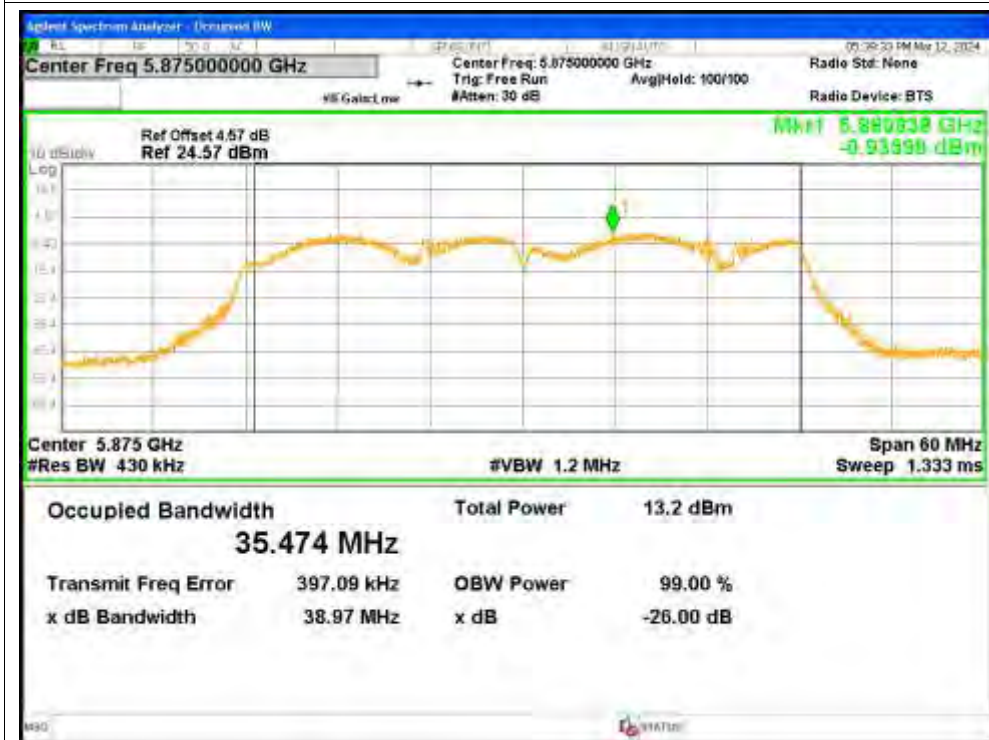


OBW NVNT ac40 5875MHz Ant2




OBW NVNT ac40 5875MHz Ant3

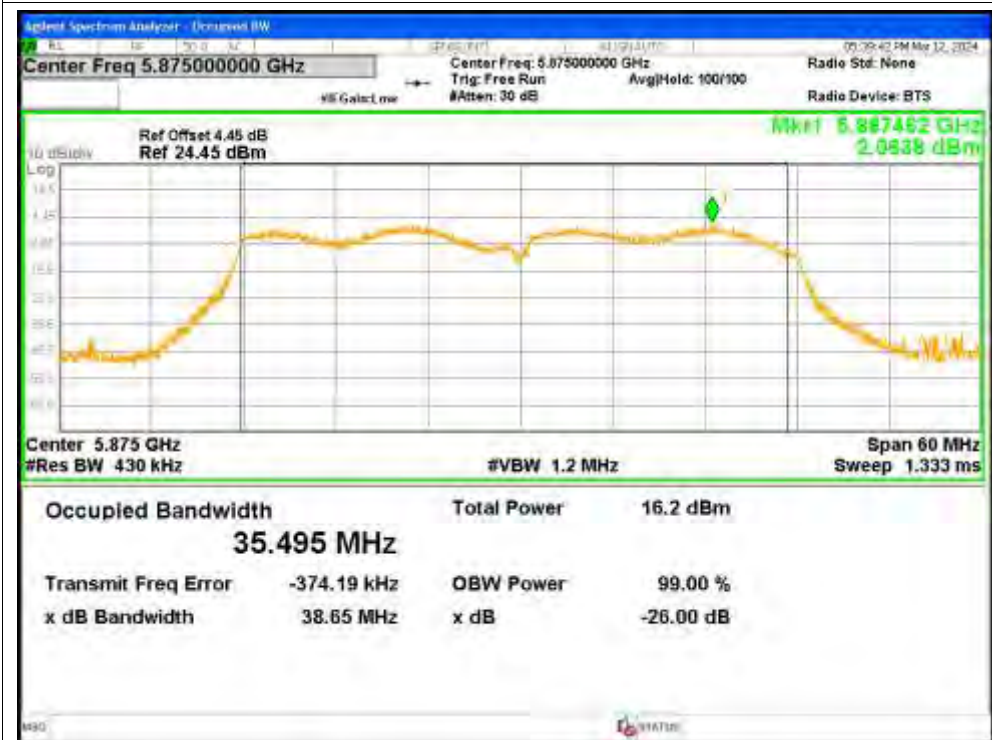


OBW NVNT ac40 5875MHz Ant4

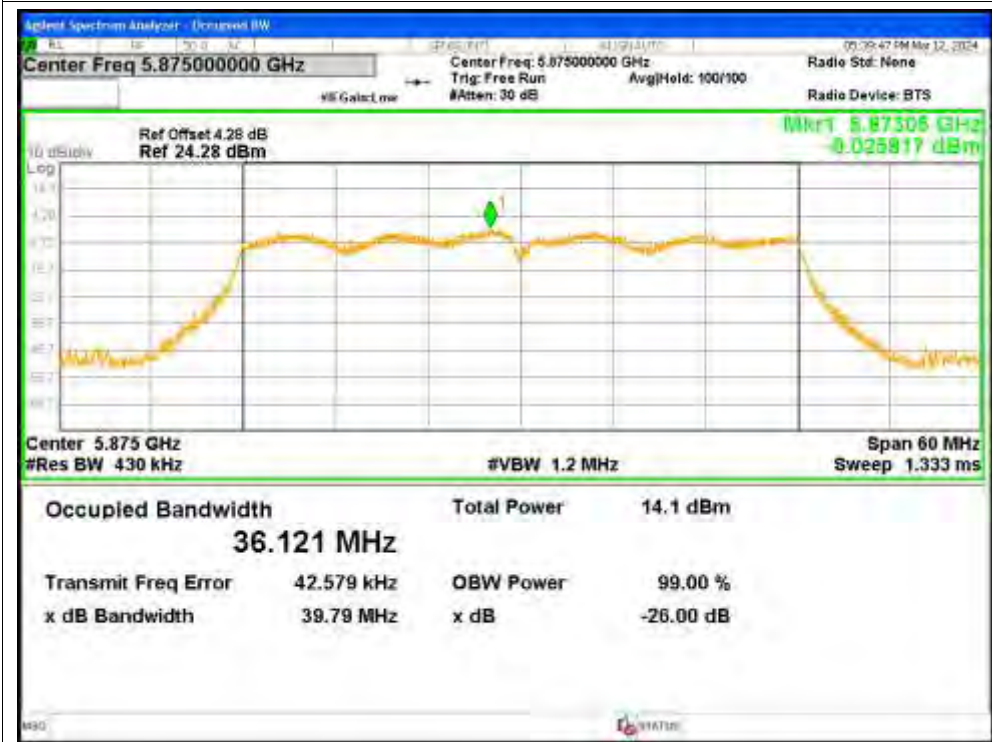


OBW NVNT ac80 5855MHz Ant1

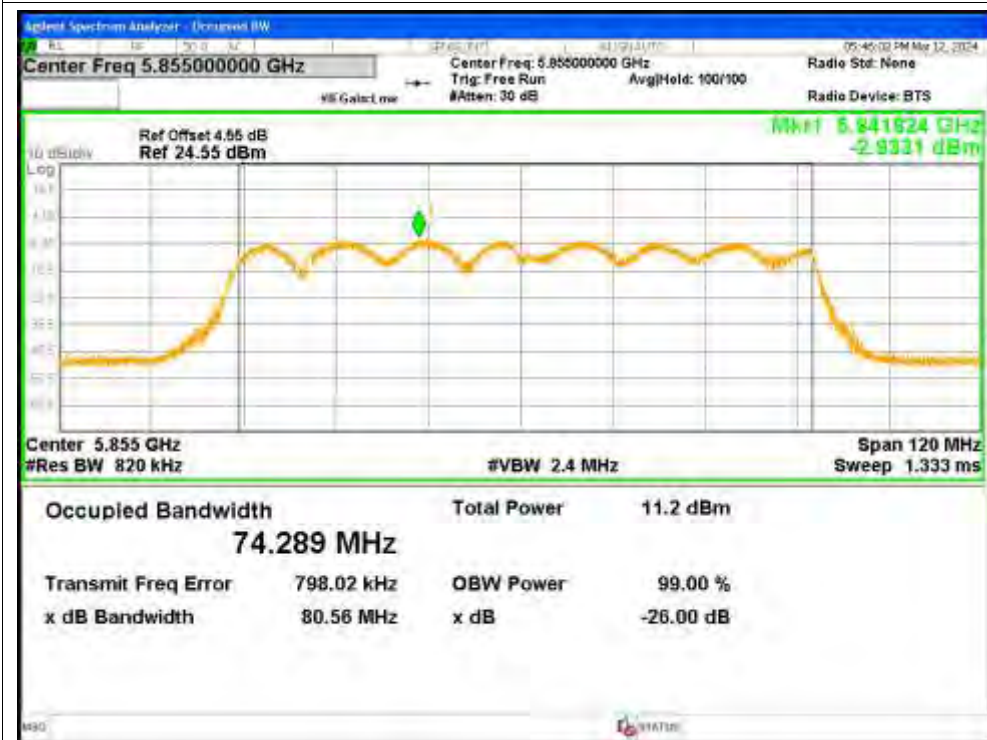


OBW NVNT ac80 5855MHz Ant2

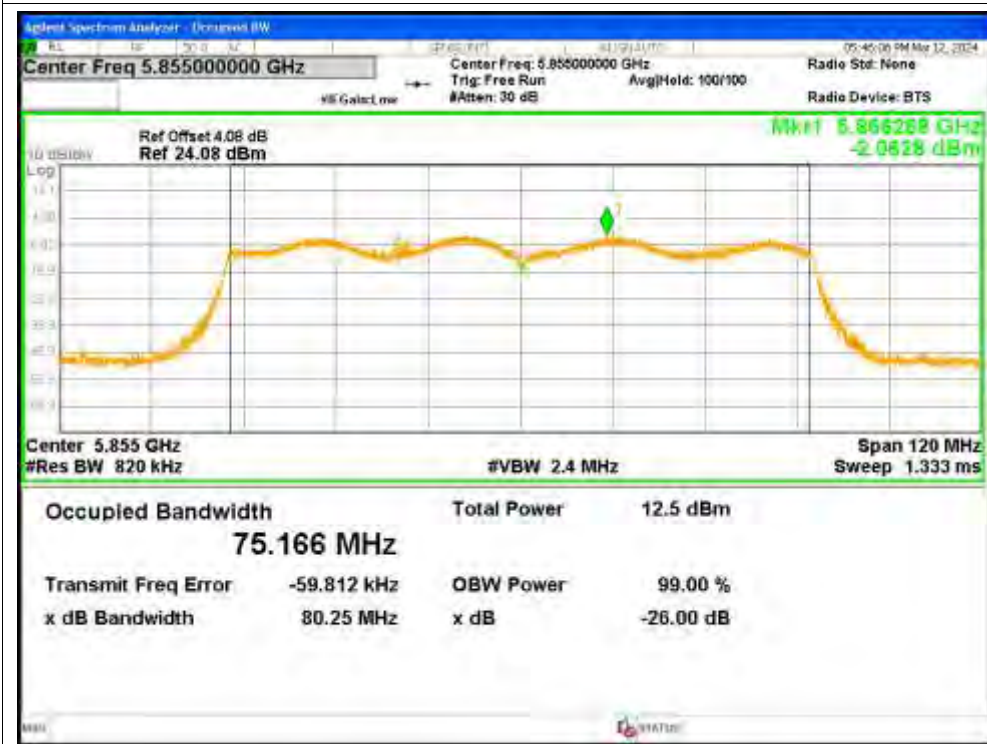


OBW NVNT ac80 5855MHz Ant3

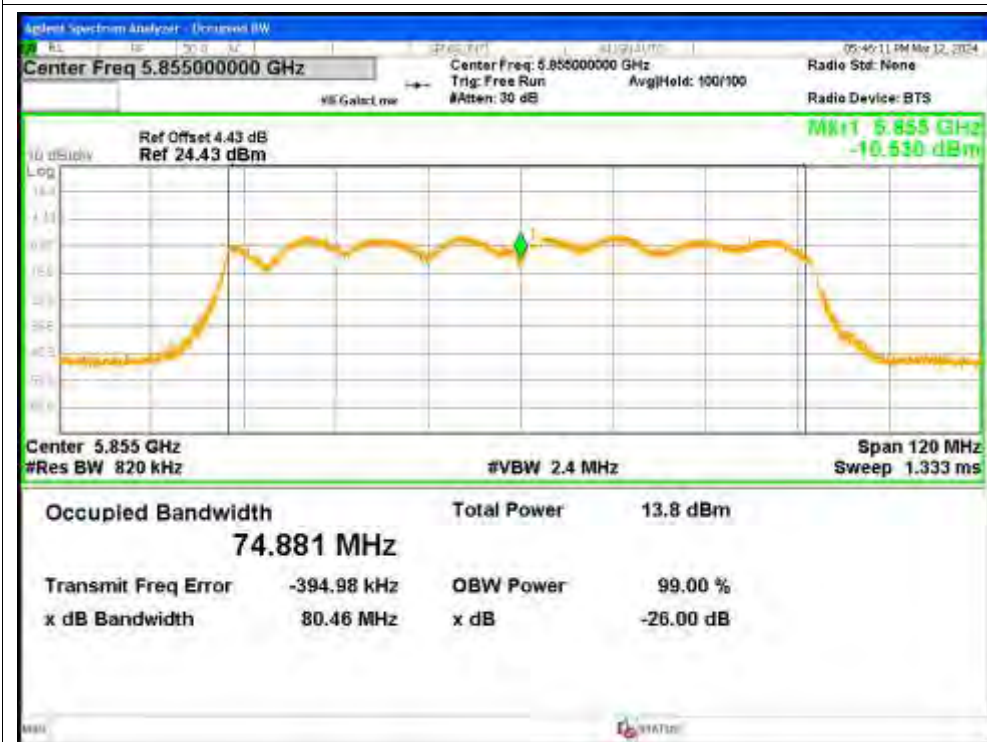


OBW NVNT ac80 5855MHz Ant4

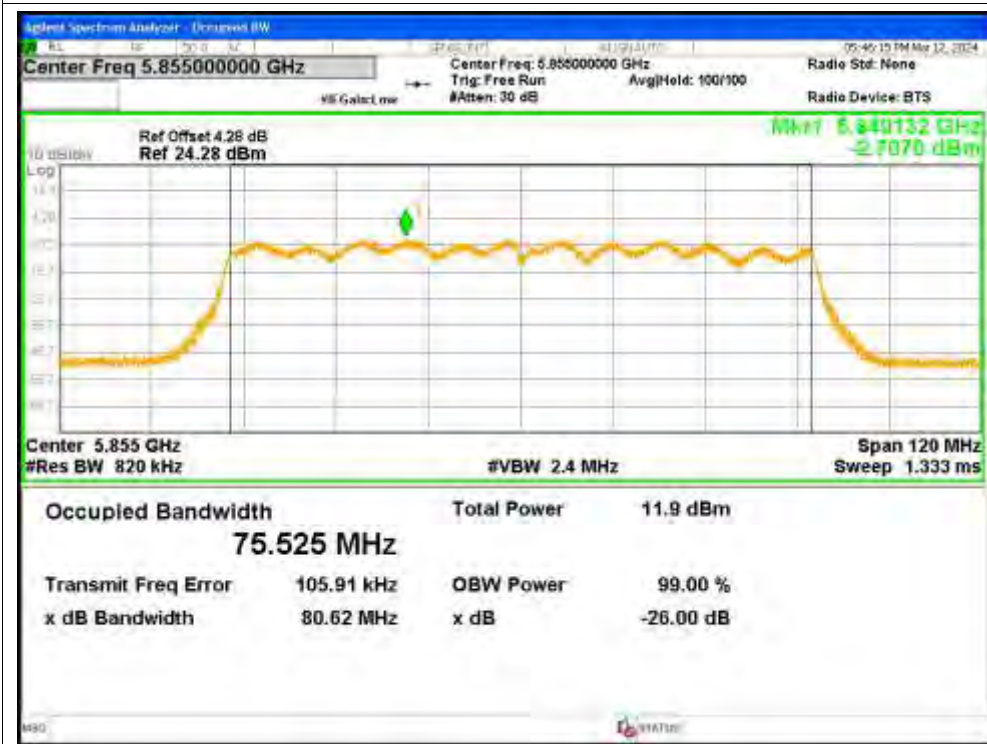


OBW NVNT ax20 5845MHz Ant1

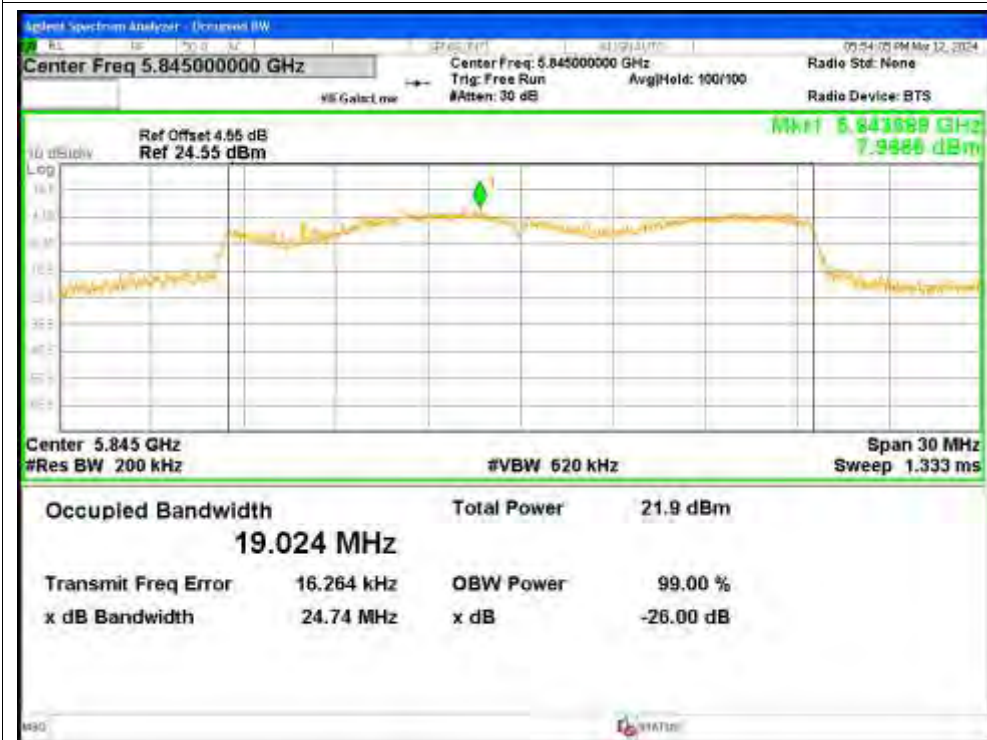


OBW NVNT ax20 5845MHz Ant2

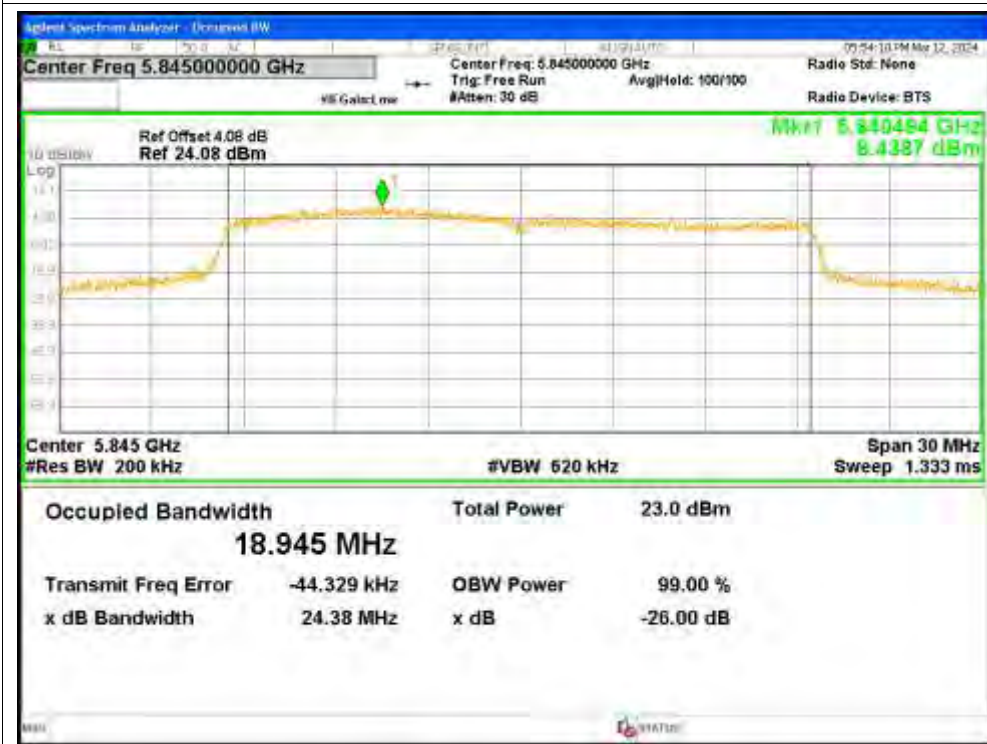


OBW NVNT ax20 5845MHz Ant3

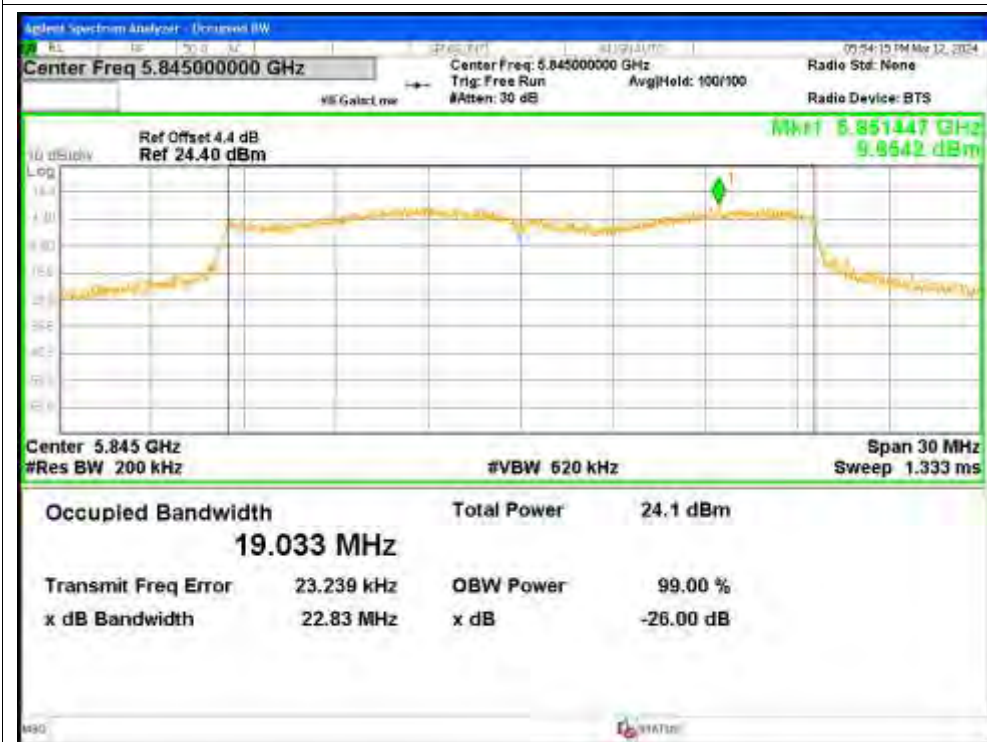


OBW NVNT ax20 5845MHz Ant4

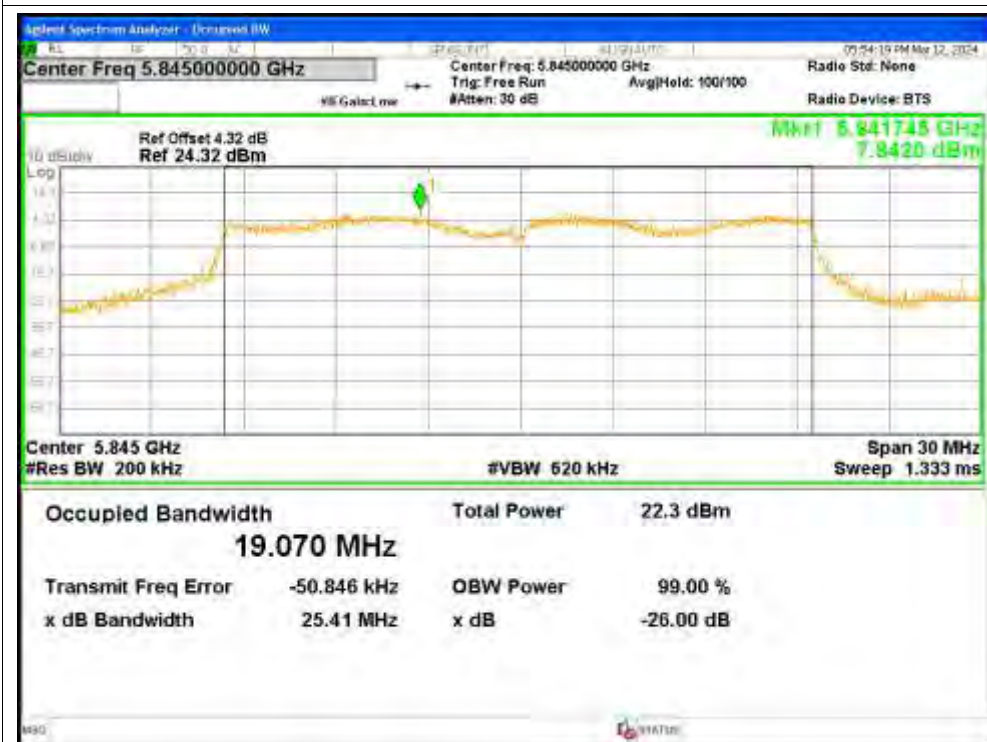

OBW NVNT ax20 5865MHz Ant1

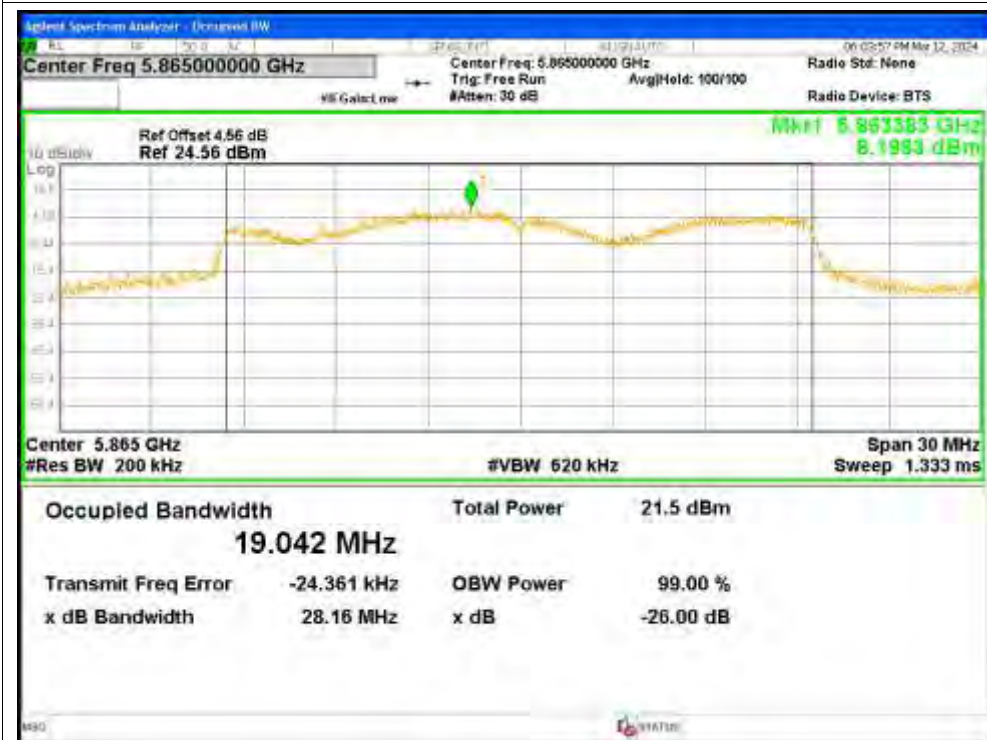


OBW NVNT ax20 5865MHz Ant2

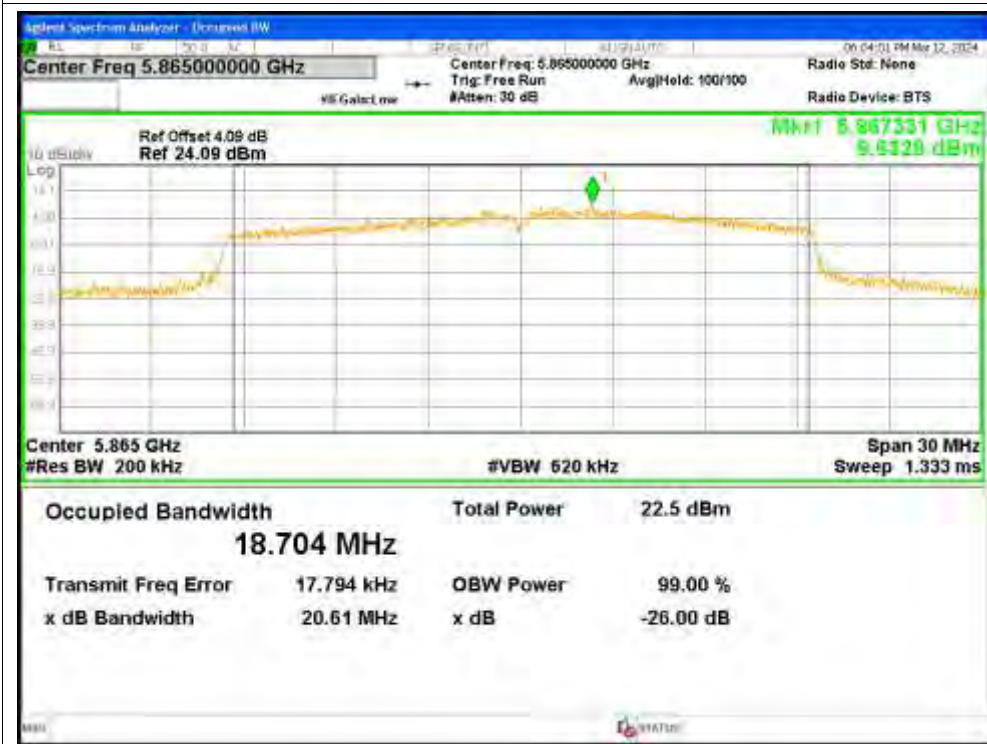


OBW NVNT ax20 5865MHz Ant3




OBW NVNT ax20 5865MHz Ant4

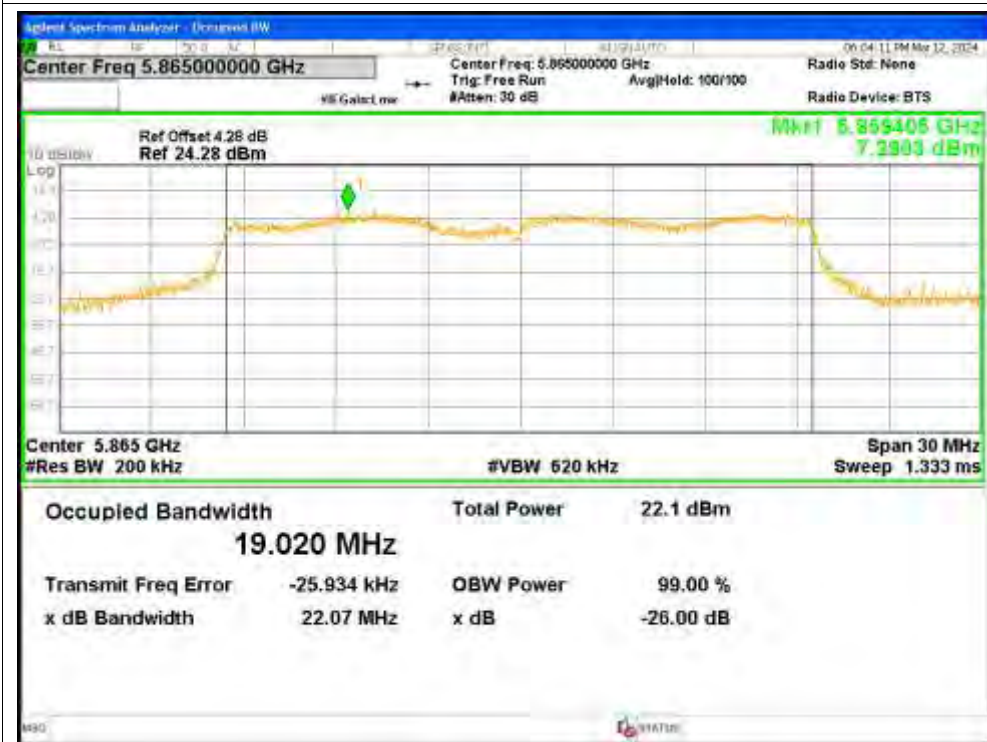


OBW NVNT ax20 5885MHz Ant1

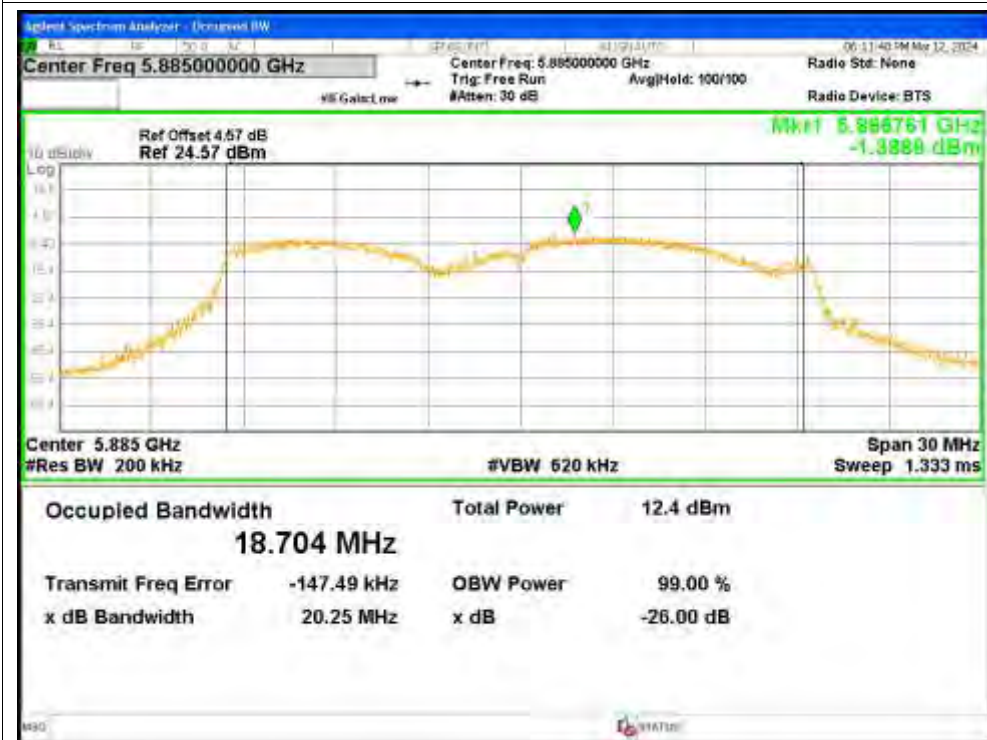


OBW NVNT ax20 5885MHz Ant2

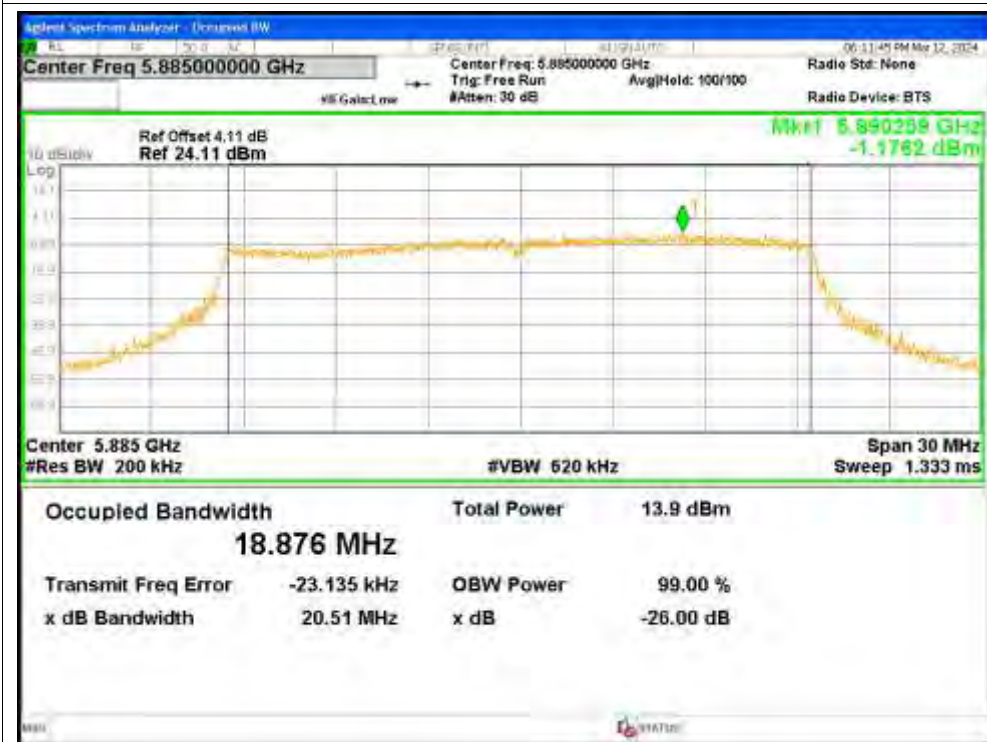


OBW NVNT ax20 5885MHz Ant3

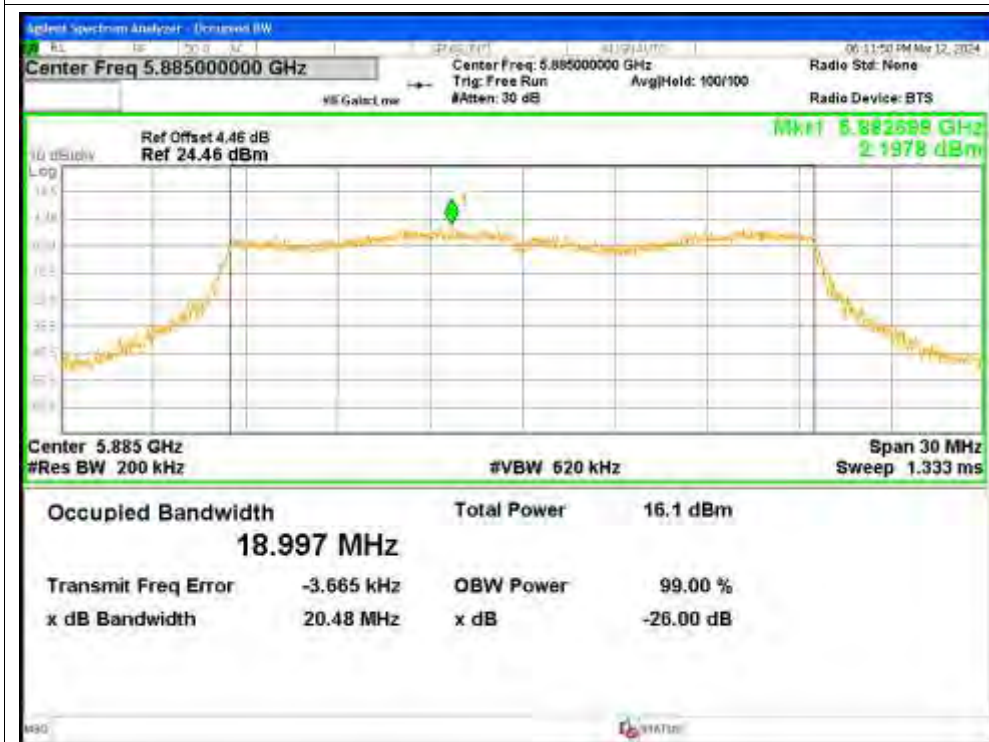


OBW NVNT ax20 5885MHz Ant4

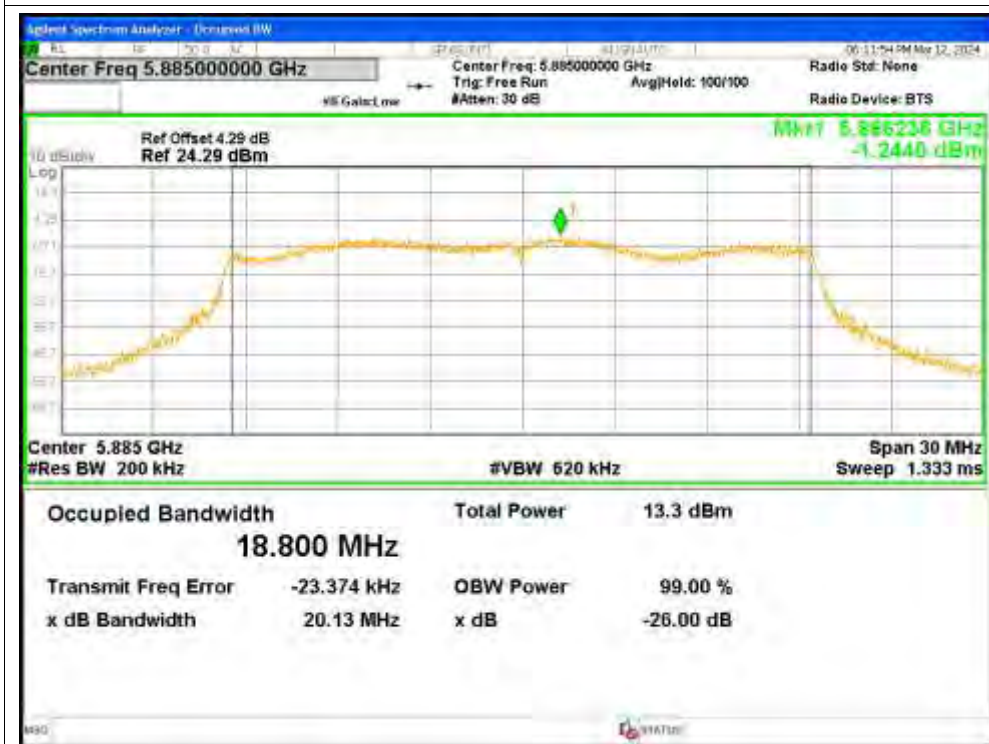


OBW NVNT ax40 5835MHz Ant1

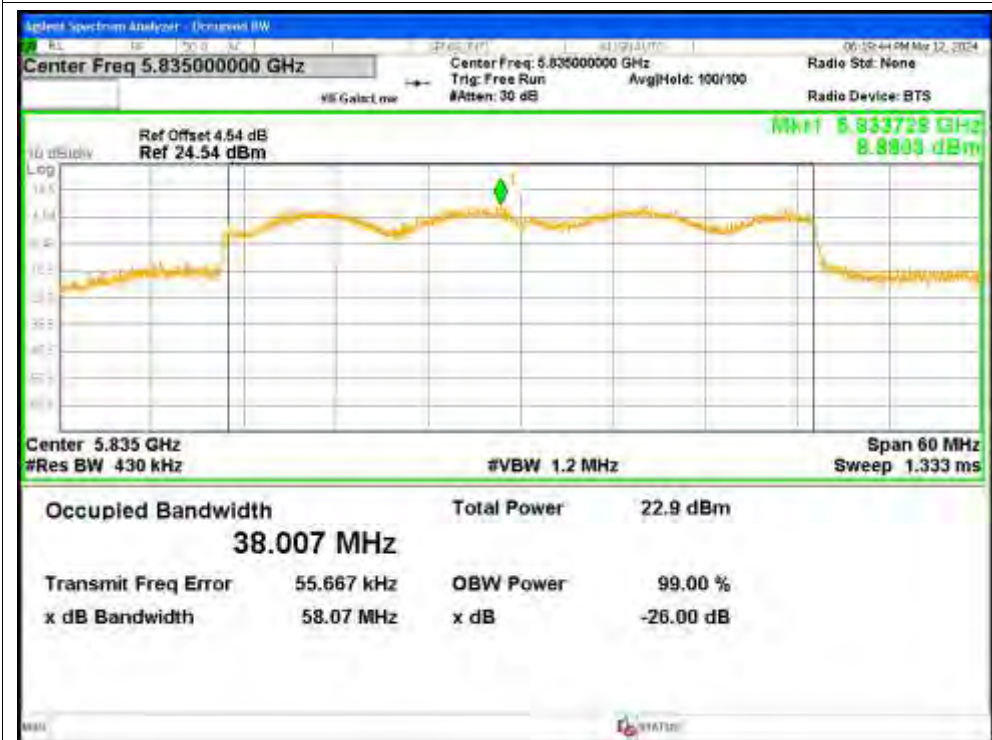


OBW NVNT ax40 5835MHz Ant2

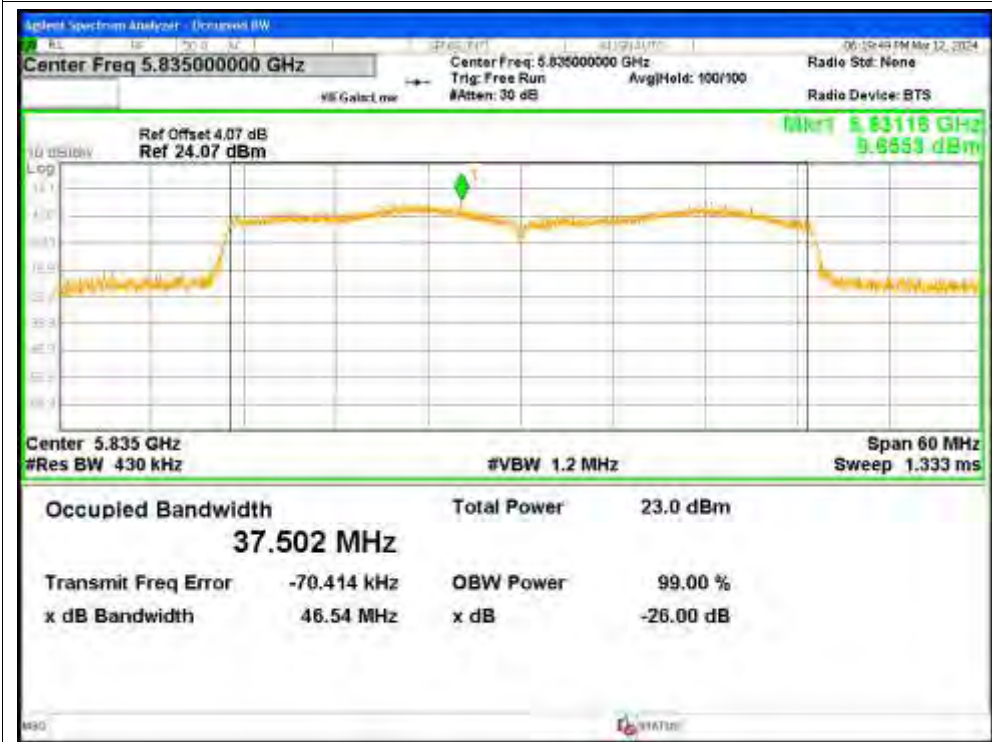


OBW NVNT ax40 5835MHz Ant3

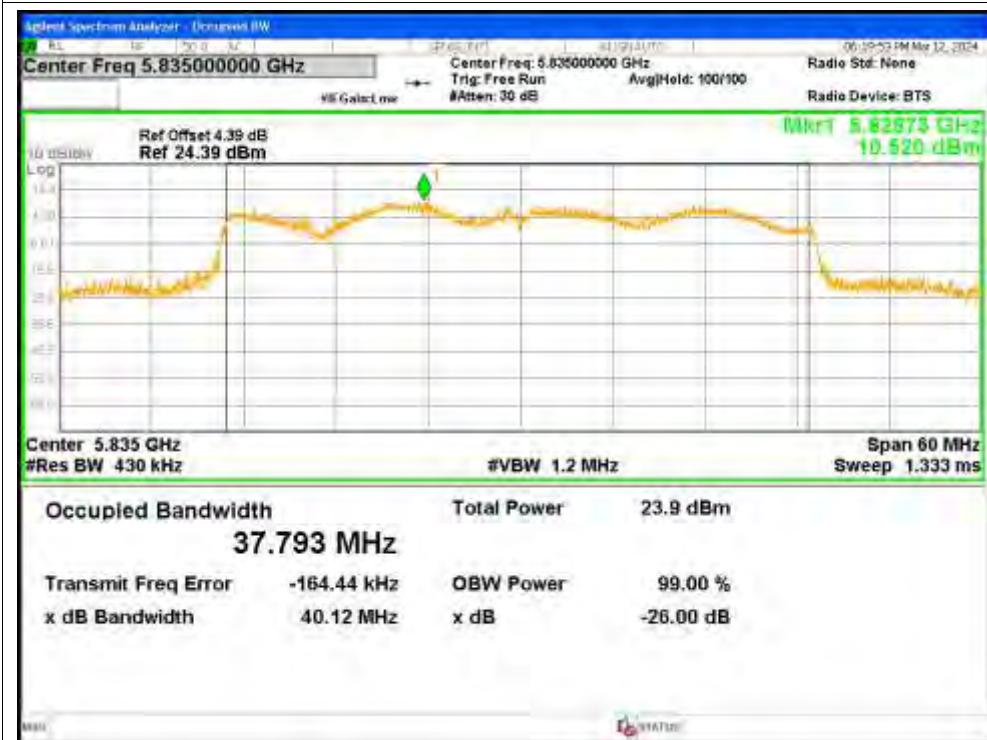


OBW NVNT ax40 5835MHz Ant4

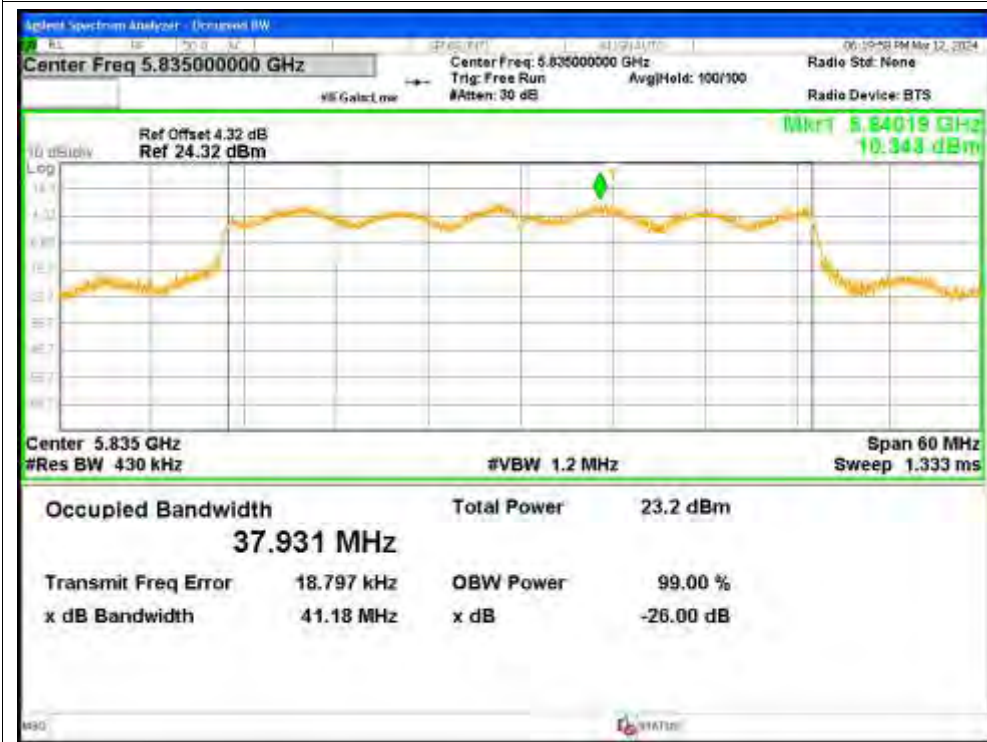


OBW NVNT ax40 5875MHz Ant1

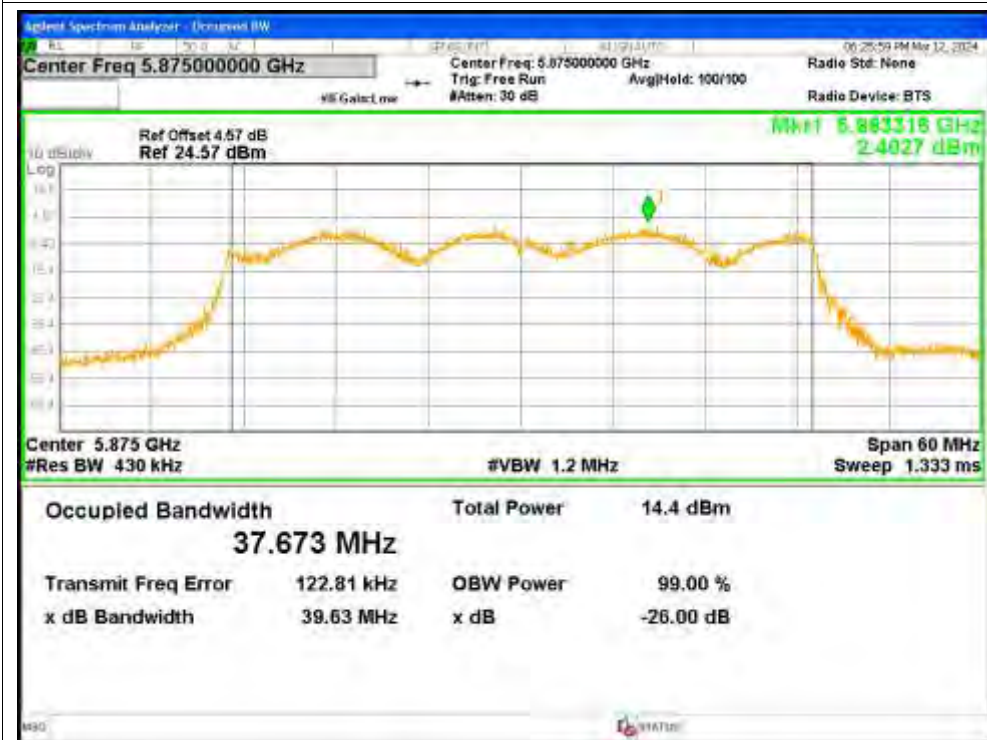


OBW NVNT ax40 5875MHz Ant2

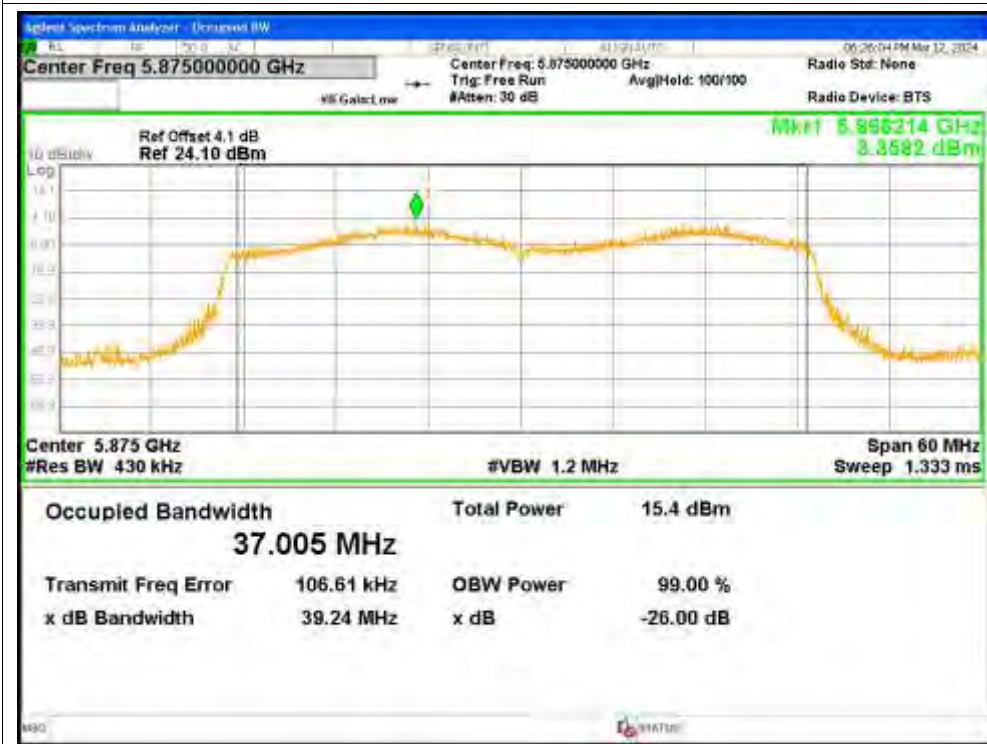


OBW NVNT ax40 5875MHz Ant3

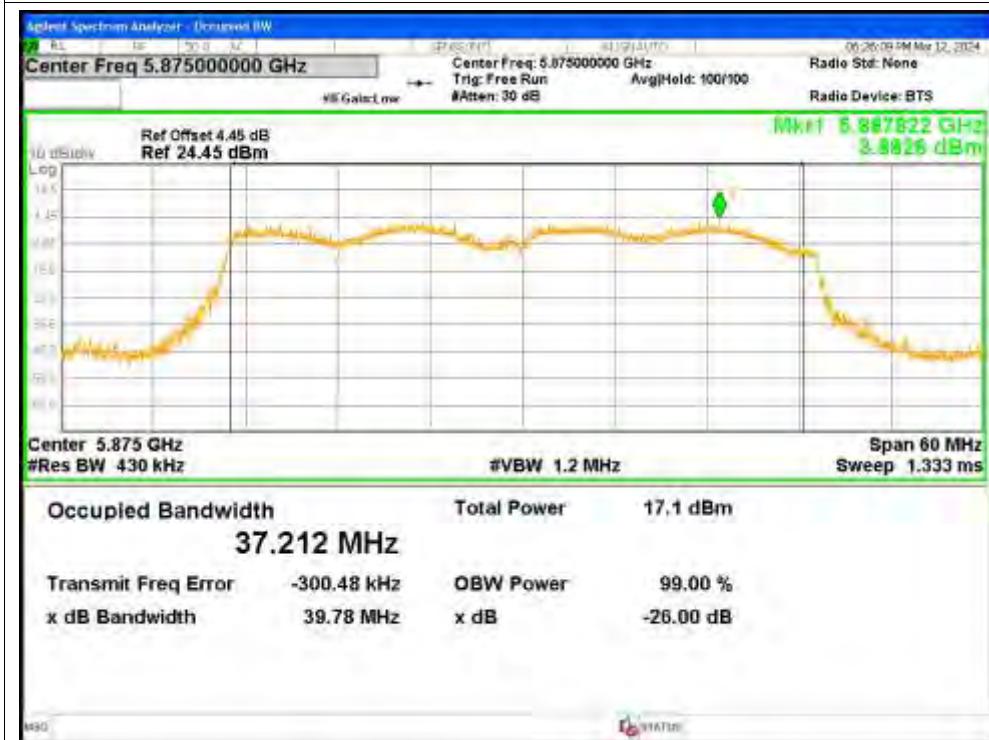


OBW NVNT ax40 5875MHz Ant4

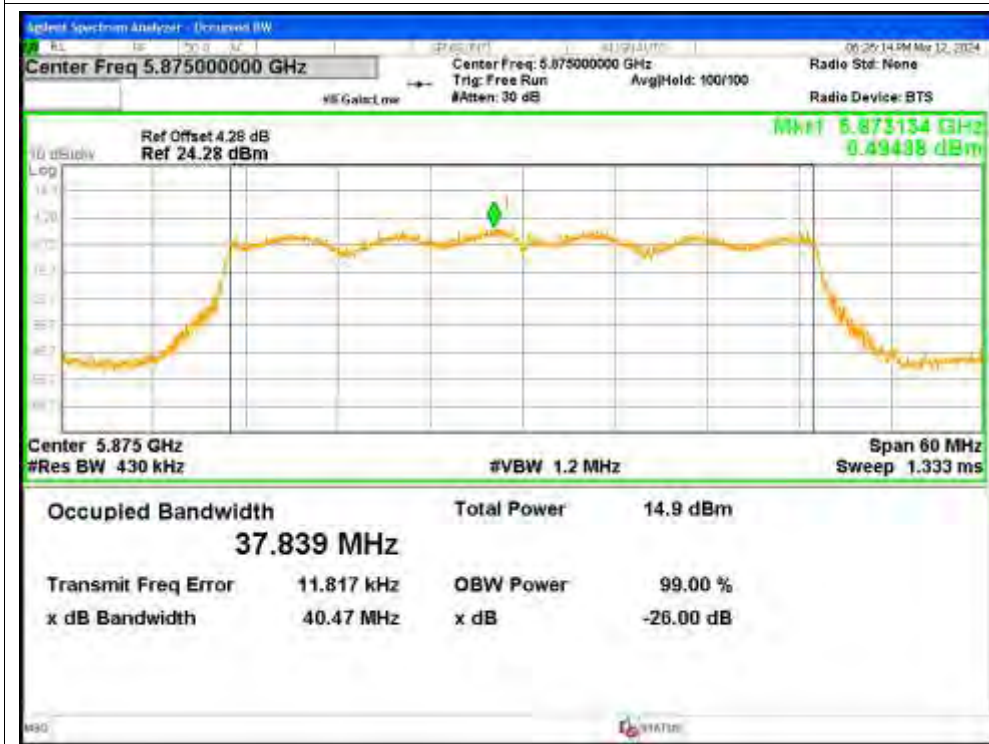


OBW NVNT ax80 5855MHz Ant1

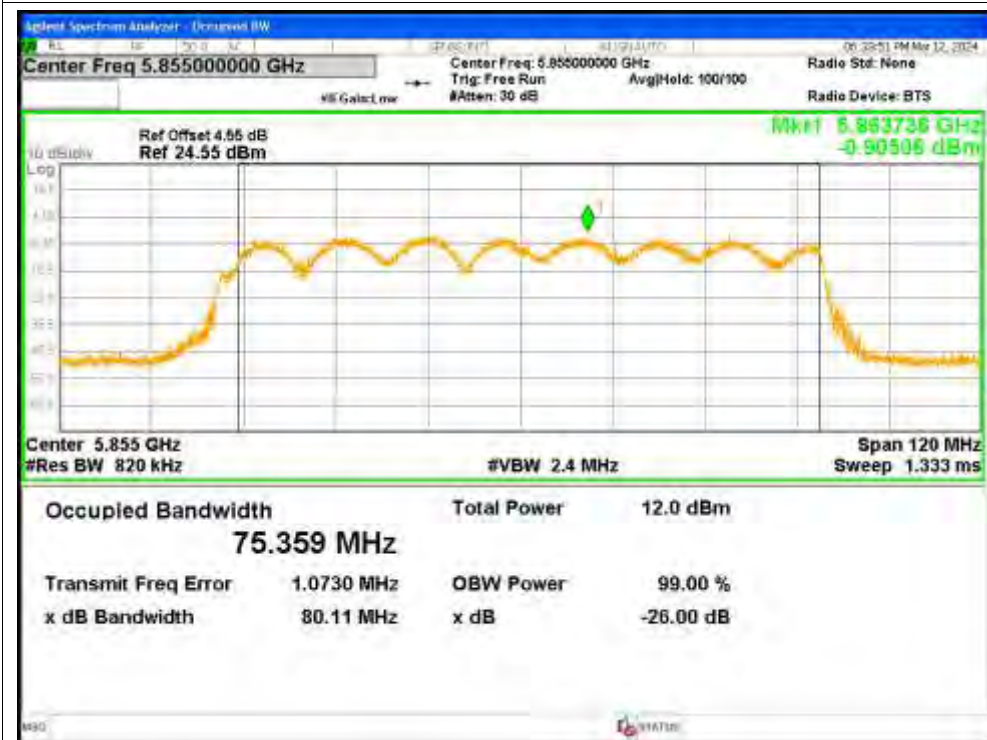


OBW NVNT ax80 5855MHz Ant2

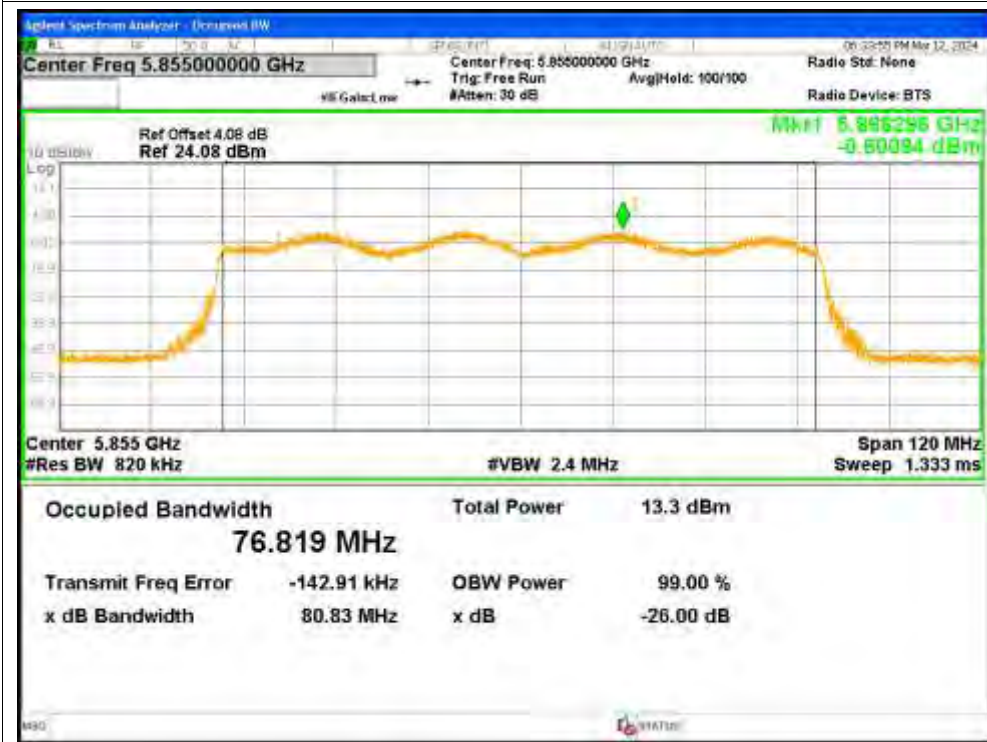


OBW NVNT ax80 5855MHz Ant3

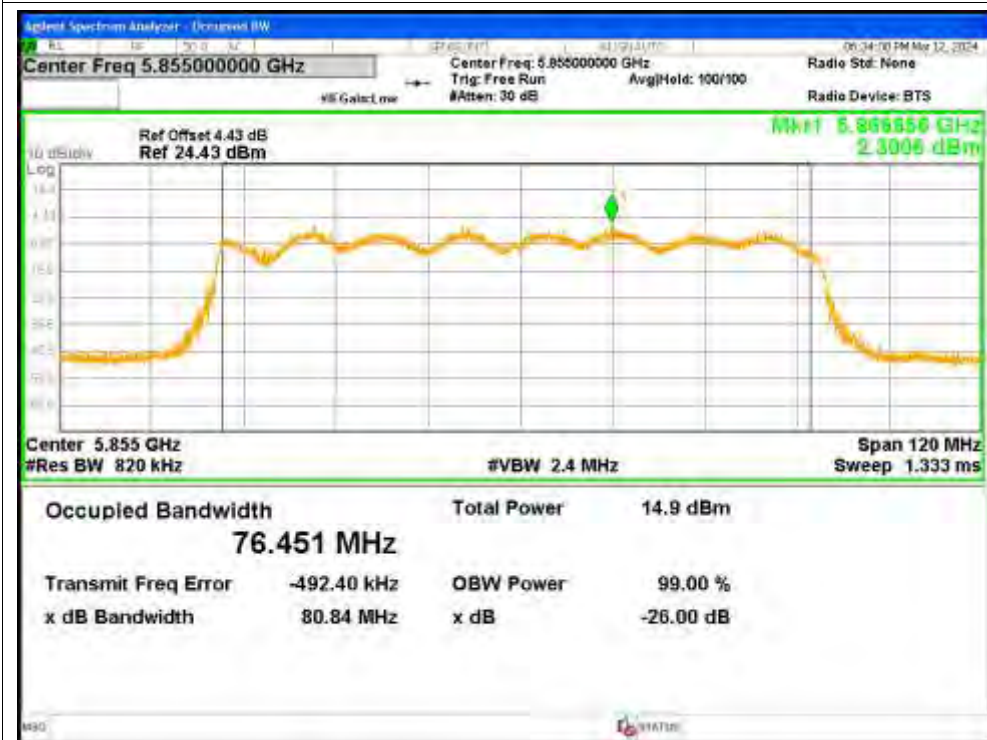


OBW NVNT ax80 5855MHz Ant4

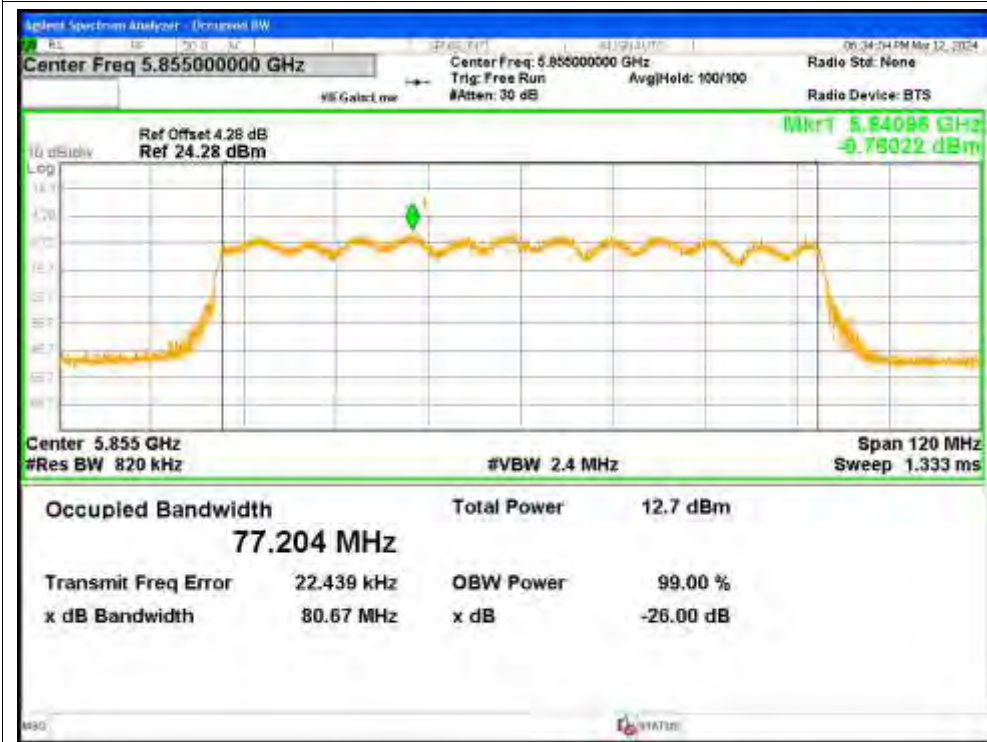


OBW NVNT n20 5845MHz Ant1

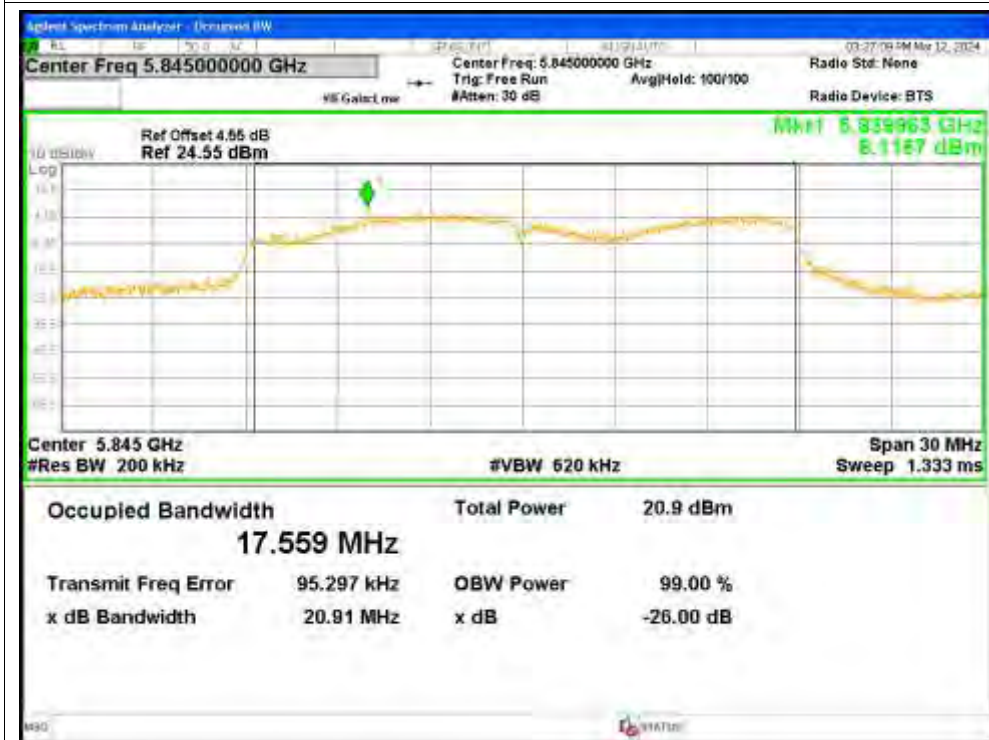


OBW NVNT n20 5845MHz Ant2

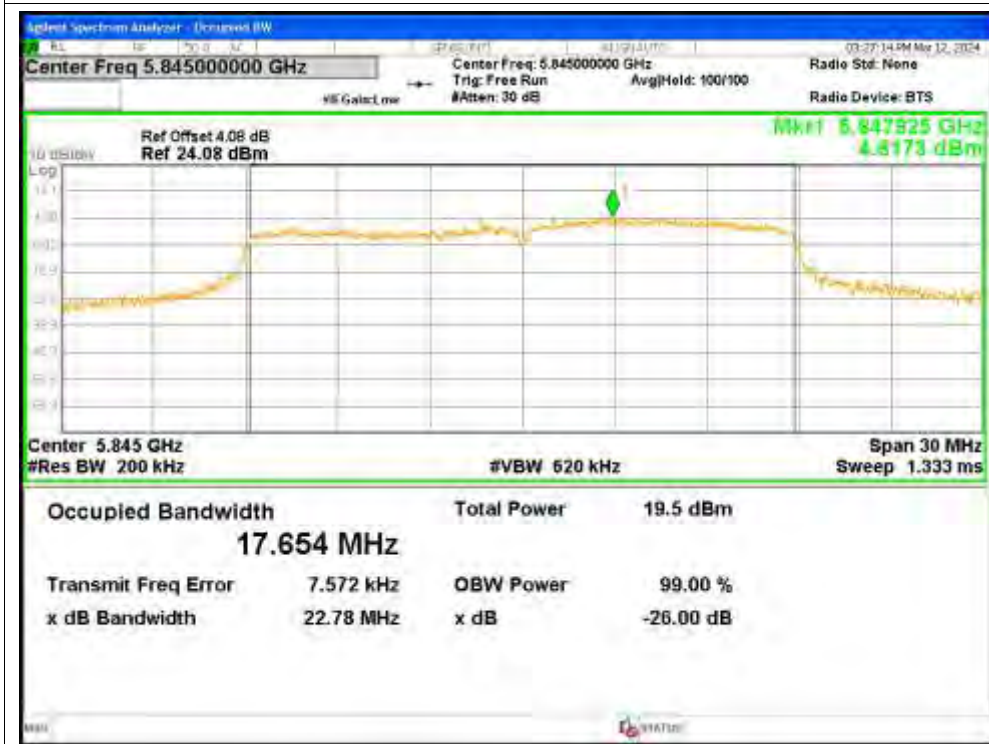


OBW NVNT n20 5845MHz Ant3

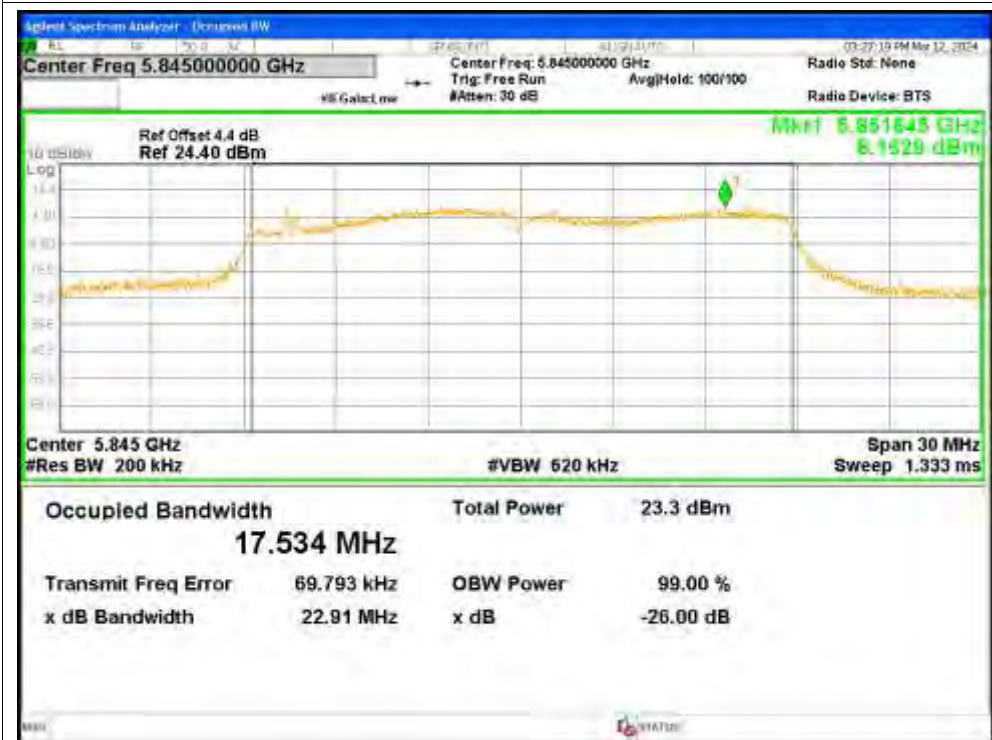


OBW NVNT n20 5845MHz Ant4

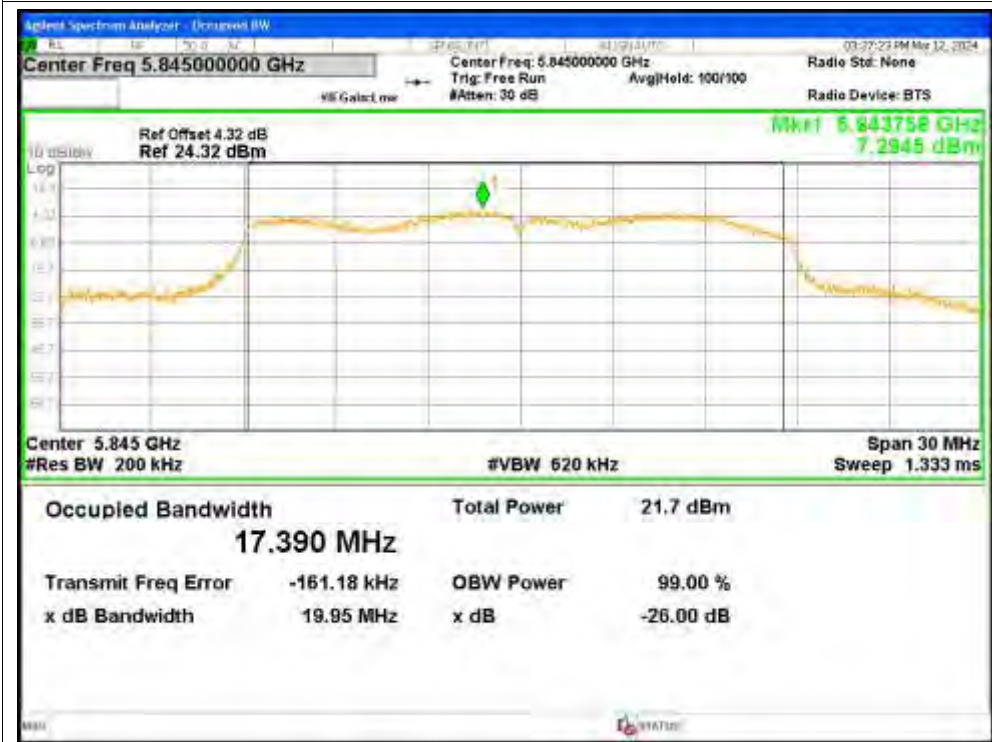


OBW NVNT n20 5865MHz Ant1

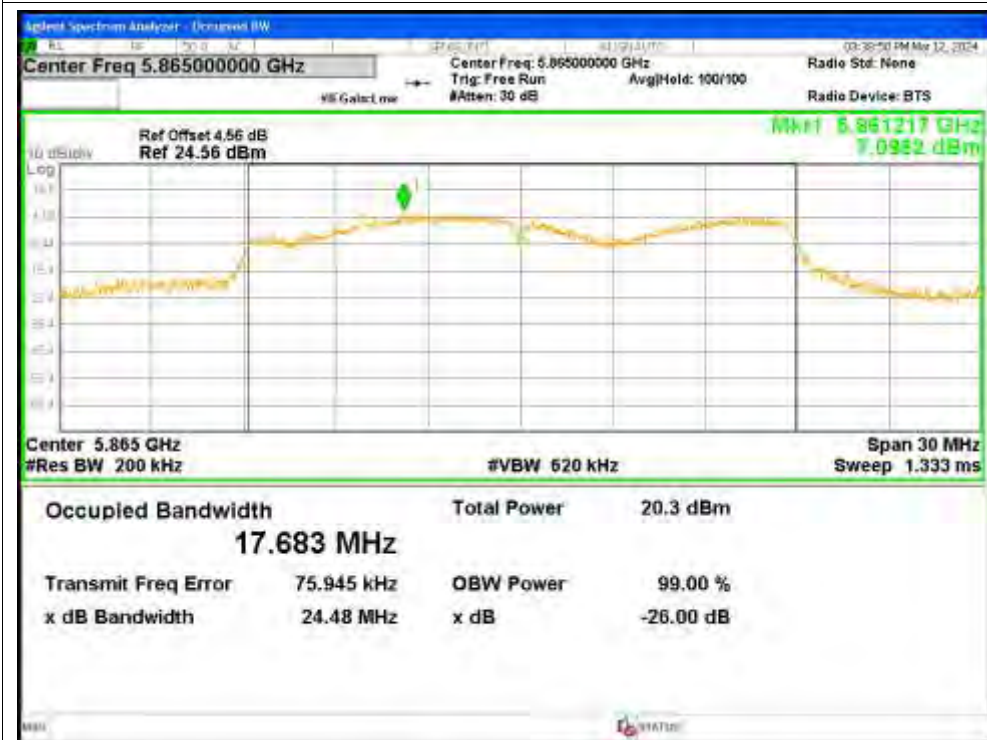


OBW NVNT n20 5865MHz Ant2

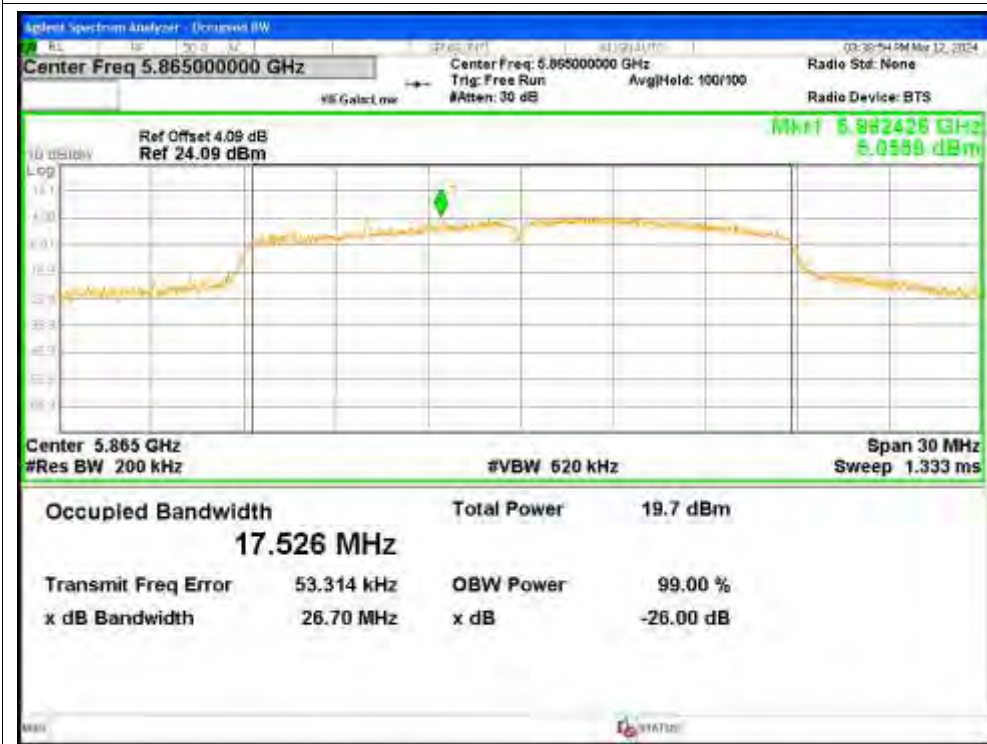

OBW NVNT n20 5865MHz Ant3

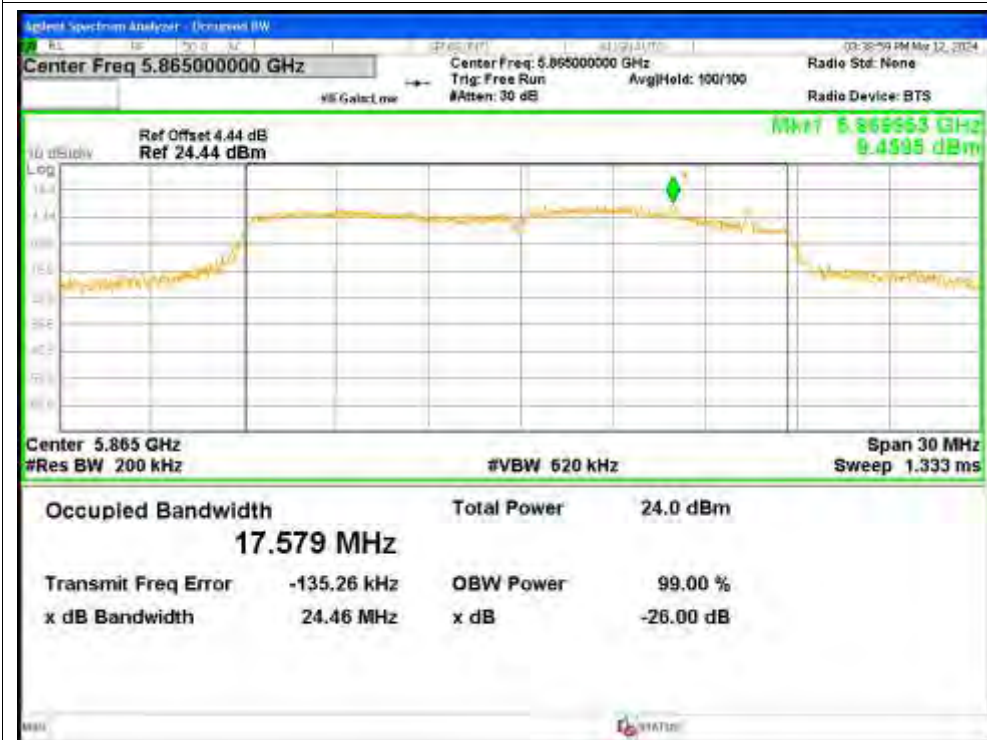


OBW NVNT n20 5865MHz Ant4

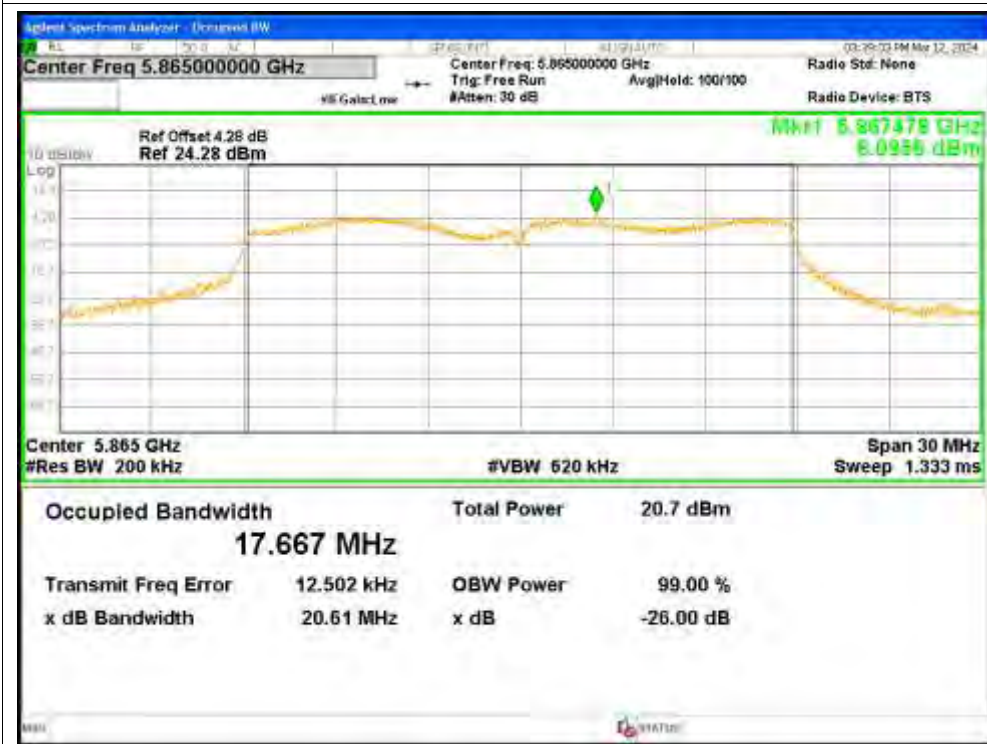

OBW NVNT n20 5885MHz Ant1




OBW NVNT n20 5885MHz Ant2

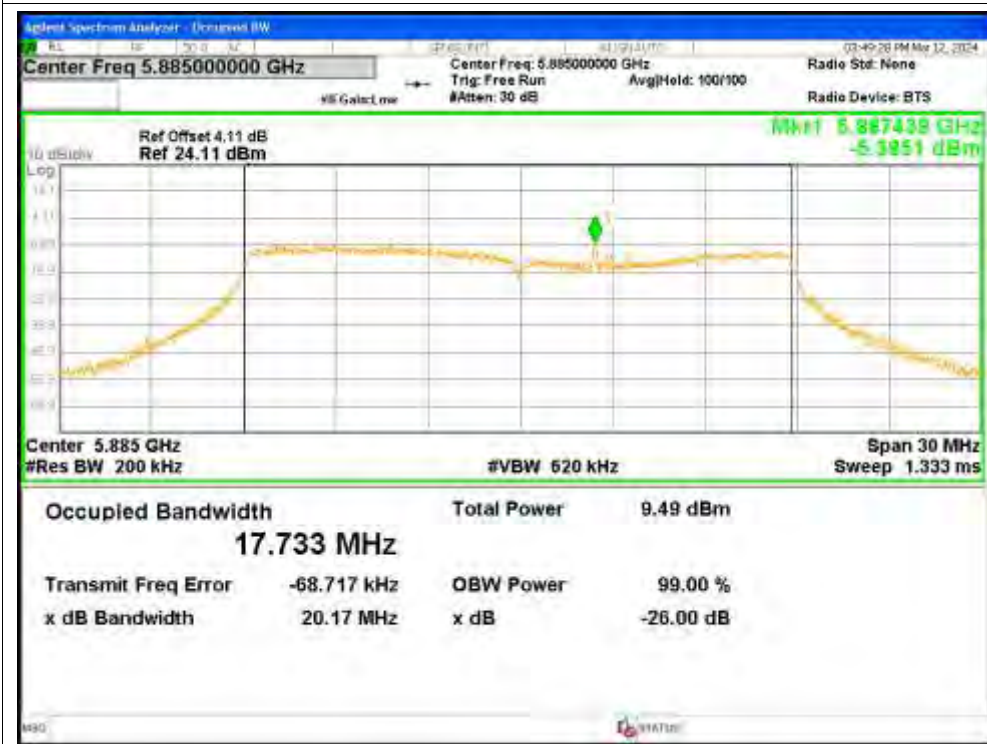


OBW NVNT n20 5885MHz Ant3




OBW NVNT n20 5885MHz Ant4

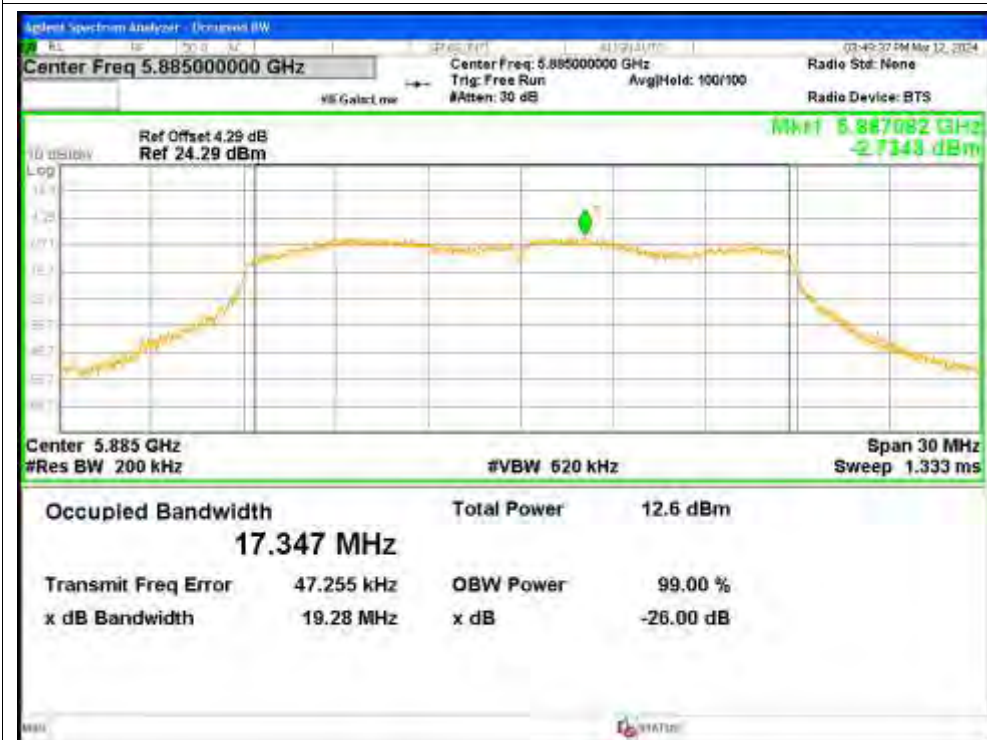

OBW NVNT n40 5835MHz Ant1

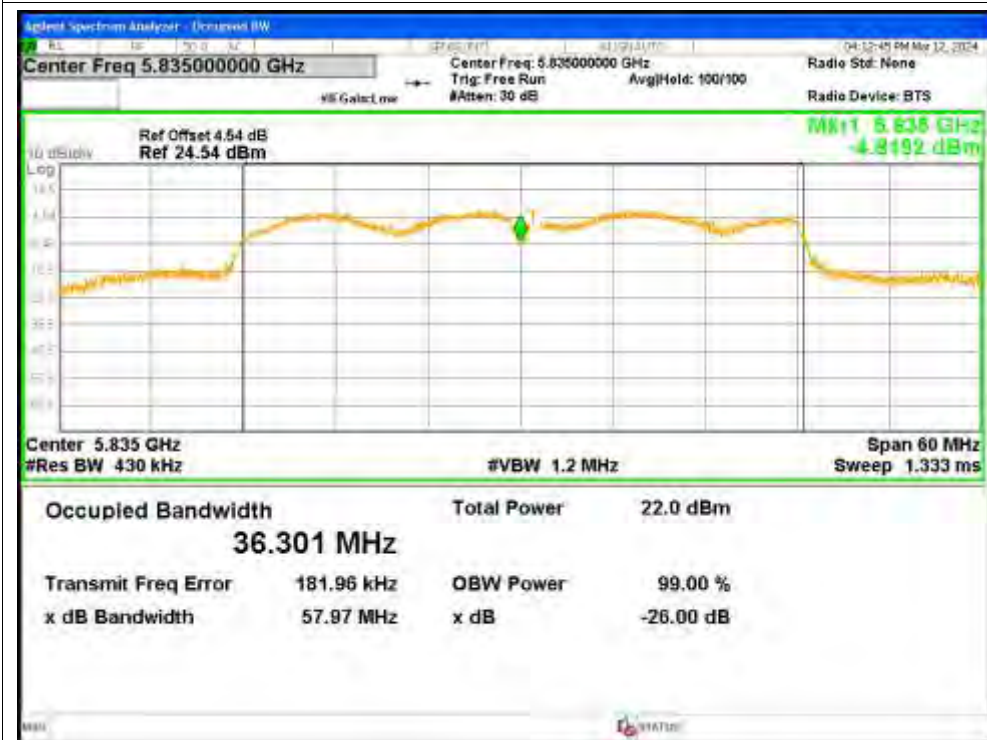


OBW NVNT n40 5835MHz Ant2

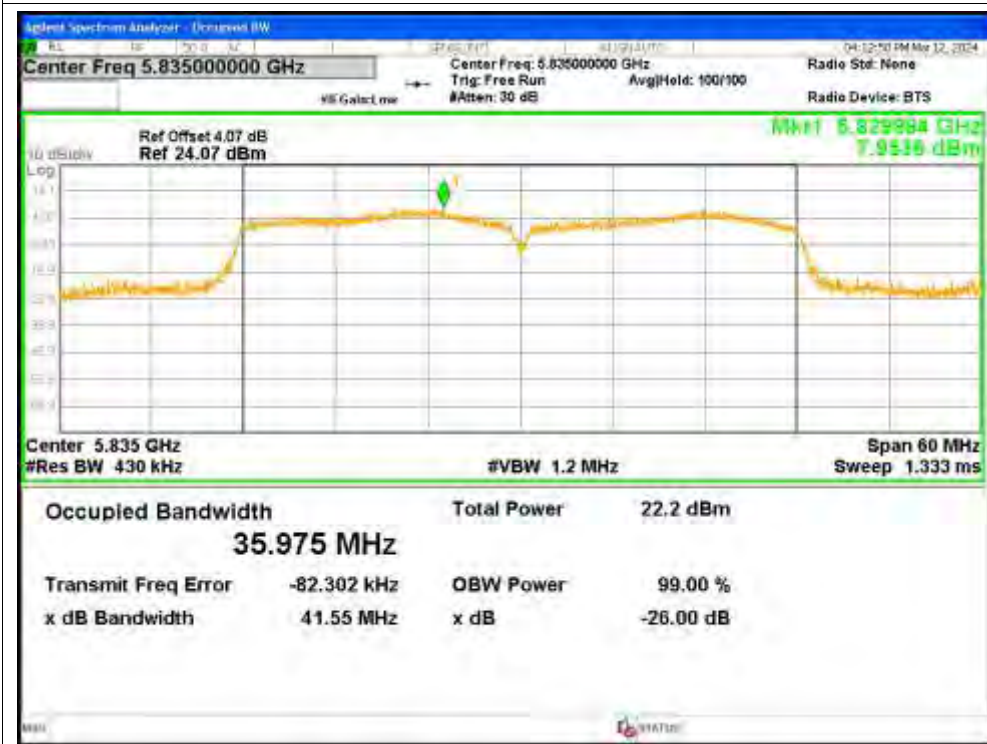


OBW NVNT n40 5835MHz Ant3




OBW NVNT n40 5835MHz Ant4

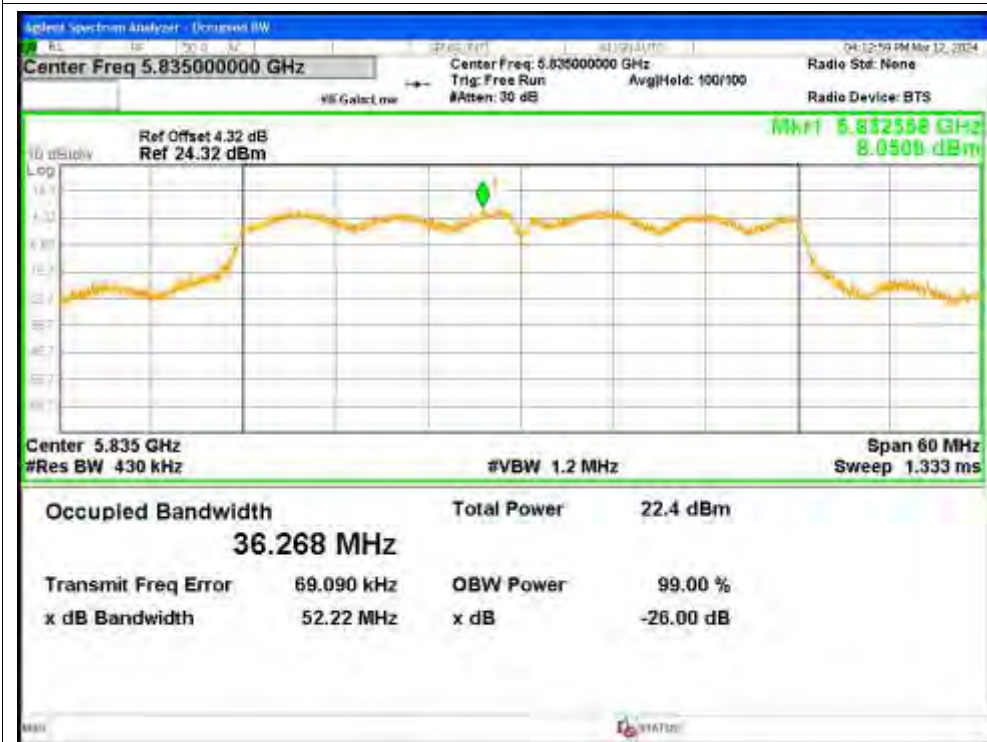


OBW NVNT n40 5875MHz Ant1

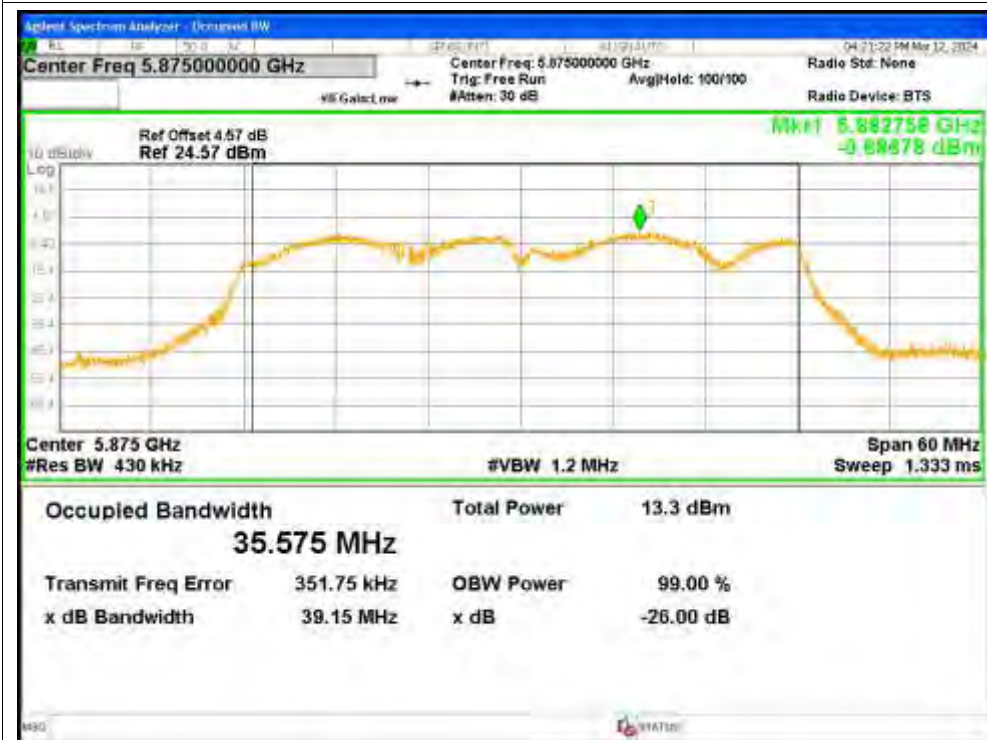


OBW NVNT n40 5875MHz Ant2

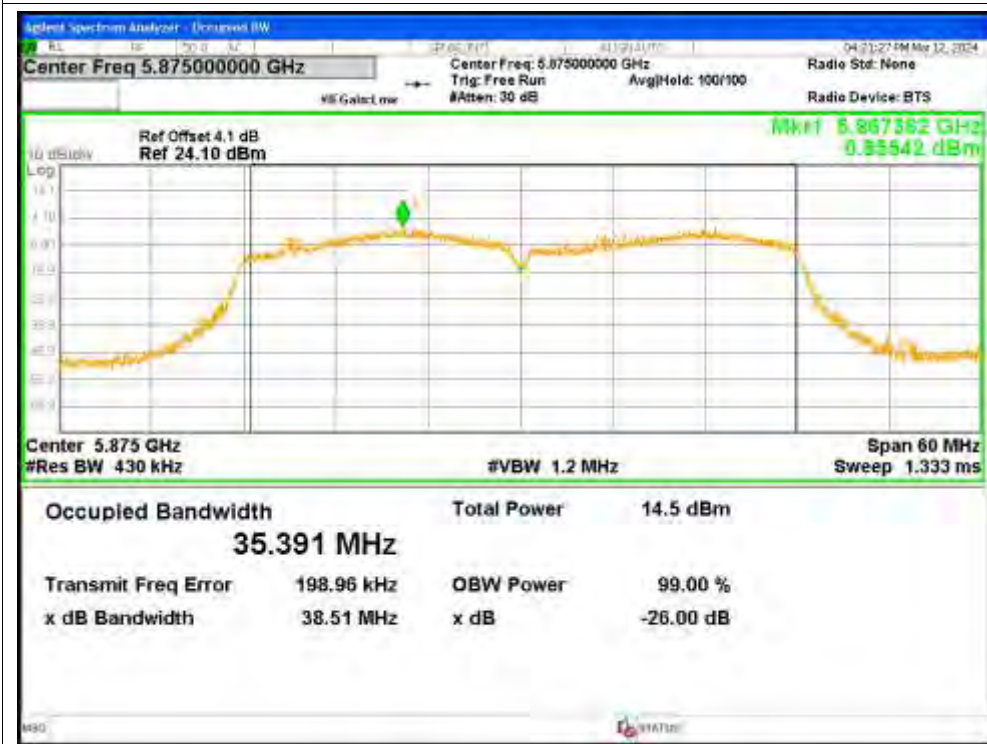

OBW NVNT n40 5875MHz Ant3

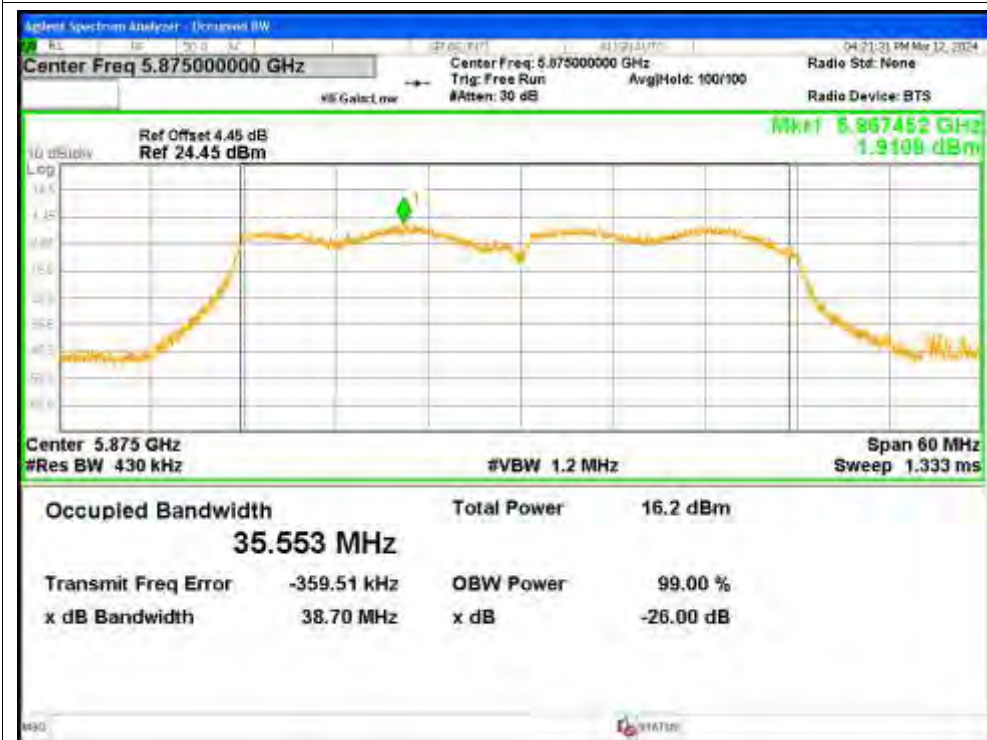

OBW NVNT n40 5875MHz Ant4

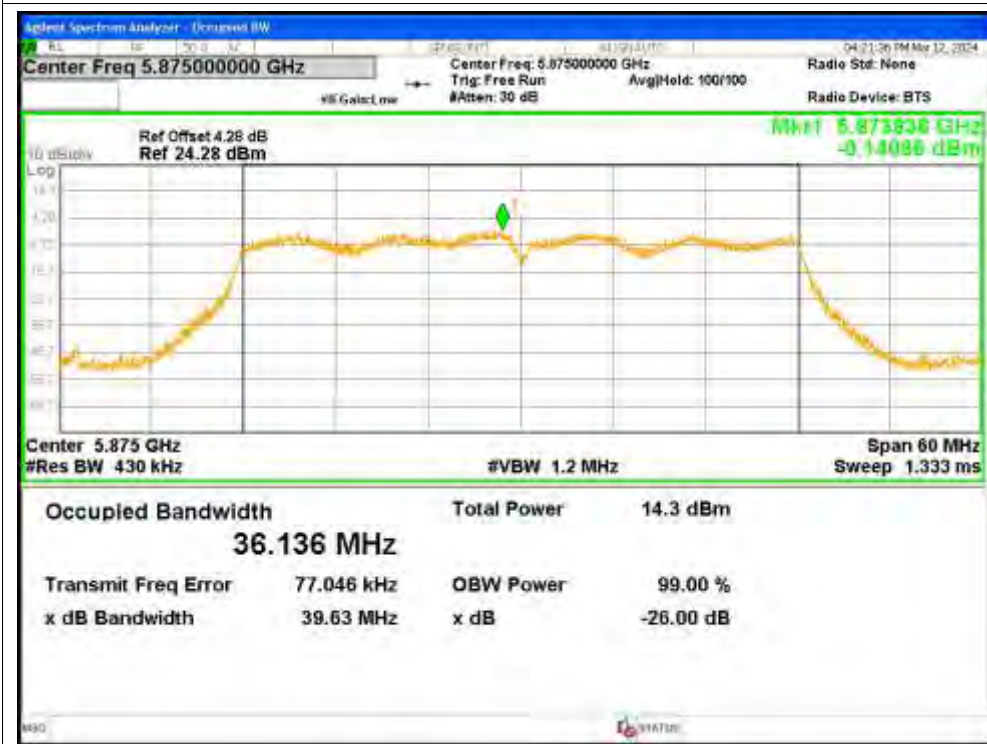

5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm/MHz)	Verdict
NVNT	a	5845	Ant1	7.156	0.15	7.306	<=20	Pass
NVNT	a	5845	Ant2	5.774	0.15	5.924	<=19.99	Pass
NVNT	a	5845	Ant3	9.101	0.15	9.251	<=20	Pass
NVNT	a	5845	Ant4	7.61	0.15	7.76	<=19.99	Pass
NVNT	a	5865	Ant1	6.665	0.17	6.835	<=20	Pass
NVNT	a	5865	Ant2	5.245	0.17	5.415	<=19.99	Pass
NVNT	a	5865	Ant3	9.161	0.17	9.331	<=20	Pass
NVNT	a	5865	Ant4	7	0.17	7.17	<=19.99	Pass
NVNT	a	5885	Ant1	-2.462	0.15	-2.312	<=20	Pass
NVNT	a	5885	Ant2	-3.525	0.15	-3.375	<=19.99	Pass
NVNT	a	5885	Ant3	0.414	0.15	0.564	<=20	Pass
NVNT	a	5885	Ant4	-1.986	0.15	-1.836	<=19.99	Pass
NVNT	ac20	5845	Ant1	6.193	0.96	7.153	<=20	Pass
NVNT	ac20	5845	Ant2	5.766	0.96	6.726	<=19.99	Pass
NVNT	ac20	5845	Ant3	7.801	0.96	8.761	<=20	Pass
NVNT	ac20	5845	Ant4	7.003	0.96	7.963	<=19.99	Pass
NVNT	ac20	5845	Sum	12.782	0.96	13.742	<=14.51	Pass
NVNT	ac20	5865	Ant1	5.74	0.96	6.7	<=20	Pass
NVNT	ac20	5865	Ant2	6.624	0.96	7.584	<=19.99	Pass
NVNT	ac20	5865	Ant3	7.904	0.96	8.864	<=20	Pass
NVNT	ac20	5865	Ant4	5.57	0.96	6.53	<=19.99	Pass
NVNT	ac20	5865	Sum	12.582	0.96	13.542	<=14.51	Pass
NVNT	ac20	5885	Ant1	-3.526	0.96	-2.566	<=20	Pass
NVNT	ac20	5885	Ant2	-2.276	0.96	-1.316	<=19.99	Pass
NVNT	ac20	5885	Ant3	-0.041	0.96	0.919	<=20	Pass
NVNT	ac20	5885	Ant4	-3.642	0.96	-2.682	<=19.99	Pass
NVNT	ac20	5885	Sum	3.908	0.96	4.868	<=14.51	Pass
NVNT	ac40	5835	Ant1	3.631	0.96	4.591	<=20	Pass
NVNT	ac40	5835	Ant2	3.679	0.96	4.639	<=19.99	Pass
NVNT	ac40	5835	Ant3	5.225	0.96	6.185	<=20	Pass
NVNT	ac40	5835	Ant4	4.321	0.96	5.281	<=19.99	Pass
NVNT	ac40	5835	Sum	10.284	0.96	11.244	<=14.51	Pass
NVNT	ac40	5875	Ant1	-4.921	0.96	-3.961	<=20	Pass
NVNT	ac40	5875	Ant2	-3.682	0.96	-2.722	<=19.99	Pass
NVNT	ac40	5875	Ant3	-2.58	0.96	-1.62	<=20	Pass
NVNT	ac40	5875	Ant4	-4.077	0.96	-3.117	<=19.99	Pass
NVNT	ac40	5875	Sum	2.288	0.96	3.248	<=14.51	Pass
NVNT	ac80	5855	Ant1	-10.1	0.97	-9.13	<=20	Pass
NVNT	ac80	5855	Ant2	-9.227	0.97	-8.257	<=19.99	Pass

NVNT	ac80	5855	Ant3	-8.126	0.97	-7.156	<=20	Pass
NVNT	ac80	5855	Ant4	-10.296	0.97	-9.326	<=19.99	Pass
NVNT	ac80	5855	Sum	-3.329	0.97	-2.359	<=14.51	Pass
NVNT	ax20	5845	Ant1	6.15	0.95	7.1	<=20	Pass
NVNT	ax20	5845	Ant2	7.421	0.95	8.371	<=19.99	Pass
NVNT	ax20	5845	Ant3	7.905	0.95	8.855	<=20	Pass
NVNT	ax20	5845	Ant4	6.236	0.95	7.186	<=19.99	Pass
NVNT	ax20	5845	Sum	13.015	0.95	13.965	<=14.51	Pass
NVNT	ax20	5865	Ant1	6.348	0.96	7.308	<=20	Pass
NVNT	ax20	5865	Ant2	7.21	0.96	8.17	<=19.99	Pass
NVNT	ax20	5865	Ant3	8.073	0.96	9.033	<=20	Pass
NVNT	ax20	5865	Ant4	5.918	0.96	6.878	<=19.99	Pass
NVNT	ax20	5865	Sum	12.988	0.96	13.948	<=14.51	Pass
NVNT	ax20	5885	Ant1	-2.978	0.96	-2.018	<=20	Pass
NVNT	ax20	5885	Ant2	-2.551	0.96	-1.591	<=19.99	Pass
NVNT	ax20	5885	Ant3	-0.306	0.96	0.654	<=20	Pass
NVNT	ax20	5885	Ant4	-3.043	0.96	-2.083	<=19.99	Pass
NVNT	ax20	5885	Sum	3.958	0.96	4.918	<=14.51	Pass
NVNT	ax40	5835	Ant1	3.793	0.96	4.753	<=20	Pass
NVNT	ax40	5835	Ant2	4.097	0.96	5.057	<=19.99	Pass
NVNT	ax40	5835	Ant3	5.784	0.96	6.744	<=20	Pass
NVNT	ax40	5835	Ant4	4.065	0.96	5.025	<=19.99	Pass
NVNT	ax40	5835	Sum	10.531	0.96	11.491	<=14.51	Pass
NVNT	ax40	5875	Ant1	-4.334	0.97	-3.364	<=20	Pass
NVNT	ax40	5875	Ant2	-3.637	0.97	-2.667	<=19.99	Pass
NVNT	ax40	5875	Ant3	-1.975	0.97	-1.005	<=20	Pass
NVNT	ax40	5875	Ant4	-4.222	0.97	-3.252	<=19.99	Pass
NVNT	ax40	5875	Sum	2.587	0.97	3.557	<=14.51	Pass
NVNT	ax80	5855	Ant1	-12.515	0.97	-11.545	<=30	Pass
NVNT	ax80	5855	Ant2	-11.606	0.97	-10.636	<=29.99	Pass
NVNT	ax80	5855	Ant3	-10.935	0.97	-9.965	<=30	Pass
NVNT	ax80	5855	Ant4	-13.146	0.97	-12.176	<=29.99	Pass
NVNT	ax80	5855	Sum	-5.948	0.97	-4.978	<=24.51	Pass
NVNT	n20	5845	Ant1	5.999	0.96	6.959	<=20	Pass
NVNT	n20	5845	Ant2	4.404	0.96	5.364	<=19.99	Pass
NVNT	n20	5845	Ant3	7.423	0.96	8.383	<=20	Pass
NVNT	n20	5845	Ant4	6.553	0.96	7.513	<=19.99	Pass
NVNT	n20	5845	Sum	12.249	0.96	13.209	<=14.51	Pass
NVNT	n20	5865	Ant1	5.614	0.96	6.574	<=20	Pass
NVNT	n20	5865	Ant2	4.533	0.96	5.493	<=19.99	Pass
NVNT	n20	5865	Ant3	8.24	0.96	9.2	<=20	Pass
NVNT	n20	5865	Ant4	5.538	0.96	6.498	<=19.99	Pass
NVNT	n20	5865	Sum	12.235	0.96	13.195	<=14.51	Pass
NVNT	n20	5885	Ant1	-3.756	0.95	-2.806	<=20	Pass

NVNT	n20	5885	Ant2	-2.936	0.95	-1.986	<=19.99	Pass
NVNT	n20	5885	Ant3	0.525	0.95	1.475	<=20	Pass
NVNT	n20	5885	Ant4	-2.399	0.95	-1.449	<=19.99	Pass
NVNT	n20	5885	Sum	4.206	0.95	5.156	<=14.51	Pass
NVNT	n40	5835	Ant1	3.684	0.97	4.654	<=20	Pass
NVNT	n40	5835	Ant2	4.071	0.97	5.041	<=19.99	Pass
NVNT	n40	5835	Ant3	5.386	0.97	6.356	<=20	Pass
NVNT	n40	5835	Ant4	4.057	0.97	5.027	<=19.99	Pass
NVNT	n40	5835	Sum	10.37	0.97	11.34	<=14.51	Pass
NVNT	n40	5875	Ant1	-4.952	0.96	-3.992	<=20	Pass
NVNT	n40	5875	Ant2	-3.607	0.96	-2.647	<=19.99	Pass
NVNT	n40	5875	Ant3	-2.331	0.96	-1.371	<=20	Pass
NVNT	n40	5875	Ant4	-3.692	0.96	-2.732	<=19.99	Pass
NVNT	n40	5875	Sum	2.474	0.96	3.434	<=14.51	Pass

Test Graphs

PSD NVNT a 5845MHz Ant1



PSD NVNT a 5845MHz Ant2



PSD NVNT a 5845MHz Ant3



PSD NVNT a 5845MHz Ant4



PSD NVNT a 5865MHz Ant1



PSD NVNT a 5865MHz Ant2



PSD NVNT a 5865MHz Ant3



PSD NVNT a 5865MHz Ant4



PSD NVNT a 5885MHz Ant1



PSD NVNT a 5885MHz Ant2



PSD NVNT a 5885MHz Ant3



PSD NVNT a 5885MHz Ant4



PSD NVNT ac20 5845MHz Ant1



PSD NVNT ac20 5845MHz Ant2



PSD NVNT ac20 5845MHz Ant3



PSD NVNT ac20 5845MHz Ant4



PSD NVNT ac20 5865MHz Ant1



PSD NVNT ac20 5865MHz Ant2



PSD NVNT ac20 5865MHz Ant3



PSD NVNT ac20 5865MHz Ant4



PSD NVNT ac20 5885MHz Ant1



PSD NVNT ac20 5885MHz Ant2



PSD NVNT ac20 5885MHz Ant3



PSD NVNT ac20 5885MHz Ant4



PSD NVNT ac40 5835MHz Ant1



PSD NVNT ac40 5835MHz Ant2



PSD NVNT ac40 5835MHz Ant3



PSD NVNT ac40 5835MHz Ant4



PSD NVNT ac40 5875MHz Ant1



PSD NVNT ac40 5875MHz Ant2




PSD NVNT ac40 5875MHz Ant3



PSD NVNT ac40 5875MHz Ant4



PSD NVNT ac80 5855MHz Ant1

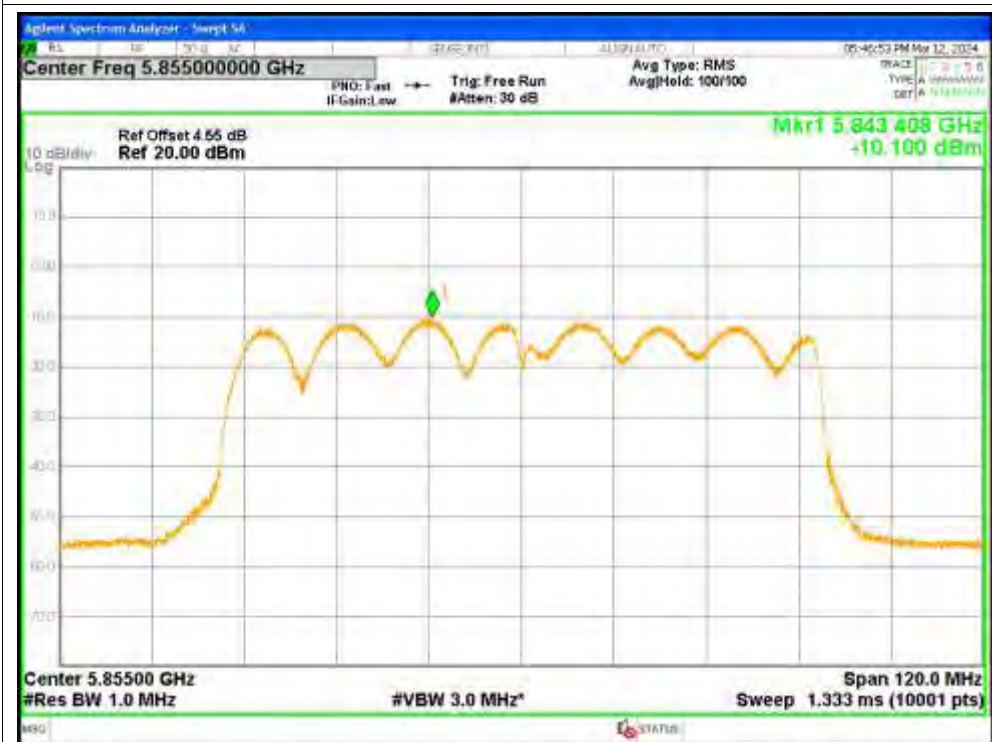


PSD NVNT ac80 5855MHz Ant2



PSD NVNT ac80 5855MHz Ant3



PSD NVNT ac80 5855MHz Ant4

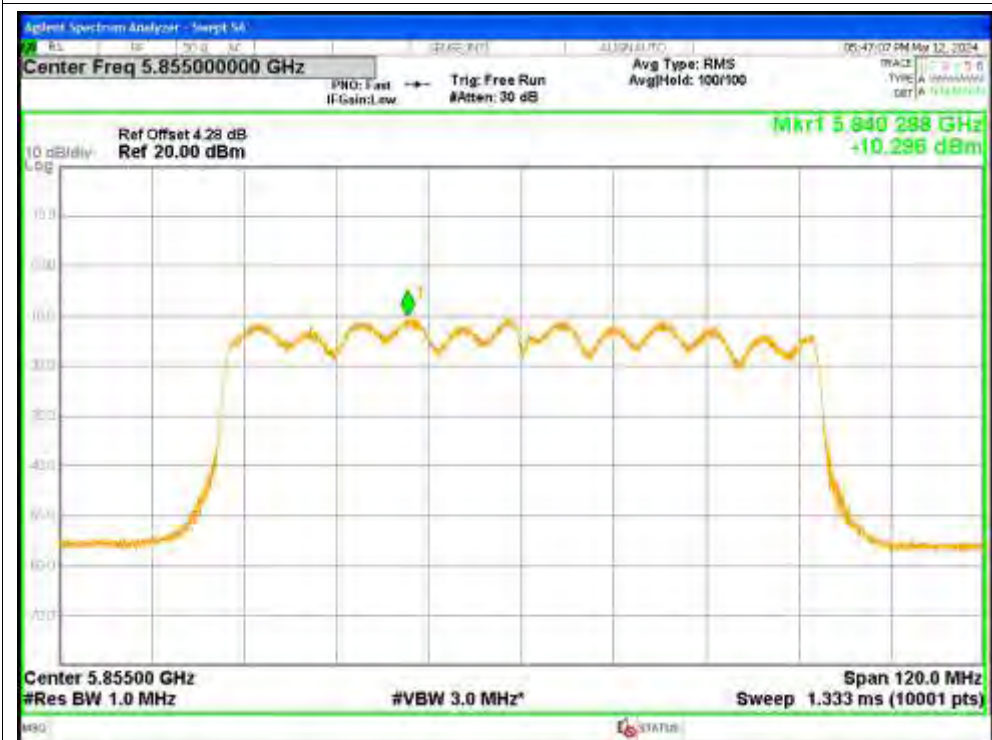

PSD NVNT ax20 5845MHz Ant1



PSD NVNT ax20 5845MHz Ant2



PSD NVNT ax20 5845MHz Ant3



PSD NVNT ax20 5845MHz Ant4



PSD NVNT ax20 5865MHz Ant1



PSD NVNT ax20 5865MHz Ant2



PSD NVNT ax20 5865MHz Ant3



PSD NVNT ax20 5865MHz Ant4



PSD NVNT ax20 5885MHz Ant1



PSD NVNT ax20 5885MHz Ant2



PSD NVNT ax20 5885MHz Ant3



PSD NVNT ax20 5885MHz Ant4



PSD NVNT ax40 5835MHz Ant1



PSD NVNT ax40 5835MHz Ant2



PSD NVNT ax40 5835MHz Ant3



PSD NVNT ax40 5835MHz Ant4



PSD NVNT ax40 5875MHz Ant1



PSD NVNT ax40 5875MHz Ant2



PSD NVNT ax40 5875MHz Ant3



PSD NVNT ax40 5875MHz Ant4



PSD NVNT ax80 5855MHz Ant1



PSD NVNT ax80 5855MHz Ant2



PSD NVNT ax80 5855MHz Ant3



PSD NVNT ax80 5855MHz Ant4



PSD NVNT n20 5845MHz Ant1



PSD NVNT n20 5845MHz Ant2



PSD NVNT n20 5845MHz Ant3



PSD NVNT n20 5845MHz Ant4



PSD NVNT n20 5865MHz Ant1



PSD NVNT n20 5865MHz Ant2



PSD NVNT n20 5865MHz Ant3



PSD NVNT n20 5865MHz Ant4



PSD NVNT n20 5885MHz Ant1



PSD NVNT n20 5885MHz Ant2



PSD NVNT n20 5885MHz Ant3



PSD NVNT n20 5885MHz Ant4



PSD NVNT n40 5835MHz Ant1



PSD NVNT n40 5835MHz Ant2



PSD NVNT n40 5835MHz Ant3



PSD NVNT n40 5835MHz Ant4



PSD NVNT n40 5875MHz Ant1



PSD NVNT n40 5875MHz Ant2



PSD NVNT n40 5875MHz Ant3



PSD NVNT n40 5875MHz Ant4

