

User Manual IPS-355 (UXS-IPS355)

 designed and manufactured in Germany


Version 1.0 - 19.02.2019

PRODUCT FAMILY

K-Band Transceiver


APPLICATIONS

- Door Opener
- Industrial Applications



FEATURES:

- » radar-based motion detector working in the 24GHz - ISM - Band
- » split transmit and receive path for maximum gain
- » IF-pre-amplifier, bandwidth limited for lowest noise performance
- » stereo (dual channel) operation for direction of motion identification
- » compact outline dimensions

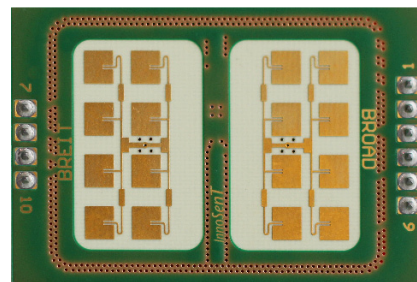

DESCRIPTION

The IPS-355 is a K-Band Transceiver with a split transmit and receive antenna.

Certificates available on request

CERTIFICATES

InnoSenT GmbH has established and applies a quality system for: development, production and sales of radar sensors for industrial and automotive sensors.

<https://www.innosent.de/en/company/certifications/>

ADDITIONAL INFORMATION

InnoSenT Standard Product. Changes will not be notified as long as there is no influence on form, fit and within this user manual specified function of the product.

RoHS-INFO

This product is compliant to the restriction of hazardous substances (RoHS - European Union directive 2011/65/EU).

CONFIDENTIAL AND PROPRIETARY

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.

ELECTRICAL CHARACTERISTICS

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNITS
-----------	------------	--------	-----	-----	-----	-------

Transmitter

transmit frequencies	frequency band for US and EU	$f_{IPS-355}$	24.150		24.250	GHz
temperature drift (frequency)				t.b.d.		
output power (EIRP)		P_{out}		11.6	12.7	dBm
transmitter turn on time				10		μ s

Receiver

IF-Bandwidth (-3dB)		B	0		1	MHz
signal level (RSC= $8.4 * 10^{-4} \text{ m}^2$)		IF		t.b.d.		mV
noise level	100Hz... 1kHz	$N_{1/2}$		t.b.d.		mVrms
IF voltage offset		$IF_{DC-offset}$	1	2.5	4	V
I/Q balance amplitude			0		6	db
phase			60	90	120	$^{\circ}$

Power supply

supply voltage		V_{CC}	4.25	5.0	5.75	V
supply current		I_{CC}		48	60	mA

Environment

operating temperature		T_{OP}	-30		+60	$^{\circ}$ C
storage temperature		T_{STG}	-30		+60	$^{\circ}$ C

Mechanical Outlines



outline dimensions	compare drawing	height length width		8.3 (19) 44.0 30.0		mm
--------------------	-----------------	---------------------------	--	--------------------------	--	----

CONFIDENTIAL AND PROPRIETARY

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.

TX- ANTENNA PATTERN

Antenna Orientation:

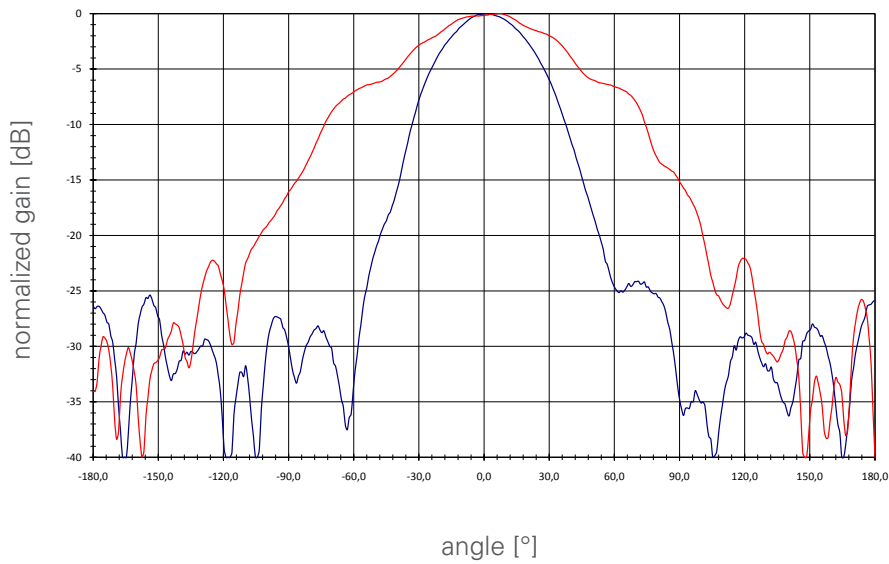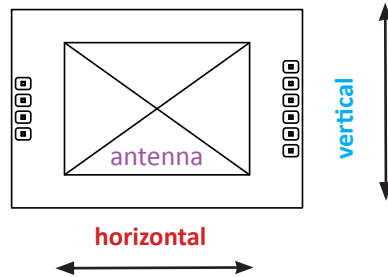

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNITS
full beam width @ -3dB		horizontal		70		°
		vertical		36		°
side-lobe suppression		horizontal		13		dB
		vertical		13		dB

CONFIDENTIAL AND PROPRIETARY

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.

INTERFACE


The sensor provides a 2.54mm grid, single row pin header (square pin \square 0.635mm).

PIN #	DESCRIPTION	IN / OUT	COMMENT
1	d.n.c		do not connect
2	enable	input	active low, the enable pin is used to switch off the power supply of the OSC enable on: 0 - 0.8V enable off: 2.8 - 3.3V
3	V _{cc}	input	supply voltage, 5V +/- 15%
4	GND	input	analog ground
5	IF1	output	signal I(nphase)
6	IF2	output	signal Q(uadrature)
7	d.n.c		do not connect
8	d.n.c		do not connect
9	d.n.c.		do not connect
10	d.n.c		do not connect



CONFIDENTIAL AND PROPRIETARY

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.


MECHANICAL OUTLINES

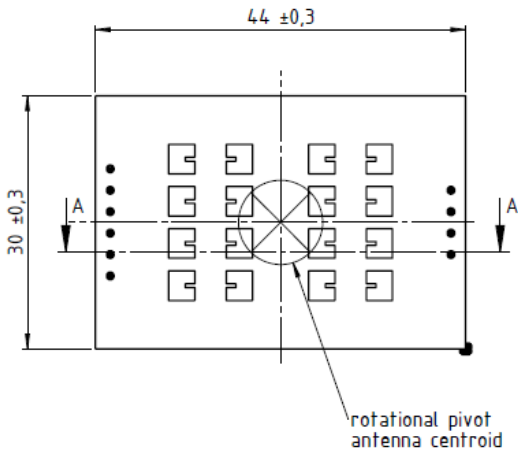

top view

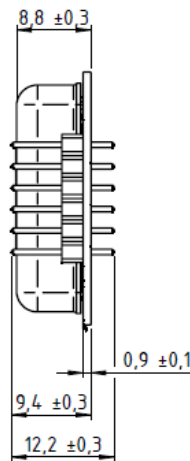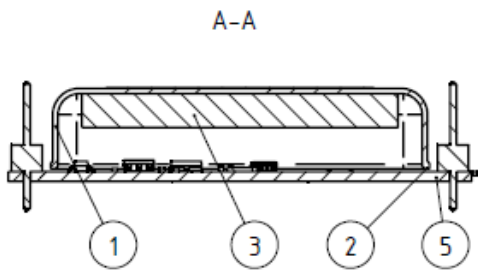

side view

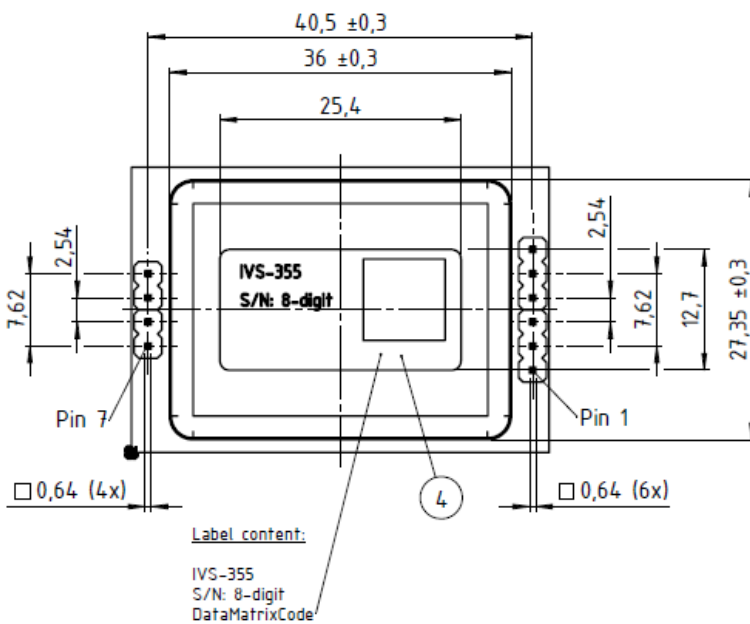

bottom view

CONFIDENTIAL AND PROPRIETARY


The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.

Annex A

The information that will be given below is only a rough overview; for details please contact the local approval agencies. An overview over the frequency bands in Europe can also be found in the REC 70-03 (Annex 6) which is available under www.ero.dk

Frequency Bands in US FCC 15.249

For the US-market the IPS-355 can be used

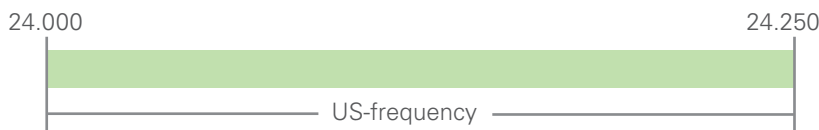

FCC approval

This device complies with Part 15 of the FCC Rules and with RSS-310 of Industry Canada. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications made to this equipment not expressly approved by InnoSenT GmbH may void the FCC authorization to operate this equipment.

Manufacturers of mobile or fixed devices incorporating IPS-355 Modules are authorized to use the FCC Grants for their own final products according to the conditions referenced in these documents. In this case, the FCC label of the module shall be visible from the outside, or the host device shall bear a second label stating „Contains FCC ID: UXS-IPS355“

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

CONFIDENTIAL AND PROPRIETARY

The information contained in this document shall remain the sole and exclusive property of InnoSenT GmbH and shall not be disclosed by the recipient to third parties without prior consent of InnoSenT in writing.

ESD-INFORMATION



This InnoSenT sensor is sensitive to damage from ESD. Normal precautions as usually applied to CMOS devices are sufficient when handling the device. Touching the signal output pins has to be avoided at any time before soldering or plugging the device into a motherboard.

APPROVAL

This Data Sheet contains the technical specifications of the described product. All previous versions of this Data Sheet are no longer valid.

The sensor uses Hydrocarbon based material which may change its dielectric properties when used in an oxidative environment. This may vary based on temperature. Therefore InnoSenT recommends evaluating this influence within the specific environment.

VERSION	DATE	COMMENT
1.0	19.02.2019	initial release

InnoSenT GmbH

Am Rödertor 30
97499 Donnersdorf
GERMANY

Tel.: +49 (0) 9528 - 9518 - 0
E-Mail: info@innosent.de
URL: www.innosent.de