



### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

**For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz**

**<CDD Modes>**

**# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW  $\geq$  3 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

**For devices operating in the band 5.725 - 5.85 GHz**

**# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500 kHz.
- Set VBW  $\geq$  1 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.



<TXBF Modes>

# Method SA-3 #

(power averaging (rms) detection with max hold):

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time  $\leq$  (number of points in sweep)  $\times$  T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
  - Detector = power averaging (rms).
  - Trace mode = max hold.
  - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
  3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

**For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz**

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

Method (c): Measure and add  $10 \log(N_{ANT})$  dB, where  $N_{ANT}$  is the number of outputs.


The measurement on each individual output were performed with the same span and number on each individual output. The quantity  $10 \log(N_{ANT})$  dB is added to each spectrum value before comparing to the emission limit.

**For devices operating in the band 5.725 - 5.85 GHz**

Method (c): Measure and add  $10 \log(N_{ANT})$  dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity  $10 \log(N_{ANT})$  dB is added to each spectrum value before comparing to the emission limit. The addition of  $10 \log(N_{ANT})$  dB serves to apportion the emission limit among the  $N_{ANT}$  outputs so that each output is permitted to contribute no more than  $1/N_{ANT}^{th}$  of the PSD limit.

**3.3.4 Test Setup**

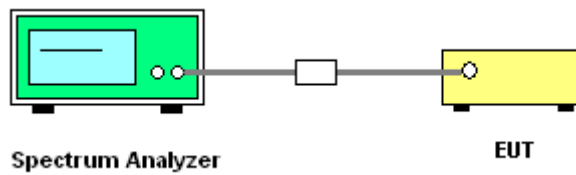

**3.3.5 Test Result of Power Spectral Density**

Test Engineer:	Jacob Zhang	Temperature:	21~25°C
		Relative Humidity:	51~54%

Test Mode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A-CDD	total	5180	10.79	≤11.00	PASS
	total	5220	10.32	≤11.00	PASS
	total	5240	10.35	≤11.00	PASS
	Ant1	5260	6.27	≤11.00	PASS
	Ant2	5260	6.79	≤11.00	PASS
	total	5260	9.55	≤11.00	PASS
	Ant1	5300	6.45	≤11.00	PASS
	Ant2	5300	6.64	≤11.00	PASS
	total	5300	9.56	≤11.00	PASS
	Ant1	5320	6.24	≤11.00	PASS
	Ant2	5320	6.38	≤11.00	PASS
	total	5320	9.32	≤11.00	PASS
	Ant1	5500	7.79	≤11.00	PASS
	Ant2	5500	7.49	≤11.00	PASS
	total	5500	10.55	≤11.00	PASS
	Ant1	5580	6.62	≤11.00	PASS
	Ant2	5580	6.63	≤11.00	PASS
	total	5580	9.64	≤11.00	PASS
	Ant1	5700	5.95	≤11.00	PASS
	Ant2	5700	6.92	≤11.00	PASS
total	5700	9.47	≤11.00	PASS	
	Ant1	5720_UNII-2C	6.42	≤11.00	PASS



	Ant2	5720_UNII-2C	6.96	≤11.00	PASS
	total	5720_UNII-2C	9.71	≤11.00	PASS
	Ant1	5720_UNII-3	1.13	≤11.00	PASS
	Ant2	5720_UNII-3	1.57	≤11.00	PASS
	total	5720_UNII-3	4.37	≤11.00	PASS
	Ant1	5745	6.5	≤30.00	PASS
	Ant2	5745	6.54	≤30.00	PASS
	total	5745	9.53	≤30.00	PASS
	Ant1	5785	6.63	≤30.00	PASS
	Ant2	5785	6.37	≤30.00	PASS
	total	5785	9.51	≤30.00	PASS
	Ant1	5825	5.45	≤30.00	PASS
	Ant2	5825	11.29	≤30.00	PASS
	total	5825	9.35	≤30.00	PASS
	11AX20MIMO	Ant1	5180	7.32	≤11.00
Ant2		5180	8.22	≤11.00	PASS
total		5180	10.91	≤11.00	PASS
Ant1		5220	6.03	≤11.00	PASS
Ant2		5220	7.02	≤11.00	PASS
total		5220	9.56	≤11.00	PASS
Ant1		5240	6.17	≤11.00	PASS
Ant2		5240	7.15	≤11.00	PASS
total		5240	9.70	≤11.00	PASS
Ant1		5260	6.43	≤11.00	PASS
Ant2		5260	7.21	≤11.00	PASS
total		5260	9.85	≤11.00	PASS
Ant1		5300	6.98	≤11.00	PASS
Ant2		5300	6.57	≤11.00	PASS
total		5300	9.79	≤11.00	PASS
Ant1		5320	6.81	≤11.00	PASS
Ant2		5320	6.81	≤11.00	PASS
total		5320	9.82	≤11.00	PASS
Ant1		5500	7.83	≤11.00	PASS
Ant2		5500	7.88	≤11.00	PASS
total		5500	10.97	≤11.00	PASS
Ant1		5580	6.94	≤11.00	PASS
Ant2		5580	6.61	≤11.00	PASS
total		5580	9.79	≤11.00	PASS
Ant1		5700	6.52	≤11.00	PASS
Ant2		5700	6.93	≤11.00	PASS
total		5700	9.74	≤11.00	PASS
Ant1		5720_UNII-2C	6.8	≤11.00	PASS
Ant2		5720_UNII-2C	7.18	≤11.00	PASS
total		5720_UNII-2C	10.00	≤11.00	PASS
Ant1		5720_UNII-3	1.36	≤11.00	PASS
Ant2		5720_UNII-3	1.78	≤11.00	PASS
total		5720_UNII-3	4.59	≤11.00	PASS
Ant1	5745	6.69	≤30.00	PASS	
Ant2	5745	6.79	≤30.00	PASS	
total	5745	9.75	≤30.00	PASS	



	Ant1	5785	7.02	≤30.00	PASS
	Ant2	5785	6.64	≤30.00	PASS
	total	5785	9.84	≤30.00	PASS
	Ant1	5825	5.88	≤30.00	PASS
	Ant2	5825	6.05	≤30.00	PASS
	total	5825	11.28	≤30.00	PASS
11AX40MIMO	Ant1	5190	4.15	≤11.00	PASS
	Ant2	5190	4.56	≤11.00	PASS
	total	5190	7.37	≤11.00	PASS
	Ant1	5230	3.78	≤11.00	PASS
	Ant2	5230	4.5	≤11.00	PASS
	total	5230	7.17	≤11.00	PASS
	Ant1	5270	3.23	≤11.00	PASS
	Ant2	5270	3.64	≤11.00	PASS
	total	5270	6.45	≤11.00	PASS
	Ant1	5310	2.18	≤11.00	PASS
	Ant2	5310	1.93	≤11.00	PASS
	total	5310	5.07	≤11.00	PASS
	Ant1	5510	1.98	≤11.00	PASS
	Ant2	5510	2.42	≤11.00	PASS
	total	5510	5.22	≤11.00	PASS
	Ant1	5550	4.21	≤11.00	PASS
	Ant2	5550	3.57	≤11.00	PASS
	total	5550	6.91	≤11.00	PASS
	Ant1	5670	3.73	≤11.00	PASS
	Ant2	5670	3.85	≤11.00	PASS
	total	5670	6.80	≤11.00	PASS
	Ant1	5710_UNII-2C	3.8	≤11.00	PASS
	Ant2	5710_UNII-2C	3.9	≤11.00	PASS
	total	5710_UNII-2C	6.86	≤11.00	PASS
	Ant1	5710_UNII-3	0.39	≤11.00	PASS
	Ant2	5710_UNII-3	0.44	≤11.00	PASS
	total	5710_UNII-3	3.43	≤11.00	PASS
	Ant1	5755	1.83	≤30.00	PASS
	Ant2	5755	1.84	≤30.00	PASS
	total	5755	4.85	≤30.00	PASS
Ant1	5795	2.28	≤30.00	PASS	
Ant2	5795	2.02	≤30.00	PASS	
total	5795	5.16	≤30.00	PASS	
11AX80MIMO	Ant1	5210	0.23	≤11.00	PASS
	Ant2	5210	0.48	≤11.00	PASS
	total	5210	3.37	≤11.00	PASS
	Ant1	5290	-1.01	≤11.00	PASS
	Ant2	5290	-0.35	≤11.00	PASS
	total	5290	2.34	≤11.00	PASS
	Ant1	5530	-0.51	≤11.00	PASS
	Ant2	5530	-0.43	≤11.00	PASS
	total	5530	2.54	≤11.00	PASS
	Ant1	5610	1.2	≤11.00	PASS
	Ant2	5610	0.71	≤11.00	PASS



	total	5610	3.97	≤11.00	PASS
	Ant1	5690_UNII-2C	0.93	≤11.00	PASS
	Ant2	5690_UNII-2C	1.05	≤11.00	PASS
	total	5690_UNII-2C	4.00	≤11.00	PASS
	Ant1	5690_UNII-3	-2.71	≤11.00	PASS
	Ant2	5690_UNII-3	-2.52	≤11.00	PASS
	total	5690_UNII-3	0.40	≤11.00	PASS
	Ant1	5775	-0.62	≤30.00	PASS
	Ant2	5775	-0.99	≤30.00	PASS
	total	5775	2.21	≤30.00	PASS

**Note :**

1. The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.

11ax Partial RU of U NII-1													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	36	5180	26RU			10.78	11.00	4.61		Pass	
HE20	MCS0	2	36	5180	52RU			10.89	11.00	4.61		Pass	
HE20	MCS0	2	36	5180	106RU			10.90	11.00	4.61		Pass	
HE20	MCS0	2	44	5220	26/0			9.35	11.00	4.61		Pass	
HE20	MCS0	2	44	5220	52/37			9.26	11.00	4.61		Pass	
HE20	MCS0	2	44	5220	106/53			9.39	11.00	4.61		Pass	
HE20	MCS0	2	48	5240	26/8			9.62	11.00	4.61		Pass	
HE20	MCS0	2	48	5240	52/40			9.49	11.00	4.61		Pass	
HE20	MCS0	2	48	5240	106/54			9.44	11.00	4.61		Pass	
HE40	MCS0	2	38	5190	242/61			7.03	11.00	4.61		Pass	
HE40	MCS0	2	46	5230	242/62			6.82	11.00	4.61		Pass	
HE80	MCS0	2	42	5210	484/65			3.03	11.00	4.61		Pass	



11ax Partial RU of U NII-2A													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	52	5260	26/0			9.69		11.00		4.87	Pass
HE20	MCS0	2	52	5260	52/37			9.55		11.00		4.87	Pass
HE20	MCS0	2	52	5260	106/53			9.66		11.00		4.87	Pass
HE20	6.96	2	60	5300	26/0			9.52		11.00		4.87	Pass
HE20	MCS0	2	60	5300	52/37			9.30		11.00		4.87	Pass
HE20	MCS0	2	60	5300	106/53			9.62		11.00		4.87	Pass
HE20	MCS0	2	64	5320	26/8			9.67		11.00		4.87	Pass
HE20	MCS0	2	64	5320	52/40			9.69		11.00		4.87	Pass
HE20	MCS0	2	64	5320	106/54			9.72		11.00		4.87	Pass
HE40	MCS0	2	54	5270	242/61			6.39		11.00		4.87	Pass
HE40	MCS0	2	62	5310	242/62			4.98		11.00		4.87	Pass
HE80	MCS0	2	58	5290	484/66			2.32		11.00		4.87	Pass

11ax Partial RU of U NII-2C													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	100	5500	26/0			10.74		11.00		4.08	Pass
HE20	MCS0	2	100	5500	52/37			10.75		11.00		4.08	Pass
HE20	MCS0	2	100	5500	106/53			10.74		11.00		4.08	Pass
HE20	MCS0	2	116	5580	26/0			9.47		11.00		4.08	Pass
HE20	MCS0	2	116	5580	52/37			9.49		11.00		4.08	Pass
HE20	MCS0	2	116	5580	106/53			9.69		11.00		4.08	Pass
HE20	MCS0	2	140	5700	26/8			9.34		11.00		4.08	Pass
HE20	MCS0	2	140	5700	52/40			9.71		11.00		4.08	Pass
HE20	MCS0	2	140	5700	106/54			9.71		11.00		4.08	Pass
HE20	MCS0	2	144	5720	26/8			9.96		11.00		4.08	Pass
HE20	MCS0	2	144	5720	52/40			9.81		11.00		4.08	Pass
HE20	MCS0	2	144	5720	106/54			9.78		11.00		4.08	Pass
HE40	MCS0	2	102	5510	242/61			4.85		11.00		4.08	Pass
HE40	MCS0	2	110	5550	242/61			6.58		11.00		4.08	Pass
HE40	MCS0	2	134	5670	242/62			6.55		11.00		4.08	Pass
HE40	MCS0	2	142	5710	242/62			6.72		11.00		4.08	Pass
HE80	MCS0	2	106	5530	484/65			2.26		11.00		4.08	Pass
HE80	MCS0	2	122	5610	484/66			3.58		11.00		4.08	Pass
HE80	MCS0	2	138	5690	484/66			3.82		11.00		4.08	Pass



11ax Partial RU of U NII-3															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	149	5745	26/0	2.22	5.53	6.49	9.50	30.00	3.56	Pass			
HE20	MCS0	2	149	5745	52/37	2.22	5.67	6.68	9.69	30.00	3.56	Pass			
HE20	MCS0	2	149	5745	106/53	2.22	5.65	6.46	9.47	30.00	3.56	Pass			
HE20	MCS0	2	157	5785	26/4	2.22	5.76	6.43	9.44	30.00	3.56	Pass			
HE20	MCS0	2	157	5785	52/38	2.22	5.85	6.44	9.45	30.00	3.56	Pass			
HE20	MCS0	2	157	5785	106/53	2.22	5.67	6.23	9.24	30.00	3.56	Pass			
HE20	MCS0	2	165	5825	26/8	2.22	6.09	6.27	9.28	30.00	3.56	Pass			
HE20	MCS0	2	165	5825	52/40	2.22	6.07	6.48	9.49	30.00	3.56	Pass			
HE20	MCS0	2	165	5825	106/54	2.22	6.13	6.41	9.42	30.00	3.56	Pass			
HE40	MCS0	2	151	5755	242/61	2.22	1.19	1.78	4.79	30.00	3.56	Pass			
HE40	MCS0	2	159	5795	242/62	2.22	1.15	1.98	4.99	30.00	3.56	Pass			
HE80	MCS0	2	155	5775	484/65	2.22	-1.48	-0.94	2.07	30.00	3.56	Pass			
HE80	MCS0	2	155	5775	484/66	2.22	-1.58	-1.12	1.89	30.00	3.56	Pass			

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)





<Tx Beamforming Mode>

Test Mode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11AX20MIMO	Ant1	5180	3.22	≤11.00	PASS
	Ant2	5180	3.8	≤11.00	PASS
	total	5180	9.64	≤11.00	PASS
	Ant1	5220	3.36	≤11.00	PASS
	Ant2	5220	3.69	≤11.00	PASS
	total	5220	9.65	≤11.00	PASS
	Ant1	5240	3.59	≤11.00	PASS
	Ant2	5240	3.86	≤11.00	PASS
	total	5240	9.85	≤11.00	PASS
	Ant1	5260	2.95	≤11.00	PASS
	Ant2	5260	3.37	≤11.00	PASS
	total	5260	9.29	≤11.00	PASS
	Ant1	5300	2.98	≤11.00	PASS
	Ant2	5300	3.6	≤11.00	PASS
	total	5300	9.42	≤11.00	PASS
	Ant1	5320	3.46	≤11.00	PASS
	Ant2	5320	3.3	≤11.00	PASS
	total	5320	9.50	≤11.00	PASS
	Ant1	5500	3.88	≤11.00	PASS
	Ant2	5500	3.88	≤11.00	PASS
	total	5500	10	≤11.00	PASS
	Ant1	5580	3.7	≤11.00	PASS
	Ant2	5580	3.69	≤11.00	PASS
	total	5580	9.82	≤11.00	PASS
	Ant1	5700	3.42	≤11.00	PASS
	Ant2	5700	3.61	≤11.00	PASS
	total	5700	9.64	≤11.00	PASS
	Ant1	5720_UNII-2C	3.12	≤11.00	PASS
	Ant2	5720_UNII-2C	4.04	≤11.00	PASS
	total	5720_UNII-2C	9.73	≤11.00	PASS
	Ant1	5720_UNII-3	-2.33	≤11.00	PASS
	Ant2	5720_UNII-3	-1.89	≤11.00	PASS
	total	5720_UNII-3	4.02	≤11.00	PASS
Ant1	5745	4.97	≤30.00	PASS	
Ant2	5745	5.36	≤30.00	PASS	
total	5745	11.29	≤30.00	PASS	
Ant1	5785	5.88	≤30.00	PASS	
Ant2	5785	5.68	≤30.00	PASS	
total	5785	11.90	≤30.00	PASS	
Ant1	5825	5.26	≤30.00	PASS	
Ant2	5825	5.91	≤30.00	PASS	
total	5825	11.72	≤30.00	PASS	
11AX40MIMO	Ant1	5190	2.25	≤11.00	PASS
	Ant2	5190	2.59	≤11.00	PASS
	total	5190	9.88	≤11.00	PASS
	Ant1	5230	1.94	≤11.00	PASS
	Ant2	5230	2.46	≤11.00	PASS
	total	5230	9.66	≤11.00	PASS
	Ant1	5270	1.69	≤11.00	PASS
	Ant2	5270	1.55	≤11.00	PASS




	total	5270	9.07	≤11.00	PASS	
	Ant1	5310	4.19	≤11.00	PASS	
	Ant2	5310	3.96	≤11.00	PASS	
	total	5310	6.67	≤11.00	PASS	
	Ant1	5510	4.38	≤11.00	PASS	
	Ant2	5510	3.66	≤11.00	PASS	
	total	5510	6.67	≤11.00	PASS	
	Ant1	5550	1.86	≤11.00	PASS	
	Ant2	5550	1.82	≤11.00	PASS	
	total	5550	9.29	≤11.00	PASS	
	Ant1	5670	2.07	≤11.00	PASS	
	Ant2	5670	1.57	≤11.00	PASS	
	total	5670	9.28	≤11.00	PASS	
	Ant1	5710_UNII-2C	1.54	≤11.00	PASS	
	Ant2	5710_UNII-2C	2.01	≤11.00	PASS	
	total	5710_UNII-2C	9.23	≤11.00	PASS	
	Ant1	5710_UNII-3	-1.55	≤11.00	PASS	
	Ant2	5710_UNII-3	-1.7	≤11.00	PASS	
	total	5710_UNII-3	5.83	≤11.00	PASS	
	Ant1	5755	0.81	≤30.00	PASS	
	Ant2	5755	0.47	≤30.00	PASS	
	total	5755	8.1	≤30.00	PASS	
	Ant1	5795	1.47	≤30.00	PASS	
	Ant2	5795	0.77	≤30.00	PASS	
	total	5795	8.59	≤30.00	PASS	
11AX80MIMO	Ant1	5210	2.36	≤11.00	PASS	
	Ant2	5210	3.35	≤11.00	PASS	
	total	5210	5.36	≤11.00	PASS	
	Ant1	5290	1.43	≤11.00	PASS	
	Ant2	5290	1.41	≤11.00	PASS	
	total	5290	3.90	≤11.00	PASS	
	Ant1	5530	0.84	≤11.00	PASS	
	Ant2	5530	1.45	≤11.00	PASS	
	total	5530	4.05	≤11.00	PASS	
	Ant1	5610	-3.62	≤11.00	PASS	
	Ant2	5610	-4.09	≤11.00	PASS	
	total	5610	6.07	≤11.00	PASS	
	Ant1	5690_UNII-2C	-4.38	≤11.00	PASS	
	Ant2	5690_UNII-2C	-3.67	≤11.00	PASS	
	total	5690_UNII-2C	5.92	≤11.00	PASS	
	Ant1	5690_UNII-3	-7.81	≤11.00	PASS	
	Ant2	5690_UNII-3	-7.76	≤11.00	PASS	
	total	5690_UNII-3	2.14	≤11.00	PASS	
		Ant1	5775	-4.84	≤30.00	PASS
		Ant2	5775	-5.65	≤30.00	PASS
	total	5775	4.69	≤30.00	PASS	

Note :

1. The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.




### 3.3.6 Test Graphs of Power Spectral Density

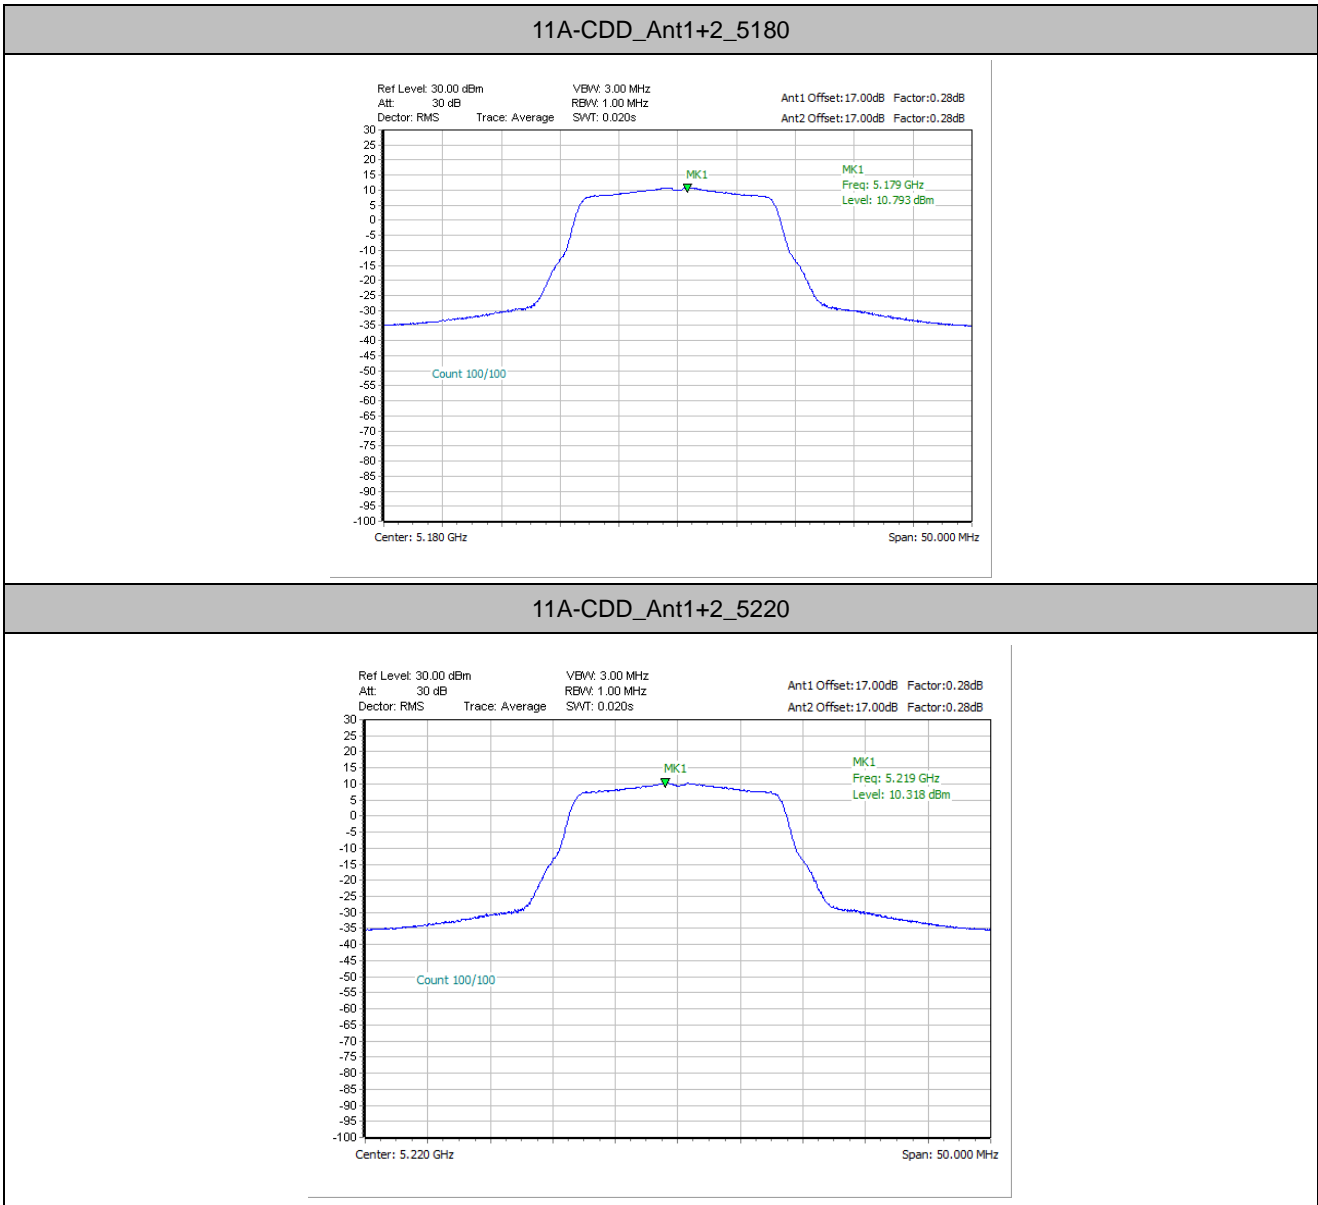




11A-CDD\_Ant1+2\_5240

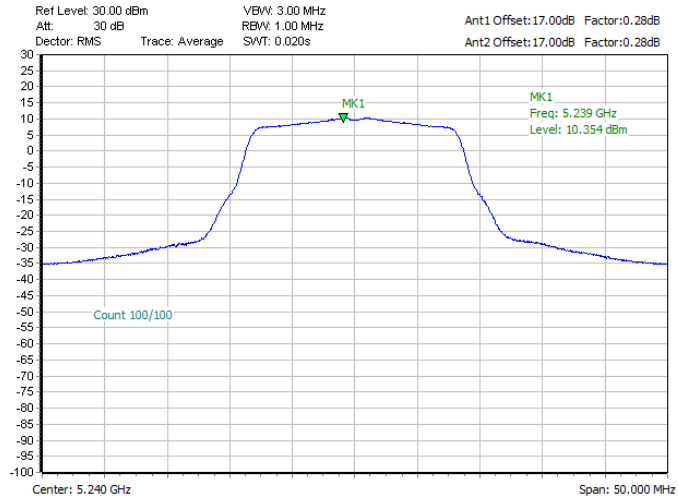


11A-CDD\_Ant1\_5260

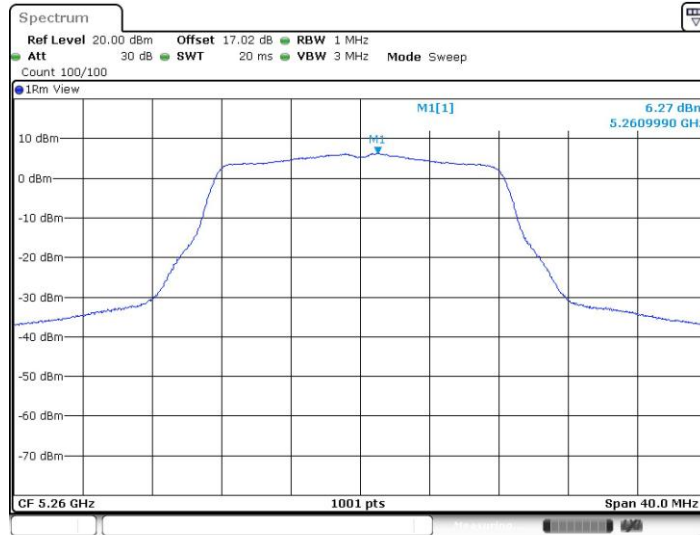


Date: 17.MAY.2022 11:16:40



11A-CDD\_Ant2\_5260

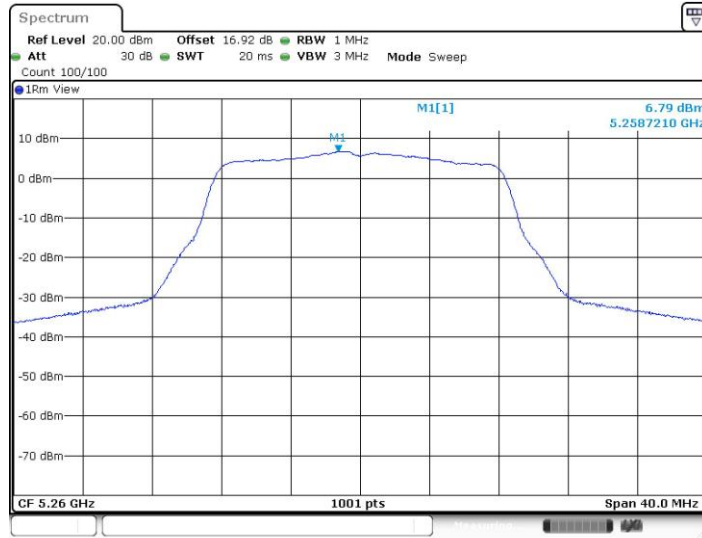


11A-CDD\_Ant1\_5300

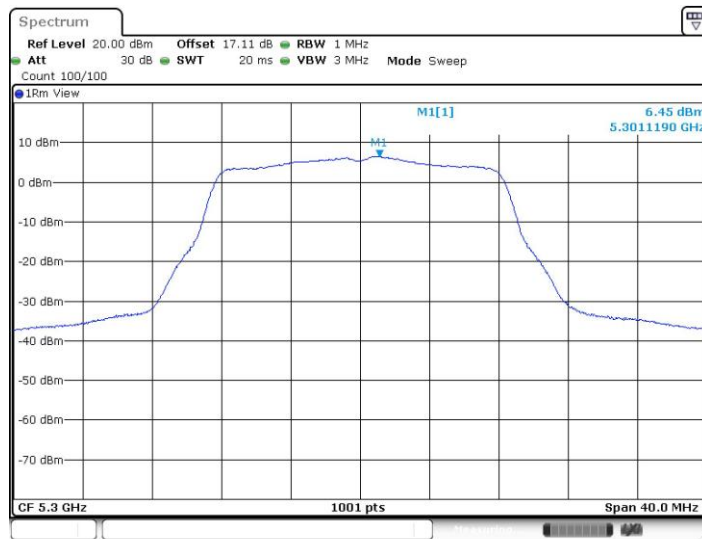



11A-CDD\_Ant2\_5300

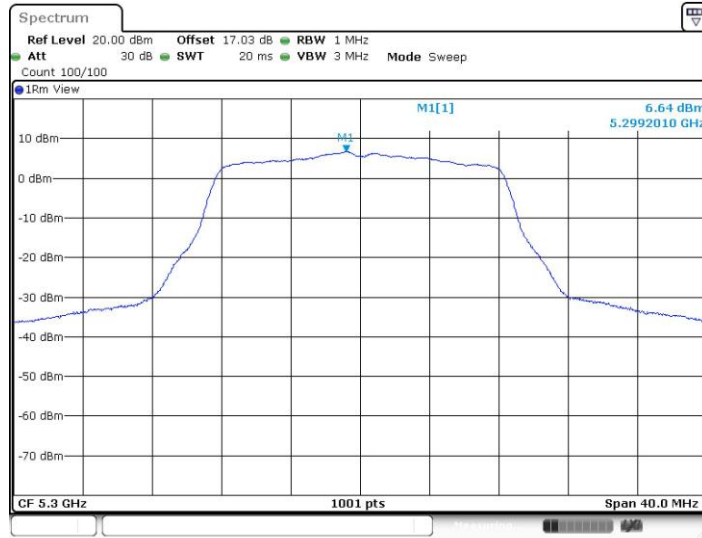

Date: 17.MAY.2022 11:18:17


11A-CDD\_Ant1\_5320



Date: 17.MAY.2022 11:19:03




11A-CDD\_Ant2\_5320

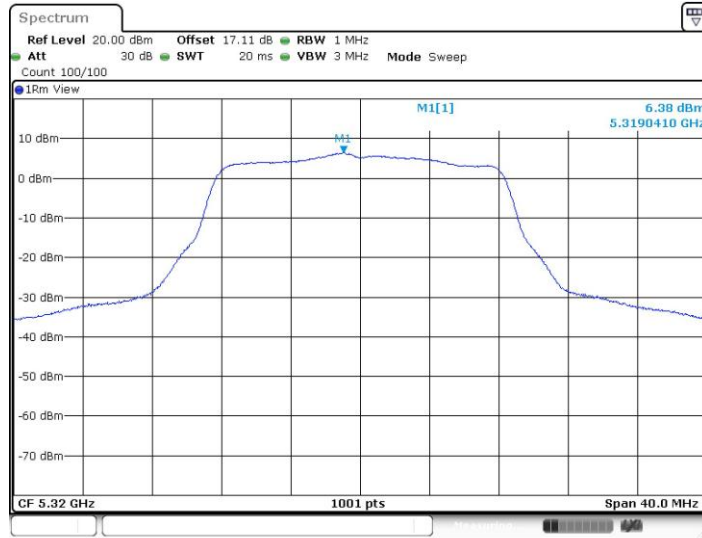


Date: 17.MAY.2022 11:19:30

11A-CDD\_Ant1+2\_5500

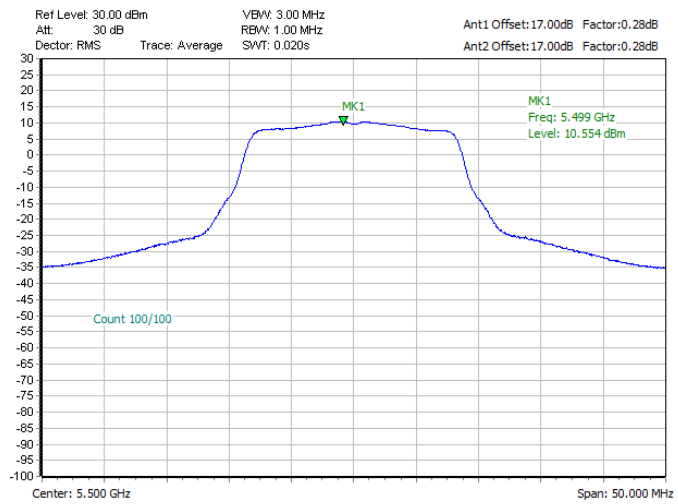




11A-CDD\_Ant1\_5580

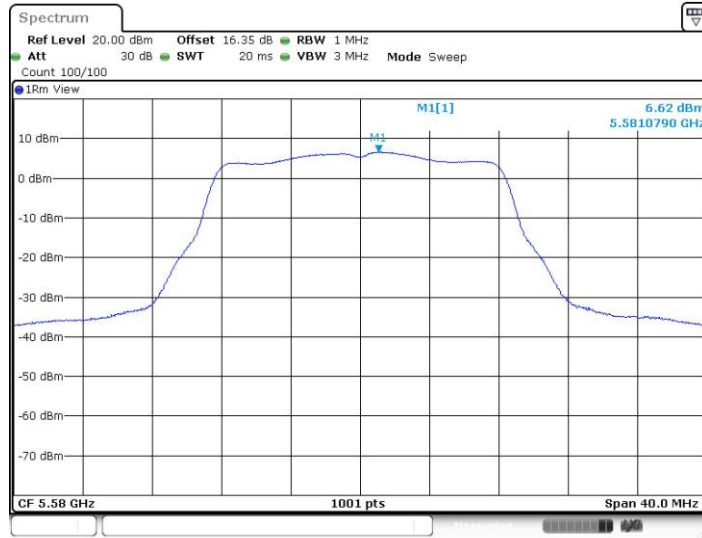


11A-CDD\_Ant2\_5580

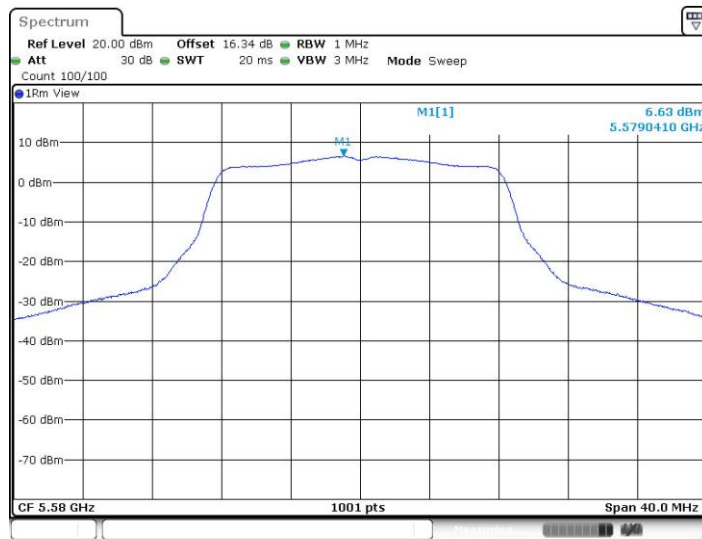






11A-CDD\_Ant1\_5700

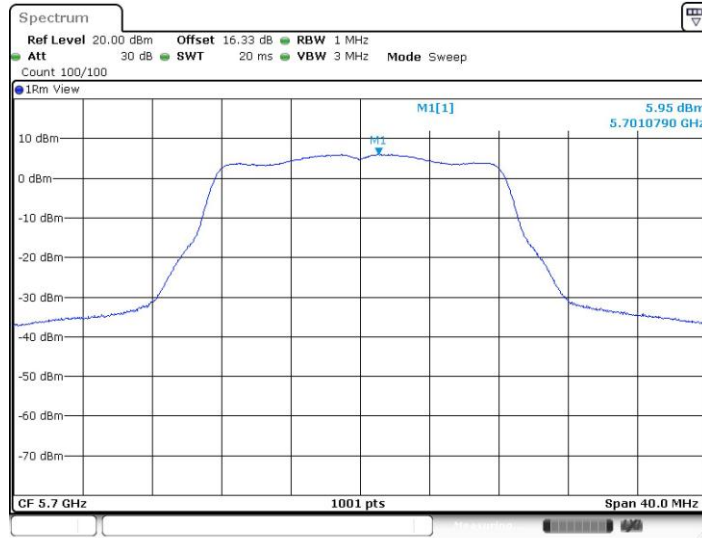

Date: 17.MAY.2022 11:23:24


11A-CDD\_Ant2\_5700

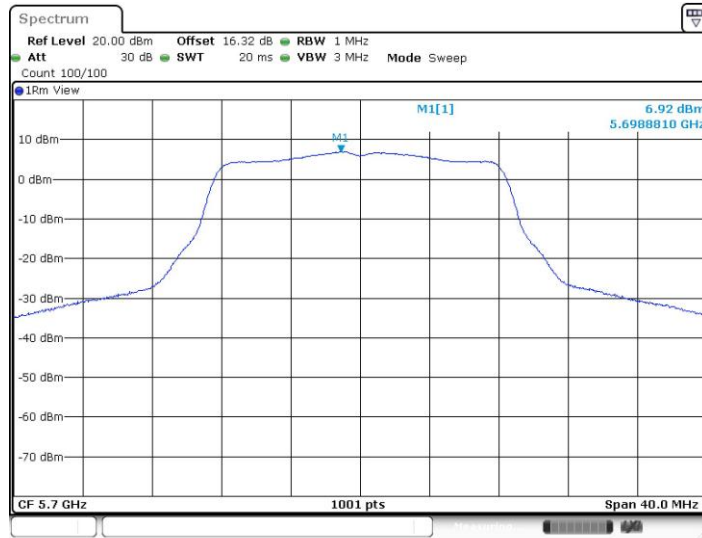

Date: 17.MAY.2022 11:23:54




11A-CDD\_Ant1\_5720\_UNII-2C

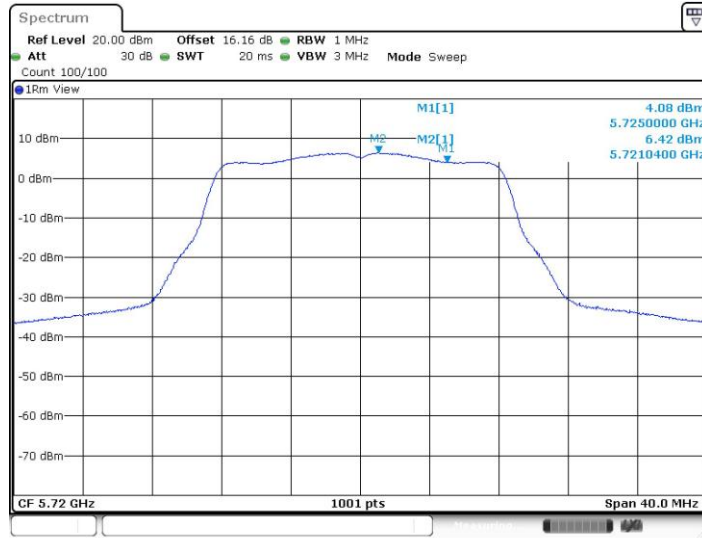

Date: 17.MAY.2022 11:25:04


11A-CDD\_Ant2\_5720\_UNII-2C

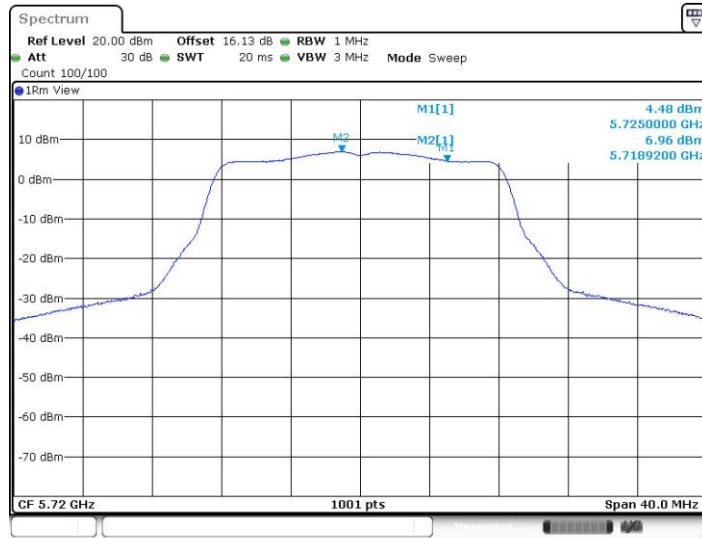

Date: 17.MAY.2022 11:25:41




11A-CDD\_Ant1\_5720\_UNII-3

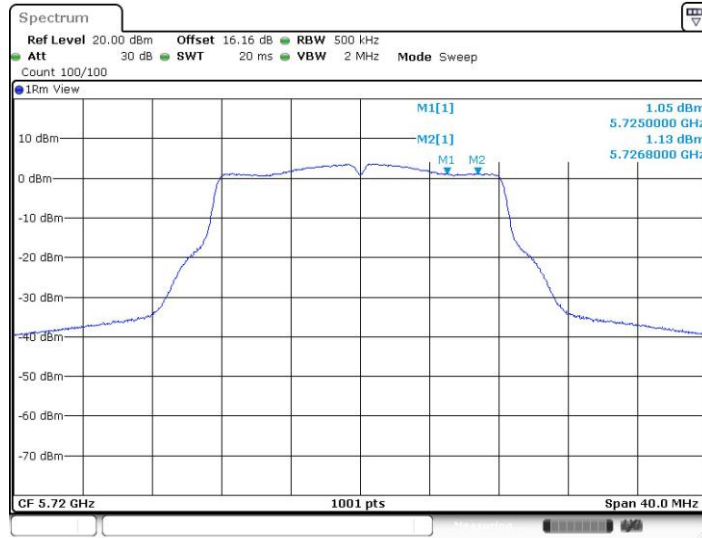

Date: 17.MAY.2022 11:25:14


11A-CDD\_Ant2\_5720\_UNII-3

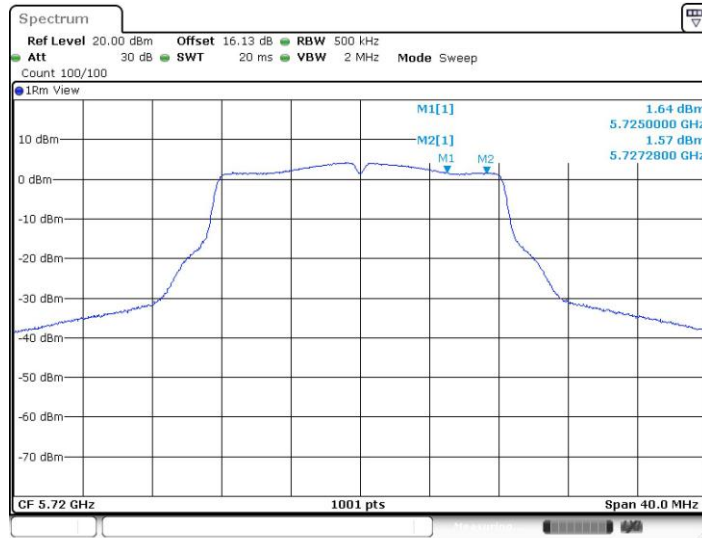

Date: 17.MAY.2022 11:25:51




11A-CDD\_Ant1\_5745

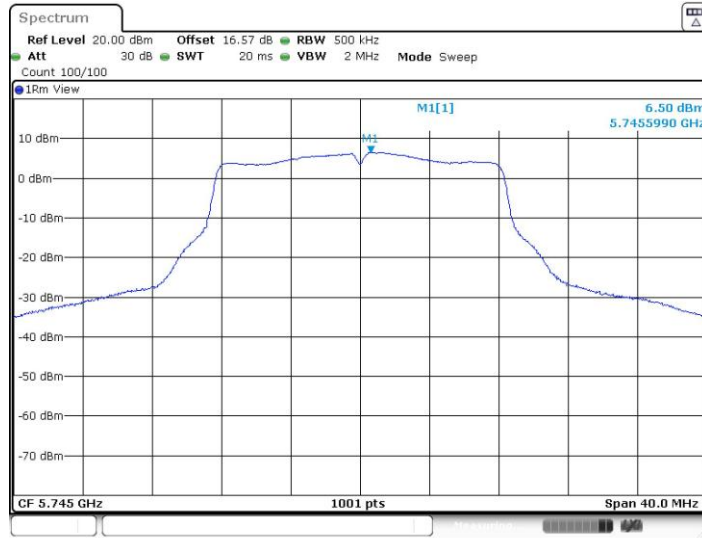

Date: 7.JUN.2022 23:09:17


11A-CDD\_Ant2\_5745

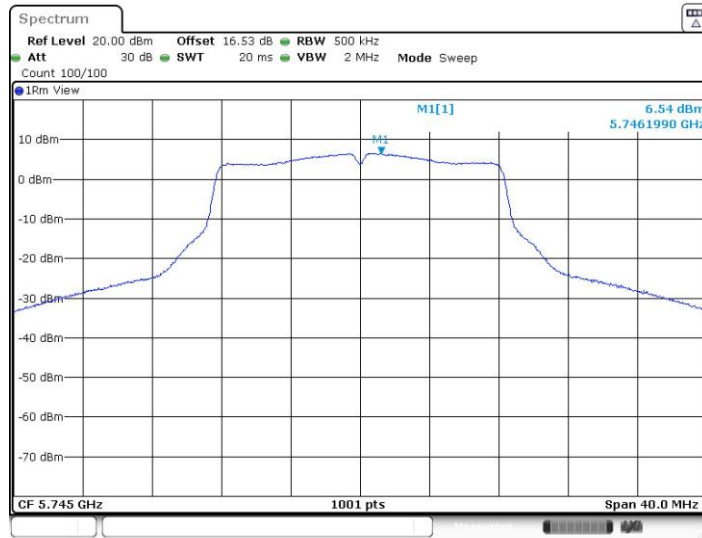

Date: 7.JUN.2022 23:10:30




11A-CDD\_Ant1\_5785

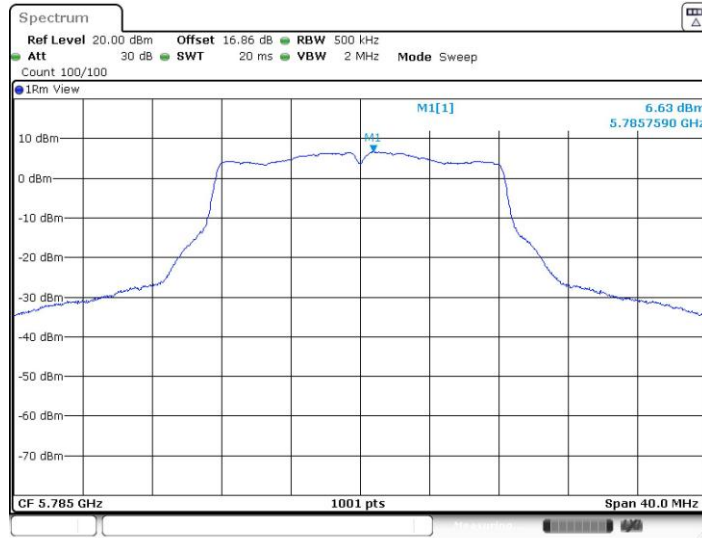

Date: 7 JUN. 2022 23:12:46


11A-CDD\_Ant2\_5785

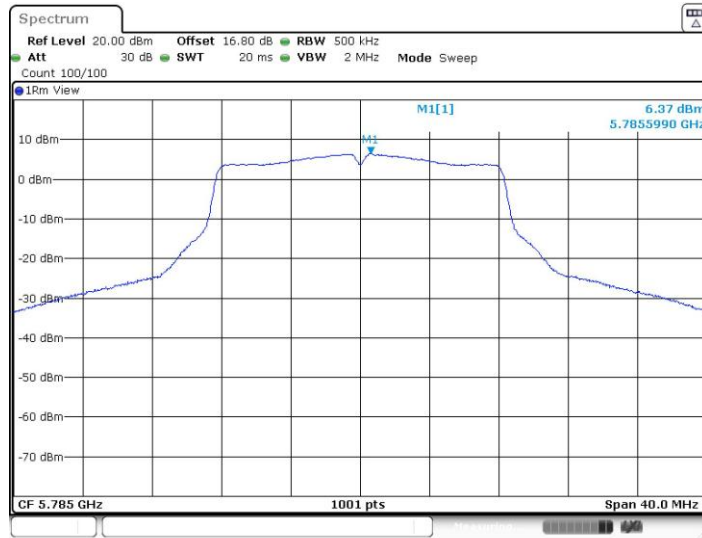


Date: 7 JUN. 2022 23:14:00



11A-CDD\_Ant1\_5825

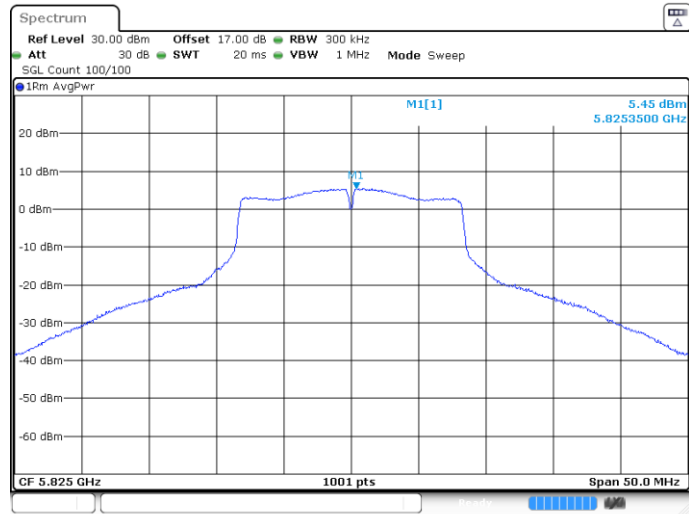


11A-CDD\_Ant2\_5825

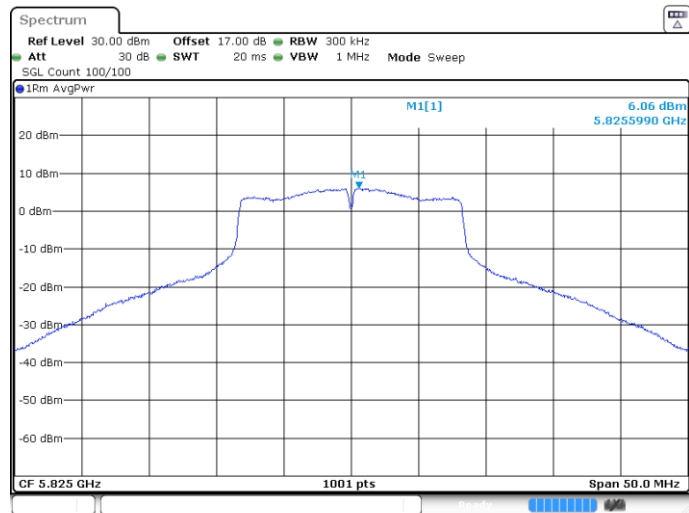




11AX20MIMO\_Ant1\_5180

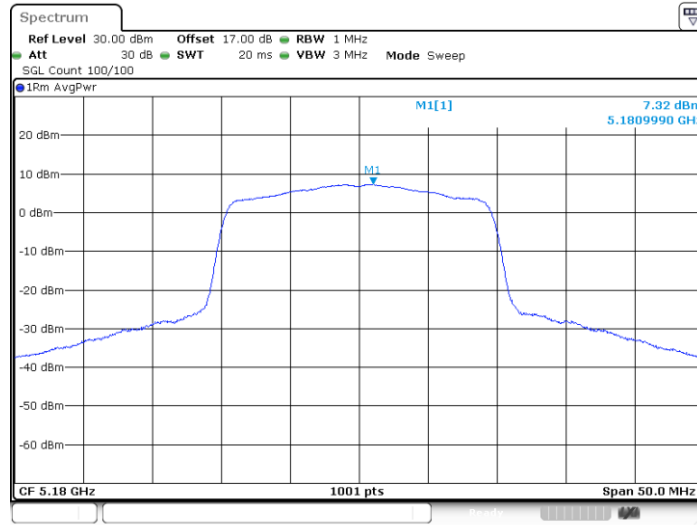

Date: 12.JUL.2022 19:24:44

11AX20MIMO\_Ant2\_5180

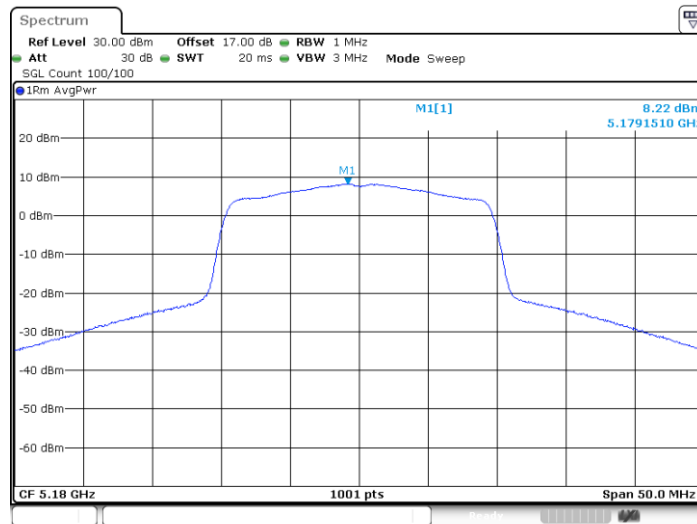

Date: 12.JUL.2022 19:25:10



11AX20MIMO\_Ant1\_5220



Date: 17.MAY.2022 12:38:21

11AX20MIMO\_Ant2\_5220




Date: 17.MAY.2022 12:38:57






11AX20MIMO\_Ant1\_5240

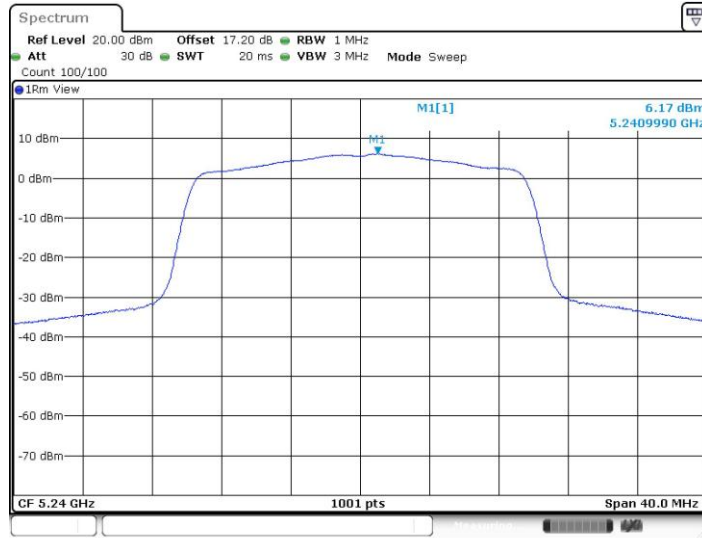


11AX20MIMO\_Ant2\_5240

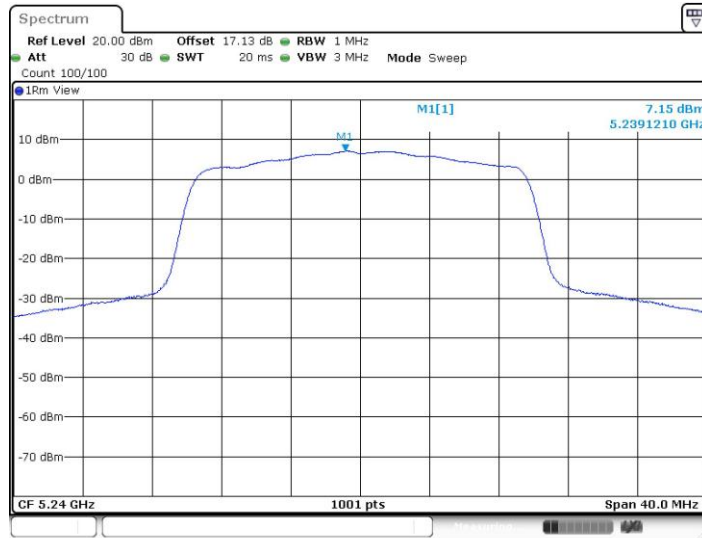




11AX20MIMO\_Ant1\_5260

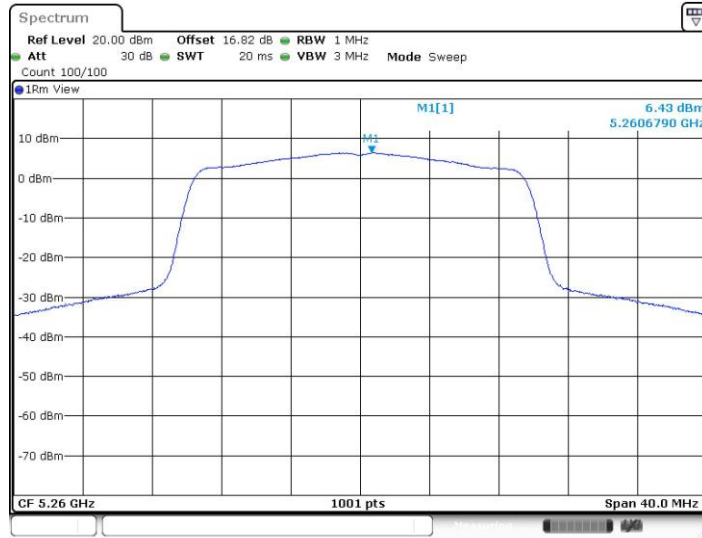


11AX20MIMO\_Ant2\_5260

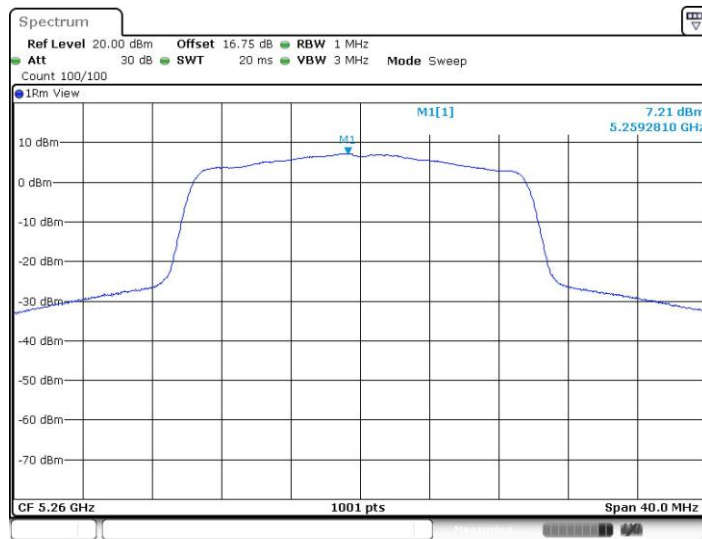



11AX20MIMO\_Ant1\_5300

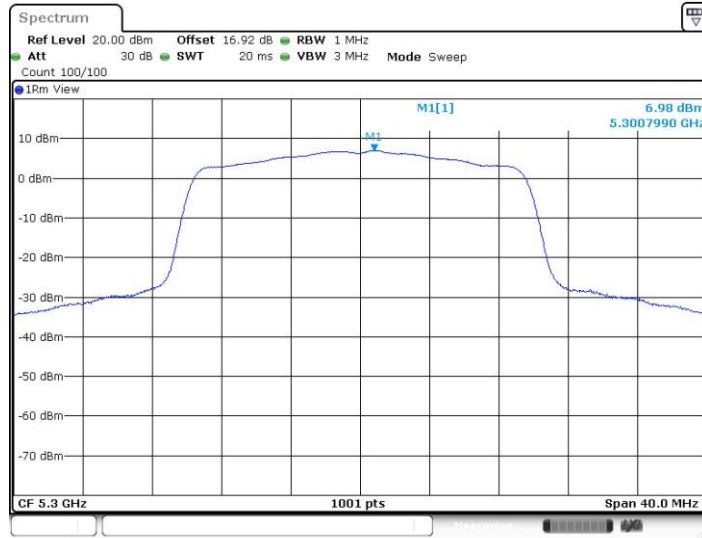


11AX20MIMO\_Ant2\_5300






11AX20MIMO\_Ant1\_5320

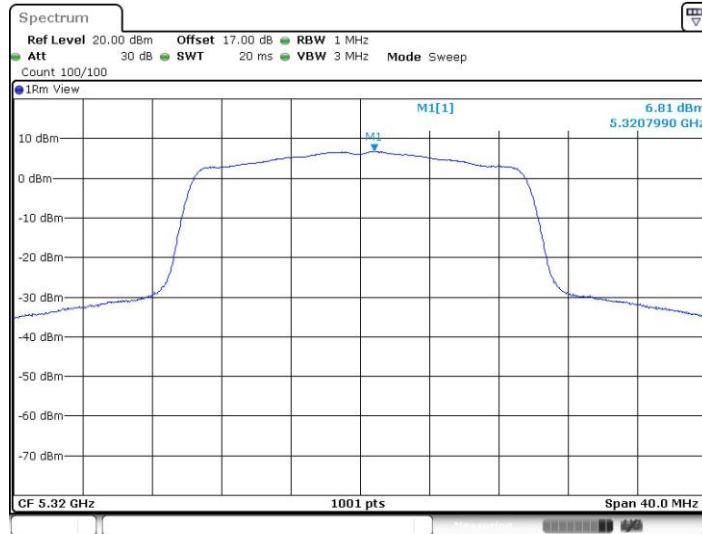


11AX20MIMO\_Ant2\_5320

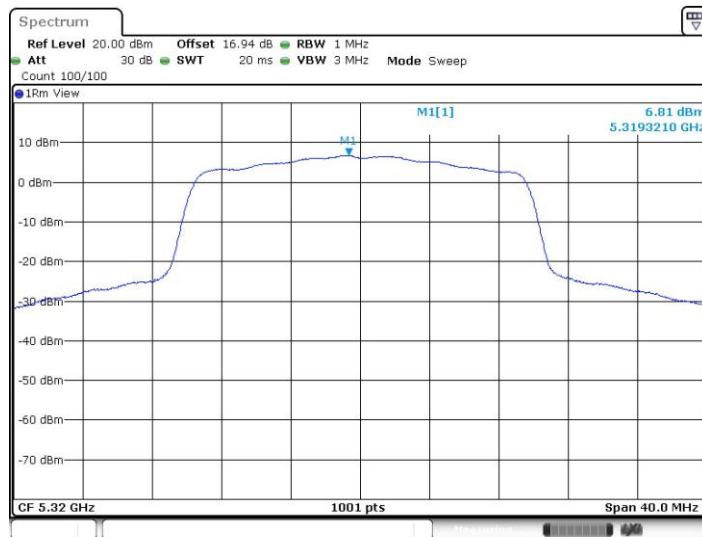




11AX20MIMO\_Ant1\_5500

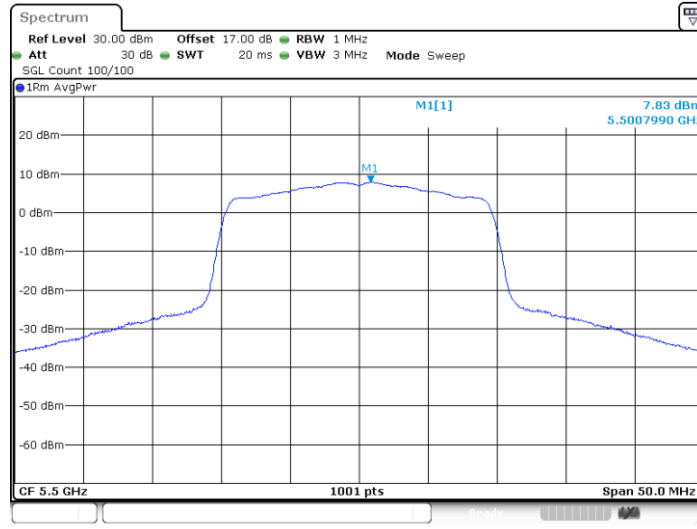

Date: 12.JUL.2022 19:43:08


11AX20MIMO\_Ant2\_5500

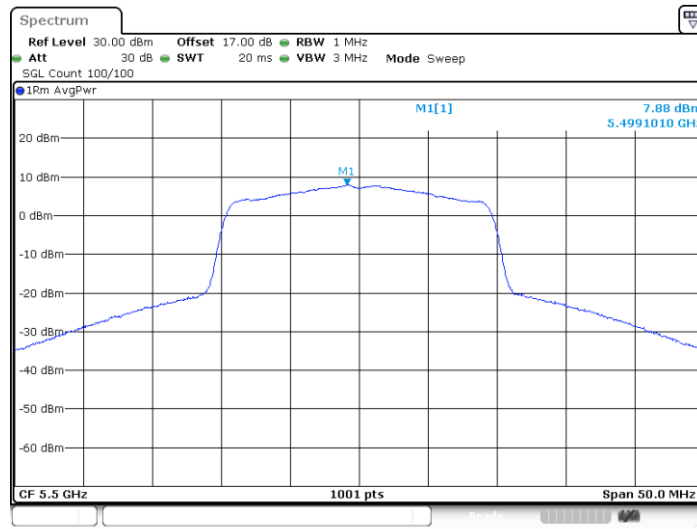

Date: 12.JUL.2022 19:43:35




11AX20MIMO\_Ant1\_5580

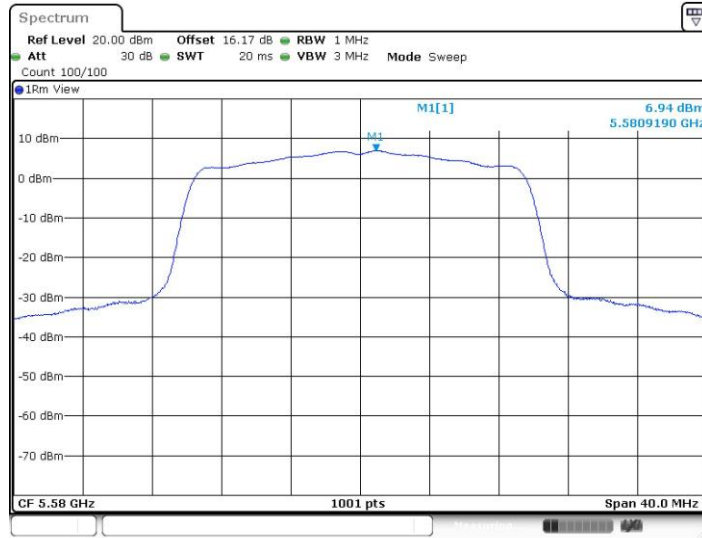

Date: 17.MAY.2022 13:05:23


11AX20MIMO\_Ant2\_5580

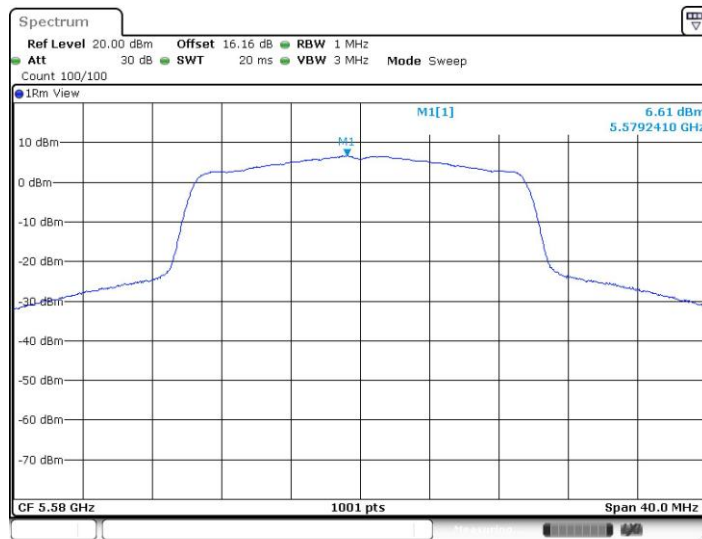

Date: 17.MAY.2022 13:05:54



11AX20MIMO\_Ant1\_5700

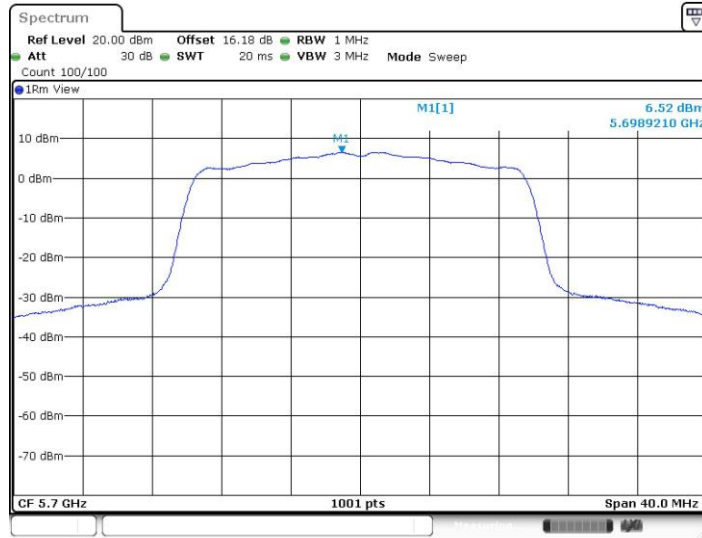

Date: 17.MAY.2022 13:08:41

11AX20MIMO\_Ant2\_5700



Date: 17.MAY.2022 13:09:13




11AX20MIMO\_Ant1\_5720\_UNII-2C



Date: 17.MAY.2022 13:14:10

11AX20MIMO\_Ant2\_5720\_UNII-2C

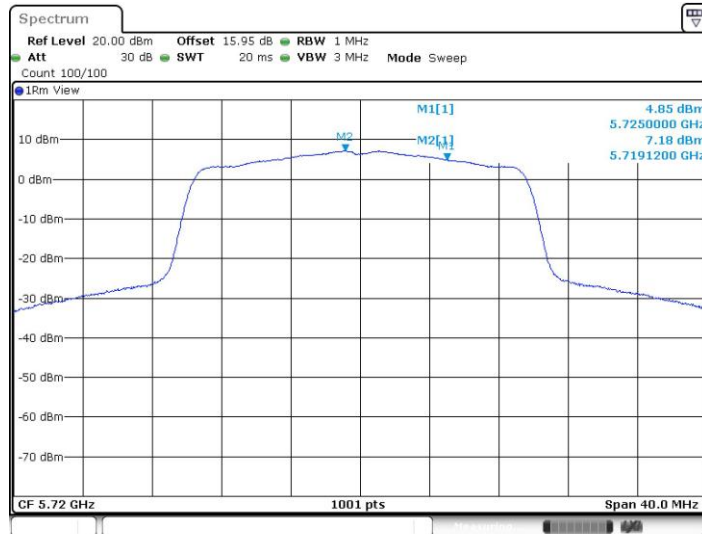


Date: 17.MAY.2022 13:14:51






11AX20MIMO\_Ant1\_5720\_UNII-3

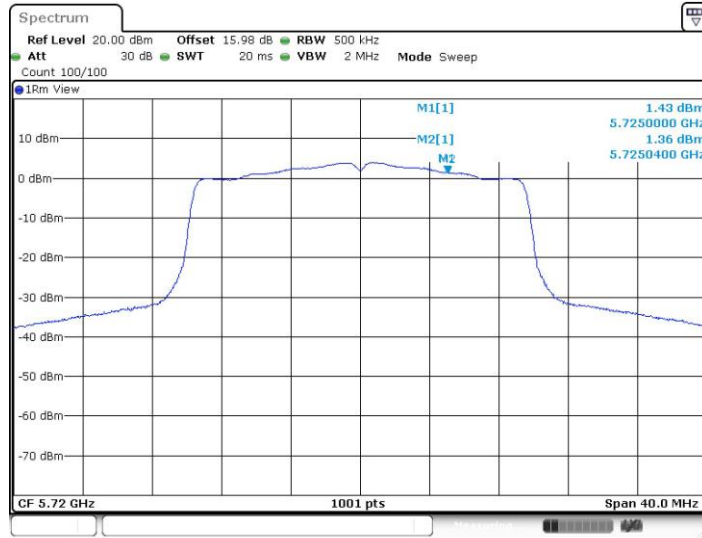

Date: 17.MAY.2022 13:14:20

11AX20MIMO\_Ant2\_5720\_UNII-3

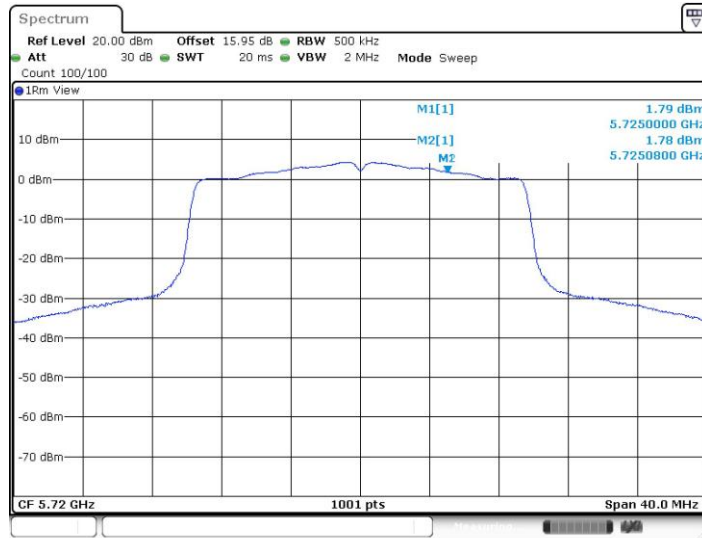

Date: 17.MAY.2022 13:15:01



11AX20MIMO\_Ant1\_5745



11AX20MIMO\_Ant2\_5745






11AX20MIMO\_Ant1\_5785




11AX20MIMO\_Ant2\_5785

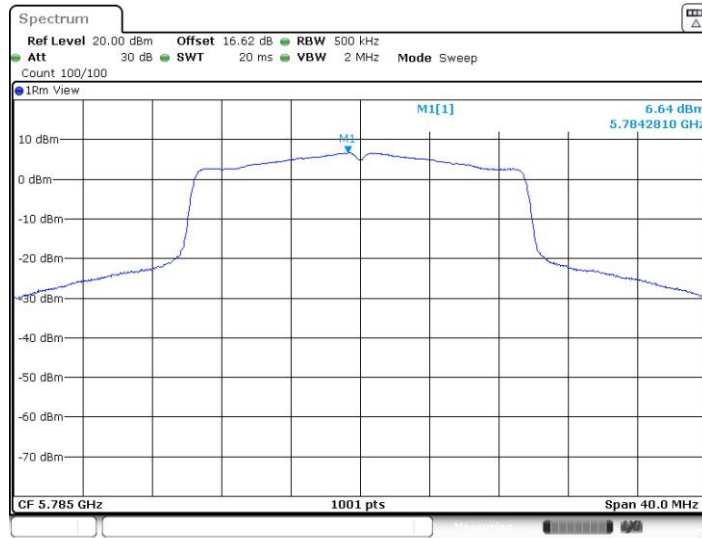






11AX40MIMO\_Ant1\_5190

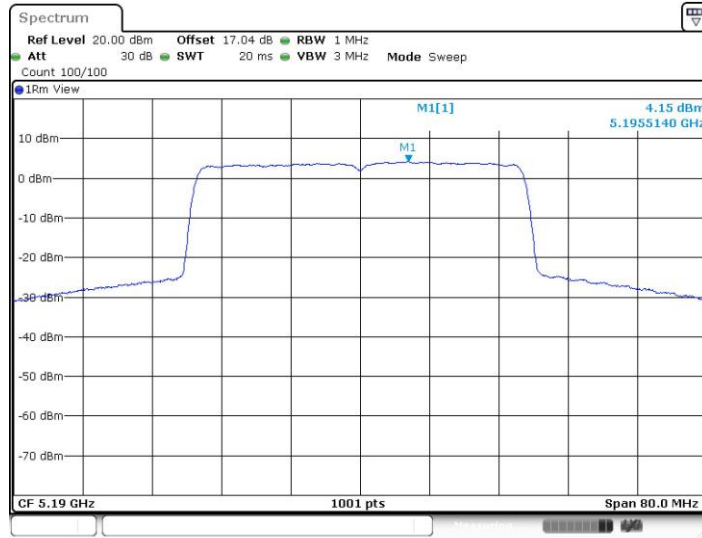

Date: 17.MAY.2022 17:22:26


11AX40MIMO\_Ant2\_5190

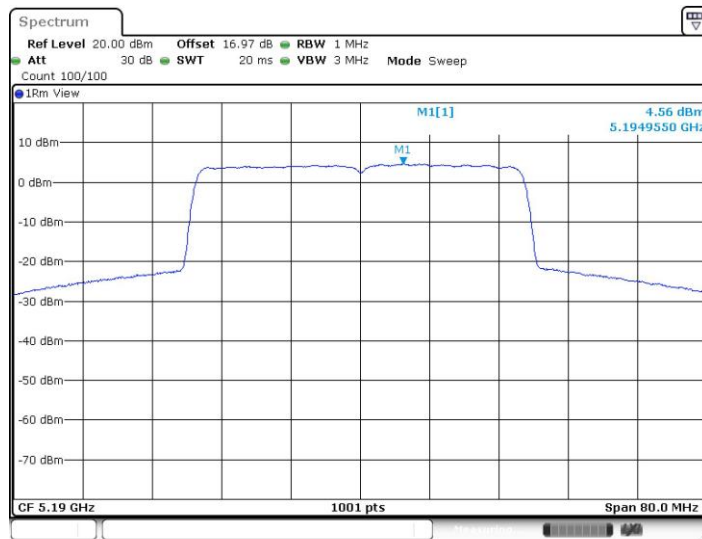

Date: 17.MAY.2022 17:22:37



11AX40MIMO\_Ant1\_5230

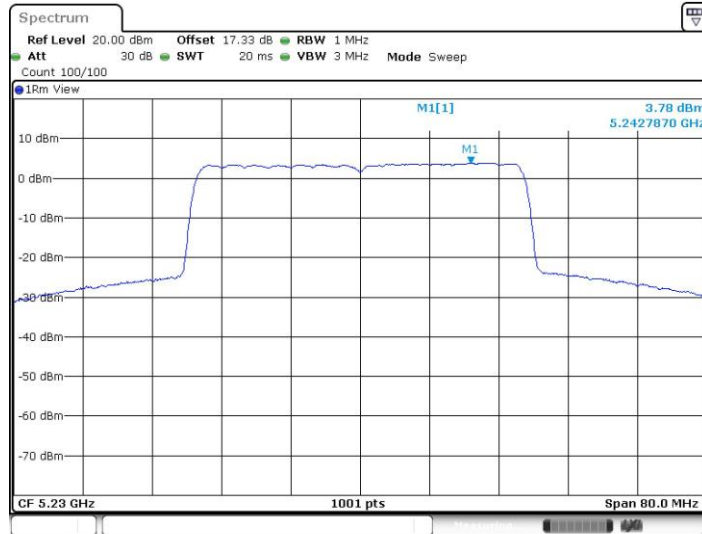

Date: 17.MAY.2022 17:23:08


11AX40MIMO\_Ant2\_5230



Date: 17.MAY.2022 17:23:21



11AX40MIMO\_Ant1\_5270

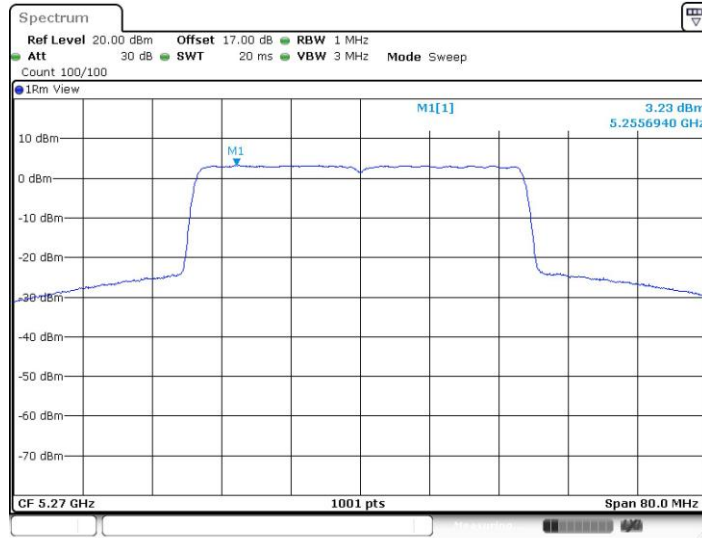

Date: 17.MAY.2022 17:24:09

11AX40MIMO\_Ant2\_5270



Date: 17.MAY.2022 17:24:21



11AX40MIMO\_Ant1\_5310



Date: 30.JUN.2022 04:39:33

11AX40MIMO\_Ant2\_5310




Date: 30.JUN.2022 04:40:06






11AX40MIMO\_Ant1\_5510

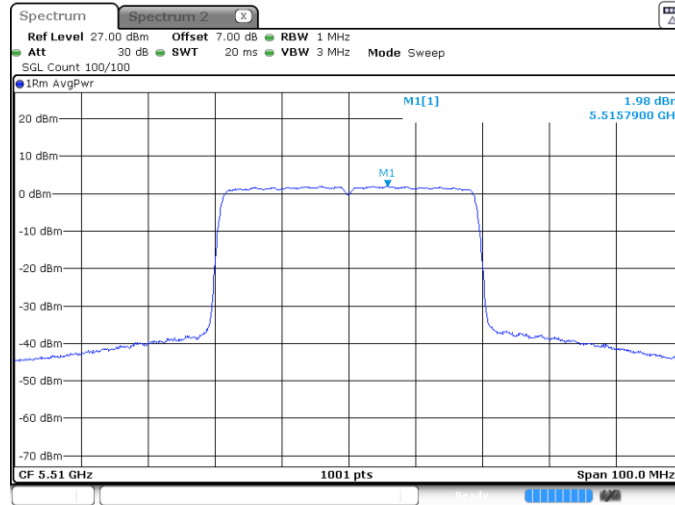

Date: 24 JUN 2022 19:34:34


11AX40MIMO\_Ant2\_5510

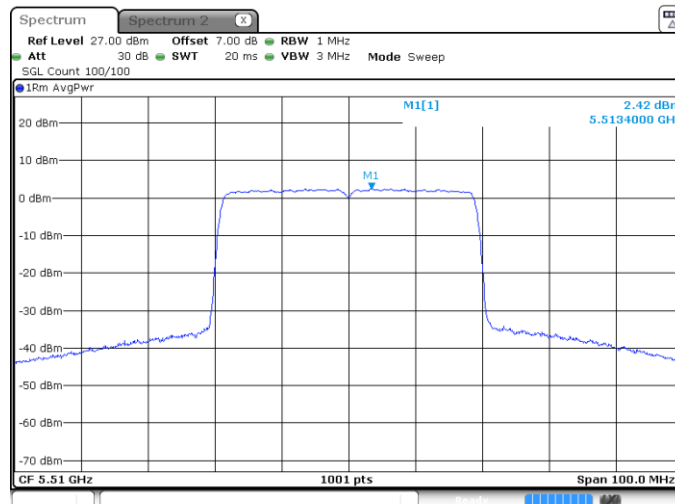


Date: 24 JUN 2022 19:36:32



11AX40MIMO\_Ant1\_5550

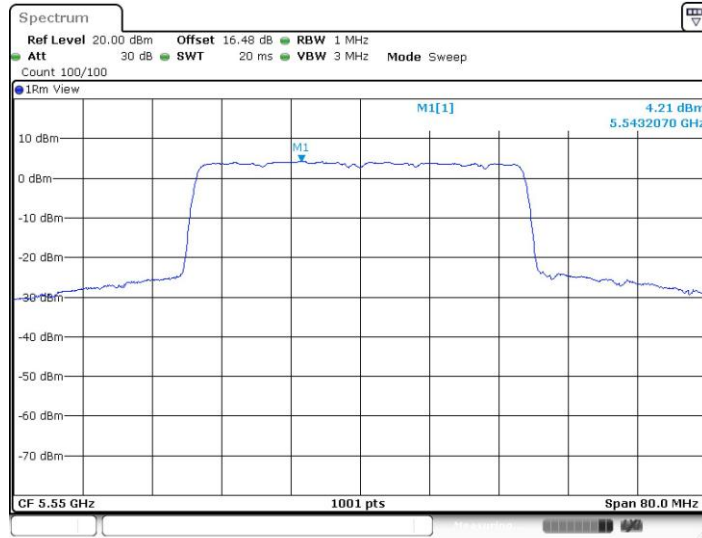


11AX40MIMO\_Ant2\_5550

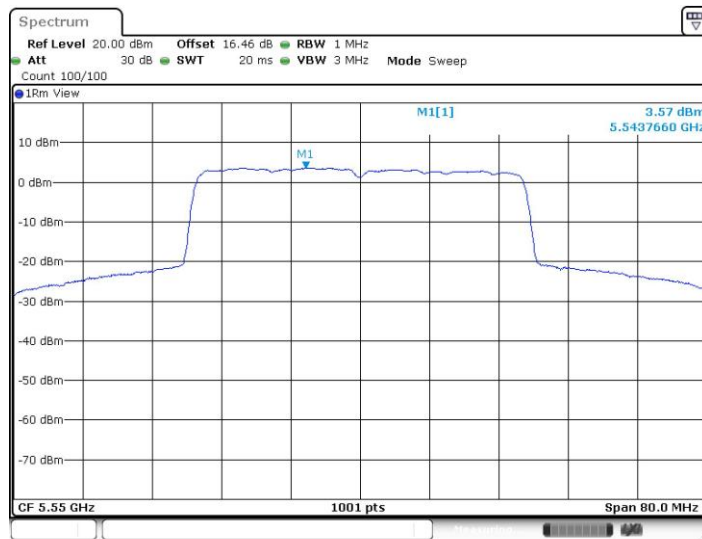




11AX40MIMO\_Ant1\_5670

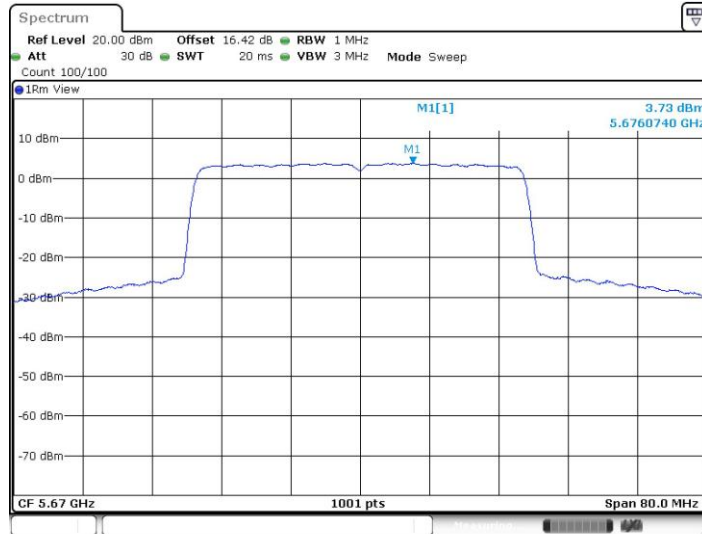

Date: 17.MAY.2022 17:28:04


11AX40MIMO\_Ant2\_5670

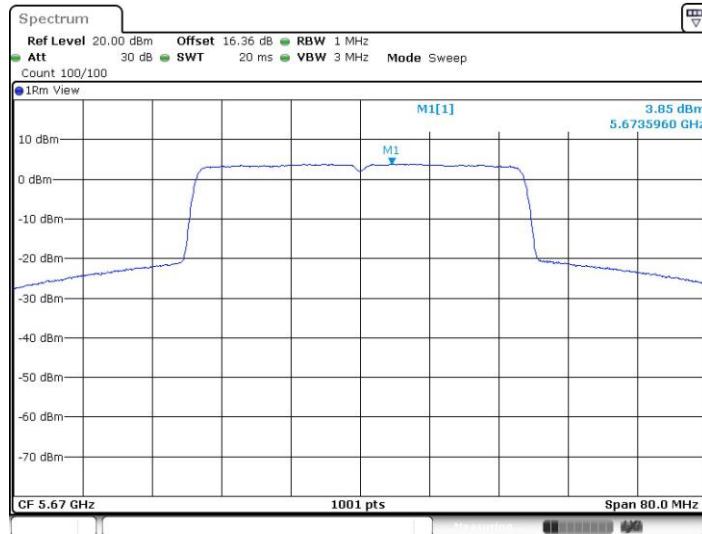


Date: 17.MAY.2022 17:28:17



11AX40MIMO\_Ant1\_5710\_UNII-2C

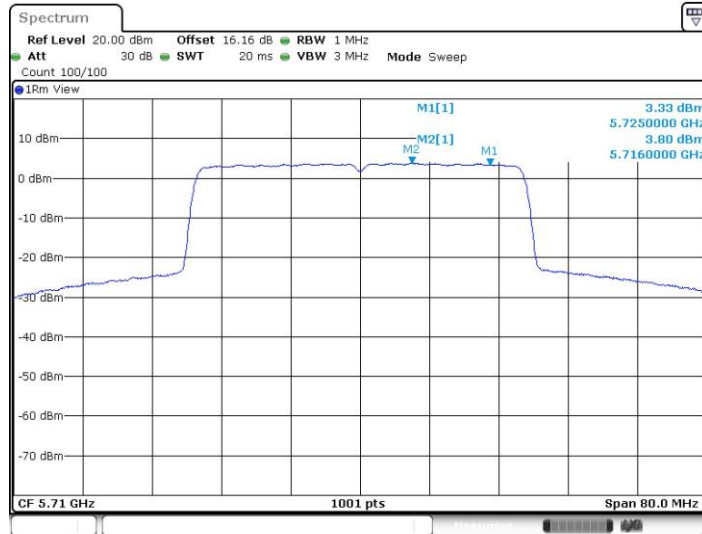


11AX40MIMO\_Ant2\_5710\_UNII-2C

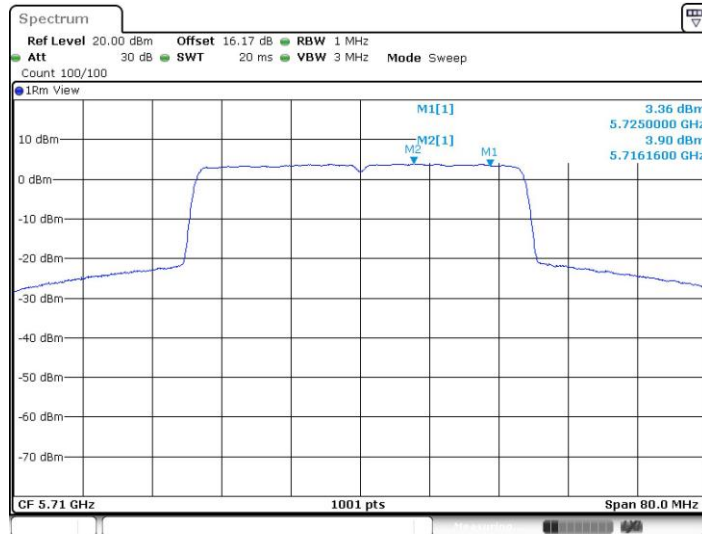




11AX40MIMO\_Ant1\_5710\_UNII-3

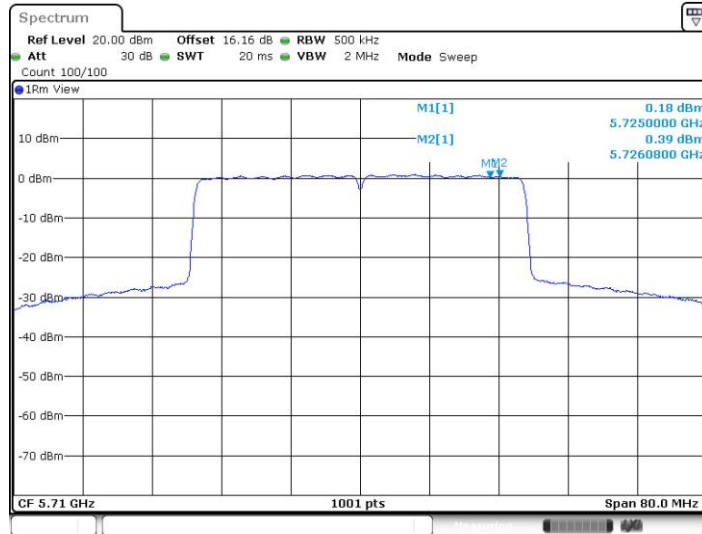

Date: 17.MAY.2022 17:29:01

11AX40MIMO\_Ant2\_5710\_UNII-3

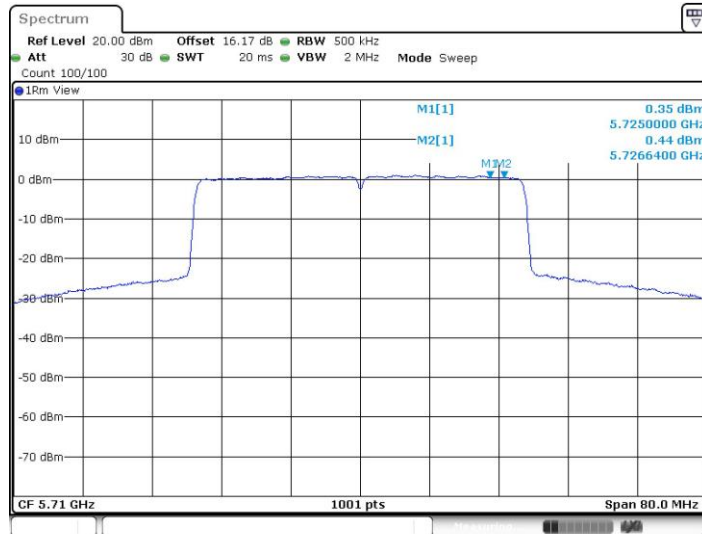

Date: 17.MAY.2022 17:29:24



11AX40MIMO\_Ant1\_5755



Date: 7 JUN. 2022 23:32:58


11AX40MIMO\_Ant2\_5755



Date: 7 JUN. 2022 23:34:10



11AX40MIMO\_Ant1\_5795

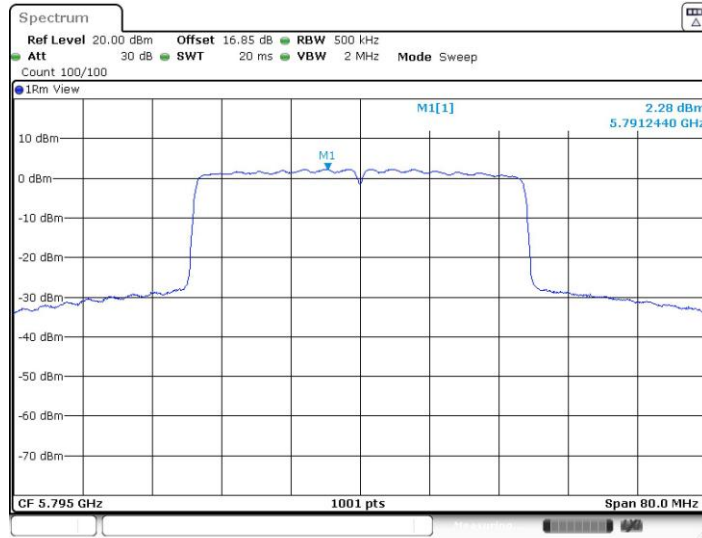

Date: 7.JUN.2022 23:37:16


11AX40MIMO\_Ant2\_5795



Date: 7.JUN.2022 23:38:33




11AX80MIMO\_Ant1\_5210

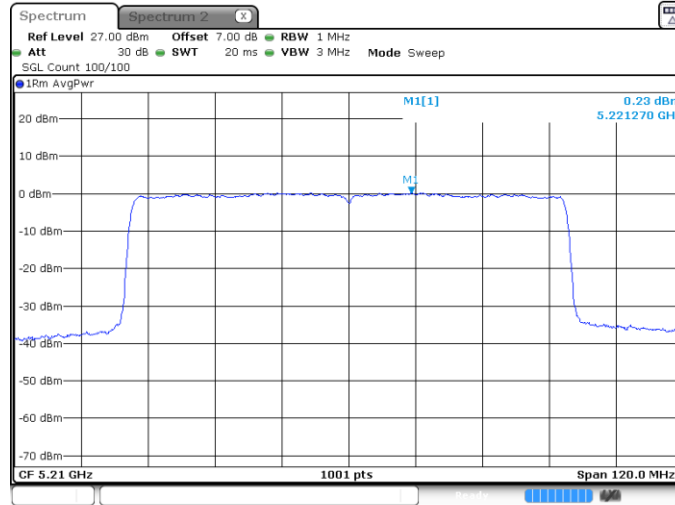

Date: 24 JUN 2022 19:41:13

11AX80MIMO\_Ant2\_5210

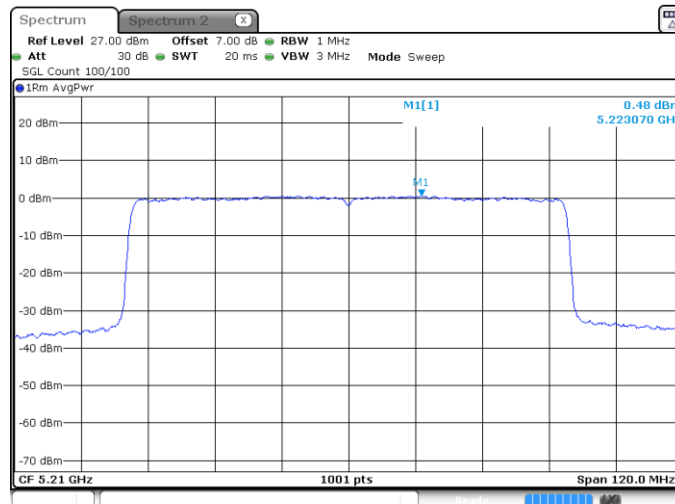


Date: 24 JUN 2022 19:41:58






11AX80MIMO\_Ant1\_5290

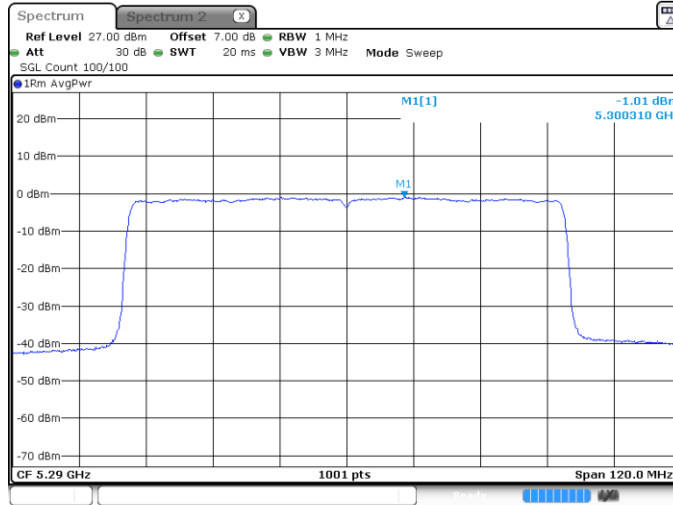

Date: 24 JUN 2022 19:46:18


11AX80MIMO\_Ant2\_5290

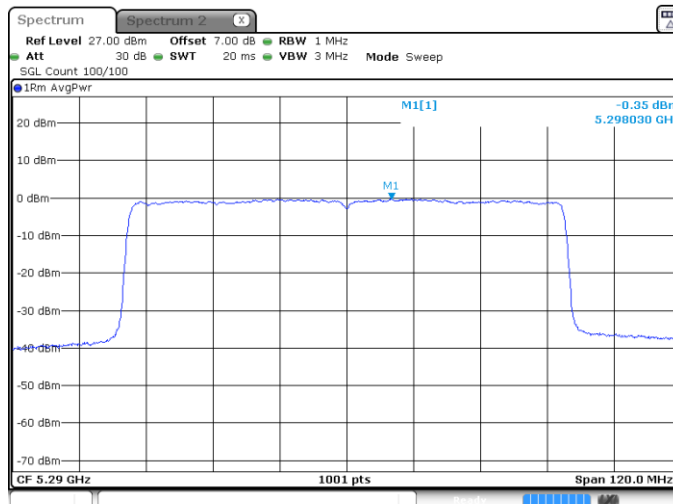

Date: 24 JUN 2022 19:47:16




11AX80MIMO\_Ant1\_5530

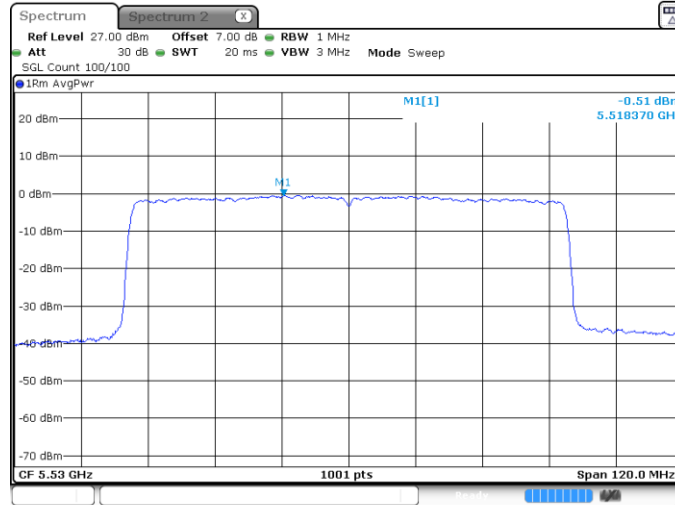

Date: 24 JUN 2022 19:49:02

11AX80MIMO\_Ant2\_5530

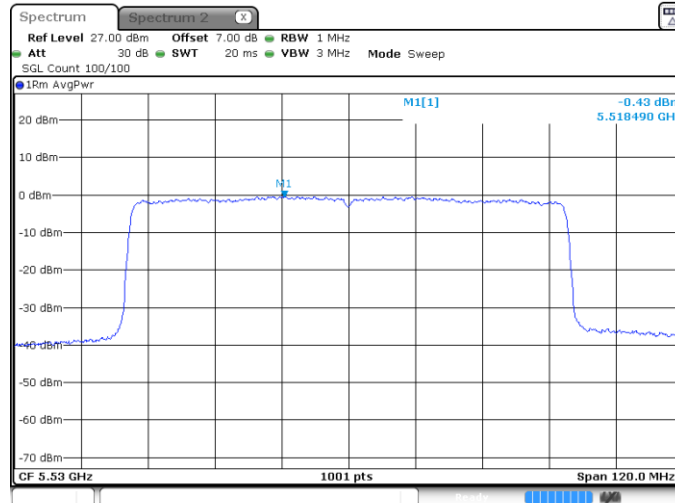

Date: 24 JUN 2022 19:49:37



11AX80MIMO\_Ant1\_5610



Date: 17.MAY.2022 17:34:13


11AX80MIMO\_Ant2\_5610



Date: 17.MAY.2022 17:34:27




11AX80MIMO\_Ant1\_5690\_UNII-2C

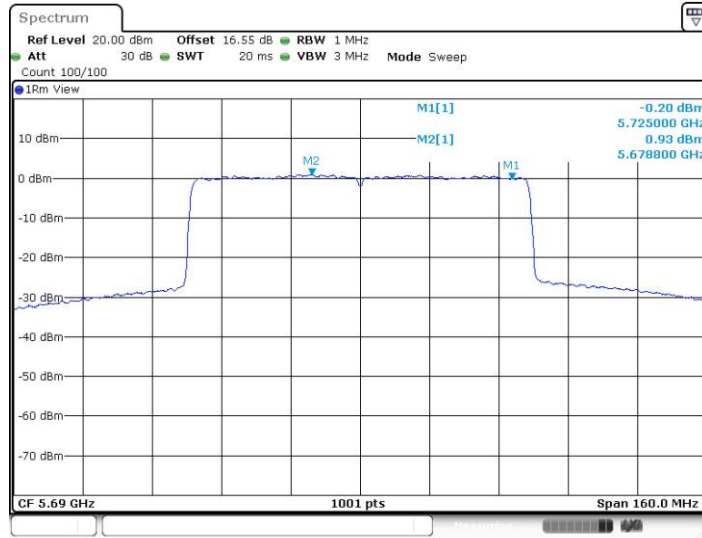

Date: 17.MAY.2022 17:35:28

11AX80MIMO\_Ant2\_5690\_UNII-2C

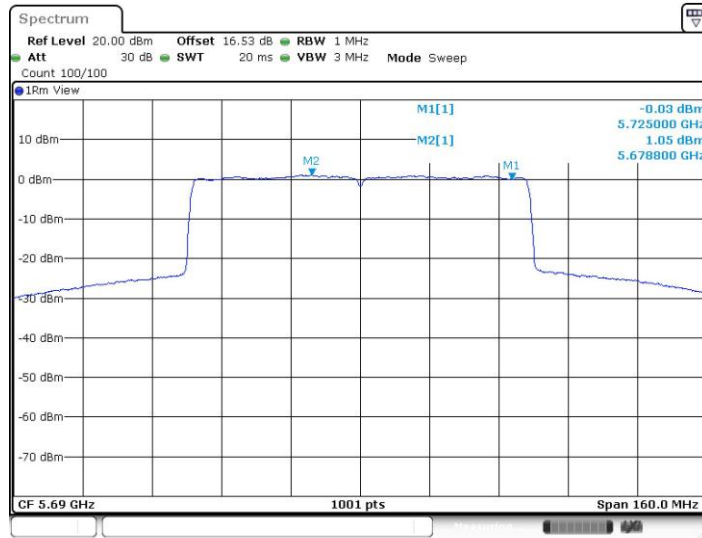

Date: 17.MAY.2022 17:35:51




11AX80MIMO\_Ant1\_5690\_UNII-3



Date: 17.MAY.2022 17:35:38

11AX80MIMO\_Ant2\_5690\_UNII-3

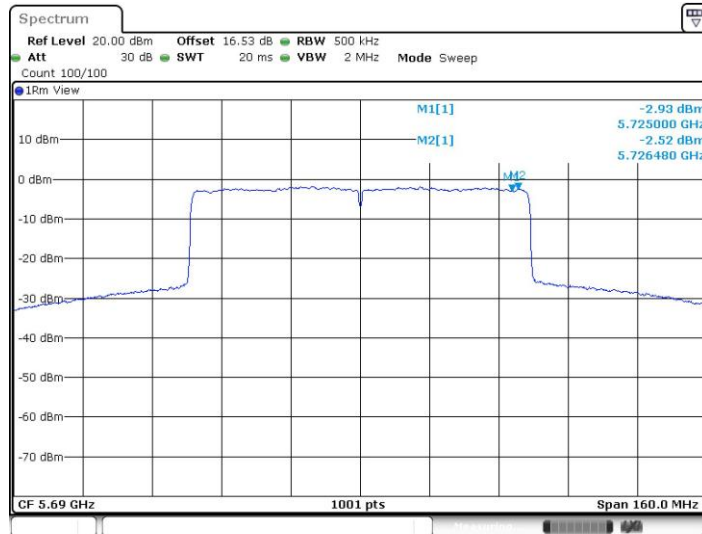

Date: 17.MAY.2022 17:36:01



11AX80MIMO\_Ant1\_5775



Date: 7.JUN.2022 23:41:52


11AX80MIMO\_Ant2\_5775



Date: 7.JUN.2022 23:43:05




<11ax Partial RU>

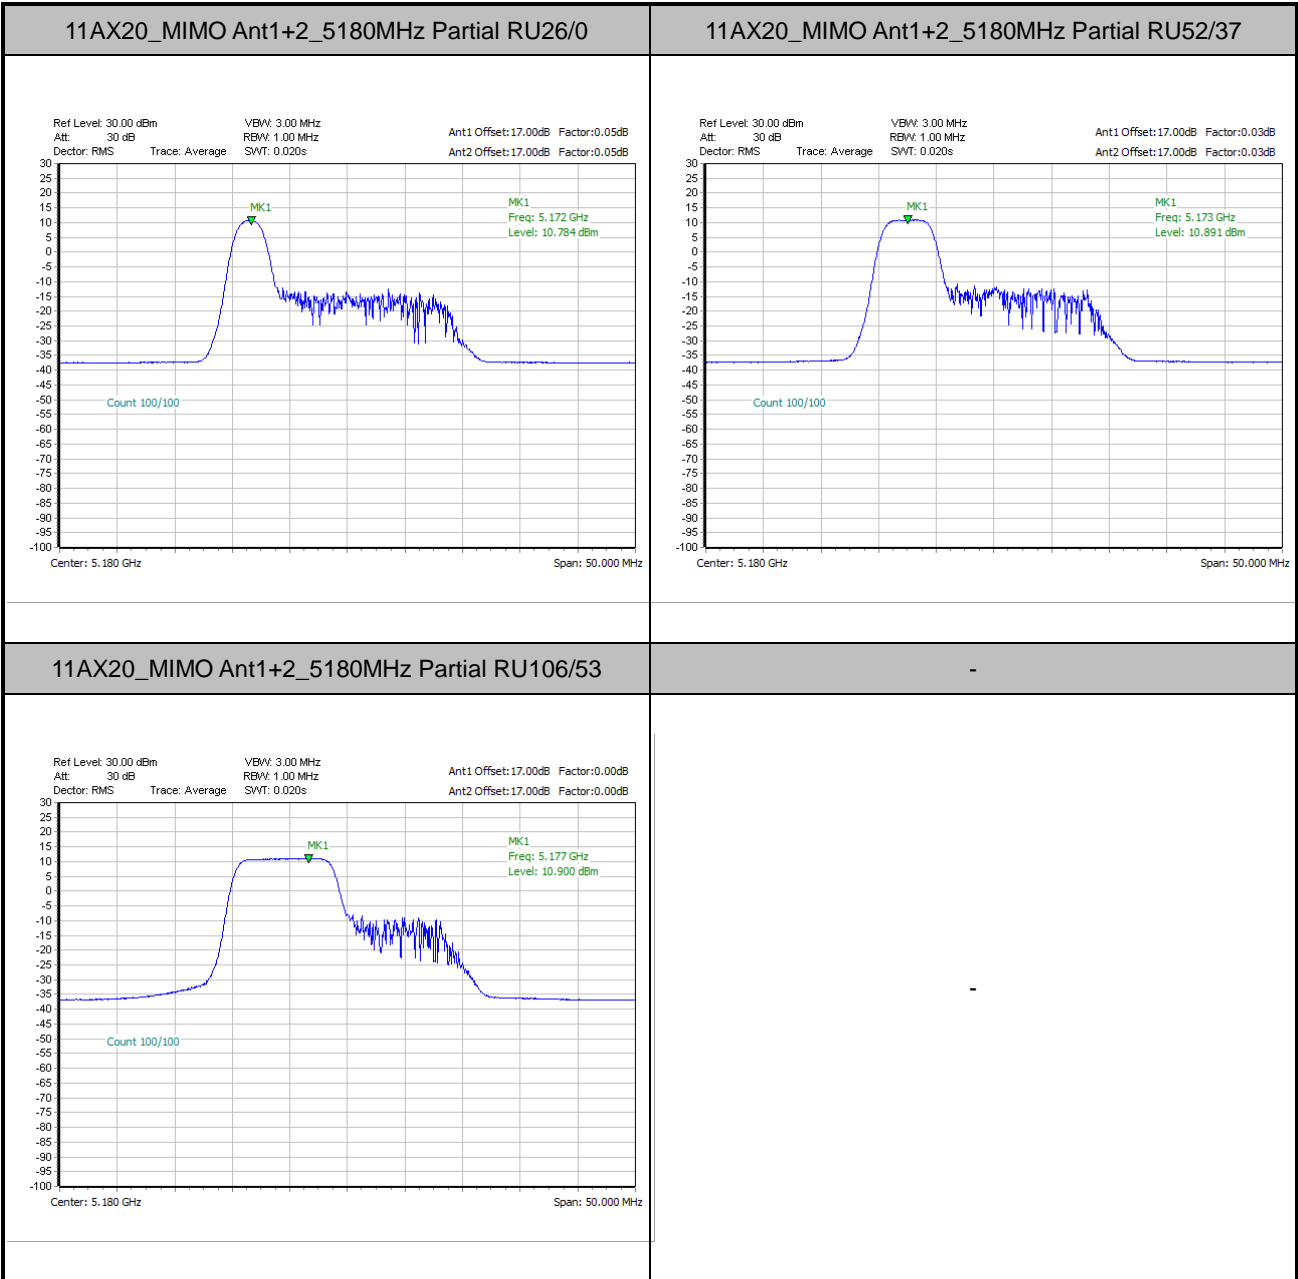





11AX20\_MIMO Ant1+2\_5220MHz Partial RU26/4

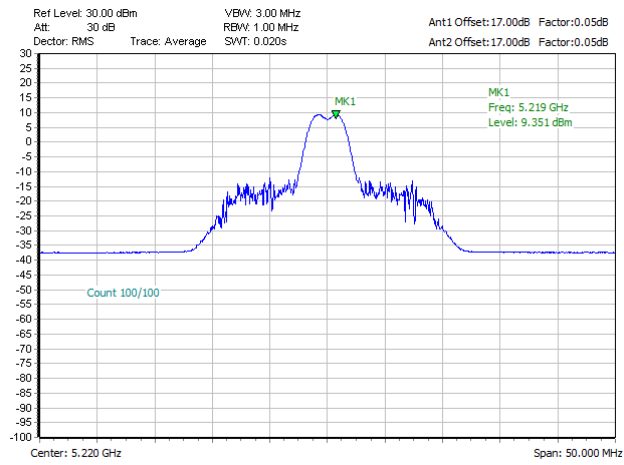

11AX20\_MIMO Ant1+2\_5220MHz Partial RU52/38

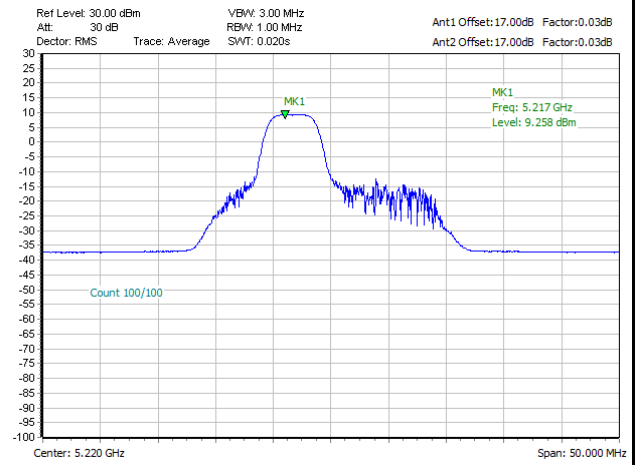


11AX20\_MIMO Ant1+2\_5220MHz Partial RU106/53

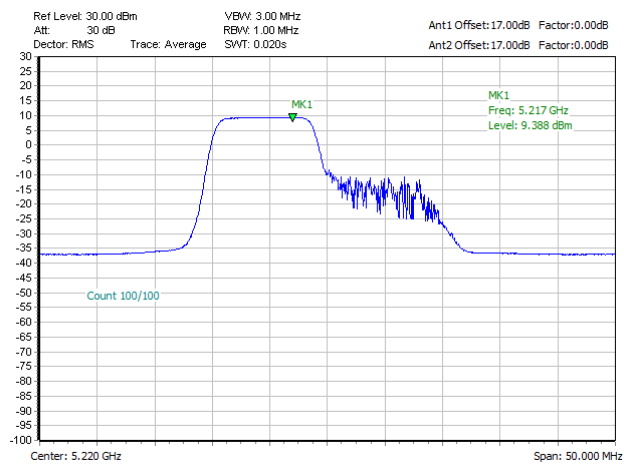







11AX20\_MIMO Ant1+2\_5240MHz Partial RU26/8

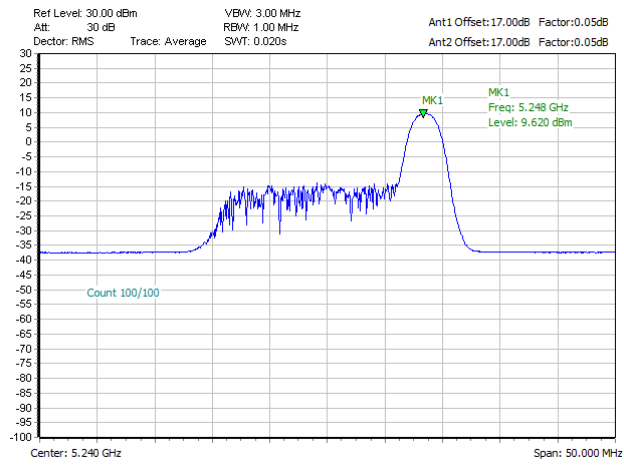

11AX20\_MIMO Ant1+2\_5240MHz Partial RU52/40

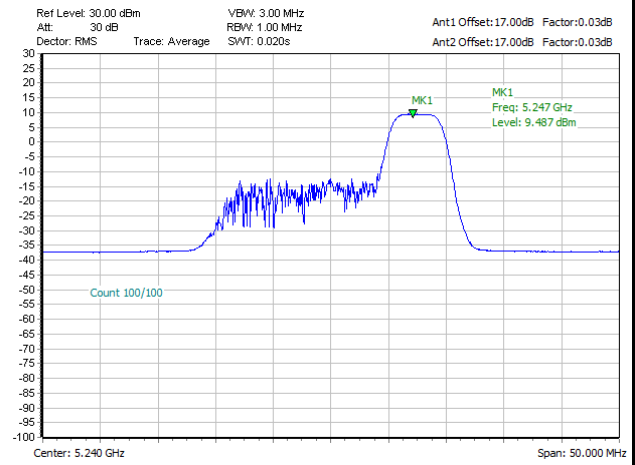


11AX20\_MIMO Ant1+2\_5240MHz Partial RU106/54

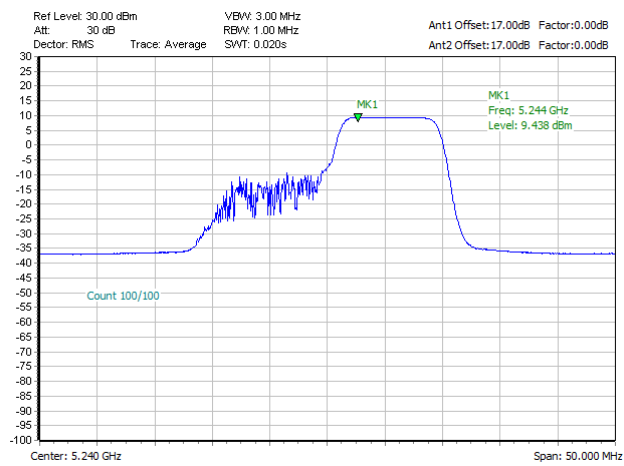





11AX20\_MIMO Ant1+2\_5260MHz Partial RU26/0

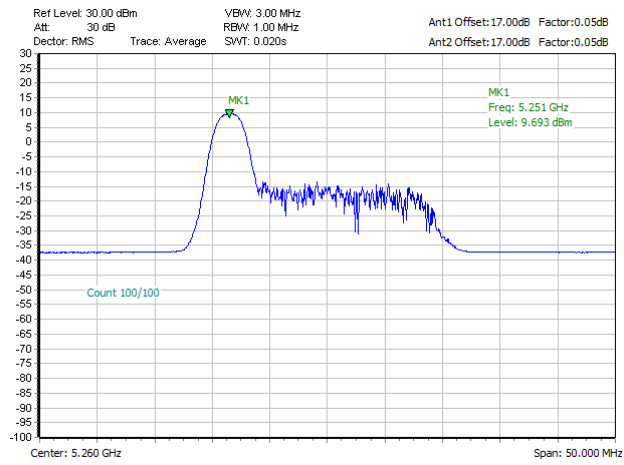

11AX20\_MIMO Ant1+2\_5260MHz Partial RU52/37

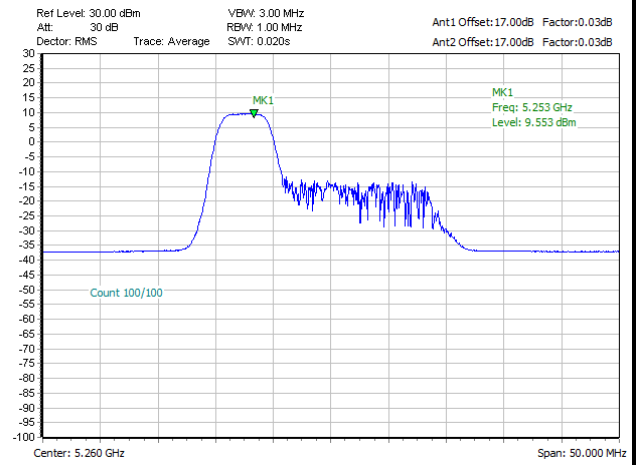


11AX20\_MIMO Ant1+2\_5260MHz Partial RU106/53

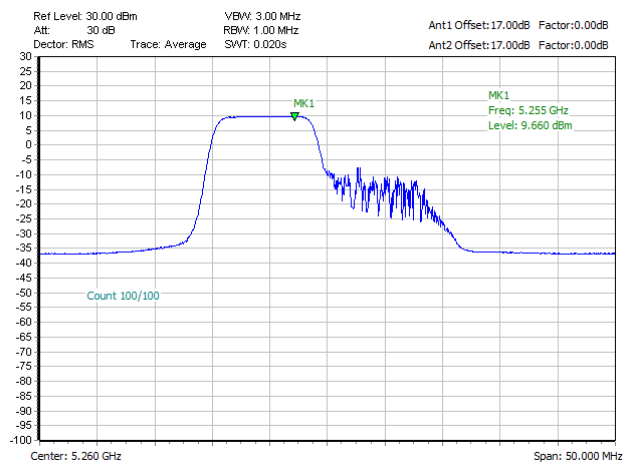





11AX20\_MIMO Ant1+2\_5300MHz Partial RU26/0

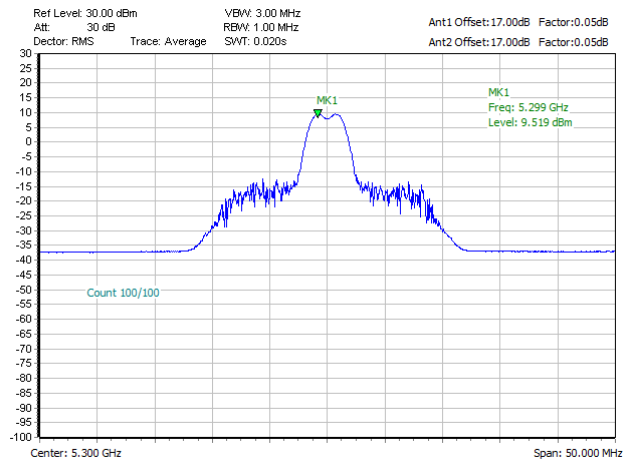

11AX20\_MIMO Ant1+2\_5300MHz Partial RU52/37

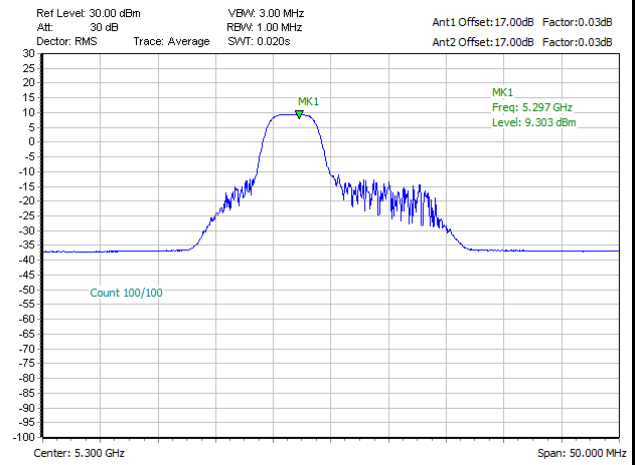


11AX20\_MIMO Ant1+2\_5300MHz Partial RU106/53

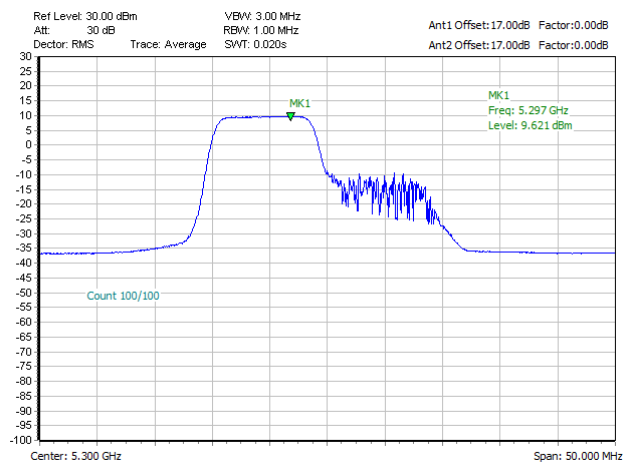





11AX20\_MIMO Ant1+2\_5320MHz Partial RU26/8

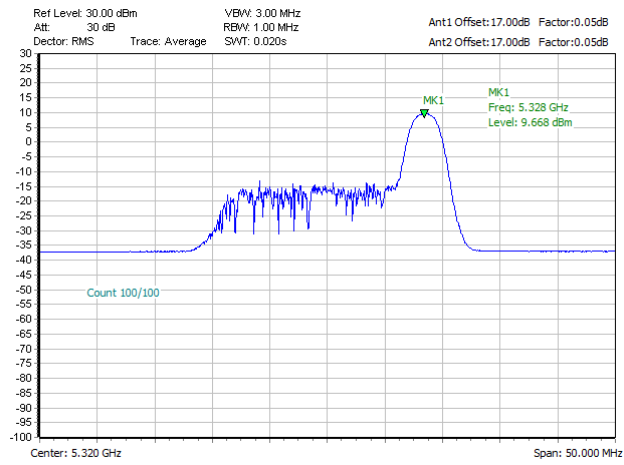

11AX20\_MIMO Ant1+2\_5320MHz Partial RU52/40

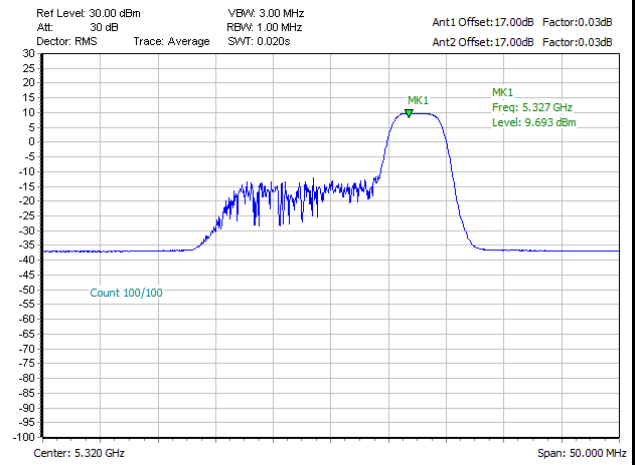


11AX20\_MIMO Ant1+2\_5320MHz Partial RU106/54

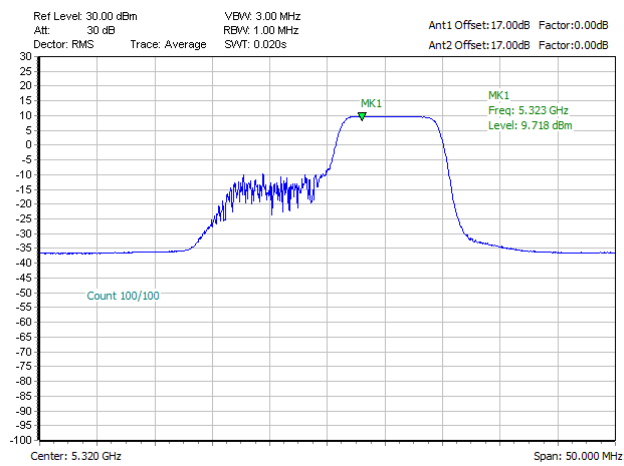





11AX20\_MIMO Ant1+2\_5500MHz Partial RU26/0

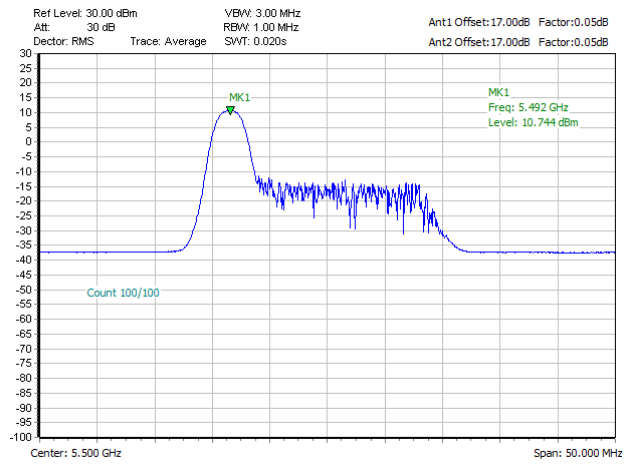

11AX20\_MIMO Ant1+2\_5500MHz Partial RU52/37

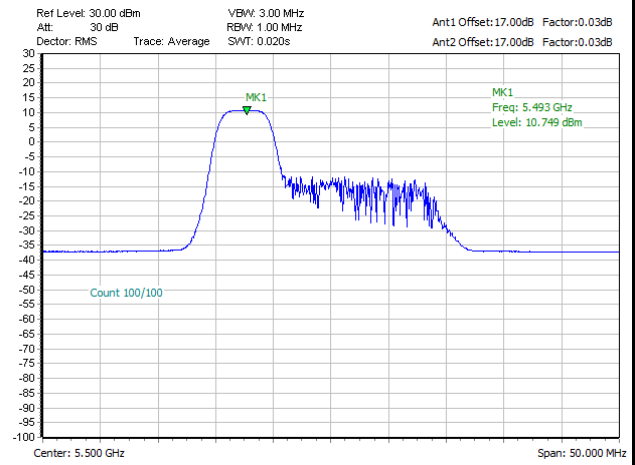


11AX20\_MIMO Ant1+2\_5500MHz Partial RU106/53

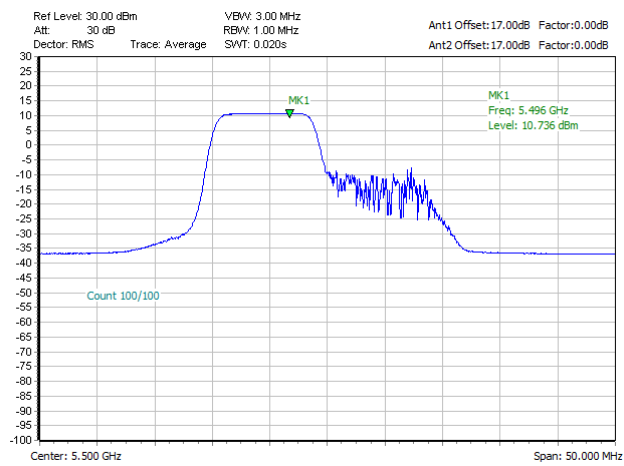





11AX20\_MIMO Ant1+2\_5580MHz Partial RU26/0

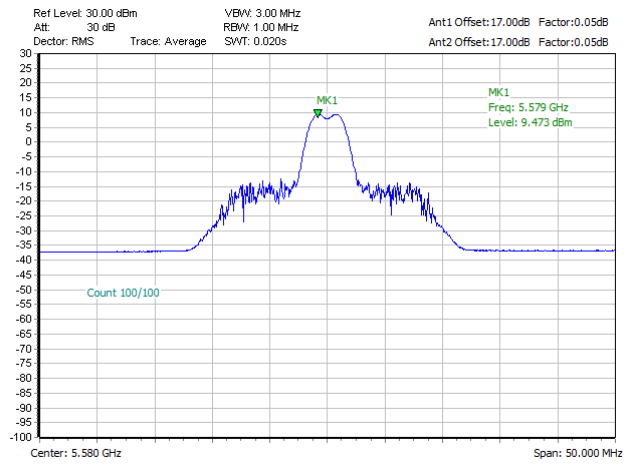

11AX20\_MIMO Ant1+2\_5580MHz Partial RU52/37

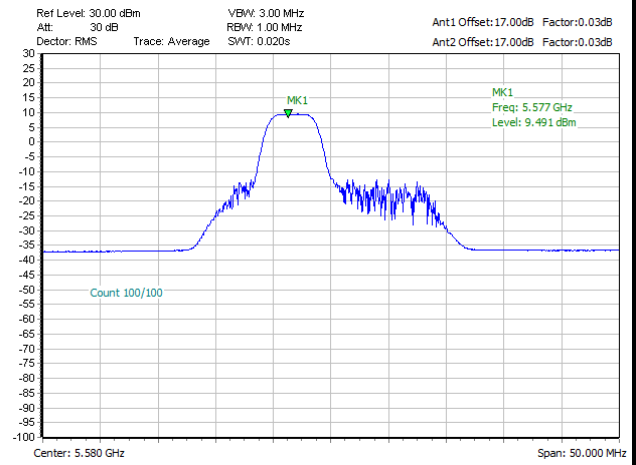


11AX20\_MIMO Ant1+2\_5580MHz Partial RU106/53

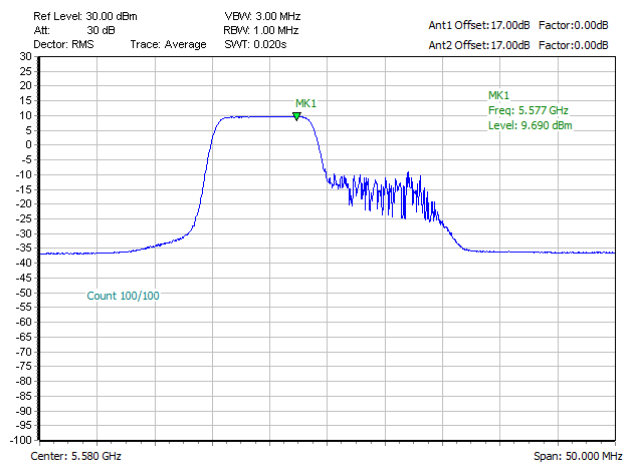





11AX20\_MIMO Ant1+2\_5700MHz Partial RU26/8

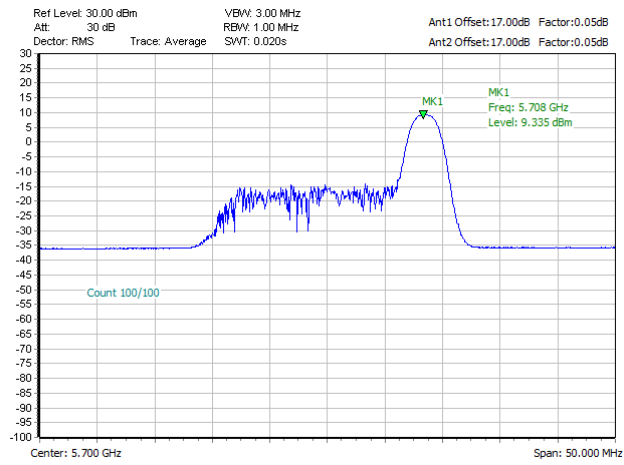

11AX20\_MIMO Ant1+2\_5700MHz Partial RU52/40

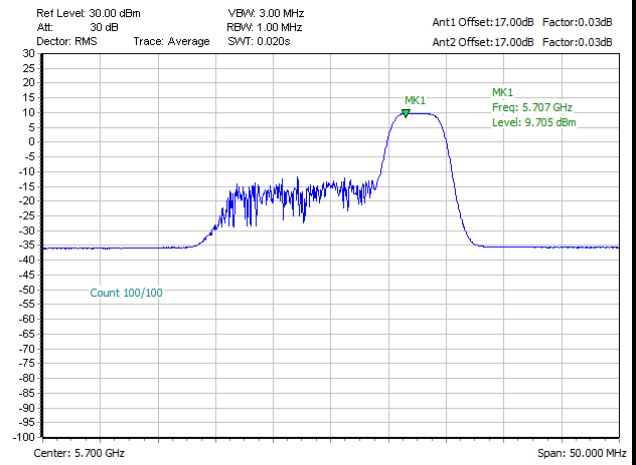


11AX20\_MIMO Ant1+2\_5700MHz Partial RU106/54

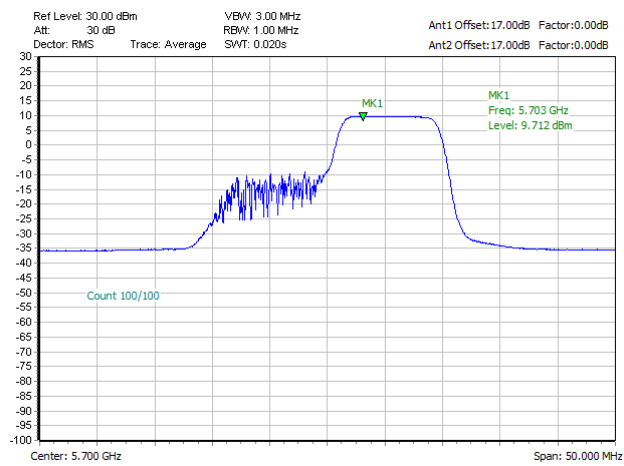





11AX20\_MIMO Ant1+2\_5720MHz Partial RU26/8

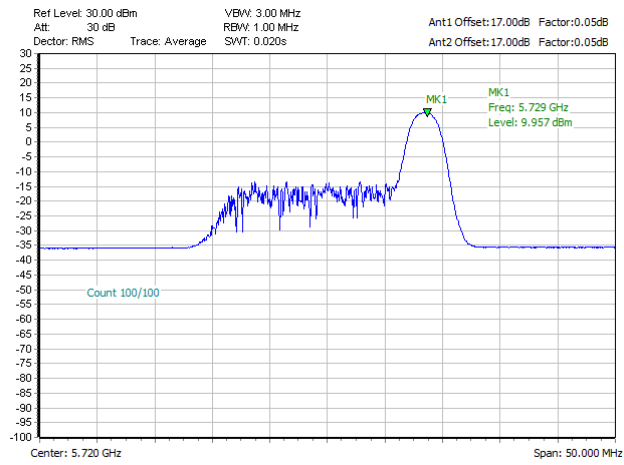

11AX20\_MIMO Ant1+2\_5720MHz Partial RU52/40

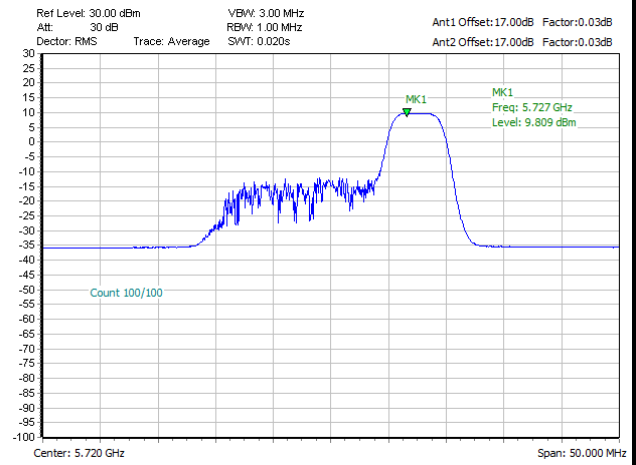


11AX20\_MIMO Ant1+2\_5720MHz Partial RU106/54

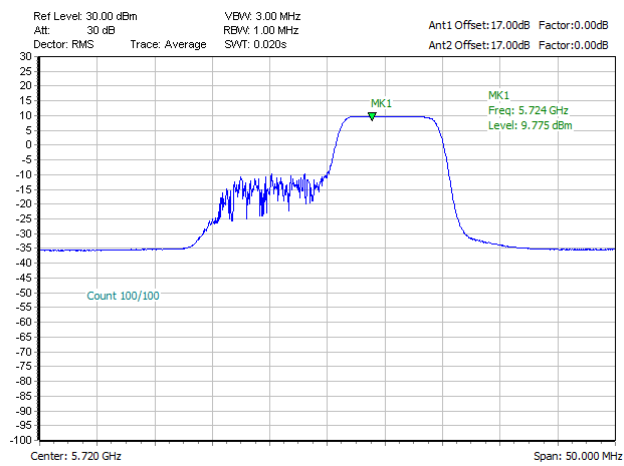






11AX20 5745MHz Partial RU26/0 MIMO Ant1

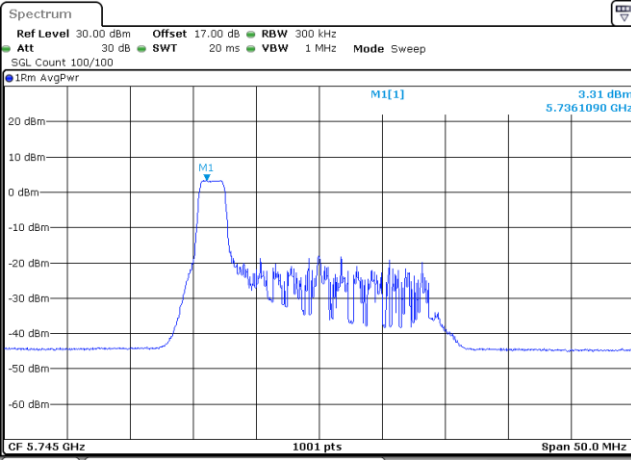


Date: 29 JUN 2022 00:46:35

11AX20 5745MHz Partial RU26/0 MIMO Ant2

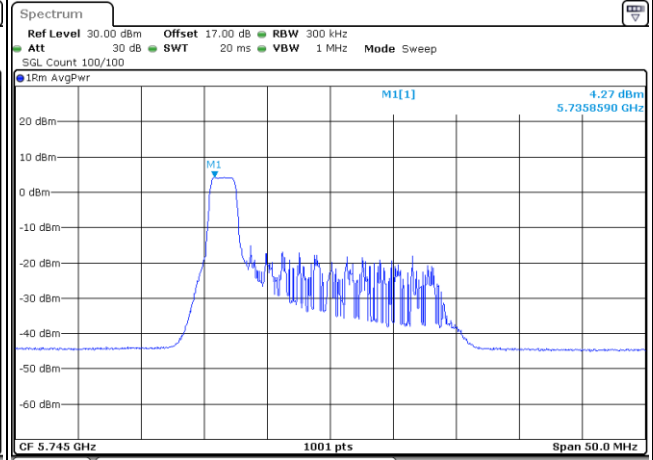


Date: 29 JUN 2022 00:47:13

11AX20 5745MHz Partial RU52/37 MIMO Ant1

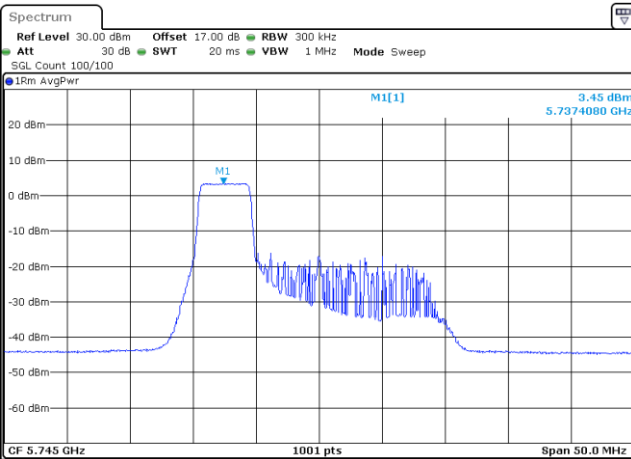

Date: 29 JUN 2022 00:50:02

11AX20 5745MHz Partial RU52/37 MIMO Ant2

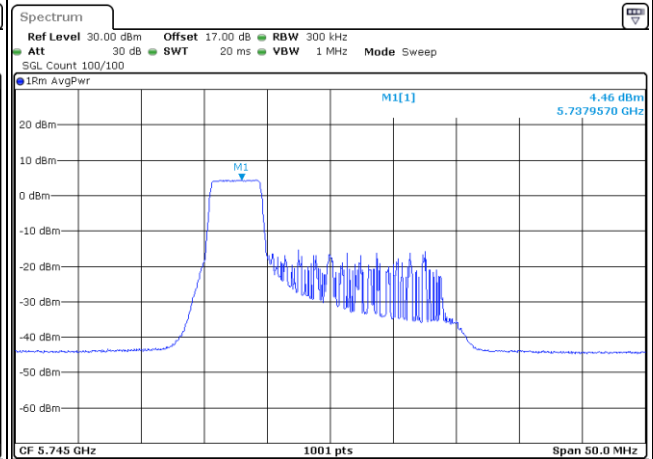

Date: 29 JUN 2022 00:50:42

