



FCC RF Test Report

FCC ID : UZ7PS30JP
EQUIPMENT : Personal Shopper
BRAND NAME : ZEBRA
MODEL NAME : PS30JP
APPLICANT : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
MANUFACTURER : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : 15E 6 GHz Low Power Dual Client (6CD)
TEST DATE(S) : Dec. 26, 2023 ~ Jan. 30, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

- 1 General Description 5**
 - 1.1 Product Feature of Equipment Under Test..... 5
 - 1.2 Product Specification of Equipment Under Test..... 6
 - 1.3 Modification of EUT 7
 - 1.4 Testing Location 7
 - 1.5 Test Software..... 7
 - 1.6 Applicable Standards..... 8
- 2 Test Configuration of Equipment Under Test 9**
 - 2.1 Carrier Frequency and Channel 9
 - 2.2 Test Mode 11
 - 2.3 Connection Diagram of Test System..... 13
 - 2.4 Support Unit used in test configuration and system 14
 - 2.5 EUT Operation Test Setup 14
 - 2.6 Measurement Results Explanation Example..... 14
- 3 Test Result 15**
 - 3.1 26dB & 99% Occupied Bandwidth Measurement 15
 - 3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement..... 16
 - 3.3 Fundamental Power Spectral Density Measurement..... 17
 - 3.4 In-Band Emissions (Channel Mask) 19
 - 3.5 Contention Based Protocol..... 21
 - 3.6 Unwanted Emissions Measurement..... 30
 - 3.7 AC Conducted Emission Measurement..... 34
 - 3.8 Antenna Requirements..... 36
- 4 List of Measuring Equipment..... 39**
- 5 Uncertainty of Evaluation 40**
- Appendix A. Conducted Test Results**
- Appendix B. AC Conducted Emission Test Result**
- Appendix C. Radiated Spurious Emission**
- Appendix D. Duty Cycle Plots**
- Appendix E. Setup Photographs**



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403(i) 15.407(a)(10)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)(8)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(a)(8)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(8)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(6)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	-
3.6	15.407(b)	Unwanted Emissions	Pass	Under limit 1.27 dB at 2483.50 MHz
3.7	15.207	AC Conducted Emission	Pass	Under limit 5.28 dB at 0.524 MHz
3.8	15.203 15.407(a)	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Personal Shopper
Brand Name	ZEBRA
Model Name	PS30JP
FCC ID	UZ7PS30JP
HW Version	EV2
SW Version	13-13-11.00-TG-U00-PRD-NEM-04
MFD	13Dec23
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. WIFI 6E 6CD contains two separate reports. This report (FR3D0816A) is indoor client mode for U-NII-5~8, and another report (FR3D0816B) is standard client mode for U-NII-5&7.

Specification of Accessory				
Battery 1	Brand Name	Zebra	Part Number	BT-000355-0020
Battery 2	Brand Name	Zebra	Part Number	BT-000355-5020

Supported Unit used in test configuration and system				
1-slot cradle	Brand Name	Zebra	Part Number	CRD-MC18-1SLOT-01
Adapter	Brand Name	Zebra	Part Number	PWR-BGA12V108W0WW
Programming USB cable	Brand Name	Zebra	Part Number	CBL-PS30-USBCHG-01
Soft Holster	Brand Name	Zebra	Part Number	SG-PS20-SFTHLT-01



1.2 Product Specification of Equipment Under Test

Standards-related Product Specification																
Tx/Rx Frequency Range	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-6: 6425 MHz ~ 6525 MHz U-NII-7: 6525 MHz ~ 6875 MHz U-NII-8: 6875 MHz ~ 7125 MHz															
Maximum EIRP	<MIMO Ant.0+1> <U-NII-5~8> 802.11a : 6.71 dBm / 0.0047 W 802.11ax HE20 : 10.23 dBm / 0.0105 W 802.11ax HE40 : 13.02 dBm / 0.0200 W 802.11ax HE80 : 15.26 dBm / 0.0336 W 802.11ax HE160 : 17.60 dBm / 0.0575 W															
99% Occupied Bandwidth	802.11a : 16.583 MHz 802.11ax HE20 : 18.981 MHz 802.11ax HE40 : 37.802 MHz 802.11ax HE80 : 77.203 MHz 802.11ax HE160 : 157.283 MHz															
Antenna Type / Gain	<5925 MHz ~ 6425 MHz > <Ant. 0> : IFA Antenna with gain 2.90 dBi <Ant. 1> : IFA Antenna with gain 4.00 dBi <6425 MHz ~ 6525 MHz > <Ant. 0> : IFA Antenna with gain 2.30 dBi <Ant. 1> : IFA Antenna with gain 3.50 dBi <6525 MHz ~ 6875 MHz > <Ant. 0> : IFA Antenna with gain 1.40 dBi <Ant. 1> : IFA Antenna with gain 2.20 dBi <6875 MHz ~ 7125 MHz > <Ant. 0> : IFA Antenna with gain -1.40 dBi <Ant. 1> : IFA Antenna with gain 1.20 dBi															
Type of Modulation	802.11a : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)															
Antenna Function Description	<table border="1"> <thead> <tr> <th></th> <th>Ant. 0</th> <th>Ant. 1</th> </tr> </thead> <tbody> <tr> <td>802.11 a/ax SISO</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11 a/ax CDD</td> <td colspan="2">V</td> </tr> <tr> <td>802.11 ax SDM</td> <td colspan="2">V</td> </tr> <tr> <td>802.11 ax TxBF</td> <td colspan="2">V</td> </tr> </tbody> </table>		Ant. 0	Ant. 1	802.11 a/ax SISO	V	V	802.11 a/ax CDD	V		802.11 ax SDM	V		802.11 ax TxBF	V	
	Ant. 0	Ant. 1														
802.11 a/ax SISO	V	V														
802.11 a/ax CDD	V															
802.11 ax SDM	V															
802.11 ax TxBF	V															

Remark:

- 802.11ax support full RU tone and partial RU tone(26/52/242/484/996-tone), both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/Channel Mask in appendix A, all the other test case were performed with full RU with its maximum power/PSD.
- The EUT does not support channel puncturing mode.
- WIFI MIMO support CDD & SDM & Tx Beamforming mode by manufacturer declared.
- For WLAN SISO & MIMO(CDD) mode of 802.11a, the whole testing has assessed CDD mode by referring to the higher normal conducted power.



- 5. For WLAN SISO & MIMO(CDD) & MIMO(SDM) & Tx Beamforming mode of 802.11ax, the whole testing has assessed SDM mode by referring to the higher normal conducted power. SDM mode conducted power is set to 3dB higher than TXBF/CDD, Since the maximum array gain for a two antennas system is 3dB. Hence, the TXBF compliance is met by testing SDM mode as worst mode for indoor client mode.
- 6. The device supports 1S2T (CDD & Tx Beamforming) and 2S2T (SDM) mode;
1S2T: Nss=1, MIMO 2Tx; 2S2T: Nss=2, MIMO 2Tx.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH08-KS TH01-KS DFS01-KS	CN1257	314309

1.5 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH08-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24
4.	DFS01-KS	Sporton	Test Tools	1.0



1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

<U-NII-5, 6, 7, 8>

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							
BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							
BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							



BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							

BW 20M	Channel	225		229		233			
	Freq. (MHz)	7075		7095		7115			
BW 40M	Channel	227							
	Freq. (MHz)	7085							



2.2 Test Mode

Radiated Spurious Emission Test Modes

1. For Radiated Test Cases, The tests were performed with Adapter. All radiated test mode refer to Appendix C of this report.
2. For simultaneous transmission test mode, the combination testing was assessed from the worst RSE link mode of BLE / WLAN 2.4G / WLAN 6G.
3. The device support DBS (Dual Band Simultaneous) function, when the device WLAN 2.4GHz and WLAN 6GHz transmit at the same time the module will limit different output power for simultaneous transmission compliance.
4. For band U-NII-5&7, the conducted power and PSD for indoor client mode is smaller than standard client mode, so all the RSE test data is covered by standard client mode.

Test Cases	
AC Conducted Emission	Mode 1 : WLAN 6G Link +BT Link + Single slot locking cradle + AC Adapter (PWR-BGA12V108W0WW)(Sanhua) + Fast Charge Mode @1.5AMP + DC Line Cord 1 (CBL-DC-394A1-01) + Battery 1 (BT-000355-0020)

Ch. #		5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz
		UNII-5	UNII-6	UNII-7	UNII-8
		802.11a/ax HE20	802.11a/ax HE20	802.11a/ax HE20	802.11a/ax HE20
L	Low	001	097	117	189
M	Middle	049	105	149	209
H	High	093	113	181	229/233
Straddle		-	-	185	-

Ch. #		5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz
		UNII-5	UNII-6	UNII-7	UNII-8
		802.11ax HE40	802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	003	099	123	195
M	Middle	051	-	147	211
H	High	091	107	179	227
Straddle		-	115	187	-




Ch. #		5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz
		UNII-5	UNII-6	UNII-7	UNII-8
		802.11ax HE80	802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	007	103	135	199
M	Middle	055		151	-
H	High	087		167	215
Straddle		-	119	183	-

Ch. #		5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz
		UNII-5	UNII-6	UNII-7	UNII-8
		802.11ax HE160	802.11ax HE160	802.11ax HE160	802.11ax HE160
L	Low	015	-	143	207
M	Middle	047			
H	High	079			
Straddle		-	111	175	-


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

For Conducted Emission:

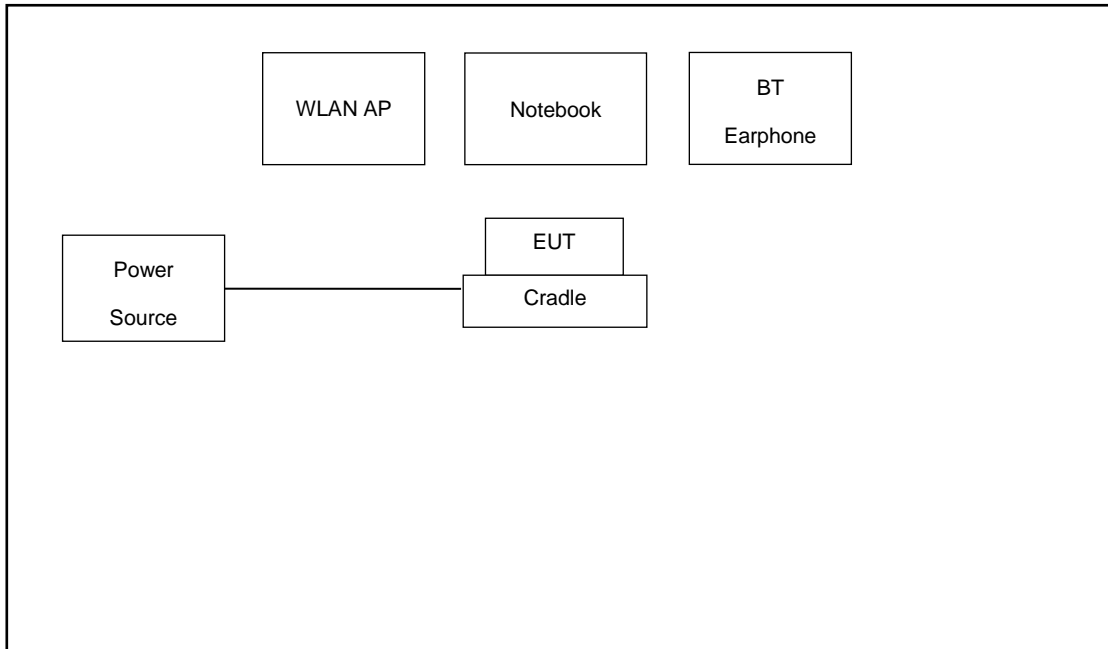

For Radiated Emission:

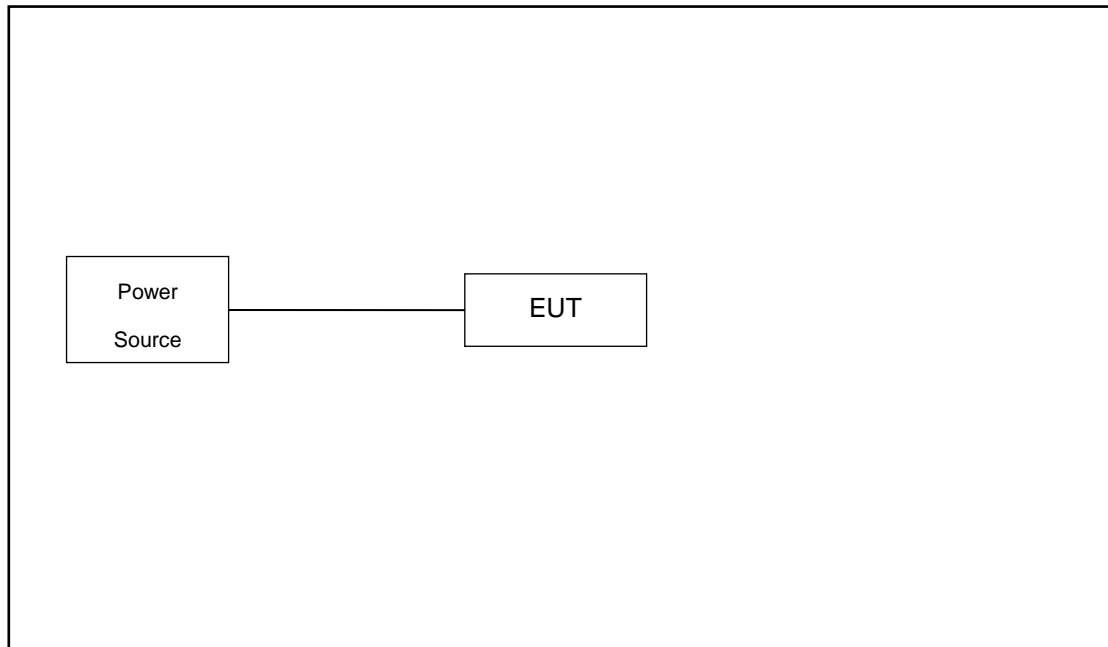

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.07 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.07 + 10 = 15.07 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Limit of 26dB & 99% Occupied Bandwidth

<FCC 14-30 CFR 15.407>

(a)(10) The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

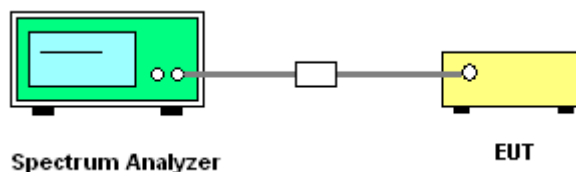

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

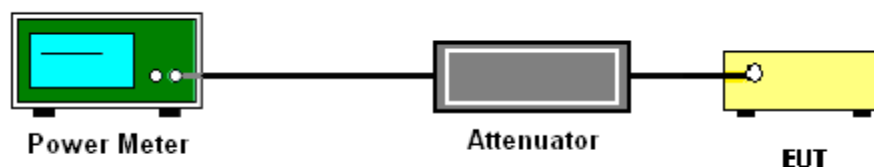

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

Method (c): Measure and add $10 \log(N_{ANT})$ dB, where N_{ANT} is the number of outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit.

3.3.4 Test Setup

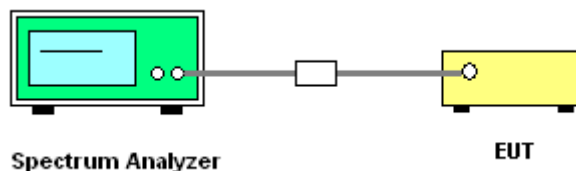

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(b)(6) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.

- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

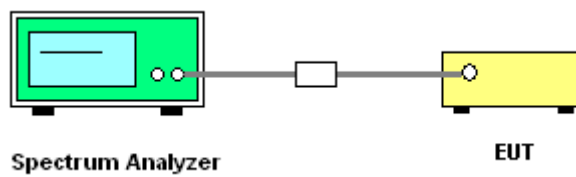

3.4.5 Test Result

Please refer to Appendix A.



3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

<FCC 14-30 CFR 15.407>

(d)(6) Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

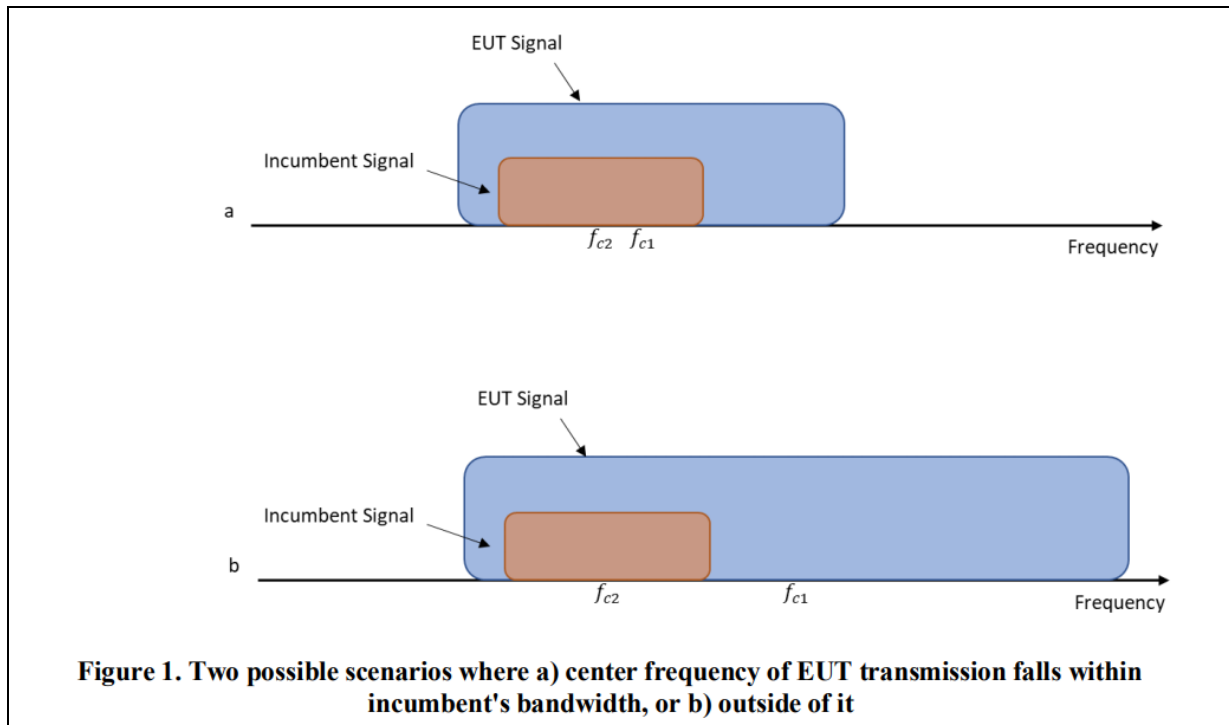

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.


3.5.3 Test Procedures

1. To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
2. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
3. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
4. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
5. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center

frequency for the AWGN signal and repeat the process.

6. EUT was driven in MIMO mode, the interferer signal was injected to both chains to monitor the performance, while the interferer level is determined according to the lowest antenna gain among both antennas.

3.5.4 Test Setup

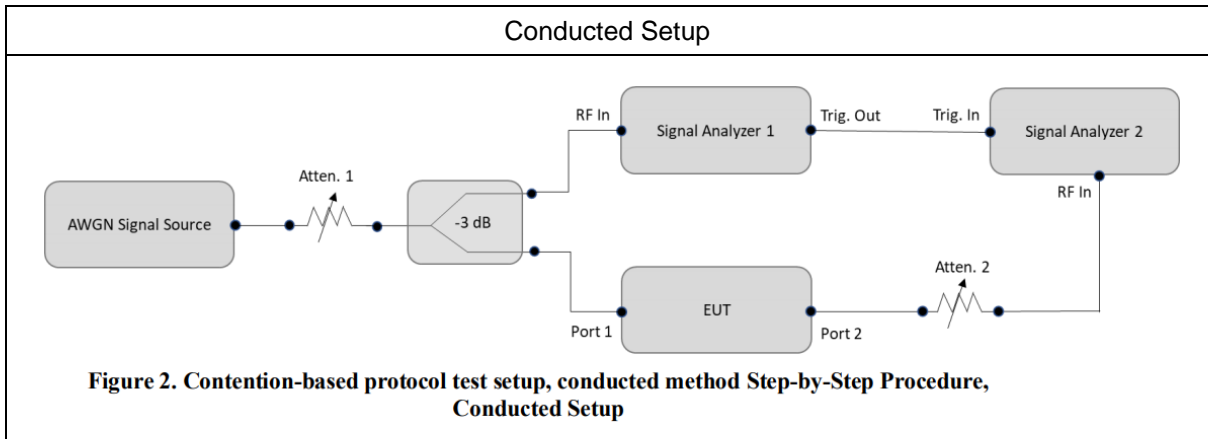

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
WLAN AP	ASUS	GT-AXE11000	Dual Band AP
Notebook	DELL	P78G	LAN



3.5.6 Test Summary of Contention Based Protocol Test

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 5	6135	20	6135	-73.72	100	-62	-72.32	10.32
				Result: Stop Transmission				
				-74.72	< 90	-62	-73.32	11.32
				Result: Minimal Operation				
				-75.42	0	-62	-74.02	12.02
				Result: Normal Operation				
	6185	160	6110	-75.37	100	-62	-73.97	11.97
				Result: Stop Transmission				
				-76.37	< 90	-62	-74.97	12.97
				Result: Minimal Operation				
				-77.26	0	-62	-75.86	13.86
				Result: Normal Operation				
	6185	160	6185	-69.93	100	-62	-68.53	6.53
				Result: Stop Transmission				
				-70.93	< 90	-62	-69.53	7.53
				Result: Minimal Operation				
				-72.5	0	-62	-71.1	9.1
				Result: Normal Operation				
6260	160	6260	-73.76	100	-62	-72.36	10.36	
			Result: Stop Transmission					
			-74.76	< 90	-62	-73.36	11.36	
			Result: Minimal Operation					
6260	160	6260	-75.72	0	-62	-74.32	12.32	
			Result: Normal Operation					

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 0, gain = -1.40dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 6	6455	20	6455	-71.99	100	-62	-70.59	8.59
				Result: Stop Transmission				
				-72.99	< 90	-62	-71.59	9.59
				Result: Minimal Operation				
				-74.17	0	-62	-72.77	10.77
				Result: Normal Operation				
	6505	160	6430	-72.65	100	-62	-71.25	9.25
				Result: Stop Transmission				
				-73.65	< 90	-62	-72.25	10.25
				Result: Minimal Operation				
				-74.86	0	-62	-73.46	11.46
				Result: Normal Operation				
	6580	160	6505	-69.36	100	-62	-67.96	5.96
				Result: Stop Transmission				
				-70.36	< 90	-62	-68.96	6.96
				Result: Minimal Operation				
				-70.99	0	-62	-69.59	7.59
				Result: Normal Operation				
6580	160	6580	-73.34	100	-62	-71.94	9.94	
			Result: Stop Transmission					
			-74.34	< 90	-62	-72.94	10.94	
Result: Minimal Operation								
-75.4	0	-62	-74	12				
Result: Normal Operation								

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 0, gain = -1.40dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)	
UNII Band 7	6695	20	6695	-71.1	100	-62	-69.7	7.7	
				Result: Stop Transmission					
				-72.1	< 90	-62	-70.7	8.7	
				Result: Minimal Operation					
				-72.78	0	-62	-71.38	9.38	
				Result: Normal Operation					
	6665	160	6590	-74.38	100	-62	-72.98	10.98	
				Result: Stop Transmission					
				-75.38	< 90	-62	-73.98	11.98	
				Result: Minimal Operation					
				-76.19	0	-62	-74.79	12.79	
				Result: Normal Operation					
			6665	6665	-71.27	100	-62	-69.87	7.87
					Result: Stop Transmission				
					-72.27	< 90	-62	-70.87	8.87
					Result: Minimal Operation				
					-73.06	0	-62	-71.66	9.66
					Result: Normal Operation				
6740	6740	-73.74	100	-62	-72.34	10.34			
		Result: Stop Transmission							
		-74.74	< 90	-62	-73.34	11.34			
		Result: Minimal Operation							
-75.9	0	-62	-74.5	12.5					
Result: Normal Operation									

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 0, gain = -1.40dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)	
UNII Band 8	7015	20	7015	-70.85	100	-62	-69.45	7.45	
				Result: Stop Transmission					
				-71.85	< 90	-62	-70.45	8.45	
				Result: Minimal Operation					
				-73.16	0	-62	-71.76	9.76	
				Result: Normal Operation					
	6985	160	6910	-72.77	100	-62	-71.37	9.37	
				Result: Stop Transmission					
				-73.77	< 90	-62	-72.37	10.37	
				Result: Minimal Operation					
				-74.63	0	-62	-73.23	11.23	
				Result: Normal Operation					
			6985	6985	-68.86 (worst)	100	-62	-67.46	5.46
					Result: Stop Transmission				
					-69.86	< 90	-62	-68.46	6.46
					Result: Minimal Operation				
					-70.65	0	-62	-69.25	7.25
					Result: Normal Operation				
7060	7060	-71.33	100	-62	-69.93	7.93			
		Result: Stop Transmission							
		-72.33	< 90	-62	-70.93	8.93			
		Result: Minimal Operation							
-73.85	0	-62	-72.45	10.45					
Result: Normal Operation									

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 0, gain = -1.40dBi)


Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



3.5.7 Worst Case Plots of Contention Based Protocol

Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)

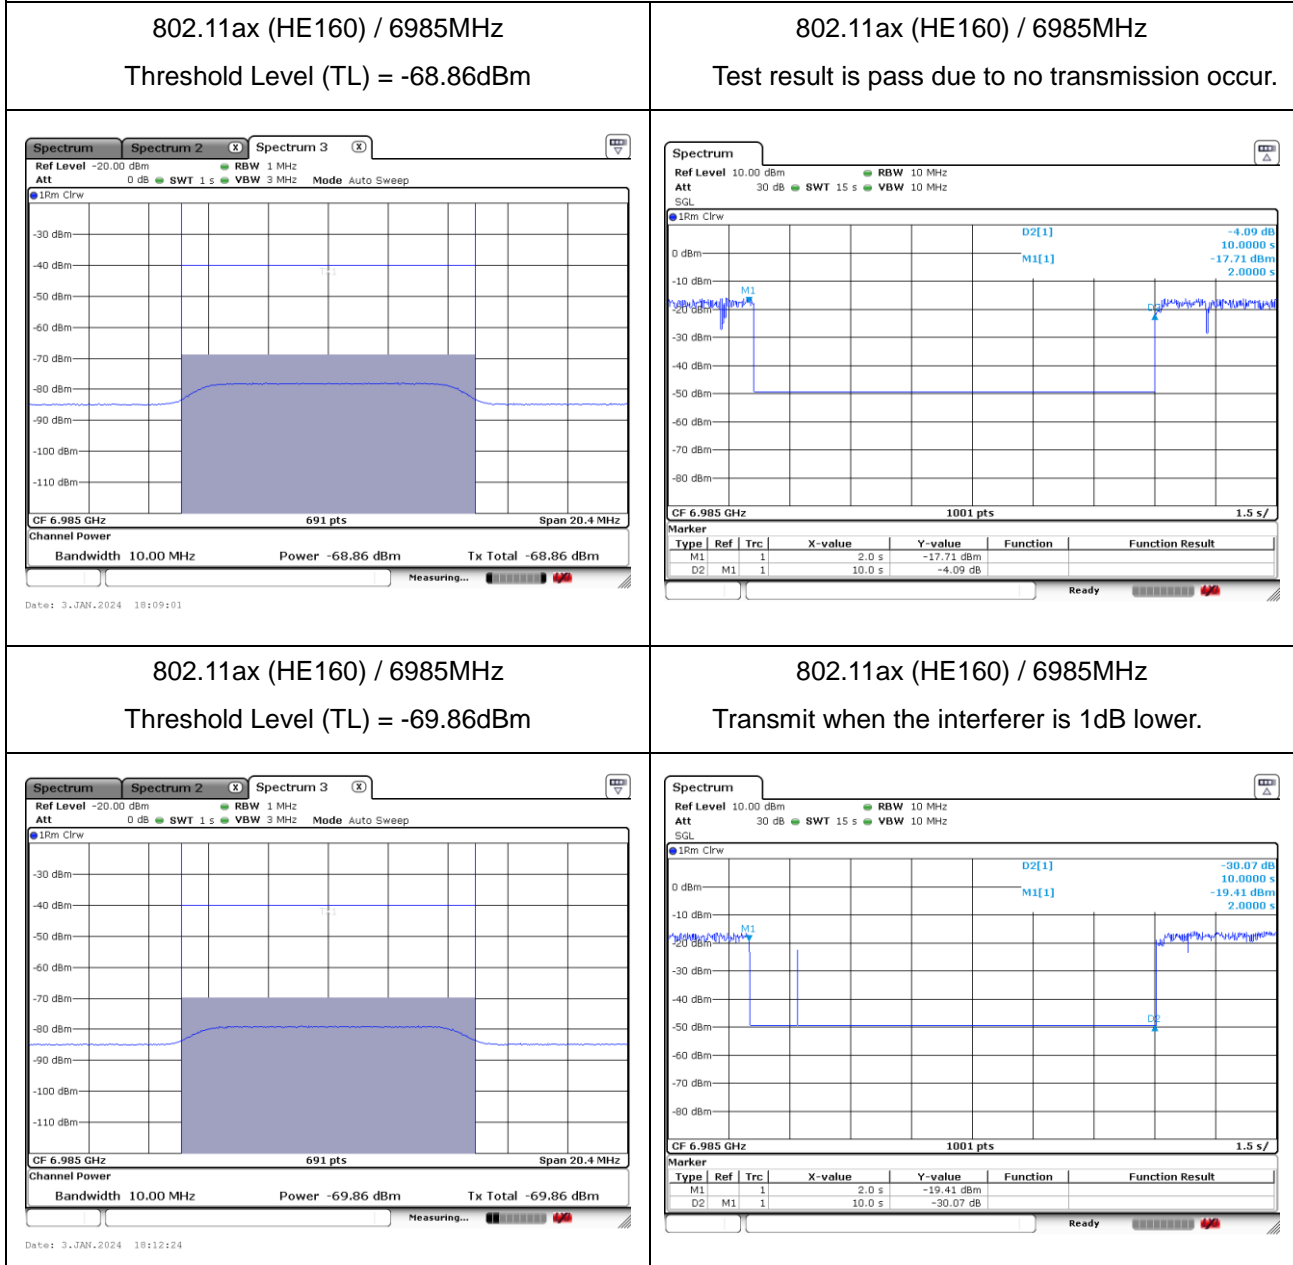


Remark: M1: Injection of AWGN signal, D1: Removal of AWGN signal



3.5.8 Worst Case of Contention Based Protocol Transmission Bandwidth

Verify transmission absence when Incumbent signal at different frequency (frequency domain plots).

1. When Incumbent Signal inject at lowest frequency, the transmission bandwidth reduced to 20MHz;
2. When Incumbent Signal inject at middle frequency, the whole 160MHz bandwidth stop transmission;
3. When Incumbent Signal inject at highest frequency, the transmission bandwidth reduced to 80MHz;

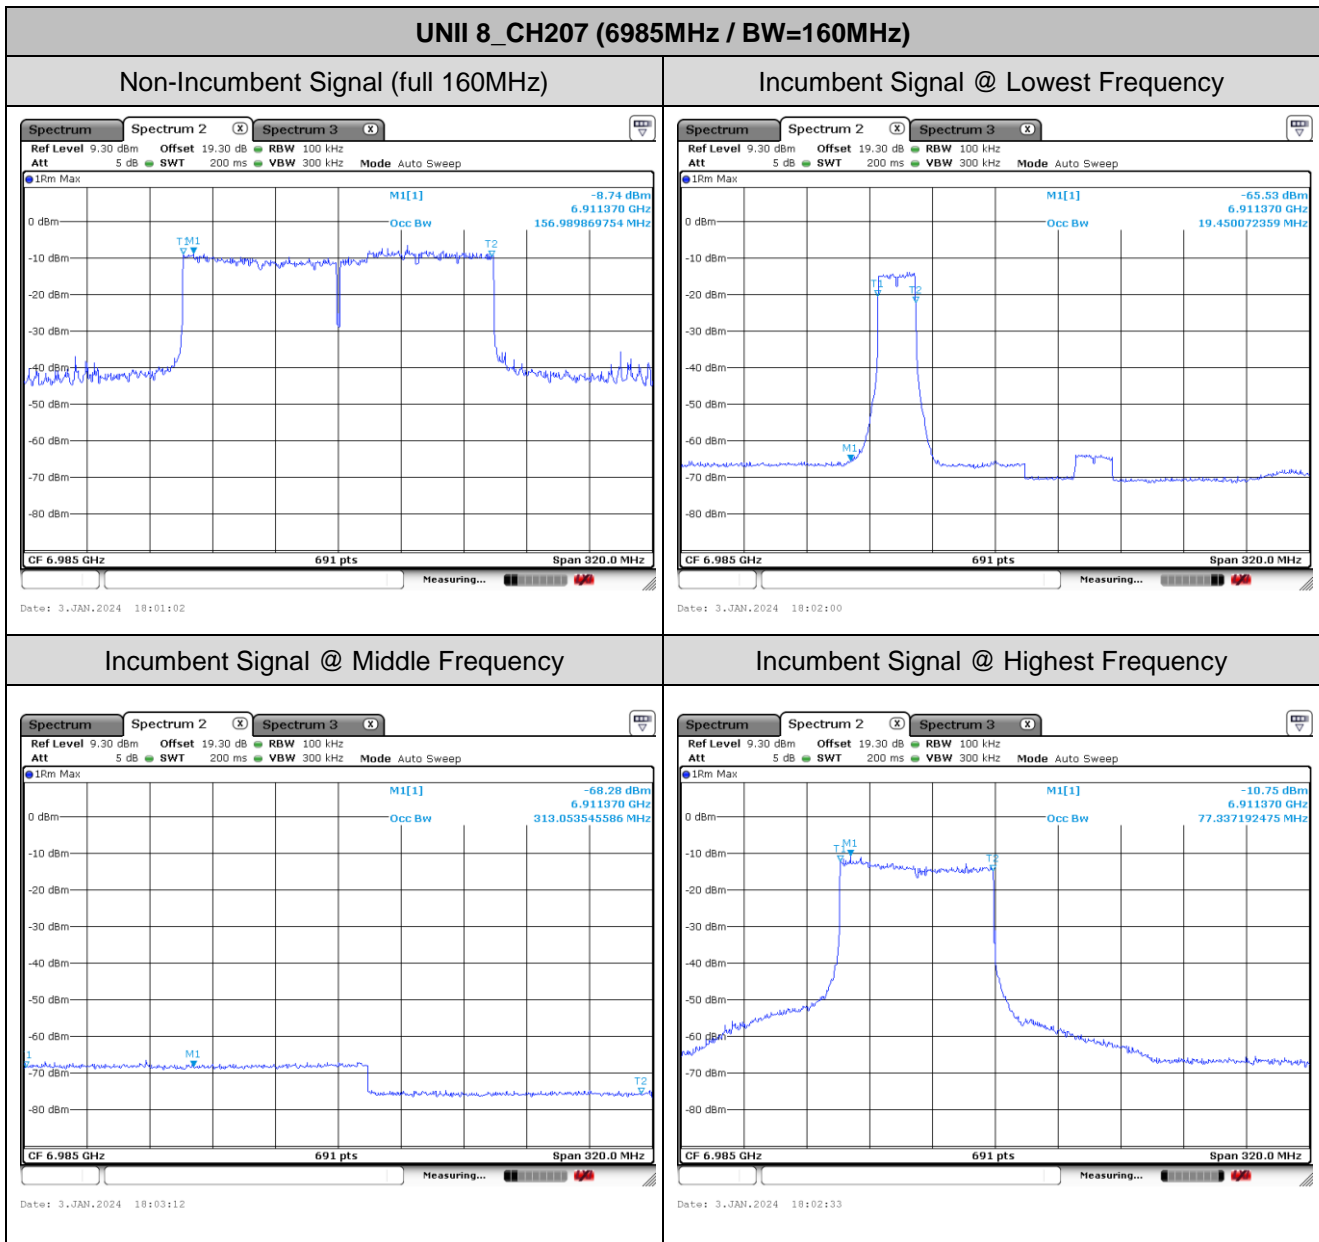



3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.6.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.




3.6.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.6.4 Test Setup


For radiated emissions below 30MHz

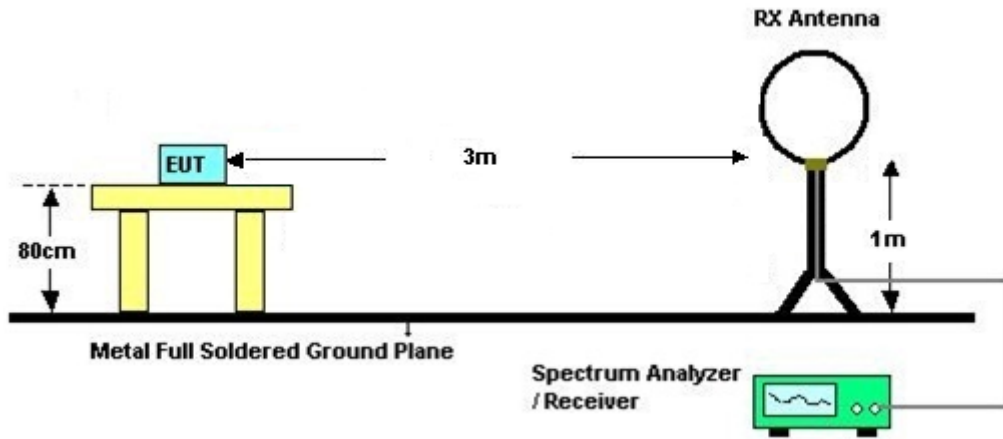

For radiated emissions from 30MHz to 1GHz

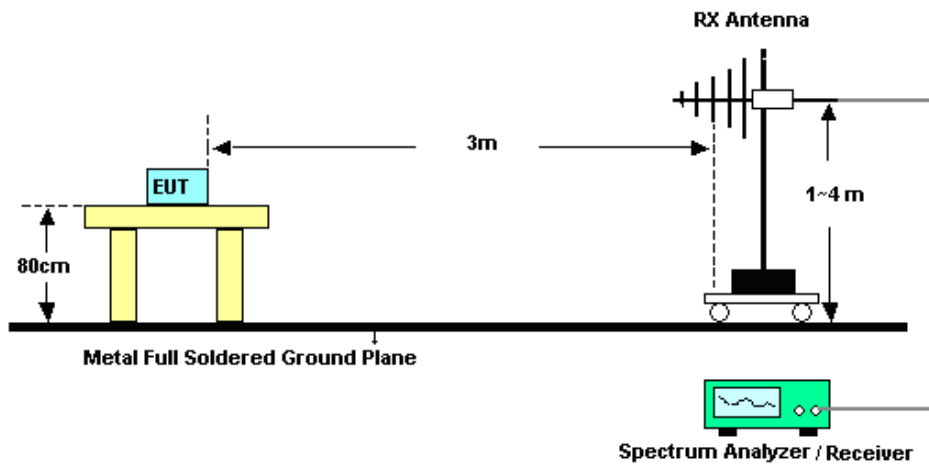

For radiated emissions above 1GHz

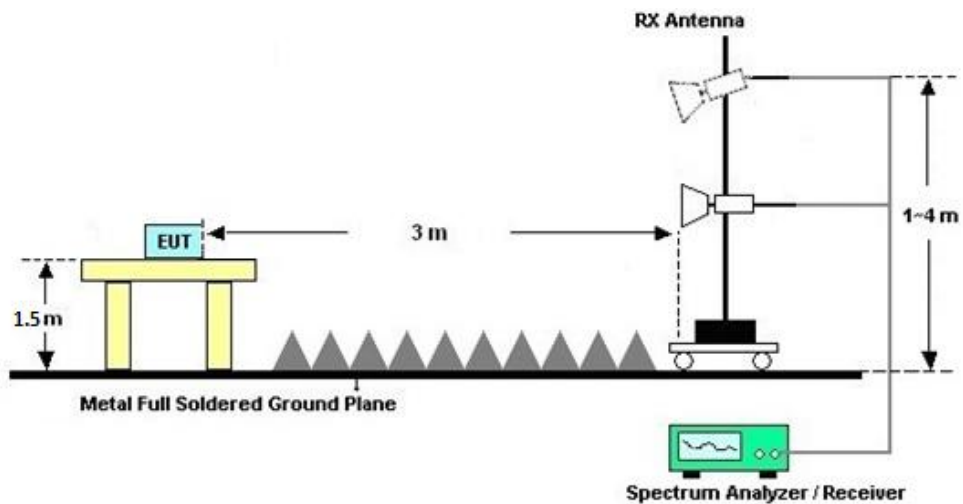



3.6.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.6.7 Duty Cycle

Please refer to Appendix D.

3.6.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.



3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup

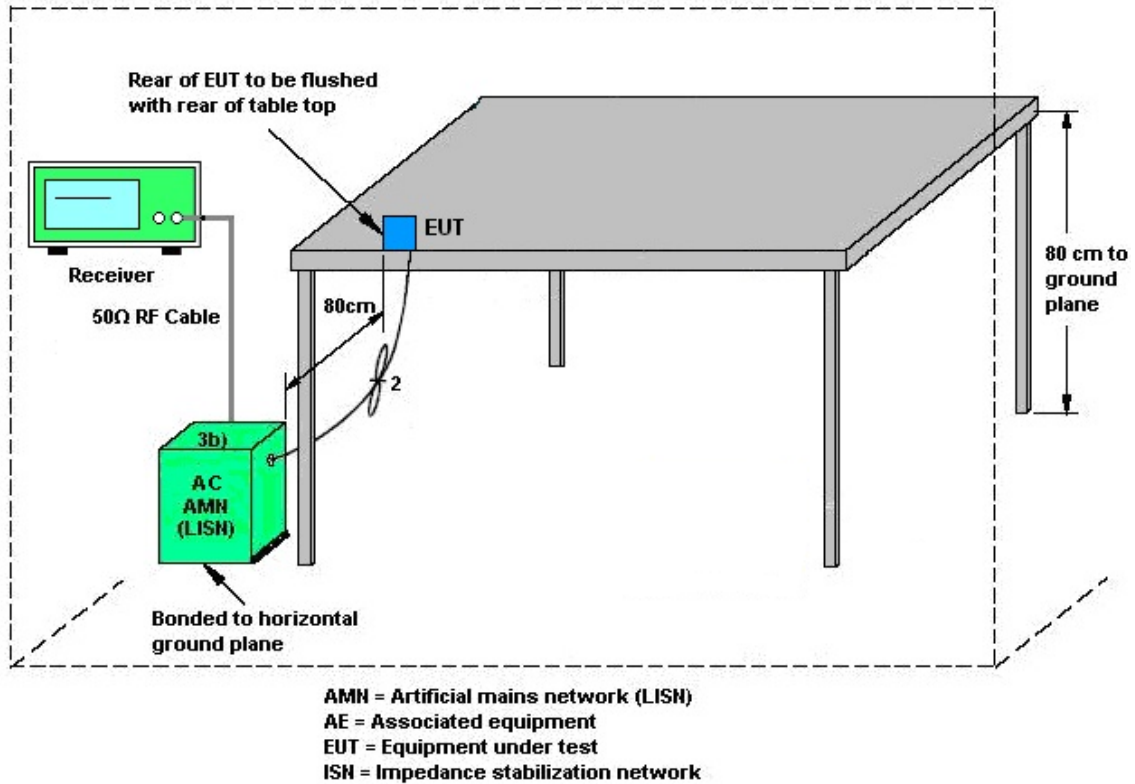

3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.8 Antenna Requirements

3.8.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.8.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For 802.11a/ax mode, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = G_{ANT MAX}(Ant.1 Gain, Ant.2 Gain,...) + Array Gain, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for N_{ANT} ≤ 4;

For PSD, the directional gain calculation is following,

Directional gain = 10 log[(10^{G₁/20} + 10^{G₂/20} + ... + 10^{G_n/20})² / N_{ANT}] dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

N_{SS} = number of spatial streams. (The worst case directional gain will occur when NSS = 1)

	Ant. 0 (dBi)	Ant. 1 (dBi)	DG for Power (dBi)	DG for PSD (dBi)
U-NII-5	2.90	4.00	4.00	6.48
U-NII-6	2.30	3.50	3.50	5.93
U-NII-7	1.40	2.20	2.20	4.82
U-NII-8	-1.40	1.20	1.20	3.01



<SDM Modes> (spatial division multiplexing)

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For 802.11ax mode, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = G_{ANT MAX}(Ant.1 Gain, Ant.2 Gain,...) + Array Gain, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for N_{ANT} ≤ 4;

For PSD, the directional gain calculation is following,

Directional gain = 10 log[(10^{G₁/10} + 10^{G₂/10} + ... + 10^{G_n/10})/N_{ANT}] dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

	Ant. 0 (dBi)	Ant. 1 (dBi)	DG for Power (dBi)	DG for PSD (dBi)
U-NII-5	2.90	4.00	4.00	3.48
U-NII-6	2.30	3.50	3.50	2.94
U-NII-7	1.40	2.20	2.20	1.82
U-NII-8	-1.40	1.20	1.20	0.09

<TXBF modes>

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For 802.11ax mode, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

g_{j,k} = 10^{G_k/20} if the kth antenna is being fed by spatial stream j, or zero if it is not;
G_k is the gain in dBi of the kth antenna.



The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The directional gain “DG” is calculated as following table.

			DG	DG
			for	for
	Ant. 0	Ant. 1	Power	PSD
	(dBi)	(dBi)	(dBi)	(dBi)
U-NII-5	2.90	4.00	6.48	6.48
U-NII-6	2.30	3.50	5.93	5.93
U-NII-7	1.40	2.20	4.82	4.82
U-NII-8	-1.40	1.20	3.01	3.01



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Dec. 26, 2023~ Jan. 15, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Dec. 26, 2023~ Jan. 15, 2024	Jan. 04, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024		Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Dec. 26, 2023~ Jan. 15, 2024	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024		Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 23	3Hz~8.5GHz; Max 30dBm	Jan. 04, 2024	Jan. 30, 2024	Jan. 03, 2025	Radiation (03CH08-KS)
Spectrum Analyzer	R&S	FSV40	101932	10kHz~40GHz; Max 30dBm	Oct. 10, 2023	Jan. 30, 2024	Oct. 09, 2024	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Oct. 10, 2023	Jan. 30, 2024	Oct. 09, 2024	Radiation (03CH08-KS)
Bilog Antenna	TESEQ& VGT	CBL 61110	59915	30MHz~1GHz	Aug. 12, 2023	Jan. 30, 2024	Aug. 11, 2024	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Mar. 18, 2023	Jan. 30, 2024	Mar. 17, 2024	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz-18Ghz	Jan. 05, 2024	Jan. 30, 2024	Jan. 04, 2025	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2024	Jan. 30, 2024	Jan. 04, 2025	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2024	Jan. 30, 2024	Jan. 04, 2025	Radiation (03CH08-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Oct. 10, 2023	Jan. 30, 2024	Oct. 09, 2024	Radiation (03CH08-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 04, 2024	Jan. 30, 2024	Jan. 03, 2025	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Jan. 30, 2024	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Jan. 30, 2024	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Jan. 30, 2024	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Jan. 19, 2024	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Jan. 19, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Jan. 19, 2024	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Jan. 19, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2024	Jan. 03, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY562004 17 /MY59360 210	9kHz~7.2GHz	May 16, 2023	Jan. 03, 2024	May 15, 2024	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Jan. 03, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 ppm
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.32 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.90 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2023.12.26~2024.1.15	Relative Humidity:	51~54	%

TEST RESULTS DATA
EIRP Power Table

UNII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1				SUM	Ant 0
11a	6Mbps	2	001	5955	0.04	0.04	-0.54	-0.59	2.45	4.00	4.00	6.45	24.00	Pass	-1.5	
11a	6Mbps	2	049	6195	0.04	0.04	-0.65	-0.61	2.39	4.00	4.00	6.39	24.00	Pass	-2	
11a	6Mbps	2	093	6415	0.04	0.04	-0.77	-1.10	2.08	4.00	4.00	6.08	24.00	Pass	0	

TEST RESULTS DATA
EIRP Power Table

UNII-6 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1				SUM	Ant 0
11a	6Mbps	2	097	6435	0.04	0.04	-0.17	-0.64	2.62	3.50		6.12	24.00	Pass		-1.5
11a	6Mbps	2	105	6475	0.04	0.04	-0.19	-0.99	2.44	3.50		5.94	24.00	Pass		-1.5
11a	6Mbps	2	113	6515	0.04	0.04	-0.34	-1.28	2.23	3.50		5.73	24.00	Pass		-1.5

TEST RESULTS DATA
EIRP Power Table

UNII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1				SUM	Ant 0
11a	6Mbps	2	117	6535	0.04	0.04	0.91	0.30	3.63	2.20	2.20	5.83	24.00	Pass	0	0
11a	6Mbps	2	149	6695	0.04	0.04	1.25	0.32	3.83	2.20	2.20	6.03	24.00	Pass	0.5	0.5
11a	6Mbps	2	181	6855	0.04	0.04	-0.01	0.15	3.09	2.20	2.20	5.29	24.00	Pass	0	0
11a	6Mbps	2	185	6875	0.04	0.04	0.36	0.71	3.55	2.20	2.20	5.75	24.00	Pass	0.5	0.5

TEST RESULTS DATA
EIRP Power Table

UNII-8 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1				SUM	Ant 0
11a	6Mbps	2	189	6895	0.04	0.04	1.47	2.13	4.83	1.20		6.03	24.00	Pass		2
11a	6Mbps	2	209	6995	0.04	0.04	1.47	2.77	5.18	1.20		6.38	24.00	Pass		2
11a	6Mbps	2	229	7095	0.04	0.04	1.99	2.95	5.51	1.20		6.71	24.00	Pass		2
11a	6Mbps	2	233	7115	0.04	0.04	1.93	2.99	5.51	1.20		6.71	24.00	Pass		2

TEST RESULTS DATA
EIRP Power Table

UNII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1				SUM	Ant 0
HE20	MCS0	2	001	5955	Full	0.00	0.00	2.23	3.12	5.71	4.00	9.71	24.00	Pass	2	2	
HE20	MCS0	2	001	5955	26/0	0.00	0.00	-6.29	-5.95	-3.11	4.00	0.89	24.00	Pass	-6	-6	
HE20	MCS0	2	001	5955	52/37	0.00	0.00	-3.13	-3.22	-0.16	4.00	3.84	24.00	Pass	-3	-3	
HE20	MCS0	2	001	5955	106/53	0.00	0.00	0.37	-0.16	3.12	4.00	7.12	24.00	Pass	0	0	
HE20	MCS0	2	049	6195	Full	0.00	0.00	2.23	3.14	5.72	4.00	9.72	24.00	Pass	2	2	
HE20	MCS0	2	049	6195	26/0	0.00	0.00	-7.61	-5.53	-3.44	4.00	0.56	24.00	Pass	-6	-6	
HE20	MCS0	2	049	6195	52/37	0.00	0.00	-3.37	-2.75	-0.04	4.00	3.96	24.00	Pass	-3	-3	
HE20	MCS0	2	049	6195	106/53	0.00	0.00	0.28	0.77	3.54	4.00	7.54	24.00	Pass	0.5	0.5	
HE20	MCS0	2	093	6415	Full	0.00	0.00	2.19	2.56	5.39	4.00	9.39	24.00	Pass	4	4	
HE20	MCS0	2	093	6415	26/8	0.00	0.00	-6.11	-6.17	-3.13	4.00	0.87	24.00	Pass	-4	-4	
HE20	MCS0	2	093	6415	52/40	0.00	0.00	-3.07	-3.26	-0.15	4.00	3.85	24.00	Pass	-1	-1	
HE20	MCS0	2	093	6415	106/54	0.00	0.00	-0.11	-0.23	2.84	4.00	6.84	24.00	Pass	2.5	2.5	
HE40	MCS0	2	003	5965	Full	0.00	0.00	5.07	5.42	8.26	4.00	12.26	24.00	Pass	3.5	3.5	
HE40	MCS0	2	003	5965	242/61	0.00	0.00	2.64	3.55	6.13	4.00	10.13	24.00	Pass	3	3	
HE40	MCS0	2	051	6205	Full	0.00	0.00	4.69	5.13	7.93	4.00	11.93	24.00	Pass	3.5	3.5	
HE40	MCS0	2	051	6205	242/61	0.00	0.00	2.83	3.52	6.20	4.00	10.20	24.00	Pass	3	3	
HE40	MCS0	2	091	6405	Full	0.00	0.00	4.37	5.32	7.88	4.00	11.88	24.00	Pass	4	4	
HE40	MCS0	2	091	6405	242/62	0.00	0.00	2.59	3.31	5.98	4.00	9.98	24.00	Pass	3.5	3.5	
HE80	MCS0	2	007	5985	Full	0.00	0.00	7.43	8.02	10.75	4.00	14.75	24.00	Pass	6.5	6.5	
HE80	MCS0	2	007	5985	484/65	0.07	0.07	6.33	6.89	9.63	4.00	13.63	24.00	Pass	6	6	
HE80	MCS0	2	055	6225	Full	0.00	0.00	7.04	7.52	10.30	4.00	14.30	24.00	Pass	5	5	
HE80	MCS0	2	055	6225	484/65	0.07	0.07	5.91	6.13	9.03	4.00	13.03	24.00	Pass	4.5	4.5	
HE80	MCS0	2	087	6385	Full	0.00	0.00	6.72	7.78	10.29	4.00	14.29	24.00	Pass	6.5	6.5	
HE80	MCS0	2	087	6385	484/66	0.07	0.07	5.11	5.88	8.52	4.00	12.52	24.00	Pass	6	6	
HE160	MCS0	2	015	6025	Full	0.00	0.00	9.98	11.13	13.60	4.00	17.60	24.00	Pass	10	10	
HE160	MCS0	2	015	6025	996/67	0.07	0.07	8.46	8.44	11.46	4.00	15.46	24.00	Pass	8	8	
HE160	MCS0	2	047	6185	Full	0.00	0.00	9.89	10.82	13.39	4.00	17.39	24.00	Pass	9.5	9.5	
HE160	MCS0	2	047	6185	996/67	0.07	0.07	8.28	8.86	11.59	4.00	15.59	24.00	Pass	8	8	
HE160	MCS0	2	079	6345	Full	0.00	0.00	10.01	10.83	13.45	4.00	17.45	24.00	Pass	9.5	9.5	
HE160	MCS0	2	079	6345	996/68	0.07	0.07	7.38	8.06	10.74	4.00	14.74	24.00	Pass	8	8	

TEST RESULTS DATA
EIRP Power Table

UNII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	SUM	Ant 0		Ant 1	
HE20	MCS0	2	097	6435	Full	0.00	0.00	2.54	2.82	5.69	3.50	9.19	24.00	Pass	2.5		
HE20	MCS0	2	097	6435	26/0	0.00	0.00	-5.62	-6.22	-2.90	3.50	0.60	24.00	Pass	-6		
HE20	MCS0	2	097	6435	52/37	0.00	0.00	-2.71	-3.28	0.02	3.50	3.52	24.00	Pass	-3		
HE20	MCS0	2	097	6435	106/53	0.00	0.00	0.31	-0.14	3.10	3.50	6.60	24.00	Pass	0		
HE20	MCS0	2	105	6475	Full	0.00	0.00	3.02	3.34	6.19	3.50	9.69	24.00	Pass	3		
HE20	MCS0	2	105	6475	26/0	0.00	0.00	-5.41	-5.98	-2.68	3.50	0.82	24.00	Pass	-5.5		
HE20	MCS0	2	105	6475	52/37	0.00	0.00	-2.44	-3.18	0.22	3.50	3.72	24.00	Pass	-2.5		
HE20	MCS0	2	105	6475	106/53	0.00	0.00	0.66	-0.07	3.32	3.50	6.82	24.00	Pass	0.5		
HE20	MCS0	2	113	6515	Full	0.00	0.00	2.78	2.97	5.89	3.50	9.39	24.00	Pass	3		
HE20	MCS0	2	113	6515	26/8	0.00	0.00	-5.82	-6.33	-3.06	3.50	0.44	24.00	Pass	-5.5		
HE20	MCS0	2	113	6515	52/40	0.00	0.00	-2.79	-3.69	-0.21	3.50	3.29	24.00	Pass	-2.5		
HE20	MCS0	2	113	6515	106/54	0.00	0.00	0.93	-0.02	3.49	3.50	6.99	24.00	Pass	1		
HE40	MCS0	2	099	6445	Full	0.00	0.00	5.13	5.49	8.32	3.50	11.82	24.00	Pass	4.5		
HE40	MCS0	2	099	6445	242/61	0.00	0.00	3.45	3.69	6.58	3.50	10.08	24.00	Pass	4		
HE40	MCS0	2	107	6485	Full	0.00	0.00	5.41	5.69	8.56	3.50	12.06	24.00	Pass	5		
HE40	MCS0	2	107	6485	242/61	0.00	0.00	3.74	3.83	6.80	3.50	10.30	24.00	Pass	4.5		
HE40	MCS0	2	115	6525	Full	0.00	0.00	5.41	5.59	8.51	3.50	12.01	24.00	Pass	5		
HE40	MCS0	2	115	6525	242/62	0.00	0.00	3.51	3.42	6.48	3.50	9.98	24.00	Pass	4.5		
HE80	MCS0	2	103	6465	Full	0.00	0.00	8.09	8.03	11.07	3.50	14.57	24.00	Pass	7.5		
HE80	MCS0	2	103	6465	484/65	0.07	0.07	6.36	6.20	9.29	3.50	12.79	24.00	Pass	7		
HE80	MCS0	2	119	6545	Full	0.00	0.00	7.68	7.63	10.67	3.50	14.17	24.00	Pass	7.5		
HE80	MCS0	2	119	6545	484/66	0.07	0.07	6.01	5.80	8.91	3.50	12.41	24.00	Pass	7		
HE160	MCS0	2	111	6505	Full	0.00	0.00	10.85	10.09	13.50	3.50	17.00	24.00	Pass	10		
HE160	MCS0	2	111	6505	996/67	0.07	0.07	8.72	8.79	11.76	3.50	15.26	24.00	Pass	9		

TEST RESULTS DATA
EIRP Power Table

UNII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1				SUM	Ant 0
HE20	MCS0	2	117	6535	Full	0.00	0.00	3.88	4.19	7.05	2.20	2.20	9.25	24.00	Pass	4	4
HE20	MCS0	2	117	6535	26/0	0.00	0.00	-4.92	-5.68	-2.27	2.20	2.20	-0.07	24.00	Pass	-5	-5
HE20	MCS0	2	117	6535	52/37	0.00	0.00	-2.06	-2.94	0.53	2.20	2.20	2.73	24.00	Pass	-2	-2
HE20	MCS0	2	117	6535	106/53	0.00	0.00	1.49	0.71	4.13	2.20	2.20	6.33	24.00	Pass	1.5	1.5
HE20	MCS0	2	149	6695	Full	0.00	0.00	3.84	4.06	6.96	2.20	2.20	9.16	24.00	Pass	4	4
HE20	MCS0	2	149	6695	26/0	0.00	0.00	-4.93	-5.18	-2.04	2.20	2.20	0.16	24.00	Pass	-4.5	-4.5
HE20	MCS0	2	149	6695	52/37	0.00	0.00	-1.95	-2.56	0.77	2.20	2.20	2.97	24.00	Pass	-1.5	-1.5
HE20	MCS0	2	149	6695	106/53	0.00	0.00	1.08	0.61	3.86	2.20	2.20	6.06	24.00	Pass	1.5	1.5
HE20	MCS0	2	181	6855	Full	0.00	0.00	3.48	4.13	6.83	2.20	2.20	9.03	24.00	Pass	4	4
HE20	MCS0	2	181	6855	26/8	0.00	0.00	-5.43	-4.81	-2.10	2.20	2.20	0.10	24.00	Pass	-4	-4
HE20	MCS0	2	181	6855	52/40	0.00	0.00	-2.47	-2.14	0.71	2.20	2.20	2.91	24.00	Pass	-1	-1
HE20	MCS0	2	181	6855	106/54	0.00	0.00	0.72	1.46	4.12	2.20	2.20	6.32	24.00	Pass	2.5	2.5
HE20	MCS0	2	185	6875	Full	0.00	0.00	3.33	3.98	6.68	2.20	2.20	8.88	24.00	Pass	4	4
HE20	MCS0	2	185	6875	26/8	0.00	0.00	-6.12	-5.32	-2.69	2.20	2.20	-0.49	24.00	Pass	-4.5	-4.5
HE20	MCS0	2	185	6875	52/40	0.00	0.00	-2.96	-2.68	0.19	2.20	2.20	2.39	24.00	Pass	-1.5	-1.5
HE20	MCS0	2	185	6875	106/54	0.00	0.00	0.13	0.86	3.52	2.20	2.20	5.72	24.00	Pass	2	2
HE40	MCS0	2	123	6565	Full	0.00	0.00	6.66	6.44	9.56	2.20	2.20	11.76	24.00	Pass	6	6
HE40	MCS0	2	123	6565	242/61	0.00	0.00	4.68	4.75	7.73	2.20	2.20	9.93	24.00	Pass	5.5	5.5
HE40	MCS0	2	147	6685	Full	0.00	0.00	6.31	6.62	9.48	2.20	2.20	11.68	24.00	Pass	6	6
HE40	MCS0	2	147	6685	242/61	0.00	0.00	4.62	5.01	7.83	2.20	2.20	10.03	24.00	Pass	5.5	5.5
HE40	MCS0	2	179	6845	Full	0.00	0.00	5.94	6.34	9.15	2.20	2.20	11.35	24.00	Pass	6	6
HE40	MCS0	2	179	6845	242/62	0.00	0.00	3.91	4.39	7.17	2.20	2.20	9.37	24.00	Pass	5.5	5.5
HE40	MCS0	2	187	6885	Full	0.00	0.00	6.41	7.16	9.81	2.20	2.20	12.01	24.00	Pass	6.5	6.5
HE40	MCS0	2	187	6885	484/65	0.00	0.00	4.48	5.18	7.85	2.20	2.20	10.05	24.00	Pass	6	6
HE80	MCS0	2	135	6625	Full	0.00	0.00	9.04	9.07	12.07	2.20	2.20	14.27	24.00	Pass	9	9
HE80	MCS0	2	135	6625	484/65	0.07	0.07	7.84	7.72	10.79	2.20	2.20	12.99	24.00	Pass	8.5	8.5
HE80	MCS0	2	151	6705	Full	0.00	0.00	8.99	9.25	12.13	2.20	2.20	14.33	24.00	Pass	9	9
HE80	MCS0	2	151	6705	484/65	0.07	0.07	7.62	8.00	10.82	2.20	2.20	13.02	24.00	Pass	8.5	8.5
HE80	MCS0	2	167	6785	Full	0.00	0.00	8.66	9.12	11.91	2.20	2.20	14.11	24.00	Pass	9	9
HE80	MCS0	2	167	6785	484/66	0.07	0.07	7.08	7.41	10.26	2.20	2.20	12.46	24.00	Pass	8.5	8.5
HE80	MCS0	2	183	6865	Full	0.00	0.00	8.64	9.61	12.16	2.20	2.20	14.36	24.00	Pass	9	9
HE80	MCS0	2	183	6865	484/66	0.07	0.07	7.04	7.83	10.46	2.20	2.20	12.66	24.00	Pass	8.5	8.5
HE160	MCS0	2	143	6665	Full	0.00	0.00	10.53	10.35	13.45	2.20	2.20	15.65	24.00	Pass	10	10
HE160	MCS0	2	143	6665	996/68	0.07	0.07	8.13	8.38	11.27	2.20	2.20	13.47	24.00	Pass	9	9
HE160	MCS0	2	175	6825	Full	0.00	0.00	10.15	10.06	13.12	2.20	2.20	15.32	24.00	Pass	10	10
HE160	MCS0	2	175	6825	996/67	0.07	0.07	8.03	8.78	11.43	2.20	2.20	13.63	24.00	Pass	9	9

TEST RESULTS DATA
EIRP Power Table

UNII-8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1				SUM	Ant 0
HE20	MCS0	2	189	6895	Full	0.00	0.00	5.41	6.05	8.75	1.20	1.20	9.95	24.00	Pass	6	6
HE20	MCS0	2	189	6895	26/0	0.00	0.00	-3.01	-2.92	0.05	1.20	1.20	1.25	24.00	Pass	-2	-2
HE20	MCS0	2	189	6895	52/37	0.00	0.00	0.01	0.27	3.15	1.20	1.20	4.35	24.00	Pass	1	1
HE20	MCS0	2	189	6895	106/53	0.00	0.00	3.19	3.73	6.48	1.20	1.20	7.68	24.00	Pass	4.5	4.5
HE20	MCS0	2	209	6995	Full	0.00	0.00	5.52	6.46	9.03	1.20	1.20	10.23	24.00	Pass	6	6
HE20	MCS0	2	209	6995	26/0	0.00	0.00	-3.61	-2.83	-0.19	1.20	1.20	1.01	24.00	Pass	-2.5	-2.5
HE20	MCS0	2	209	6995	52/37	0.00	0.00	-0.94	-0.02	2.55	1.20	1.20	3.75	24.00	Pass	0	0
HE20	MCS0	2	209	6995	106/53	0.00	0.00	2.67	3.55	6.14	1.20	1.20	7.34	24.00	Pass	4	4
HE20	MCS0	2	229	7095	Full	0.00	0.00	5.22	6.22	8.76	1.20	1.20	9.96	24.00	Pass	5.5	5.5
HE20	MCS0	2	229	7095	26/8	0.00	0.00	-3.52	-2.63	-0.04	1.20	1.20	1.16	24.00	Pass	-2.5	-2.5
HE20	MCS0	2	229	7095	52/40	0.00	0.00	-0.93	0.18	2.67	1.20	1.20	3.87	24.00	Pass	0	0
HE20	MCS0	2	229	7095	106/54	0.00	0.00	2.73	3.78	6.30	1.20	1.20	7.50	24.00	Pass	4	4
HE20	MCS0	2	233	7115	Full	0.00	0.00	-8.53	-7.91	-5.20	1.20	1.20	-4.00	24.00	Pass	-8.5	-8.5
HE20	MCS0	2	233	7115	26/8	0.00	0.00	-17.34	-15.54	-13.34	1.20	1.20	-12.14	24.00	Pass	-16	-16
HE20	MCS0	2	233	7115	52/40	0.00	0.00	-15.17	-13.37	-11.17	1.20	1.20	-9.97	24.00	Pass	-13.5	-13.5
HE20	MCS0	2	233	7115	106/54	0.00	0.00	-15.43	-16.06	-12.72	1.20	1.20	-11.52	24.00	Pass	-16	-16
HE40	MCS0	2	195	6925	Full	0.00	0.00	7.98	8.68	11.35	1.20	1.20	12.55	24.00	Pass	8	8
HE40	MCS0	2	195	6925	242/61	0.00	0.00	6.06	6.45	9.27	1.20	1.20	10.47	24.00	Pass	7.5	7.5
HE40	MCS0	2	211	7005	Full	0.00	0.00	8.29	9.28	11.82	1.20	1.20	13.02	24.00	Pass	8	8
HE40	MCS0	2	211	7005	242/62	0.00	0.00	5.75	6.59	9.20	1.20	1.20	10.40	24.00	Pass	7	7
HE40	MCS0	2	227	7085	Full	0.00	0.00	8.26	9.24	11.79	1.20	1.20	12.99	24.00	Pass	8	8
HE40	MCS0	2	227	7085	242/62	0.00	0.00	6.34	7.28	9.85	1.20	1.20	11.05	24.00	Pass	7.5	7.5
HE80	MCS0	2	199	6945	Full	0.00	0.00	9.99	11.45	13.79	1.20	1.20	14.99	24.00	Pass	10.5	10.5
HE80	MCS0	2	199	6945	484/65	0.07	0.07	8.56	9.92	12.30	1.20	1.20	13.50	24.00	Pass	10	10
HE80	MCS0	2	215	7025	Full	0.00	0.00	10.43	11.59	14.06	1.20	1.20	15.26	24.00	Pass	10.5	10.5
HE80	MCS0	2	215	7025	484/66	0.07	0.07	8.58	9.70	12.18	1.20	1.20	13.38	24.00	Pass	10	10
HE160	MCS0	2	207	6985	Full	0.00	0.00	10.93	11.29	14.12	1.20	1.20	15.32	24.00	Pass	11	11
HE160	MCS0	2	207	6985	996/68	0.07	0.07	8.88	10.12	12.55	1.20	1.20	13.75	24.00	Pass	10	10

TEST RESULTS DATA
EIRP Power Table

UNII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	SUM			Ant 0	Ant 1
HE20	MCS0	2	001	5955	Full	0.00	0.00	-0.82	0.08	2.66	4.00	4.00	6.66	24.00	Pass	-1	-1
HE20	MCS0	2	001	5955	26/0	0.00	0.00	-9.35	-9.00	-6.16	4.00	4.00	-2.16	24.00	Pass	-9	-9
HE20	MCS0	2	001	5955	52/37	0.00	0.00	-6.22	-6.27	-3.23	4.00	4.00	0.77	24.00	Pass	-6	-6
HE20	MCS0	2	001	5955	106/53	0.00	0.00	-2.67	-3.19	0.09	4.00	4.00	4.09	24.00	Pass	-3	-3
HE20	MCS0	2	049	6195	Full	0.00	0.00	-0.82	0.08	2.66	4.00	4.00	6.66	24.00	Pass	-1	-1
HE20	MCS0	2	049	6195	26/0	0.00	0.00	-10.64	-8.60	-6.49	4.00	4.00	-2.49	24.00	Pass	-9	-9
HE20	MCS0	2	049	6195	52/37	0.00	0.00	-6.43	-5.83	-3.11	4.00	4.00	0.89	24.00	Pass	-6	-6
HE20	MCS0	2	049	6195	106/53	0.00	0.00	-2.74	-2.29	0.50	4.00	4.00	4.50	24.00	Pass	-2.5	-2.5
HE20	MCS0	2	093	6415	Full	0.00	0.00	-0.88	-0.48	2.33	4.00	4.00	6.33	24.00	Pass	1	1
HE20	MCS0	2	093	6415	26/8	0.00	0.00	-9.14	-9.20	-6.16	4.00	4.00	-2.16	24.00	Pass	-7	-7
HE20	MCS0	2	093	6415	52/40	0.00	0.00	-6.11	-6.28	-3.18	4.00	4.00	0.82	24.00	Pass	-4	-4
HE20	MCS0	2	093	6415	106/54	0.00	0.00	-3.16	-3.30	-0.22	4.00	4.00	3.78	24.00	Pass	-0.5	-0.5
HE40	MCS0	2	003	5965	Full	0.00	0.00	2.01	2.38	5.21	4.00	4.00	9.21	24.00	Pass	0.5	0.5
HE40	MCS0	2	003	5965	242/61	0.00	0.00	-0.38	0.49	3.09	4.00	4.00	7.09	24.00	Pass	0	0
HE40	MCS0	2	051	6205	Full	0.00	0.00	1.62	2.05	4.85	4.00	4.00	8.85	24.00	Pass	0.5	0.5
HE40	MCS0	2	051	6205	242/61	0.00	0.00	-0.20	0.47	3.16	4.00	4.00	7.16	24.00	Pass	0	0
HE40	MCS0	2	091	6405	Full	0.00	0.00	1.33	2.28	4.84	4.00	4.00	8.84	24.00	Pass	1	1
HE40	MCS0	2	091	6405	242/62	0.00	0.00	-0.46	0.26	2.93	4.00	4.00	6.93	24.00	Pass	0.5	0.5
HE80	MCS0	2	007	5985	Full	0.00	0.00	4.40	4.95	7.69	4.00	4.00	11.69	24.00	Pass	3.5	3.5
HE80	MCS0	2	007	5985	484/65	0.07	0.07	3.28	3.81	6.56	4.00	4.00	10.56	24.00	Pass	3	3
HE80	MCS0	2	055	6225	Full	0.00	0.00	3.97	4.46	7.23	4.00	4.00	11.23	24.00	Pass	2	2
HE80	MCS0	2	055	6225	484/65	0.07	0.07	2.82	3.09	5.96	4.00	4.00	9.96	24.00	Pass	1.5	1.5
HE80	MCS0	2	087	6385	Full	0.00	0.00	3.66	4.75	7.25	4.00	4.00	11.25	24.00	Pass	3.5	3.5
HE80	MCS0	2	087	6385	484/66	0.07	0.07	2.06	2.86	5.49	4.00	4.00	9.49	24.00	Pass	3	3
HE160	MCS0	2	015	6025	Full	0.00	0.00	6.90	8.08	10.54	4.00	4.00	14.54	24.00	Pass	7	7
HE160	MCS0	2	015	6025	996/67	0.07	0.07	5.43	5.41	8.43	4.00	4.00	12.43	24.00	Pass	5	5
HE160	MCS0	2	047	6185	Full	0.00	0.00	6.84	7.76	10.33	4.00	4.00	14.33	24.00	Pass	6.5	6.5
HE160	MCS0	2	047	6185	996/67	0.07	0.07	5.22	5.84	8.55	4.00	4.00	12.55	24.00	Pass	5	5
HE160	MCS0	2	079	6345	Full	0.00	0.00	6.93	7.77	10.38	4.00	4.00	14.38	24.00	Pass	6.5	6.5
HE160	MCS0	2	079	6345	996/68	0.07	0.07	4.34	4.99	7.69	4.00	4.00	11.69	24.00	Pass	5	5

TEST RESULTS DATA
EIRP Power Table

UNII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1				SUM	Ant 0
HE20	MCS0	2	097	6435	Full	0.00	0.00	-0.54	-0.27	2.61	3.50	6.11	24.00	Pass		-0.5	
HE20	MCS0	2	097	6435	26/0	0.00	0.00	-8.68	-9.34	-5.99	3.50	-2.49	24.00	Pass		-9	
HE20	MCS0	2	097	6435	52/37	0.00	0.00	-5.75	-6.32	-3.02	3.50	0.48	24.00	Pass		-6	
HE20	MCS0	2	097	6435	106/53	0.00	0.00	-2.72	-3.22	0.05	3.50	3.55	24.00	Pass		-3	
HE20	MCS0	2	105	6475	Full	0.00	0.00	0.00	0.28	3.15	3.50	6.65	24.00	Pass		0	
HE20	MCS0	2	105	6475	26/0	0.00	0.00	-8.48	-9.01	-5.73	3.50	-2.23	24.00	Pass		-8.5	
HE20	MCS0	2	105	6475	52/37	0.00	0.00	-5.47	-6.19	-2.80	3.50	0.70	24.00	Pass		-5.5	
HE20	MCS0	2	105	6475	106/53	0.00	0.00	-2.38	-3.16	0.26	3.50	3.76	24.00	Pass		-2.5	
HE20	MCS0	2	113	6515	Full	0.00	0.00	-0.27	-0.07	2.84	3.50	6.34	24.00	Pass		0	
HE20	MCS0	2	113	6515	26/8	0.00	0.00	-8.91	-9.39	-6.13	3.50	-2.63	24.00	Pass		-8.5	
HE20	MCS0	2	113	6515	52/40	0.00	0.00	-5.84	-6.77	-3.27	3.50	0.23	24.00	Pass		-5.5	
HE20	MCS0	2	113	6515	106/54	0.00	0.00	-2.11	-3.08	0.44	3.50	3.94	24.00	Pass		-2	
HE40	MCS0	2	099	6445	Full	0.00	0.00	2.08	2.48	5.29	3.50	8.79	24.00	Pass		1.5	
HE40	MCS0	2	099	6445	242/61	0.00	0.00	0.39	0.60	3.51	3.50	7.01	24.00	Pass		1	
HE40	MCS0	2	107	6485	Full	0.00	0.00	2.32	2.65	5.50	3.50	9.00	24.00	Pass		2	
HE40	MCS0	2	107	6485	242/61	0.00	0.00	0.70	0.77	3.75	3.50	7.25	24.00	Pass		1.5	
HE40	MCS0	2	115	6525	Full	0.00	0.00	2.33	2.51	5.43	3.50	8.93	24.00	Pass		2	
HE40	MCS0	2	115	6525	242/62	0.00	0.00	0.45	0.36	3.42	3.50	6.92	24.00	Pass		1.5	
HE80	MCS0	2	103	6465	Full	0.00	0.00	5.02	4.94	7.99	3.50	11.49	24.00	Pass		4.5	
HE80	MCS0	2	103	6465	484/65	0.07	0.07	3.32	3.15	6.24	3.50	9.74	24.00	Pass		4	
HE80	MCS0	2	119	6545	Full	0.00	0.00	4.58	4.59	7.60	3.50	11.10	24.00	Pass		4.5	
HE80	MCS0	2	119	6545	484/66	0.07	0.07	2.95	2.10	5.55	3.50	9.05	24.00	Pass		4	
HE160	MCS0	2	111	6505	Full	0.00	0.00	7.21	7.03	10.13	3.50	13.63	24.00	Pass		7	
HE160	MCS0	2	111	6505	996/67	0.07	0.07	5.46	5.08	8.28	3.50	11.78	24.00	Pass		5.5	

TEST RESULTS DATA
EIRP Power Table

UNII-7 MIMO															Power Setting		
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Ant 0	Ant 1
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1					
HE20	MCS0	2	117	6535	Full	0.00	0.00	0.87	1.13	4.01	2.20	2.20	6.21	24.00	Pass	1	1
HE20	MCS0	2	117	6535	26/0	0.00	0.00	-8.01	-8.77	-5.36	2.20	2.20	-3.16	24.00	Pass	-8	-8
HE20	MCS0	2	117	6535	52/37	0.00	0.00	-5.10	-5.98	-2.51	2.20	2.20	-0.31	24.00	Pass	-5	-5
HE20	MCS0	2	117	6535	106/53	0.00	0.00	-1.57	-2.34	1.07	2.20	2.20	3.27	24.00	Pass	-1.5	-1.5
HE20	MCS0	2	149	6695	Full	0.00	0.00	0.76	0.97	3.88	2.20	2.20	6.08	24.00	Pass	1	1
HE20	MCS0	2	149	6695	26/0	0.00	0.00	-7.98	-8.20	-5.08	2.20	2.20	-2.88	24.00	Pass	-7.5	-7.5
HE20	MCS0	2	149	6695	52/37	0.00	0.00	-4.99	-5.60	-2.27	2.20	2.20	-0.07	24.00	Pass	-4.5	-4.5
HE20	MCS0	2	149	6695	106/53	0.00	0.00	-1.97	-2.44	0.81	2.20	2.20	3.01	24.00	Pass	-1.5	-1.5
HE20	MCS0	2	181	6855	Full	0.00	0.00	0.45	1.10	3.80	2.20	2.20	6.00	24.00	Pass	1	1
HE20	MCS0	2	181	6855	26/8	0.00	0.00	-8.49	-7.87	-5.16	2.20	2.20	-2.96	24.00	Pass	-7	-7
HE20	MCS0	2	181	6855	52/40	0.00	0.00	-5.49	-5.16	-2.31	2.20	2.20	-0.11	24.00	Pass	-4	-4
HE20	MCS0	2	181	6855	106/54	0.00	0.00	-2.35	-1.61	1.05	2.20	2.20	3.25	24.00	Pass	-0.5	-0.5
HE20	MCS0	2	185	6875	Full	0.00	0.00	0.27	0.89	3.60	2.20	2.20	5.80	24.00	Pass	1	1
HE20	MCS0	2	185	6875	26/8	0.00	0.00	-9.20	-8.36	-5.75	2.20	2.20	-3.55	24.00	Pass	-7.5	-7.5
HE20	MCS0	2	185	6875	52/40	0.00	0.00	-6.05	-5.72	-2.87	2.20	2.20	-0.67	24.00	Pass	-4.5	-4.5
HE20	MCS0	2	185	6875	106/54	0.00	0.00	-2.97	-2.22	0.43	2.20	2.20	2.63	24.00	Pass	-1	-1
HE40	MCS0	2	123	6565	Full	0.00	0.00	3.64	3.42	6.54	2.20	2.20	8.74	24.00	Pass	3	3
HE40	MCS0	2	123	6565	242/61	0.00	0.00	1.61	1.68	4.66	2.20	2.20	6.86	24.00	Pass	2.5	2.5
HE40	MCS0	2	147	6685	Full	0.00	0.00	3.28	3.56	6.43	2.20	2.20	8.63	24.00	Pass	3	3
HE40	MCS0	2	147	6685	242/61	0.00	0.00	1.58	1.92	4.76	2.20	2.20	6.96	24.00	Pass	2.5	2.5
HE40	MCS0	2	179	6845	Full	0.00	0.00	2.89	3.31	6.12	2.20	2.20	8.32	24.00	Pass	3	3
HE40	MCS0	2	179	6845	242/62	0.00	0.00	0.82	1.35	4.10	2.20	2.20	6.30	24.00	Pass	2.5	2.5
HE40	MCS0	2	187	6885	Full	0.00	0.00	3.36	4.12	6.77	2.20	2.20	8.97	24.00	Pass	3.5	3.5
HE40	MCS0	2	187	6885	484/65	0.00	0.00	1.43	2.13	4.80	2.20	2.20	7.00	24.00	Pass	3	3
HE80	MCS0	2	135	6625	Full	0.00	0.00	5.97	5.95	8.97	2.20	2.20	11.17	24.00	Pass	6	6
HE80	MCS0	2	135	6625	484/65	0.07	0.07	4.78	4.68	7.74	2.20	2.20	9.94	24.00	Pass	5.5	5.5
HE80	MCS0	2	151	6705	Full	0.00	0.00	5.97	6.17	9.08	2.20	2.20	11.28	24.00	Pass	6	6
HE80	MCS0	2	151	6705	484/65	0.07	0.07	4.55	4.94	7.76	2.20	2.20	9.96	24.00	Pass	5.5	5.5
HE80	MCS0	2	167	6785	Full	0.00	0.00	5.60	6.09	8.86	2.20	2.20	11.06	24.00	Pass	6	6
HE80	MCS0	2	167	6785	484/66	0.07	0.07	4.03	4.35	7.20	2.20	2.20	9.40	24.00	Pass	5.5	5.5
HE80	MCS0	2	183	6865	Full	0.00	0.00	5.62	6.52	9.10	2.20	2.20	11.30	24.00	Pass	6	6
HE80	MCS0	2	183	6865	484/66	0.07	0.07	4.01	4.79	7.42	2.20	2.20	9.62	24.00	Pass	5.5	5.5
HE160	MCS0	2	143	6665	Full	0.00	0.00	6.67	7.19	9.95	2.20	2.20	12.15	24.00	Pass	7	7
HE160	MCS0	2	143	6665	996/68	0.07	0.07	4.88	5.16	8.03	2.20	2.20	10.23	24.00	Pass	6	6
HE160	MCS0	2	175	6825	Full	0.00	0.00	7.26	8.37	10.86	2.20	2.20	13.06	24.00	Pass	7	7
HE160	MCS0	2	175	6825	996/67	0.07	0.07	4.94	5.50	8.24	2.20	2.20	10.44	24.00	Pass	6	6

TEST RESULTS DATA
EIRP Power Table

UNII-8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	SUM			Ant 0	Ant 1
HE20	MCS0	2	189	6895	Full	0.00	0.00	2.39	2.99	5.71	1.20	6.91	24.00	Pass		3	
HE20	MCS0	2	189	6895	26/0	0.00	0.00	-6.07	-6.04	-3.04	1.20	-1.84	24.00	Pass		-5	
HE20	MCS0	2	189	6895	52/37	0.00	0.00	-3.03	-2.76	0.12	1.20	1.32	24.00	Pass		-2	
HE20	MCS0	2	189	6895	106/53	0.00	0.00	0.11	0.70	3.43	1.20	4.63	24.00	Pass		1.5	
HE20	MCS0	2	209	6995	Full	0.00	0.00	2.46	3.40	5.97	1.20	7.17	24.00	Pass		3	
HE20	MCS0	2	209	6995	26/0	0.00	0.00	-6.73	-5.85	-3.26	1.20	-2.06	24.00	Pass		-5.5	
HE20	MCS0	2	209	6995	52/37	0.00	0.00	-3.97	-3.09	-0.50	1.20	0.70	24.00	Pass		-3	
HE20	MCS0	2	209	6995	106/53	0.00	0.00	-0.38	0.52	3.10	1.20	4.30	24.00	Pass		1	
HE20	MCS0	2	229	7095	Full	0.00	0.00	2.17	3.18	5.71	1.20	6.91	24.00	Pass		2.5	
HE20	MCS0	2	229	7095	26/8	0.00	0.00	-6.56	-5.68	-3.09	1.20	-1.89	24.00	Pass		-5.5	
HE20	MCS0	2	229	7095	52/40	0.00	0.00	-3.98	-2.88	-0.38	1.20	0.82	24.00	Pass		-3	
HE20	MCS0	2	229	7095	106/54	0.00	0.00	-0.30	0.66	3.22	1.20	4.42	24.00	Pass		1	
HE20	MCS0	2	233	7115	Full	0.00	0.00	-11.58	-10.95	-8.24	1.20	-7.04	24.00	Pass		-11.5	
HE20	MCS0	2	233	7115	26/8	0.00	0.00	-20.40	-18.60	-16.40	1.20	-15.20	24.00	Pass		-19	
HE20	MCS0	2	233	7115	52/40	0.00	0.00	-18.32	-16.45	-14.27	1.20	-13.07	24.00	Pass		-16.5	
HE20	MCS0	2	233	7115	106/54	0.00	0.00	-18.47	-19.09	-15.76	1.20	-14.56	24.00	Pass		-19	
HE40	MCS0	2	195	6925	Full	0.00	0.00	4.91	5.56	8.26	1.20	9.46	24.00	Pass		5	
HE40	MCS0	2	195	6925	242/61	0.00	0.00	3.04	3.39	6.23	1.20	7.43	24.00	Pass		4.5	
HE40	MCS0	2	211	7005	Full	0.00	0.00	5.18	6.24	8.75	1.20	9.95	24.00	Pass		5	
HE40	MCS0	2	211	7005	242/62	0.00	0.00	2.64	3.51	6.11	1.20	7.31	24.00	Pass		4	
HE40	MCS0	2	227	7085	Full	0.00	0.00	5.19	6.19	8.73	1.20	9.93	24.00	Pass		5	
HE40	MCS0	2	227	7085	242/62	0.00	0.00	3.31	4.18	6.78	1.20	7.98	24.00	Pass		4.5	
HE80	MCS0	2	199	6945	Full	0.00	0.00	6.95	8.43	10.76	1.20	11.96	24.00	Pass		7.5	
HE80	MCS0	2	199	6945	484/65	0.07	0.07	5.48	6.89	9.25	1.20	10.45	24.00	Pass		7	
HE80	MCS0	2	215	7025	Full	0.00	0.00	7.37	8.54	11.00	1.20	12.20	24.00	Pass		7.5	
HE80	MCS0	2	215	7025	484/66	0.07	0.07	5.46	6.63	9.09	1.20	10.29	24.00	Pass		7	
HE160	MCS0	2	207	6985	Full	0.00	0.00	8.10	9.59	11.92	1.20	13.12	24.00	Pass		8	
HE160	MCS0	2	207	6985	996/68	0.07	0.07	5.83	6.72	9.31	1.20	10.51	24.00	Pass		7	



Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict	
11A-CDD	Ant0	5955	18.72	5945.52	5964.24	≤320	PASS	
	Ant1	5955	19.08	5945.36	5964.44	≤320	PASS	
	Ant0	6195	18.96	6185.48	6204.44	≤320	PASS	
	Ant1	6195	19.12	6185.40	6204.52	≤320	PASS	
	Ant0	6415	19.84	6404.80	6424.64	≤320	PASS	
	Ant1	6415	19.44	6405.00	6424.44	≤320	PASS	
	Ant0	6435	18.96	6425.48	6444.44	≤320	PASS	
	Ant1	6435	19.24	6425.16	6444.40	≤320	PASS	
	Ant0	6475	19.04	6465.48	6484.52	≤320	PASS	
	Ant1	6475	19.04	6465.56	6484.60	≤320	PASS	
	Ant0	6515	18.96	6505.48	6524.44	≤320	PASS	
	Ant1	6515	18.88	6505.60	6524.48	≤320	PASS	
	Ant0	6535	19.64	6524.80	6544.44	≤320	PASS	
	Ant1	6535	19.04	6525.36	6544.40	≤320	PASS	
	Ant0	6695	18.84	6685.56	6704.40	≤320	PASS	
	Ant1	6695	19.16	6685.28	6704.44	≤320	PASS	
	Ant0	6855	19.24	6845.36	6864.60	≤320	PASS	
	Ant1	6855	19.04	6845.36	6864.40	≤320	PASS	
	Ant0	6875	19.00	6865.48	6884.48	≤320	PASS	
	Ant1	6875	19.32	6865.08	6884.40	≤320	PASS	
	Ant0	6895	19.68	6884.80	6904.48	≤320	PASS	
	Ant1	6895	19.32	6885.12	6904.44	≤320	PASS	
	Ant0	6995	18.72	6985.72	7004.44	≤320	PASS	
	Ant1	6995	19.08	6985.40	7004.48	≤320	PASS	
	Ant0	7095	18.88	7085.40	7104.28	≤320	PASS	
	Ant1	7095	19.04	7085.36	7104.40	≤320	PASS	
	Ant0	7115	18.60	7105.64	7124.24	≤320	PASS	
	Ant1	7115	19.04	7105.36	7124.40	≤320	PASS	
	11AX20MIMO	Ant0	5955	20.64	5944.64	5965.28	≤320	PASS
		Ant1	5955	20.68	5944.68	5965.36	≤320	PASS
Ant0		6195	20.84	6184.56	6205.40	≤320	PASS	
Ant1		6195	20.68	6184.76	6205.44	≤320	PASS	
Ant0		6415	20.96	6404.44	6425.40	≤320	PASS	
Ant1		6415	20.92	6404.36	6425.28	≤320	PASS	



	Ant0	6435	20.64	6424.60	6445.24	≤320	PASS
	Ant1	6435	20.44	6424.68	6445.12	≤320	PASS
	Ant0	6475	20.96	6464.48	6485.44	≤320	PASS
	Ant1	6475	20.88	6464.56	6485.44	≤320	PASS
	Ant0	6515	20.72	6504.56	6525.28	≤320	PASS
	Ant1	6515	20.60	6504.76	6525.36	≤320	PASS
	Ant0	6535	20.76	6524.64	6545.40	≤320	PASS
	Ant1	6535	20.44	6524.76	6545.20	≤320	PASS
	Ant0	6695	20.80	6684.60	6705.40	≤320	PASS
	Ant1	6695	20.68	6684.64	6705.32	≤320	PASS
	Ant0	6855	20.60	6844.64	6865.24	≤320	PASS
	Ant1	6855	20.84	6844.48	6865.32	≤320	PASS
	Ant0	6875	20.80	6864.64	6885.44	≤320	PASS
	Ant1	6875	20.72	6864.56	6885.28	≤320	PASS
	Ant0	6895	20.56	6884.68	6905.24	≤320	PASS
	Ant1	6895	20.96	6884.60	6905.56	≤320	PASS
	Ant0	6995	20.80	6984.76	7005.56	≤320	PASS
	Ant1	6995	21.00	6984.48	7005.48	≤320	PASS
	Ant0	7095	20.68	7084.52	7105.20	≤320	PASS
	Ant1	7095	20.68	7084.56	7105.24	≤320	PASS
11AX40MIMO	Ant0	7115	20.68	7104.64	7125.32	≤320	PASS
	Ant1	7115	20.80	7104.60	7125.40	≤320	PASS
	Ant0	5965	40.08	5944.92	5985.00	≤320	PASS
	Ant1	5965	40.40	5944.60	5985.00	≤320	PASS
	Ant0	6205	40.32	6184.76	6225.08	≤320	PASS
	Ant1	6205	40.56	6184.84	6225.40	≤320	PASS
	Ant0	6405	40.32	6384.76	6425.08	≤320	PASS
	Ant1	6405	40.40	6384.76	6425.16	≤320	PASS
	Ant0	6445	40.48	6424.76	6465.24	≤320	PASS
	Ant1	6445	40.32	6424.60	6464.92	≤320	PASS
	Ant0	6485	40.08	6464.92	6505.00	≤320	PASS
	Ant1	6485	40.40	6464.92	6505.32	≤320	PASS
	Ant0	6525	40.24	6504.84	6545.08	≤320	PASS
	Ant1	6525	40.16	6504.84	6545.00	≤320	PASS
	Ant0	6565	40.40	6544.76	6585.16	≤320	PASS
	Ant1	6565	40.16	6544.76	6584.92	≤320	PASS
	Ant0	6685	40.32	6664.92	6705.24	≤320	PASS
	Ant1	6685	40.08	6664.92	6705.00	≤320	PASS
	Ant0	6845	40.32	6824.76	6865.08	≤320	PASS





	Ant1	6845	40.40	6824.84	6865.24	≤320	PASS
	Ant0	6885	40.24	6864.92	6905.16	≤320	PASS
	Ant1	6885	40.48	6864.60	6905.08	≤320	PASS
	Ant0	6925	40.08	6904.92	6945.00	≤320	PASS
	Ant1	6925	40.32	6904.68	6945.00	≤320	PASS
	Ant0	6965	40.24	6944.92	6985.16	≤320	PASS
	Ant1	6965	40.24	6944.76	6985.00	≤320	PASS
	Ant0	7005	40.40	6984.76	7025.16	≤320	PASS
	Ant1	7005	40.00	6985.00	7025.00	≤320	PASS
	Ant0	7085	40.24	7064.84	7105.08	≤320	PASS
	Ant1	7085	40.24	7064.84	7105.08	≤320	PASS
11AX80MIMO	Ant0	5985	81.92	5944.20	6026.12	≤320	PASS
	Ant1	5985	81.12	5944.36	6025.48	≤320	PASS
	Ant0	6225	81.28	6184.20	6265.48	≤320	PASS
	Ant1	6225	81.28	6184.20	6265.48	≤320	PASS
	Ant0	6385	81.44	6344.20	6425.64	≤320	PASS
	Ant1	6385	81.28	6344.36	6425.64	≤320	PASS
	Ant0	6465	81.92	6424.04	6505.96	≤320	PASS
	Ant1	6465	82.88	6423.72	6506.60	≤320	PASS
	Ant0	6545	81.92	6503.88	6585.80	≤320	PASS
	Ant1	6545	81.28	6504.36	6585.64	≤320	PASS
	Ant0	6625	81.76	6584.04	6665.80	≤320	PASS
	Ant1	6625	81.76	6584.20	6665.96	≤320	PASS
	Ant0	6705	81.44	6664.20	6745.64	≤320	PASS
	Ant1	6705	81.76	6664.04	6745.80	≤320	PASS
	Ant0	6785	81.12	6744.36	6825.48	≤320	PASS
	Ant1	6785	81.76	6743.88	6825.64	≤320	PASS
	Ant0	6865	81.60	6823.88	6905.48	≤320	PASS
	Ant1	6865	81.44	6824.20	6905.64	≤320	PASS
	Ant0	6945	81.44	6904.04	6985.48	≤320	PASS
	Ant1	6945	81.44	6904.20	6985.64	≤320	PASS
11AX160MIMO	Ant0	7025	80.80	6984.68	7065.48	≤320	PASS
	Ant1	7025	81.44	6984.52	7065.96	≤320	PASS
	Ant0	6025	165.12	5942.44	6107.56	≤320	PASS
	Ant1	6025	166.72	5942.44	6109.16	≤320	PASS
	Ant0	6185	164.16	6102.76	6266.92	≤320	PASS
	Ant1	6185	166.40	6102.12	6268.52	≤320	PASS
	Ant0	6345	167.36	6261.80	6429.16	≤320	PASS
	Ant1	6345	166.40	6262.12	6428.52	≤320	PASS



	Ant0	6505	167.36	6422.12	6589.48	≤320	PASS
	Ant1	6505	165.44	6422.44	6587.88	≤320	PASS
	Ant0	6665	165.76	6582.76	6748.52	≤320	PASS
	Ant1	6665	165.12	6582.44	6747.56	≤320	PASS
	Ant0	6825	164.80	6742.12	6906.92	≤320	PASS
	Ant1	6825	164.16	6742.76	6906.92	≤320	PASS
	Ant0	6985	166.40	6902.44	7068.84	≤320	PASS
	Ant1	6985	166.72	6903.08	7069.80	≤320	PASS




Test Graphs

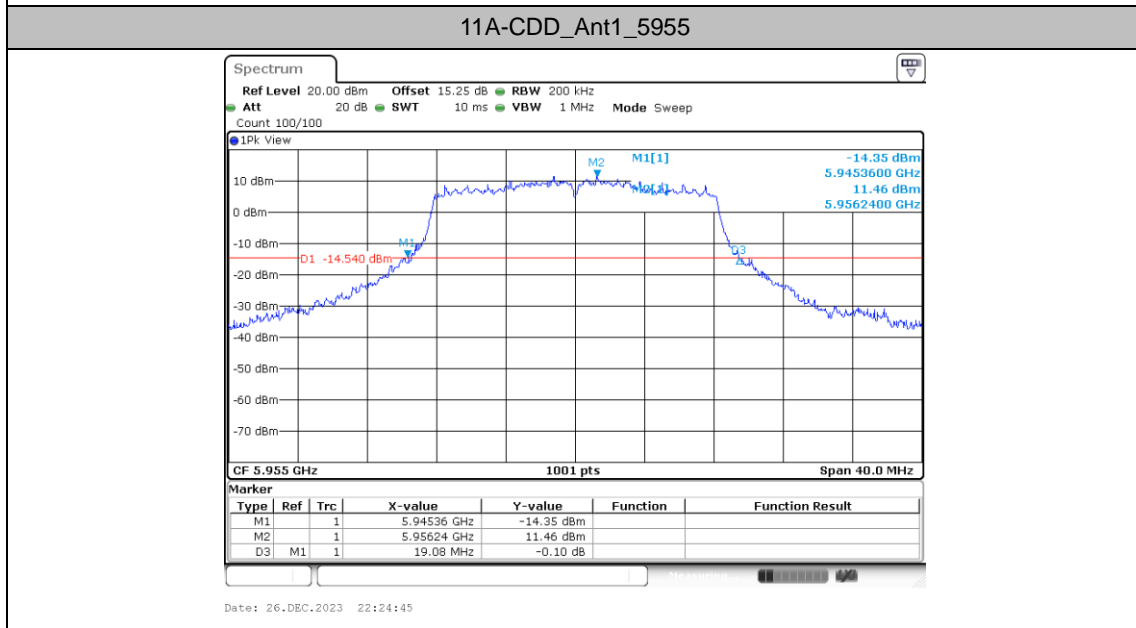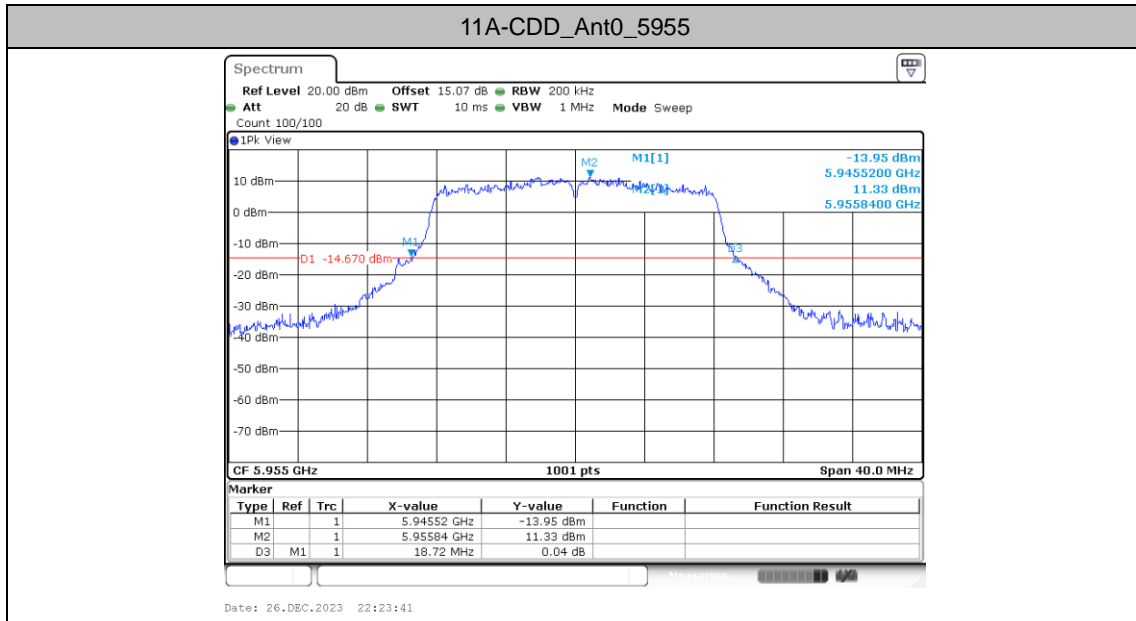




11A-CDD_Ant0_6195

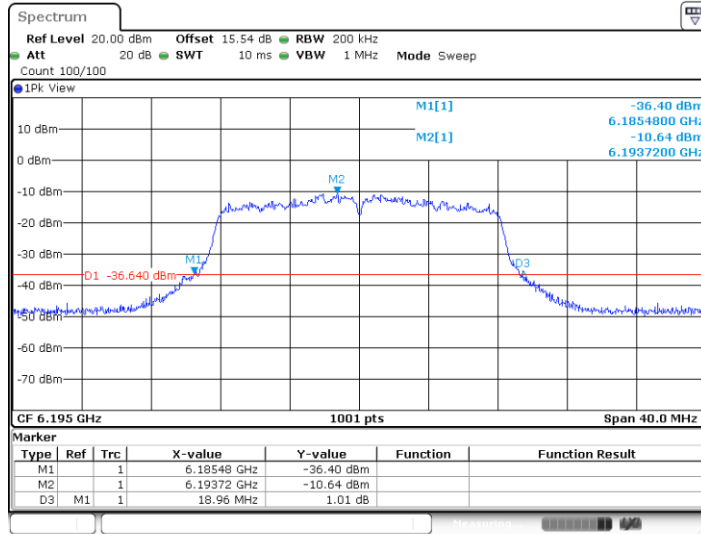


11A-CDD_Ant1_6195

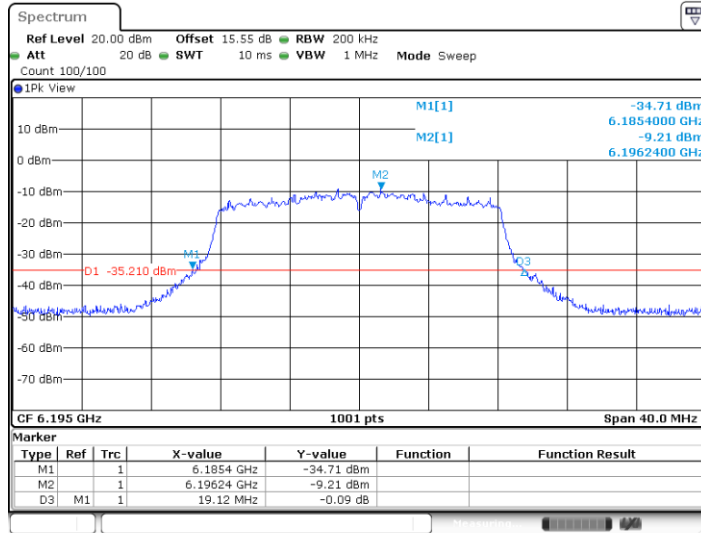




11A-CDD_Ant0_6415

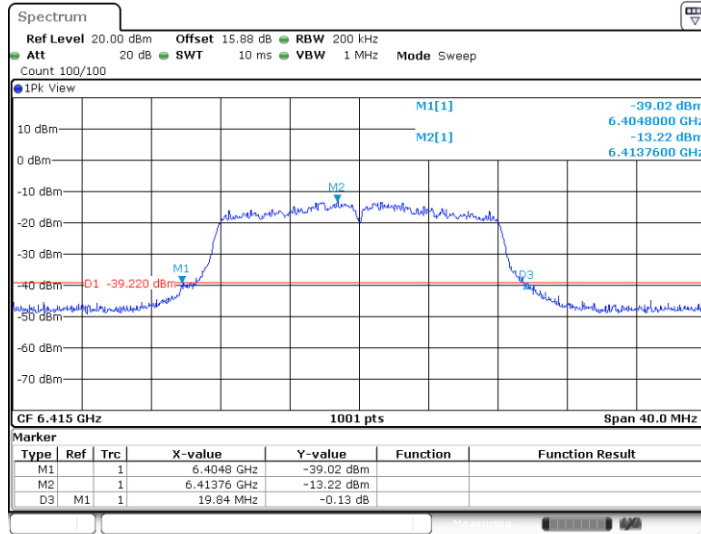

Date: 26.DEC.2023 22:47:56


11A-CDD_Ant1_6415

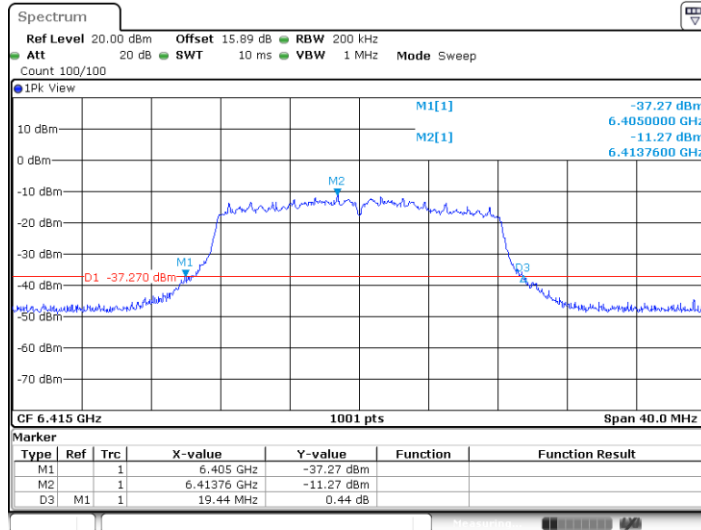

Date: 26.DEC.2023 22:48:38




11A-CDD_Ant0_6435

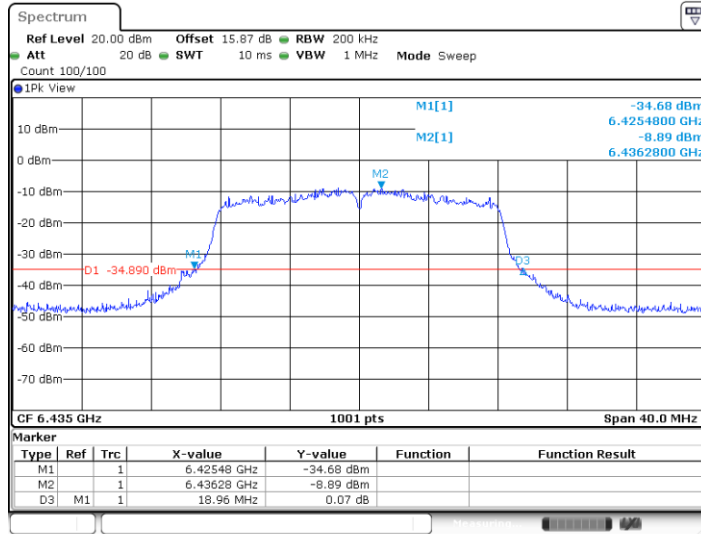

Date: 26.DEC.2023 22:51:45


11A-CDD_Ant1_6435

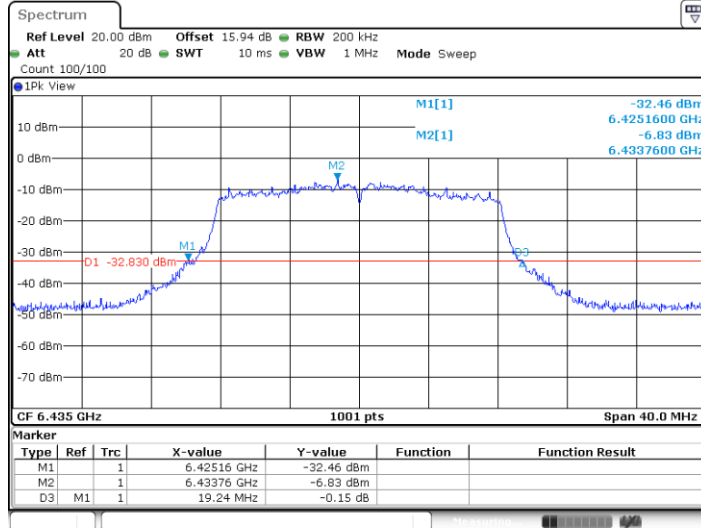

Date: 26.DEC.2023 22:52:34




11A-CDD_Ant0_6475

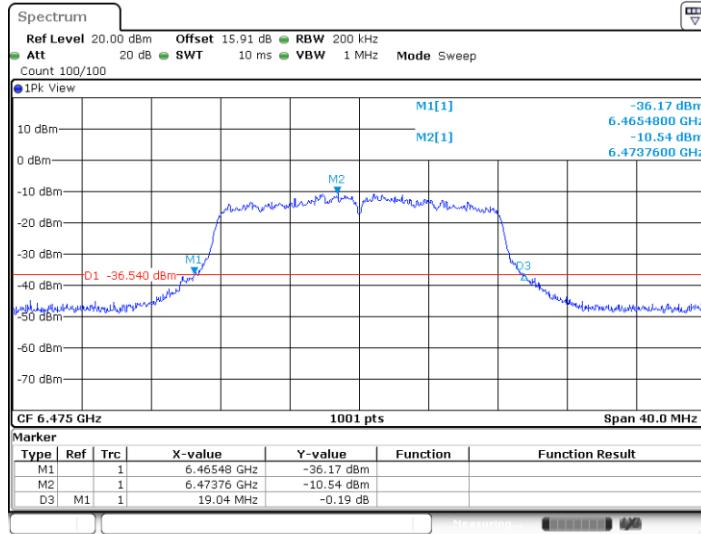

Date: 26.DEC.2023 22:56:37


11A-CDD_Ant1_6475

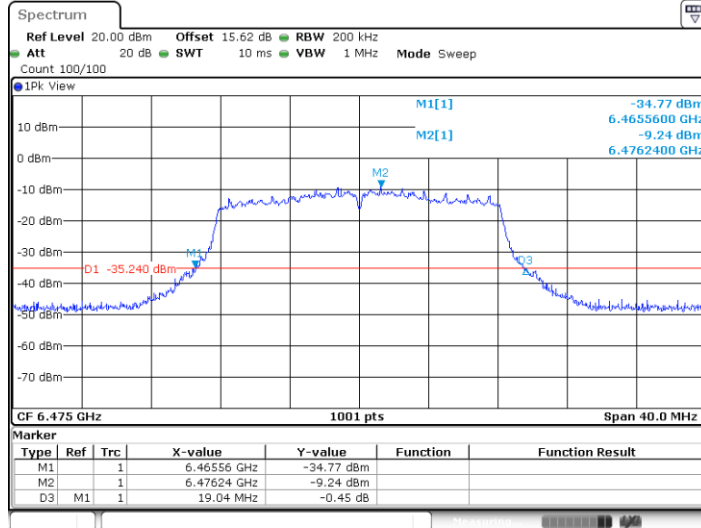

Date: 26.DEC.2023 22:57:26




11A-CDD_Ant0_6515

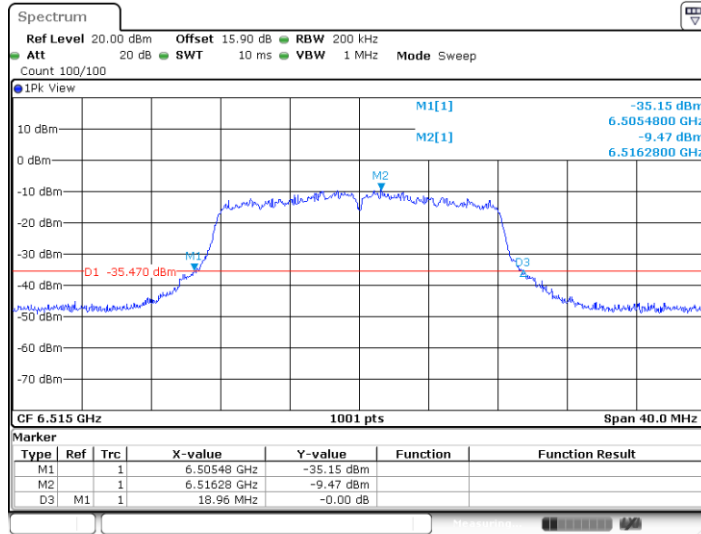

Date: 26.DEC.2023 22:59:39


11A-CDD_Ant1_6515

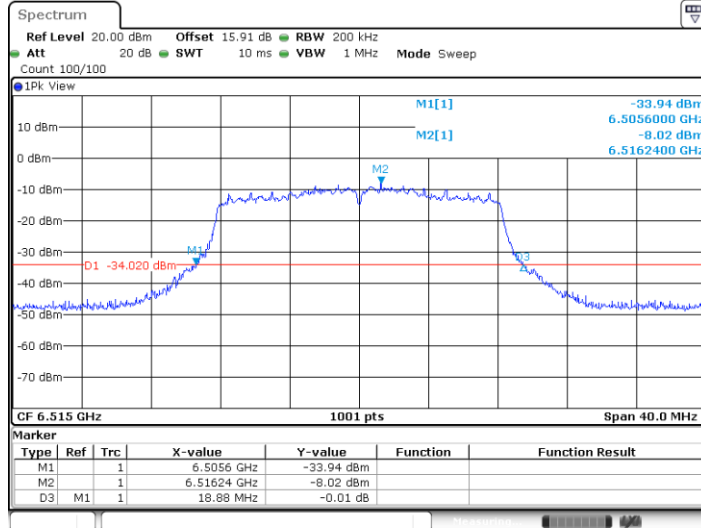


Date: 26.DEC.2023 23:00:30



11A-CDD_Ant0_6535

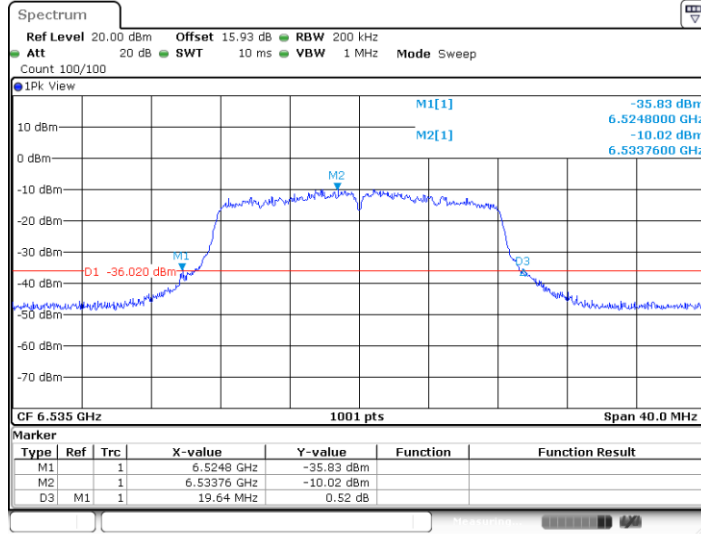


11A-CDD_Ant1_6535

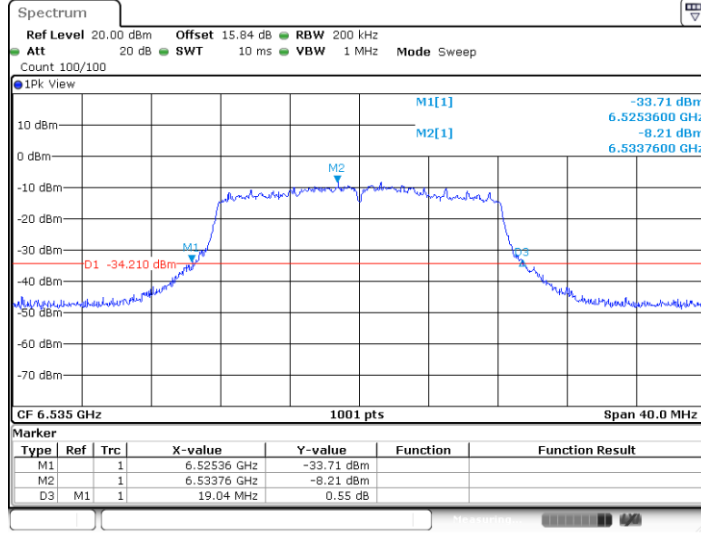




11A-CDD_Ant0_6695

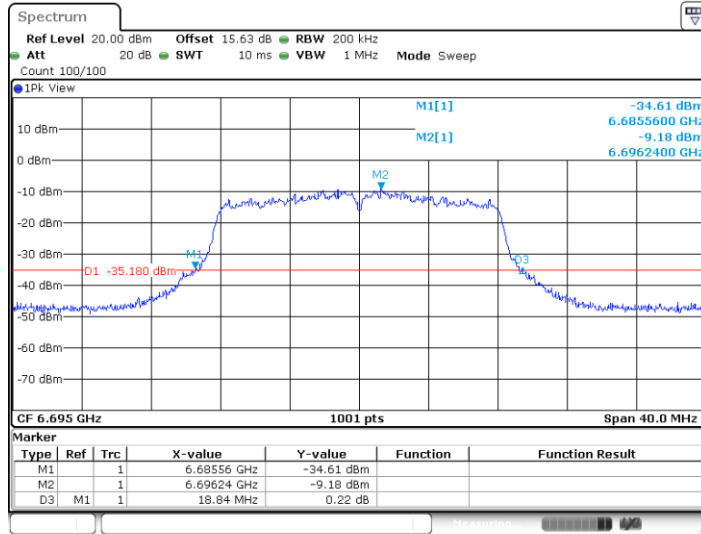

Date: 26.DEC.2023 23:05:03


11A-CDD_Ant1_6695

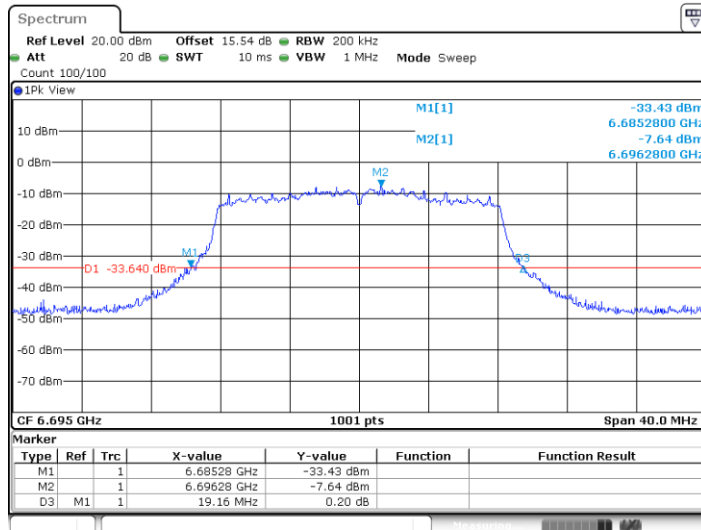

Date: 26.DEC.2023 23:05:13




11A-CDD_Ant0_6855

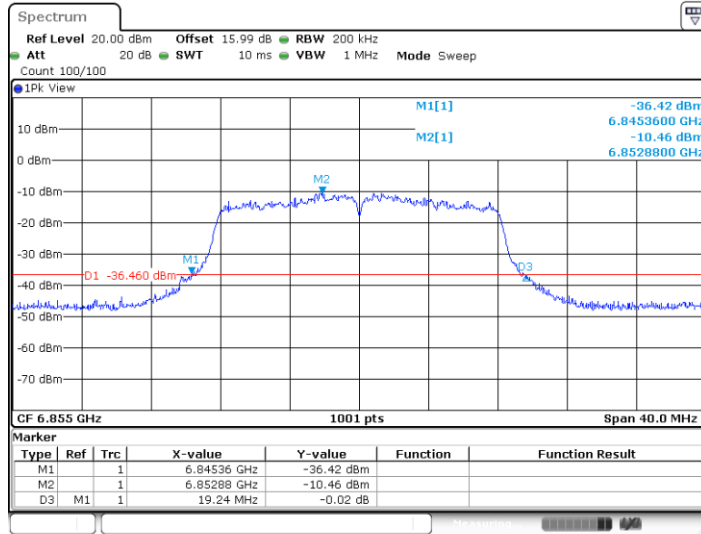

Date: 26.DEC.2023 23:06:58


11A-CDD_Ant1_6855

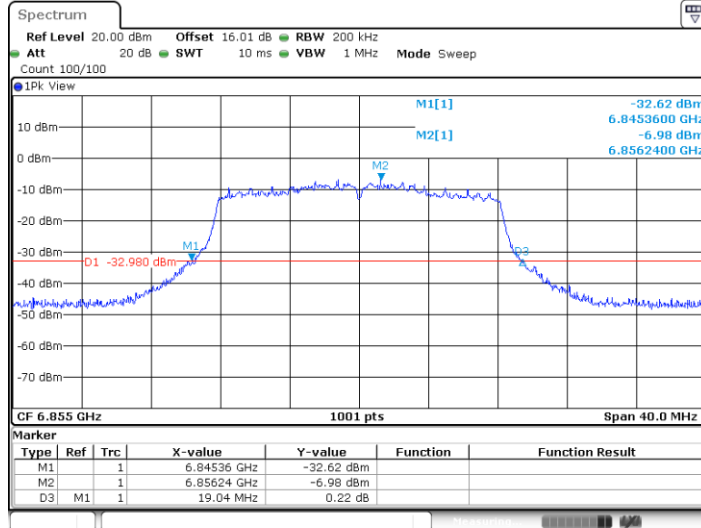

Date: 26.DEC.2023 23:07:47




11A-CDD_Ant0_6875

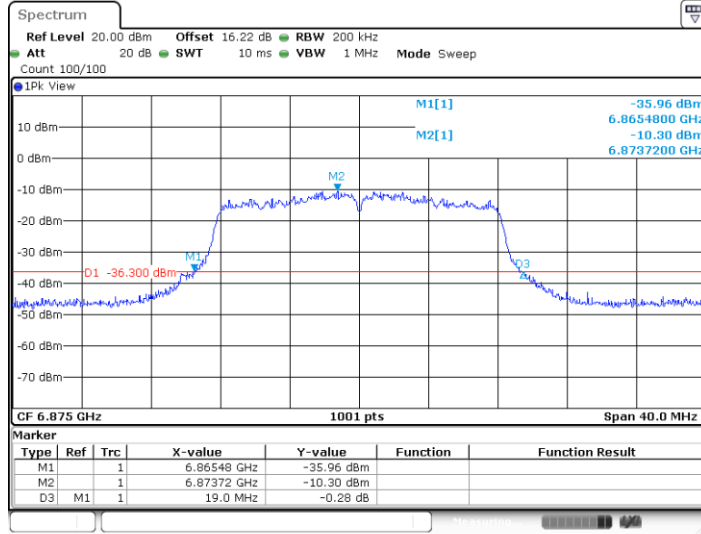

Date: 26.DEC.2023 23:09:00


11A-CDD_Ant1_6875

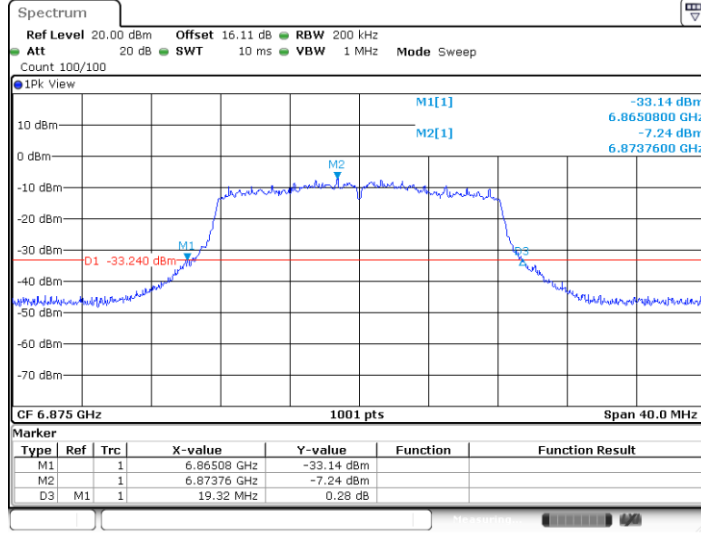


Date: 26.DEC.2023 23:09:50



11A-CDD_Ant0_6895

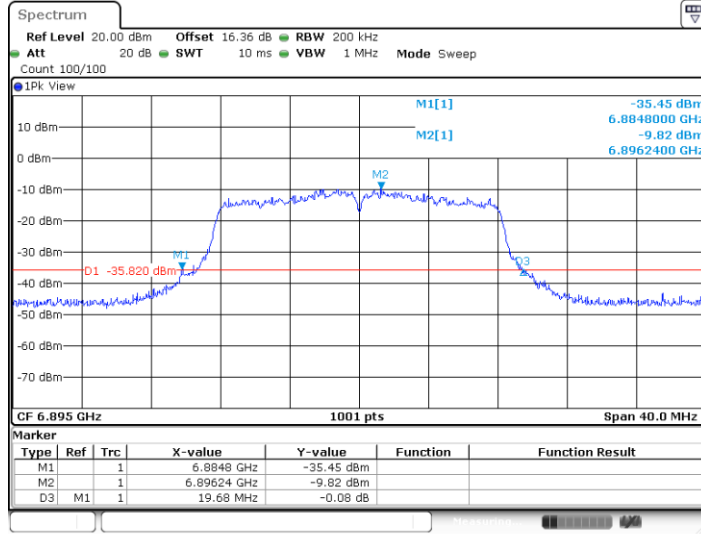


11A-CDD_Ant1_6895

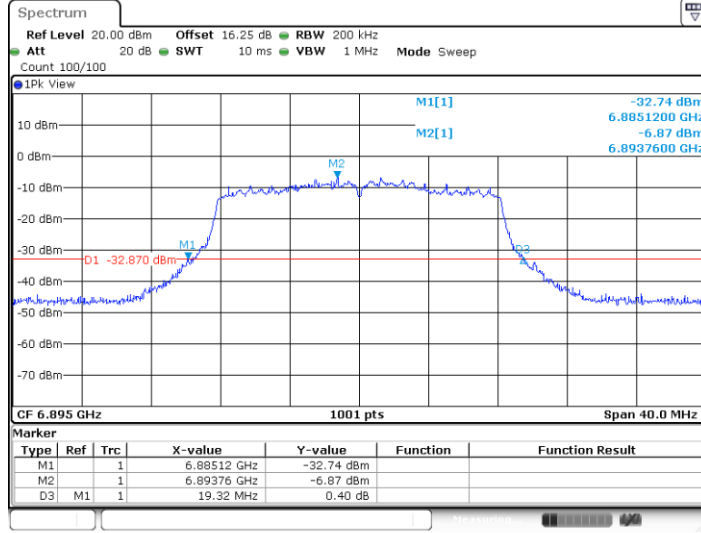




11A-CDD_Ant0_6995

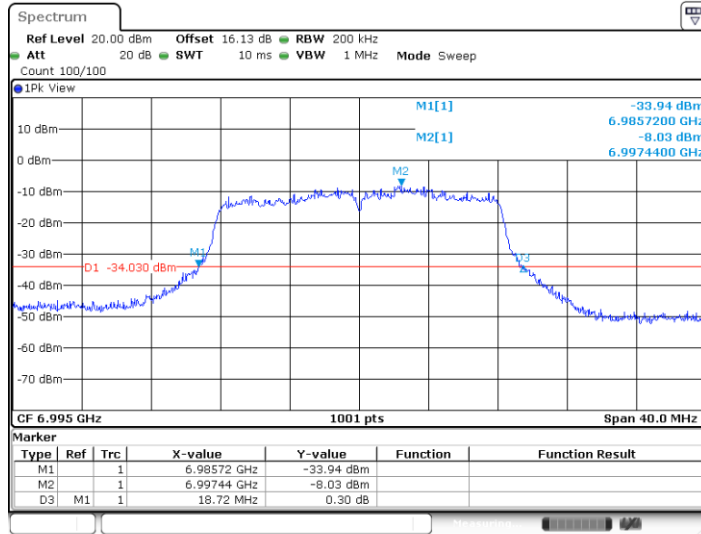

Date: 27.DEC.2023 00:07:09


11A-CDD_Ant1_6995

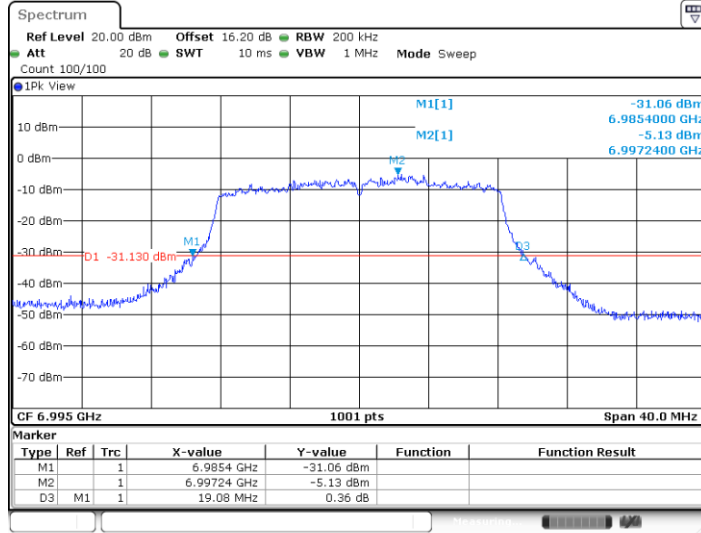


Date: 27.DEC.2023 00:07:17




11A-CDD_Ant0_7095

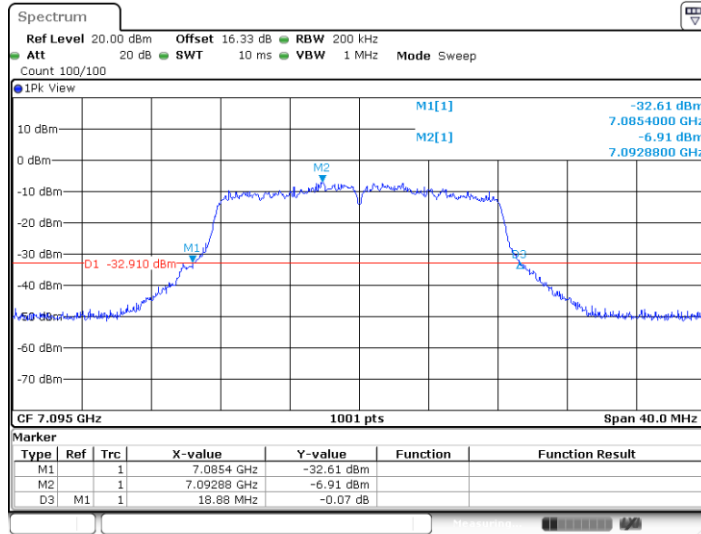


11A-CDD_Ant1_7095

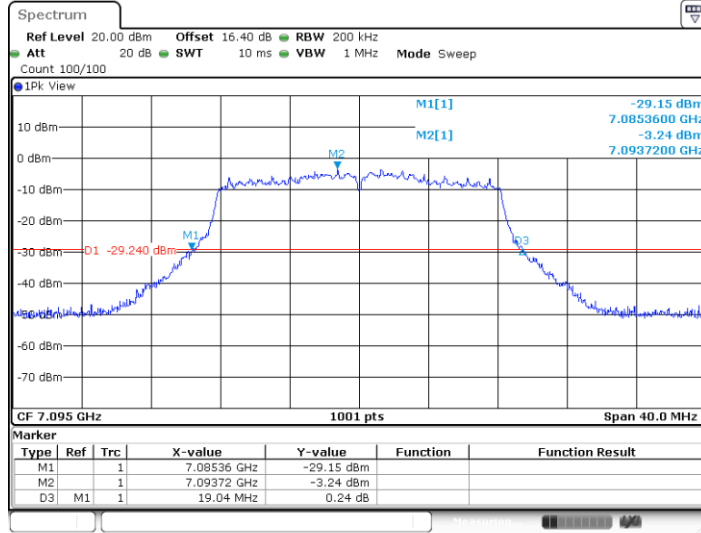

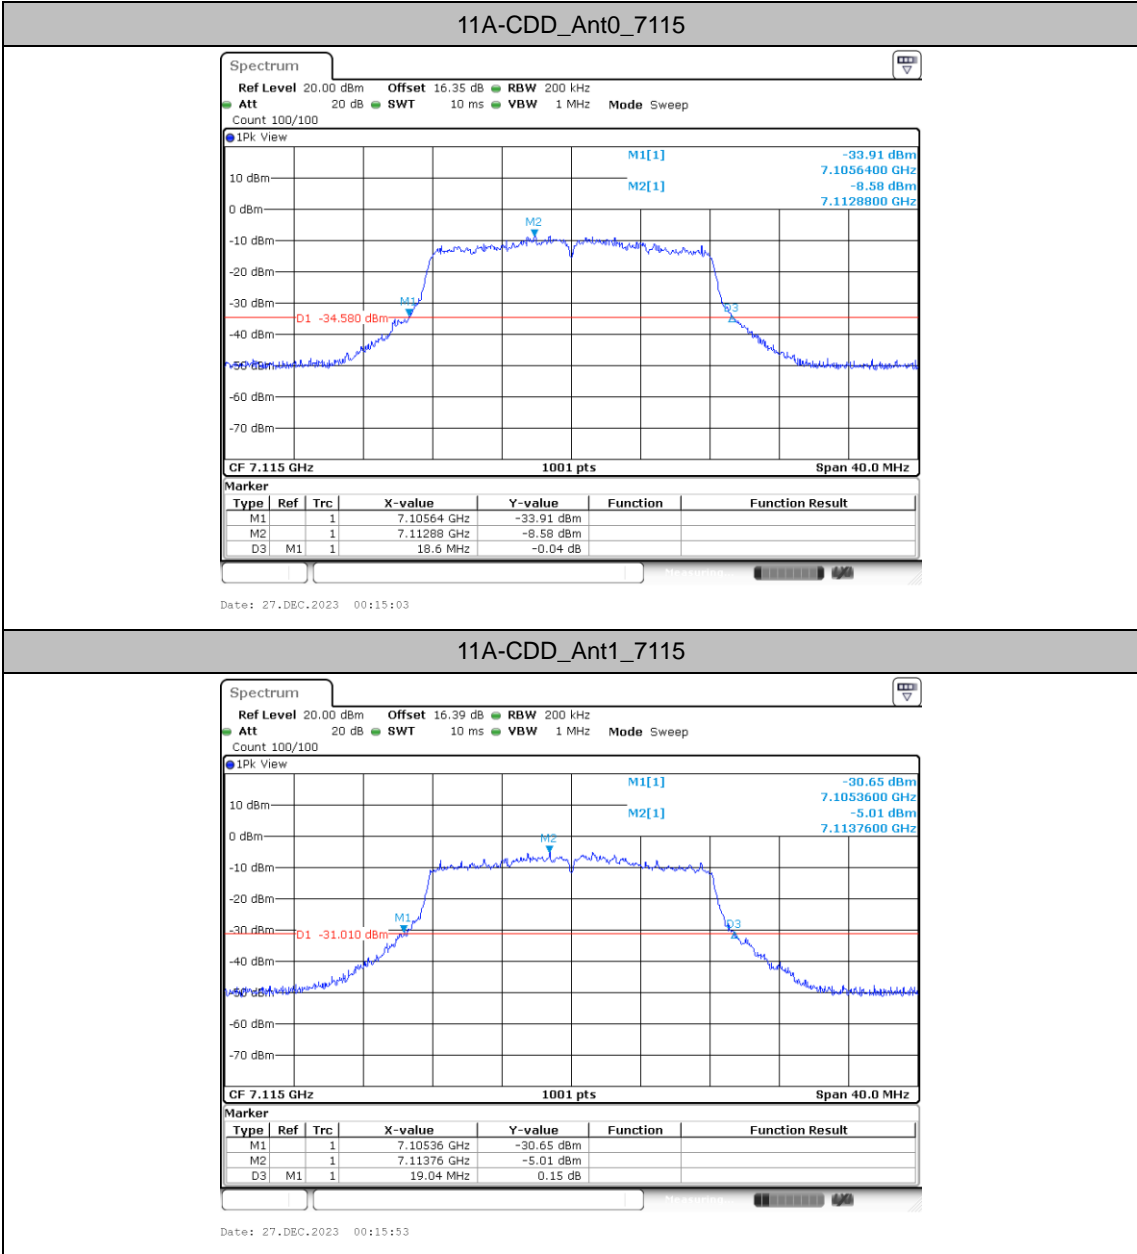




11AX20MIMO_Ant0_5955

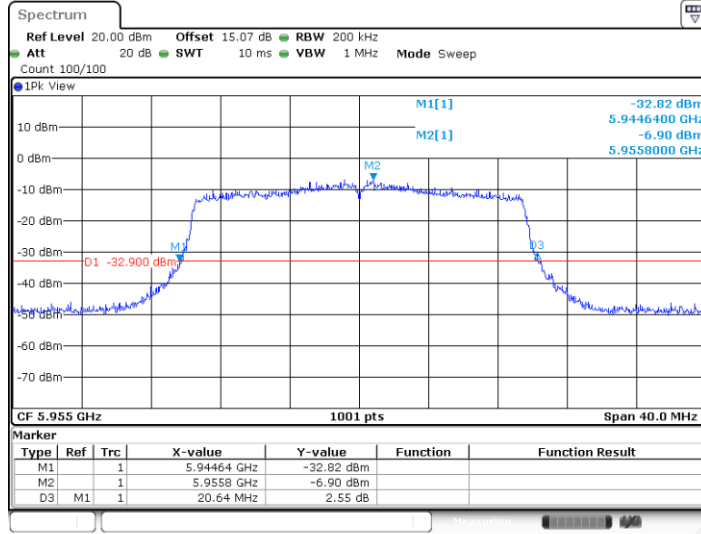

Date: 27.DEC.2023 00:17:31


11AX20MIMO_Ant1_5955

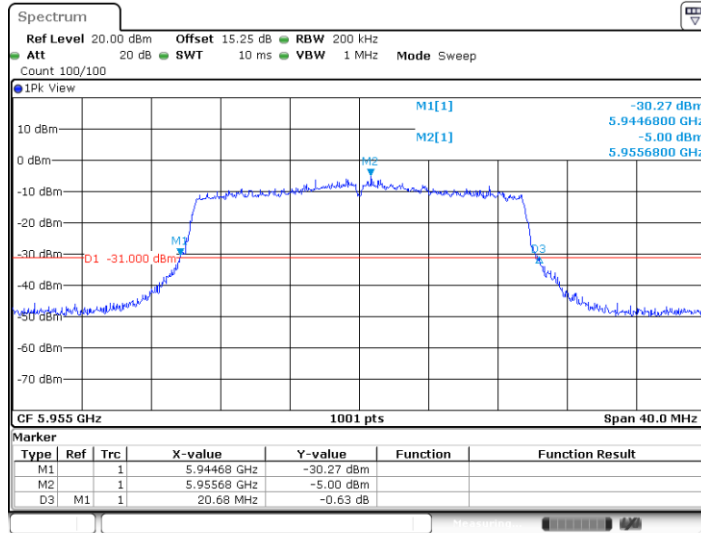


Date: 27.DEC.2023 00:18:29




11AX20MIMO_Ant0_6195

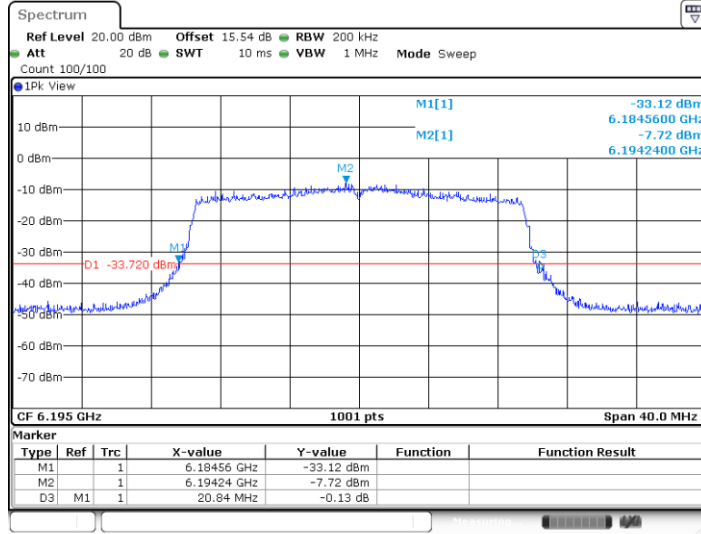


11AX20MIMO_Ant1_6195

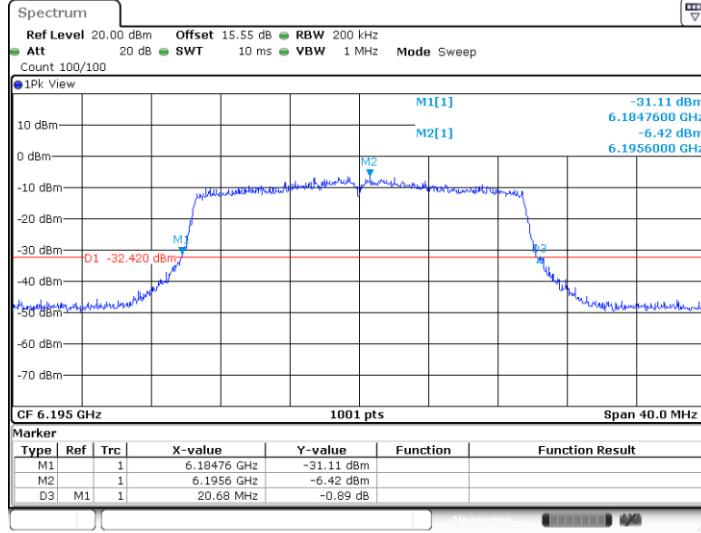

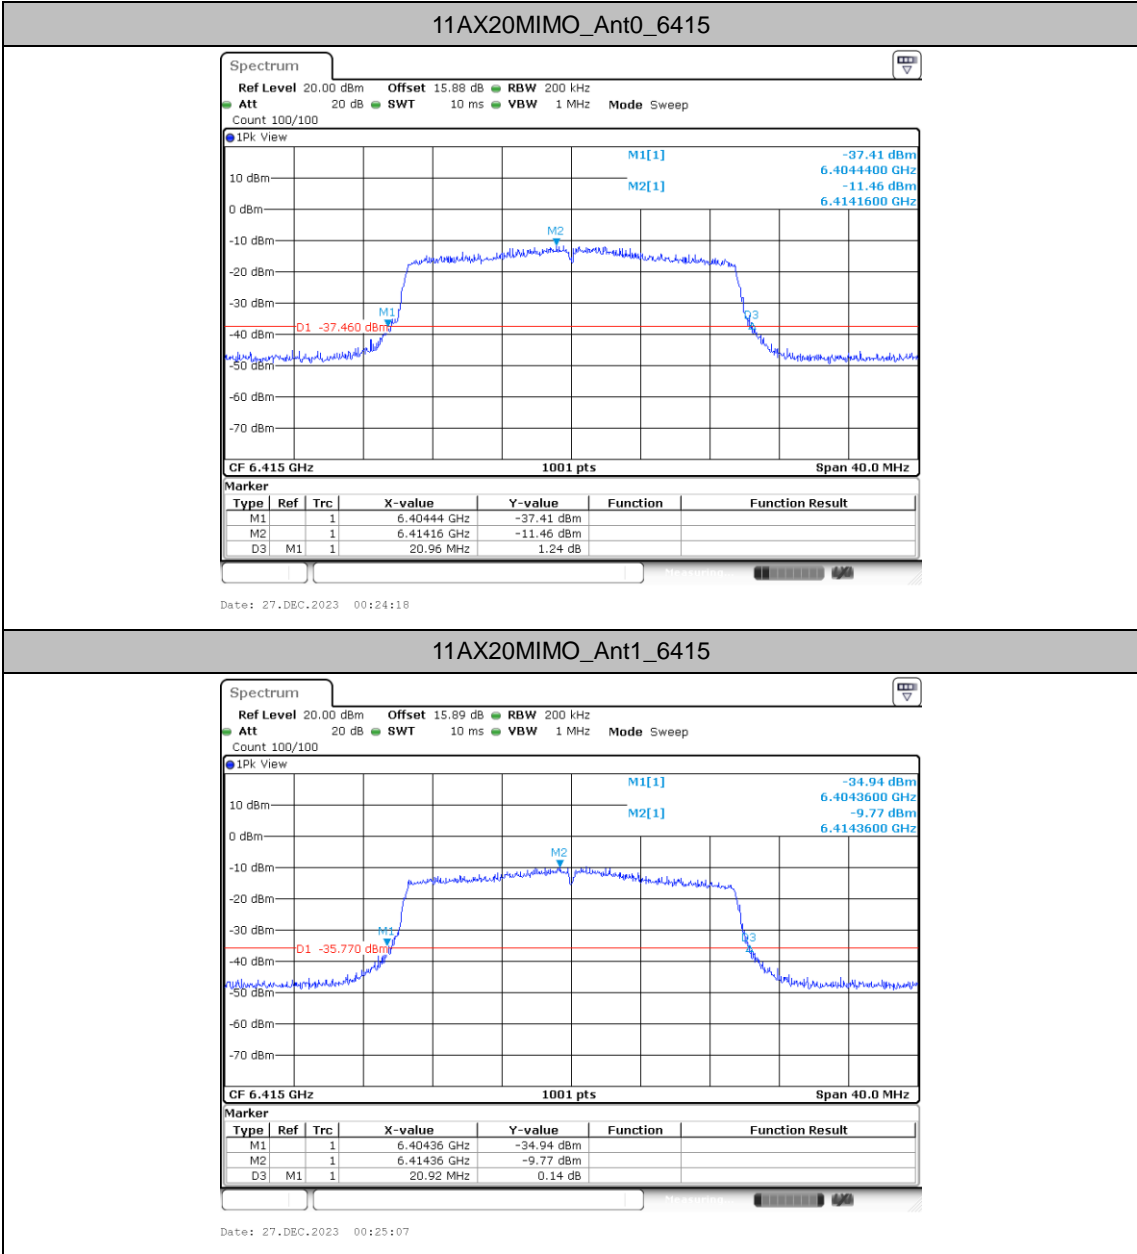




11AX20MIMO_Ant0_6435

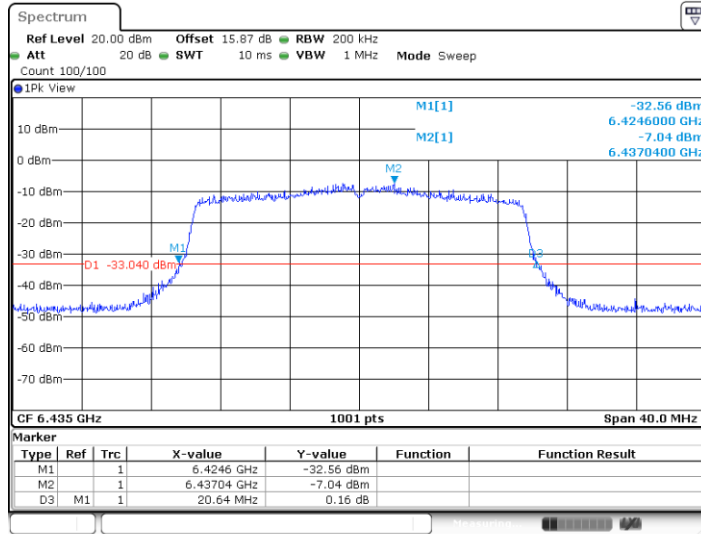


11AX20MIMO_Ant1_6435

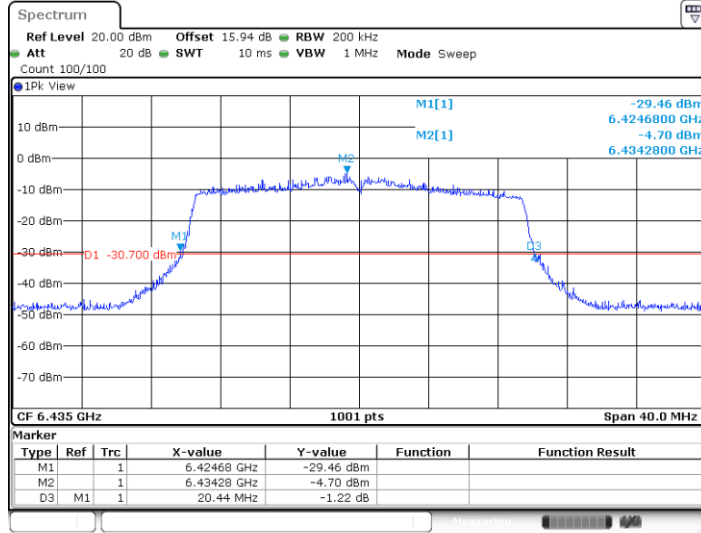





11AX20MIMO_Ant0_6475

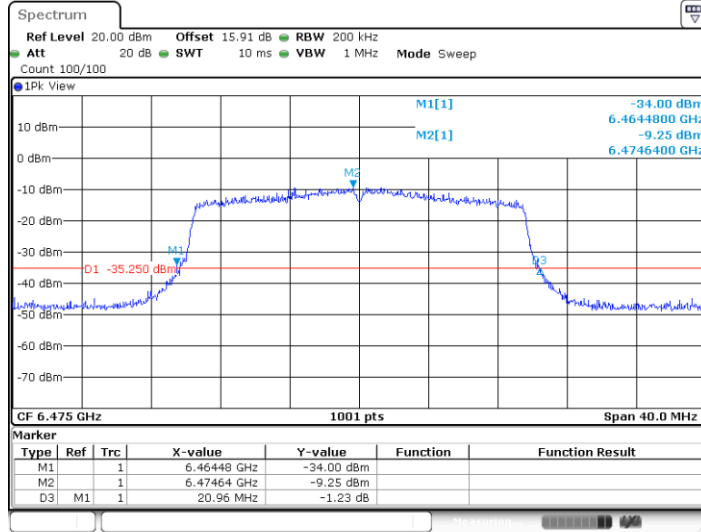


11AX20MIMO_Ant1_6475

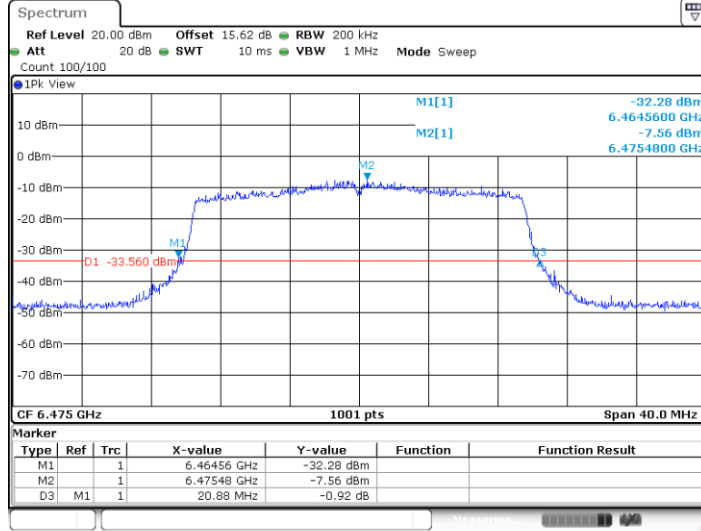

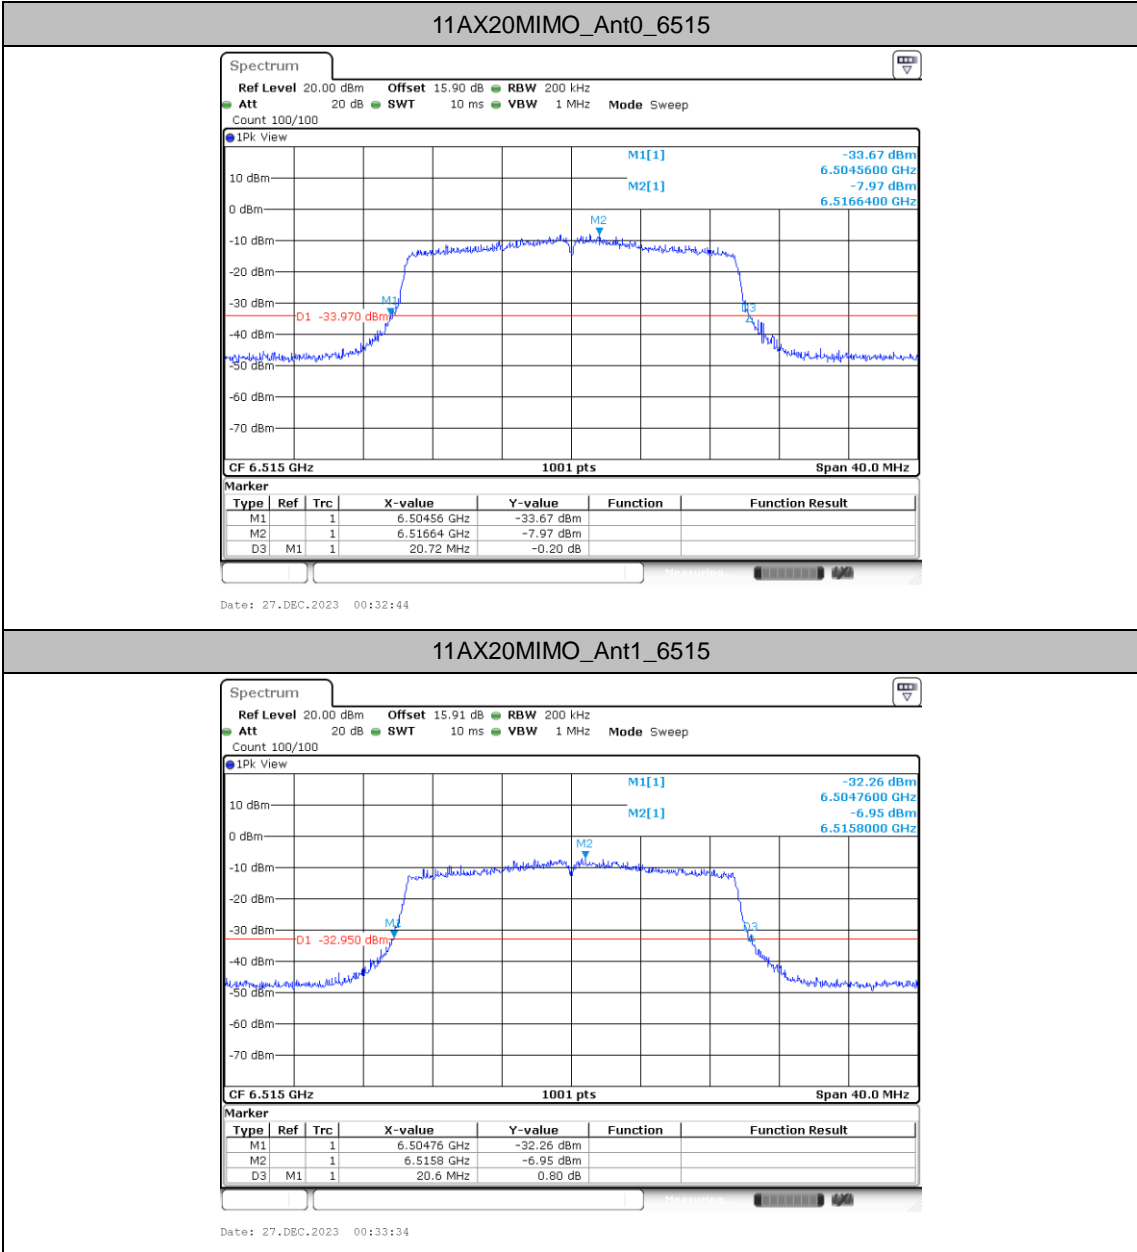




11AX20MIMO_Ant0_6535

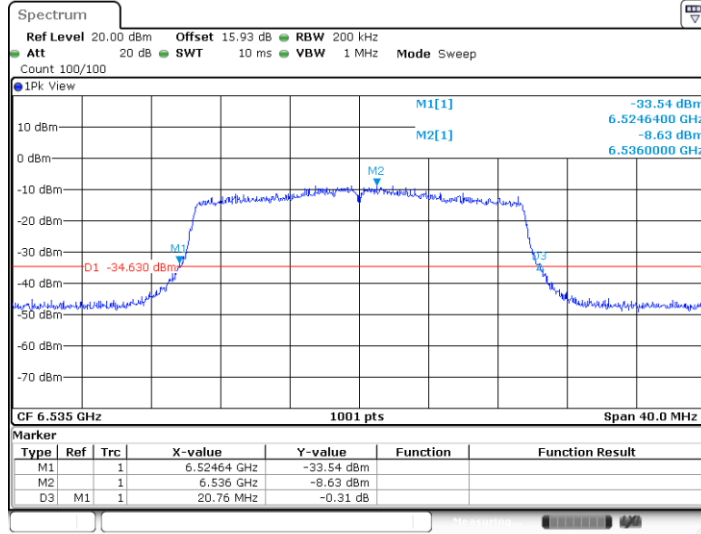

Date: 27.DEC.2023 00:34:38


11AX20MIMO_Ant1_6535

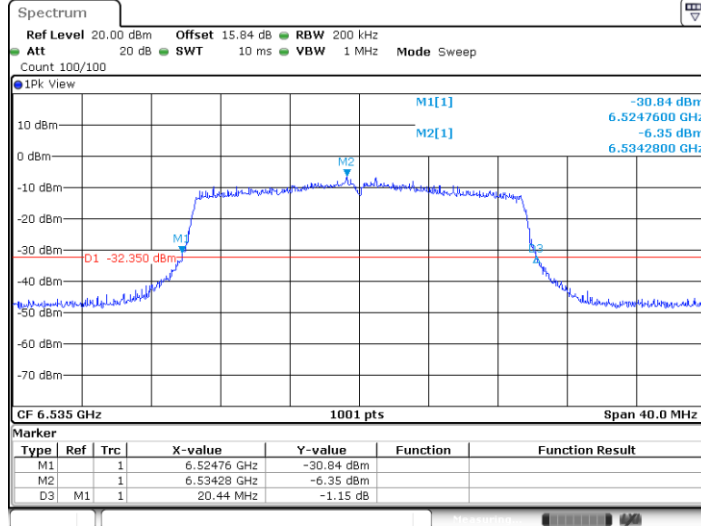


Date: 27.DEC.2023 00:35:29



11AX20MIMO_Ant0_6695

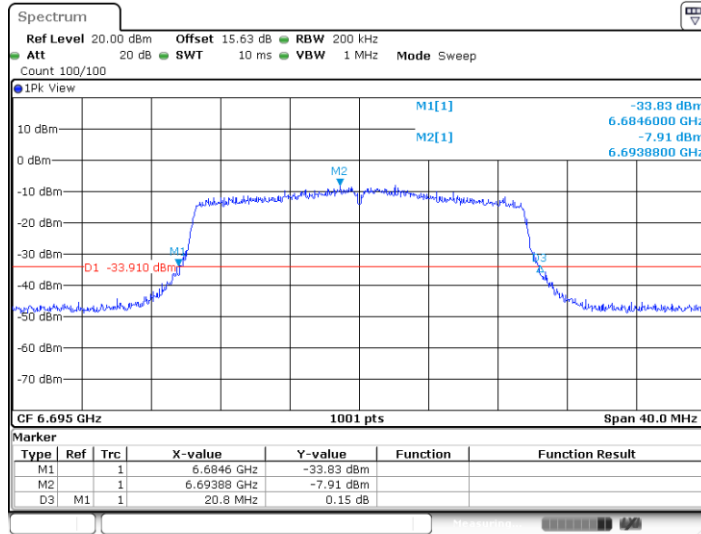


11AX20MIMO_Ant1_6695

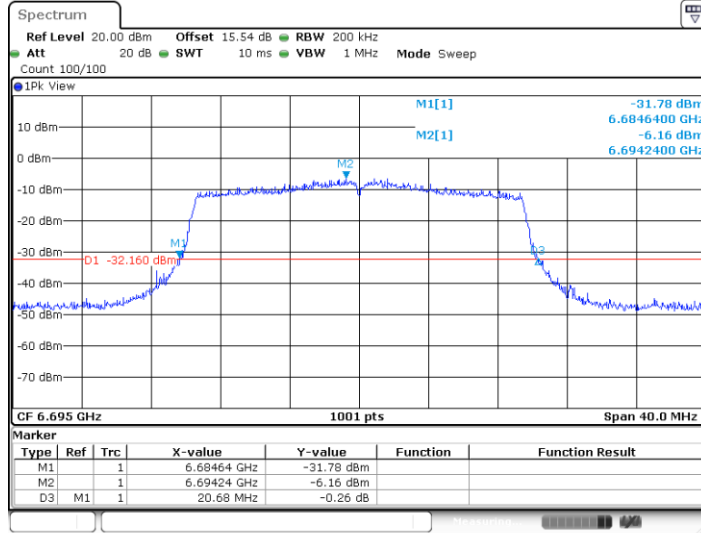




11AX20MIMO_Ant0_6855

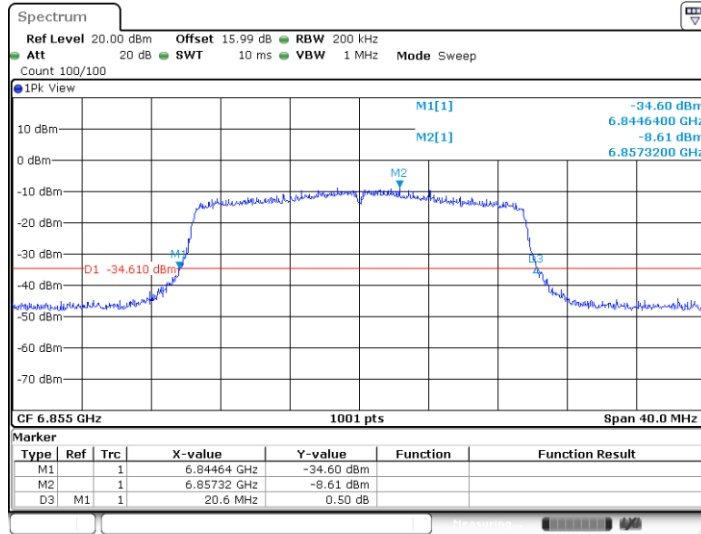

Date: 27.DEC.2023 00:41:05


11AX20MIMO_Ant1_6855

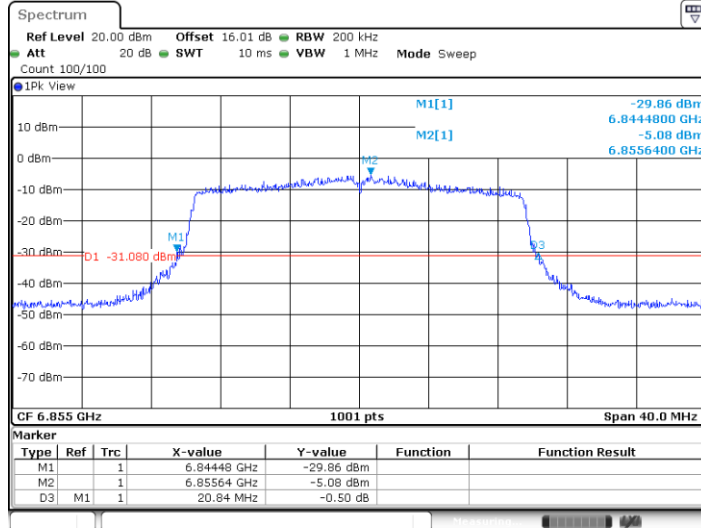

Date: 27.DEC.2023 00:41:55




11AX20MIMO_Ant0_6875

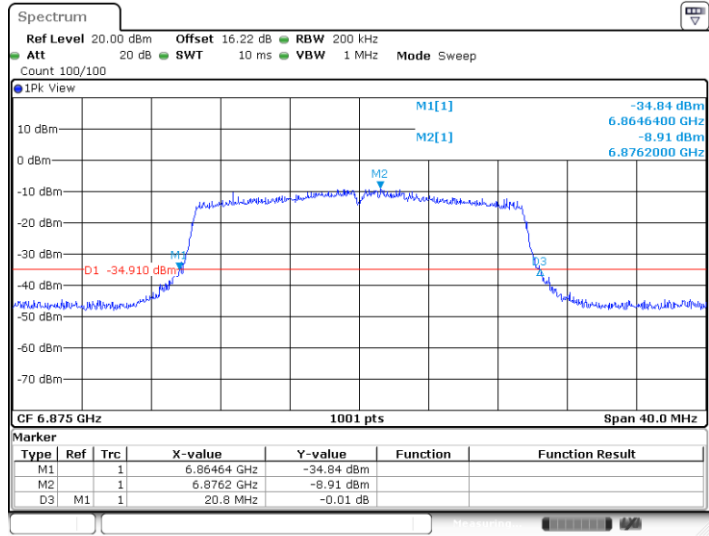



Date: 27.DEC.2023 00:43:11

11AX20MIMO_Ant1_6875

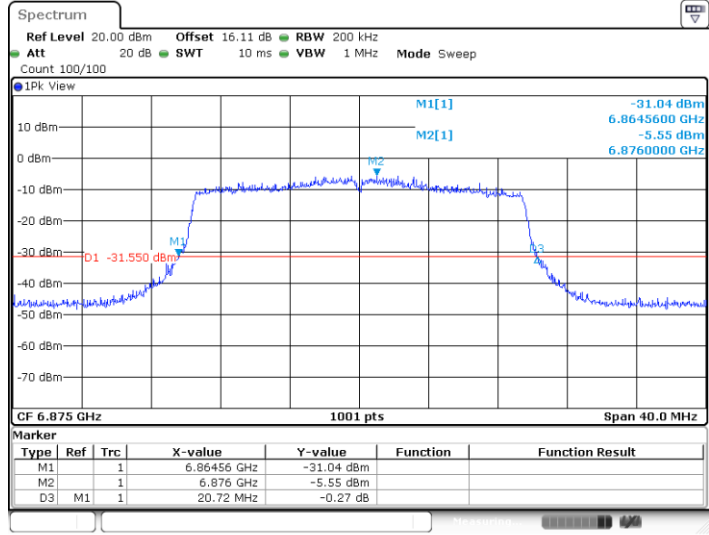


Date: 27.DEC.2023 00:43:59

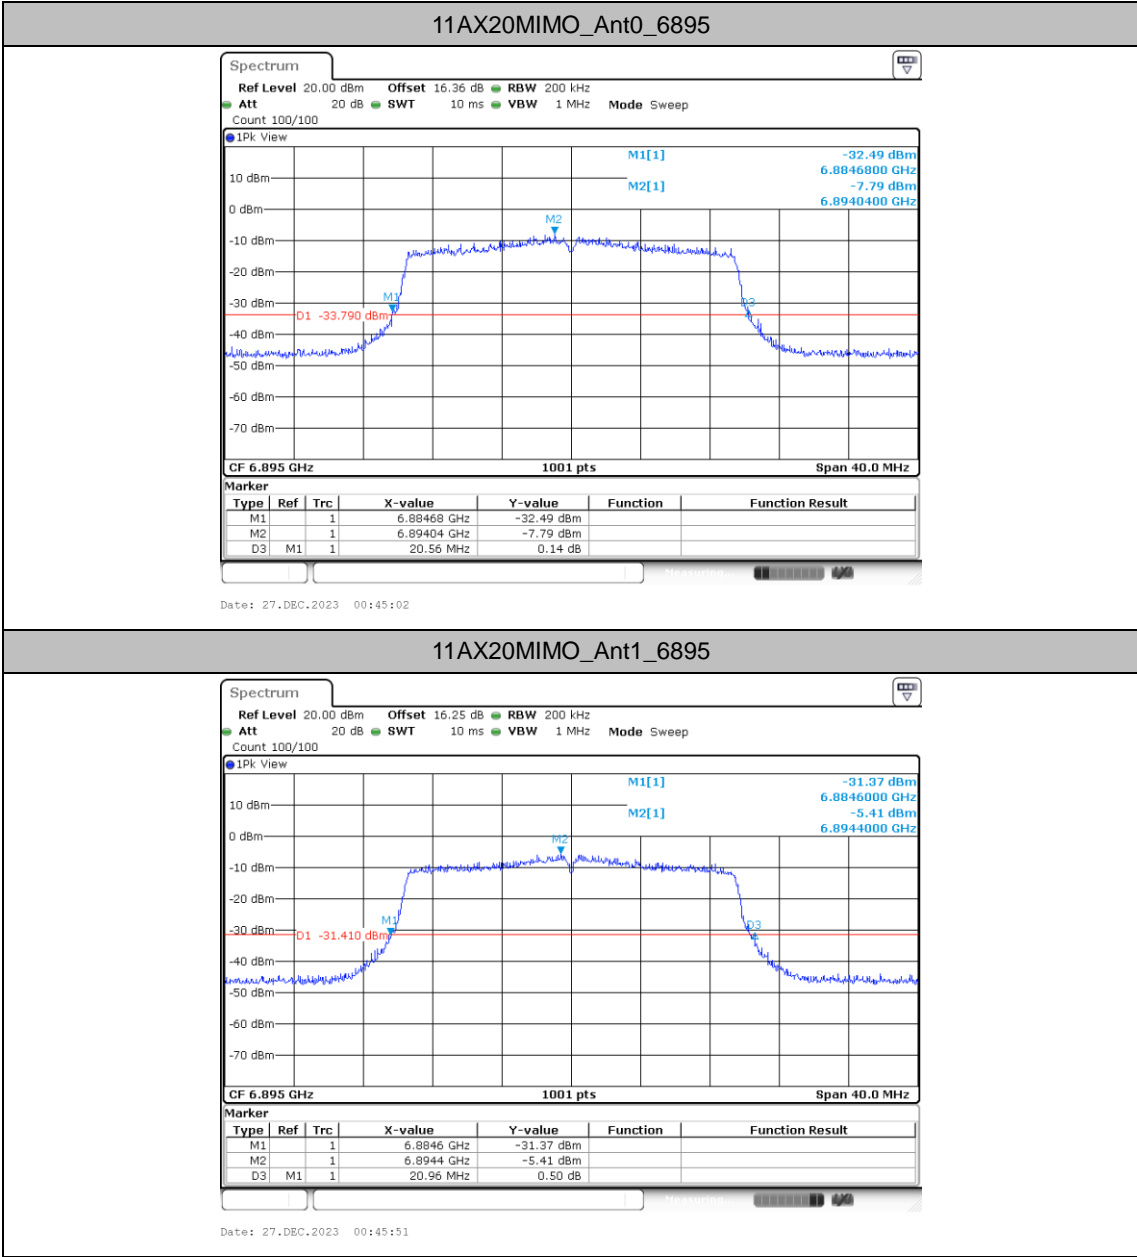

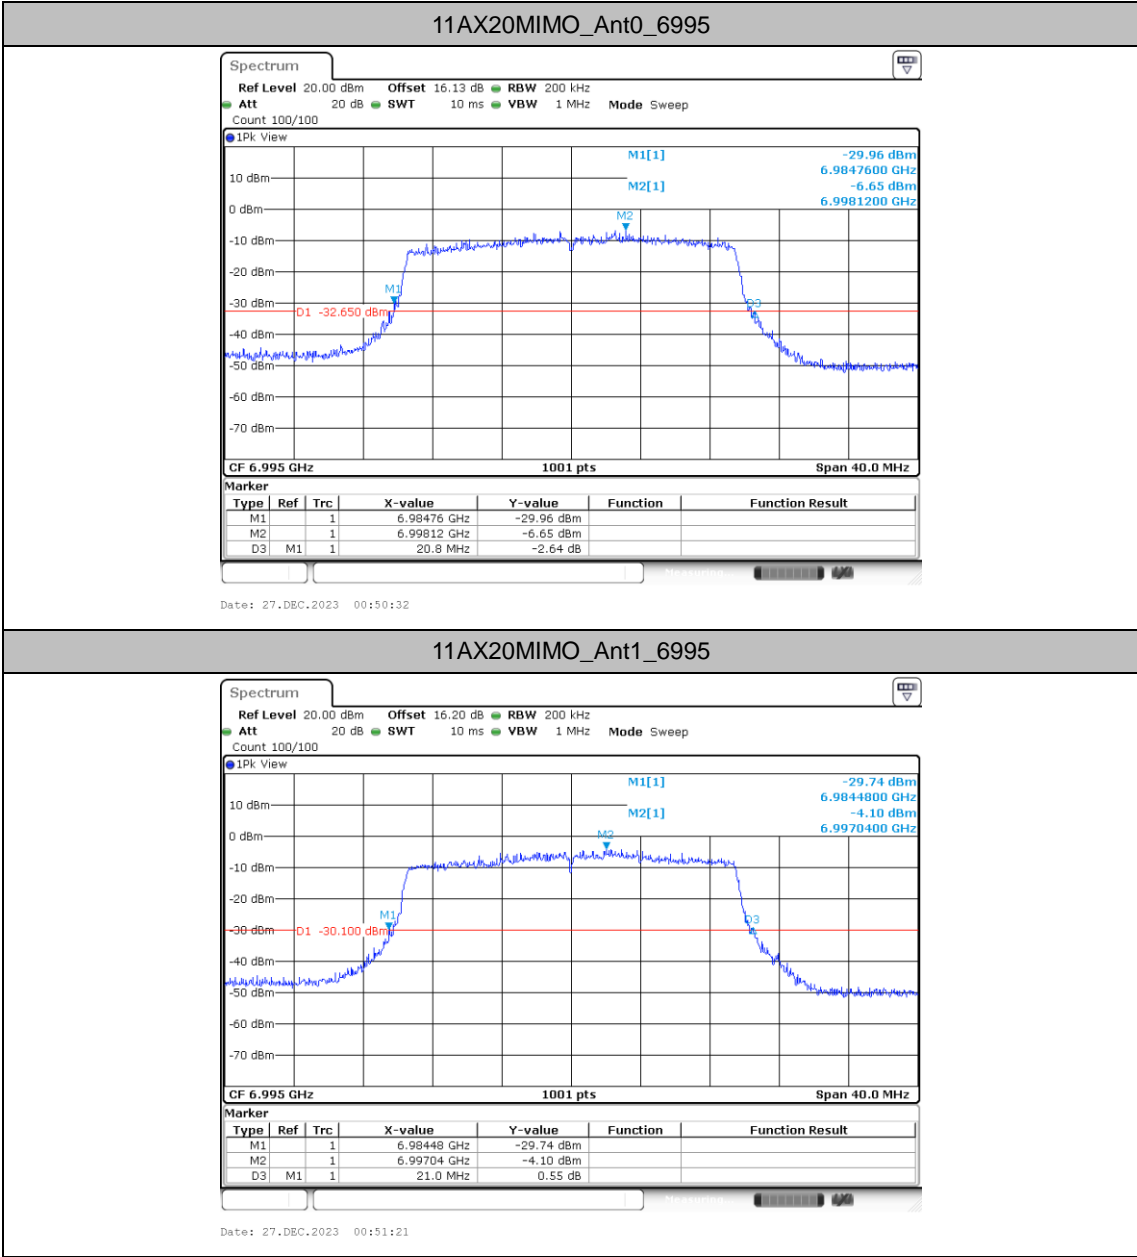




11AX20MIMO_Ant0_7095

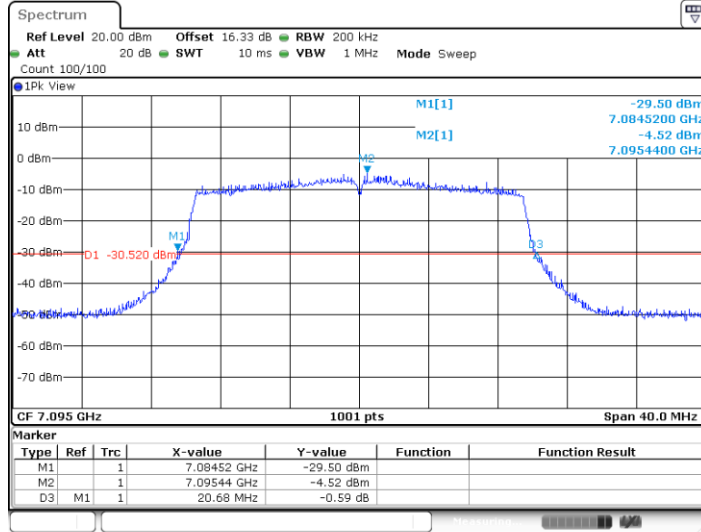


11AX20MIMO_Ant1_7095

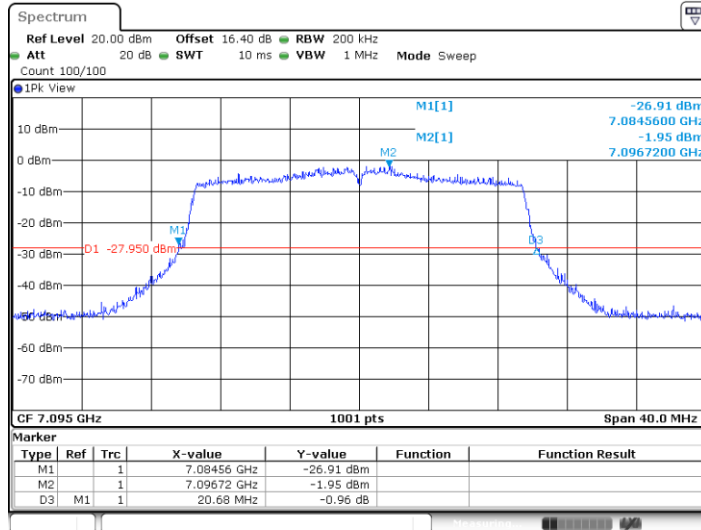




11AX20MIMO_Ant0_7115

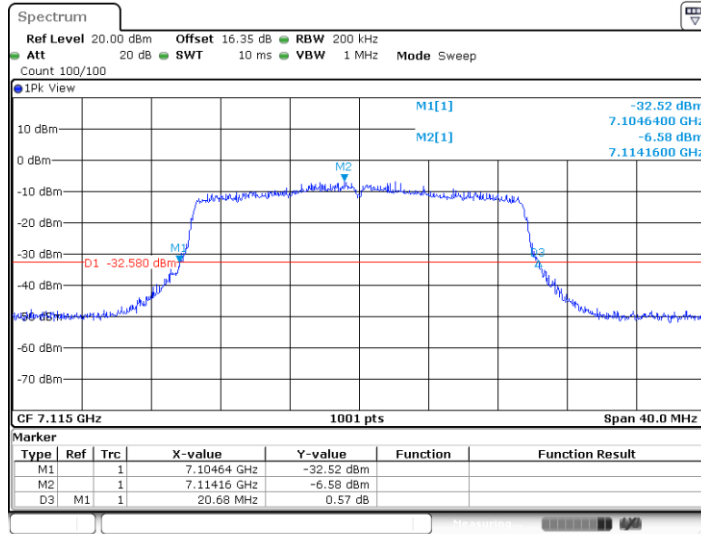

Date: 27.DEC.2023 00:55:23


11AX20MIMO_Ant1_7115

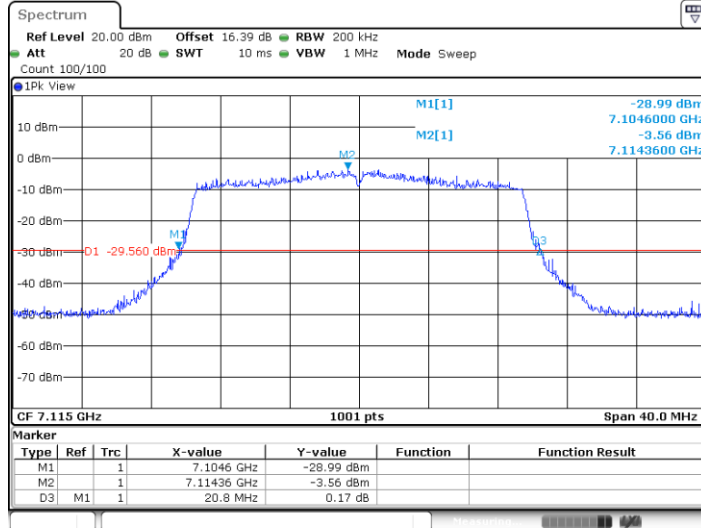


Date: 27.DEC.2023 00:56:14




11AX40MIMO_Ant0_5965

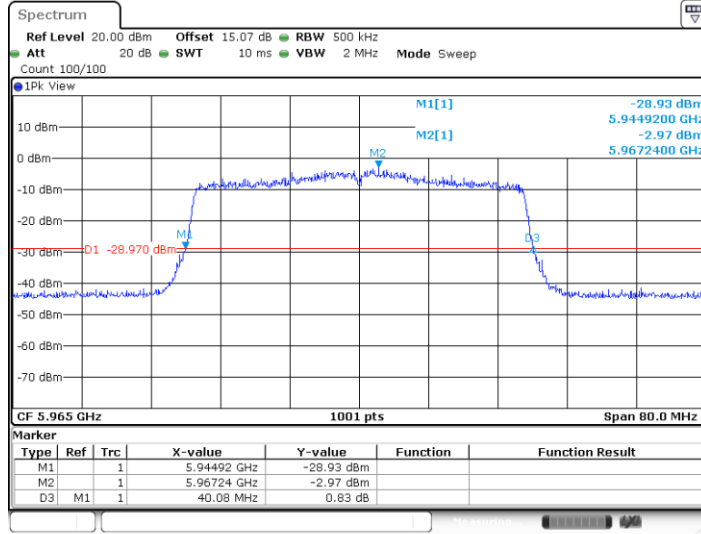


11AX40MIMO_Ant1_5965

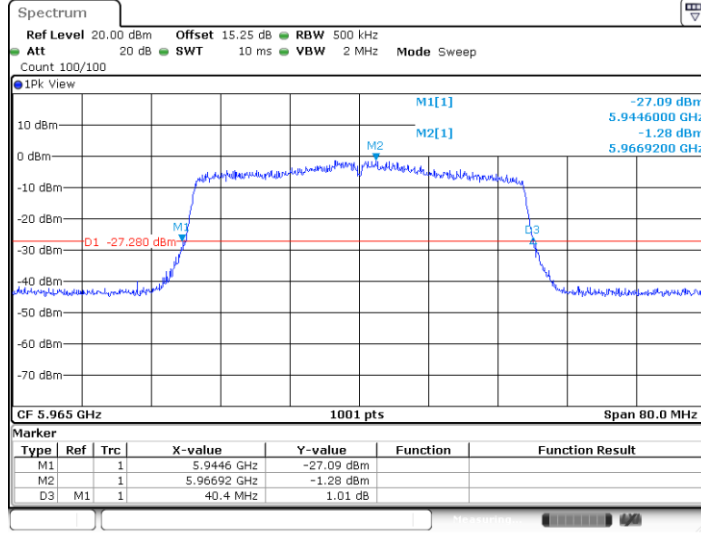

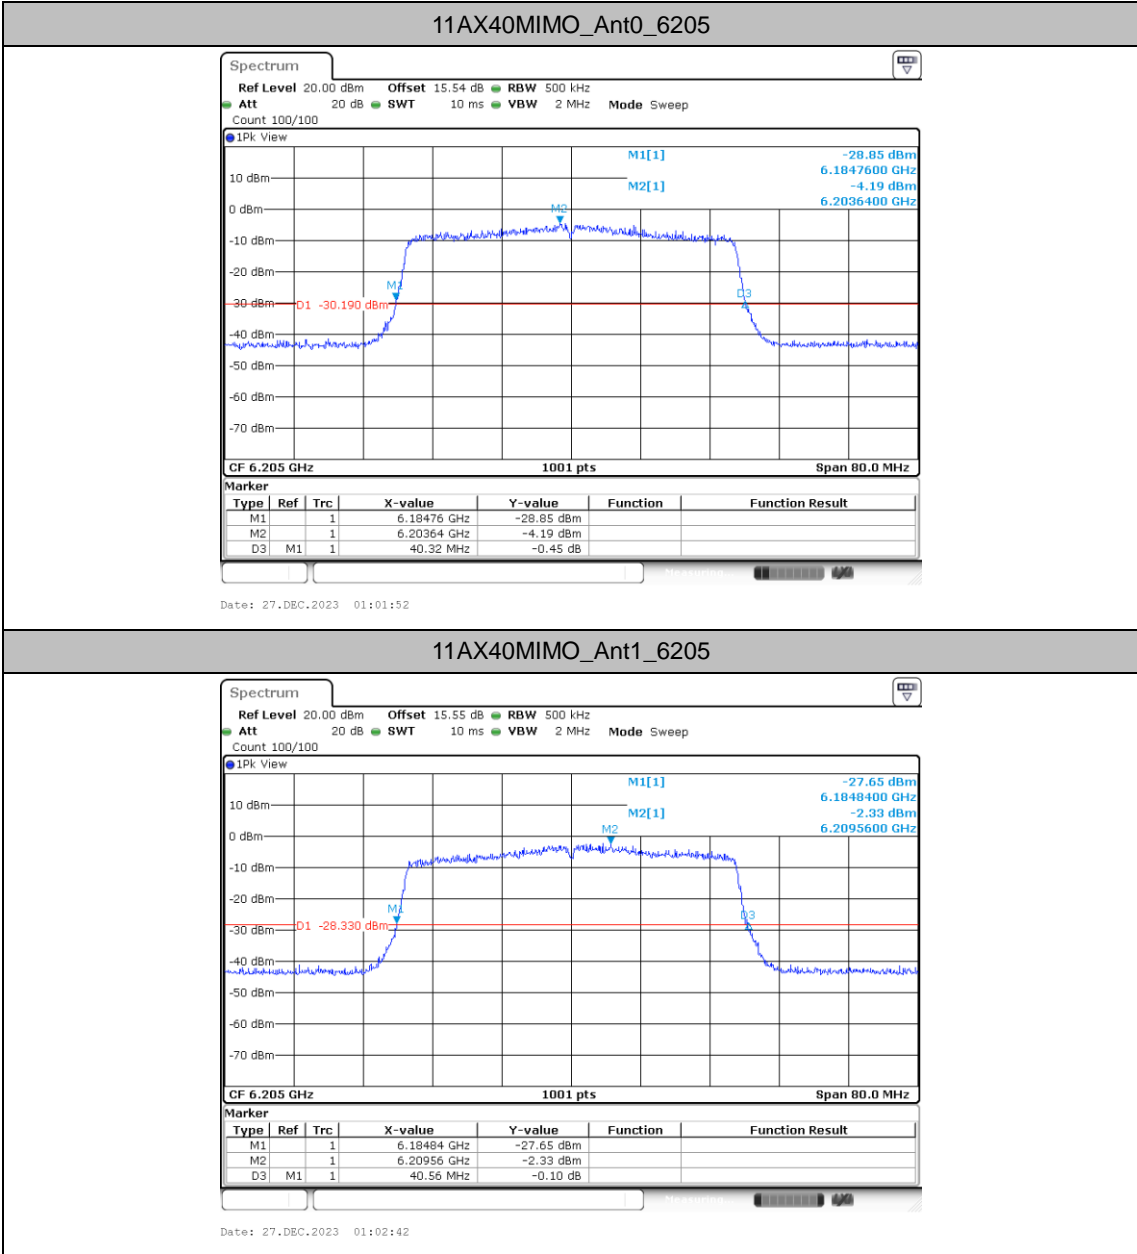




11AX40MIMO_Ant0_6405

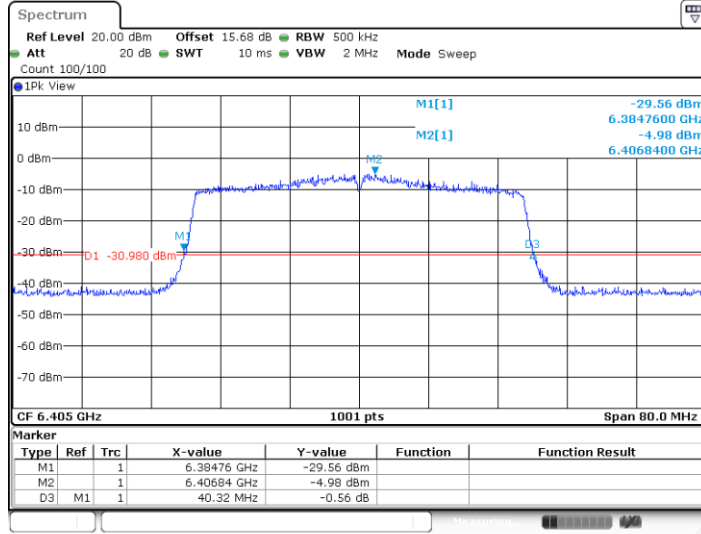


11AX40MIMO_Ant1_6405

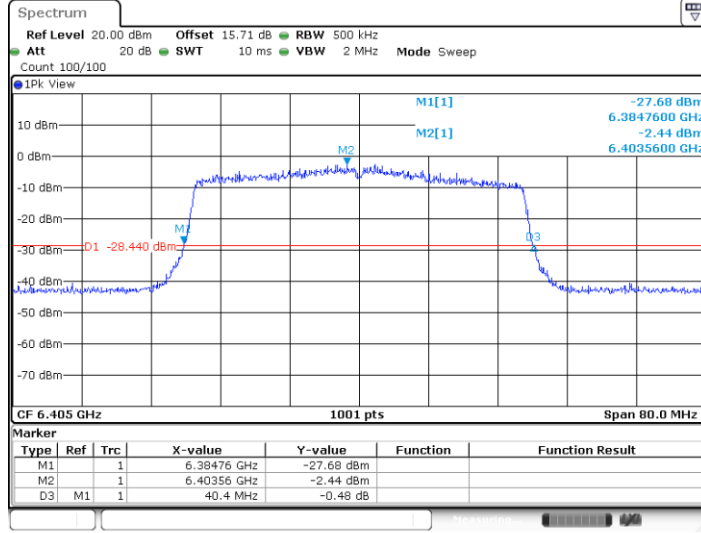




11AX40MIMO_Ant0_6445

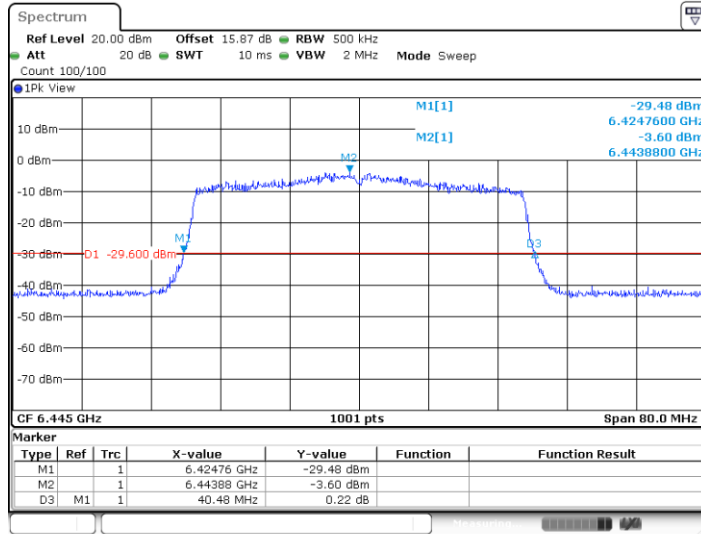

Date: 27.DEC.2023 01:06:40

11AX40MIMO_Ant1_6445

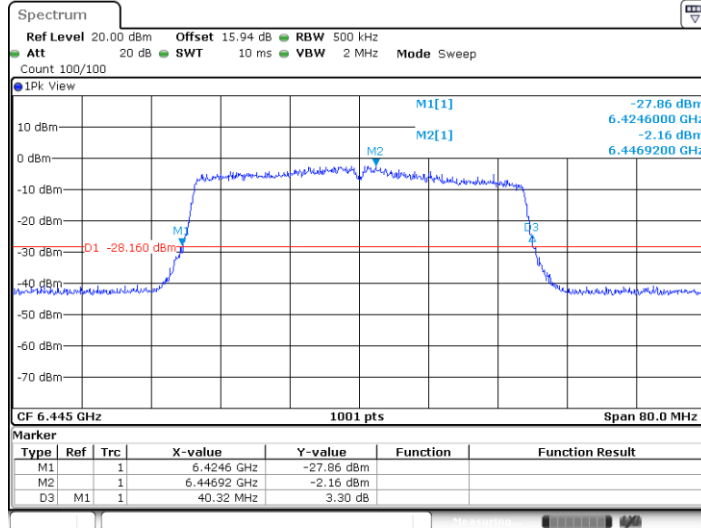

Date: 27.DEC.2023 01:07:30