




Wireless Motion Sensor 3-Head Spotlight with Remote Control

EN

Instruction Manual

OVERVIEW

Spotlight

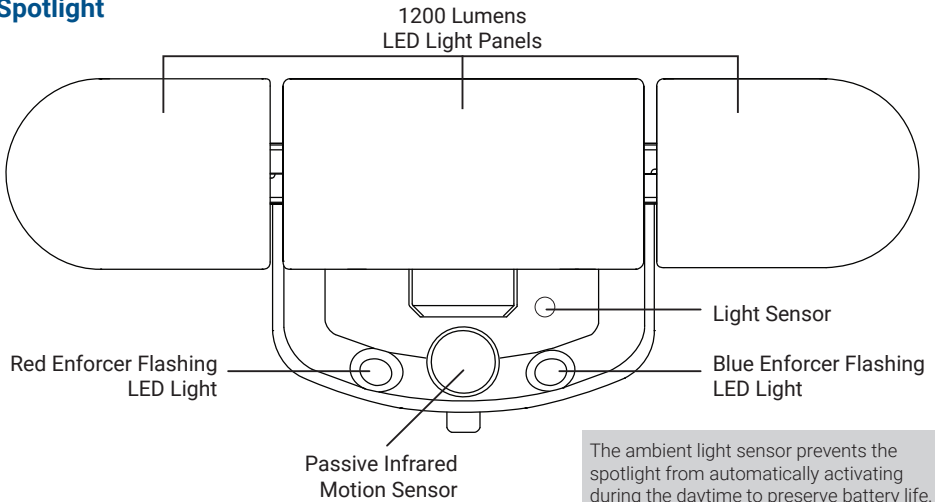

Remote Control

Override sensor and manually turn LED Light ON for 10 minutes. (after 10 minutes the LED Light will turn off and operate in auto mode)


Power OFF. The spotlight will switch back to auto mode after 1 hour if no other button is pressed

Set LED Light to stay OFF when motion is detected

Set Enforcer Lights to stay OFF when motion is detected

Set motion sensor sensitivity to Low. Detection range is up to 10ft/3m

Set motion sensor sensitivity to Medium. Detection range is up to 13ft/4m

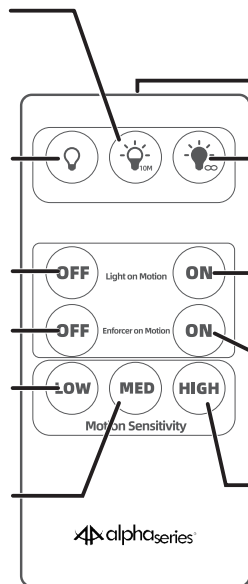

Infrared (IR) signal transmitter

Override sensor and manually turn LED Light ON for an indefinite amount of time until you press the Power OFF button

Set LED Light to automatically turn ON when motion is detected. LED Light will turn off 20 seconds after no motion is detected

Set Enforcer Lights to automatically turn ON when motion is detected. Enforcer Lights will turn off 20 seconds after no motion is detected

Set motion sensor sensitivity to High. Detection range is up to 20ft/6m

Keeping the LED Light on continuously for prolonged periods of time will significantly shorten battery lifespan and reduce operating time.

BATTERY INSTALLATION

Spotlight

The spotlight requires four D size batteries (not supplied). For reliable, long-lasting performance, use only high quality alkaline batteries. To install batteries (see **Figure 1**):

1. Unscrew the battery compartment cover on the rear of the spotlight with a small Phillips screwdriver and lift it off.
2. Insert batteries according to the polarity markings (+ and -) indicated inside the battery compartment.
3. Replace the battery compartment cover and screw it back into place with the previously removed screws.

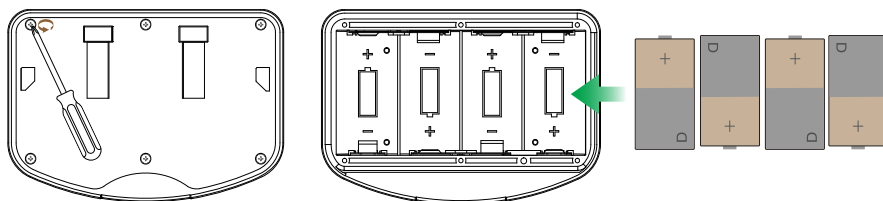


Figure 1

Remote Control



WARNING! This product contains a button/coin cell battery. If the button/coin cell battery is swallowed, it can cause internal chemical burns in as little as two hours and lead to death. Dispose of used batteries immediately. Keep new and used batteries away from children. If the battery compartment does not close securely, stop using the product. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

Australia: If you think batteries might have been swallowed or placed inside any part of the body, immediately call the 24-hour Poisons Information Centre on 13 11 26 for fast, expert advice and go straight to the nearest hospital emergency room.

The remote control is powered by a CR2025 battery which comes pre-installed.

- To activate the battery, simply pull the plastic film out from the bottom of the remote control.
- To replace the battery, remove the locking screw on the back of the remote control using a small Phillips screwdriver, then push the tab on the left of the battery tray towards the right and pull out the battery tray from the remote control (see **Figure 2**). Place a new "CR2025" battery on the tray with the positive (+) side facing up. Insert the tray back into the remote control and secure with the locking screw.

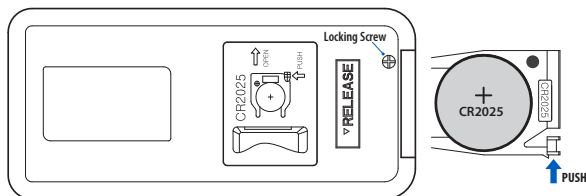


Figure 2


USING THE REMOTE CONTROL

- Point the remote control in the direction of the spotlight to operate it. Ensure the distance is within 5 meters/16 ft and there is no obstruction between the remote control and the spotlight.
- If you have more than one spotlight unit in the vicinity, the remote control should be pointed, as close as possible, to the spotlight you want to operate. This will prevent other spotlights from receiving unwanted IR signals. IR signals emitted by the remote control may interfere with the operation of other nearby electronic devices.
- When pressing any button on the remote control, the spotlight will flash the Red Enforcer LED light once to confirm it has received the command.
- If you set both "Light on Motion" and "Enforcer on Motion" to **OFF**, the spotlight will temporarily stop detecting motion for 1 hour. After 1 hour, the spotlight will revert to automatic mode (i.e., spotlight will activate when motion is detected). You can re-enable the motion sensor at any time by pressing the "Light on Motion" **ON** button.
- If you want the spotlight to activate only the red and blue Enforcer lights when motion is detected, perform the steps below in the following order:
 1. Press the "Light on Motion" **ON** button.
 2. Press the "Enforcer on Motion" **ON** button.
 3. Press the "Light on Motion" **OFF** button.

PAIRING WITH THE INDOOR ALARM RECEIVER

You can pair the spotlight with your existing Indoor Alarm Receiver to get sound alerts when motion is detected.

1. Turn the front cover of the spotlight counter-clockwise to the unlock position ▲ (see **Figure 1** on previous page) so it is no longer powered. Leave the batteries inside the battery compartment.
2. Decide which Sensor Channel (1, 2 or 3) you want to assign to the spotlight, then press and hold the desired **Sensor Channel Number** button on the side of the Indoor Alarm Receiver until the corresponding Sensor Channel LED indicator lights up and a beep is heard. The Indoor Alarm Receiver is now in pairing mode.
3. Within 25 seconds, power up the spotlight by turning the front cover clockwise to the lock position ▼ to secure the battery compartment (see **Figure 3** on previous page). The Sensor Channel melody sounds with the corresponding Sensor Channel LED indicator blinking on the Indoor Alarm Receiver to confirm successful pairing.
4. If pairing is not completed within 25 seconds, the Sensor Channel LED indicator goes off and the Indoor Alarm Receiver is no longer in pairing mode. Repeat steps above to pair the spotlight again.



TIP: For more information on operating the Indoor Alarm Receiver such as adjusting the volume, refer to the instruction manual that came with your alarm system.

MOUNTING THE SPOTLIGHT

- The spotlight can be deployed outdoors, for example near the entry to your driveway or garage, or mount it near a likely access point such as the front door/entrance to your home or business.
- For optimal coverage, mount the spotlight approximately 2 meters/6.5 ft above the ground, pointing slightly downwards at an angle where the most likely approach path of visitors and vehicles is across the front of the spotlight. Motion detection is less effective when movement is directly towards or away from the front of the spotlight (see **Figure 3**).
- You can adjust the detection range of the spotlight using the **Motion Sensitivity - Low/Med/High** buttons on the remote control. In general, the higher the Motion Sensitivity setting, the greater the possibility of false triggering. To reduce false triggering, choose a lower Motion Sensitivity setting.

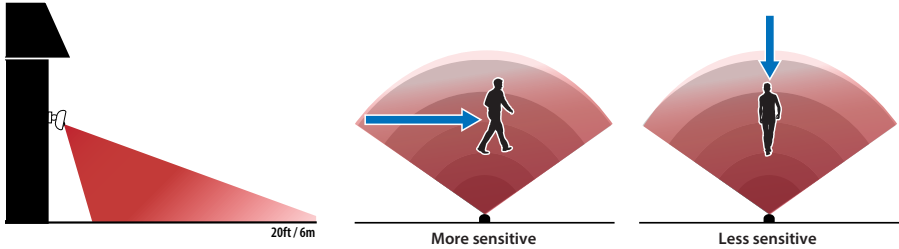


Figure 3

To mount the spotlight:

1. Attach the mounting plate to the mounting surface using the supplied screws (see **Figure 4**). If mounting on drywall/masonry, install wall anchors first.
2. Align the slots on the rear of the spotlight with the tabs on the mounting bracket then press and slide down into the bracket until it locks into place.
3. Adjust the angle and direction of the LED light panels as desired (see **Figure 5**).

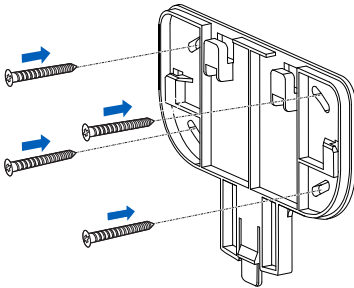


Figure 4

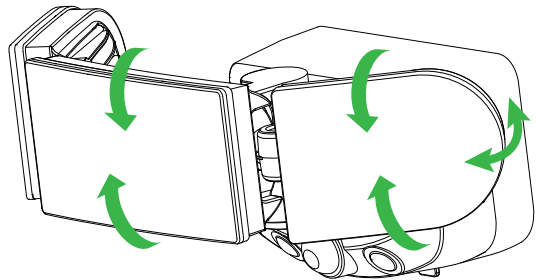


Figure 5

LIMITED WARRANTY TERMS & CONDITIONS

Swann Communications warrants this product against defects in workmanship and material for a period of one (1) year from its original purchase date. You must present your receipt as proof of date of purchase for warranty validation. Any unit which proves defective during the stated period will be repaired without charge for parts or labour or replaced at the sole discretion of Swann. The end user is responsible for all freight charges incurred to send the product to Swann's repair centres. The end user is responsible for all shipping costs incurred when shipping from and to any country other than the country of origin.

The warranty does not cover any incidental, accidental or consequential damages arising from the use of or the inability to use this product. Any costs associated with the fitting or removal of this product by a tradesman or other person or any other costs associated with its use are the responsibility of the end user. This warranty applies to the original purchaser of the product only and is not transferable to any third party. Unauthorized end user or third party modifications to any component or evidence of misuse or abuse of the device will render all warranties void.

By law some countries do not allow limitations on certain exclusions in this warranty. Where applicable by local laws, regulations and legal rights will take precedence.

Have Questions?

We are here to help! Visit us at <http://support.swann.com>. You can also email us at any time via: tech@swann.com

FCC Statement

This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Battery Safety Information

- Install only new batteries of the same type in your product.
- Failure to insert batteries in the correct polarity, as indicated in the battery compartment, may shorten the life of the batteries or cause batteries to leak.
- Do not mix old and new batteries.
- Do not mix alkaline, standard (Carbon-Zinc), rechargeable (Nickel Cadmium/Nickel Metal Hydride) or lithium batteries.
- Batteries should be recycled or disposed of as per state and local guidelines.

Declaración de la FCC

Este equipo se puso a prueba y se determinó que cumple con los límites de dispositivos digitales de Clase B, de conformidad con la Parte 15 de las Normas de la FCC. Estos límites están diseñados para proporcionar una protección razonable contra la interferencia dañina en las instalaciones residenciales. Este equipo genera, utiliza y puede irradiar energía de radiofrecuencia y, en caso de no instalarse correctamente o de no usarse de acuerdo con las instrucciones, podría causar interferencias dañinas en las radiocomunicaciones. No obstante, no se garantiza que no vayan a existir interferencias en una instalación particular. Si el equipo causara una interferencia dañina para la recepción de radio o televisión, que podrá determinarse mediante el apagado y encendido del equipo, se le recomienda al usuario intentar corregir la interferencia con una o más de las siguientes medidas:

- Reorientar o ubicar en otro lado la antena receptora.
- Aumentar la separación entre el equipo y el receptor.
- Conectar el equipo a un tomacorriente de un circuito distinto al que está conectado el receptor.
- Consultar al distribuidor o a un técnico experimentado en radio/televisión para obtener asistencia.

Información de seguridad de la batería

- Instale solo baterías nuevas del mismo tipo en su producto.
- No colocar las baterías en la polaridad correcta, como se indica en el compartimiento de baterías, puede acortar la vida de las baterías o producir filtraciones.
- No mezcle baterías nuevas con usadas.
- No mezcle baterías alcalinas, estándares (carbono-cinc), recargables (níquel-cadmio/hidruro de níquel metal) o baterías de litio.
- Las baterías se deben reciclar o desechar según las directrices estatales y locales.



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

This device complies with Industry Canada licence-exempt RSS standard(S). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR. d'industrie Canada applicables aux appareils radioexempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.