

**Annex acc. to FCC Title 47 CFR Part 15
relating to
s.m.s, smart microwave sensors GmbH
UMRR-12 Type 48 B**

Annex no. 5 User Manual Functional Description

**Title 47 - Telecommunication
Part 15 - Radio Frequency Devices
Subpart C – Intentional Radiators
Measurement Procedure:
ANSI C63.4-2014
ANSI C63.10-2013**



Deutsche
Akkreditierungsstelle
D-PL-12053-01-03

User manual/ Functional description of the test equipment (EUT)

USER MANUAL UMRR-12 TYPE 48

PROJECT TITLE:

USER MANUAL UMRR-12 TYPE 48

PROJECT NO.:

...

KEYWORD(S):

UMRR-12 TYPE 48 RADAR SENSOR

DATE:

02 AUGUST, 2023

STATUS:

IN PROGRESS

s.m.s, smart microwave sensors GmbH
In den Waashainen 1
38108 Braunschweig
Germany

Phone: +49 531 39023-0
Fax: +49 531 39023-599
info@smartmicro.de
www.smartmicro.com

1 CONTENT

- 1 Content2
- 2 Abbreviations3
- 3 Introduction.....4
- 4 General description.....5
 - 4.1 Sensor description5
 - 4.2 Transmit Signal.....5
 - 4.3 General Performance Data6
 - 4.4 Software and Firmware Version8
- 5 Hardware9
 - 5.1 UMRR sensor9
 - 5.2 Sensor Dimensions11
- 6 Cables and Connectors14
 - 6.1 Sensor connector.....14
 - 6.2 CAN data interface.....15
 - 6.3 CAN-Settings15
 - 6.4 RS485 data interface.....16
- 7 Designated Use17
- 8 Compliance18
 - 8.1 Declaration of Compliance for USA / FCC18
 - 8.2 FCC-Label20
 - 8.3 Compliance Statement for Canada / ISED20
 - 8.3.1 Declaration of Compliance in English20
 - 8.3.2 Déclaration de conformité en francais21
 - 8.3.3 Industry Canada (IC) Label21
- 9 Legal Disclaimer Notice22

2 ABBREVIATIONS

ADC	Analog-to-Digital Converter
AFE	Analog Front-End
CAN	Controller Area Network
DSP	Digital Signal Processing; Digital Signal Processor
EEPROM	Electrically Erasable Programmable Read-only Memory
FMCW	Frequency Modulated Continuous Wave
GPIO	General Purpose Input Output
MMIC	Monolithic Microwave Integrated Circuit
RAM	Random Access Memory
RS485	Physical communication layer standard EIA RS-485
SPI	Serial Peripheral Interface
SOC	System on Chip
UMRR	Universal Medium-Range Radar

3 INTRODUCTION

This document is a short documentation of the general purpose universal medium range radar (UMRR) UMRR-12 Type 48 radar sensor with type 48 antenna.

4 GENERAL DESCRIPTION

4.1 SENSOR DESCRIPTION

The main task of the UMRR is the detection of any reflectors in the field of view, to measure the distance, the relative speed and the angle to the shortest reflector (and to other reflectors), to detect motion and to track (filter) the results over time.

For this general purpose measurement application, range and relative radial speed and the angle value of each reflector inside the antenna beam are measured and the results are reported via the communication links cycle by cycle.

4.2 TRANSMIT SIGNAL

The UMRR transmit frequency is in the 24 GHz ISM band (24000 MHz to 24250 MHz) and the used bandwidth is less than 250MHz. The maximum transmit power is 12.7dBm.

Antenna type 48 consists of 2 TX antennas with same antenna characteristics but different center position on the board and 8 uniform RX antennas. The TX antenna have a 3dB antenna beam width of $\pm 34^\circ$ in azimuth and $\pm 6,5^\circ$ in elevation. The 8 RX antennas have a 3dB antenna beam width of $\pm 25^\circ$ in azimuth and $\pm 7^\circ$ in elevation. Highest TX antenna sidelobe: $@+74^\circ$, highest RX sidelobe at $\pm 50^\circ$.

Note: max. Gain for TX antenna at azimuth angle $\pm 22^\circ$, elevation angle 0° . The RX antennas have max. gain at boresight.

Gain RX: 11.1 dBi.

The device uses different FMCW transmit signal waveforms for distance and speed measurement.

4.3 GENERAL PERFORMANCE DATA

After power up or reset, the sensor readings are within specified performance within 60 seconds.

At the first starting stage within 35 seconds, another waveform will be initialized before it switches to Waveform 6.

Table 4-1: General performance data

Environmental		
Ambient Temperature	-40 ... +80	degree C
Shock	100	g _{rms}
Vibration	14	g _{rms}
IP	67 ^I	
Pressure / Transport altitude	0...10.000	m
Mechanical		
Weight	1290	g
Dimensions	See 5.2	
Housing Identification	07	
Antenna Identification	30	
DSP Board Identification	12	
General		
Power Supply	7 ... 32 ^{II} g ^{III}	V DC W
Frequency Band	24.05...24.25	GHz
Bandwidth	< 250	MHz
Max. Transmit Power (EIRP)	12.7	dBm
Interfaces	CAN V2.0b RS485 full duplex 10/100 Ethernet	
Connector	12 Pin plug Hirose LF10WBRB-12PD	CAN, Power, RS485, Eth.

^I IP 67 only when connector or cap attached.

^{II} measured at connector, min. voltage slew rate 500V/s or max. voltage rise time 15ms; supply source impedance 0.50hms.

^{III} Typical value 9W @20°C, may slightly increase over temperature.

4.4 SOFTWARE AND FIRMWARE VERSION

The software in UMRR-12 Type 48 radar processor has Version 6.

5 HARDWARE

5.1 UMRR SENSOR

An example picture of a UMRR (universal medium-range radar) sensor (housing type 070707) is shown in the figures below.



Figure 1: Housing type 070707 of UMRR-12 Type 48 front



Figure 2: Housing type 070707 of UMRR-12 Type 48 rear

5.2 SENSOR DIMENSIONS

All values given in mm.

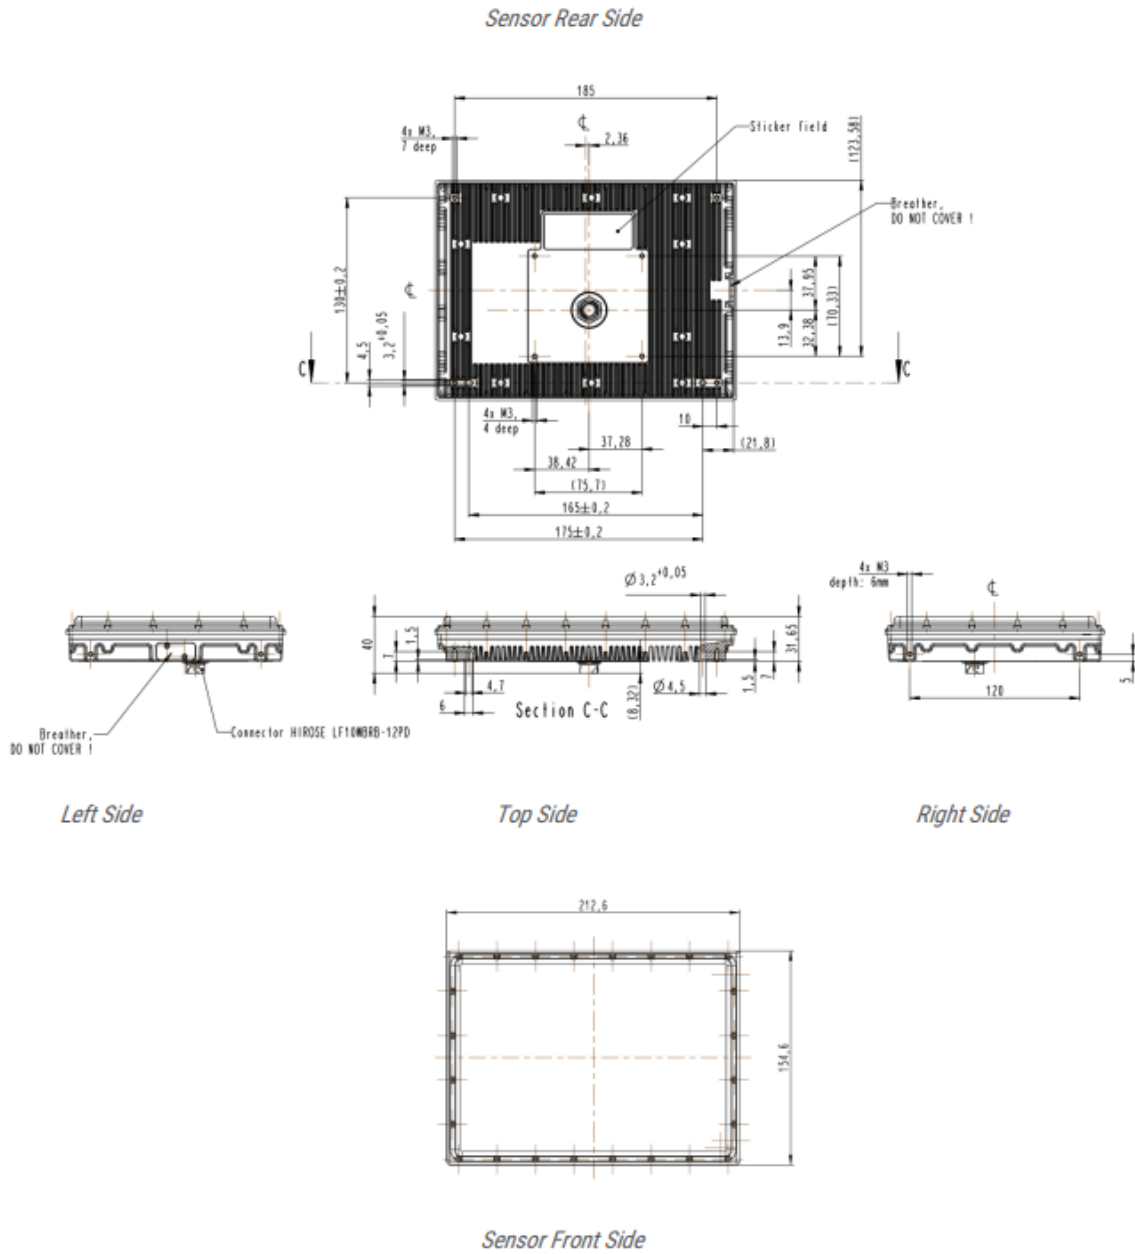


Figure 3: UMRR-12 Type 48 Housing 070707 dimensions (top view front)

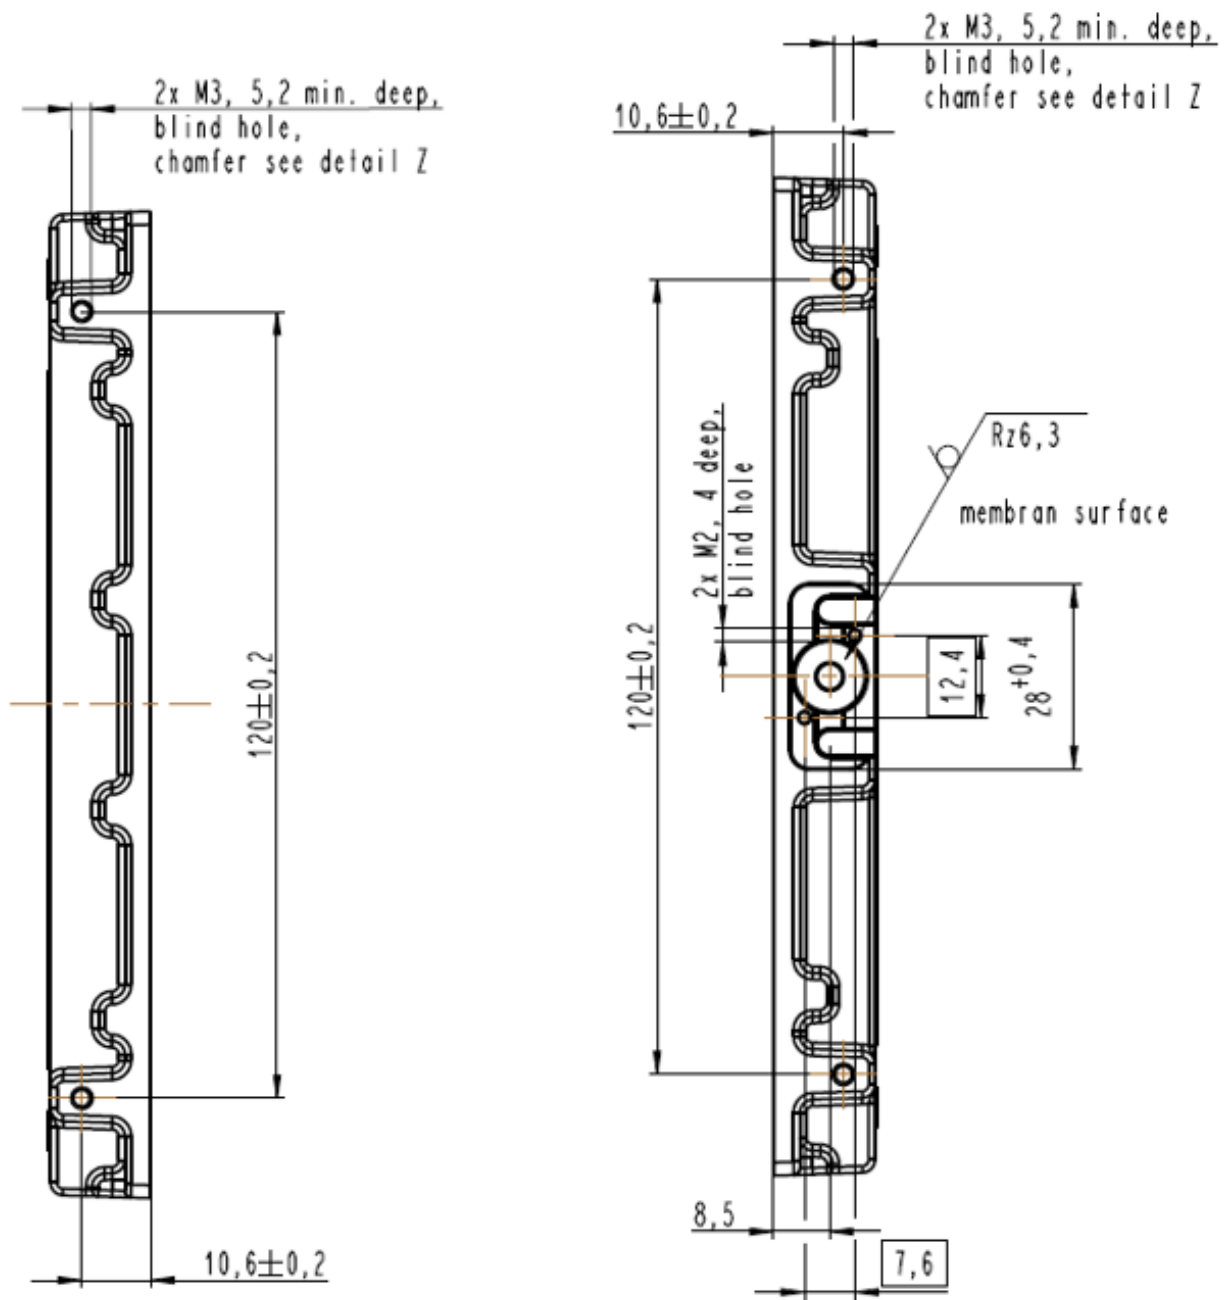


Figure 4: Housing 070707 from the left side (left picture) and from the right side (right picture)

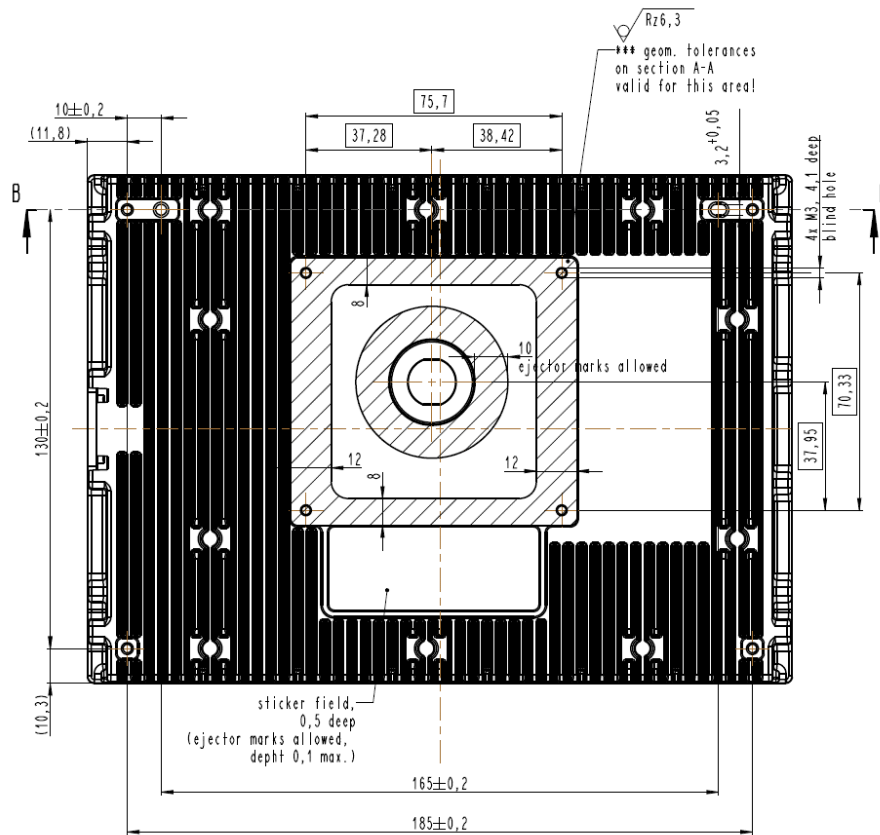


Figure 5: UMRR-12 Type 48 Housing 070707 dimensions (top view back)

6 CABLES AND CONNECTORS

6.1 SENSOR CONNECTOR

The sensor connector is a 12-pin male (plug) circular bayonet type connector (water proof IP67, series LF10WBRB-12PD, manufacturer Hirose, Japan). A female counterpart (socket), e.g. LF10WBP-12S, is used to connect to the sensor. The pin numbering of the socket is shown in Figure 6 the pin description is given in Table 6-1.

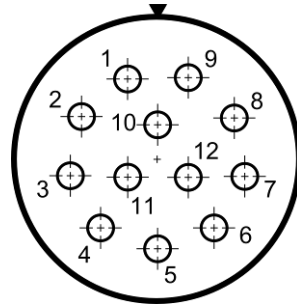


Figure 6: View on solder cup side of socket (rear view of female counterpart to be connected to sensor)

Table 6-1: Sensor connector pin out model UMRR-12

Pin No.	Function	Wire Color (MEDI type #KU110C12J002)
1	SENSOR_ETH_TX1_P	gray / red
2	SENSOR_ETH_TX1_N	red / blue
3	SENSOR_RS485_RX_N	pink
4	SENSOR_RS485_RX_P	gray
5	SENSOR_RS485_TX_N	brown
6	SENSOR_RS485_TX_P	white
7	External GND	blue
8	V_SUPPLY	red
9	SENSOR_ETH_TX2_N	black
10	SENSOR_ETH_TX2_P	purple
11	CAN_H	green
12	CAN_L	yellow

Please note that in the standard configuration the sensor has 120 Ohms resistor on board (CAN bus termination between CAN_L and CAN_H).

For the RS485 data interface there is a 120 Ohms resistor on board of the sensor.

A number of cable sets for initial operation and test purposes are offered by Smartmicro, to deliver a fast set-up of a sensor system. Among those preconfigured ready-to-run cables as well as cable stumps (pig tail cables or various lengths) which carry the connector on one side and open wires on the other.

6.2 CAN DATA INTERFACE

This specification gives a detailed description of the CAN data communication used in the UMRR based systems on the sensor CAN. The UMRR is compliant with CAN 2.0B standard.

CAN is a very robust full duplex bidirectional interface.

6.3 CAN-SETTINGS

Baud Rate:	500 kBit/s or lower	
T _{seg1} :	8	
T _{seg2} :	7	
T _{sjw} :	2	(SJW: synchronization jump width)

Above values for CAN bit timing are illustrated in Figure 7 used in the UMRR radar sensor (note: the CAN module is integrated in the DSP). For comparison purposes, in Figure 8 the CAN bit timing as defined by the CAN protocol is shown.

The CAN bit timing parts as defined by the CAN protocol (Figure 8) can be described as follows:

- **Sync:** This part of bit time is used to synchronize the various nodes on the bus. An edge is expected to lie within this segment. For the UMRR sensor, this segment is always 1 TIME QUANTUM (TQ).
- **Prop:** This part of the bit time is used to compensate for the physical delay times within the network. It is twice the sum of the signal’s propagation time on the bus line, the input comparator delay, and the output driver delay. For the UMRR sensor, this segment is programmable from 1 to 8 TIME QUANTA (TQ).
- **Phase 1:** This phase is used to compensate for positive edge phase error. For the UMRR sensor, this segment is programmable from 1 to 8 TIME QUANTA (TQ) and can be lengthened by resynchronization.

- Phase 2:** This phase is used to compensate for negative edge phase error. For the UMRR sensor, this segment is programmable from 2 to 8 TIME QUANTA (TQ) and can be shortened by resynchronization.

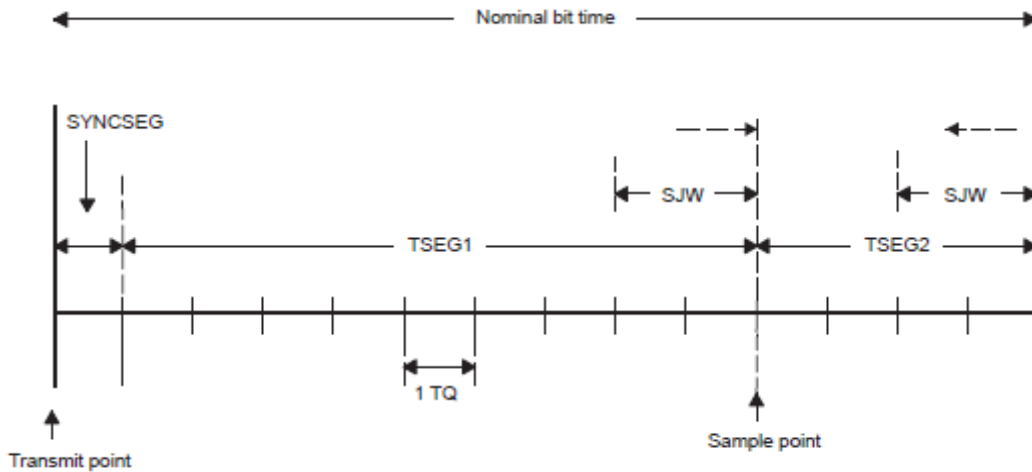


Figure 7: CAN bit timing for UMRR sensor

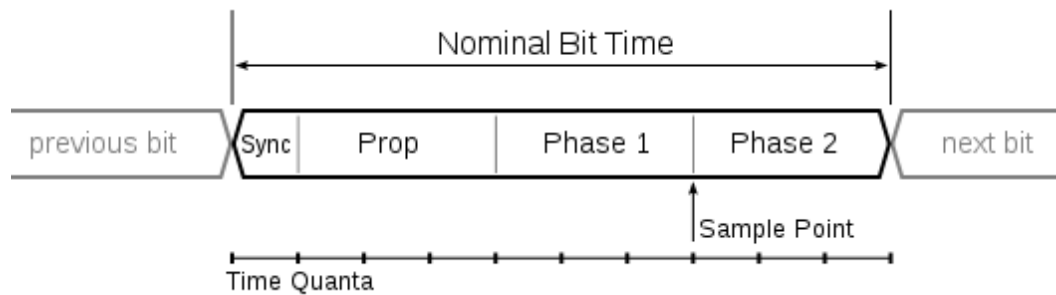


Figure 8: CAN bit timing as defined by the CAN protocol

6.4 RS485 DATA INTERFACE

The RS485 interface from the UMRR sensor has a predefined speed of 115200 baud/s. Typical other data rates are between 921.6kBit/s and 56.7kBit/s.

The RS485 message payload is identical to the CAN format.

7 DESIGNATED USE

The UMRR general purpose medium range radar is suitable for any application where the distance to and relative radial speed of large objects has to be measured.

Typical applications are:

Robotics: measure shortest distance to obstacle.

Security: detect motions and measure distance to moving object.

Traffic management: detect moving objects, count those, measure speed and measure distance to moving object.

Cranes: measure distance to ground.

Aircraft: measure distance to ground.

8 COMPLIANCE

8.1 DECLARATION OF COMPLIANCE FOR USA / FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Usually this is followed by the following FCC caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interferences to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with the FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with the minimum distance 20cm between the radiator & your body. The transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The device have been evaluated under FCC Bulletin OET 65C (01-01) and found to be compliant to the requirements as set forth in CFR 47 Sections, 2.1093 addressing RF exposure from radio frequency devices. The device meet the applicable government requirements for exposure to radio frequency waves

8.2 FCC-LABEL

An example of FCC-label is shown as following:

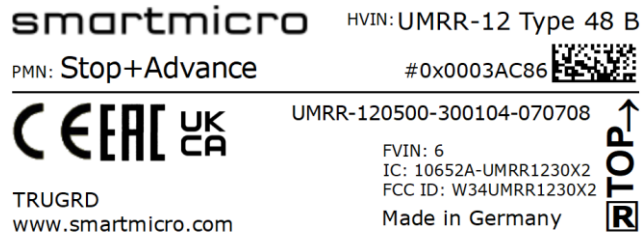


Figure 9: Sample of FCC Label

8.3 COMPLIANCE STATEMENT FOR CANADA / ISED

8.3.1 DECLARATION OF COMPLIANCE IN ENGLISH

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with the minimum distance 20cm between the radiator & your body.

8.3.2 DÉCLARATION DE CONFORMITÉ EN FRANCAIS

Le present appareil est conforme aux CNR d'Industrie Canada applicables aus appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisaeur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

DÉCLARATION D'EXPOSITION AUX RADIATIONS

Cet equipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cetéquipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

8.3.3 INDUSTRY CANADA (IC) LABEL

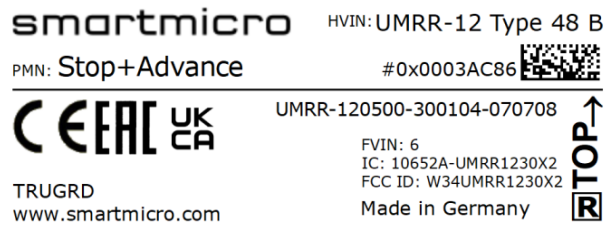


Figure 10: Sample of IC Label

9 LEGAL DISCLAIMER NOTICE

All products, product specifications and data in this document may be subject to change without notice to improve reliability, function or otherwise.

Not all products and/or product features may be available in all countries and regions. For legal reasons features may be deleted from products or smartmicro may refuse to offer products. Statements, technical information and recommendations contained herein are believed to be accurate as of the stated date. smartmicro disclaims any and all liability for any errors, inaccuracies or incompleteness contained in this document or in any other disclosure relating to the product.

To the extent permitted by applicable law, smartmicro disclaims (i) any and all liability arising out of the application or use of the product or the data contained herein, (ii) any and all liability of damages exceeding direct damages, including - without limitation - indirect, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of the suitability of the product for particular purposes.

Statements regarding the suitability of products for certain types of applications are based on smartmicro's knowledge of typical requirements that are often placed on smartmicro products in generic/general applications. Statements about the suitability of products for a particular/specific application, however, are not binding. It is the customer's/user's responsibility to validate that the product with the specifications described is suitable for use in the particular/specific application. Parameters and the performance of products may deviate from statements made herein due to particular/specific applications and/or surroundings. Therefore, it is important that the customer/user has thoroughly tested the products and has understood the performance and limitations of the products before installing them for final applications or before their commercialization. Although products are well optimized to be used for the intended applications stated, it must also be understood by the customer/user that the detection probability may not be 100% and that the false alarm rate may not be zero.

The information provided, relates only to the specifically designated product and may not be applicable when the product is used in combination with other materials or in any process not defined herein. All operating parameters, including typical parameters, must be validated for each application by the customer's/user's technical experts. Customers using or selling smartmicro products for use in an application which is not expressly indicated do so at their own risk.

This document does not expand or otherwise modify smartmicro's terms and conditions of purchase, including but not being limited to the warranty. Except as expressly indicated in writing by smartmicro, the products are not designed for use in medical, life-saving or life-sustaining applications or for any other application in which the failure of the product could result in personal injury or death.

No license, expressed or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of smartmicro. Product names and markings noted herein may be trademarks of their respective owners.

Please note that the application of the product may be subject to standards or other regulations that may vary from country to country. smartmicro does not guarantee that the use of products in the applications described herein will comply with such regulations in any country. It is the customer's/user's responsibility to ensure that the use and incorporation of products comply with regulatory requirements of their markets.

If any provision of this disclaimer is, or is found to be, void or unenforceable under applicable law, it will not affect the validity or enforceability of the other provisions of this disclaimer.