

### 32\_GSM850\_GPRS(4Tx slots)\_Back\_15mm\_Ch189


Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08  
 Medium: HSL\_835\_230514 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.903$  S/m;  $\epsilon_r = 40.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7577; ConvF(9.53, 9.53, 9.53); Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2022/6/30
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch189/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.742 W/kg

**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 28.93 V/m; Power Drift = -0.19 dB  
 Peak SAR (extrapolated) = 0.820 W/kg  
**SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.419 W/kg**  
 Maximum value of SAR (measured) = 0.743 W/kg

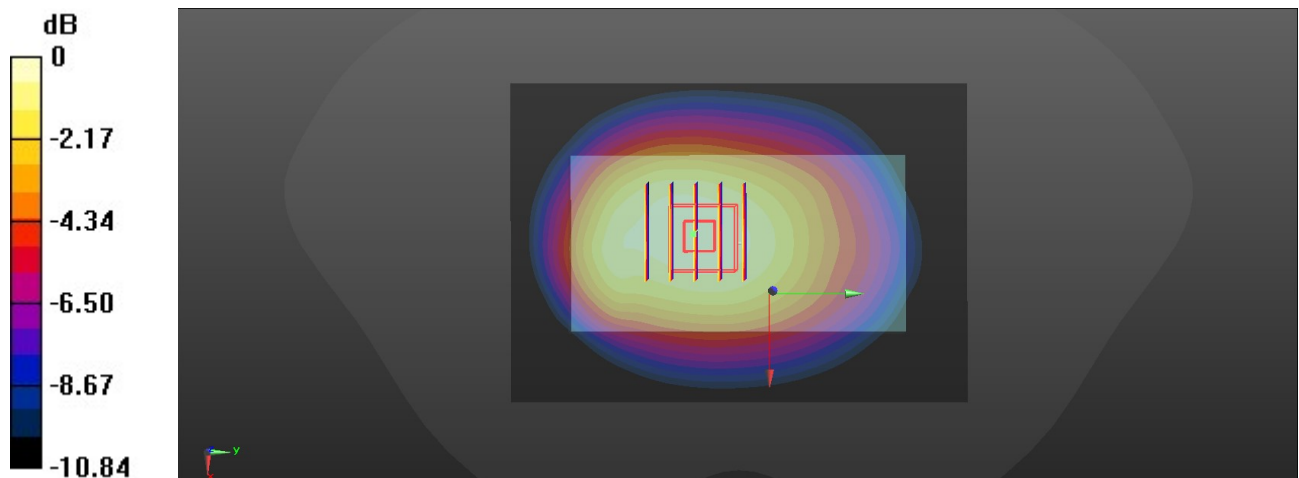

0 dB = 0.743 W/kg

### 33\_WCDMA V\_RMC 12.2Kbps\_Back\_15mm\_Ch4182

Communication System: UID 0, UMTS (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_230514 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.903$  S/m;  $\epsilon_r = 40.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.53, 9.53, 9.53); Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2022/6/30
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch4182/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.518 W/kg

**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 24.05 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 0.565 W/kg  
**SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.293 W/kg**  
 Maximum value of SAR (measured) = 0.513 W/kg

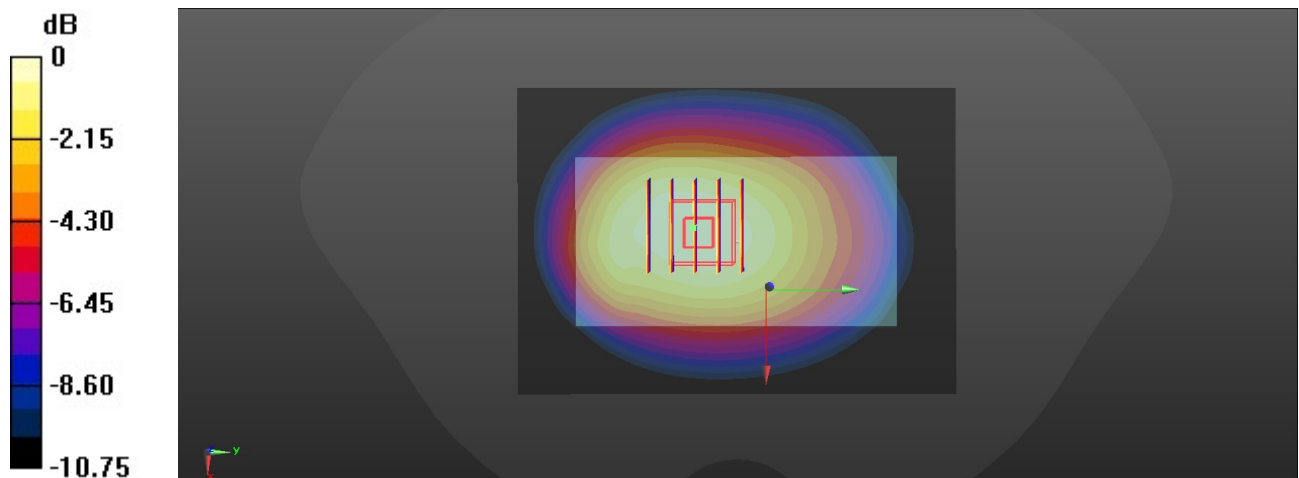

0 dB = 0.513 W/kg

### 34\_LTE Band 5\_10M\_QPSK\_1RB\_0Offset\_Back\_15mm\_Ch20525

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_230514 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.903$  S/m;  $\epsilon_r = 40.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.53, 9.53, 9.53); Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2022/6/30
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch20525/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.785 W/kg

**Ch20525/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 0.7040 V/m; Power Drift = 0.06 dB  
 Peak SAR (extrapolated) = 0.754 W/kg  
**SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.401 W/kg**  
 Maximum value of SAR (measured) = 0.687 W/kg

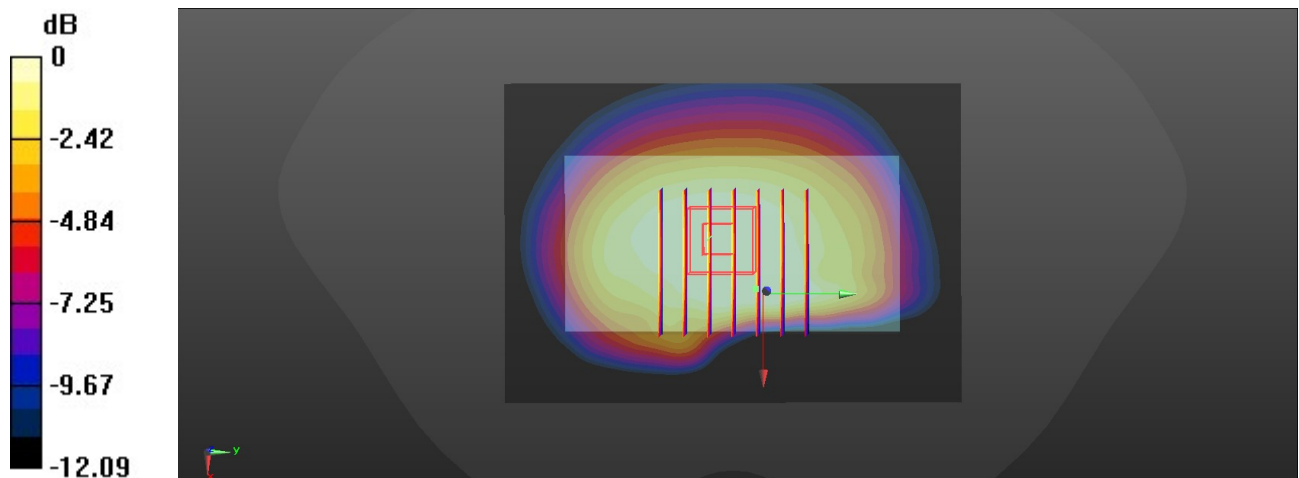

0 dB = 0.687 W/kg

### 35\_WCDMA IV\_RMC 12.2Kbps\_Back\_15mm\_Ch1413


Communication System: UID 0, UMTS (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1750\_230515 Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.386$  S/m;  $\epsilon_r = 41.592$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7577; ConvF(8.46, 8.46, 8.46); Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2022/6/30
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch1413/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.914 W/kg

**Ch1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 18.81 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 1.08 W/kg  
**SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.375 W/kg**  
 Maximum value of SAR (measured) = 0.908 W/kg

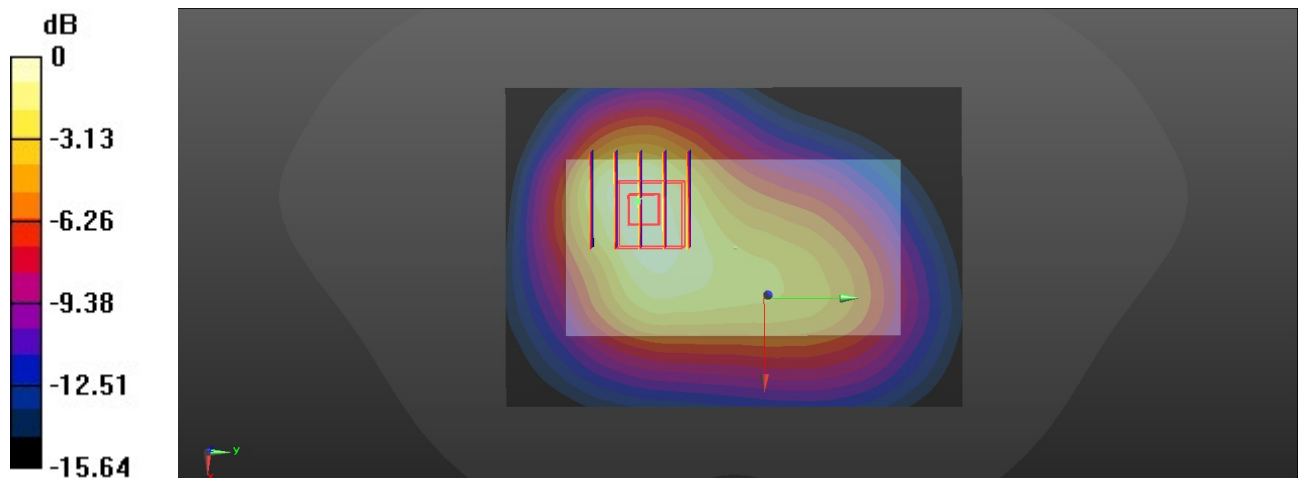

0 dB = 0.908 W/kg

### 36\_LTE Band 66\_20M\_QPSK\_50RB\_0Offset\_Back\_15mm\_Ch132322

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_230515 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.401$  S/m;  $\epsilon_r = 41.539$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.46, 8.46, 8.46); Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2022/6/30
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch132322/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.838 W/kg

**Ch132322/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 17.04 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 0.994 W/kg  
**SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.341 W/kg**  
 Maximum value of SAR (measured) = 0.822 W/kg

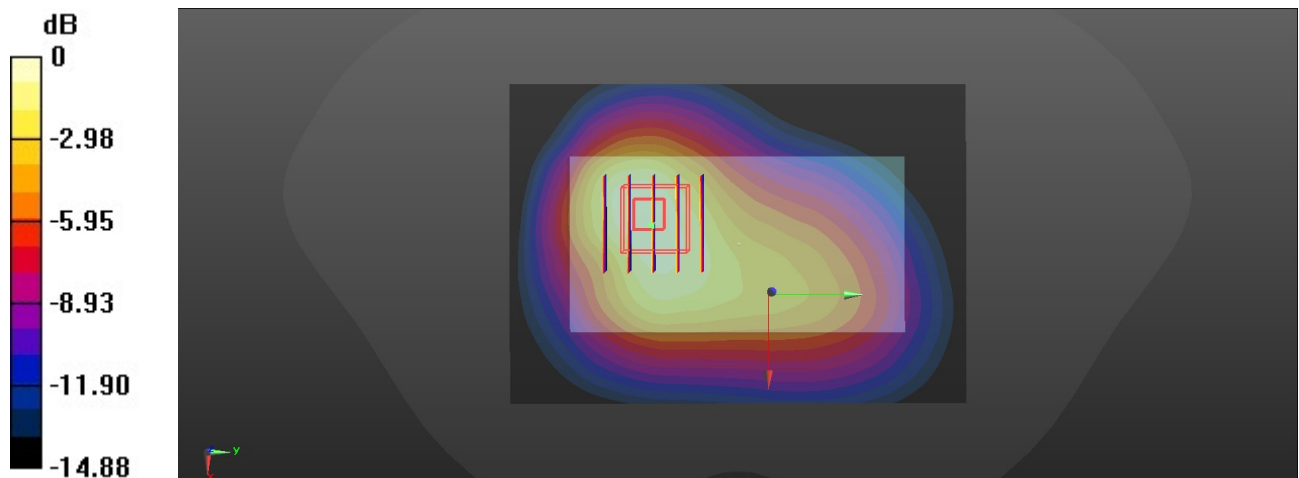

0 dB = 0.822 W/kg

### 37\_GSM1900\_GPRS(2Tx slots)\_Back\_15mm\_Ch661


Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15  
 Medium: HSL\_1900\_230516 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.425$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7577; ConvF(8.19, 8.19, 8.19); Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2022/6/30
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch661/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.818 W/kg

**Ch661/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 16.40 V/m; Power Drift = 0.13 dB  
 Peak SAR (extrapolated) = 1.01 W/kg  
**SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.330 W/kg**  
 Maximum value of SAR (measured) = 0.813 W/kg

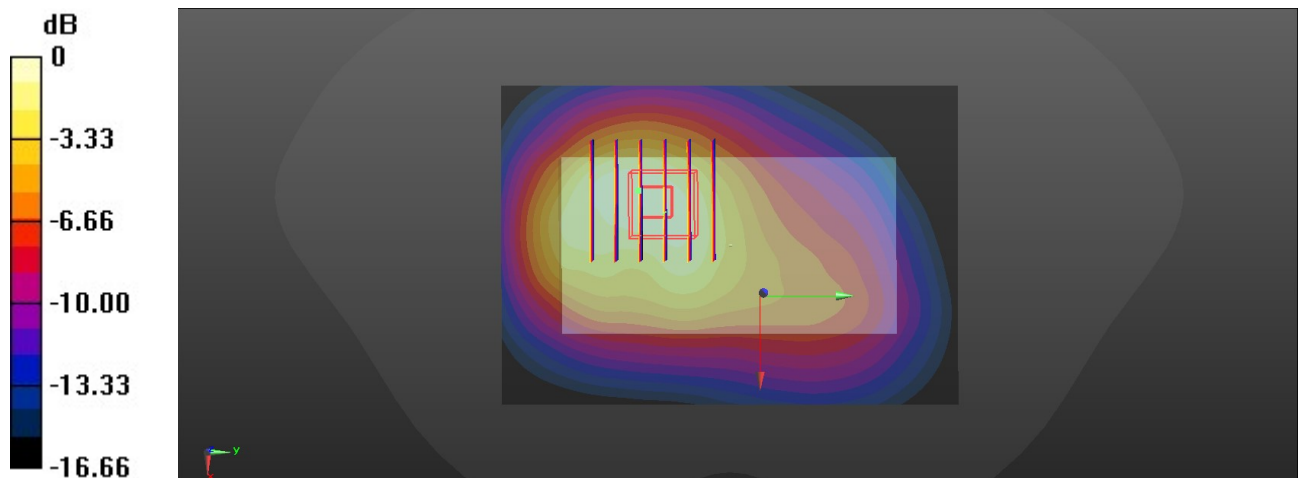

0 dB = 0.813 W/kg

### 38\_WCDMA II\_RMC 12.2Kbps\_Back\_15mm\_Ch9400

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_230516 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.425$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.19, 8.19, 8.19); Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2022/6/30
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch9400/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.09 W/kg

**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 19.77 V/m; Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 1.34 W/kg  
**SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.436 W/kg**  
 Maximum value of SAR (measured) = 1.11 W/kg

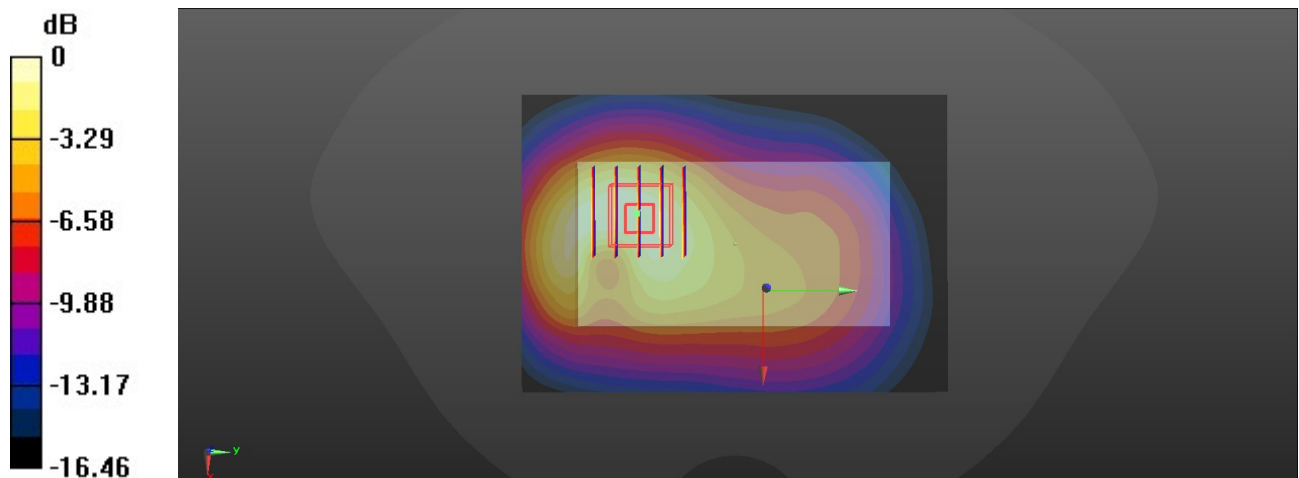

0 dB = 1.11 W/kg

### 39\_LTE Band 2\_20M\_QPSK\_50RB\_0Offset\_Back\_15mm\_Ch18900

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_230516 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.425$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.19, 8.19, 8.19); Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2022/6/30
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch18900/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg


**Ch18900/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.14 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.349 W/kg**

Maximum value of SAR (measured) = 0.879 W/kg

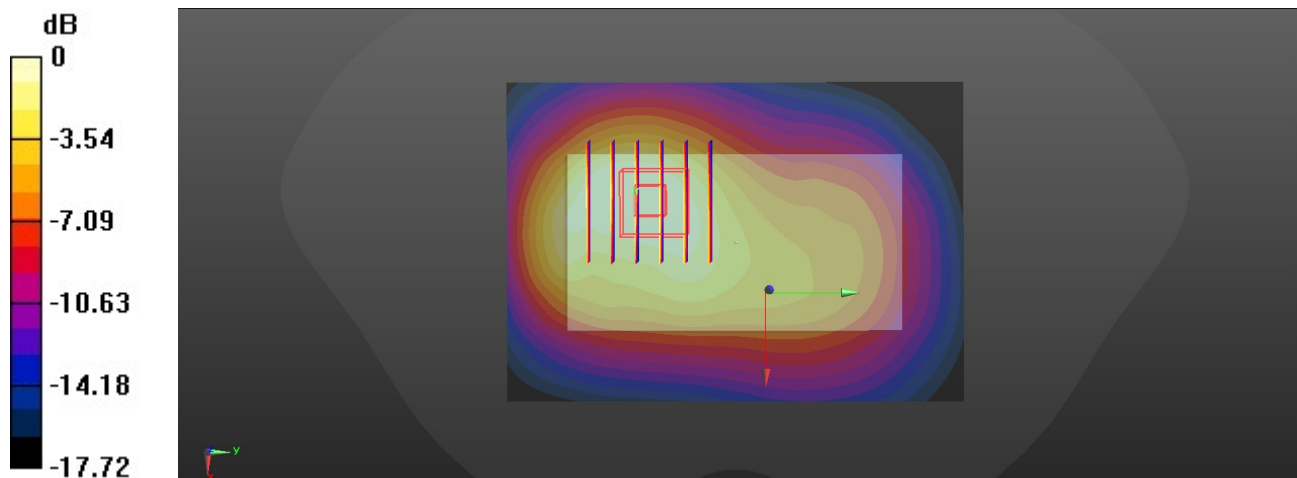

0 dB = 0.879 W/kg



### 40\_LTE Band 30\_10M\_QPSK\_25RB\_0Offset\_Back\_15mm\_Ch27710

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: HSL\_2300\_230514 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.736$  S/m;  $\epsilon_r = 38.11$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3191; ConvF(5.01, 4.58, 4.9); Calibrated: 2023/2/17
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2022/6/6
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch27710/Area Scan (71x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.671 W/kg


**Ch27710/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.94 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.757 W/kg

**SAR(1 g) = 0.469 W/kg; SAR(10 g) = 0.282 W/kg**

Maximum value of SAR (measured) = 0.655 W/kg

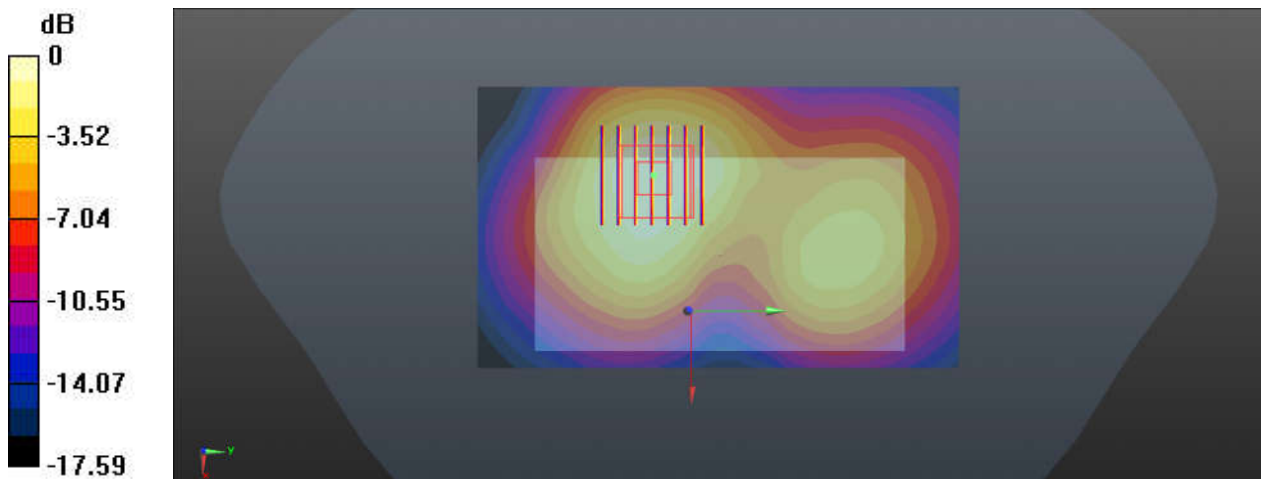

0 dB = 0.671 W/kg

### 41\_Bluetooth\_DH5 1Mbps\_Back\_15mm\_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3  
Medium: HSL\_2450\_230515 Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.843 \text{ S/m}$ ;  $\epsilon_r = 38.48$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.88, 7.88, 7.88); Calibrated: 2022/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2023/3/23
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch39/Area Scan (81x111x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0152 W/kg


**Ch39/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.114 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0170 W/kg

**SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00709 W/kg**

Maximum value of SAR (measured) = 0.0154 W/kg

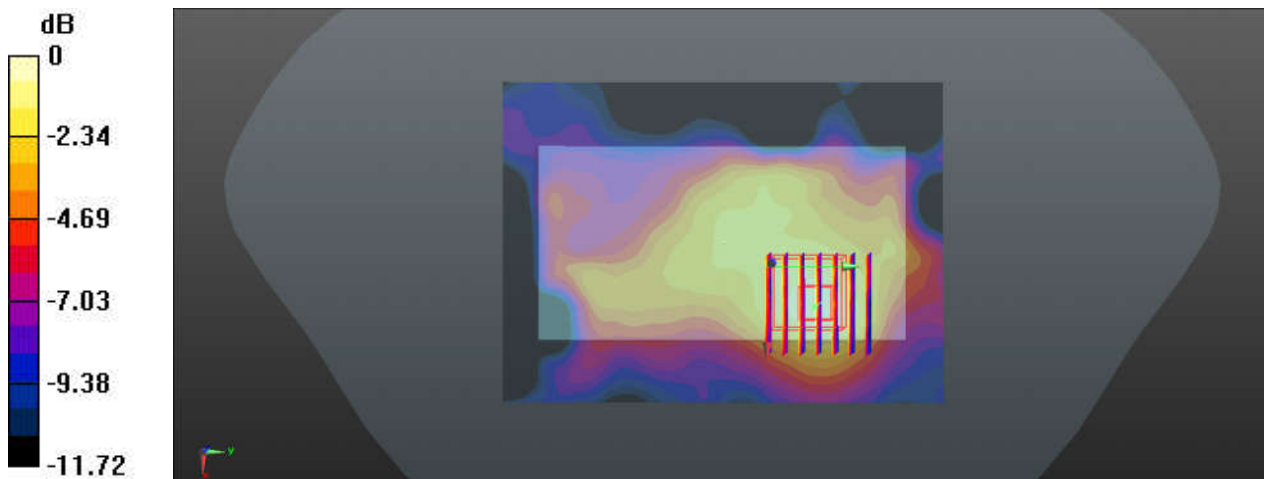

0 dB = 0.0154 W/kg

### 42\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_15mm\_Ch6

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_230515 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.839$  S/m;  $\epsilon_r = 38.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.88, 7.88, 7.88); Calibrated: 2022/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2023/3/23
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch6/Area Scan (81x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.415 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.68 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.494 W/kg

**SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.187 W/kg**

Maximum value of SAR (measured) = 0.426 W/kg

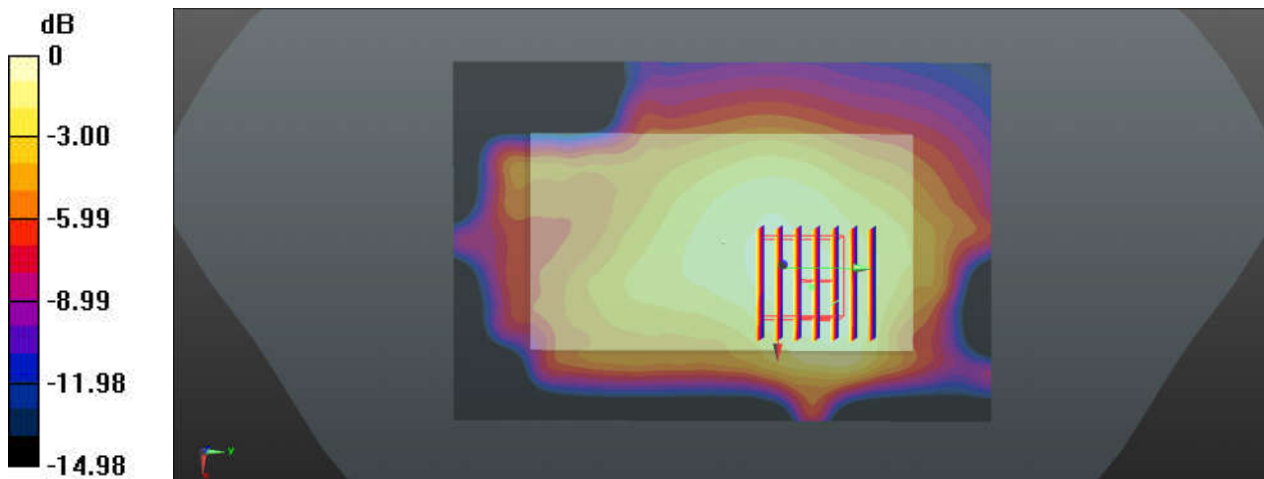

### 43\_WCDMA IV\_RMC 12.2Kbps\_Back\_0mm\_Ch1413

Communication System: UID 0, UMTS (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_230515 Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.366$  S/m;  $\epsilon_r = 40.176$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.46, 8.46, 8.46); Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2022/6/30
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch1413/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 9.69 W/kg


**Ch1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.16 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 10.2 W/kg

**SAR(1 g) = 4.21 W/kg; SAR(10 g) = 1.96 W/kg**

Maximum value of SAR (measured) = 7.47 W/kg

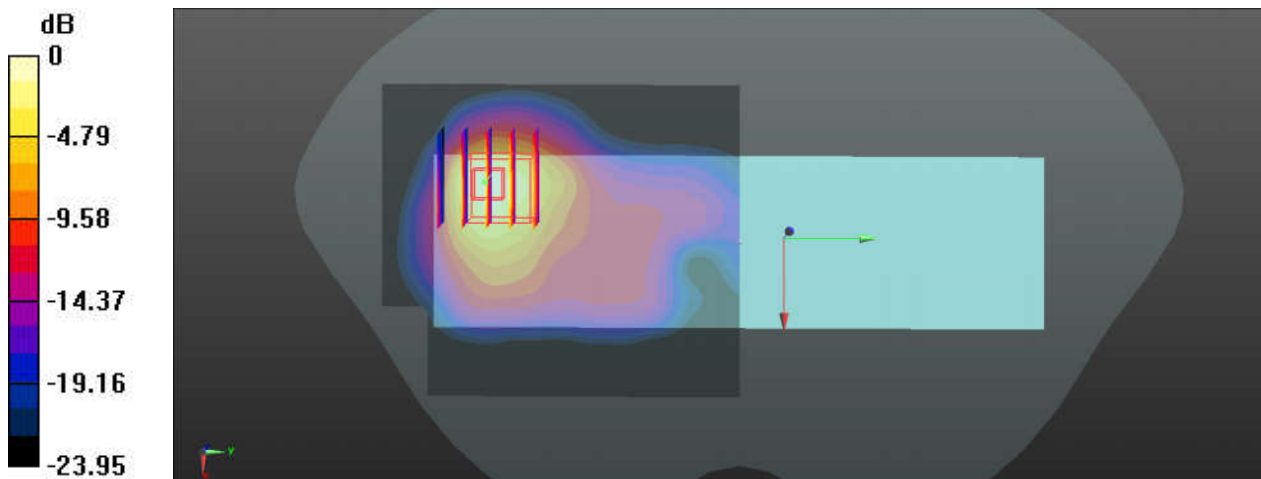

### 44\_GSM1900\_GPRS(2Tx slots)\_Back\_0mm\_Ch661

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15  
Medium: HSL\_1900\_230518 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.422$  S/m;  $\epsilon_r = 40.001$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.55, 8.55, 8.55); Calibrated: 2022/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2023/3/23
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch661/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 9.01 W/kg


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.505 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 9.61 W/kg

**SAR(1 g) = 4.11 W/kg; SAR(10 g) = 1.87 W/kg**

Maximum value of SAR (measured) = 6.67 W/kg

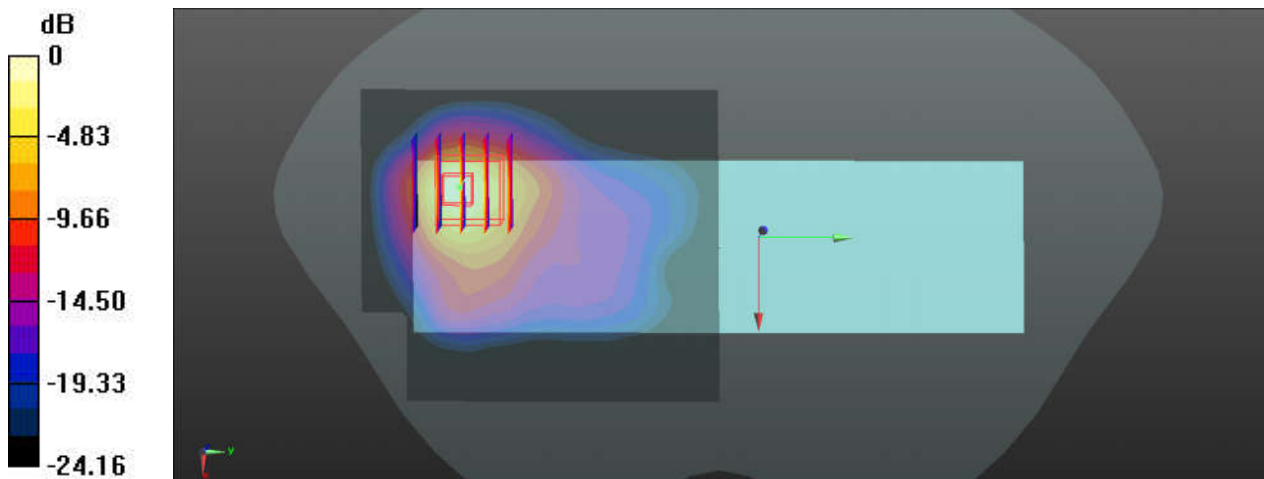

0 dB = 9.01 W/kg

### 45\_WCDMA II\_RMC 12.2Kbps\_Back\_0mm\_Ch9400

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_230518 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.422$  S/m;  $\epsilon_r = 40.001$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.55, 8.55, 8.55); Calibrated: 2022/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2023/3/23
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch9400/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.4 W/kg


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.26 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 13.3 W/kg

**SAR(1 g) = 5.66 W/kg; SAR(10 g) = 2.53 W/kg**

Maximum value of SAR (measured) = 10.1 W/kg

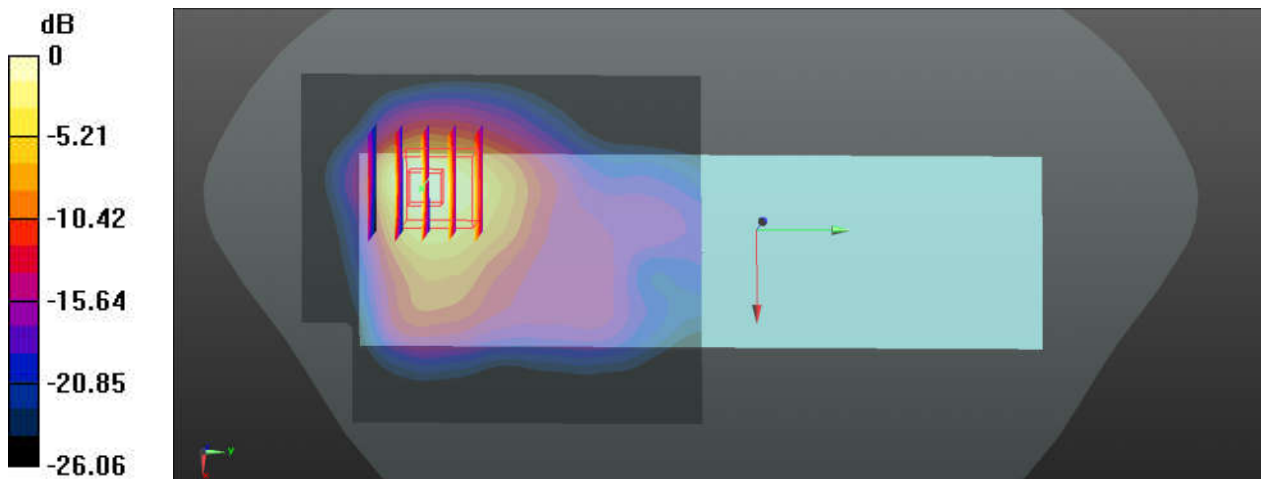

0 dB = 10.1 W/kg

### 46\_LTE Band 2\_20M\_QPSK\_1RB\_0Offset\_Back\_0mm\_Ch18900

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_230518 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.422$  S/m;  $\epsilon_r = 40.001$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.55, 8.55, 8.55); Calibrated: 2022/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2023/3/23
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch18900/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 11.5 W/kg


**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.52 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 12.4 W/kg

**SAR(1 g) = 5.36 W/kg; SAR(10 g) = 2.4 W/kg**

Maximum value of SAR (measured) = 9.45 W/kg

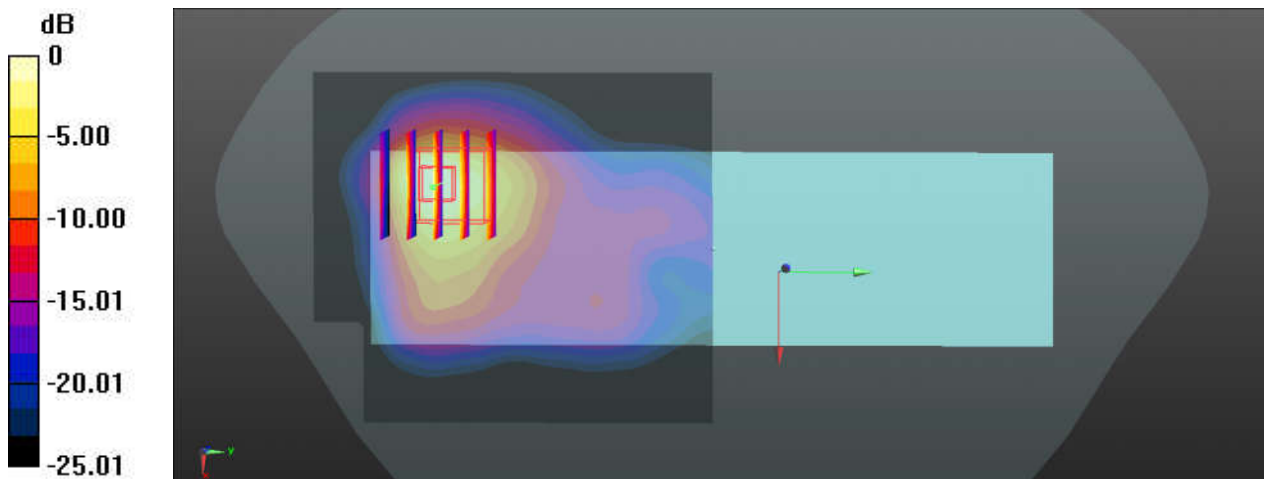

### 47\_LTE Band 30\_10M\_QPSK\_1RB\_0Offset\_Back\_0mm\_Ch27710

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: HSL\_2300\_230514 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.722$  S/m;  $\epsilon_r = 37.862$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3191; ConvF(5.01, 4.58, 4.9); Calibrated: 2023/2/17
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2022/6/6
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch27710/Area Scan (81x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.97 W/kg


**Ch27710/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.693 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 10.4 W/kg

**SAR(1 g) = 4.12 W/kg; SAR(10 g) = 1.85 W/kg**

Maximum value of SAR (measured) = 7.53 W/kg

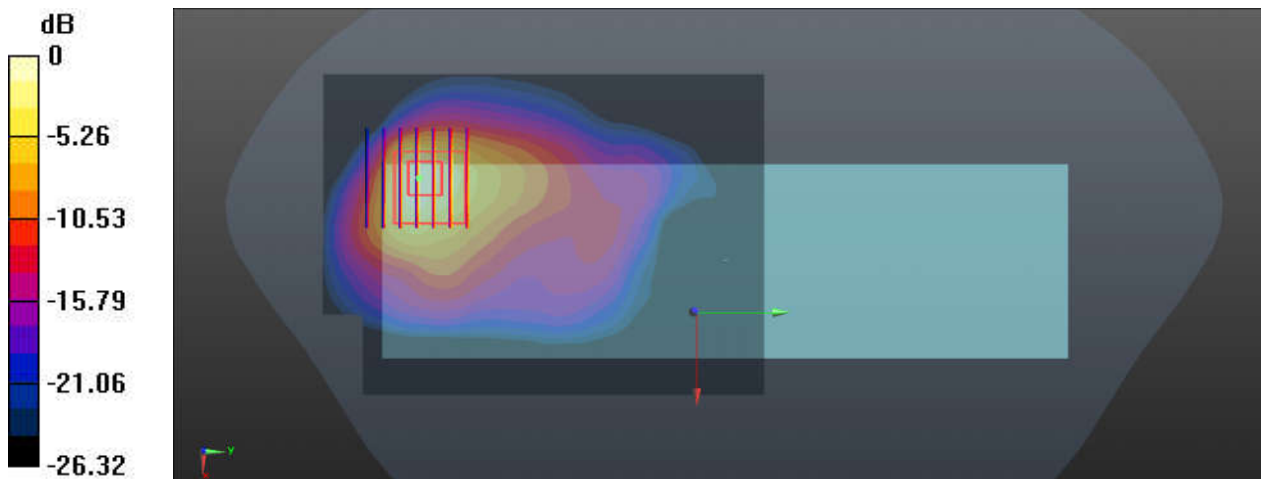

0 dB = 8.97 W/kg