



Exhibit 10: Measurements
Demonstrating Conformance to
97.307 and 97.317

**External Radio Frequency
Power Amplifier ACOM 1011**

Model 1011

Array Solutions
2611 North Beltline Rd
Suite 109
Sunnyvale, Texas 75182
USA
Tel: 214 954 7140
fax: 214 954 7142
E-mail: info@arraysolutions.com

Power Gain per 97.317-(a) (1) (2) (3), (c) (6) (ii)				Spurious emissions per 97.307 (e)			
Frequency f ₁ , MHz	Input Power, W	Output Power, W	Amplifier Gain, dB	2f ₁ , dBc	3f ₁ , dBc	4f ₁ , dBc	5-10f ₁ , dBc worst case
1.900	55.6	700	11.0	-53.1	-78.2	-83.8	-71.0
3.750	65.3	700	10.3	-52.8	-98.0	-88.6	-92.3
7.150	69.5	700	10.0	-57.6	-98.1	-97.4	-93.8
10.125	65.3	700	10.3	-53.7	-95.5	-67.3	-95.0
14.175	62.4	700	10.5	-57.8	-96.3	-88.8	-85.1
18.100	63.8	700	10.4	-53.2	-78.1	-78.5	-75.3
21.225	61.0	700	10.6	-62.0	-90.2	-84.5	-77.0
Amplifier was not capable of operation on any frequency or frequencies between 24 and 35MHz as measured at the points below per 97.317-(b) (1) (2). Data for: amplifier in Stand-by / amplifier ON.							
24.000	50	49.2 / 166	-0.07 / 5.21				
26.000	50	48.3 / 47.5	-0.15 / -0.22				
27.120	50	48.3 / 35.1	-0.15 / -1.54				
28.000	50	48.3 / 28.3	-0.15 / -2.47				
35.000	50	48.0 / 1.24	-0.18 / -16.1				
Amplifier was not capable of full power output and the gain is less than 11.3dB when driven with less than 50 watts per 97.317-(c)(6) (i)(iii).							
1.900	30	414	11.4				
3.750	30	369	10.9				
7.150	30	321	10.3				
10.125	30	361	10.8				
14.175	30	361	10.8				
18.100	30	361	10.8				
21.225	30	378	11.0				
24.930*	30	367	10.5				
28.500*	30	369	10.9				
After owner modification to activate 24-28 MHz bands:							

24.930*	73.7	700	9.8	-72.8	-81.6	-80.3	-60.9
28.500*	59.7	700	10.7	-67.0	-82.6	-82.0	-70.4

*Not usable as shipped; data applicable only after enabling of 24.5 & 28 MHz bands as follows.

When delivered to any buyer located within the FCC's jurisdiction, the equipment is operable on authorized amateur bands only from 1.8 through 21.45 MHz. To meet the requirements of 97.317(b), the equipment employs an internal mechanical lock-out system. It ensures that the top frequency band (namely 24-28 MHz) cannot be selected. This is achieved by mechanical means. A solid steel lug prevents the band switch from being fixed on the top band position. As seen on the photo below (Figure 1), moving the band switch axis clockwise is limited to the steel lug. It is pointed with an yellow arrow on this photo only but not in the construction.

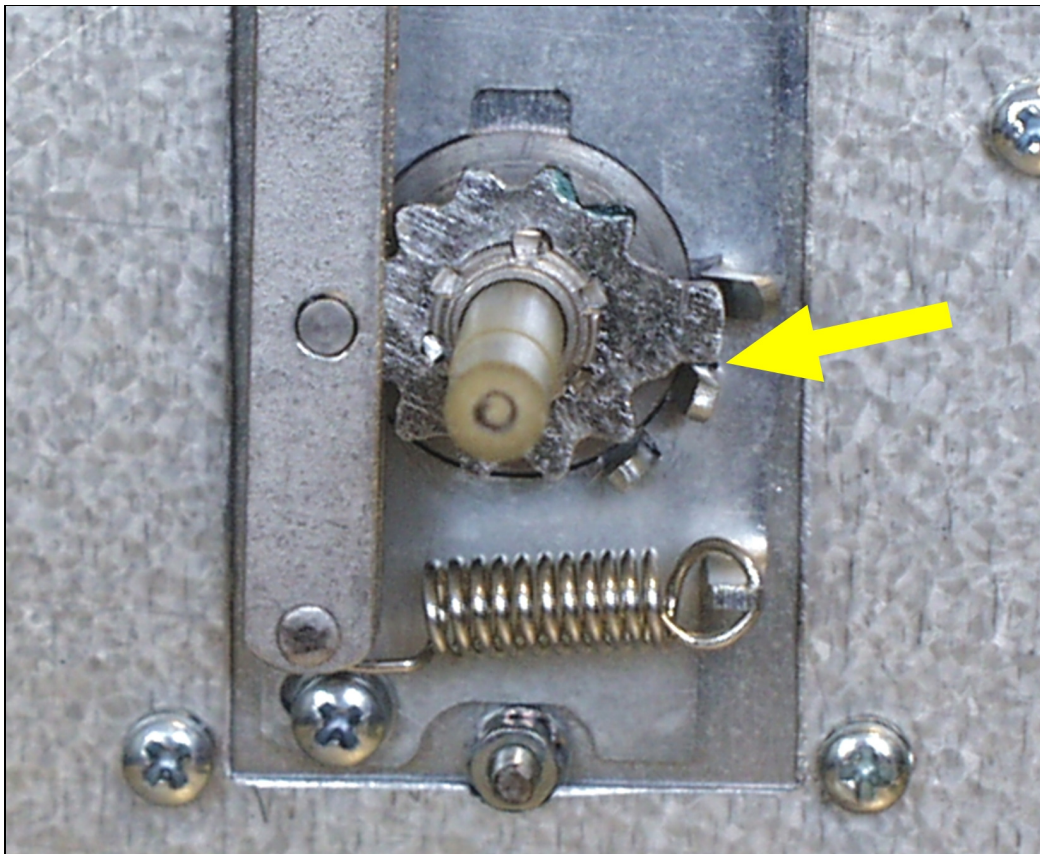


Figure 1. Block on 24-28MHz Band

97.307(a)(b). Inter-modulation & Linearity

Exciter operating in SSB (A3E, J3E) mode with two equal-tone audio applied to the microphone input. Amplifier under test driven to 700W PEP output at the center of the band with typically 60W PEP input power.

Inter-modulation in dB relative to 700W PEP per 97.307(a)(b)					
Order:	D3	D5	D7	D9	D11 and higher
Freq. (MHz)	dB	dB	dB	dB	dB
1.900	-43	-48	-45	-48	-51
3.750	-41	-48	-45	-48	-51
7.150	-41	-47	-46	-47	-50
10.125	-42	-47	-46	-48	-51
14.175	-42	-47	-46	-48	-51
18.100	-41	-47	-47	-49	-51
21.225	-42	-46	-48	-49	-52
24.930*	-42	-46	-48	-49	-51
28.500*	-43	-45	-47	-48	-51

*Not usable as shipped; data applicable only after authorized owner modification.

97.317(a)(2)&(3). When the amplifier is in the “standby” or “off” positions, but still connected to the exciter, no measurable spectrum change from the normal output of the exciter is detectable with the spectrum analyzer (noise floor approximately -105dBc) when amplifier is driven with 0 to 150 W mean RF power.

97.317(c). The amplifier possesses none of the prohibited characteristics listed in this section.

97.317(c)(6)(iii). The amplifier gain does not exceed 11.3 dB for any level of input signal.

97.317(c)(6)(iv). The amplifier is capable of greater than 50% duty cycle at rated power output, namely 700W PEP or 500W continuous carrier, with A1A, A3E (J3E), or F1B, F3E, and J3F emission.

97.317(c)(7). Amplifier gain is established principally by RF negative feedback in the cathode circuit. The input swamping resistor is used only to present a 50-Ohm load to the grid matching circuit, not as an attenuator. Removal of this resistor or changing its value will result in a severe load mismatch to the exciter output.

Additional data: Information and data supplied by tube manufacturer concerning 4CX250B tetrode is available by request from the manufacturer.