

Test Laboratory: SGS-SAR Lab

SN339D NR n41 100M QPSK 1RB1 518598CH Back side 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 39.886$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.68, 7.68, 7.68); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 8.13 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.093 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 6.06 W/kg; SAR(10 g) = 2.69 W/kg

Maximum value of SAR (measured) = 12.3 W/kg

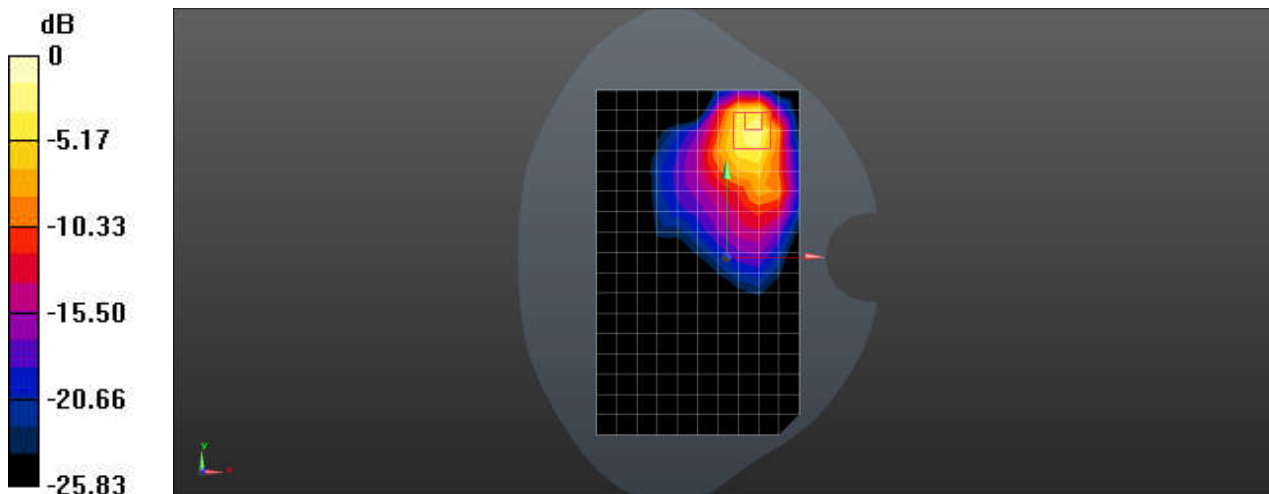

0 dB = 12.3 W/kg = 10.90 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n66 40M QPSK 108RB54 349000CH Right tilted 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 38.87$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.75, 8.75, 8.75); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.11 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.47 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.891 W/kg; SAR(10 g) = 0.418 W/kg

Maximum value of SAR (measured) = 1.35 W/kg

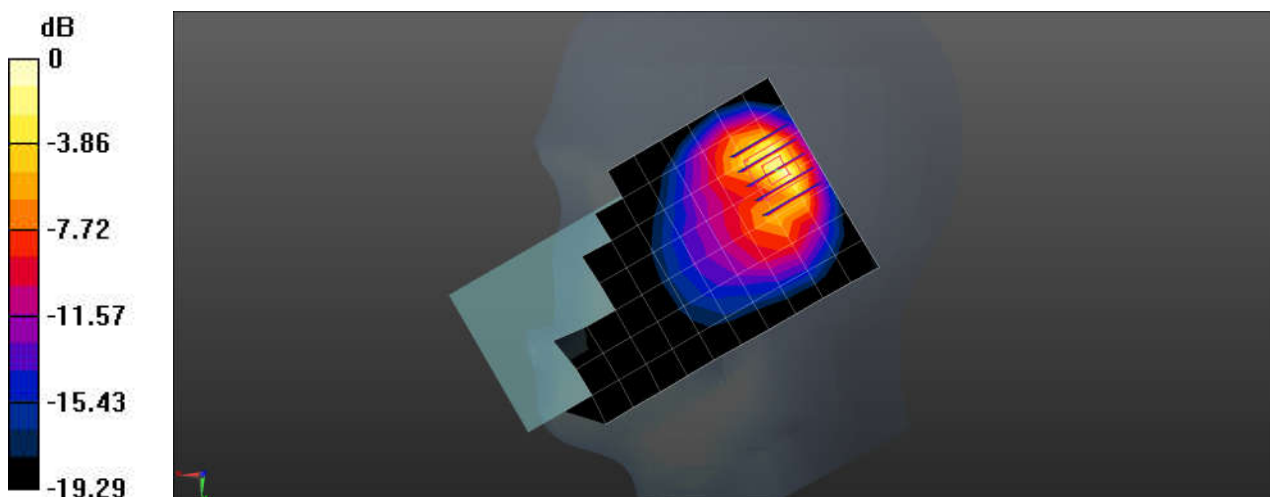

0 dB = 1.35 W/kg = 1.30 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n66 40M QPSK 108RB54 349000CH Back side 15mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 38.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.75, 8.75, 8.75); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.860 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.28 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.669 W/kg; SAR(10 g) = 0.401 W/kg

Maximum value of SAR (measured) = 0.943 W/kg

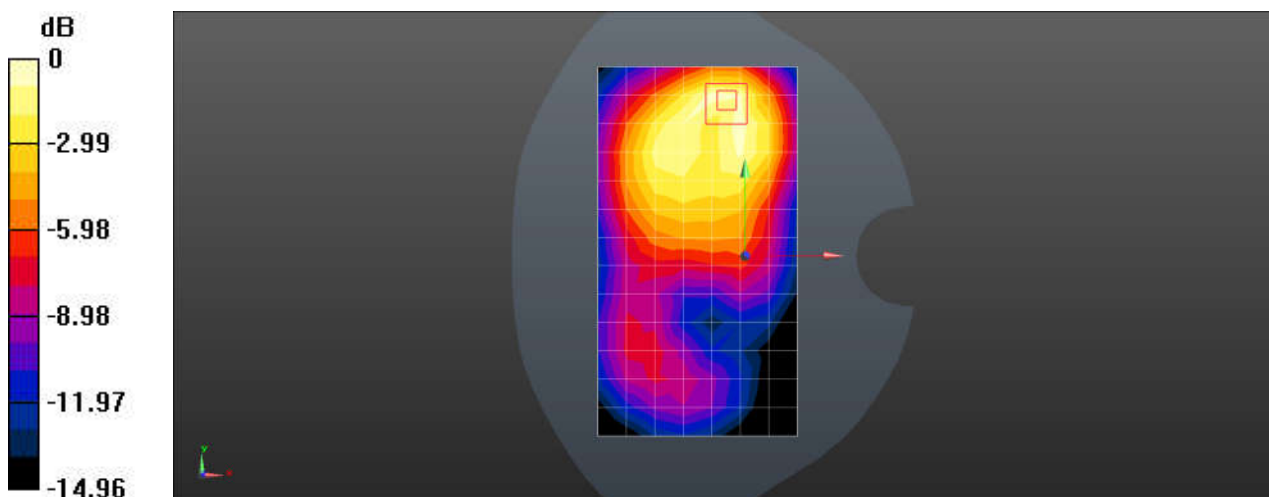

0 dB = 0.943 W/kg = -0.25 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n66 40M QPSK 108RB54 349000CH Top side 10mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 38.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.75, 8.75, 8.75); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.845 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.14 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.326 W/kg

Maximum value of SAR (measured) = 0.958 W/kg

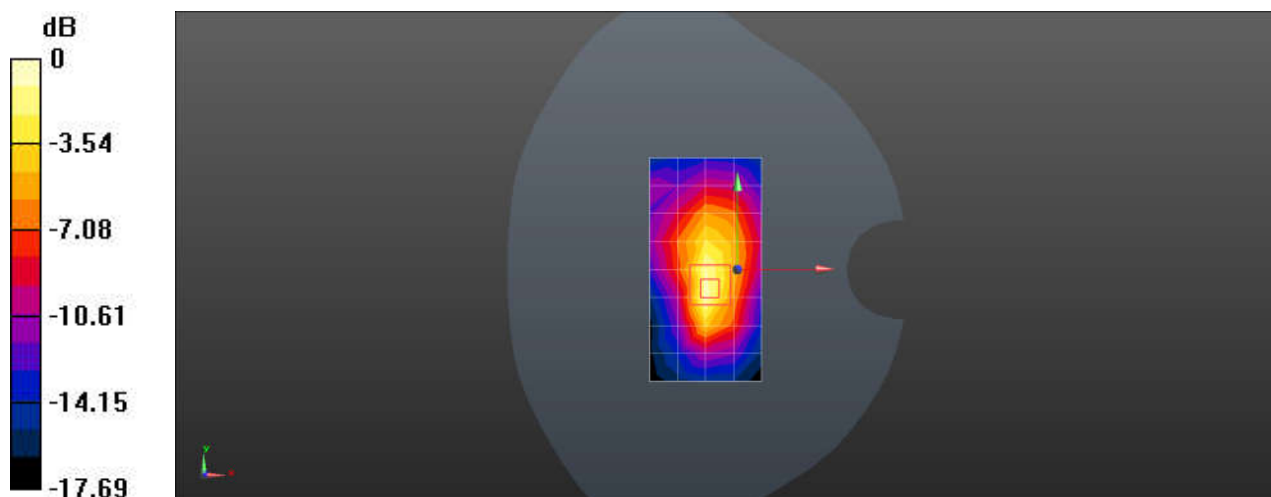

0 dB = 0.958 W/kg = -0.19 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n66 40M QPSK 1RB1 349000CH Top side 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 38.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.75, 8.75, 8.75); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.0 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 61.53 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 14.4 W/kg

SAR(1 g) = 5.71 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 11.4 W/kg

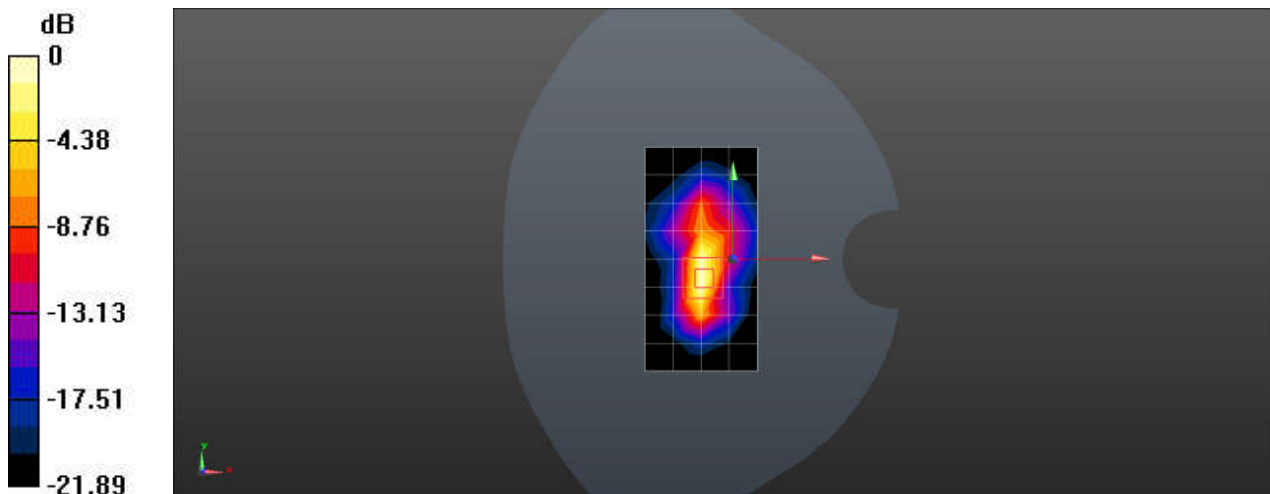

0 dB = 11.4 W/kg = 10.57 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n70 15M QPSK 36RB22 340500CH Right tilted 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 1702.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1702.5$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 38.985$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.75, 8.75, 8.75); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.861 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.27 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

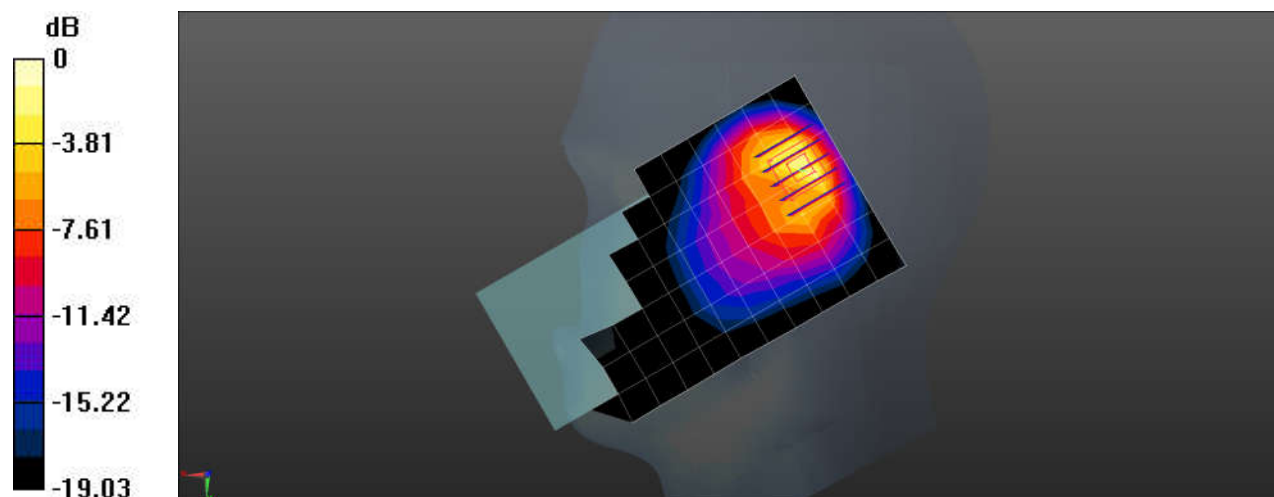

0 dB = 1.18 W/kg = 0.72 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n70 15M QPSK 36RB22 340500CH Back side 15mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 1702.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1702.5$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 38.985$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.75, 8.75, 8.75); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.626 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.810 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.618 W/kg

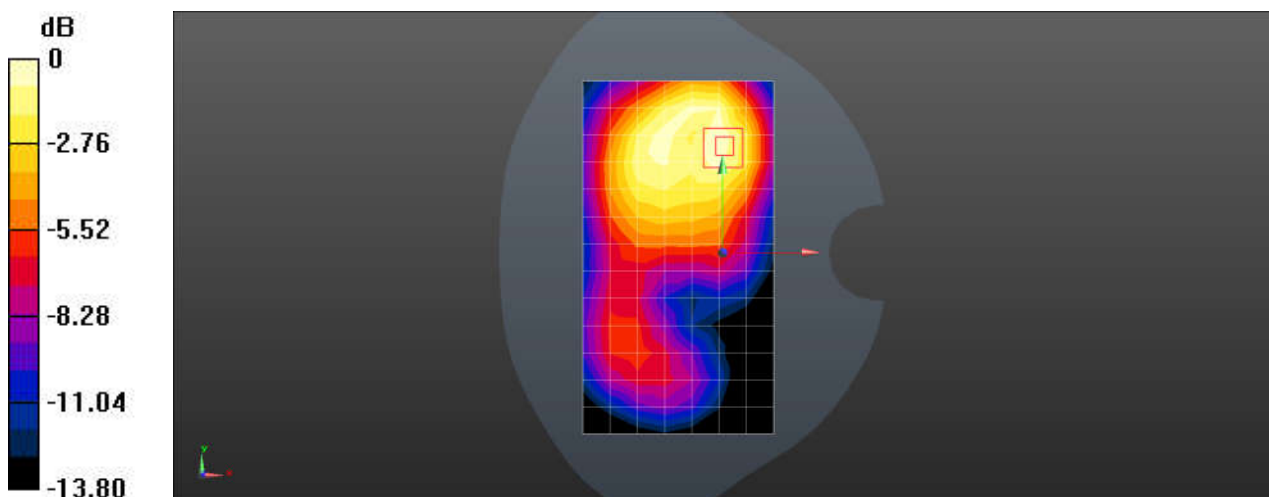

0 dB = 0.618 W/kg = -2.09 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n70 15M QPSK 36RB22 340500CH Back side 10mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 1702.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1702.5$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 38.985$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.75, 8.75, 8.75); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.11 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.224 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.788 W/kg; SAR(10 g) = 0.434 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

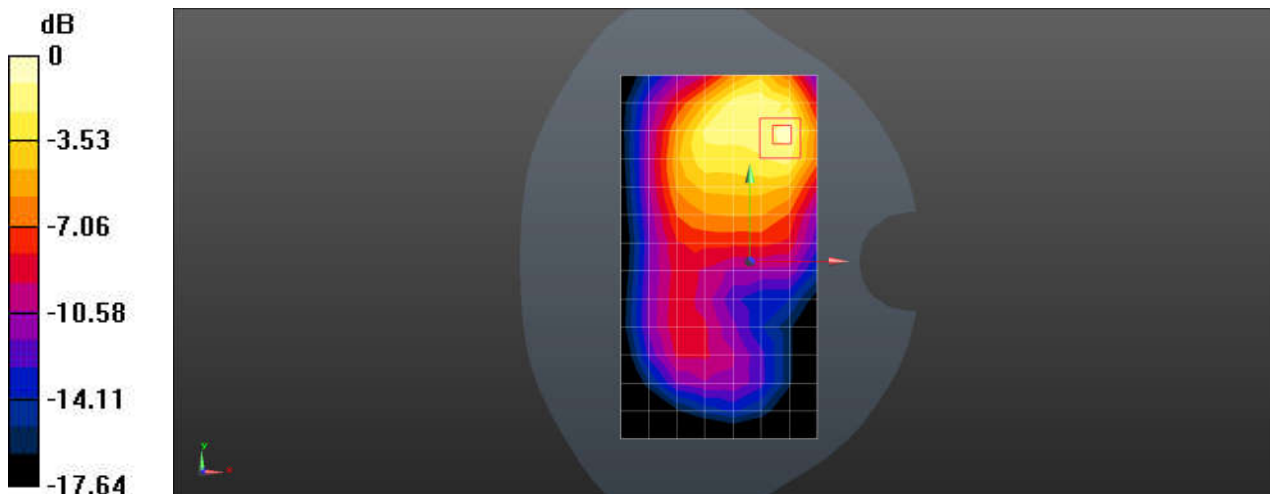

0 dB = 1.23 W/kg = 0.90 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n71 QPSK 20M 50RB28 136100CH Right cheek 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.845$ S/m; $\epsilon_r = 43.165$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.76, 10.76, 10.76); Calibrated: 2023-6-5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2023-11-3
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.309 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.191 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 0.311 W/kg

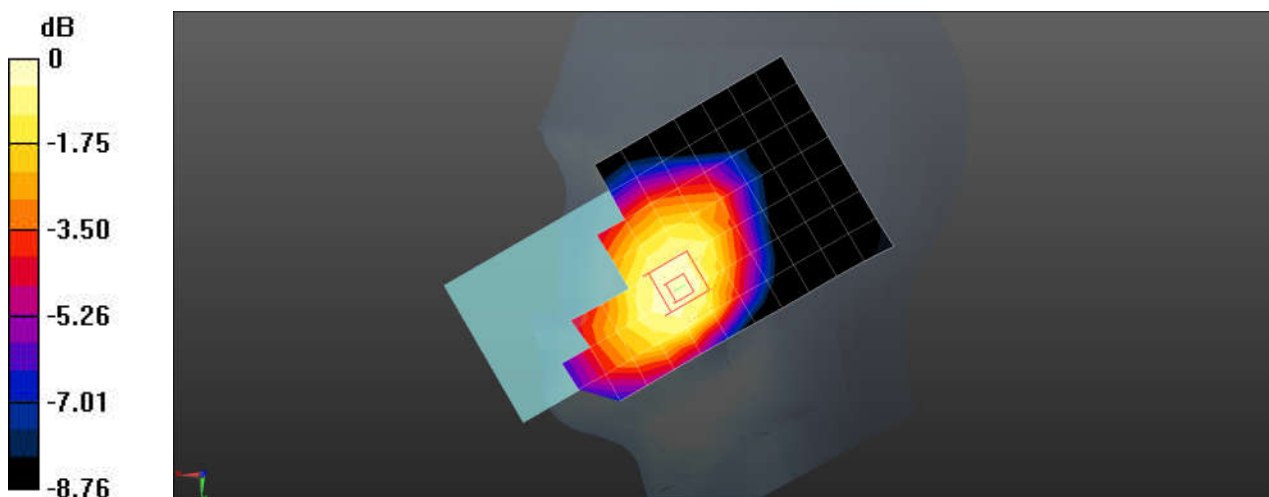

0 dB = 0.311 W/kg = -5.07 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n71 QPSK 20M 50RB28 136100CH Back side 15mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.845$ S/m; $\epsilon_r = 43.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.76, 10.76, 10.76); Calibrated: 2023-6-5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2023-11-3
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.460 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.66 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.281 W/kg

Maximum value of SAR (measured) = 0.460 W/kg

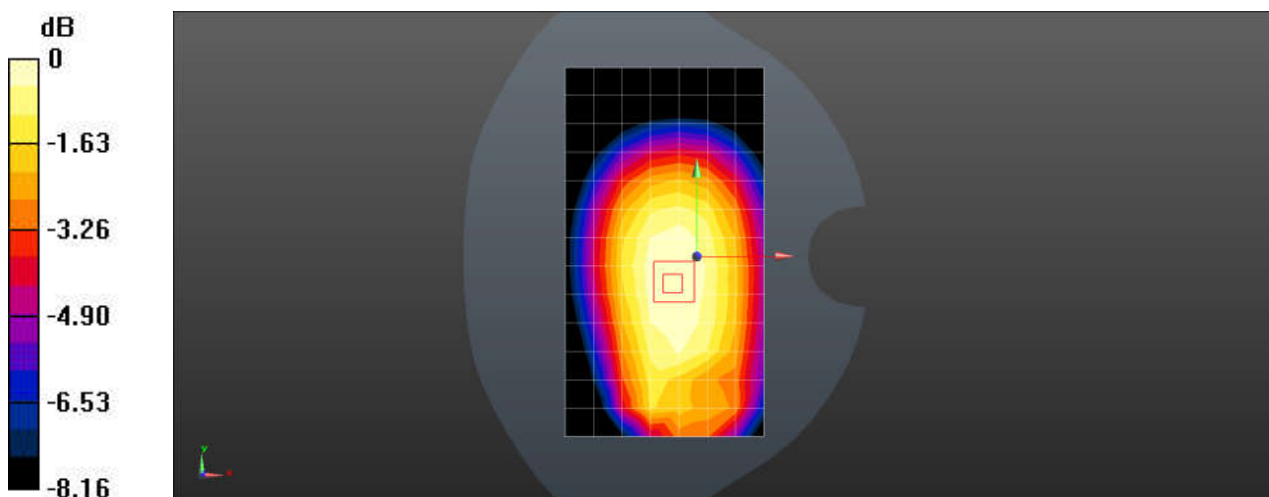

0 dB = 0.460 W/kg = -3.37 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n71 QPSK 20M 50RB28 136100CH Back side 10mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.845$ S/m; $\epsilon_r = 43.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.76, 10.76, 10.76); Calibrated: 2023-6-5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1740; Calibrated: 2023-11-3
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.705 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.48 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.893 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.704 W/kg

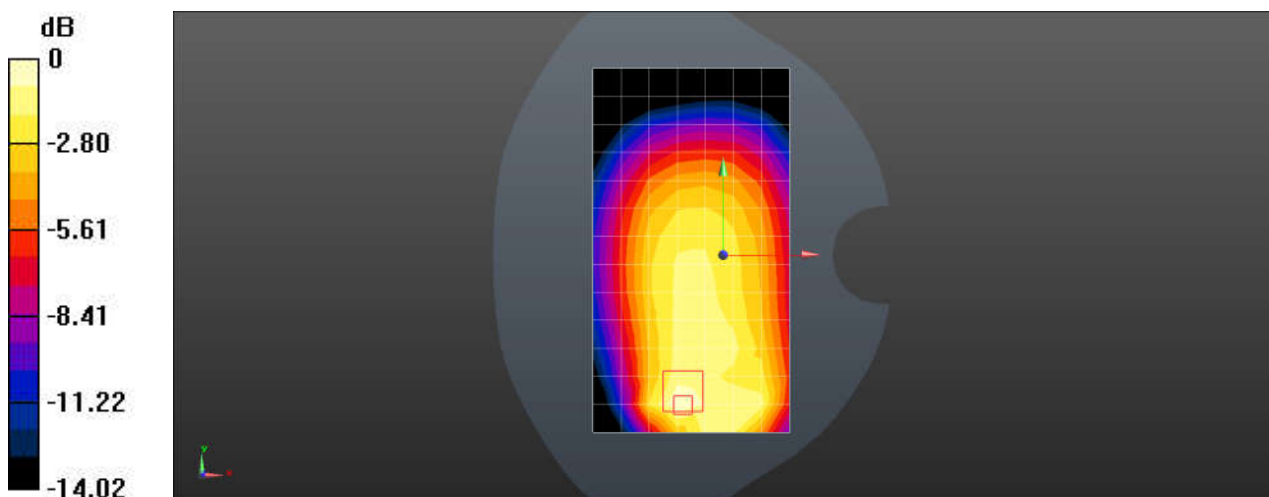

0 dB = 0.704 W/kg = -1.52 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n48 40M QPSK 50RB28 641666CH Left tilted 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 2.911$ S/m; $\epsilon_r = 38.212$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.02, 7.02, 7.02); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.54 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.86 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 0.921 W/kg; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 1.75 W/kg

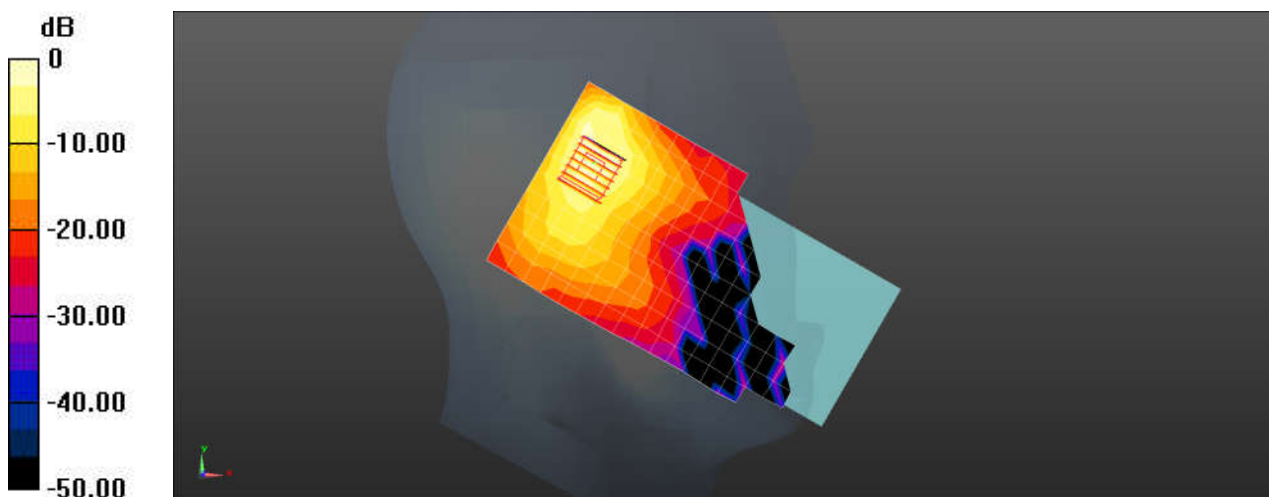

0 dB = 1.75 W/kg = 2.43 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n48 100M QPSK 54RB108 641666CH Back side 15mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 2.911$ S/m; $\epsilon_r = 38.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.02, 7.02, 7.02); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022-11-18
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.871 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.042 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.973 W/kg

SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 0.750 W/kg

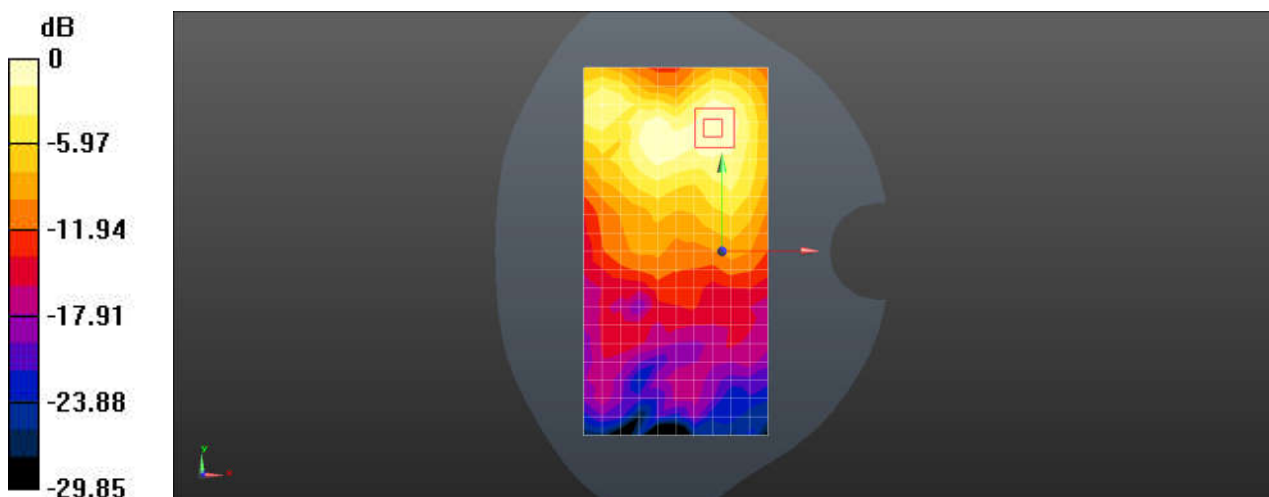

0 dB = 0.750 W/kg = -1.25 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n48 40M QPSK 1RB1 641666CH Back side 10mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 2.911$ S/m; $\epsilon_r = 38.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.02, 7.02, 7.02); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.13 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.651 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.897 W/kg; SAR(10 g) = 0.380 W/kg

Maximum value of SAR (measured) = 1.59 W/kg

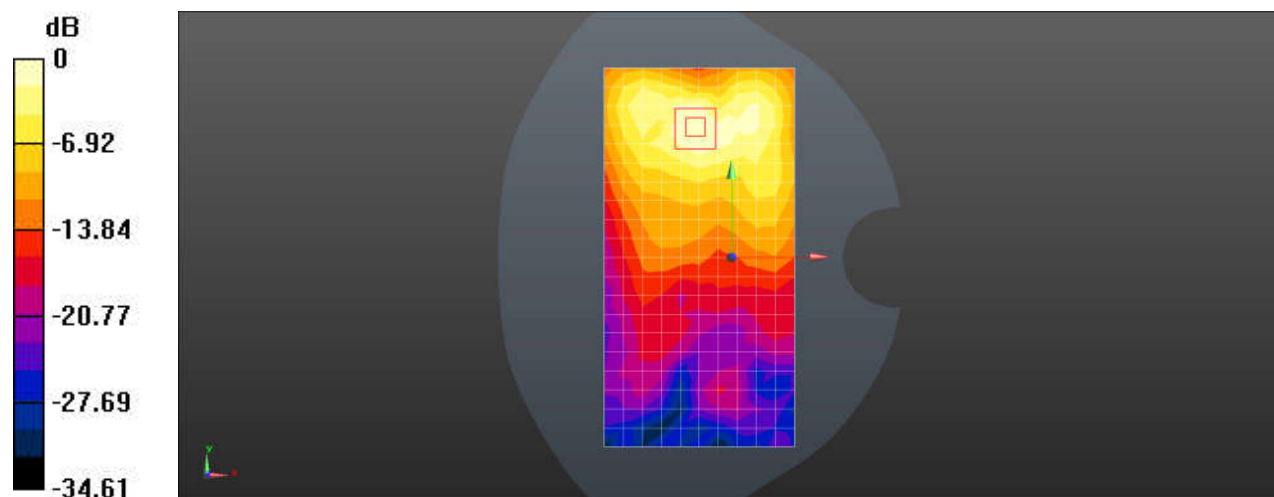

0 dB = 1.59 W/kg = 2.01 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n48 40M QPSK 1RB1 641666CH Back side 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 2.911$ S/m; $\epsilon_r = 38.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.02, 7.02, 7.02); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 10.6 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.4460 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 25.5 W/kg

SAR(1 g) = 6.58 W/kg; SAR(10 g) = 2.36 W/kg

Maximum value of SAR (measured) = 15.4 W/kg

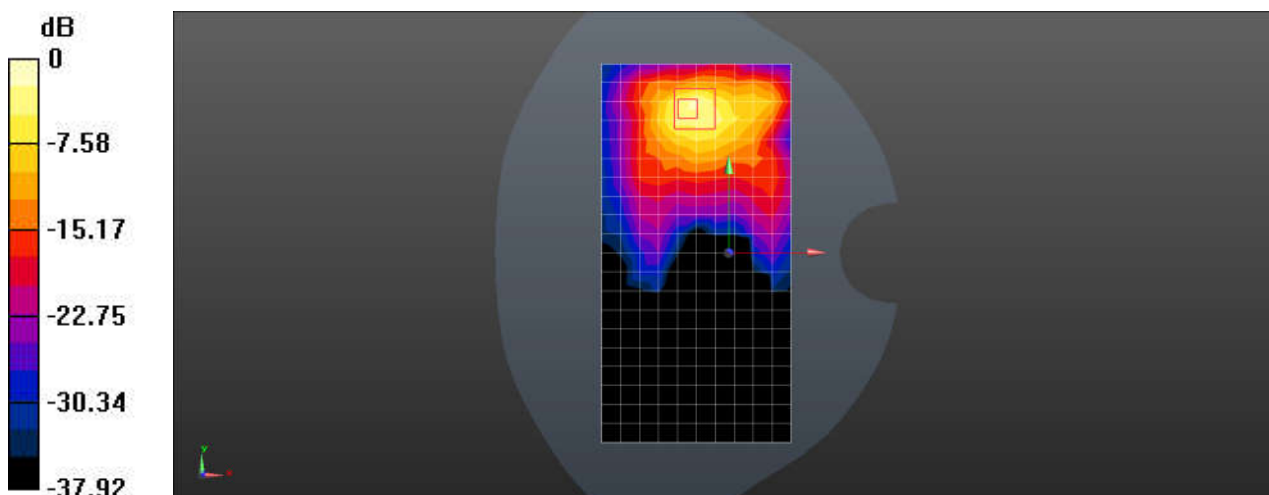

0 dB = 15.4 W/kg = 11.88 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n77 100M QPSK 135RB69 633334CH Left cheek 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.22, 7.22, 7.22); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.66 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.21 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.911 W/kg; SAR(10 g) = 0.370 W/kg

Maximum value of SAR (measured) = 1.72 W/kg

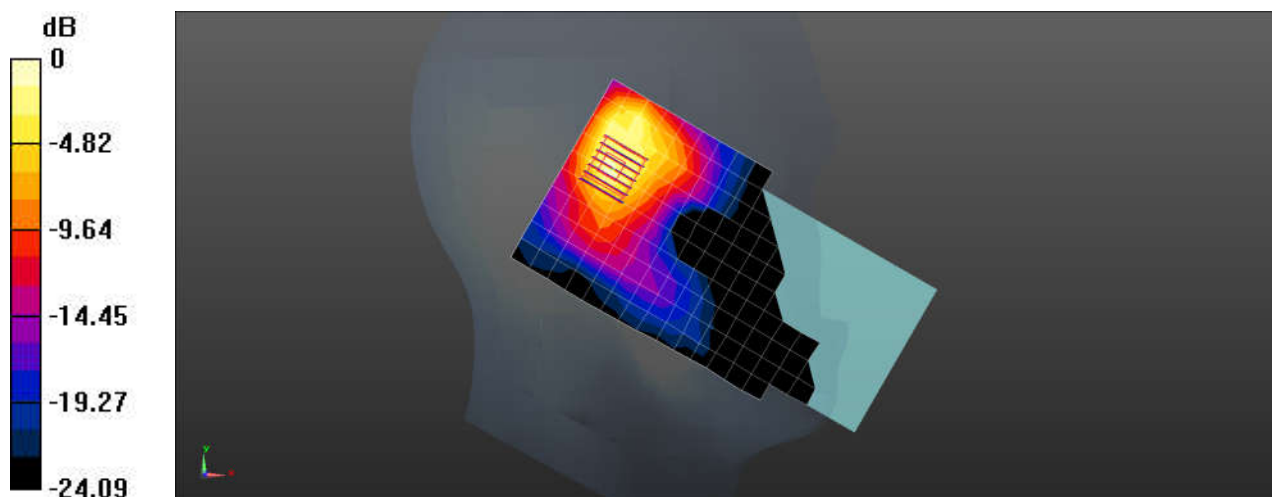

0 dB = 1.72 W/kg = 2.36 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n77 100M QPSK 135RB69 633334CH Back side 15mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.22, 7.22, 7.22); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (13x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.16 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.765 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

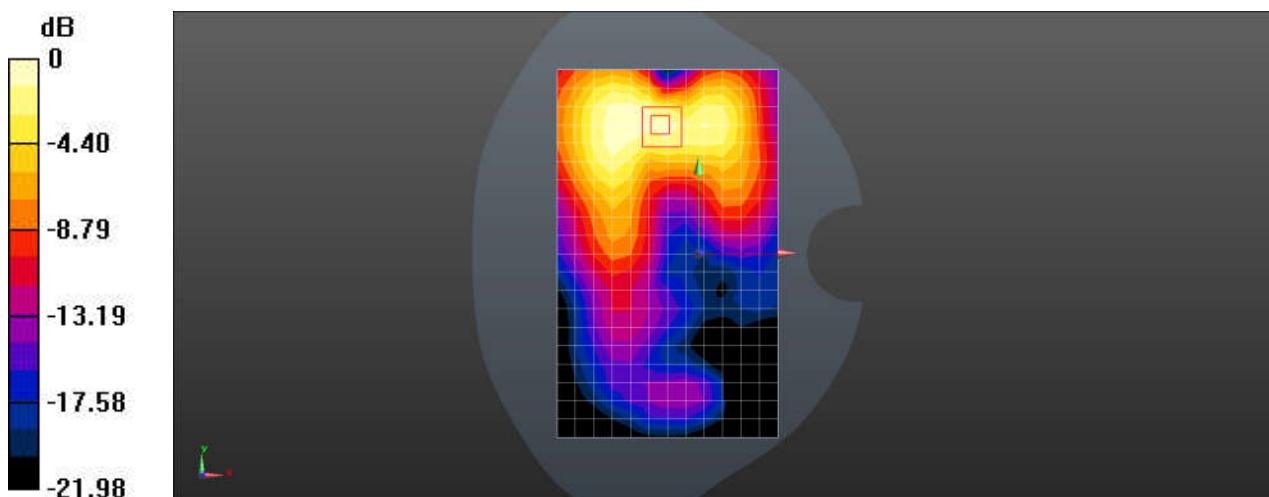

0 dB = 1.25 W/kg = 0.97 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n77 100M QPSK 135RB69 633334CH Back side 10mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.22, 7.22, 7.22); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.60 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.531 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 0.982 W/kg; SAR(10 g) = 0.425 W/kg

Maximum value of SAR (measured) = 1.79 W/kg

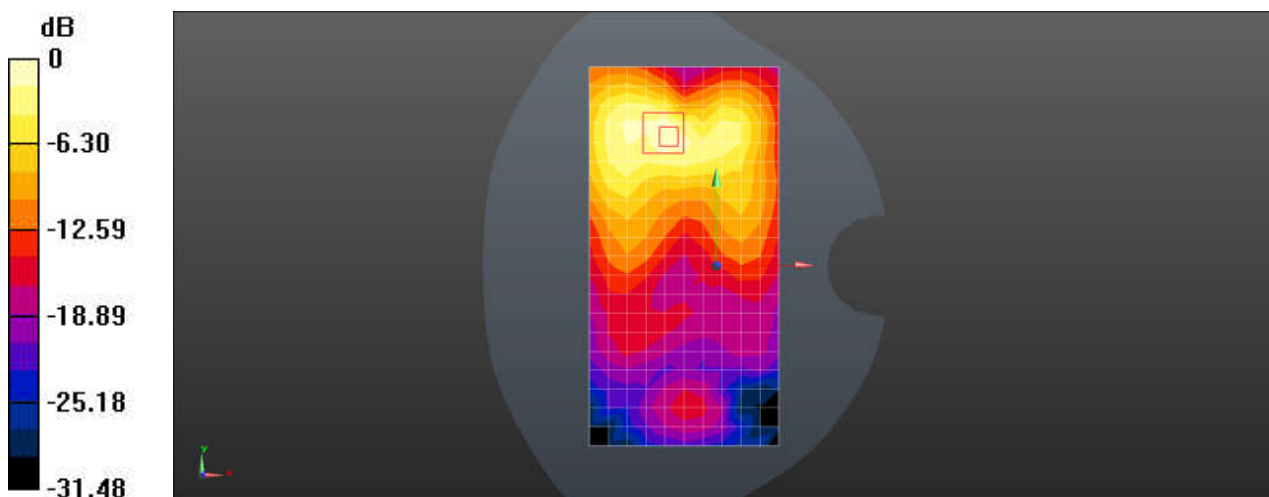

0 dB = 1.79 W/kg = 2.53 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n77 100M QPSK 135RB69 633334CH Back side 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.22, 7.22, 7.22); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 10.8 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 21.4 W/kg

SAR(1 g) = 5.89 W/kg; SAR(10 g) = 1.99 W/kg

Maximum value of SAR (measured) = 13.2 W/kg

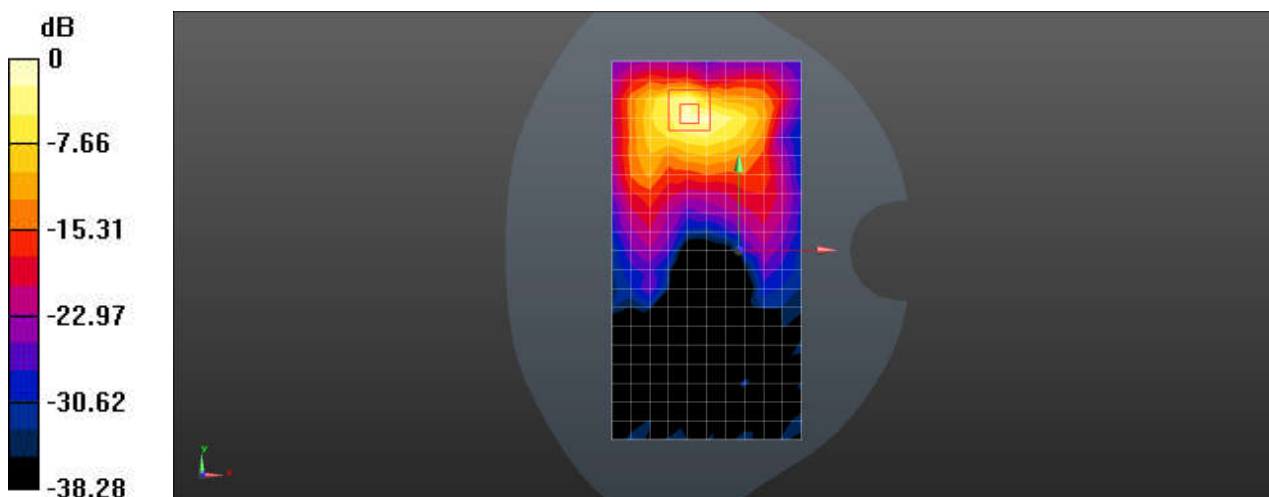

0 dB = 13.2 W/kg = 11.21 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n77 100M QPSK 135RB69 656000CH Left cheek 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used: $f = 3840$ MHz; $\sigma = 3.139$ S/m; $\epsilon_r = 37.554$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.9, 6.9, 6.9); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.86 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.679 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.48 W/kg

SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.353 W/kg

Maximum value of SAR (measured) = 1.91 W/kg

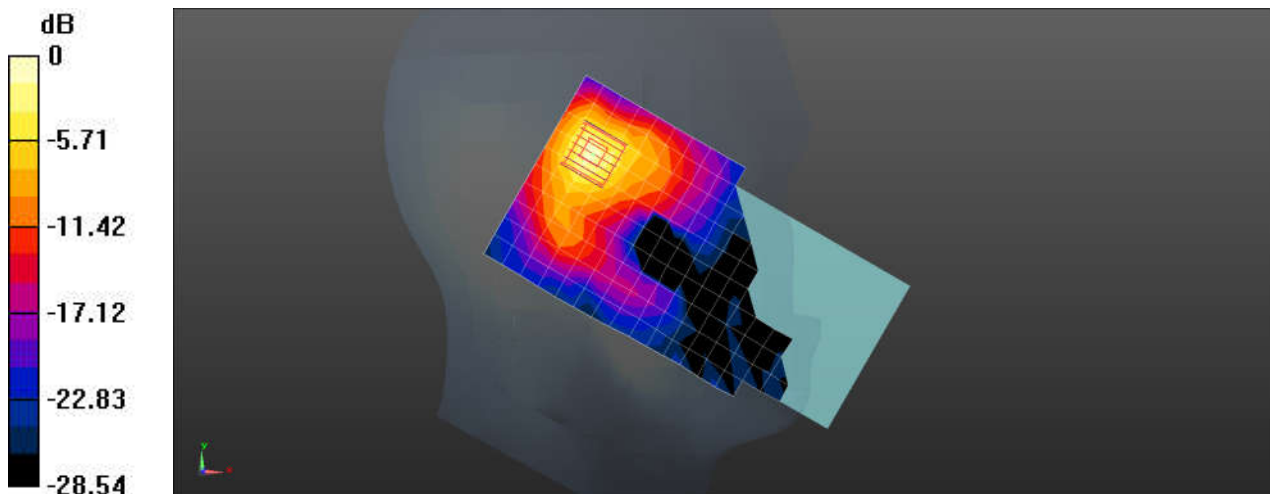

0 dB = 1.91 W/kg = 2.81 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n77 PC2 100M QPSK 135RB69 656000CH Back side 15mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used: $f = 3840$ MHz; $\sigma = 3.139$ S/m; $\epsilon_r = 37.554$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.9, 6.9, 6.9); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (13x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.65 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.184 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 0.929 W/kg; SAR(10 g) = 0.391 W/kg

Maximum value of SAR (measured) = 1.79 W/kg

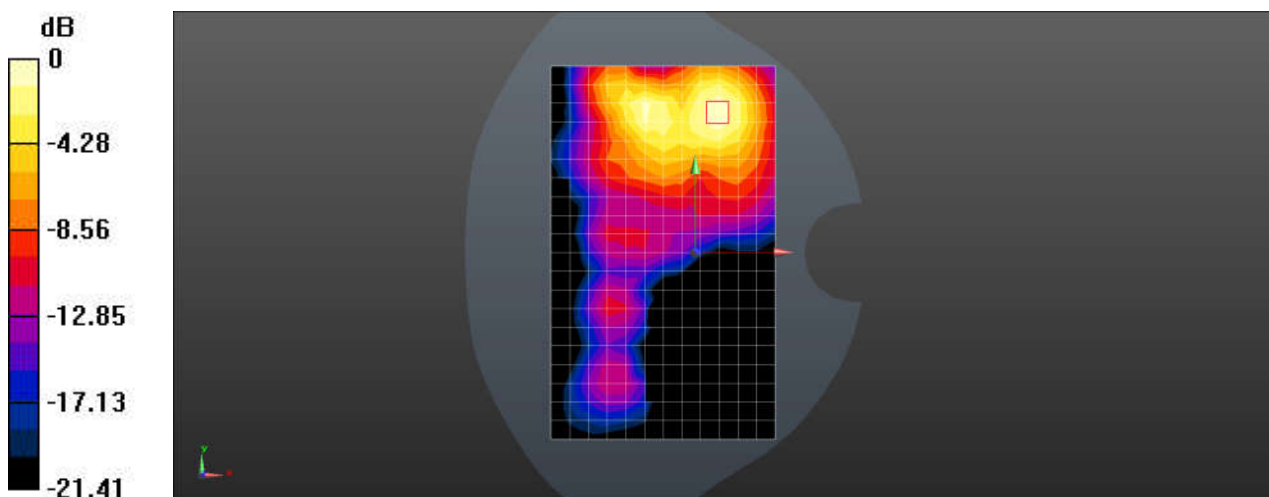

0 dB = 1.79 W/kg = 2.53 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D NR n77 100M QPSK 135RB69 656000CH Back side 10mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used: $f = 3840$ MHz; $\sigma = 3.139$ S/m; $\epsilon_r = 37.554$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.9, 6.9, 6.9); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (13x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.48 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.056 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.891 W/kg; SAR(10 g) = 0.383 W/kg

Maximum value of SAR (measured) = 1.55 W/kg

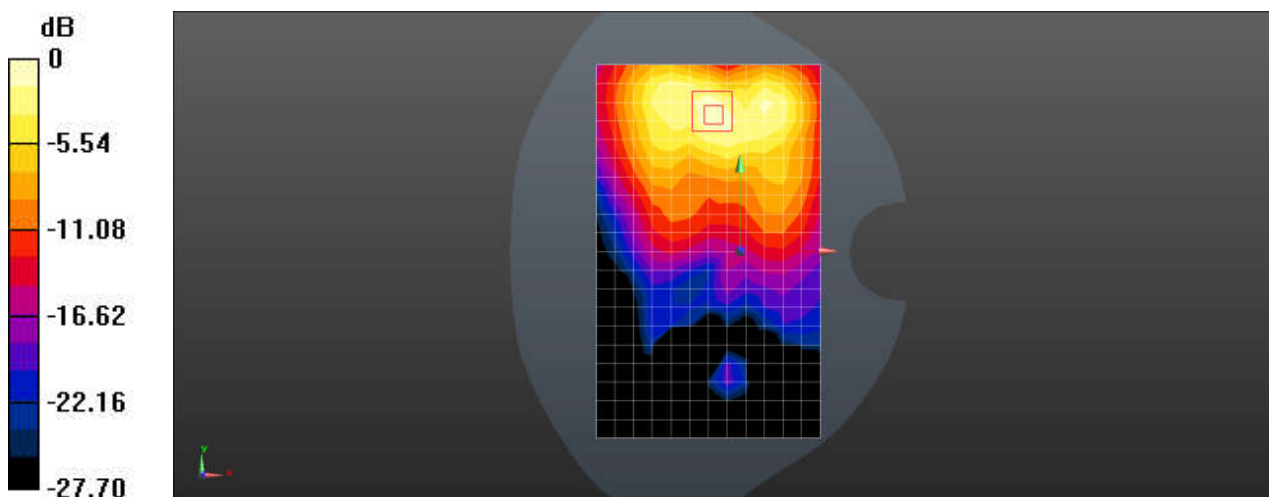

0 dB = 1.55 W/kg = 1.90 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D WIFI2.4G 802.11b 6CH Left cheek 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.772$ S/m; $\epsilon_r = 38.465$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.440 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.522 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.494 W/kg

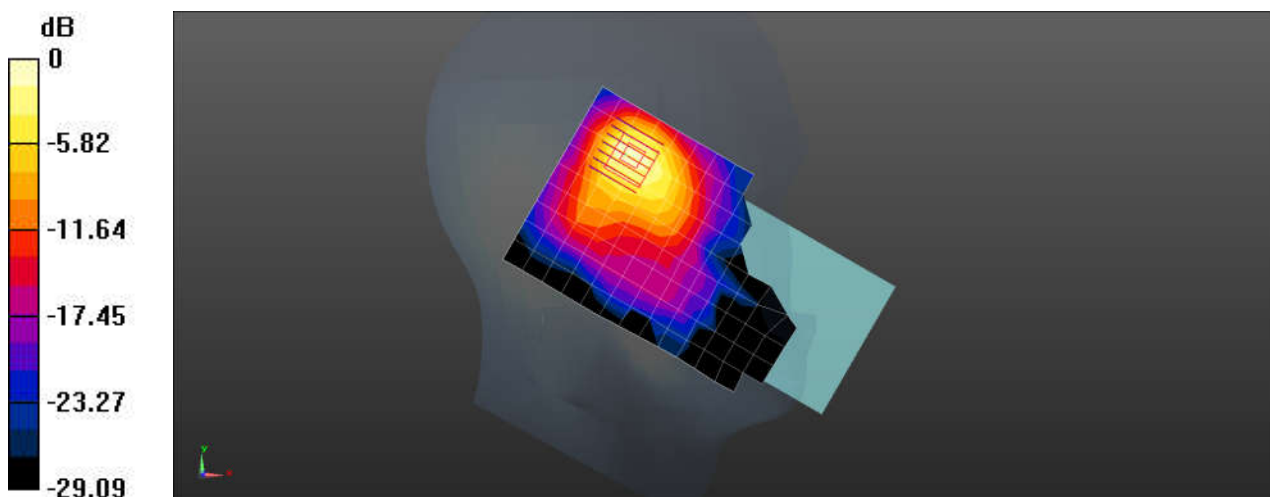

0 dB = 0.494 W/kg = -3.06 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D WIFI2.4G 802.11b 6CH Back side 15mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.772$ S/m; $\epsilon_r = 38.465$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.388 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.443 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.531 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 0.441 W/kg

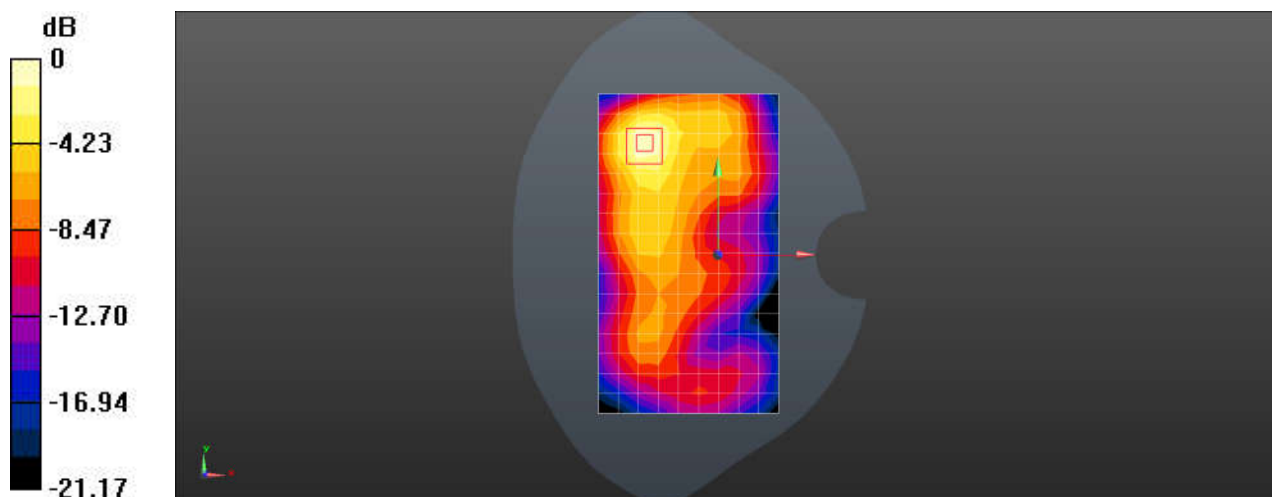

0 dB = 0.441 W/kg = -3.56 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D WIFI2.4G 802.11b 6CH Back side 10mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.772$ S/m; $\epsilon_r = 38.465$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.437 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.894 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.480 W/kg

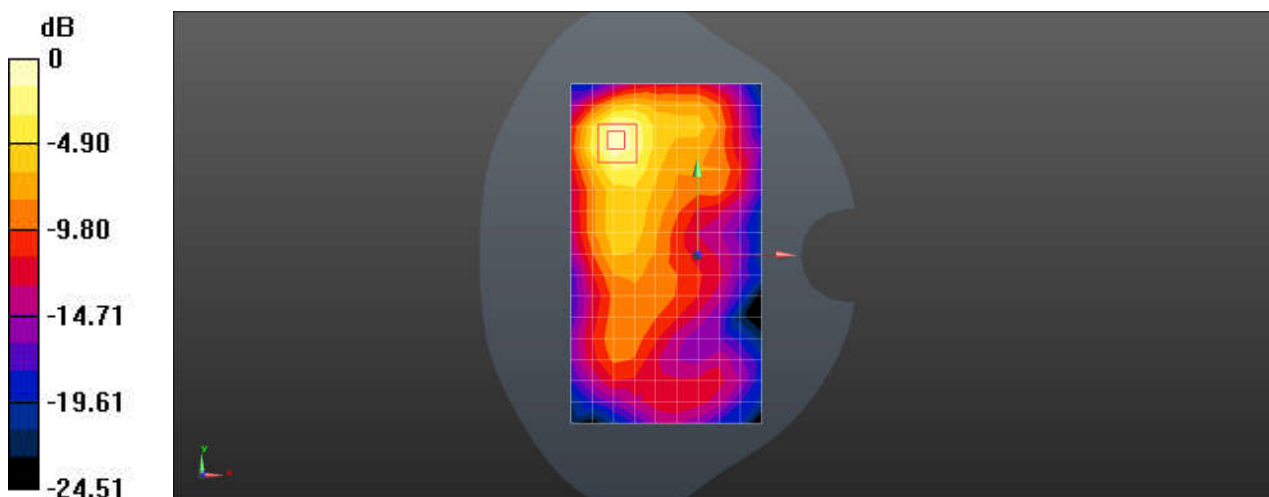

0 dB = 0.480 W/kg = -3.19 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D WIFI5G 802.11a 64CH Left tilted 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5320 MHz;Duty Cycle: 1:1.029

Medium: HSL5000;Medium parameters used: $f = 5320$ MHz; $\sigma = 4.803$ S/m; $\epsilon_r = 35.354$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.52, 5.52, 5.52); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.668 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.330 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.711 W/kg

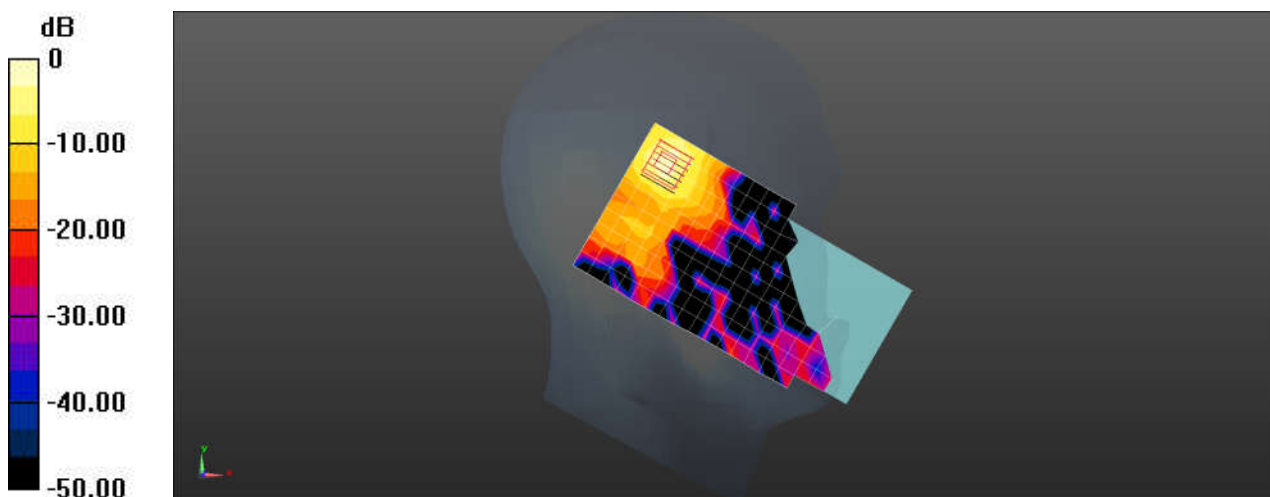

0 dB = 0.711 W/kg = -1.48 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D WIFI5G 802.11a 100CH Left tilted 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5500 MHz;Duty Cycle: 1:1.029

Medium: HSL5000;Medium parameters used: $f = 5500$ MHz; $\sigma = 5.013$ S/m; $\epsilon_r = 34.971$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(4.95, 4.95, 4.95); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.633 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.5610 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.990 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.687 W/kg

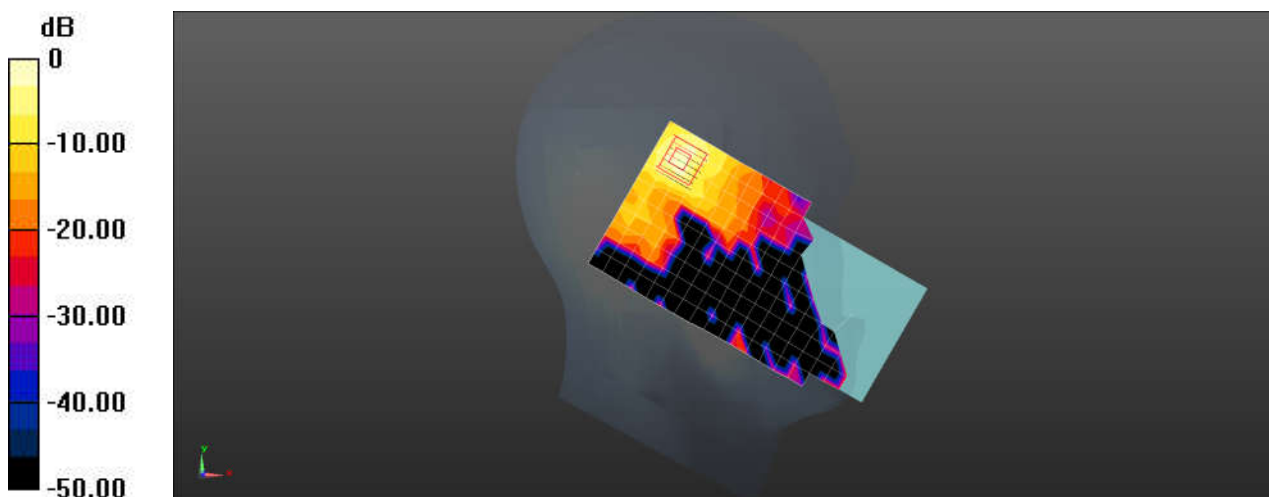

0 dB = 0.687 W/kg = -1.63 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D WIFI5G 802.11a 157CH Left tilted 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5785 MHz; Duty Cycle: 1:1.029

Medium: HSL5000; Medium parameters used: $f = 5785$ MHz; $\sigma = 5.432$ S/m; $\epsilon_r = 34.423$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.05, 5.05, 5.05); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.559 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.522 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.714 W/kg

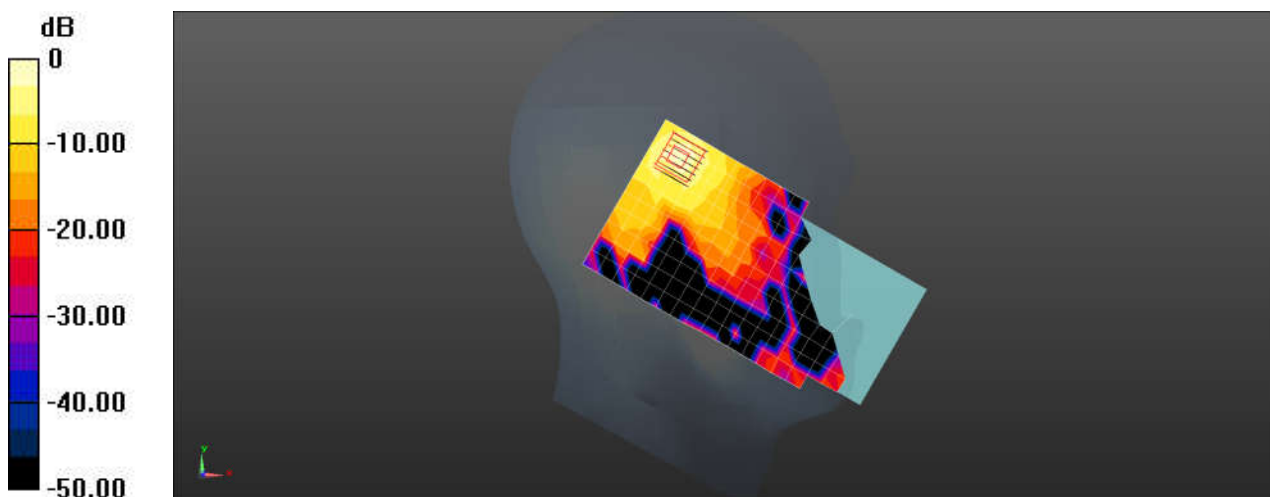

0 dB = 0.714 W/kg = -1.46 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D WIFI5G 802.11a 64CH Back side 15mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5320 MHz; Duty Cycle: 1:1.029

Medium: HSL5000; Medium parameters used: $f = 5320$ MHz; $\sigma = 4.803$ S/m; $\epsilon_r = 35.354$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.52, 5.52, 5.52); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.561 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.846 W/kg

SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.593 W/kg

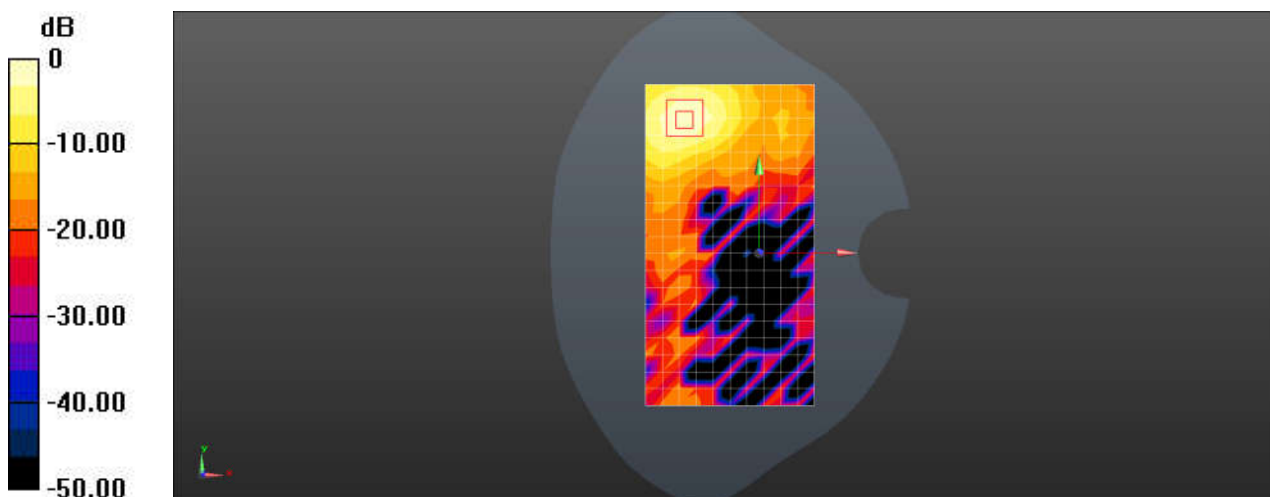

Test Laboratory: SGS-SAR Lab

SN339D WIFI5G 802.11a 100CH Back side 15mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5500 MHz; Duty Cycle: 1:1.029

Medium: HSL5000; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.013$ S/m; $\epsilon_r = 34.971$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(4.95, 4.95, 4.95); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.505 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.751 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.524 W/kg

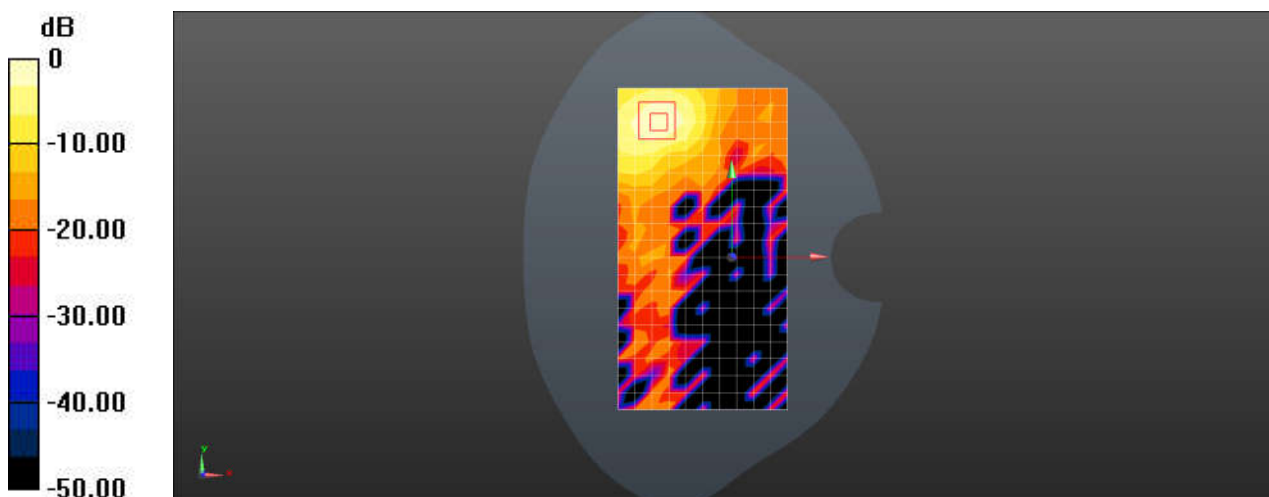

0 dB = 0.524 W/kg = -2.81 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D WIFI5G 802.11a 157CH Back side 15mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5785 MHz;Duty Cycle: 1:1.029

Medium: HSL5000;Medium parameters used: $f = 5785$ MHz; $\sigma = 5.432$ S/m; $\epsilon_r = 34.423$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.05, 5.05, 5.05); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.514 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

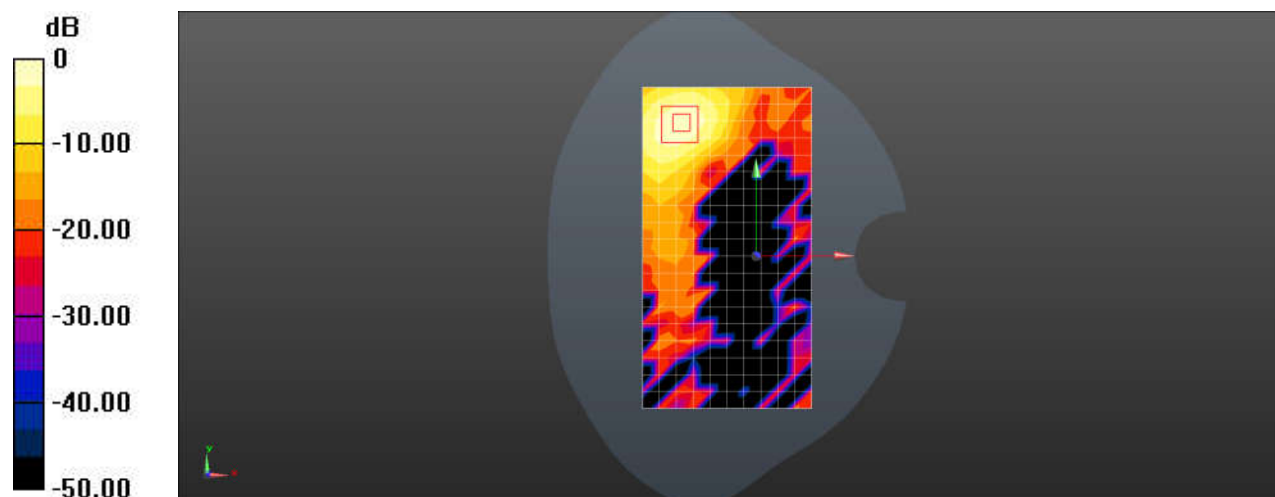

0 dB = 0.556 W/kg = -2.55 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D WIFI5G 802.11a 48CH Back side 10mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5240 MHz;Duty Cycle: 1:1.029

Medium: HSL5000;Medium parameters used: $f = 5240$ MHz; $\sigma = 4.692$ S/m; $\epsilon_r = 35.515$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.52, 5.52, 5.52); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.506 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.908 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.633 W/kg

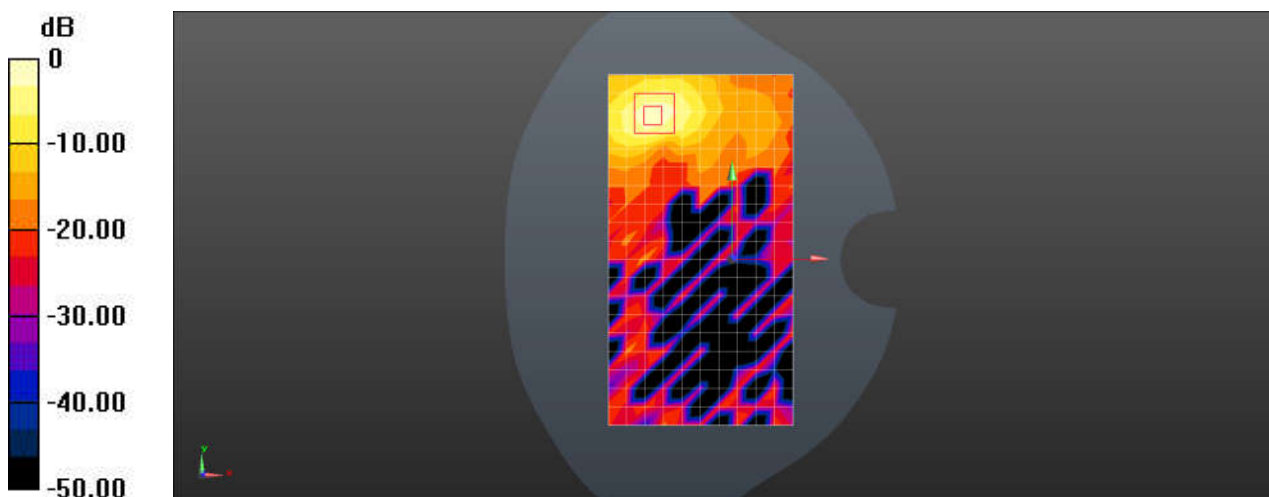

Test Laboratory: SGS-SAR Lab

SN339D WIFI5G 802.11a 157CH Back side 10mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5785 MHz; Duty Cycle: 1:1.029

Medium: HSL5000; Medium parameters used: $f = 5785$ MHz; $\sigma = 5.432$ S/m; $\epsilon_r = 34.423$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.05, 5.05, 5.05); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.529 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.671 W/kg

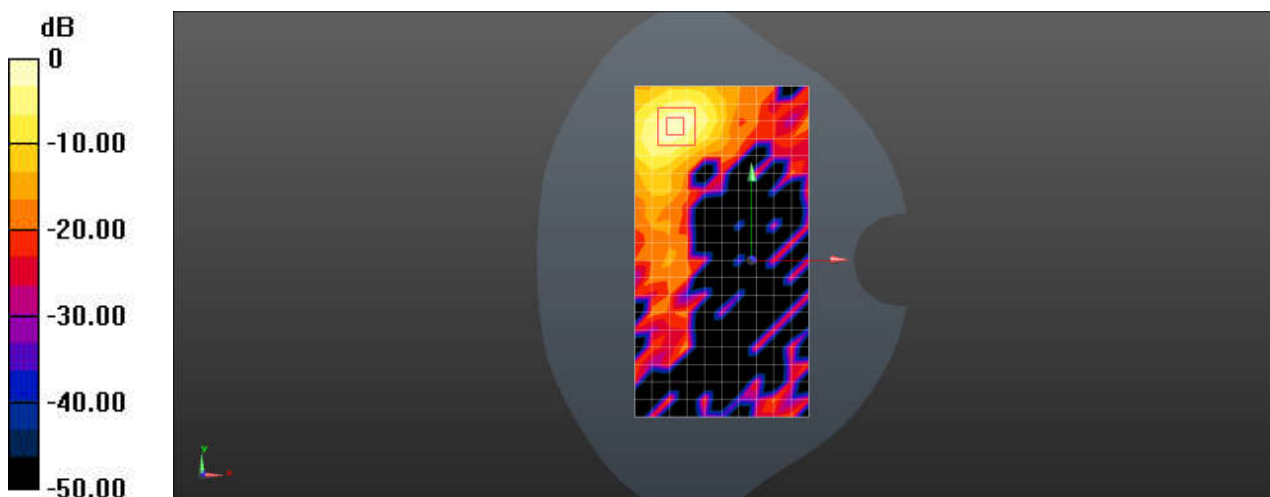

0 dB = 0.671 W/kg = -1.73 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D WIFI5G 802.11a 64CH Top side 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5320 MHz;Duty Cycle: 1:1.029

Medium: HSL5000;Medium parameters used: $f = 5320$ MHz; $\sigma = 4.803$ S/m; $\epsilon_r = 35.354$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.52, 5.52, 5.52); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 5.39 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.831 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 12.6 W/kg

SAR(1 g) = 2.72 W/kg; SAR(10 g) = 0.603 W/kg

Maximum value of SAR (measured) = 7.67 W/kg

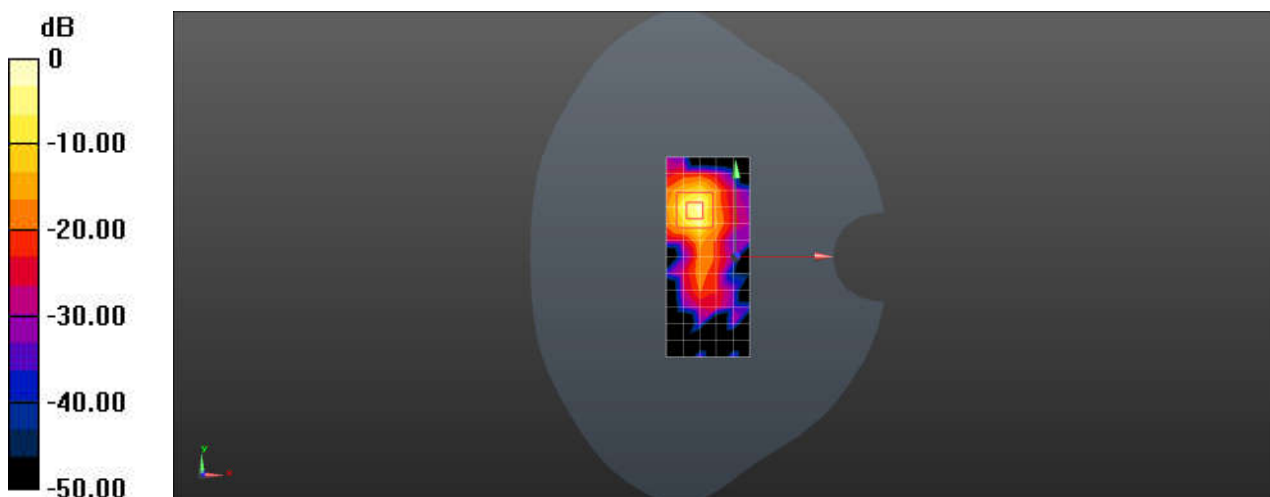

Test Laboratory: SGS-SAR Lab

SN339D WIFI5G 802.11a 100CH Back side 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5500 MHz;Duty Cycle: 1:1.029

Medium: HSL5000;Medium parameters used: $f = 5500$ MHz; $\sigma = 5.013$ S/m; $\epsilon_r = 34.971$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(4.95, 4.95, 4.95); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.76 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 2.81 W/kg; SAR(10 g) = 0.589 W/kg

Maximum value of SAR (measured) = 9.31 W/kg

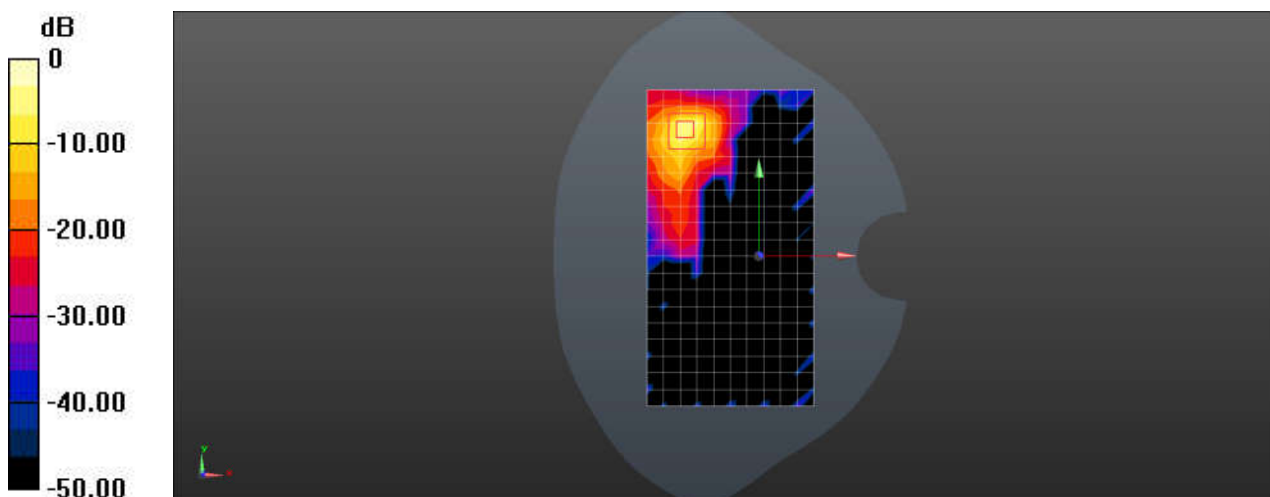

0 dB = 9.31 W/kg = 9.69 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D Bluetooth DH5 39CH Left cheek 0mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.762$ S/m; $\epsilon_r = 38.463$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.212 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.931 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.238 W/kg

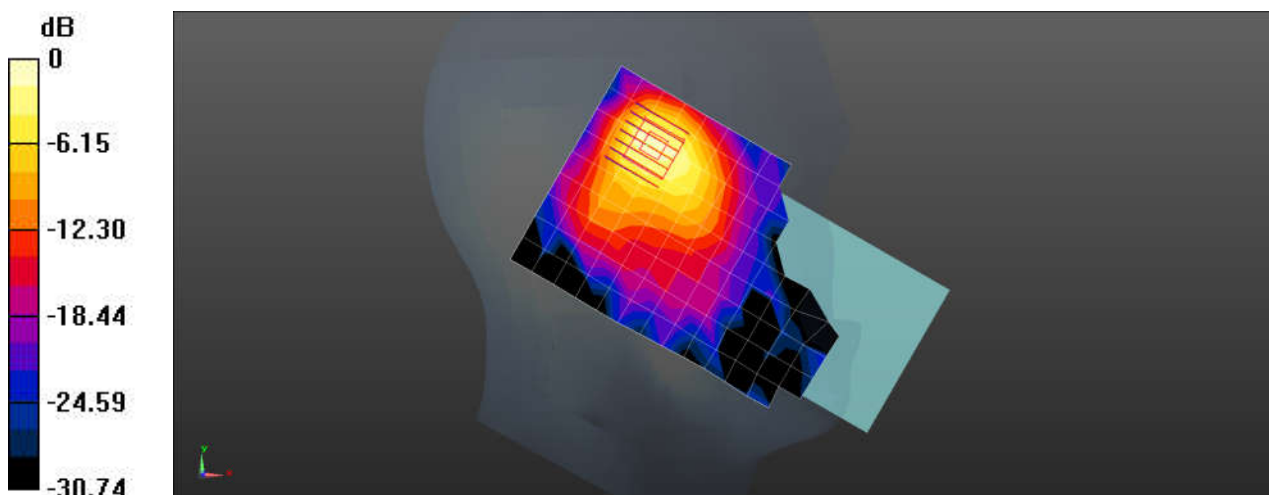

0 dB = 0.238 W/kg = -6.23 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D Bluetooth DH5 39CH Back side 15mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.762$ S/m; $\epsilon_r = 38.463$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0271 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.191 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00802 W/kg

Maximum value of SAR (measured) = 0.0279 W/kg

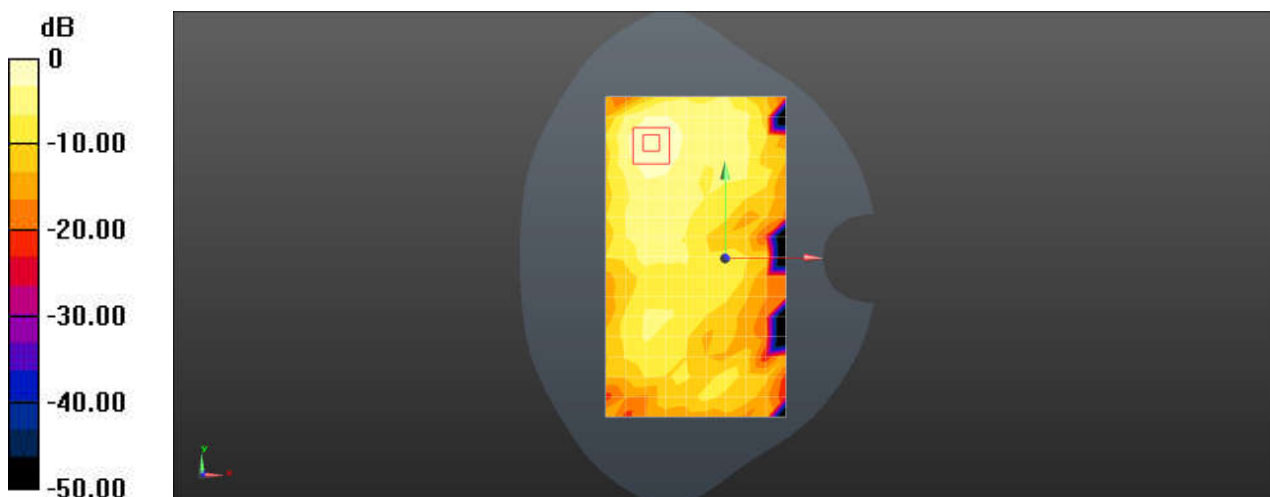

0 dB = 0.0279 W/kg = -15.54 dBW/kg

Test Laboratory: SGS-SAR Lab

SN339D Bluetooth DH5 39CH Top side 10mm

DUT: SN339D; Type: Smart Phone; Serial: 356704760005501

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.762$ S/m; $\epsilon_r = 38.463$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2023-2-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0370 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.397 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0392 W/kg

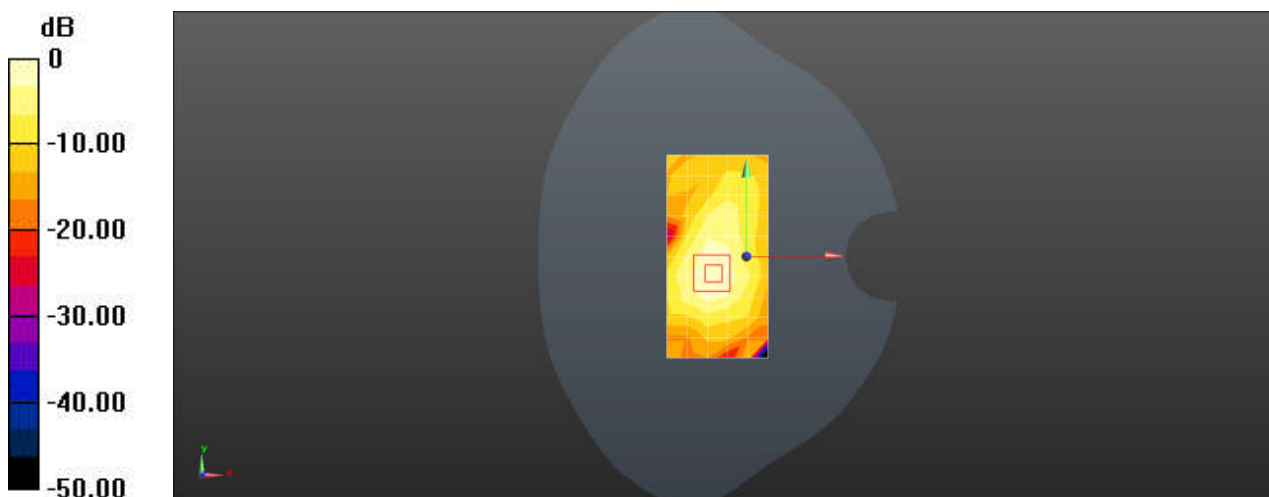

0 dB = 0.0392 W/kg = -14.07 dBW/kg